



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E038R-016

Applicant : DECKTRON CO., LTD.
Address : 187-3, Sinbong-Dong, Hungduk-Ku, Cheongju-Si, Chungcheongbuk-Do, 361-839, Korea
Manufacturer : DECKTRON CO., LTD.
Address : 187-3, Sinbong-Dong, Hungduk-Ku, Cheongju-Si, Chungcheongbuk-Do, 361-839, Korea
Type of Equipment : MP3 PLAYER
FCC ID : P42IMP4000
Model Name : IMP-4000
Multiple Model Name : IMP-4128, IMP-4256
Serial Number : N/A
Total page of Report : 13 pages (including this page)
Date of Incoming : June 24, 2003
Date of Issuing : August 08, 2003

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: 
G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION	4
2.2 MODEL DIFFERENCES:	4
2.3 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION.....	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS.....	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST.....	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT.....	13

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : DECKTRON CO., LTD.
- ADDRESS : 187-3, Sinbong-Dong, Hungduk-Ku, Cheongju-Si, Chungcheongbuk-Do, 361-839, Korea
- CONTACT PERSON : Mr. Jang-Hyuck, Ahn / Assist Manager
- TELEPHONE NO : +82-43-269-9671
- FCC ID : P42IMP4000
- MODEL NAME : IMP-4000
- SERIAL NUMBER : N/A
- DATE : August 08, 2003

DEVICE TYPE	UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	MP3 PLAYER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	Yes
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The DECKTRON CO., LTD., Model IMP-4000 (referred to as the EUT in this report) is a MP3 PLAYER that is a personal computer peripheral with USB standard port and has functions of MP3 player and FM broadcast receiver. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	32.768 MHz on Main Board
MULTI-FUNCTION	MP3 Player, FM Broadcast Receiver
FM TUNER MODULE MFR./MODEL NAME	A & T Technology / ATM-310
NUMBER OF LAYERS	Main Board : 6 Layers
EXTERNAL CONNECTOR	Earphone Jack, Line In, USB

2.2 Model Differences:

The difference(s) compared to the EUT is as follows:

		Model Differences
Basic Model	IMP-4000	-
Multiple Model	IMP-4128, IMP-4256	Only type designation by a memory size of the EUT.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
IMP-4000	DECKTRON CO., LTD.	P42IMP4000	MP3 PLAYER (EUT)	NOTEBOOK PC
-	-	N/A	EARPHONE	EUT
S690	Samsung Elect.	DoC	NOTEBOOK PC	-
AD-6019(V)	Samsung Elect.	N/A	AC/DC ADAPTER	NOTEBOOK PC
X06-08477	Microsoft Corp.	DoC	MOUSE	NOTEBOOK PC
2225C	HP	DSI6XU2225	PRINTER	NOTEBOOK PC



2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	DECKTRON CO., LTD.	-	N/A

3.2 EUT exercise Software

- Play mode and Recording mode
- After connecting the EUT to USB port of a notebook PC, data were continuously uploading and downloading from HDD of the notebook PC to the EUT.
- FM/AM receiving mode
- The EUT was tested on up/downloading mode as the worst case.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
MP3 PLAYER (EUT)	N	Y	1.2 (P), 1.2 (D)
EARPHONE	N/A	N	1.2 (D)
NOTEBOOK PC	N	-	1.5 (P)
AC/DC ADAPTER (Notebook PC)	N	N	1.2(P), 1.0(D)
MOUSE	N/A	N	1.2(D)
PRINTER	N	Y	1.5(P), 1.5(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MP3 PLAYER (EUT)	Y	BOTH END(USB)	Y	BOTH END
EARPHONE	N	N/A	Y	EUT END
NOTEBOOK PC	-	-	-	-
AC/DC ADAPTER (Notebook PC)	Y	Notebook PC END	Y	Notebook PC END
MOUSE	N	N/A	Y	Notebook PC END
PRINTER	N	N/A	Y	BOTH END

3.5 Equipment Modifications

- The BD1 and 2 in the line of USB jack(J3) were changed to the bead(600 Ohm).
- The rating of R16 and 17 in the line of USB jack(J3) were changed to 47 Ohm.
- The bypass capacitor(47 pF) was added in the line of USB jack(J3).
- The rating of resistor(BD 3) in the pin(number 4) of USB jack(J3) was changed to 0 Ohm.
- The bypass capacitor(180 pF) was added to the pins(number 29 and 30) of chip-set(U1).
- The L5 of digital ground was changed to the bead(1000 Ohm).
- The BD4 that is located between digital VCC and Analog VCC was changed to the bead(1000 Ohm).
- The B1 and 2 of remote-earphone jack(J5) were changed to the bypass capacitor(1000 pF).
- The BD5 of remote-earphone jack(J5) was changed to the resistor(0 Ohm).
- The bypass capacitor(1000 Ohm) was added to the pins(number 2 and 3) of line in jack(J6).

3.6 Configuration of Test System

Line Conducted Test : It does not need to test this requirement, because of the power of the EUT is supplied from a DC battery

Radiated Emission Test : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Play mode	
Recoding mode	
FM Receiving mode	
Data Up/Downloading mode	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Play mode	
Recoding mode	
FM Receiving mode	
Data Up/Downloading mode	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 42 % Temperature: 26 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)
 Type of Test : CLASS B
 Result : PASSED BY -12.09 dB at 0.78 MHz at average mode

EUT : MP3 PLAYER Date: August 05, 2003
 Operating Condition : Data Up/Downloading mode
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.19	H	47.17	63.82	-16.65
0.46	H	41.61	56.69	-15.08
0.52	N	40.14	56.00	-15.86
0.78	H	40.23	56.00	-15.77
7.92	H	42.38	60.00	-17.62
8.18	N	41.82	60.00	-18.18
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.52	N	33.27	46.00	-12.73
0.78	H	33.91	46.00	-12.09
7.92	H	37.08	46.00	-12.92
8.18	N	37.07	50.00	-12.93

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector.

Tested by: Young-Min, Choi / Project Engineer

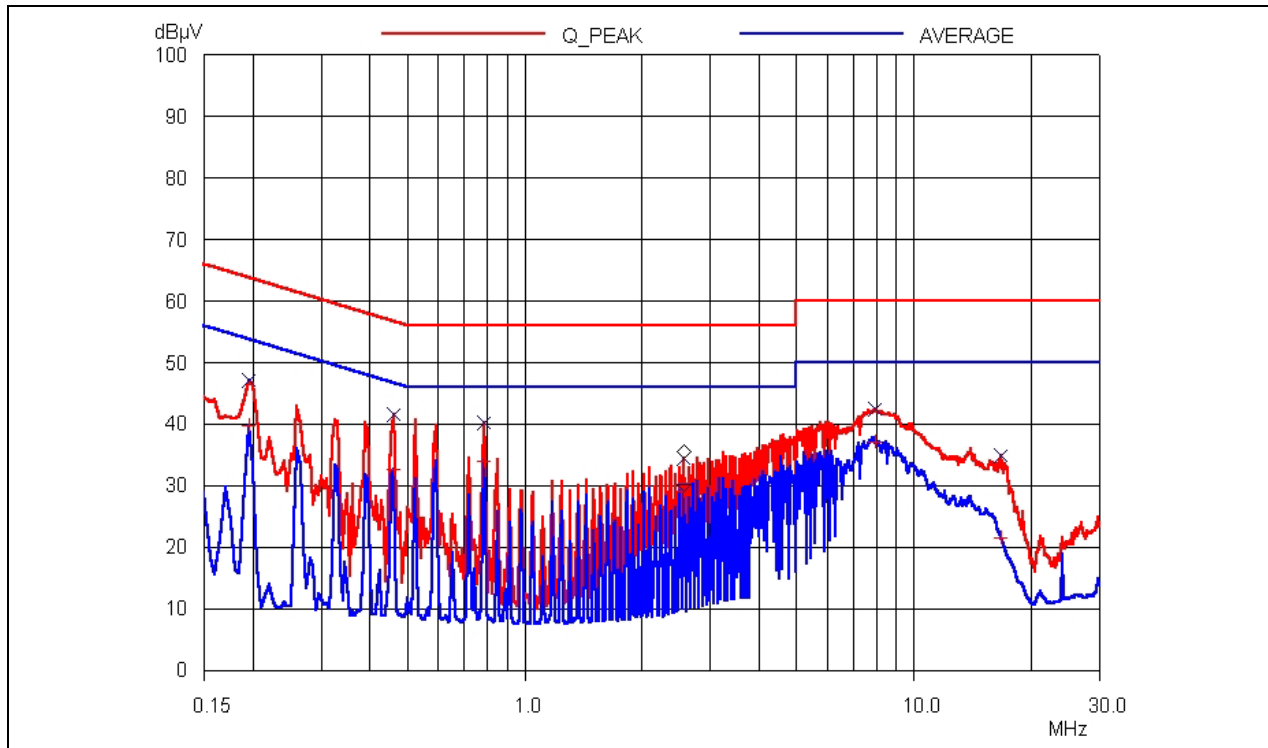

HOT LINE

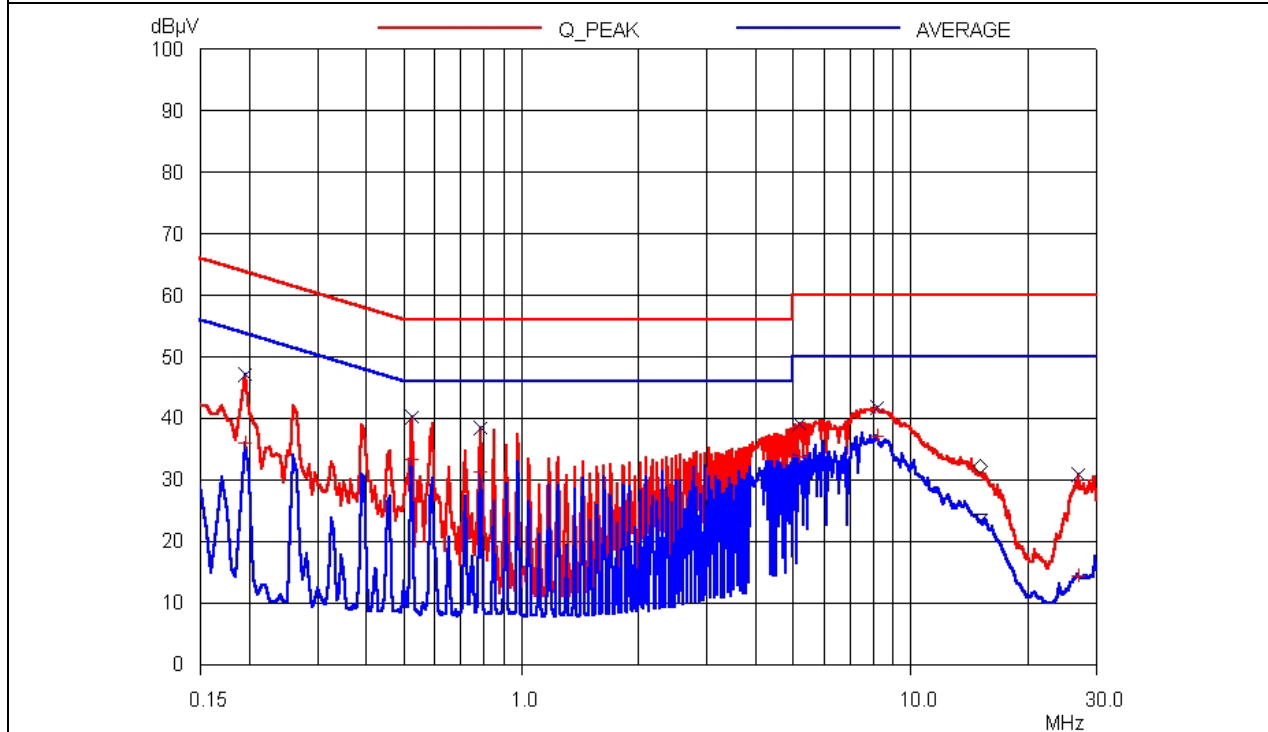

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

**5.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature: 27 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109 (a)
 Type of Test : CLASS B
 Result : PASSED BY -5.79 dB at 383.60 MHz

EUT : MP3 PLAYER Date: August 07, 2003
 Operating Condition : Files Up/Downloading mode.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
132.80	20.80	V	12.86	1.28	34.94	43.50	-8.56
137.60	22.10	V	12.65	1.30	36.05	43.50	-7.45
147.20	22.00	V	13.22	1.34	36.56	43.50	-6.94
153.00	21.60	V	14.13	1.36	37.09	43.50	-6.41
212.20	21.80	H	10.93	1.63	34.36	43.50	-9.14
260.60	23.20	H	12.43	1.86	37.49	46.00	-8.51
326.60	21.40	H	14.18	2.16	37.74	46.00	-8.26
383.60	23.00	H	14.81	2.40	40.21	46.00	-5.79
457.40	19.20	V	16.50	2.56	38.26	46.00	-7.74
602.60	16.00	H	18.80	2.91	37.71	46.00	-8.29
626.80	13.70	H	19.27	3.01	35.98	46.00	-10.02
829.40	12.10	V	21.94	3.77	37.81	46.00	-8.19

Radiated Emissions Tabulated Data


 Tested by: Young-Min, Choi / Project Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	NOV/02	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/03	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	MAY/03	12MONTH	■
4.	Spectrum analyzer	HP	8568B	3109A05456	MAY/03	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAY/03	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAY/03	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/03	12MONTH	
8.	Biconical antenna	EMCO Schwarzbeck	3104C VHA9103	9109-4443 9109-4444 91031852	MAY/03 JUL/03 AUG/03	12MONTH	■
9.	Log Periodic antenna	EMCO Schwarzbeck	3146 9108-A(494)	9109-3213 9109-3214 9109-3217 62281001	AUG/02 JUL/03 MAY/03 AUG/02	12MONTH	■
10.	LISN	EMCO	3825/2	9109-1867 9109-1869	AUG/02 OCT/02	12MONTH	■
11.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■