

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Yun Tong Electionic(ShenZhen)Co., Ltd

UWSB-System 2.1x-W

Model No.: UWT-201X

FCC ID: P44UWT-201X

Prepared for : Yun Tong Electionic(ShenZhen)Co., Ltd
Building 3, No.2 Industry Zone, ShangHeng Lang HuaXing
Road, Da Lang Street, Bao An District, Shen Zhen City, Guang
Dong Province, China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F12241
Date of Test : Nov.02~09, 2012
Date of Report : Nov.16, 2012

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	1-5
1.1. Description of Standards and Results	1-5
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information	2-2
2.3. Block Diagram of Test Setup	2-2
2.4. Test Facility	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2).....	2-3
3. POWER LINE CONDUCTED EMISSION TEST.....	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-1
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup	4-1
4.3. Radiated Emission Limit	4-2
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results	4-4
5. BAND EDGE COMPLIANCE TEST	5-1
5.1. Test Equipment.....	5-1
5.2. Limit	5-1
5.3. Test Produce	5-1
5.4. Test Results	5-1
6. 26DB AND 20DB BANDWIDTH TEST	6-1
6.1. Test Equipment.....	6-1
6.2. Limit	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-1
7. OUTPUT POWER TEST	7-1
7.1. Test Equipment.....	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-2
8. POWER SPECTRAL DENSITY TEST	8-1
8.1. Test Equipment.....	8-1
8.2. Limit	8-1
8.3. Test Procedure	8-1
8.4. Test Results	8-2
9. PEAK EXCURSION MEASUREMENT	9-1
9.1. Test Equipment.....	9-1
9.2. Limit	9-1

9.3.	Test Procedure	9-1
9.4.	Test Results	9-2
10.	FREQUENCY STABILITY MEASUREMENT	10-1
10.1.	Test Equipment.....	10-1
10.2.	Limit	10-1
10.3.	Test Procedure	10-1
10.4.	Test Result	10-2
11.	ANTENNA REQUIREMENT	11-1
11.1.	STANDARD APPLICABLE	11-1
11.2.	ANTENNA CONNECTED CONSTRUCTION	11-1
12.	MPE ESTIMATION	12-1
12.1.	Limit for General Population/ Uncontrolled Exposures	12-1
12.2.	Estimation Result.....	12-1
13.	DEVIATION TO TEST SPECIFICATIONS	13-1
14.	PHOTOGRAPH OF TEST.....	14-1
14.1.	Photos of Power Line Conducted Emission Test	14-1
14.2.	Photos of Radiated Emission Test	14-2
15.	PHOTOS OF THE EUT	15-1

TEST REPORT CERTIFICATION

Applicant : Yun Tong Electionic(ShenZhen)Co., Ltd
 Manufacturer : Yun Tong Electionic(ShenZhen)Co., Ltd
 EUT Description : UWSB-System 2.1x-W
 FCC ID : P44UWT-201X
 (A) MODEL NO. : UWT-201X
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 7.5V
 (D) TEST VOLTAGE : DC 7.5V Adapter Input AC 120V/60Hz

Tested for comply with:
 FCC Rules and Regulations Part 15 Subpart C: 2011

Test procedure used:
 ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Nov.02~09, 2012 Report of date: Nov.16, 2012

Prepared by : June shao Reviewed by : Sunny Lu
 June Shao / Assistant Sunny Lu / Assistant Manager

 信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章

Stamp only for EMC Dept. Report

Signature: Ken Lu

Approved & Authorized Signer :

Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
26dB&20dB Bandwidth Test	FCC Part 15: 15.407(a) FCC Part15.215	PASS
Output Power Test	FCC Part 15: 15.407(a)	PASS
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Peak Excursion	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(g) ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)


Product Name	: UWSB-System 2.1x-W
Model Number	: UWT-201X
FCC ID	: P44UWT-201X
Operation Frequency	: 5180MHz-5240MHz
Modulation Technology	: QPSK
Antenna Assembly Gain	: PCB antenna, PK gain 3dBi
Applicant	: Yun Tong Electionic(ShenZhen)Co., Ltd Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Manufacturer	: Yun Tong Electionic(ShenZhen)Co., Ltd Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Power Adapter	: Manufacture: WASP M/N: GPE603-240250W Cable: Shielded, Detachable, 2.0m
Date of Test	: Nov.02~09, 2012
Date of Receipt	: Oct.29, 2012
Sample Type	: Prototype production

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

This device have two antennas , and those two antennas can not transmit simultaneously. According to exploratory test. Antenna B has Max output and radiated emission, so choose Ant B for radiated emission and Band edge test.

2.3. Block Diagram of Test Setup

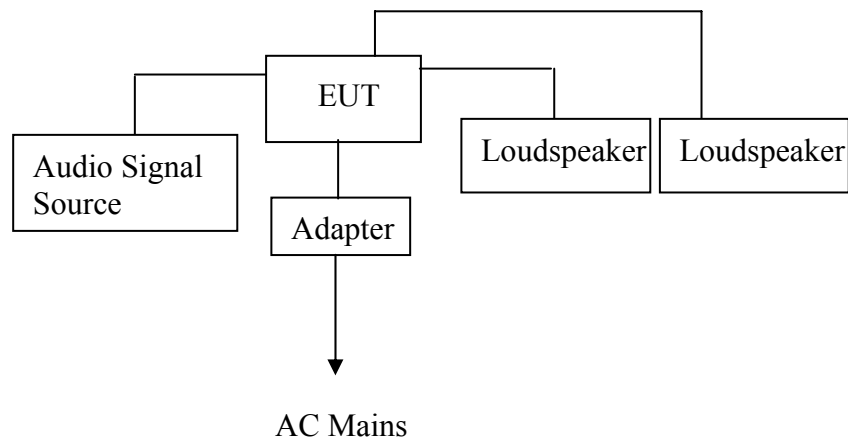

(EUT: UWSB-System 2.1x-W)

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Dec.30, 2012

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-01
Valid Date: Feb.01, 2014

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2013

2.5. Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB(9KHz to 150KHz)
	3.2dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6 dB(30~200MHz, Polarize: H)
	3.8 dB(30~200MHz, Polarize: V)
	4.2 dB(200M~1GHz, Polarize: H)
	3.8 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	3.1dB (Distance: 3m Polarize: V)
	3.7 dB (Distance: 3m Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.31, 12	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Oct.31, 12	1 Year
3.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 12	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 12	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 12	1 Year
6.	RF Cable	Fujikura	3D-2W	No.1	May.08, 12	1Year
7.	Coaxial Switch	Anritsu	MP59B	M50564	May.08, 12	1 Year
8.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 12	1 Year

3.2. Block Diagram of Test Setup

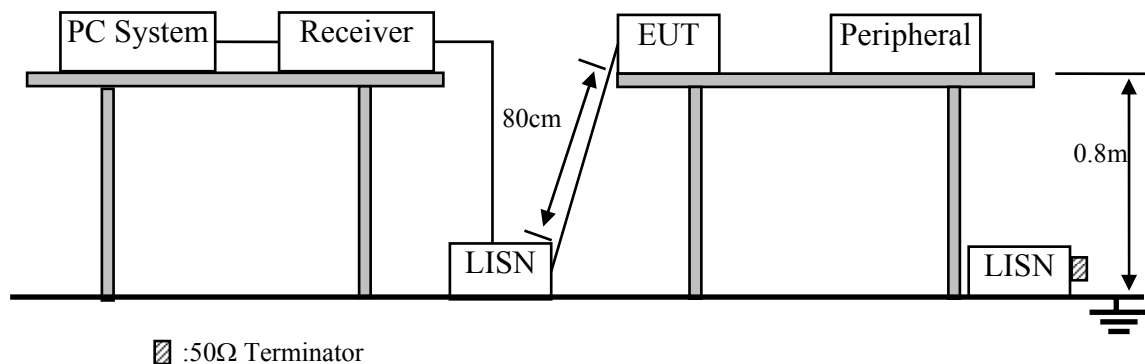

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. UWSB-System 2.1x-W (EUT)

Model Number : UWT-201X

Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turned on the power of all equipment.

3.5.3. PC run test software to control EUT work in Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

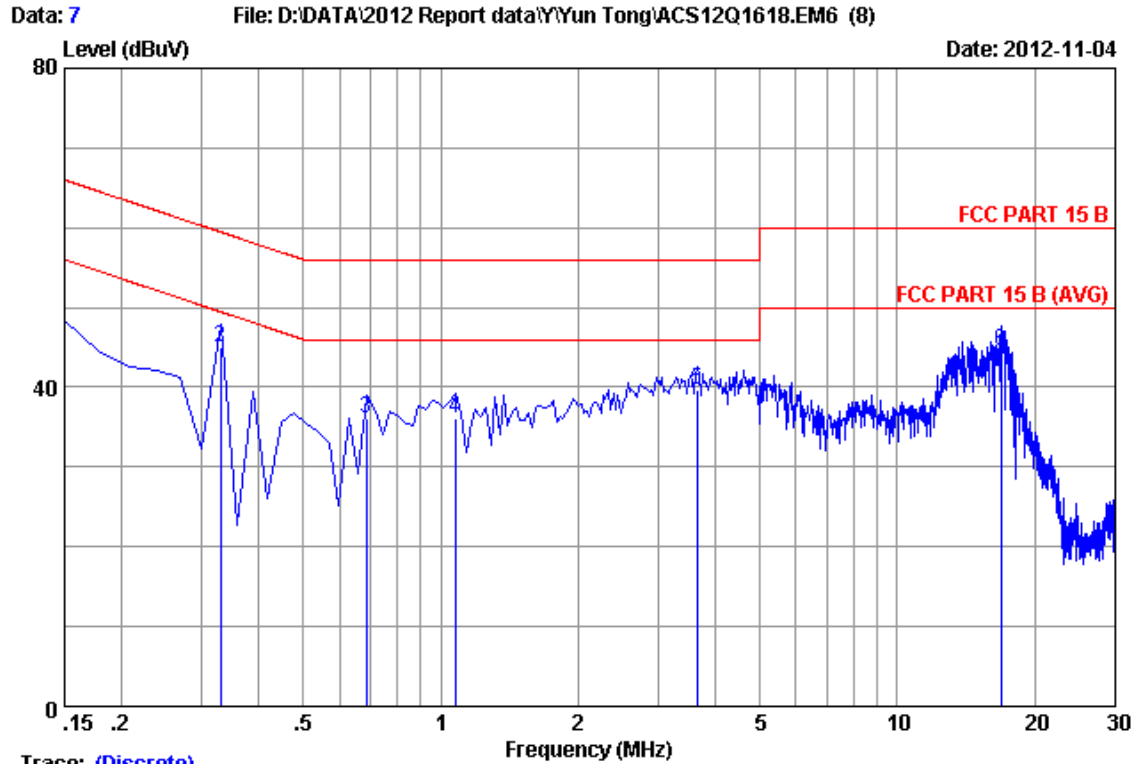
Trace: (Discrete)

Site no :1#conduction Data No :7
 Dis./Ant. :** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :27.5°C/59% Engineer :Leo-Li
 EUT :UWSB-System 2.1x-W
 Power Rating :DC 7.5V Form Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:UWT-201X

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.17	9.94	35.27	45.38	66.00	20.62	QP
2	0.32910	0.16	9.95	34.86	44.97	59.47	14.50	QP
3	0.68730	0.16	9.95	25.98	36.09	56.00	19.91	QP
4	1.075	0.17	9.94	26.09	36.20	56.00	19.80	QP
5	3.642	0.23	9.94	29.50	39.67	56.00	16.33	QP
6	16.866	0.47	10.01	34.13	44.61	60.00	15.39	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

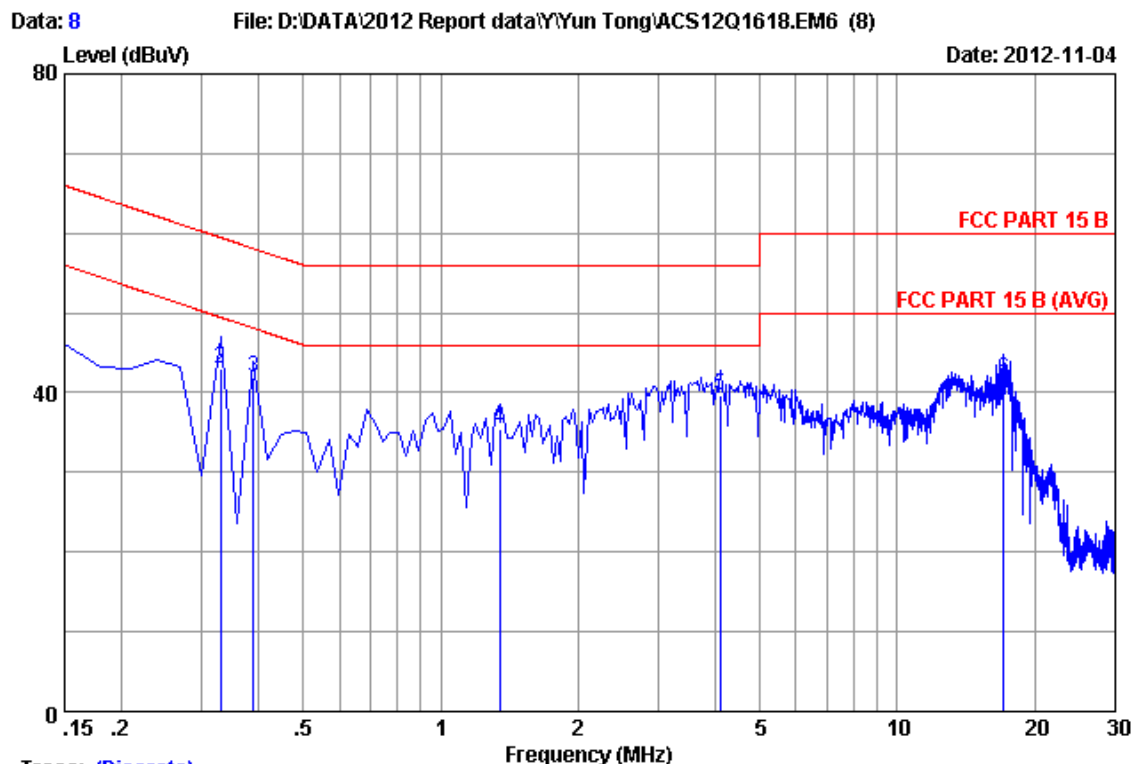

Trace: (Discrete)

Site no :1#conduction Data No :8

Dis./Ant. : ** 2012 ESH2-Z5 NEUTRAL

Limit :FCC PART 15 B

Env./Ins. :27.5°C/59% Engineer :Leo-Li

EUT :UWSB-System 2.1x-W

Power Rating :DC 7.5V Form Adapter Input AC 120V/60Hz

Test Mode :Tx Mode

M/N:UWT-201X

No	Freq (MHz)	LISN		Cable		Emission		Margin	Remark
		Factor	(dB)	Loss	(dB)	Reading	Level		
						(dBuV)	(dBuV)	(dB)	
1	0.15000	0.14		9.94		34.13	44.21	21.79	QP
2	0.32910	0.15		9.95		32.93	43.03	16.44	QP
3	0.38880	0.15		9.95		31.76	41.86	16.23	QP
4	1.344	0.18		9.94		25.41	35.53	20.47	QP
5	4.090	0.24		9.94		29.56	39.74	16.26	QP
6	17.075	0.36		10.01		31.41	41.78	18.22	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
+Reading.

2.If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.28,11	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 12	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 12	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 12	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Dec.26, 10	2.0 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 12	1 Year
7	Coaxial Switch	Anritsu	MP59B	M74389	May.08, 12	1 Year

4.1.2. For frequency range 1GHz~25GHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 12	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	June.05, 12	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 12	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 12	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 12	1 Year
6	Horn Antenna	EMCO	3116	00060089	Nov.25,11	1.5 Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

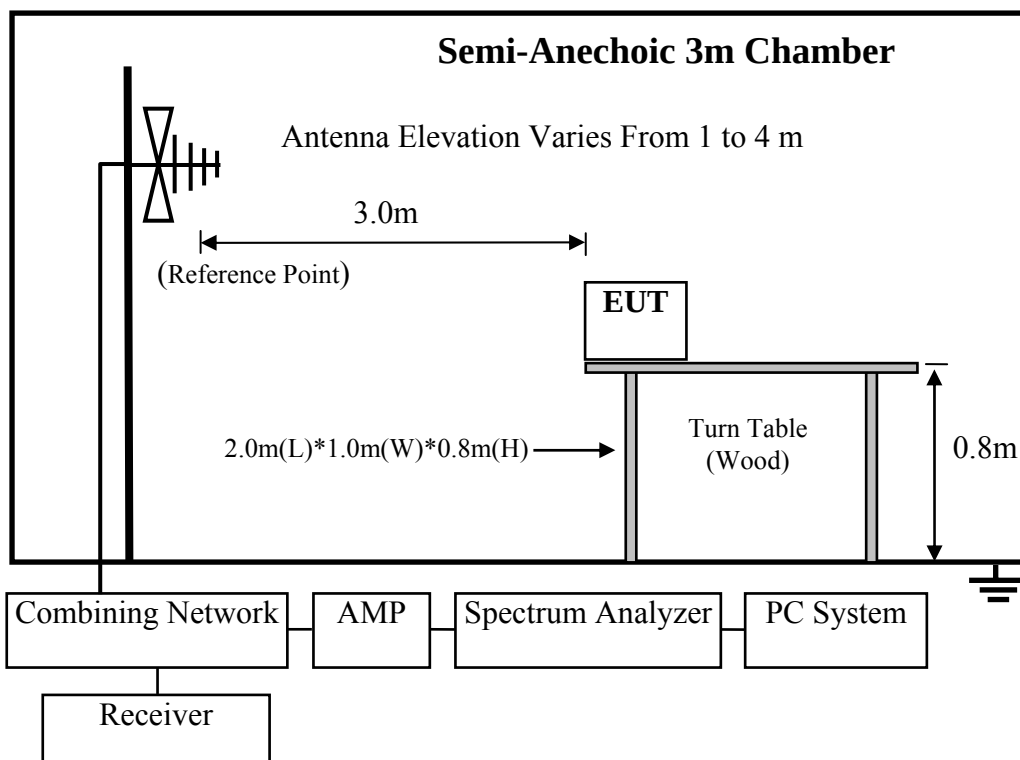

For frequency range 1GHz-25GHz

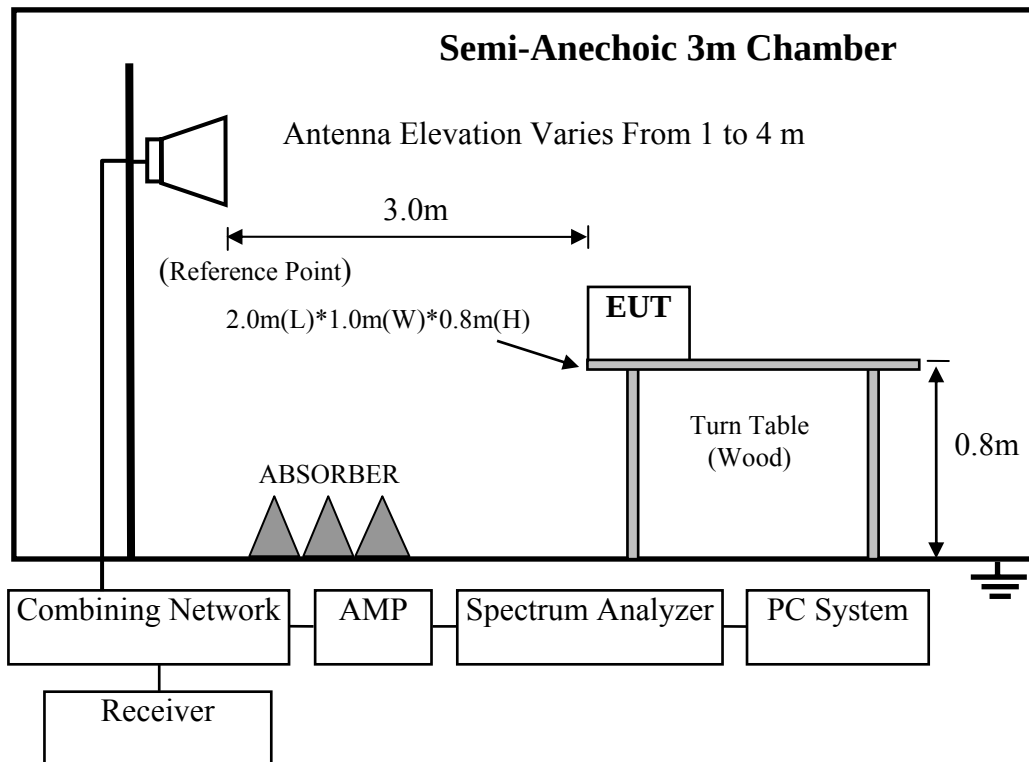

4.3. Radiated Emission Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) used for below 1GHz and Horn antenna used for above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1).The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2). Find the field strength of the maximum emission frequency P_{max} , then use the formula in KDB789033. $EIRP(dBm) = E(dBuV/m) - 95.2$ (distance=3m) can get the EIRP of the maximum emission, then compare this EIRP level with the limit -27dBm.

Note: All emission outside 15.205 restricted frequency bands, their EIRP level lower than the Limit -27dBm.

4.7. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.

No any emissions above 9GHz located in 15.205 restricted frequency bands


All other emission comply with 15.407 (b)(1) requirements.

Frequency: 30MHz~1GHz

Data: 4

File: E:\2012 Report Data\YYun Tong\ACS12Q1618.EM6 (4)

Date: 2012-11-04

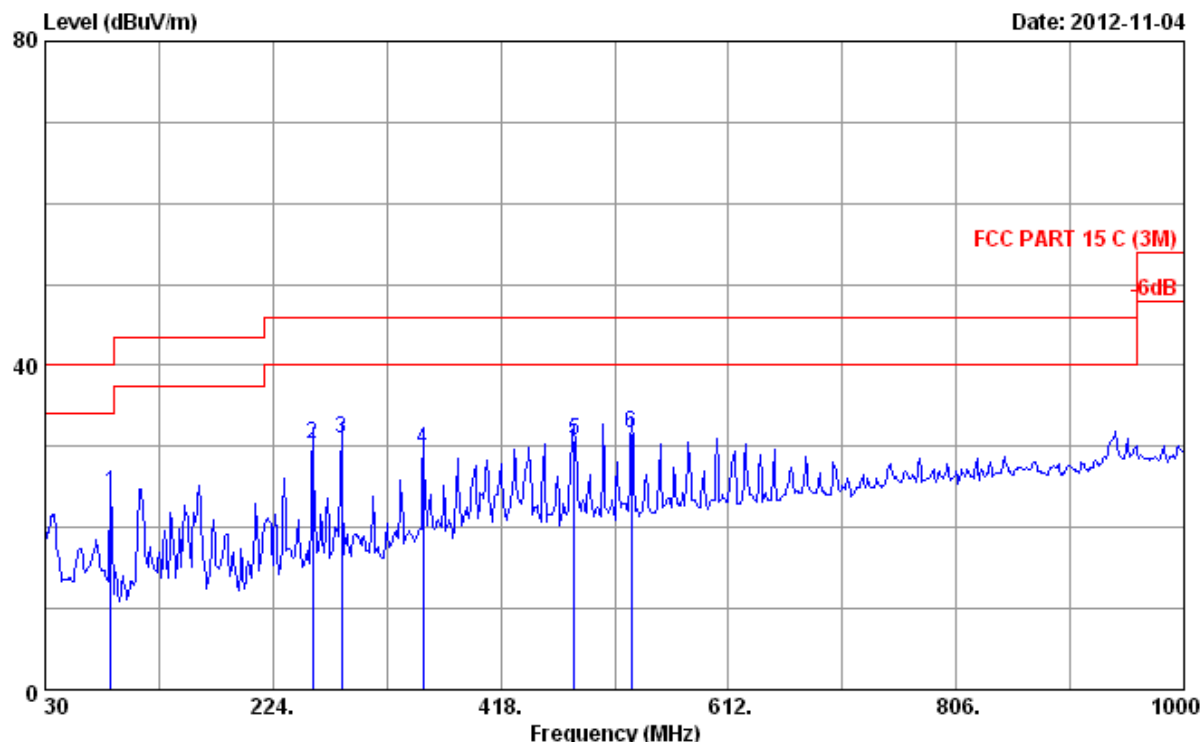

Site no. : 3m Chamber Data no. : 4
Dis. / Ant. : 3m 2012 CBL6111C 2598 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 24°C/56% Engineer : Leo-Li
EUT : UWSB-System 2.1x-W
Power rating : DC 7.5V From Adapter Input AC 120V/60Hz
Test Mode : Tx Mode
M/N:UWT-201X


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	86.260	7.72	0.79	15.79	24.30	40.00	15.70	QP
2	257.950	13.49	1.18	15.72	30.39	46.00	15.61	QP
3	282.200	13.37	1.24	16.31	30.92	46.00	15.08	QP
4	352.040	15.47	1.42	12.67	29.56	46.00	16.44	QP
5	481.050	18.26	1.77	10.73	30.76	46.00	15.24	QP
6	529.550	19.07	1.91	10.64	31.62	46.00	14.38	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Data: 3

File: E:\2012 Report Data\YYun Tong\ACS12Q1618.EM6 (4)

Date: 2012-11-04

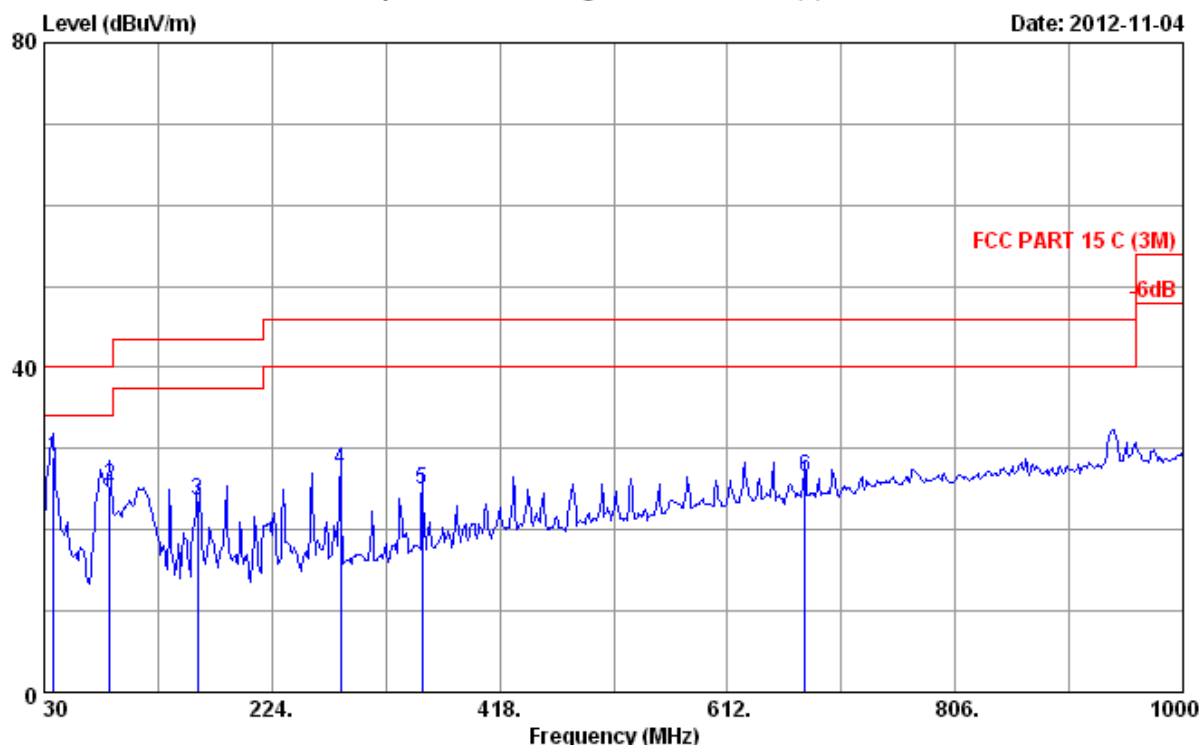

Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2012 CBL6111C 2598 Ant. pol. : VERTICAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 24°C/56% Engineer : Leo-Li
EUT : UWSB-System 2.1x-W
Power rating : DC 7.5V From Adapter Input AC 120V/60Hz
Test Mode : Tx Mode
M/N:UWT-201X

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.760	14.44	0.51	14.00	28.95	40.00	11.05	QP
2	86.260	7.72	0.79	16.96	25.47	40.00	14.53	QP
3	160.950	10.42	0.99	12.18	23.59	43.50	19.91	QP
4	282.200	13.37	1.24	12.86	27.47	46.00	18.53	QP
5	352.040	15.47	1.42	8.00	24.89	46.00	21.11	QP
6	677.960	21.49	2.36	2.77	26.62	46.00	19.38	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Data: 53

File: E:\2012 Report\Yun Tong\ACS12Q1618.EM6 (204)

Date: 2012-11-02

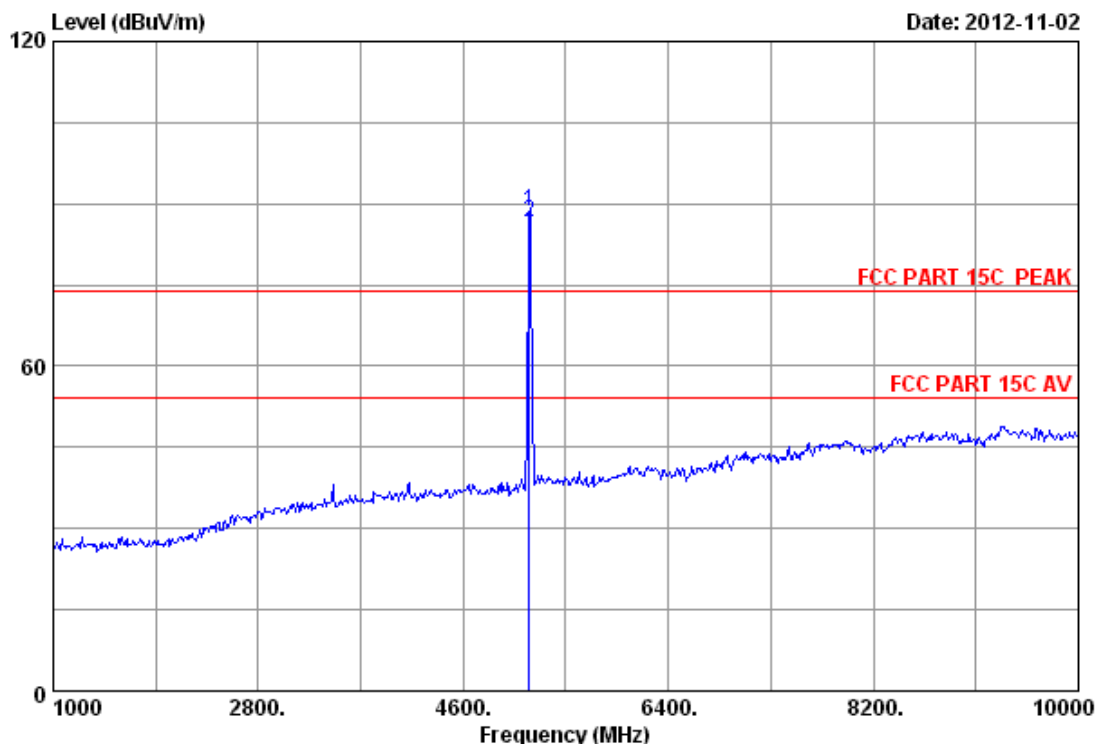


Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.000	33.15	9.01	35.59	82.10	88.67	74.00	-14.67	Peak
2	5180.000	33.15	9.01	35.59	80.03	86.60	54.00	-32.60	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

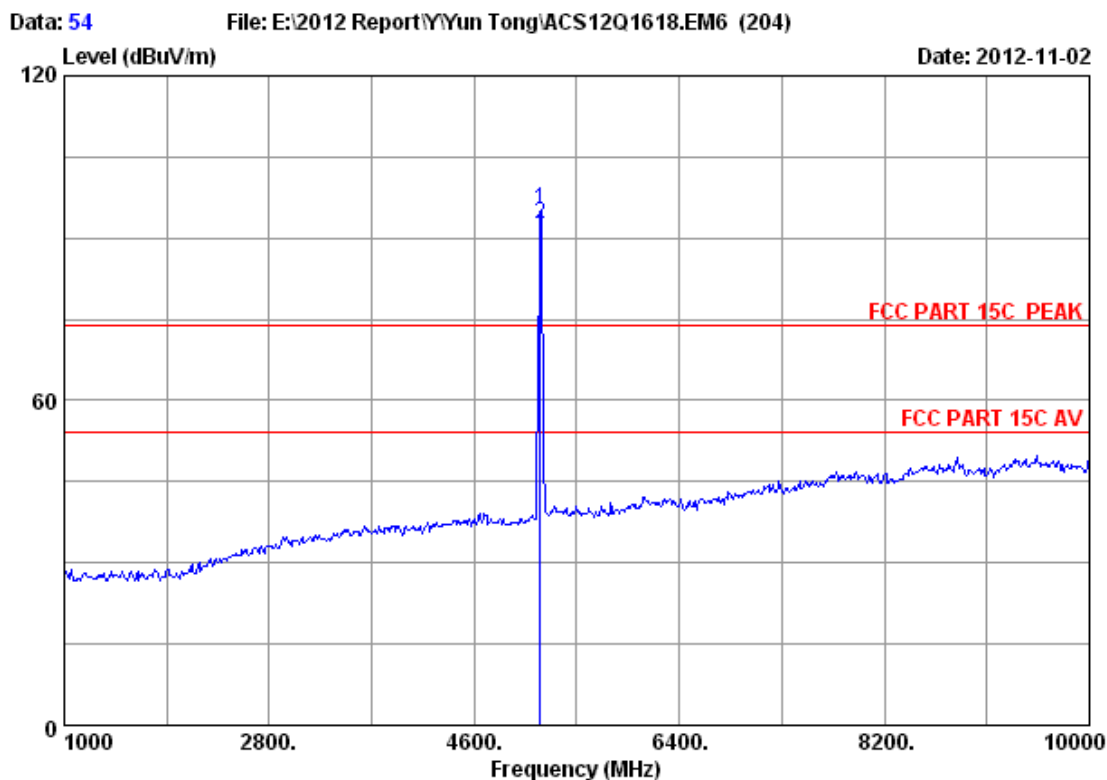


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.000	33.15	9.01	35.59	88.82	95.39	74.00	-21.39	Peak
2	5180.000	33.15	9.01	35.59	86.12	92.69	54.00	-38.69	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

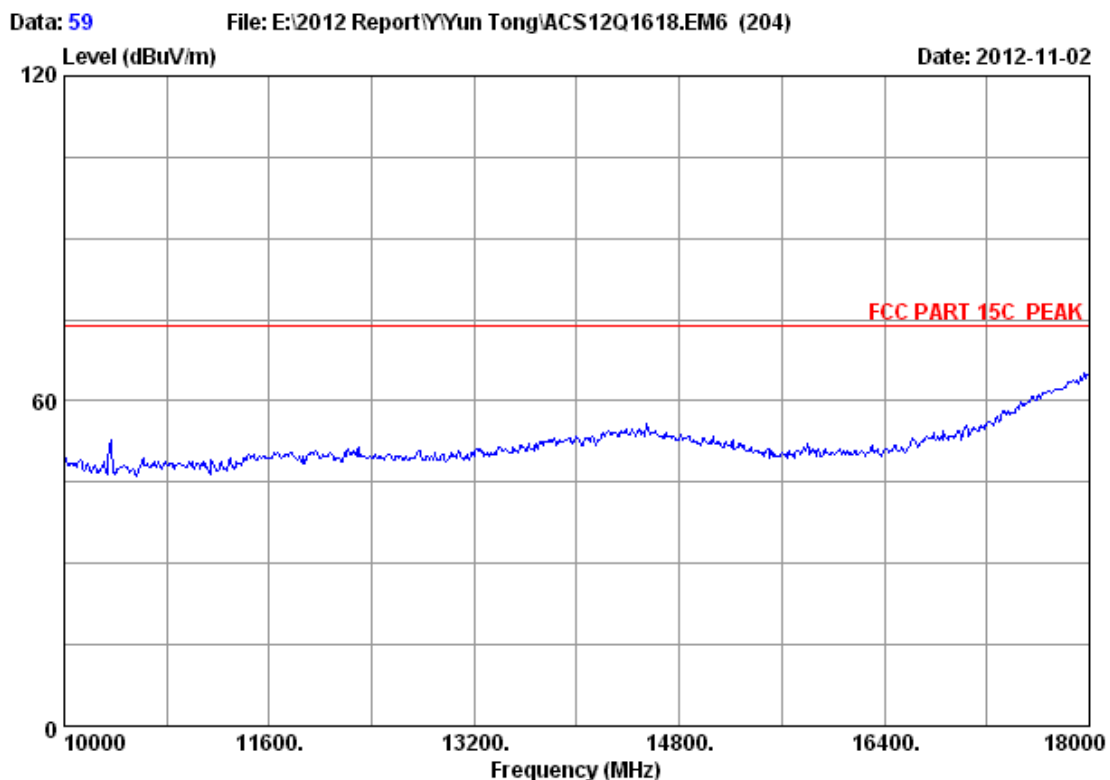

Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5180MHz Tx		
M/N	: UWT-201X		

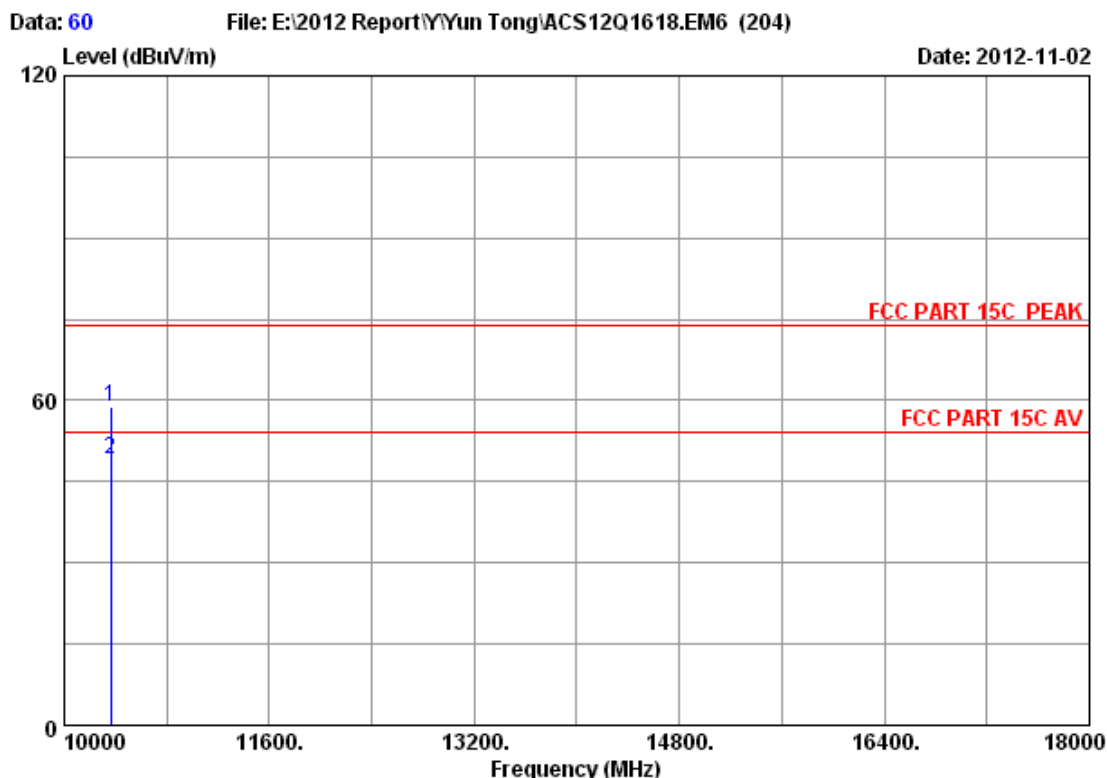


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X


	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	10360.000	38.17	12.20	34.84	43.15	58.68	74.00	15.32	Peak
2	10360.000	38.17	12.20	34.84	33.77	49.30	54.00	4.70	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

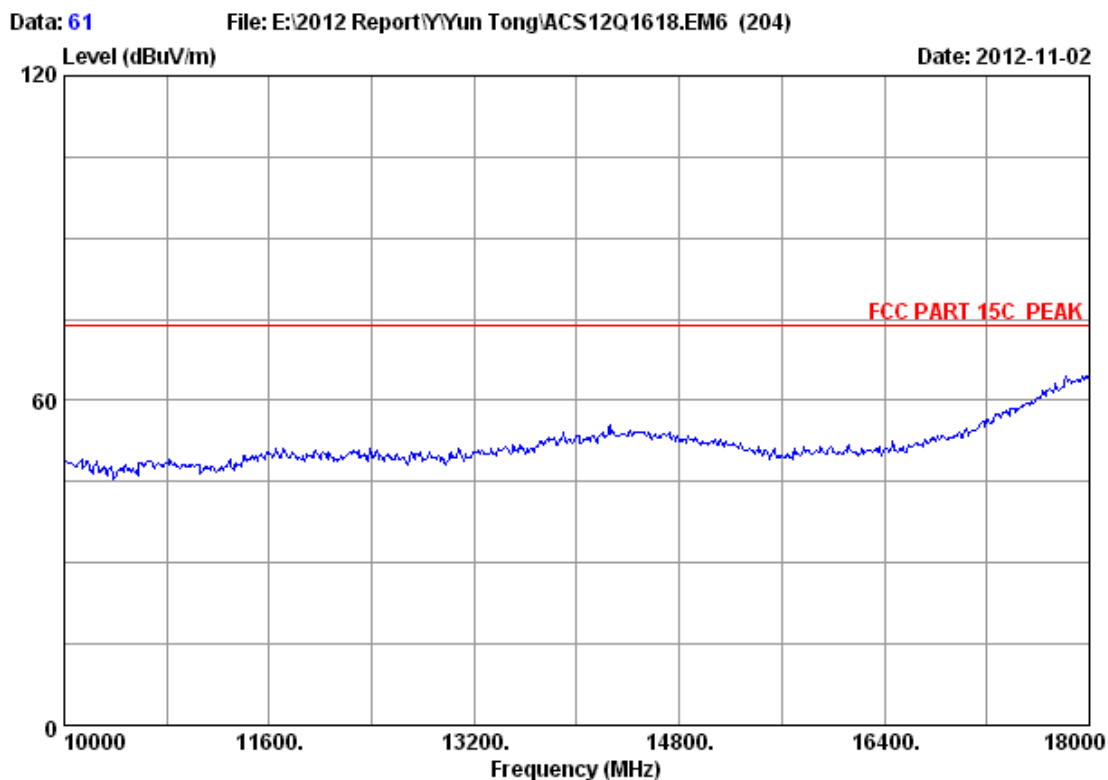

Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5180MHz Tx		
M/N	: UWT-201X		

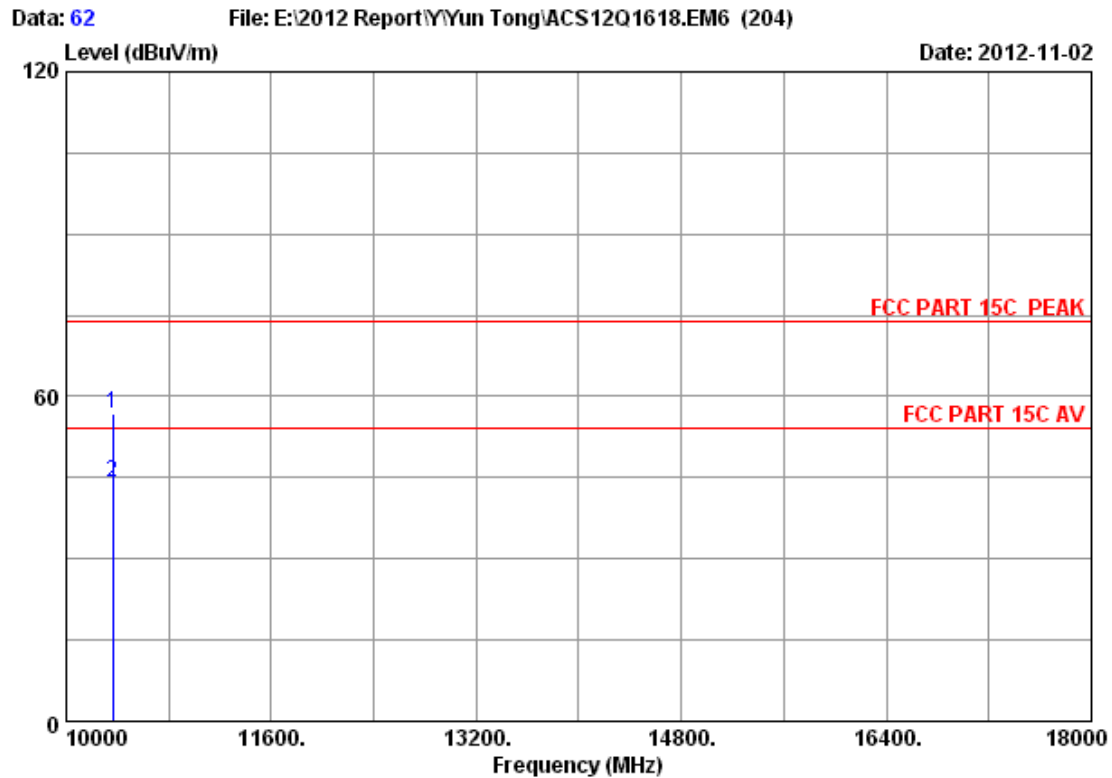


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X


	Ant.	Cable	Amp.		Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 10360.000	38.17	12.20	34.84	41.23	56.76	74.00	17.24	Peak	
2 10360.000	38.17	12.20	34.84	28.74	44.27	54.00	9.73	Average	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

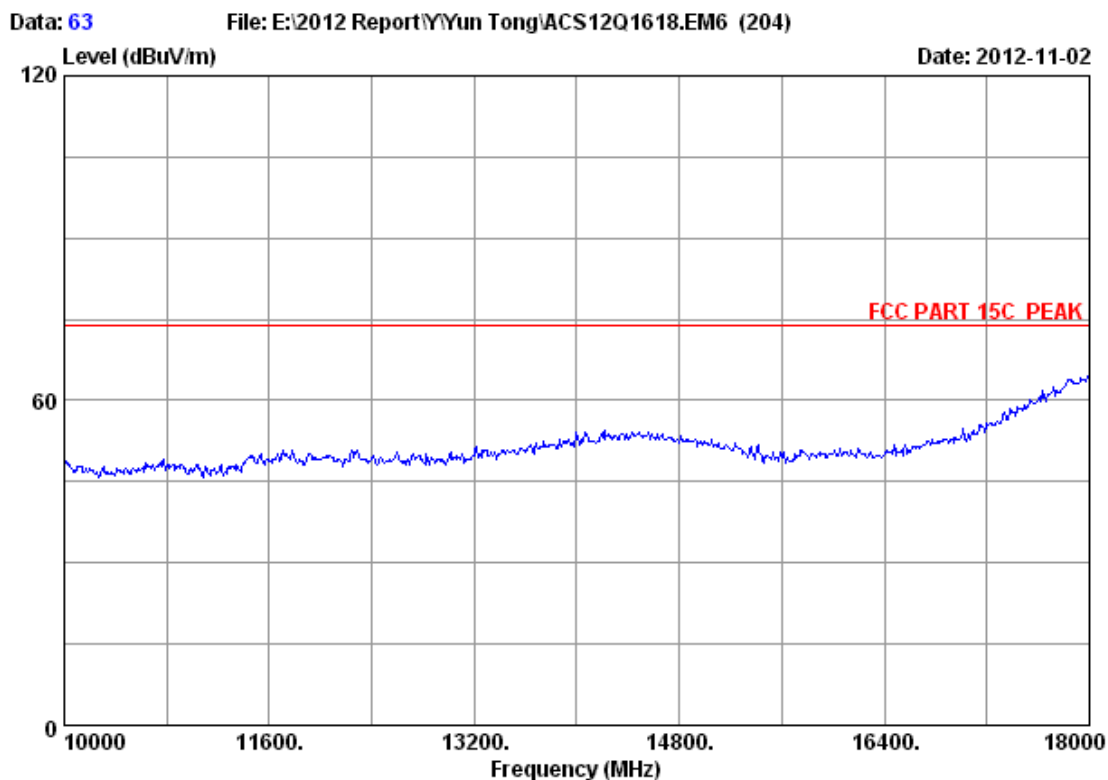

Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5210MHz Tx		
M/N	: UWT-201X		

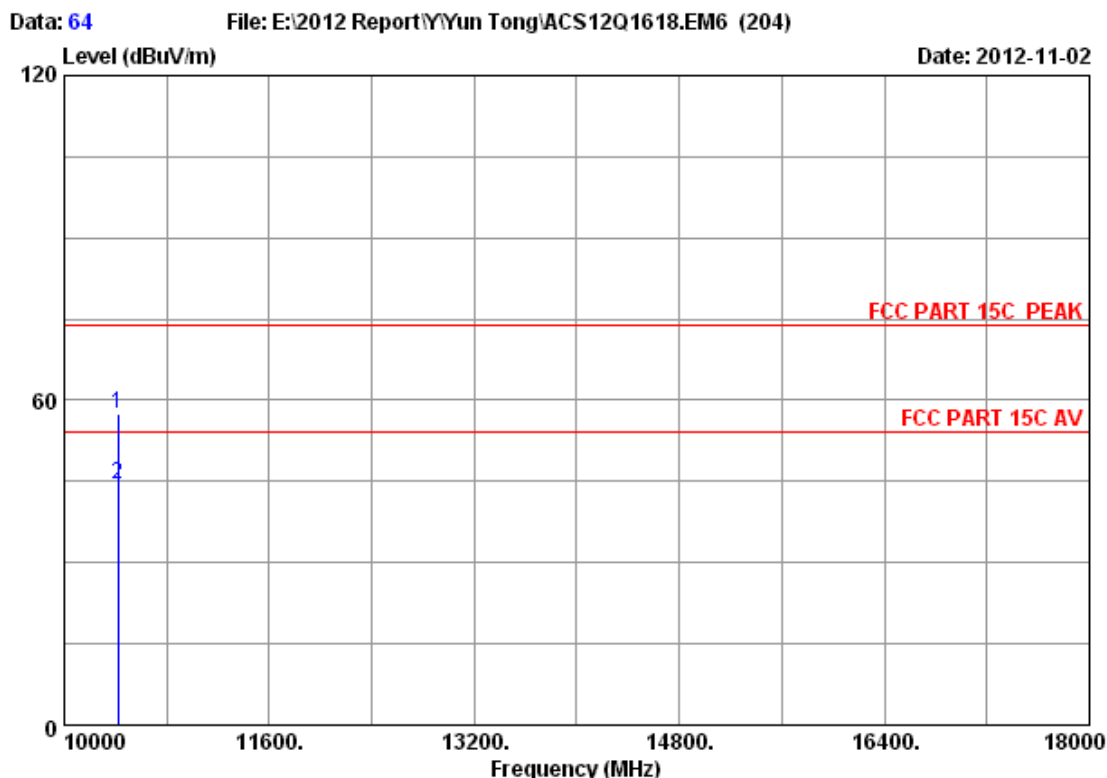


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5210MHz Tx
 M/N : UWT-201X


	Freq.	Ant.	Cable	Amp.	Emission				
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	10420.000	38.18	12.23	34.84	41.77	57.34	74.00	16.66	Peak
2	10420.000	38.18	12.23	34.84	28.96	44.53	54.00	9.47	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

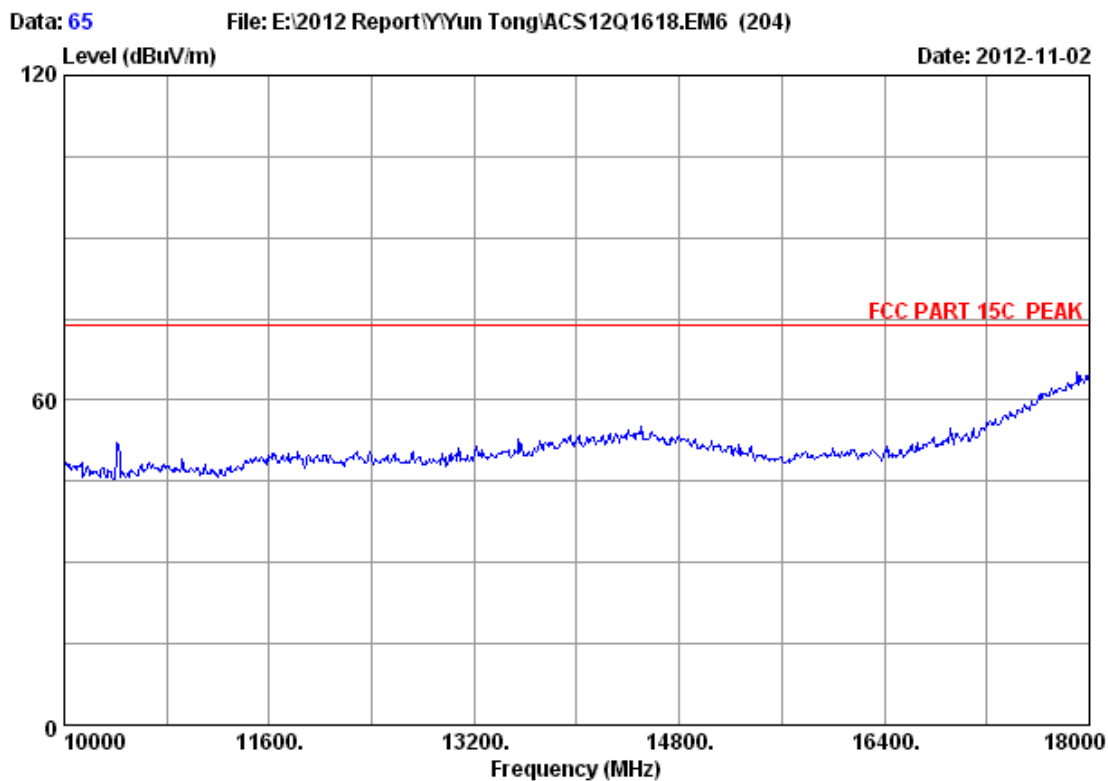

Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5210MHz Tx		
M/N	: UWT-201X		

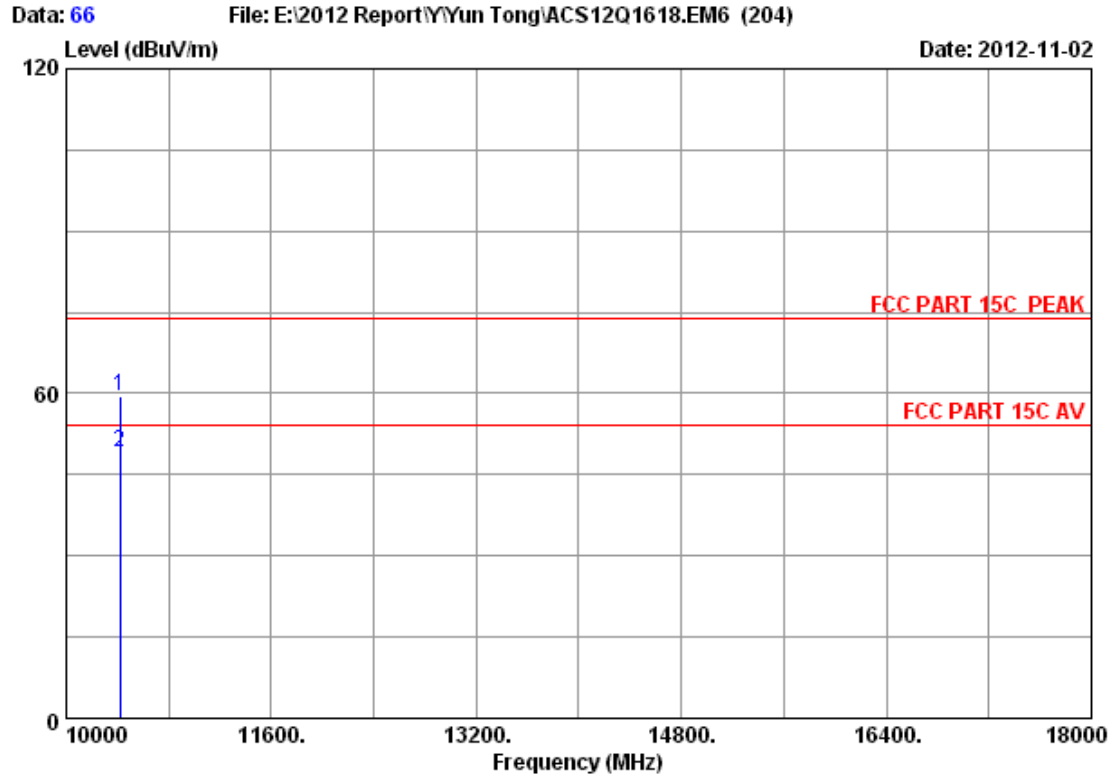


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5210MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10420.000	38.18	12.23	34.84	43.78	59.35	74.00	14.65	Peak
2	10420.000	38.18	12.23	34.84	33.59	49.16	54.00	4.84	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

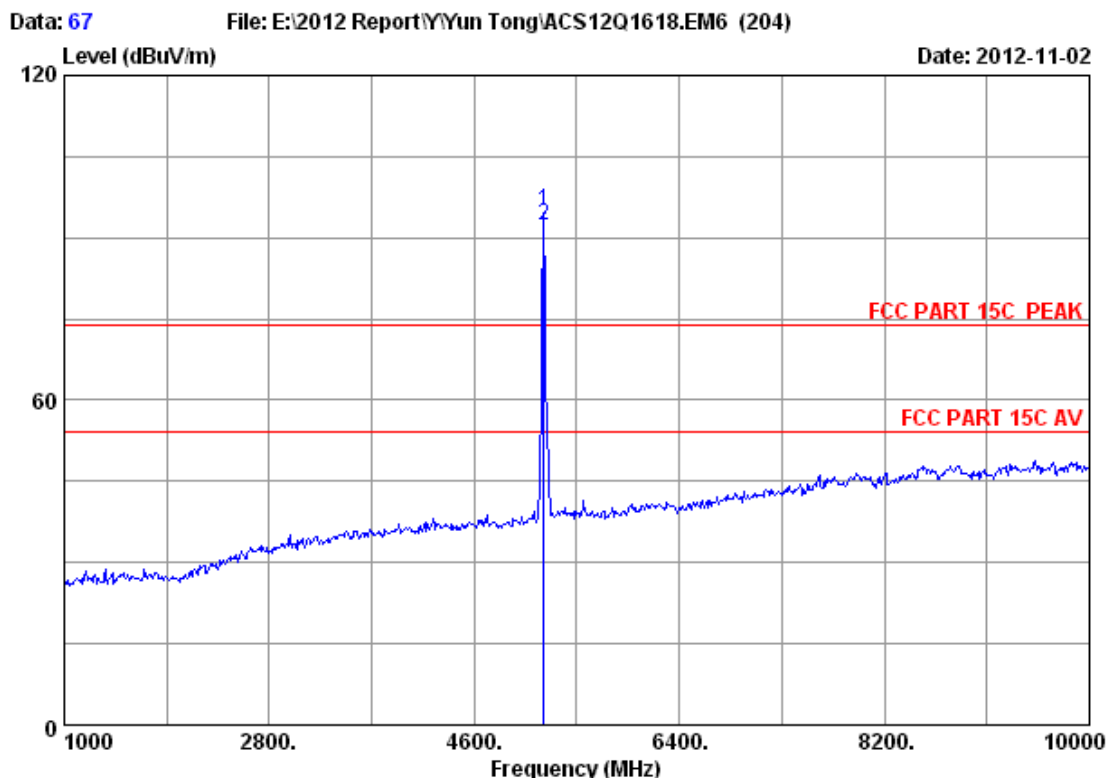


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5210MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.000	33.19	9.03	35.58	88.28	94.92	74.00	-20.92	Peak
2	5210.000	33.19	9.03	35.58	85.59	92.23	54.00	-38.23	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

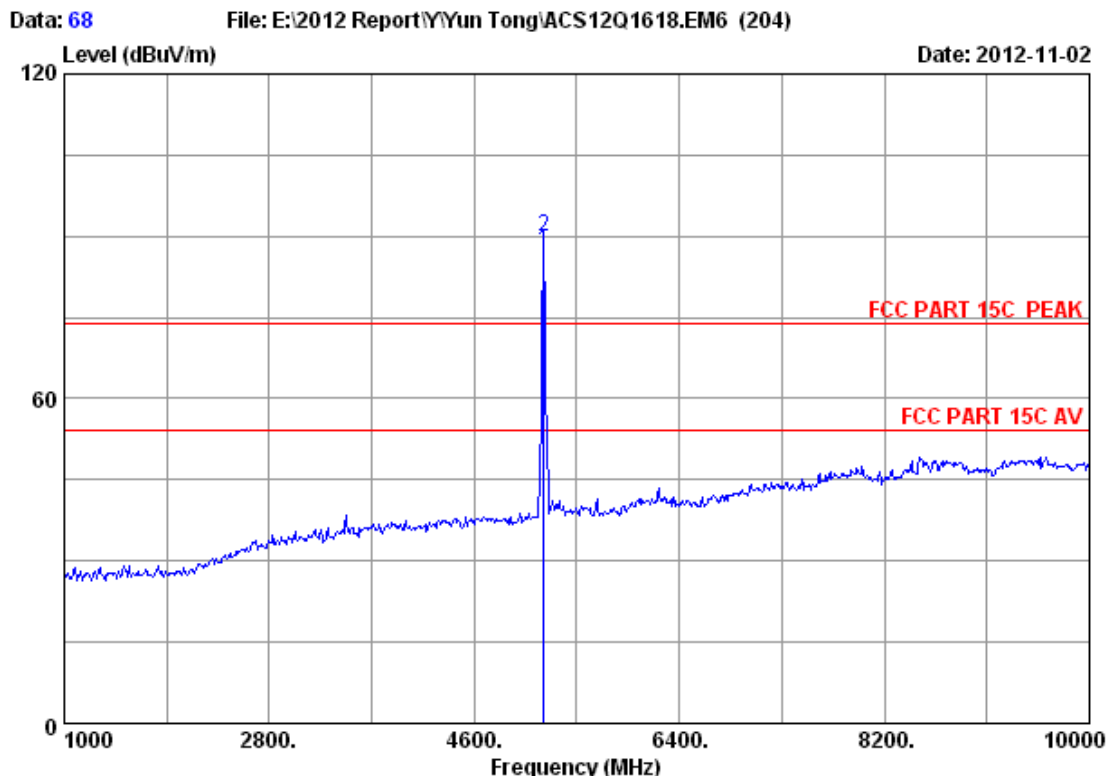


Site no. : 3m Chamber Data no. : 68
Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : UWSB-System 2.1x-W
Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
Test mode : 5210MHz Tx
M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.000	33.19	9.03	35.58	80.68	87.32	54.00	-33.32	Average
2	5210.000	33.19	9.03	35.58	83.13	89.77	74.00	-15.77	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

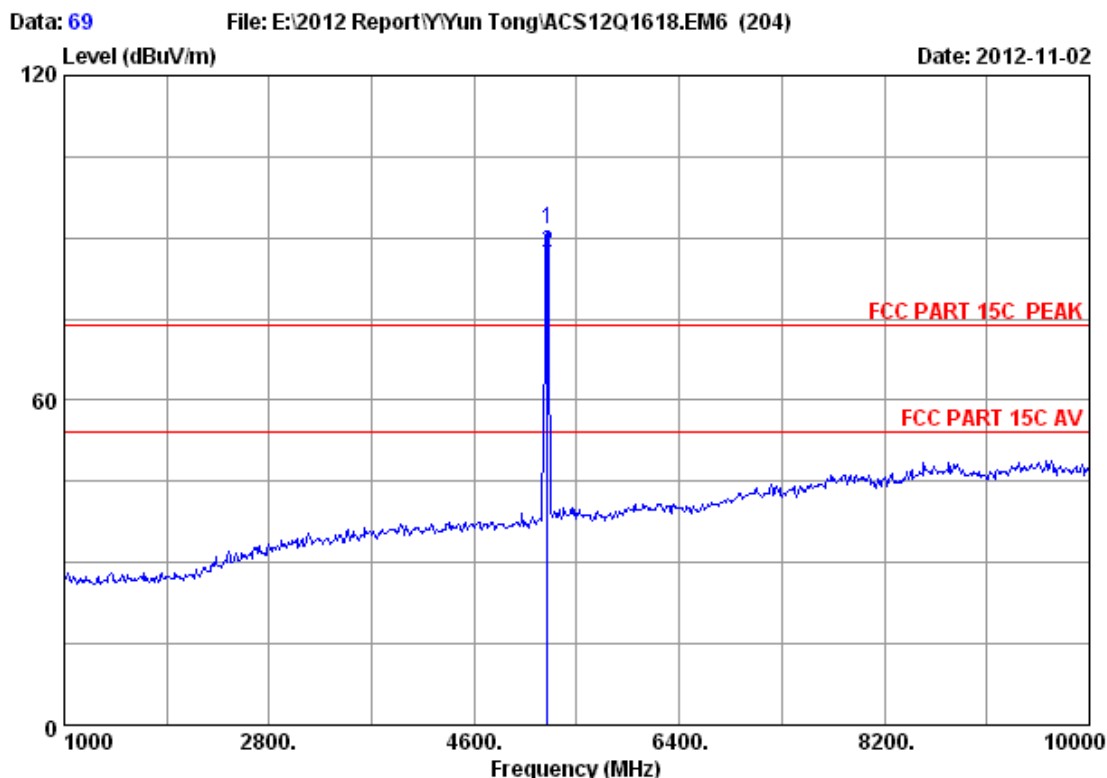


Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.000	33.24	9.06	35.57	84.78	91.51	74.00	-17.51	Peak
2	5240.000	33.24	9.06	35.57	80.67	87.40	54.00	-33.40	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

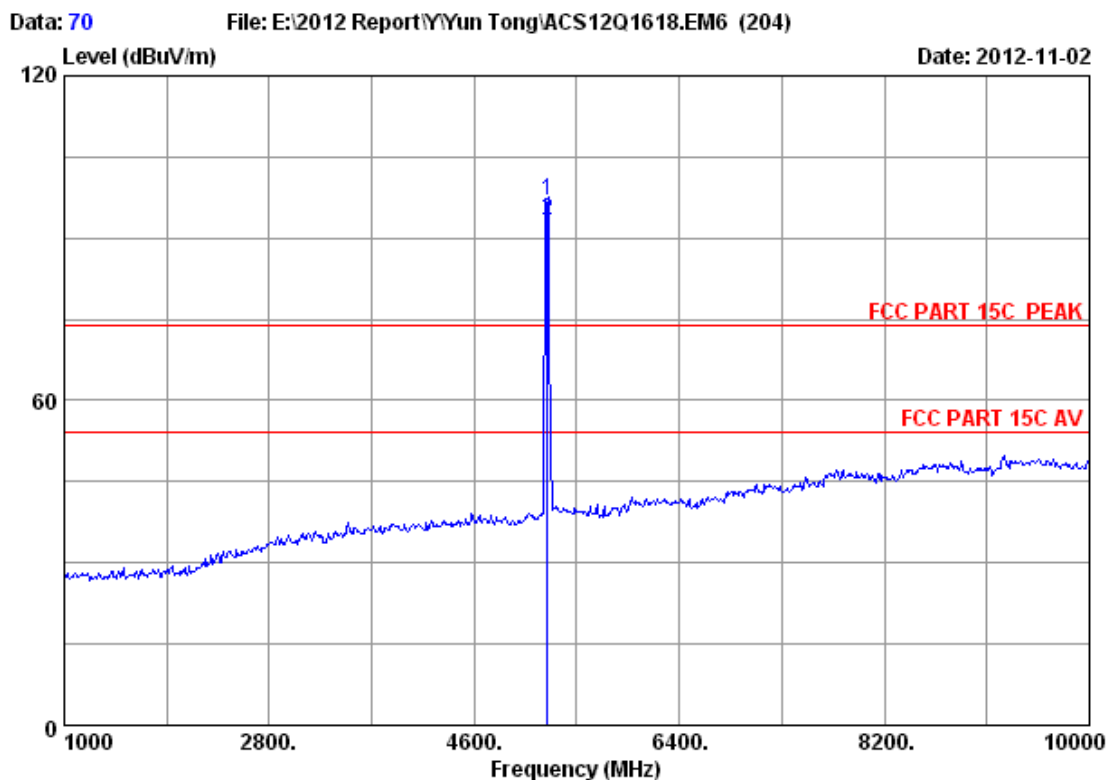


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.000	33.24	9.06	35.57	90.32	97.05	74.00	-23.05	Peak
2	5240.000	33.24	9.06	35.57	86.37	93.10	54.00	-39.10	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

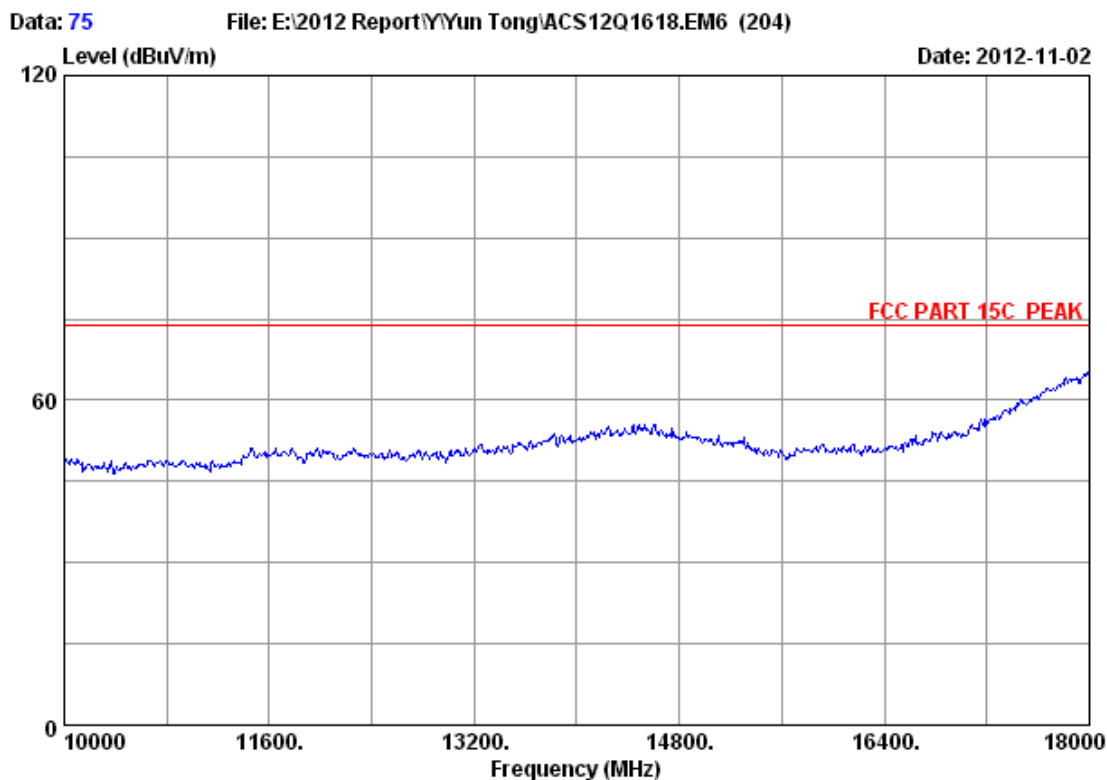

Site no.	: 3m Chamber	Data no.	: 75
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5240MHz Tx		
M/N	: UWT-201X		

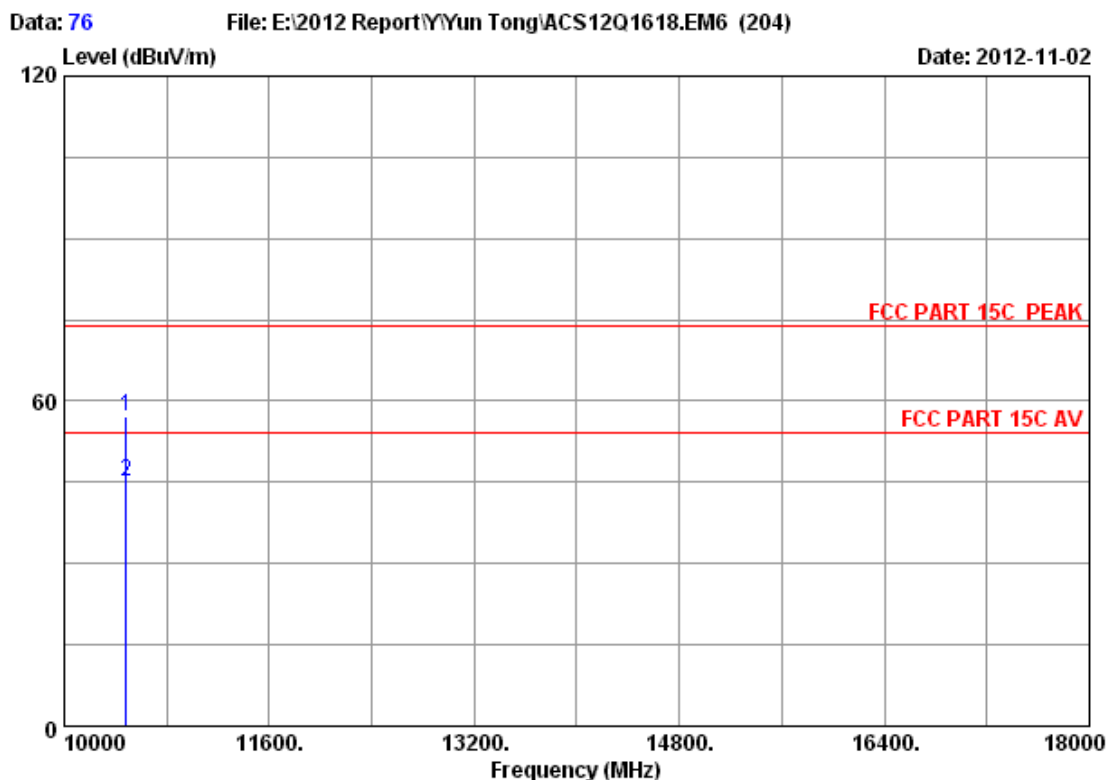


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.000	38.20	12.26	34.85	41.55	57.16	74.00	16.84	Peak
2	10480.000	38.20	12.26	34.85	29.66	45.27	54.00	8.73	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

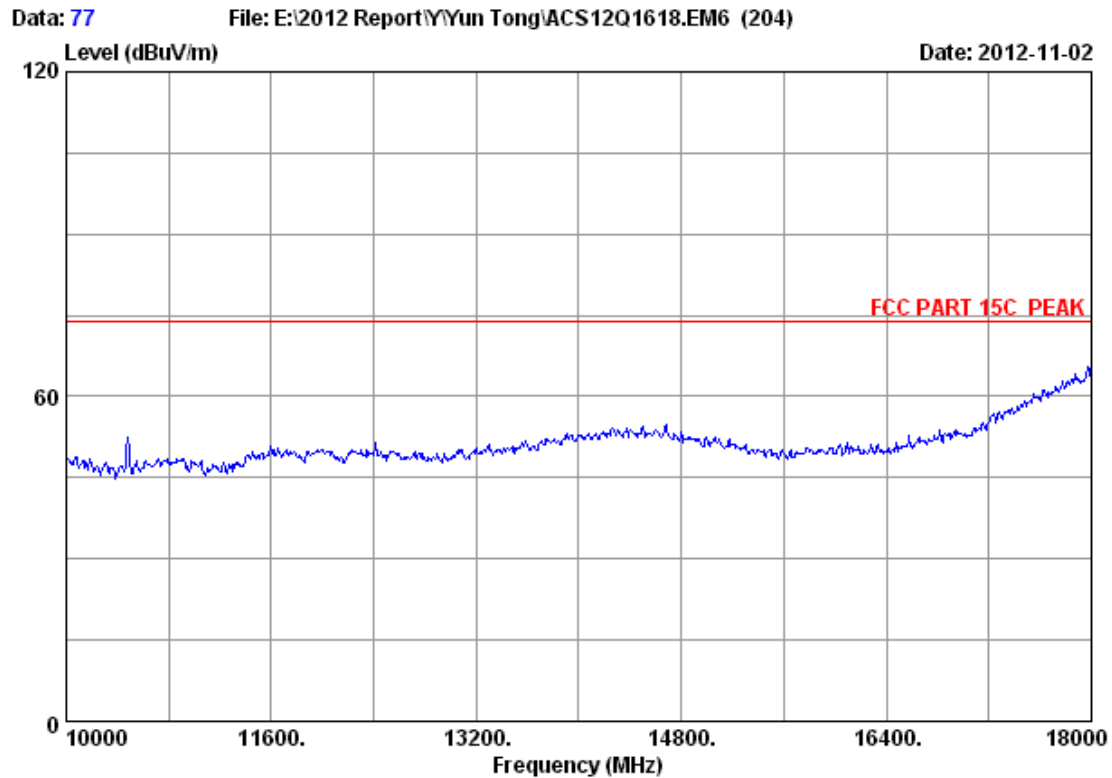

Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: UWSB-System 2.1x-W		
Power supply	: DC 7.5V From Adapter Input AC 120V/60Hz		
Test mode	: 5240MHz Tx		
M/N	: UWT-201X		

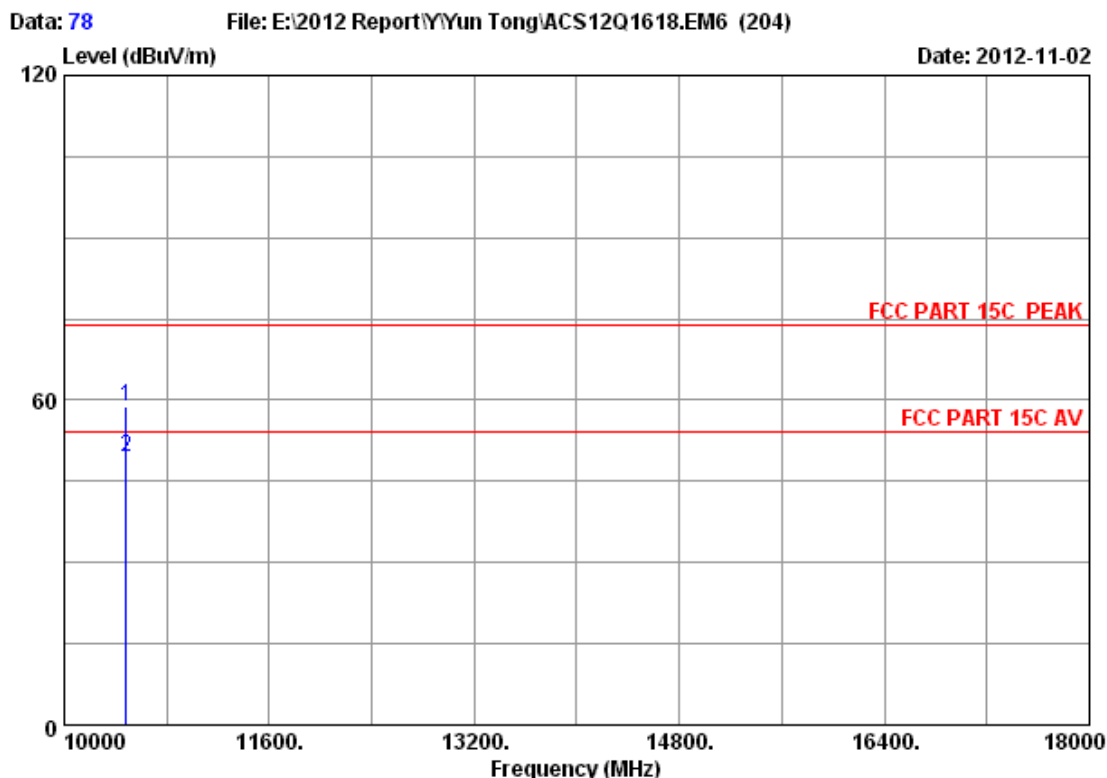

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X

	Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1 10480.000	38.20	12.26	34.85	43.25	58.86	74.00	15.14	Peak
2 10480.000	38.20	12.26	34.85	33.81	49.42	54.00	4.58	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

5.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the emissions outside operation frequency band shall comply with 15.407(b)(1) requirement.


5.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

Remark : According above measurement, all emission comply with 15.209 requirement, and refer KDB789033, Use the formula $EIRP(dBm) = E(dBuV/m) - 95.2$, The test distance is 3m, We choose the worst case emission level is 65.33dBuV/m at 5254.375MHz, and the EIRP level = $65.33 - 95.2 = -29.87dBm$ which lower than limit -27dBm and comply with 15.407 (b)(1) requirement.

5.4. Test Results

Pass (The testing data was attached in the next pages.)

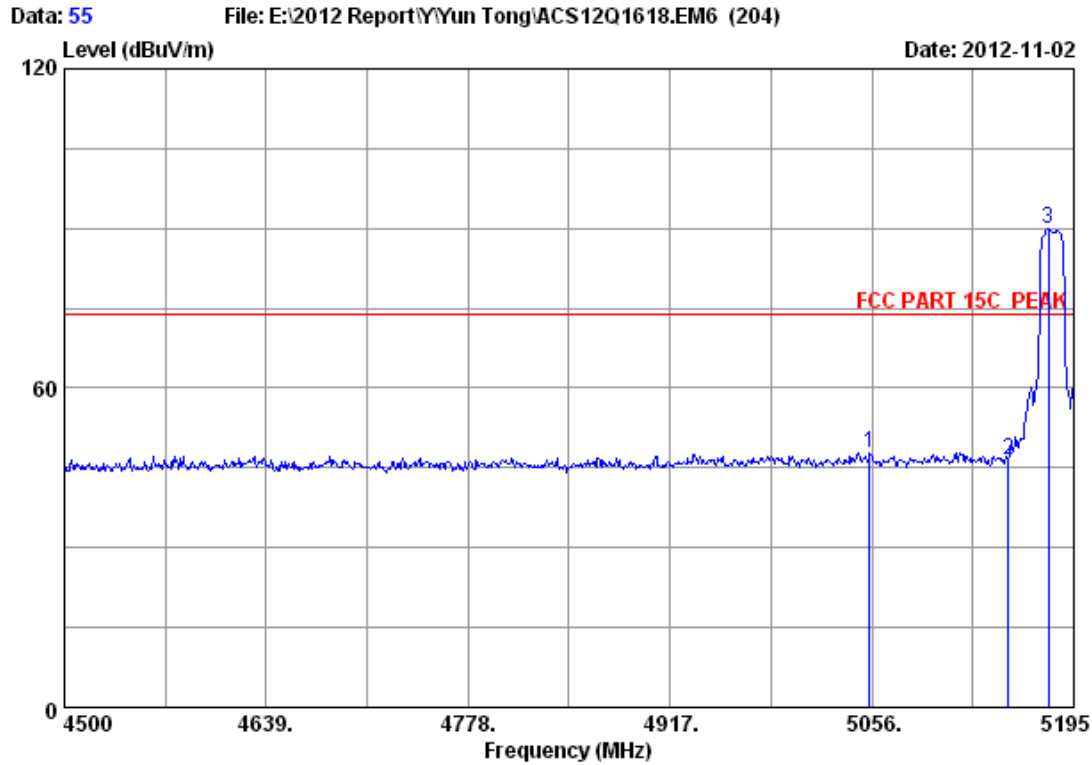


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5054.610	32.98	8.89	35.63	41.61	47.85	74.00	26.15	Peak
2	5150.000	33.11	8.98	35.60	39.99	46.48	74.00	27.52	Peak
3	5177.625	33.15	9.01	35.59	83.30	89.87	74.00	-15.87	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

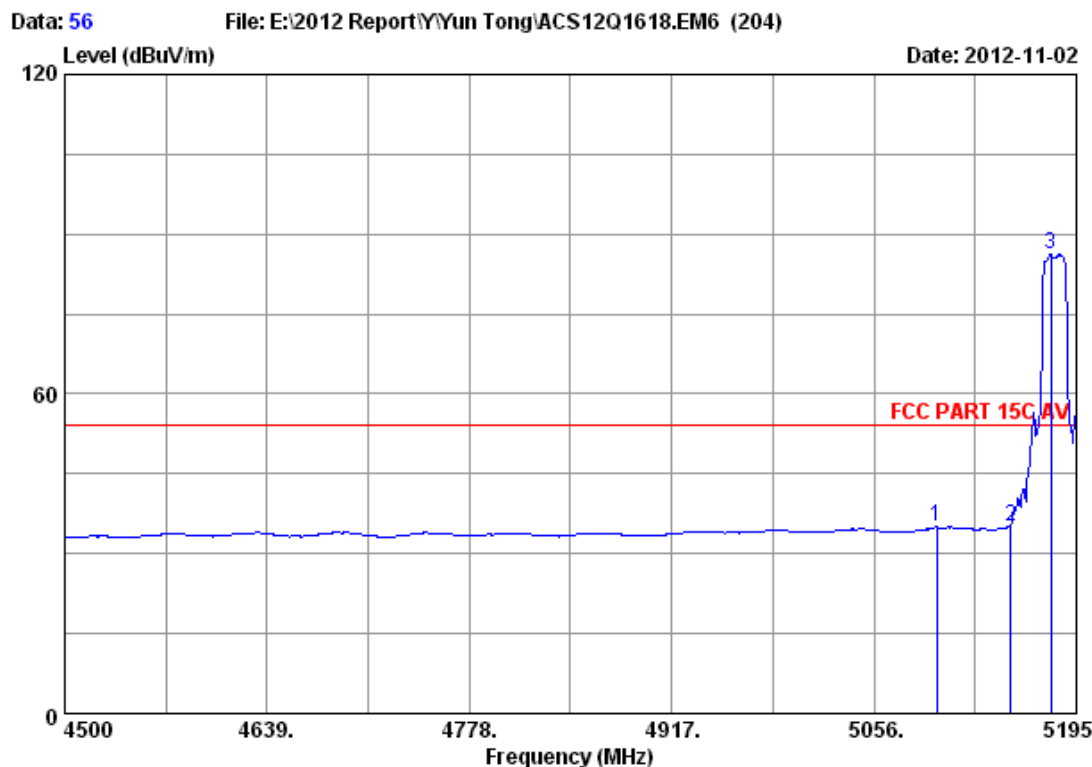


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5099.090	33.04	8.93	35.62	28.66	35.01	54.00	18.99	Average
2	5150.000	33.11	8.98	35.60	28.74	35.23	54.00	18.77	Average
3	5177.625	33.15	9.01	35.59	79.74	86.31	54.00	-32.31	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

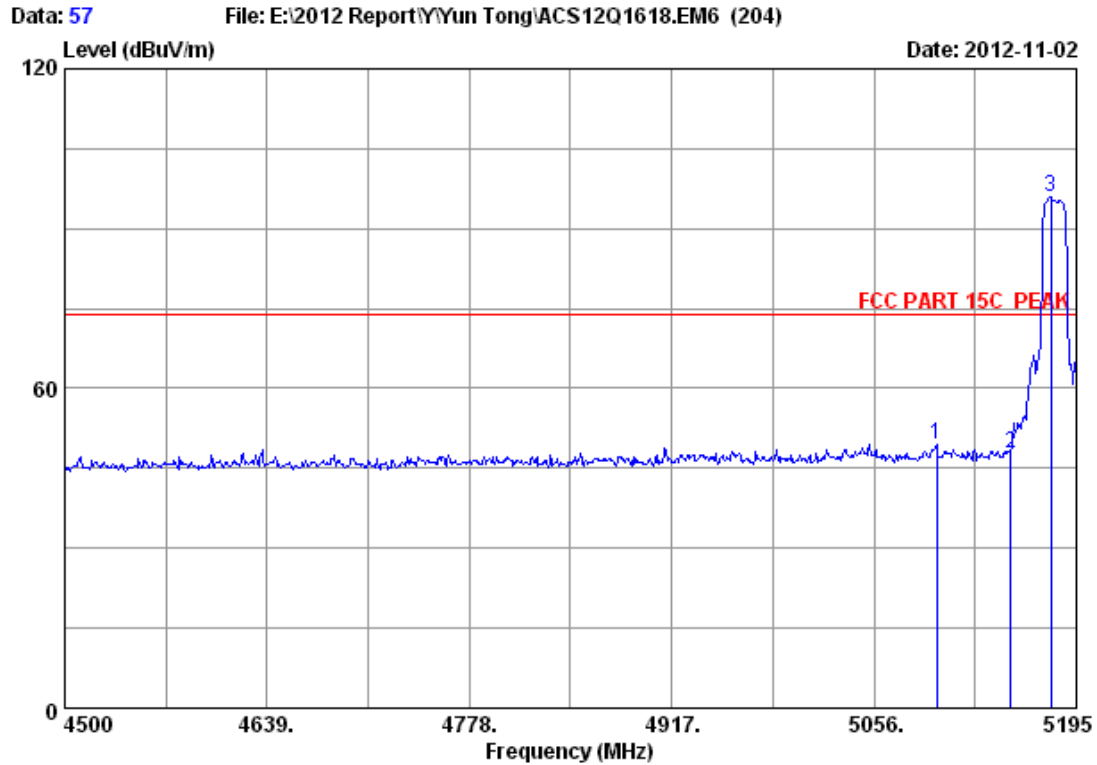


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5099.090	33.04	8.93	35.62	43.16	49.51	74.00	24.49	Peak
2	5150.000	33.11	8.98	35.60	41.35	47.84	74.00	26.16	Peak
3	5177.625	33.15	9.01	35.59	89.29	95.86	74.00	-21.86	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

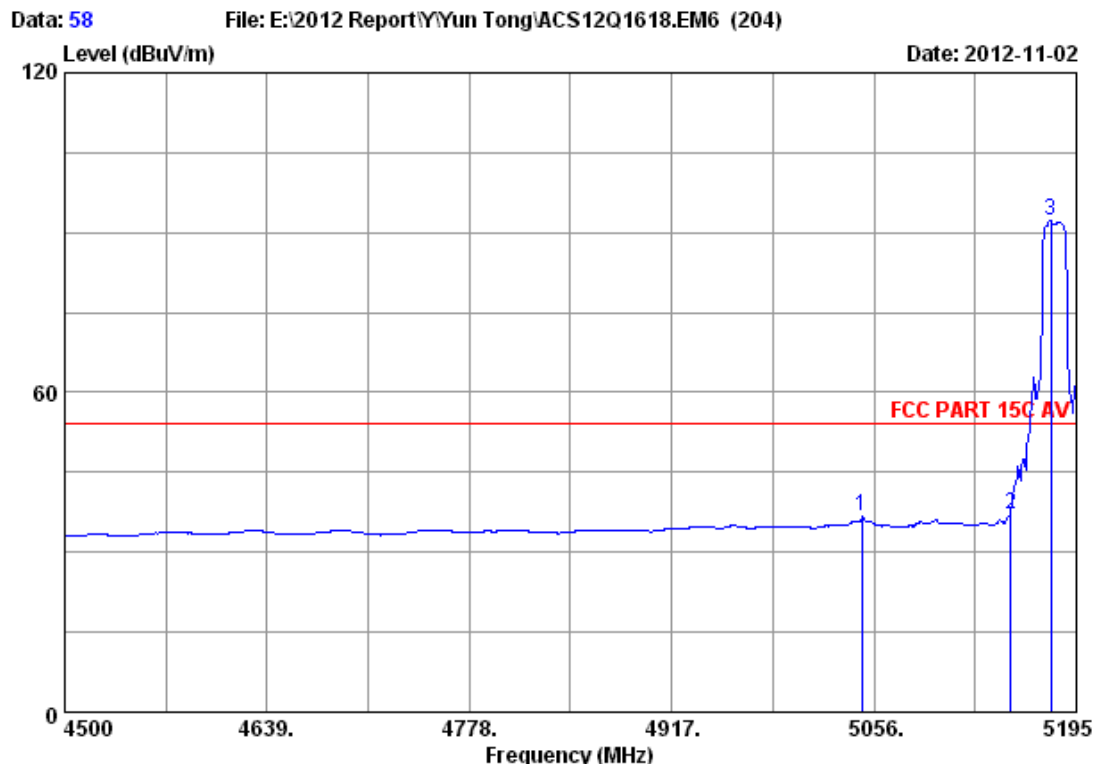


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5180MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5047.660	32.97	8.89	35.63	30.48	36.71	54.00	17.29	Average
2	5150.000	33.11	8.98	35.60	30.75	37.24	54.00	16.76	Average
3	5177.625	33.15	9.01	35.59	85.79	92.36	54.00	-38.36	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

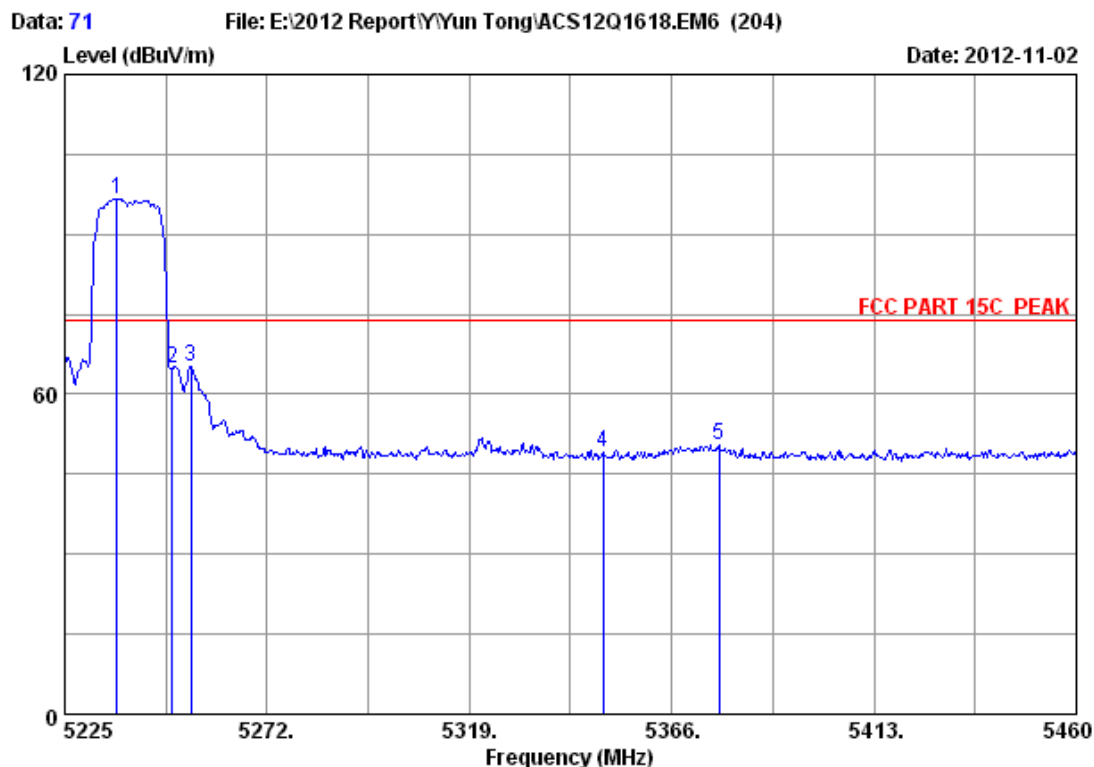


Site no. : 3m Chamber Data no. : 71
Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : UWSB-System 2.1x-W
Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
Test mode : 5240MHz Tx
M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5237.220	33.23	9.06	35.57	89.88	96.60	74.00	-22.60	Peak
2	5250.000	33.25	9.07	35.56	58.04	64.80	74.00	9.20	Peak
3	5254.375	33.26	9.07	35.56	58.56	65.33	74.00	8.67	Peak
4	5350.000	33.39	9.16	35.53	41.99	49.01	74.00	24.99	Peak
5	5377.045	33.43	9.19	35.52	43.30	50.40	74.00	23.60	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

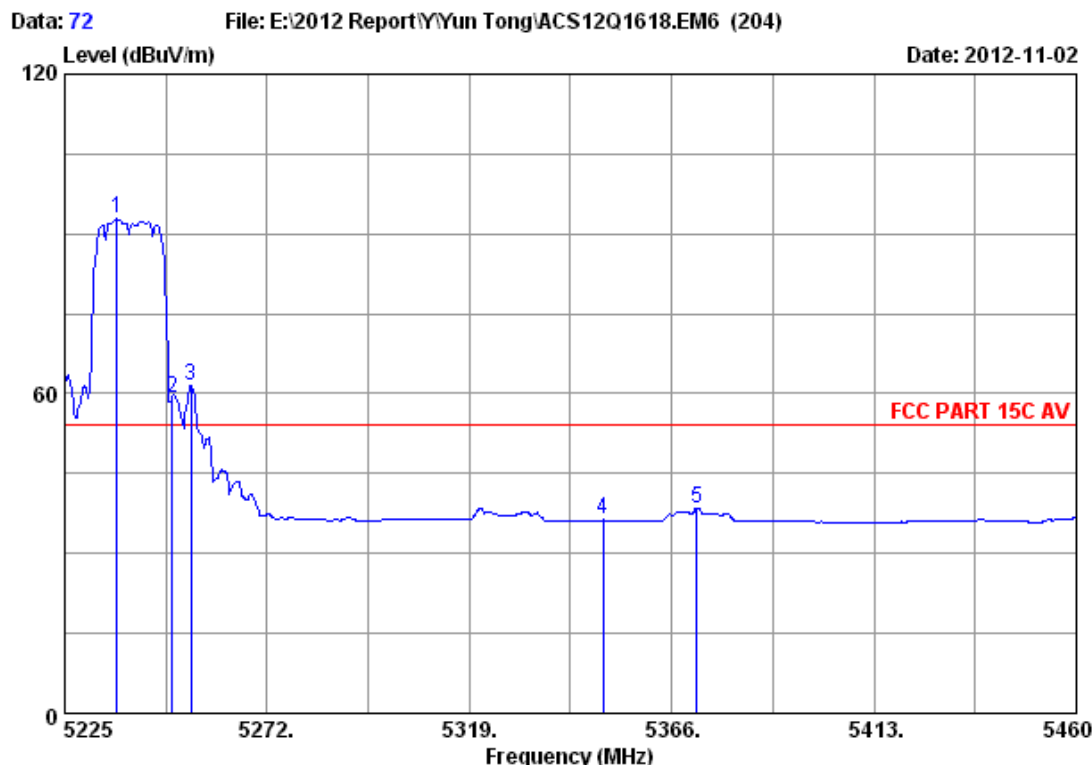


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5237.220	33.23	9.06	35.57	86.05	92.77	54.00	-38.77	Average
2	5250.000	33.25	9.07	35.56	52.50	59.26	54.00	-5.26	Average
3	5254.375	33.26	9.07	35.56	54.71	61.48	54.00	-7.48	Average
4	5350.000	33.39	9.16	35.53	29.26	36.28	54.00	17.72	Average
5	5371.875	33.42	9.18	35.52	31.38	38.46	54.00	15.54	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

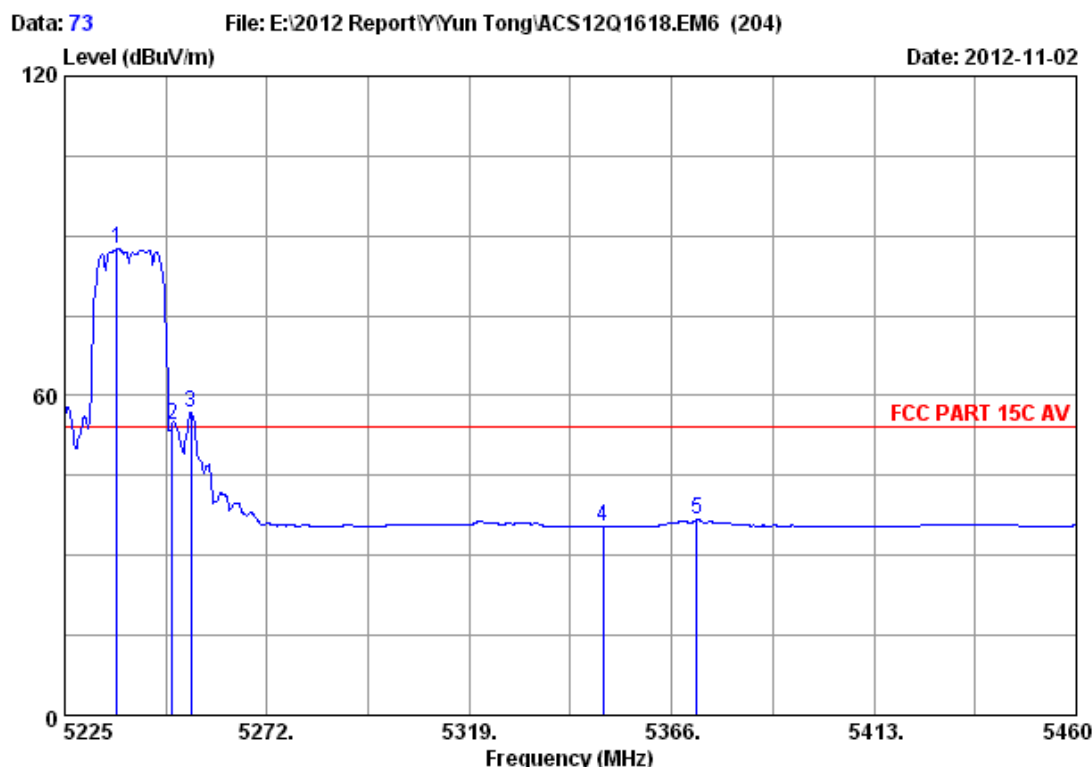


Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5237.220	33.23	9.06	35.57	80.91	87.63	54.00	-33.63	Average
2	5250.000	33.25	9.07	35.56	47.66	54.42	54.00	-0.42	Average
3	5254.375	33.26	9.07	35.56	49.97	56.74	54.00	-2.74	Average
4	5350.000	33.39	9.16	35.53	28.48	35.50	54.00	18.50	Average
5	5371.875	33.42	9.18	35.52	29.58	36.66	54.00	17.34	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

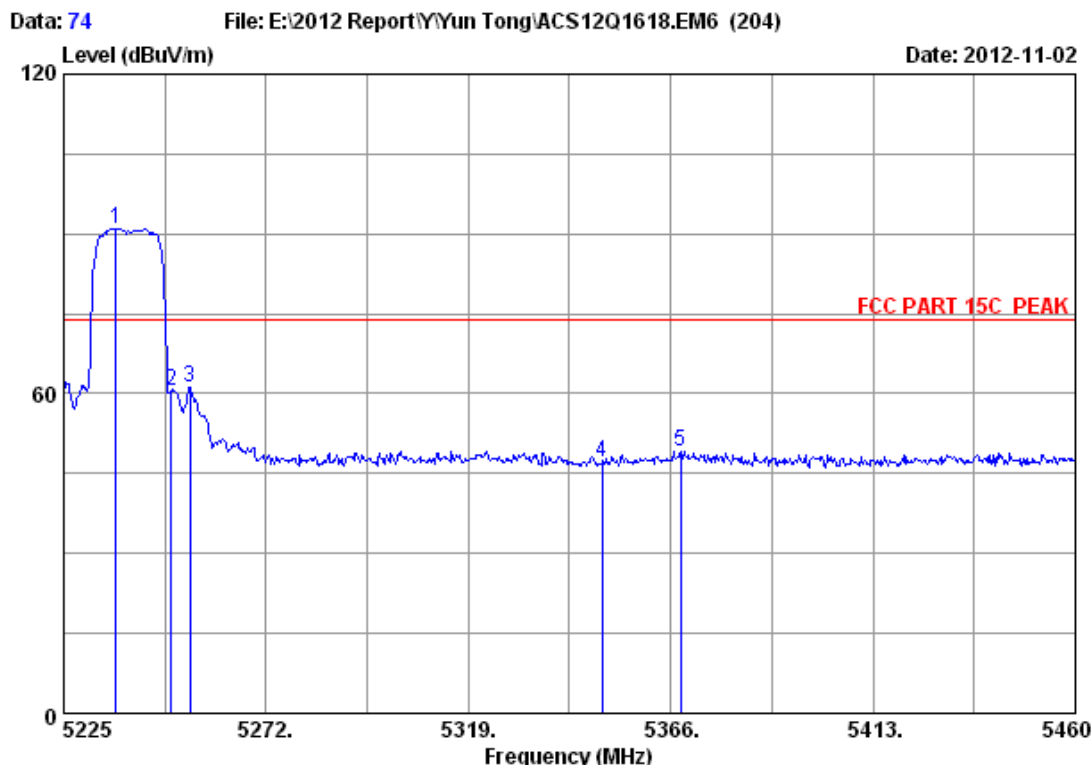

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : UWSB-System 2.1x-W
 Power supply : DC 7.5V From Adapter Input AC 120V/60Hz
 Test mode : 5240MHz Tx
 M/N : UWT-201X

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5237.220	33.23	9.06	35.57	84.34	91.06	74.00	-17.06	Peak
2	5250.000	33.25	9.07	35.56	53.60	60.36	74.00	13.64	Peak
3	5254.375	33.26	9.07	35.56	54.31	61.08	74.00	12.92	Peak
4	5350.000	33.39	9.16	35.53	39.98	47.00	74.00	27.00	Peak
5	5368.350	33.42	9.18	35.52	42.17	49.25	74.00	24.75	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

6. 26DB AND 20DB BANDWIDTH TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhner	Sucoflex104	-	May.08, 12	1 Year

6.2. Limit

No limit

6.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300kHz RBW and 1 MHz VBW. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

6.4. Test Results

26dB Bandwidth

EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Test date: 2012-11-09	Pressure: 101.1±1.0 kpa	Humidity: 53.1±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 23.9±0.6°C

Cable loss: 2 dB				
Test Mode	CH (MHz)	26dB bandwidth (MHz)		Limit (KHz)
		ANT A	ANT B	
Tx	5180	16.328	16.368	≥ 500
	5210	16.361	16.339	≥ 500
	5240	16.363	16.324	≥ 500
Conclusion : PASS				

20dB Bandwidth


EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Test date: 2012-11-29	Pressure: 101.1±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 21.5±0.6 °C

Cable loss: 2 dB		Attenuator loss: 30 dB		
Test Mode	CH (MHz)	20dB bandwidth (MHz)		Limit (KHz)
		ANT A	ANT B	
Tx	5180	15.974	15.957	N/A
	5210	15.973	15.958	N/A
	5240	15.965	15.971	N/A
Conclusion : PASS				


26dB Bandwidth

ANT A


5180MHz

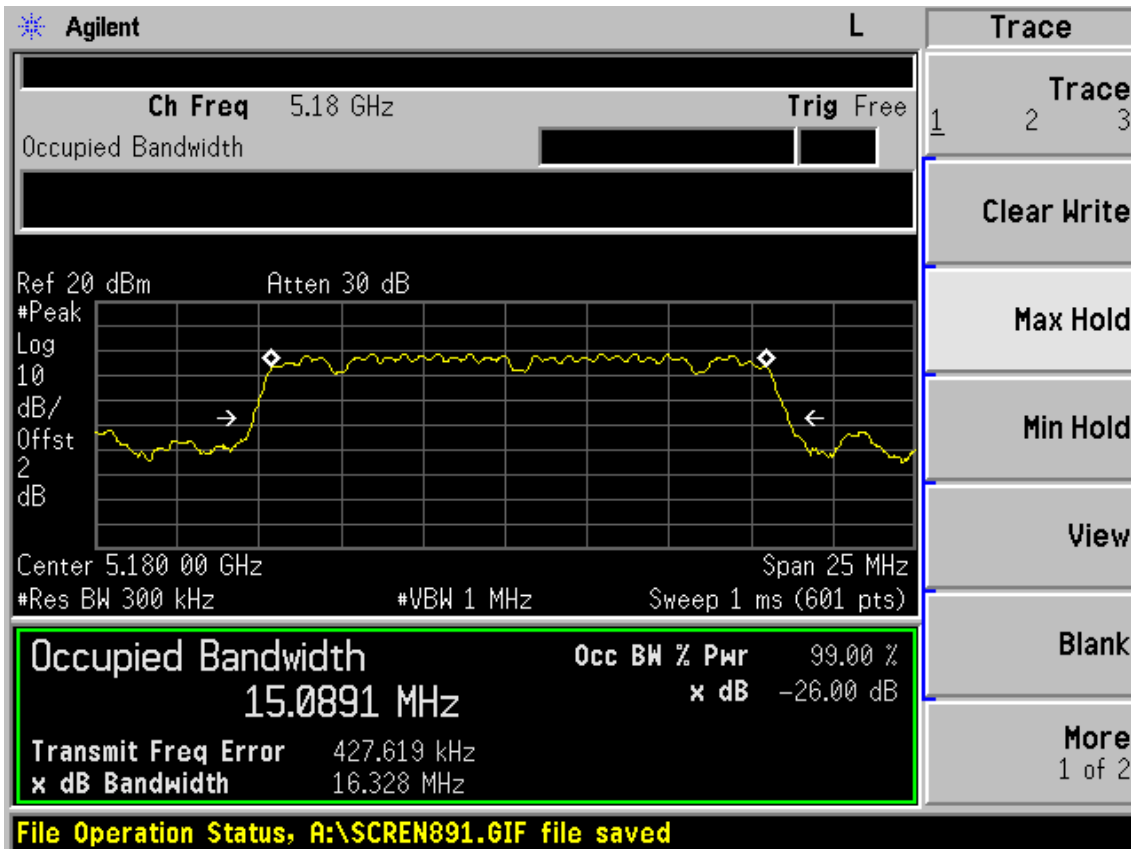

5210MHz

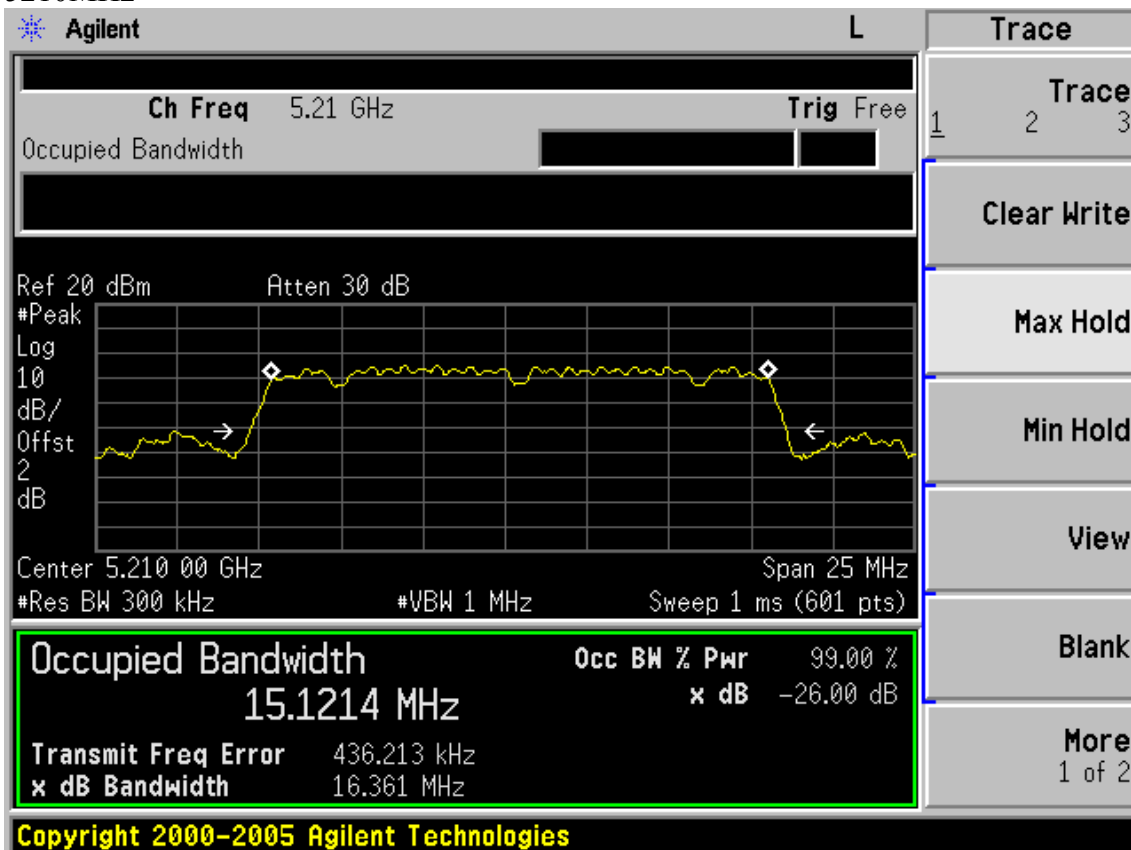


5240MHz

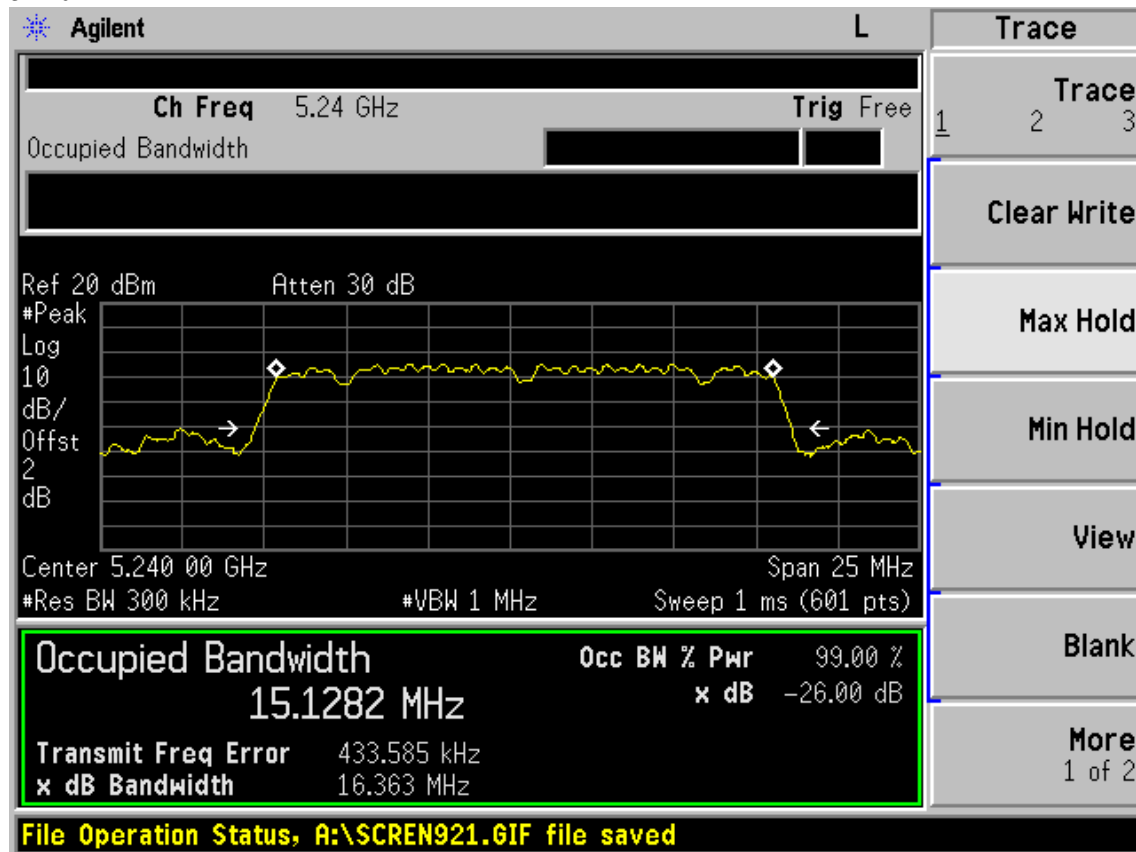


ANT B


5180MHz

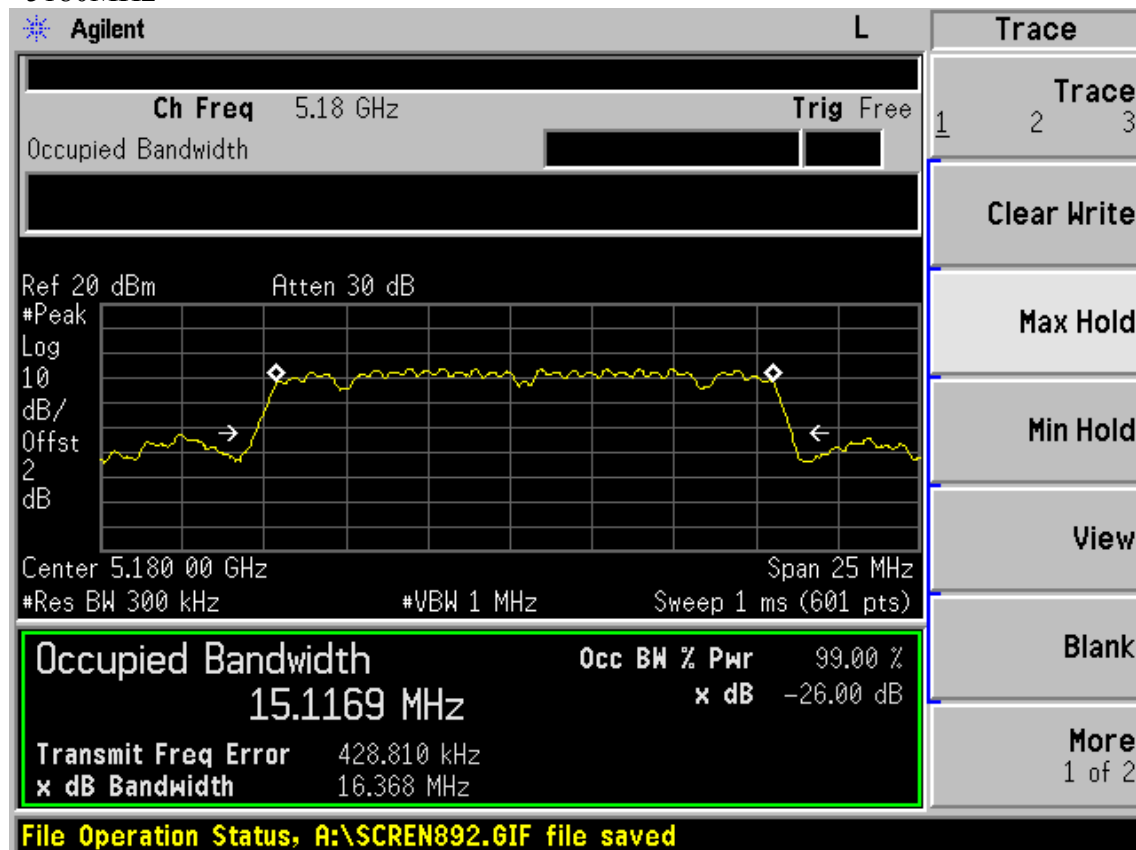

5210MHz

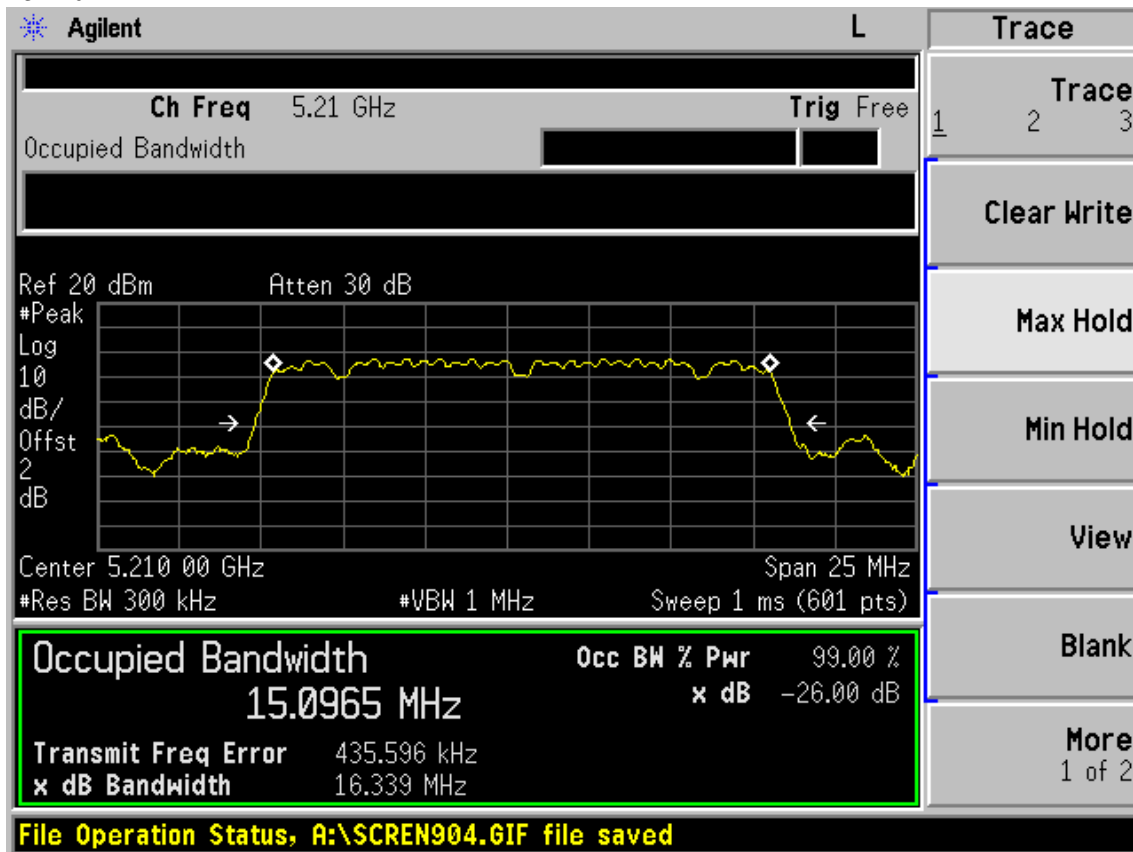


5240MHz

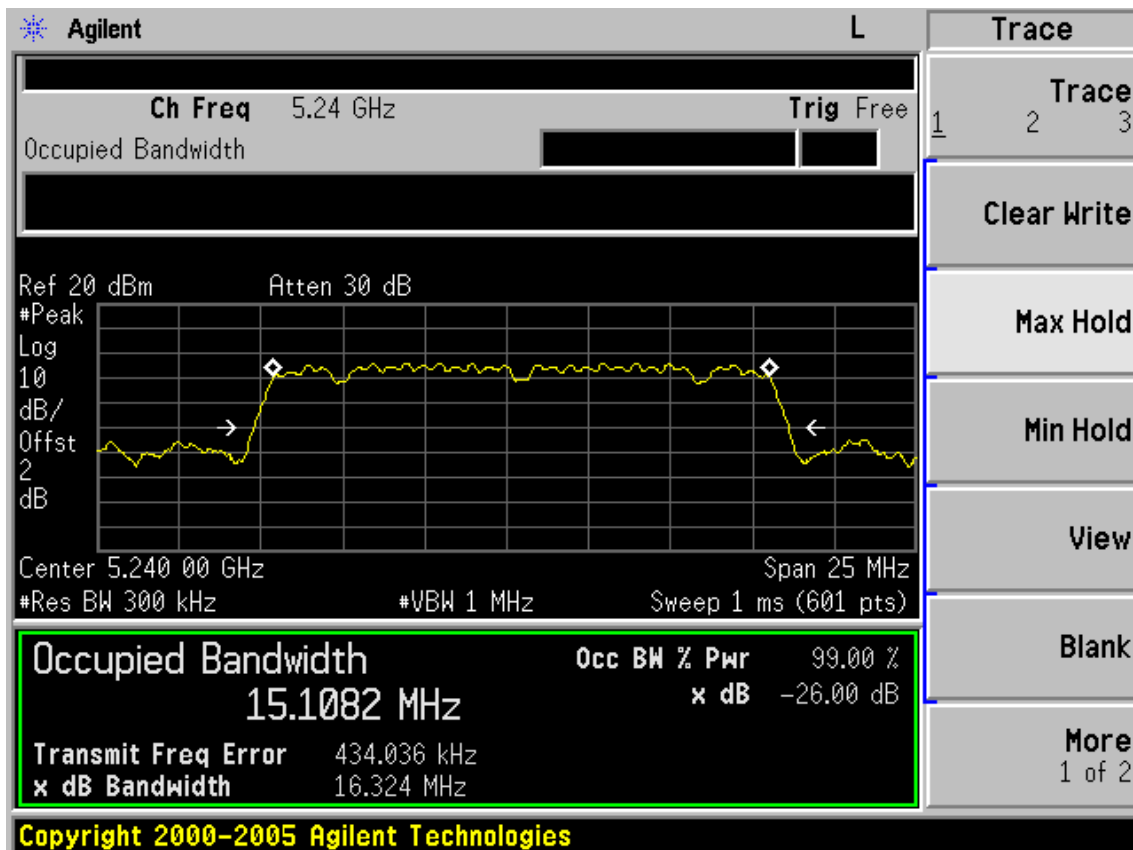


20dB Bandwidth

ANT A


5180MHz

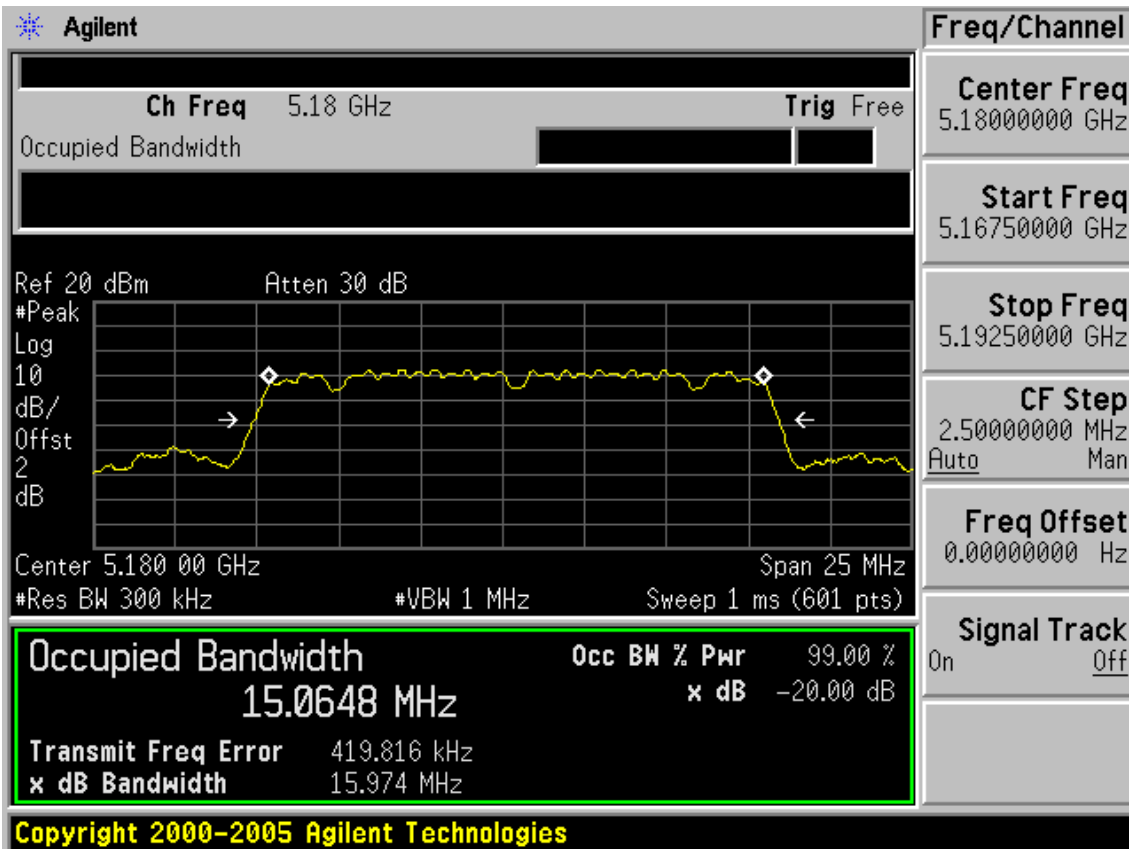

5210MHz

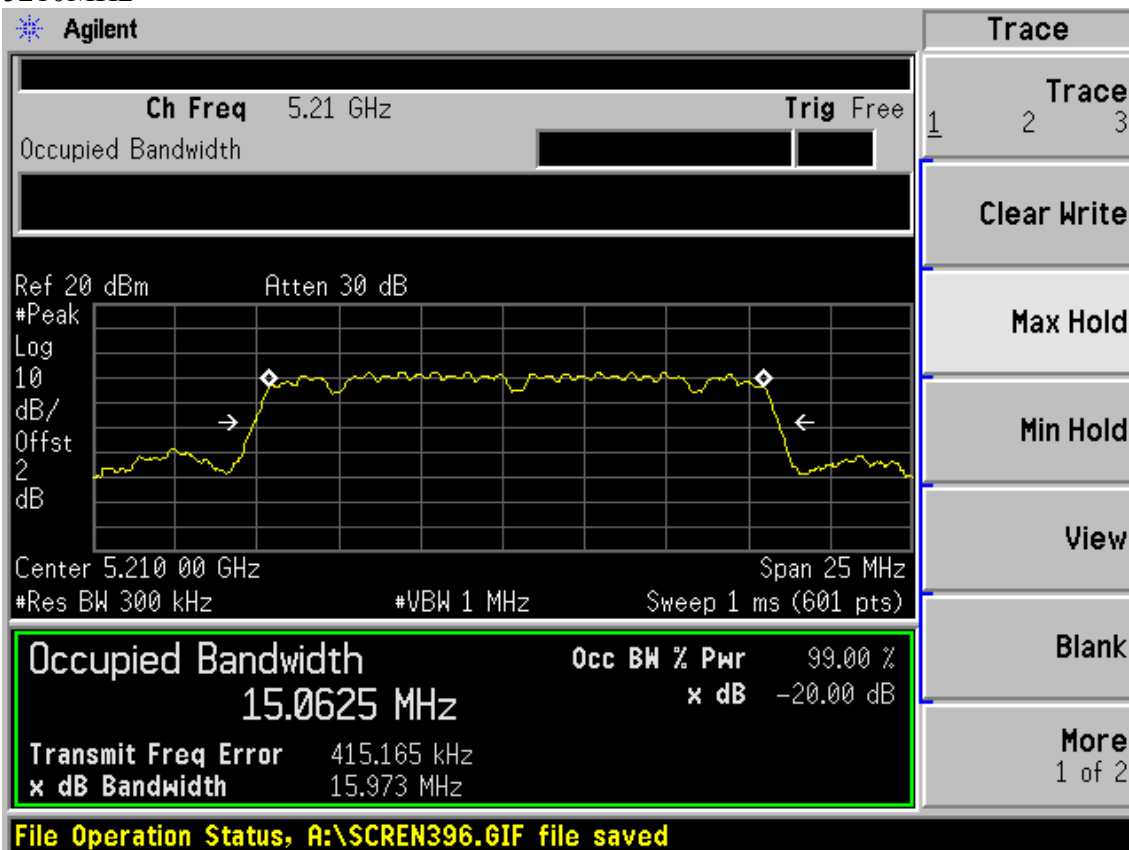


5240MHz

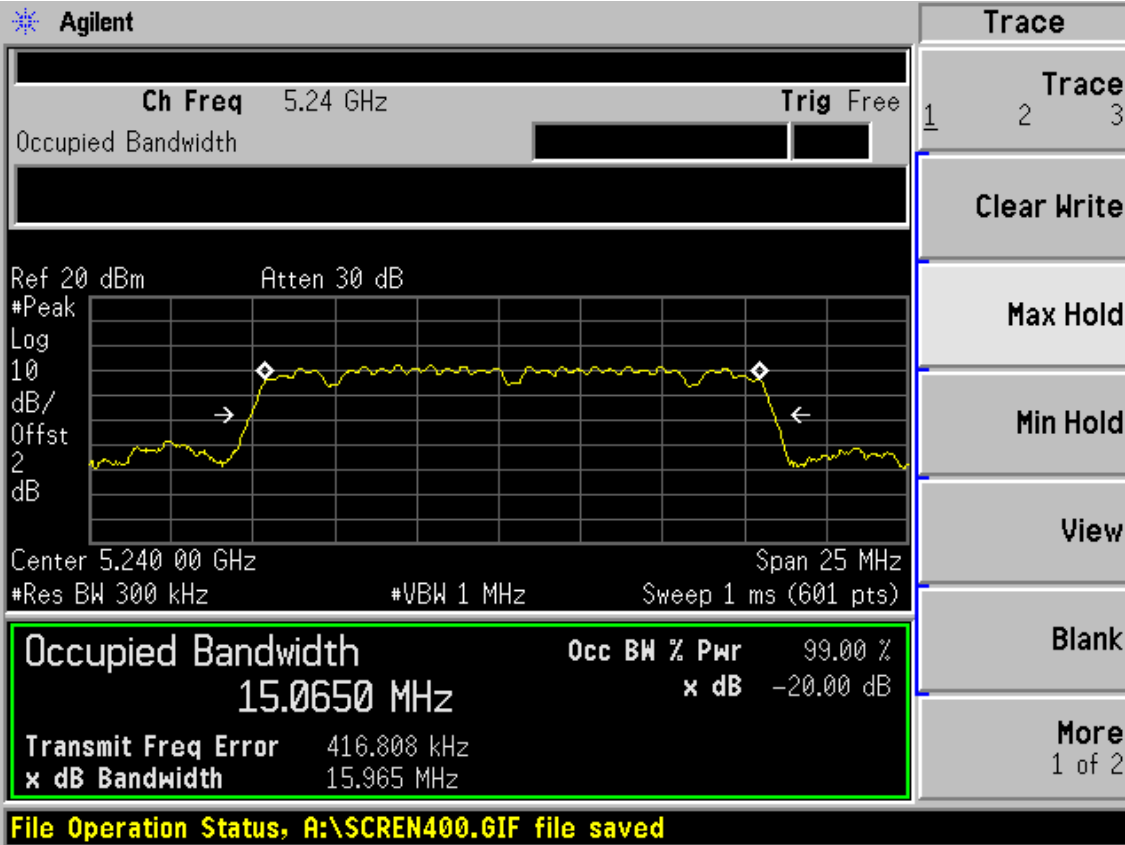


ANT B


5180MHz

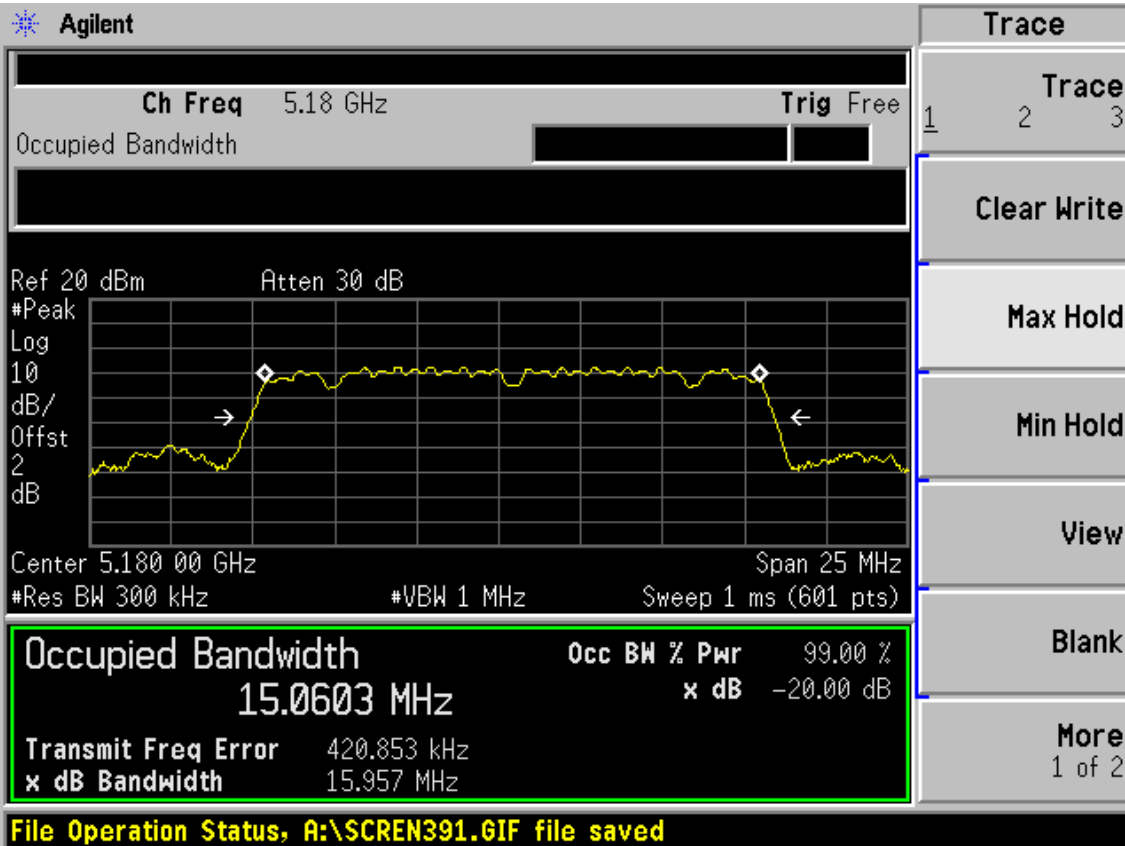

5210MHz

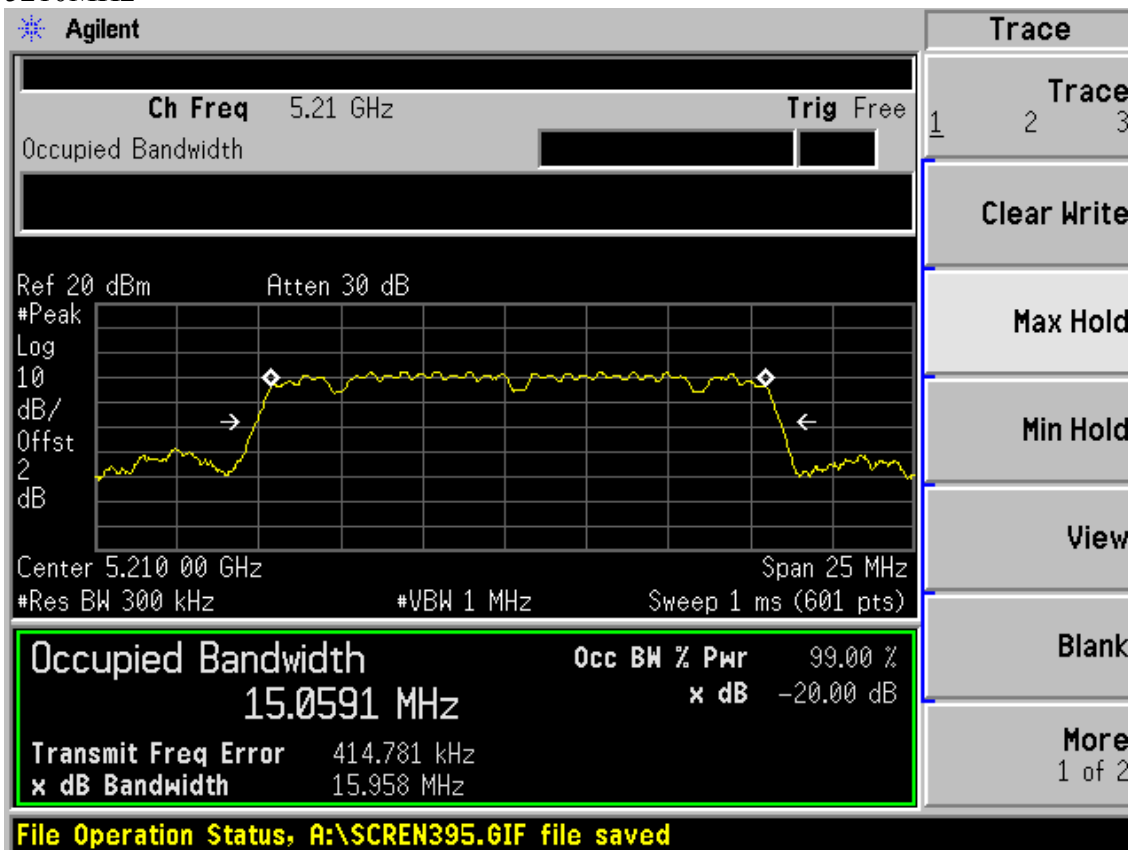

5240MHz

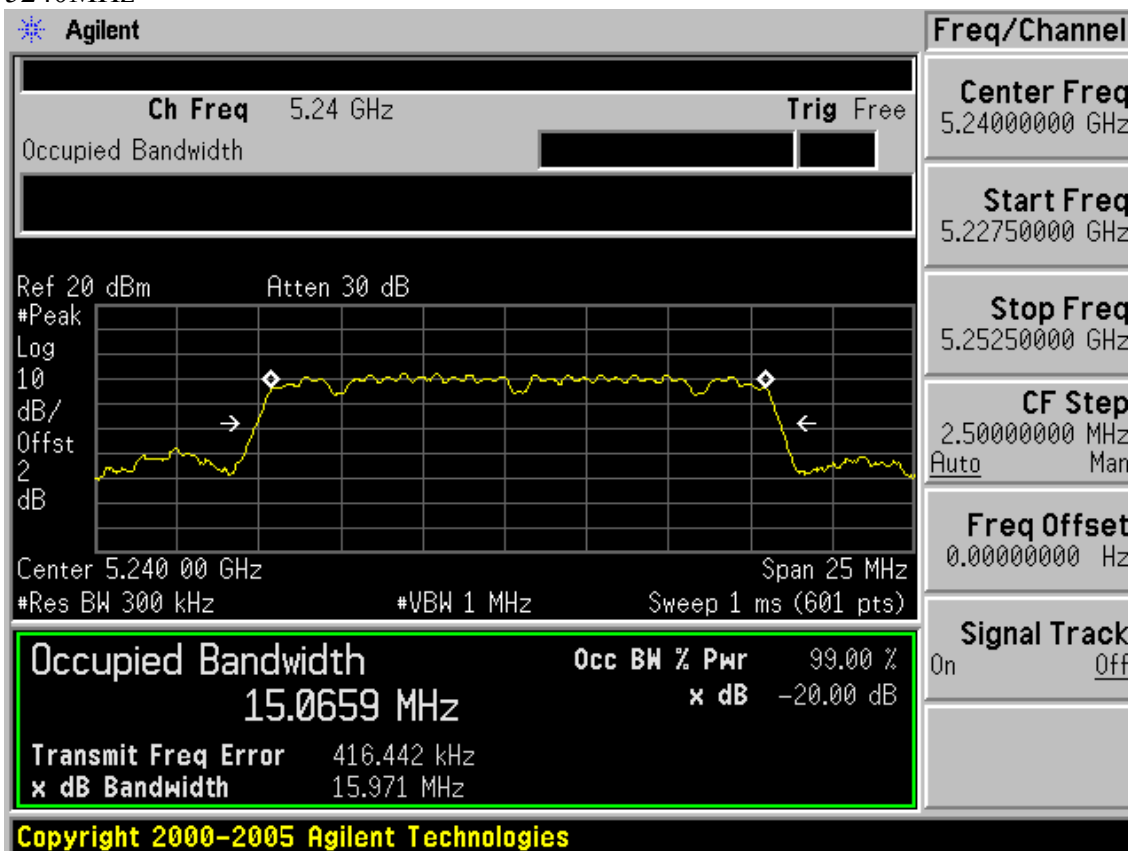

7. OUTPUT POWER TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year
5.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 12	1 Year
6.	Power Sensor	Anritsu	MA2491A	033005	May.08, 12	1 Year

7.2. Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer by suitable attenuation, the channel power measure function of spectrum Analyzer was used to measure out the PK output power of device

7.4. Test Results

EUT: UWSB-System 2.1x-W				
M/N: UWT-201X				
Test date: 2012-11-09		Pressure: 101.2±1.0 kpa		Humidity: 52.7±3.0%
Tested by: Leo-Li		Test site: RF Site		Temperature : 22.6±0.6°C
Cable loss: 2 dB				
Test Mode	CH (MHz)	Peak output Power (dBm)		Limit (dBm)
		Chain A	Chain B	
Tx	5180	7.78	12.76	16
	5210	8.61	11.43	16
	5240	8.74	9.53	16
Conclusion: PASS				

8. POWER SPECTRAL DENSITY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

8.2. Limit

For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3. Test Procedure


The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW

8.4. Test Results


EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Test date: 2012-11-09	Pressure: 101.2±1.0 kpa	Humidity: 53.7±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 24.5±0.6°C

Cable loss: 2 dB				
Test Mode	CH (MHz)	Power density (dBm/MHz)		Limit (dBm/MHz)
		ANT A	ANT B	
Tx	5180	-2.86	1.81	4
	5210	-1.87	0.75	4
	5240	-1.52	0.28	4
Conclusion : PASS				


ANT A
5180MHz

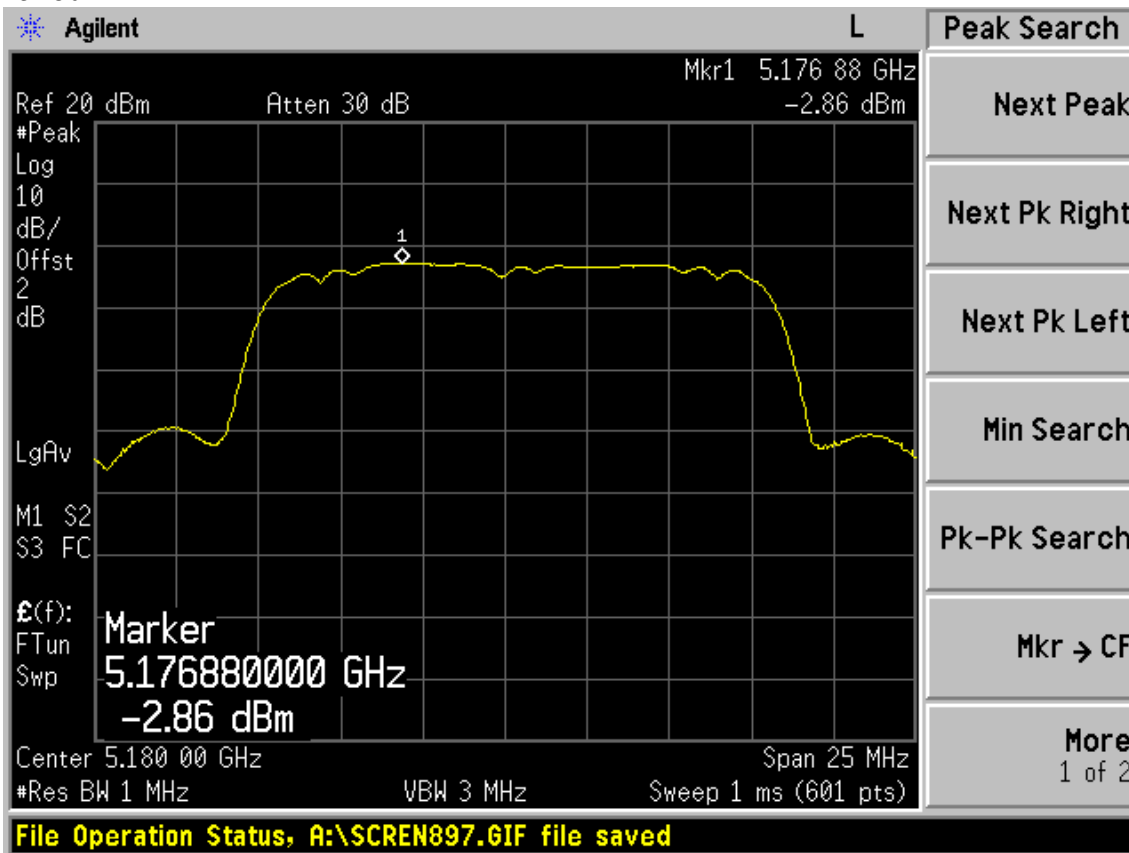

5210MHz

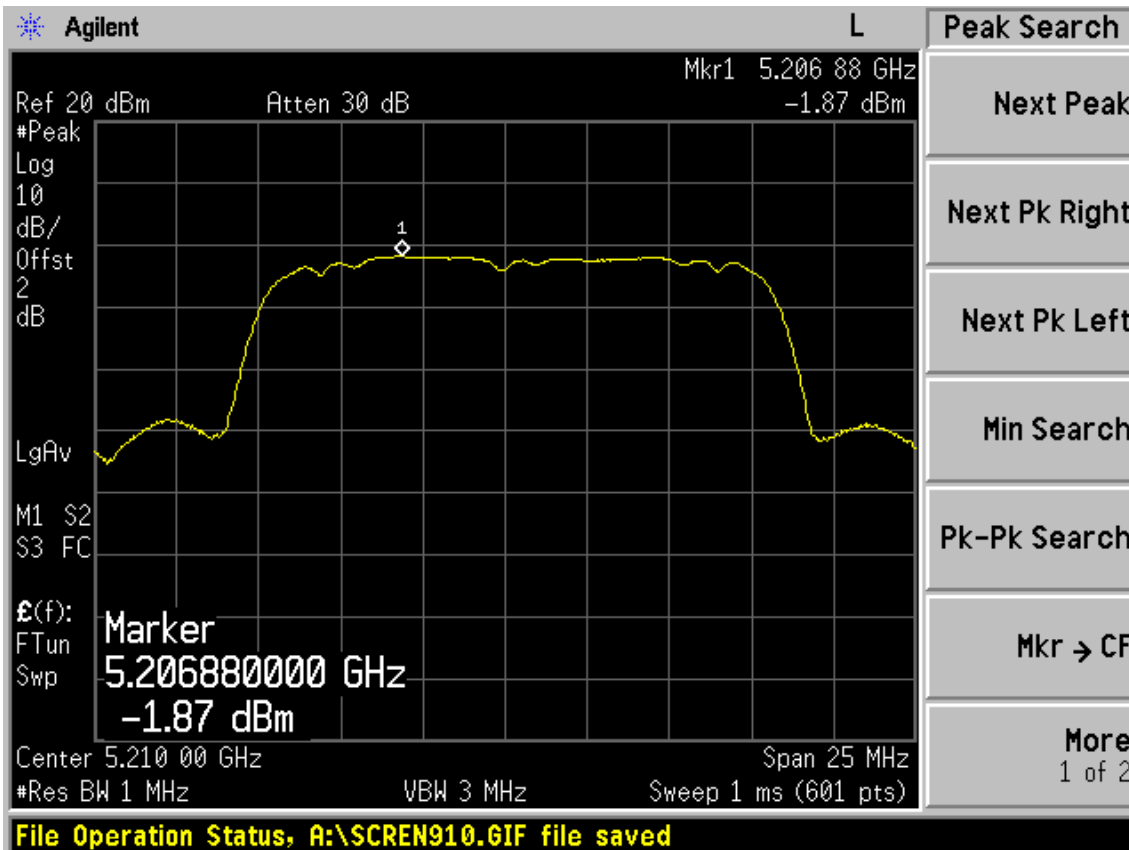


5240MHz

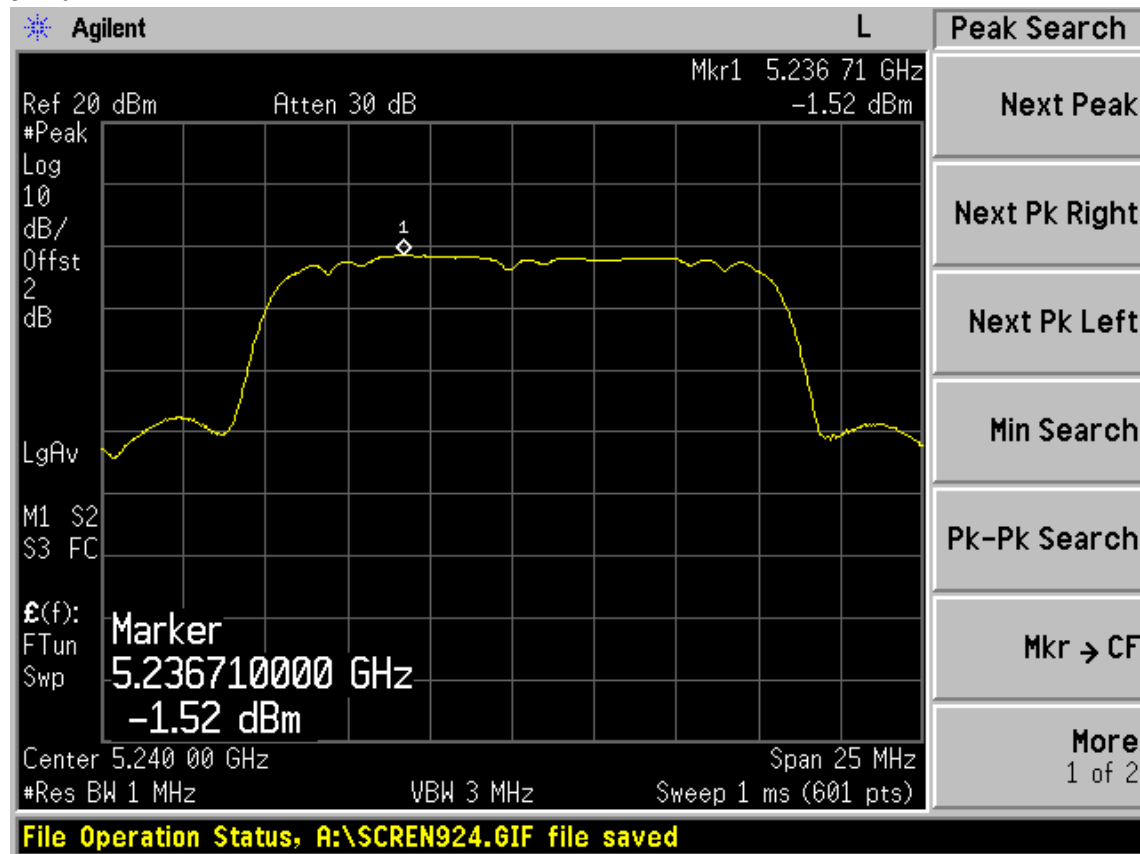


ANT B


5170MHz

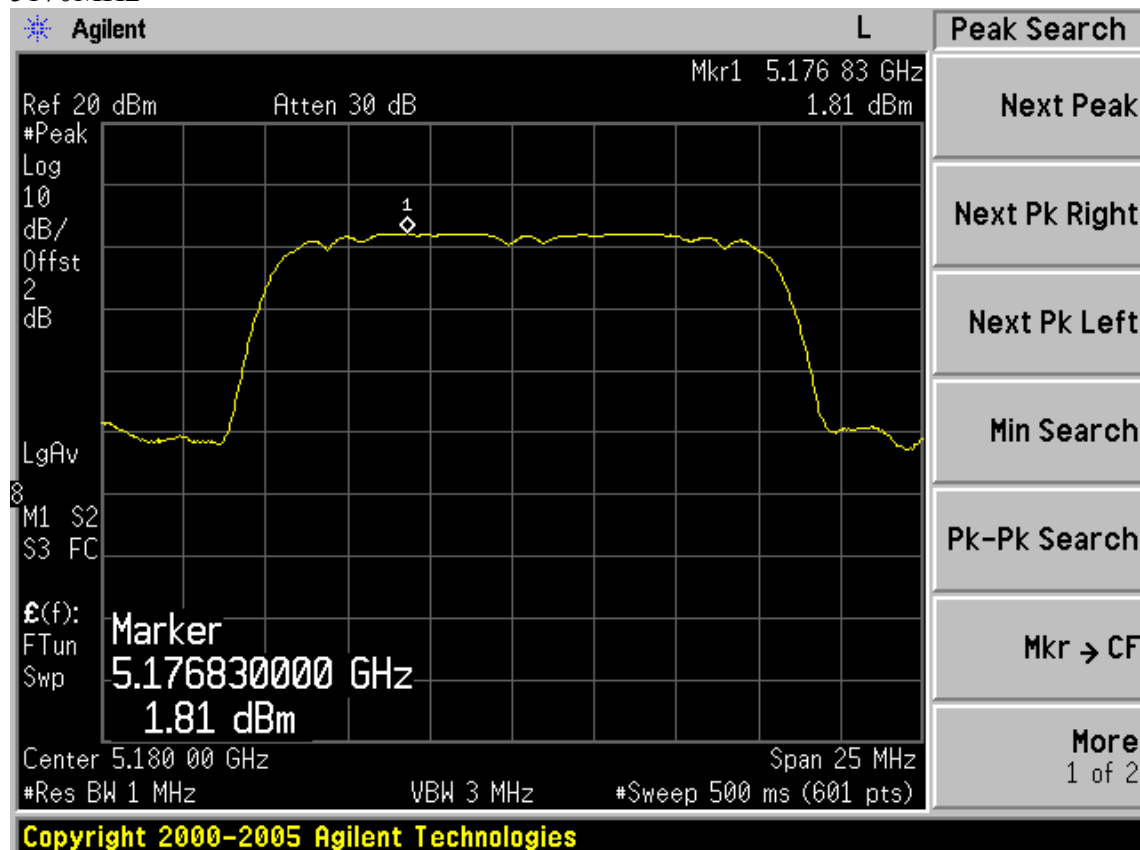

5210MHz

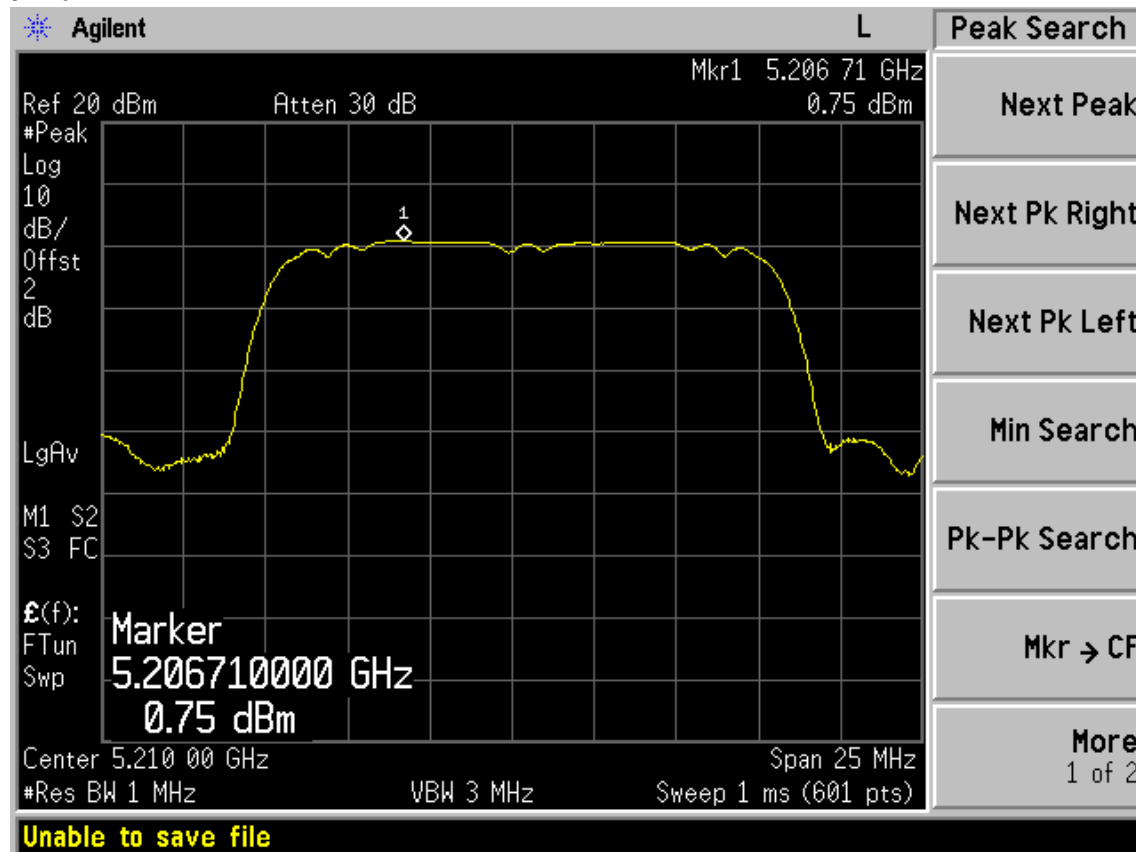

5240MHz

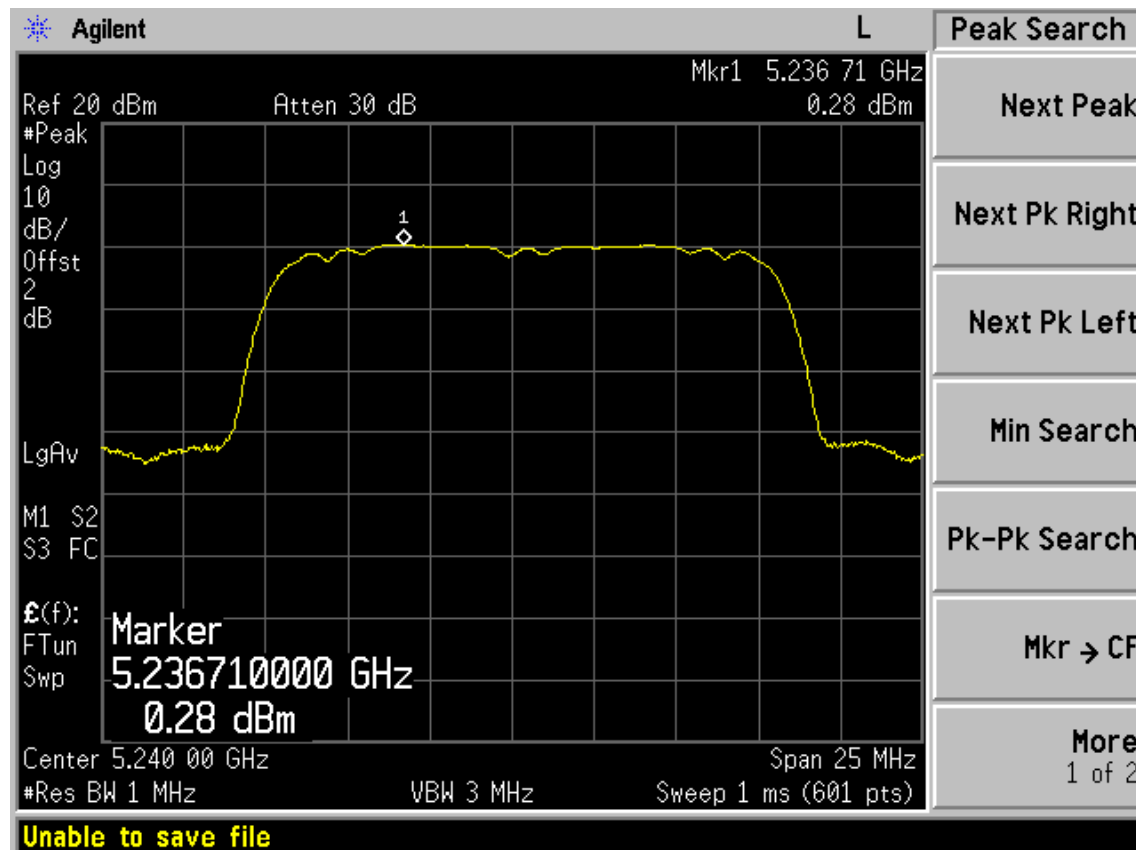

9. PEAK EXCURSION MEASUREMENT

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

9.2. Limit

The ratio of the peak excursion of modulation envelope (measured using a peak hold function) to the maximum conducted power (measured as specified above) shall not exceed 13 dB across any 1MHz bandwidth whichever is less.

9.3. Test Procedure


1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW $\geq 1/T$ (Draft n VBW = $300\text{kHz} \geq 1/4\mu\text{s}$). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.

9.4. Test Results

EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Test date: 2012-11-09	Pressure: 101.1±1.0 kpa	Humidity: 51.2±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 22.8±0.6°C


Cable loss: 2 dB				
Test Mode	CH (MHz)	Power excursion (dB)		Limit (dB)
		ANT A	ANT B	
Tx	5180	1.53	1.61	13
	5210	1.58	1.62	13
	5240	1.62	2.54	13
Conclusion : PASS				

ANT A
5180MHz

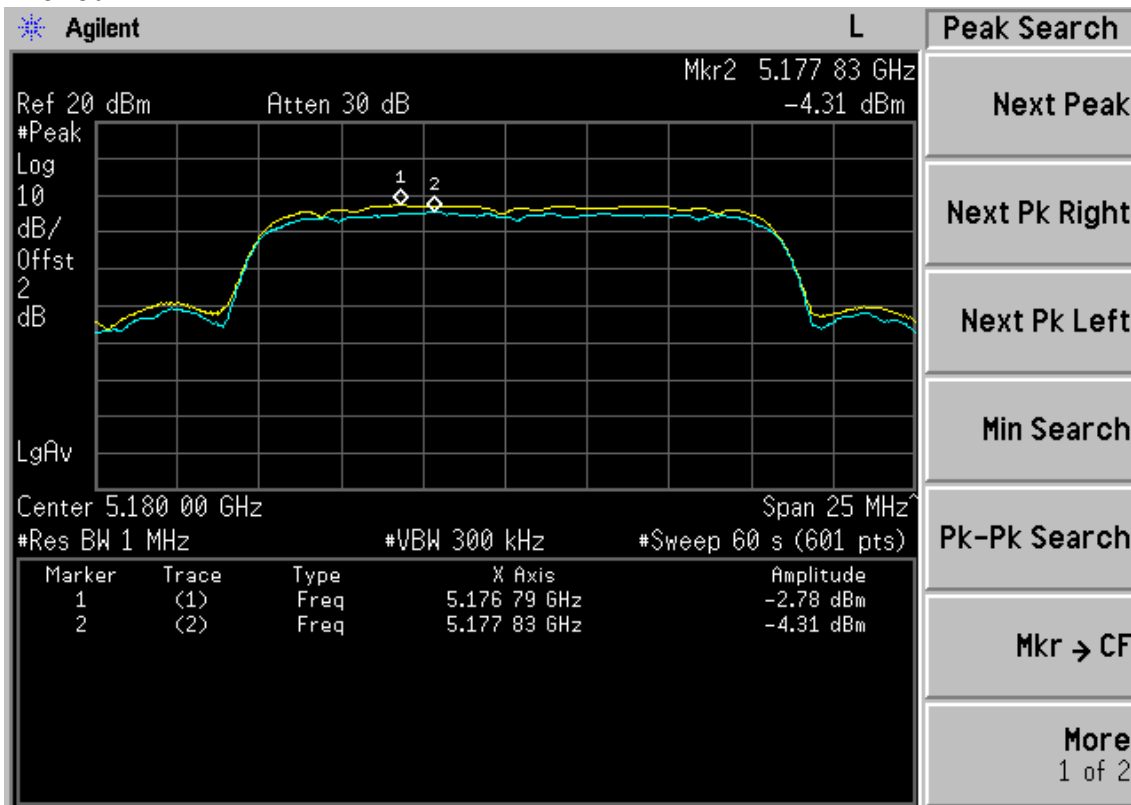


Copyright 2000-2005 Agilent Technologies

5210MHz

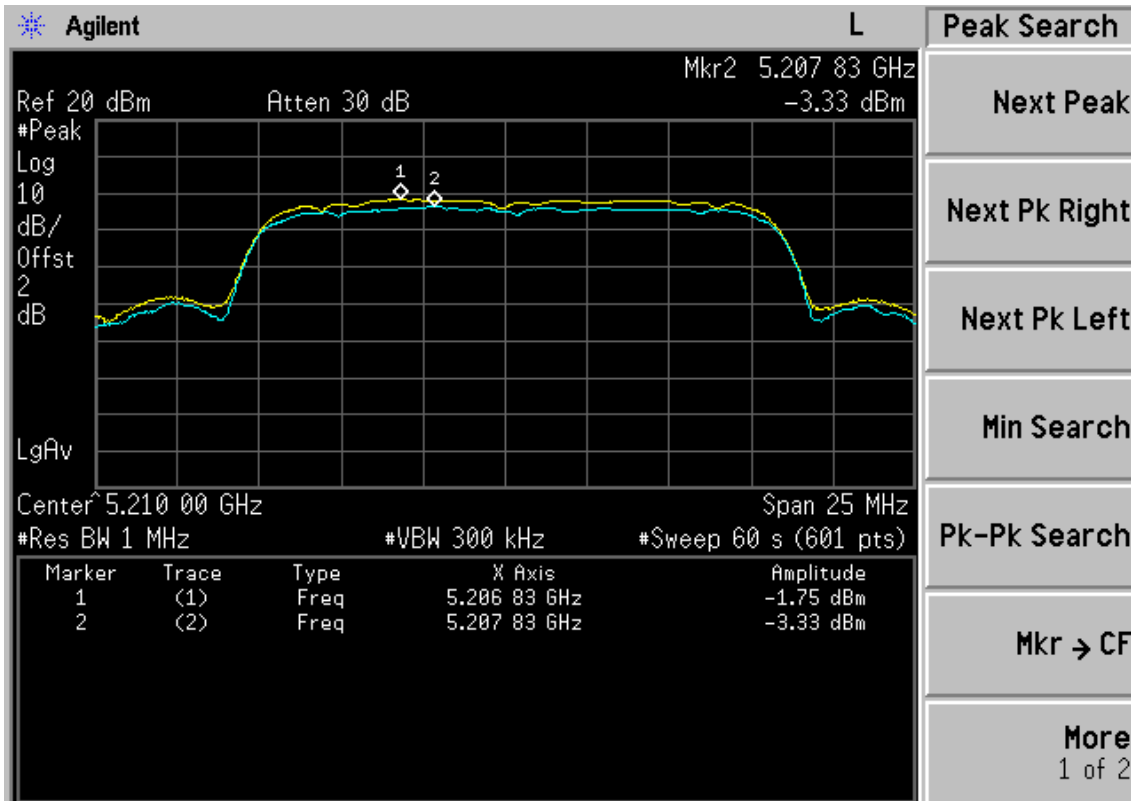


Copyright 2000-2005 Agilent Technologies

5240MHz

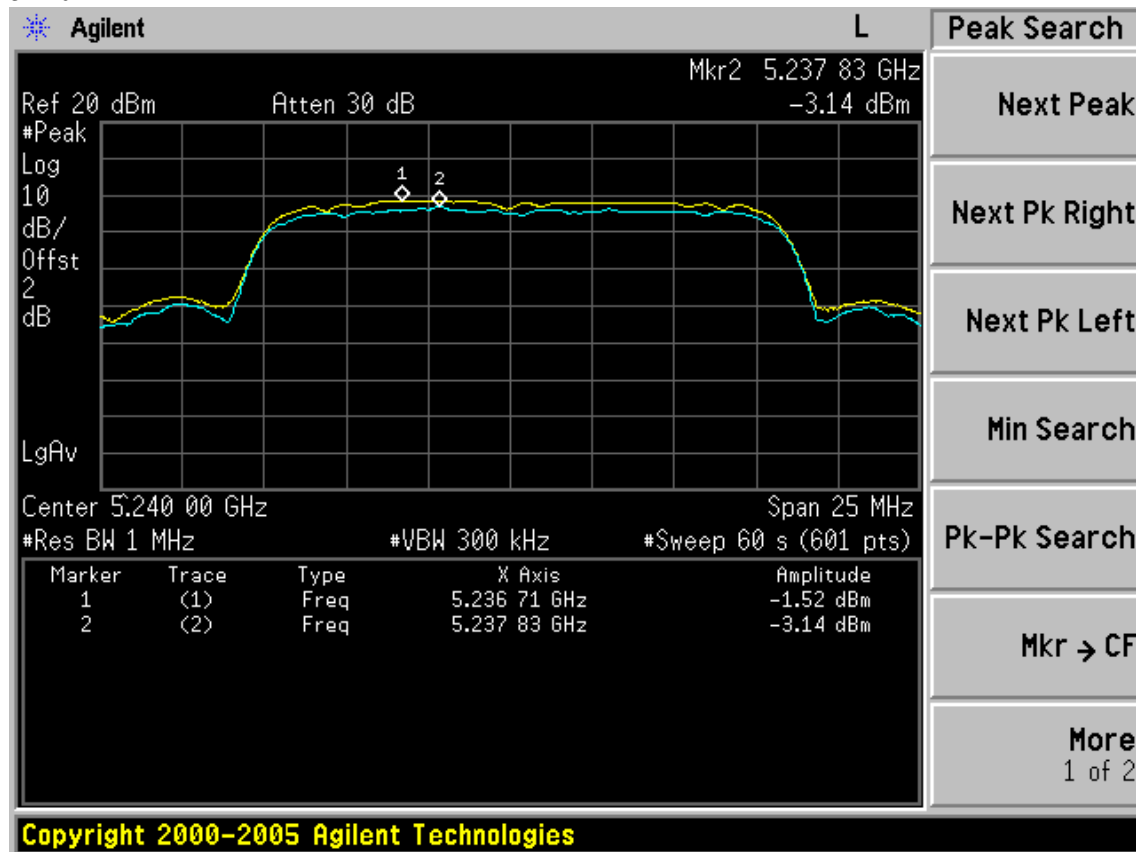


ANT B

5180MHz

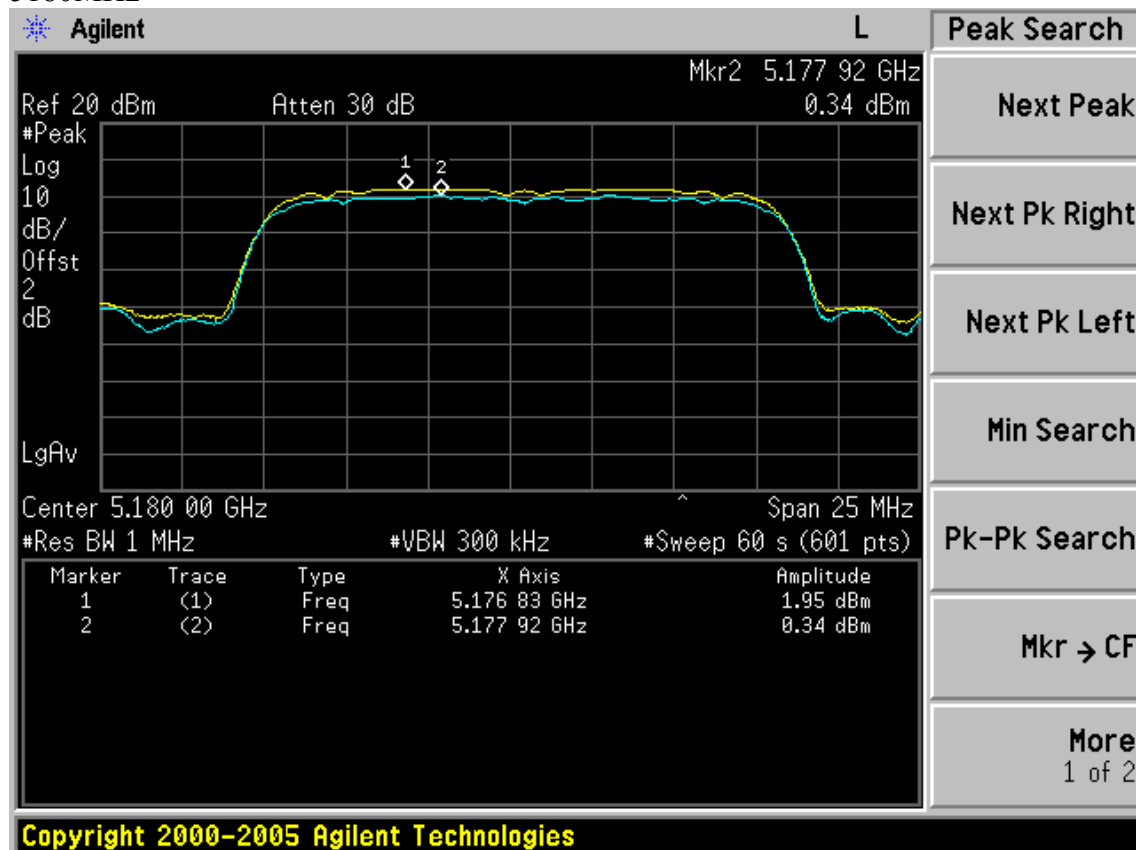


5210MHz

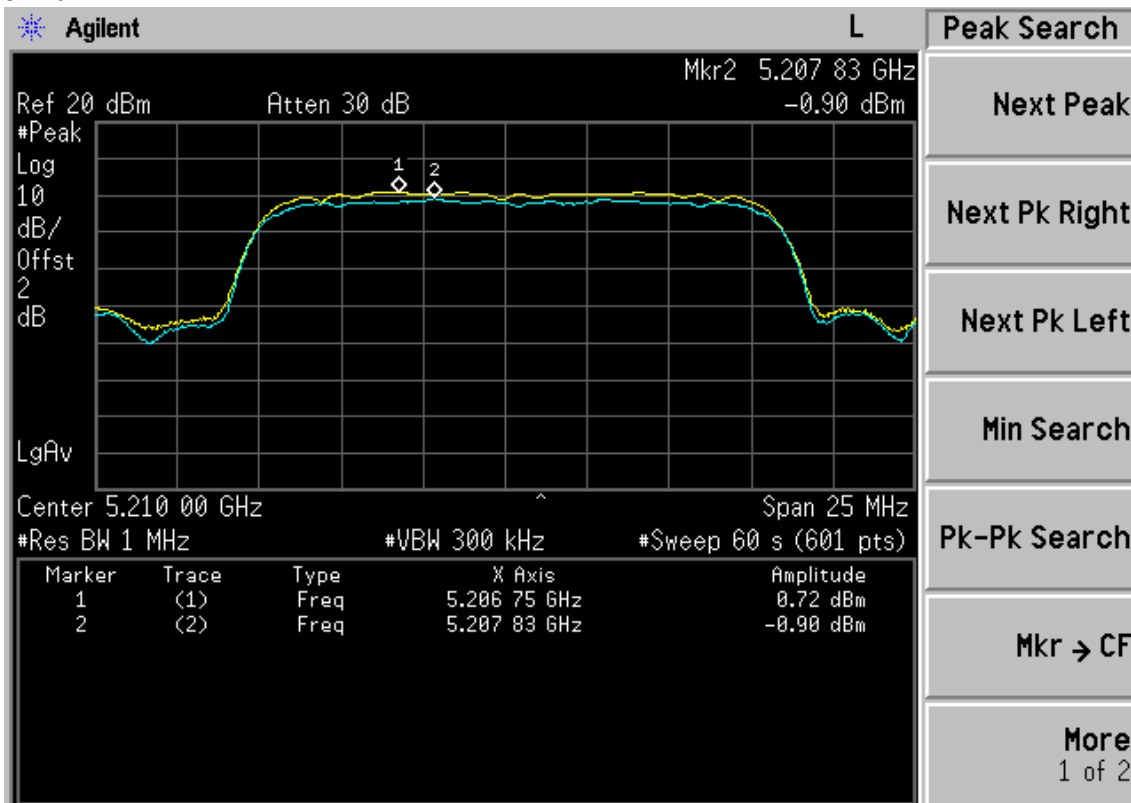

Copyright 2000-2005 Agilent Technologies

5240MHz

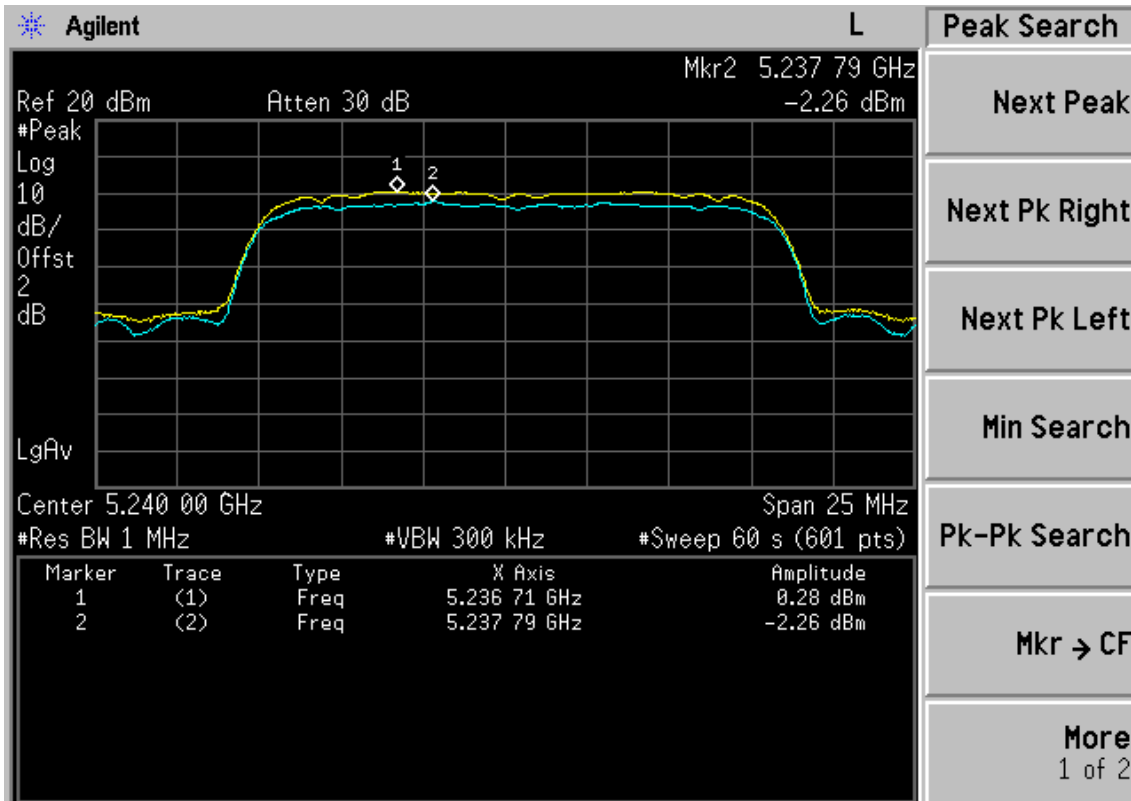

Copyright 2000-2005 Agilent Technologies

10. FREQUENCY STABILITY MEASUREMENT

10.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

10.2. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$

10.3. Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyser. EUT have transmitted absence of modulation signal and fixed channelize. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6 \text{ ppm}$ and the limit is less than $\pm 20\text{ppm}$ The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
2. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

10.4.Test Result

EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Power: DC 7.5V From Adapter Input AC 120V/60Hz		
Test Date: 2012-11-09	Test site: RF Chamber	Tested by: Leo-Li
Ambient Temperature: 23.7±1.0°C	Relative Humidity: 53.4±1.0%	Pressure:101.3±1.0 kpa

Frequency stability VS Voltage (Temperature:20°C)

Supply Voltage (V)	Test frequency (MHz)	Test result (MHz)	Max Deviation (MHz)	Max Deviation (ppm)	Limit (ppm)	Conclusion
102V	5180	5180.024800	0.024800	4.79	+/-20	PASS
120V	5180	5180.021500				
138V	5180	5180.019800				
102V	5210	5210.024800	0.036200	6.95	+/-20	
120V	5210	5210.019500				
138V	5210	5210.036200				
102V	5240	5240.027800	0.027800	5.31	+/-20	
120V	5240	5240.020800				
138V	5240	5240.024700				

Frequency stability VS Temperature (supply voltage AC 120V/60Hz)

Temperature (°C)	Test frequency (MHz)	Test result (MHz)	Max Deviation (MHz)	Max Deviation (ppm)	Limit (ppm)	Conclusion
-30°C	5180	5180.035700	0.041100	7.93	+/-20	PASS
-20°C	5180	5180.024500				
-10°C	5180	5180.021400				
0°C	5180	5180.012400				
10°C	5180	5179.998500				
20°C	5180	5179.987500				
30°C	5180	5179.971400				
40°C	5180	5179.962400				
50°C	5180	5179.958900				

Frequency stability VS Temperature (supply voltage AC 120V/60Hz)

Temperature (°C)	Test frequency (MHz)	Test result (MHz)	Max Deviation (MHz)	Max Deviation (ppm)	Limit (ppm)	Conclusion
-30°C	5210	5210.024700	0.047200	9.06	+/-20	PASS
-20°C	5210	5210.021400				
-10°C	5210	5210.012600				
0°C	5210	5210.010800				
10°C	5210	5209.994500				
20°C	5210	5209.982500				
30°C	5210	5209.972400				
40°C	5210	5209.961500				
50°C	5210	5209.952800				

Frequency stability VS Temperature (supply voltage AC 120V/60Hz)

Temperature (°C)	Test frequency (MHz)	Test result (MHz)	Max Deviation (MHz)	Max Deviation (ppm)	Limit (ppm)	Conclusion
-30°C	5240	5240.021400	0.027600	5.27	+/-20	PASS
-20°C	5240	5240.021000				
-10°C	5240	5240.018500				
0°C	5240	5240.012400				
10°C	5240	5239.995200				
20°C	5240	5239.982300				
30°C	5240	5239.975800				
40°C	5240	5239.974500				
50°C	5240	5239.972400				

11. ANTENNA REQUIREMENT

11.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are PCB antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3dBi.

12.MPE ESTIMATION

12.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm ²)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm ²)	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz

12.2. Estimation Result

EUT: UWSB-System 2.1x-W		
M/N: UWT-201X		
Test date:2012-11-07	Pressure: 101.2±1.0 kpa	Humidity: 52.6±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 23.3±0.6°C

Cable loss: 1 dB		Attenuator loss: 20 dB			Antenna Gain:3dBi	
Antenna	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
Antenna A	5180	7.78	6.00	3	2.00	0.0024
	5210	8.61	7.26	3	2.00	0.0029
	5240	8.74	7.48	3	2.00	0.0030
Antenna B	5180	12.76	18.88	3	2.00	0.0075
	5210	11.43	13.90	3	2.00	0.0055
	5240	9.53	8.97	3	2.00	0.0036

13.DEVIATION TO TEST SPECIFICATIONS



[NONE]

14.PHOTOGRAPH OF TEST


14.1.Photos of Power Line Conducted Emission Test



14.2.Photos of Radiated Emission Test

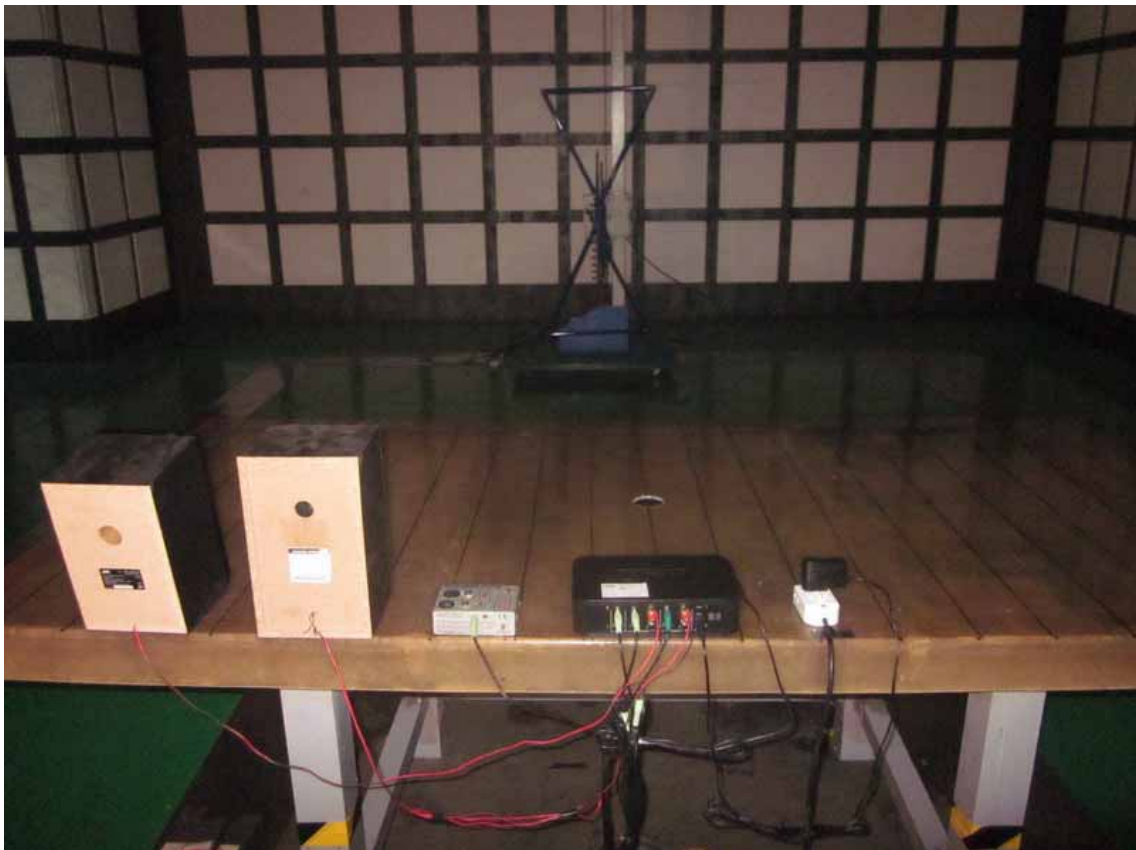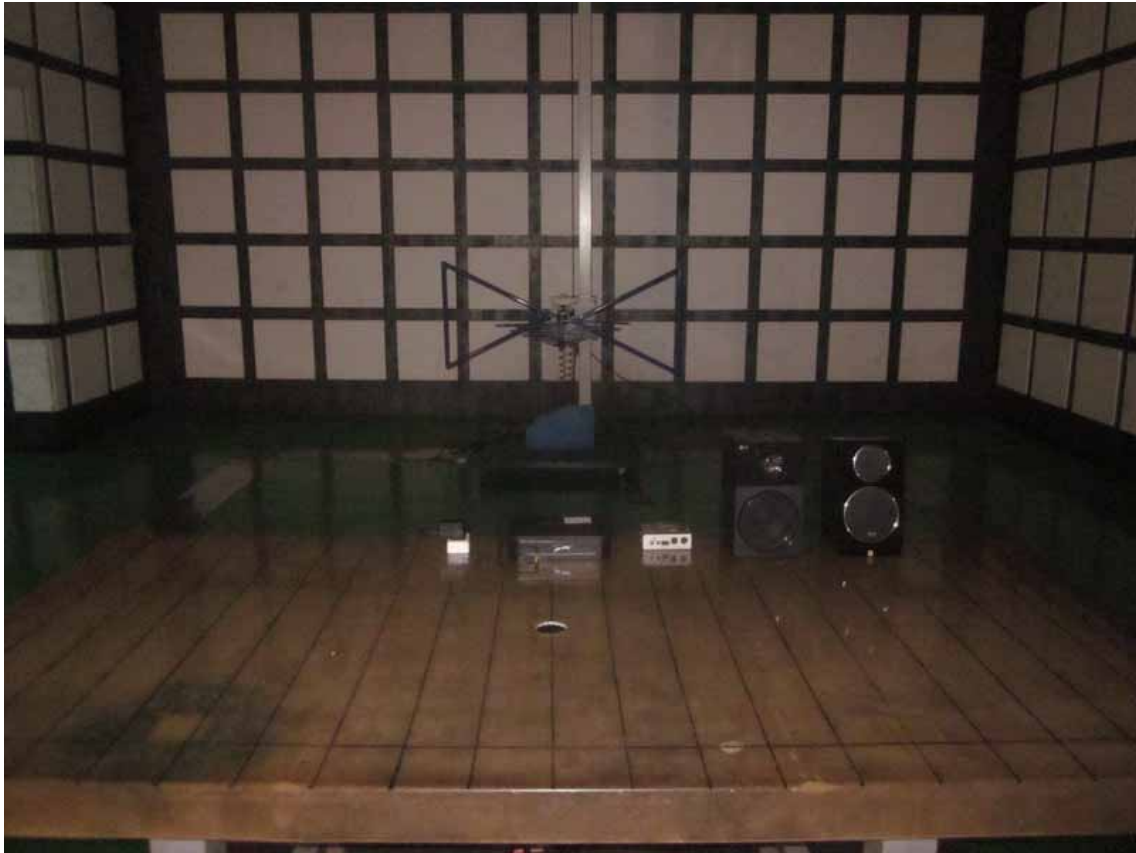

(Above 1000MHz)

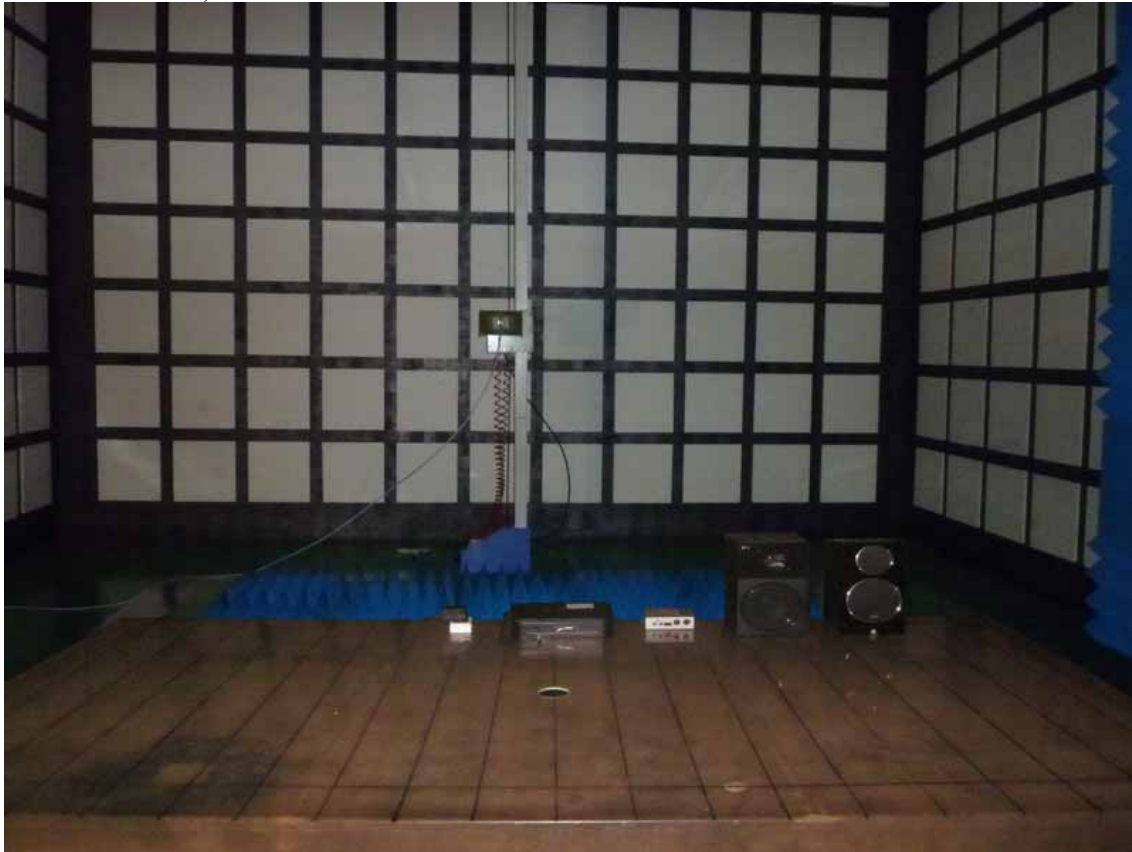

15. PHOTOS OF THE EUT

Figure 1

General Appearance of the EUT

**Figure 2**

General Appearance of the EUT



Figure 3
General Appearance of the EUT



Figure 4
General Appearance of the EUT



Figure 5
General Appearance of the EUT



Figure 6
General Appearance of the EUT



Figure 7
General Appearance of the EUT



Figure 8
General Appearance of the EUT



Figure 9
Inside of the EUT

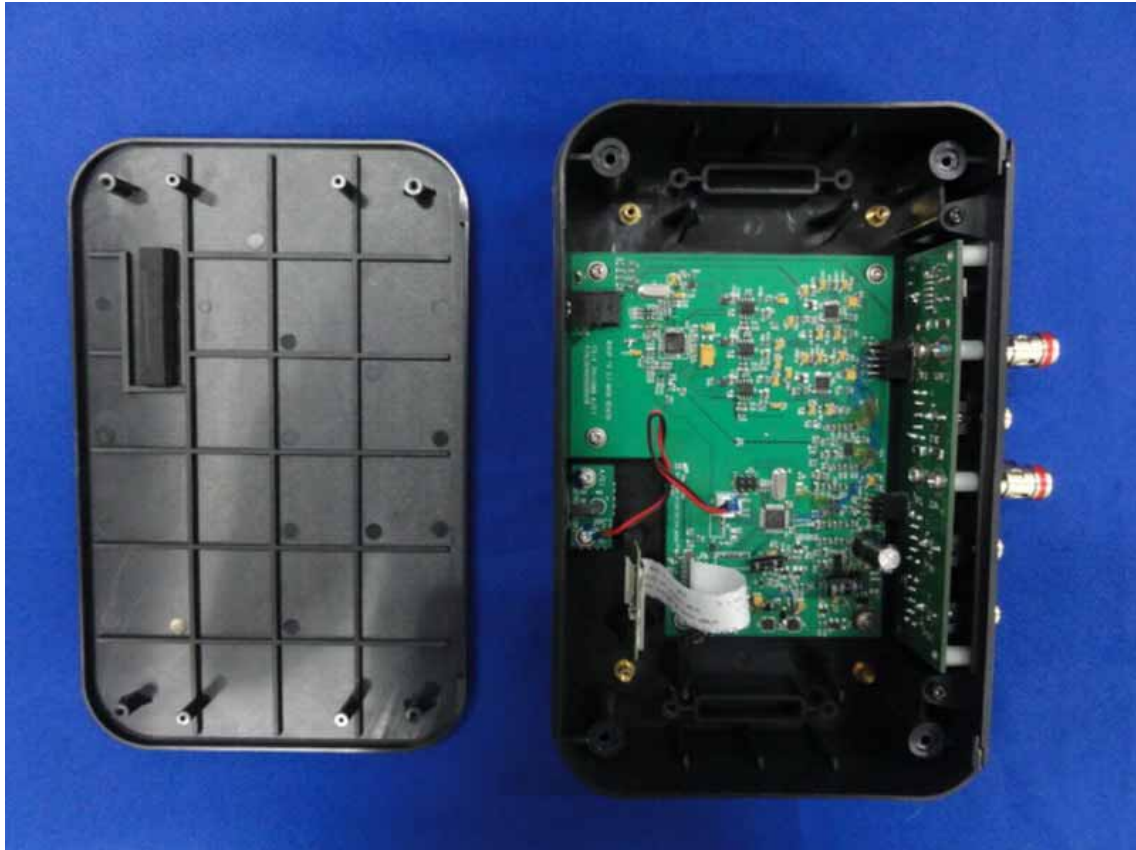


Figure 10
Inside of the EUT



Figure 11
Component of the PCB

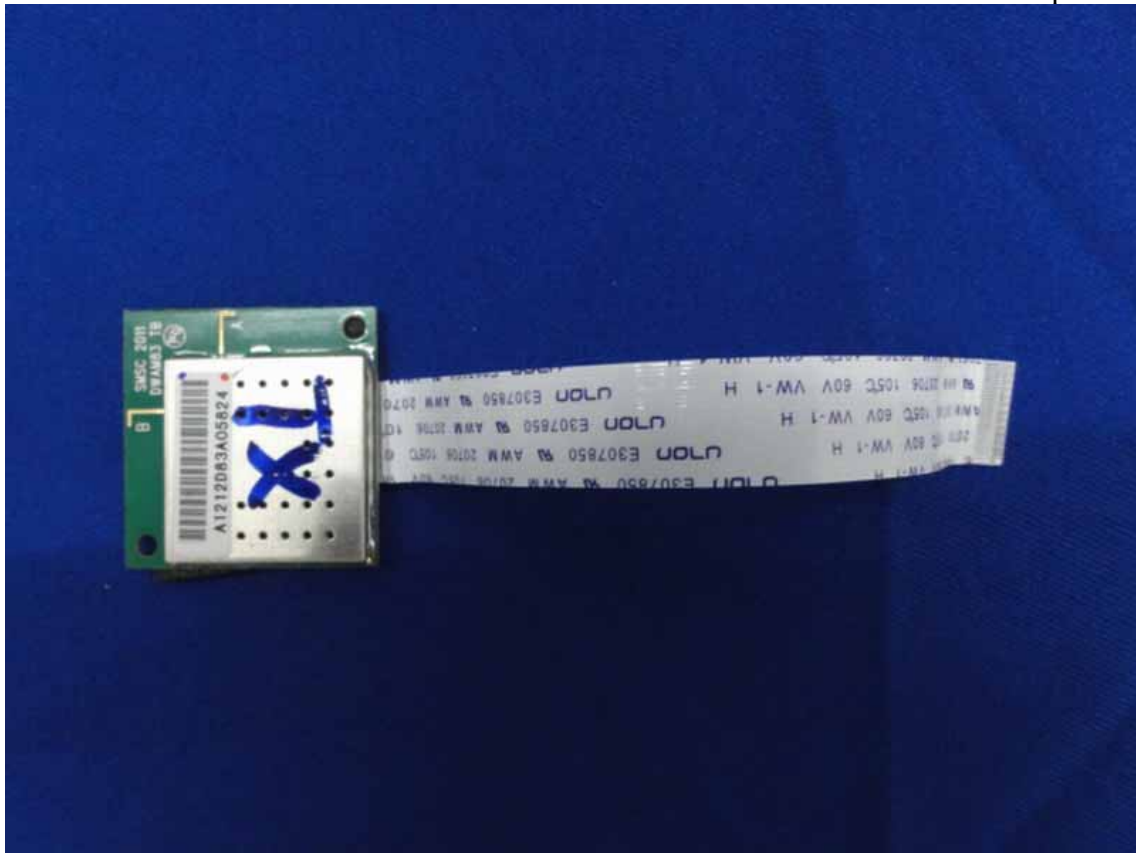


Figure 12
Component of the PCB

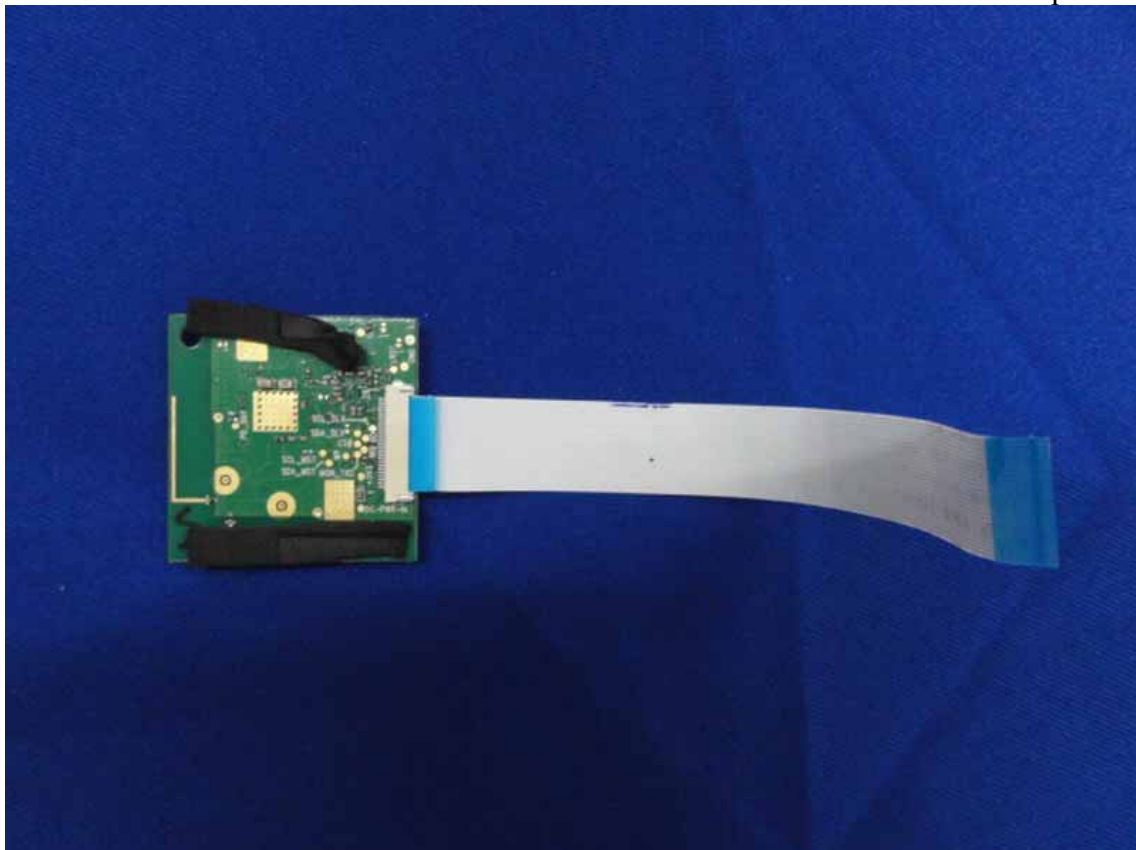


Figure 13
Component of the PCB

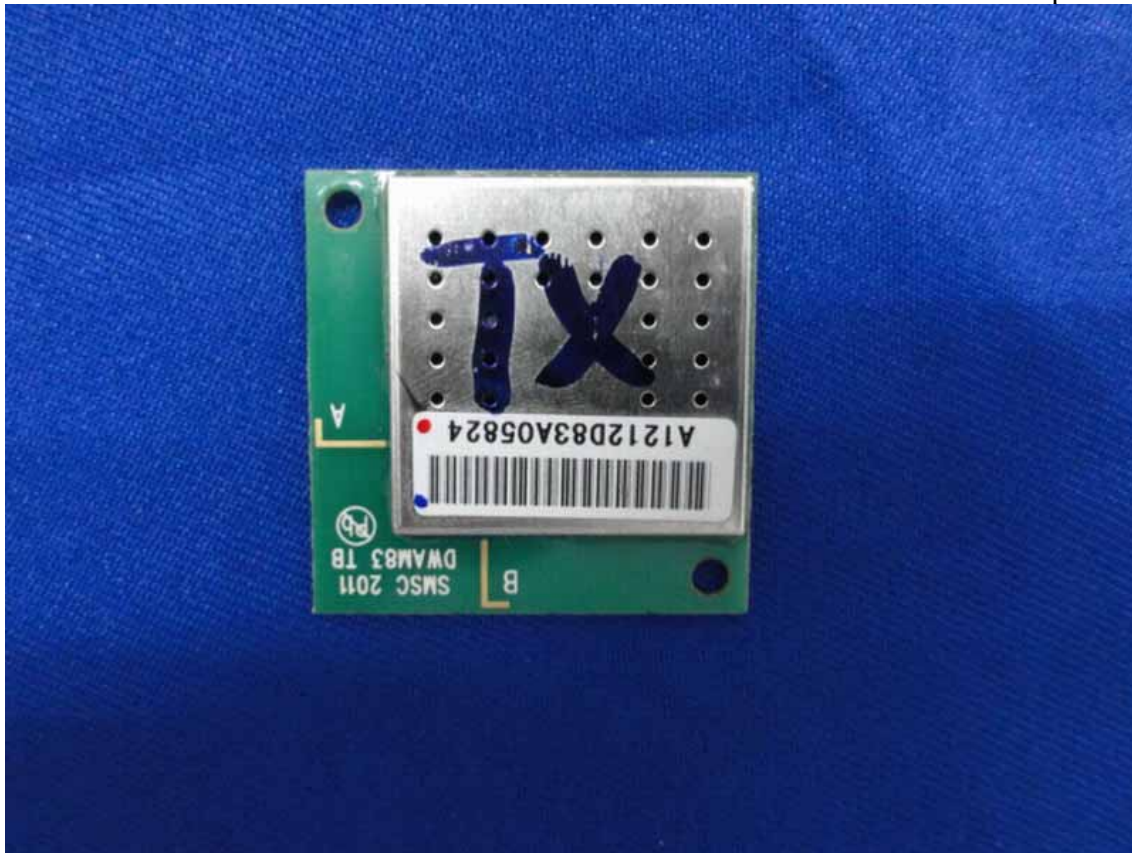


Figure 14
Component of the PCB



Figure 15
Component of the PCB

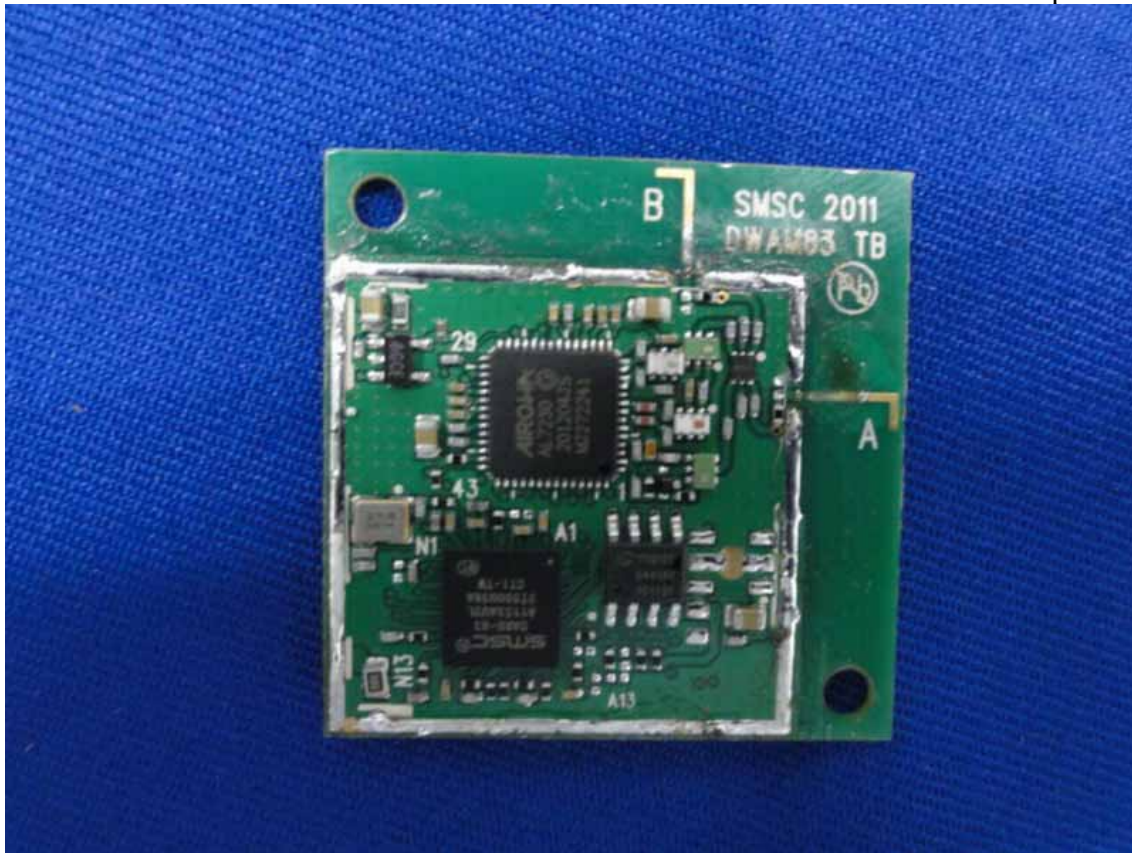


Figure 16
Component of the PCB



Figure 17
Component of the PCB

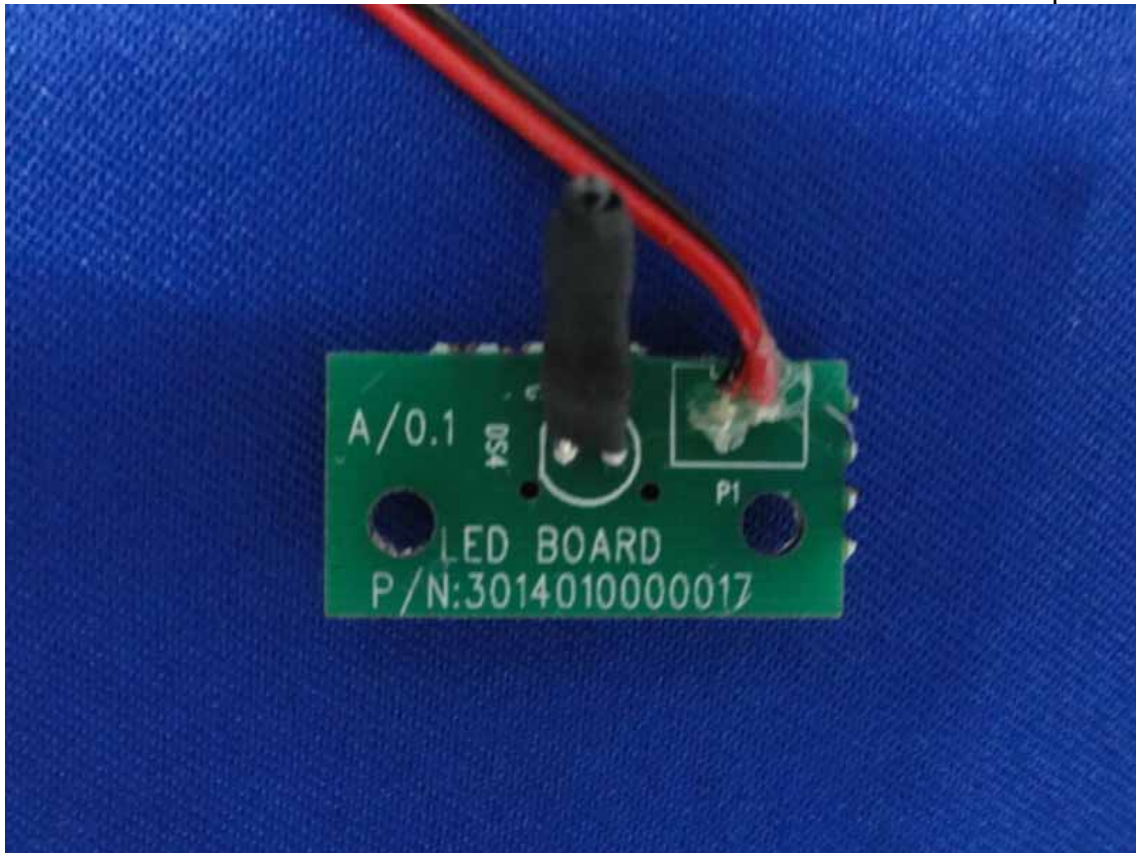


Figure 18
Component of the PCB

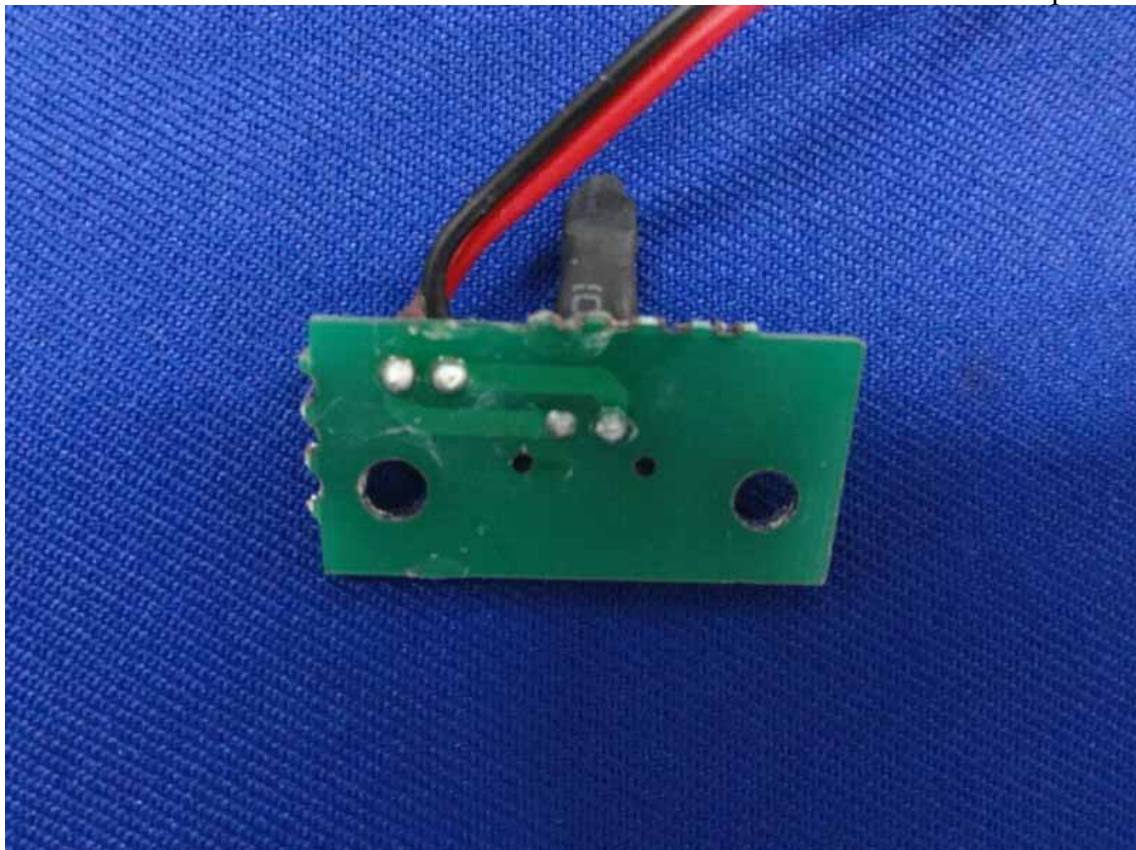


Figure 19
Component of the PCB



Figure 20
Component of the PCB

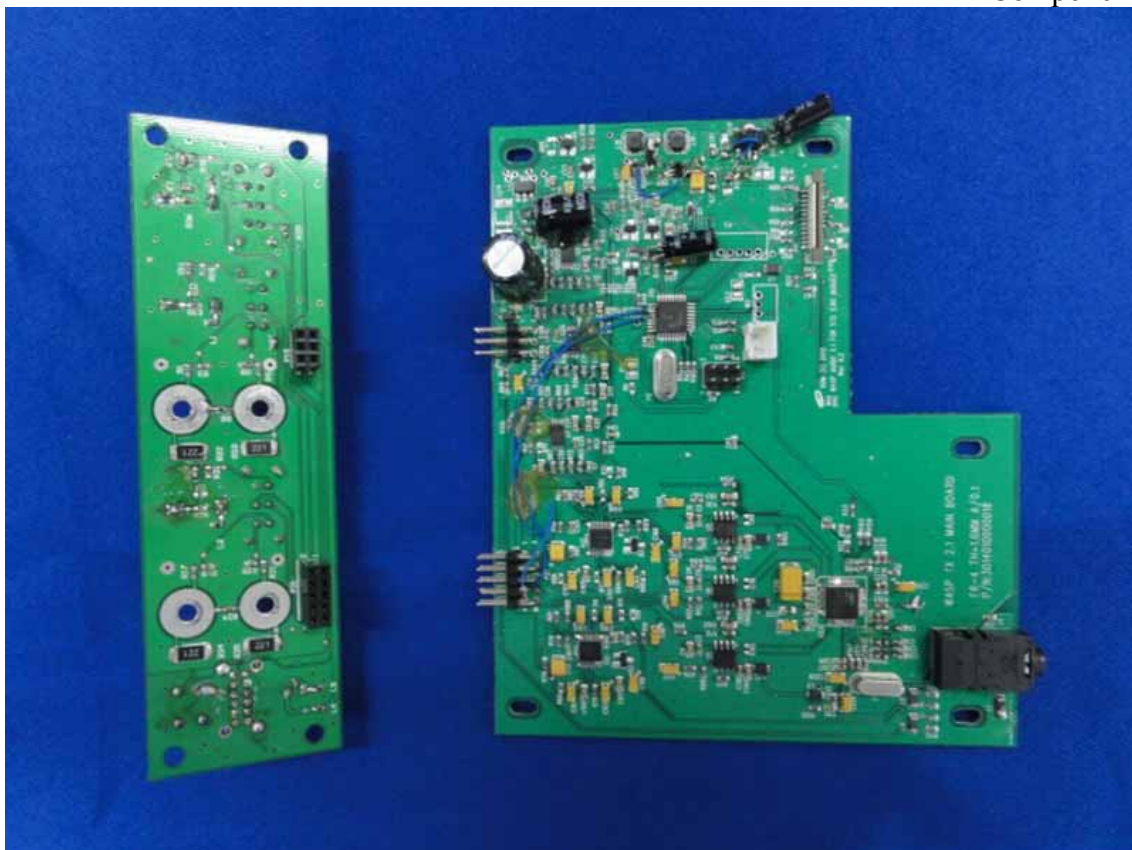


Figure 21
Component of the PCB

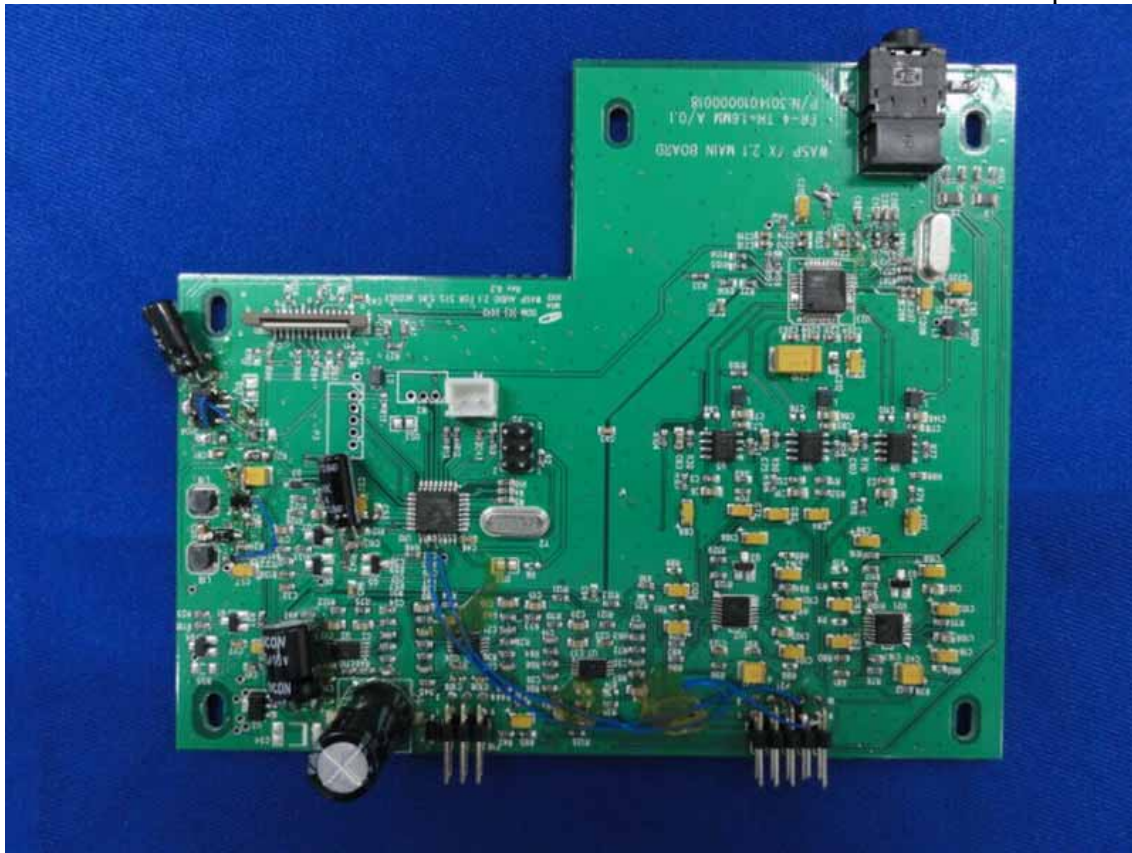


Figure 22
Component of the PCB

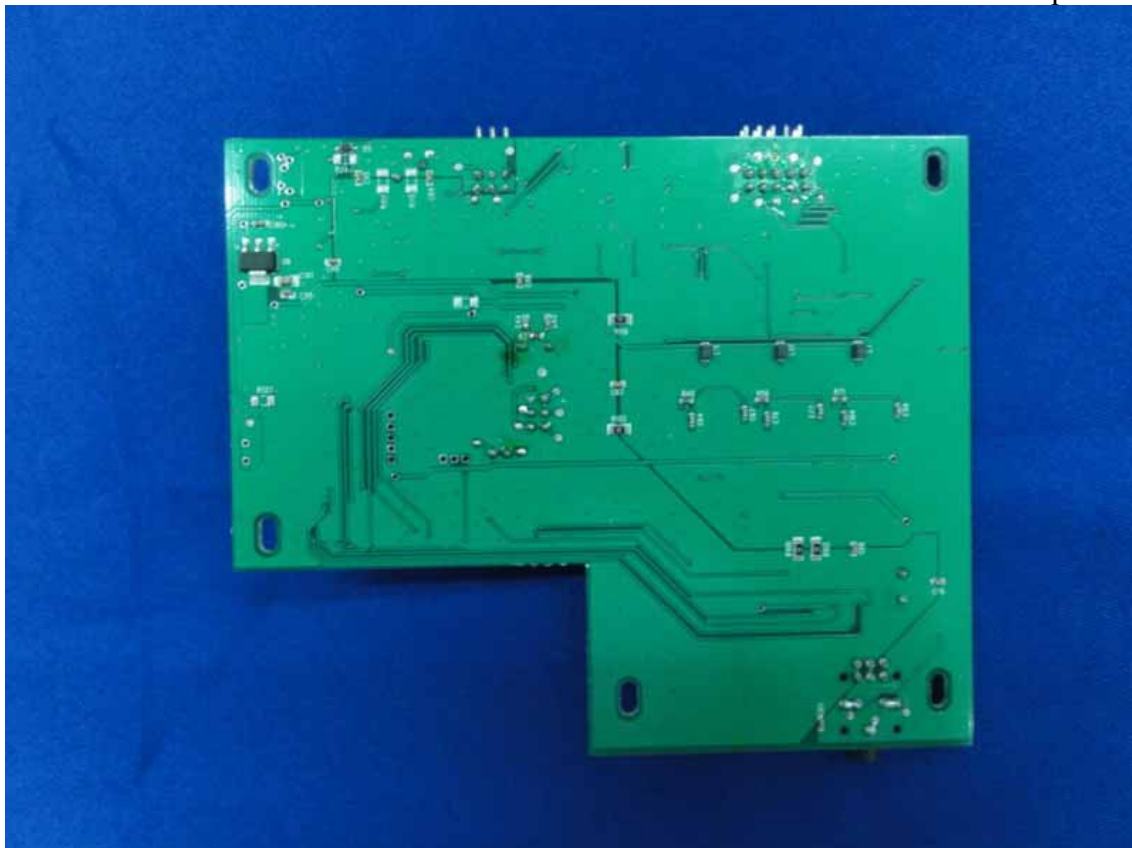


Figure 23
Component of the PCB



Figure 24
Component of the PCB

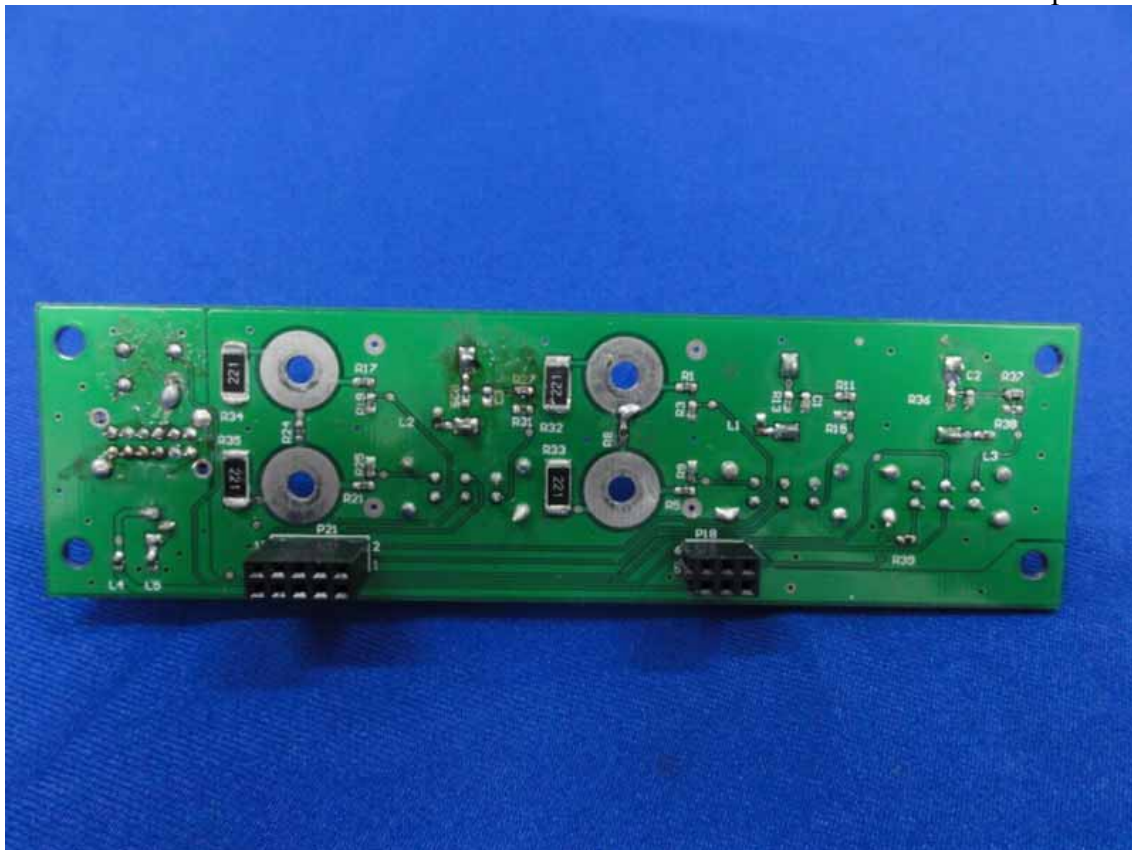


Figure 25
DC Power Cable



Figure 26
DC Power Cable



Figure 27
DC Power Cable

