

FCC RF Test Report

APPLICANT : Unimax Communications
EQUIPMENT : CDMA1X handset
BRAND NAME : UMX
MODEL NAME : C5610/COMPANION
FCC ID : P46-C5610
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 11, 2012 and completely tested on Nov. 08, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 RF Output Power	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 RF Utility	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement	20
3.4 20dB and 99% Bandwidth Measurement	22
3.5 Peak Output Power Measurement	35
3.6 Conducted Band Edges Measurement	42
3.7 Conducted Spurious Emission Measurement	49
3.8 Radiated Band Edges and Spurious Emission Measurement	53
3.9 AC Conducted Emission Measurement	63
3.10 Antenna Requirements	67
4 LIST OF MEASURING EQUIPMENT	68
5 UNCERTAINTY OF EVALUATION	69
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O1106	Rev. 01	Initial issue of report	Nov. 09, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 1\text{ w}$ for 1Mbps $\leq 125\text{ Mw}$ for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.7 dB at 2483.520 MHz
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 7.91 dB at 0.440 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Unimax Communications

18201 McDermott Street W.Suite E Irvine, CA 92614

1.2 Manufacturer

Unimax Communications

18201 McDermott Street W.Suite E Irvine, CA 92614

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	CDMA1X handset
Brand Name	UMX
Model Name	C5610/COMPANION
FCC ID	P46-C5610
EUT supports Radios application	CDMA/Bluetooth
HW Version	C5610-Main_V1.0
SW Version	C5610_01.11.
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 9.26 dBm (0.0084 W) Bluetooth EDR (2Mbps) : 8.40 dBm (0.0069 W) Bluetooth EDR (3Mbps) : 8.18 dBm (0.0066 W)
99% Occupied Bandwidth	Bluetooth (1Mbps) : 0.9200MHz Bluetooth EDR (2Mbps) : 1.1760MHz Bluetooth EDR (3Mbps) : 1.1880MHz
Antenna Type	PIFA Antenna type with gain -1 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : π /4-DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003 and ANSI C63.10-2009
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	FCC DoC	N/A	Unshielded, 1.8m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.51 dBm	6.90 dBm	6.47 dBm
Ch39	2441MHz	7.93 dBm	7.31 dBm	6.76 dBm
Ch78	2480MHz	9.26 dBm	8.40 dBm	8.18 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (X plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Pretest	Pretest
AC Conducted Emission	Mode 1 :CDMA BC0 Idle + Bluetooth Link + USB Cable (Charging from Adapter) + Earphone		
Remark: For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

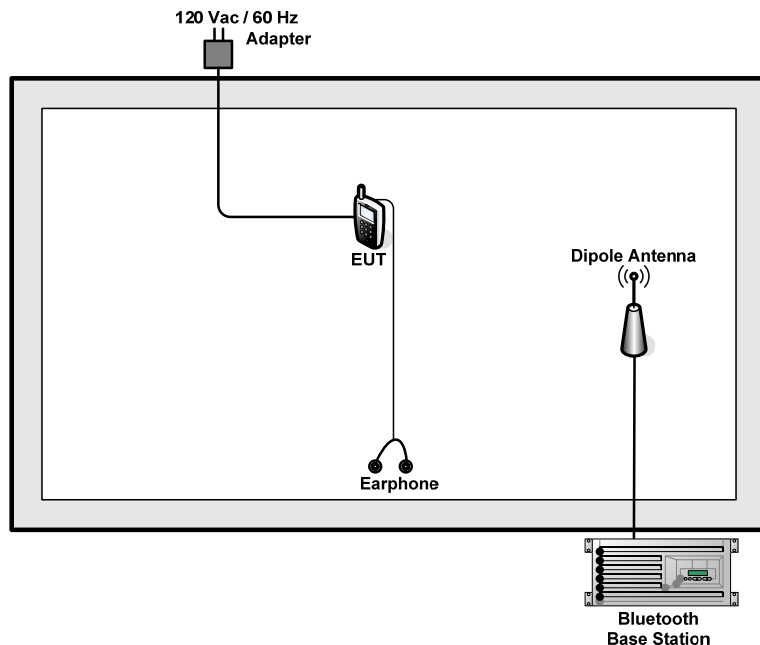

<AC Conducted Emission Mode>

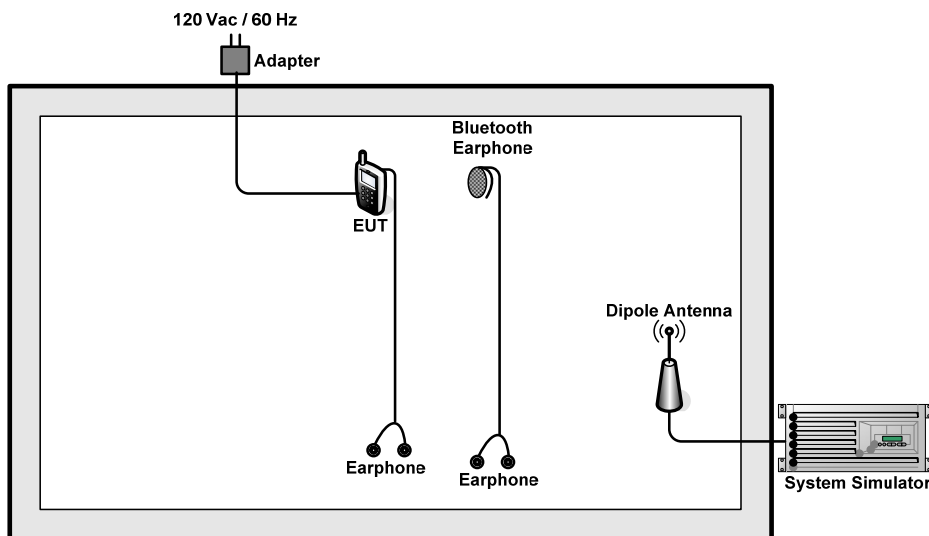

2.4 RF Utility

For Bluetooth function, key in “*01763*918#” on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.


3.1.4 Test Setup

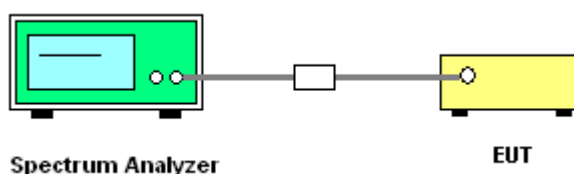


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

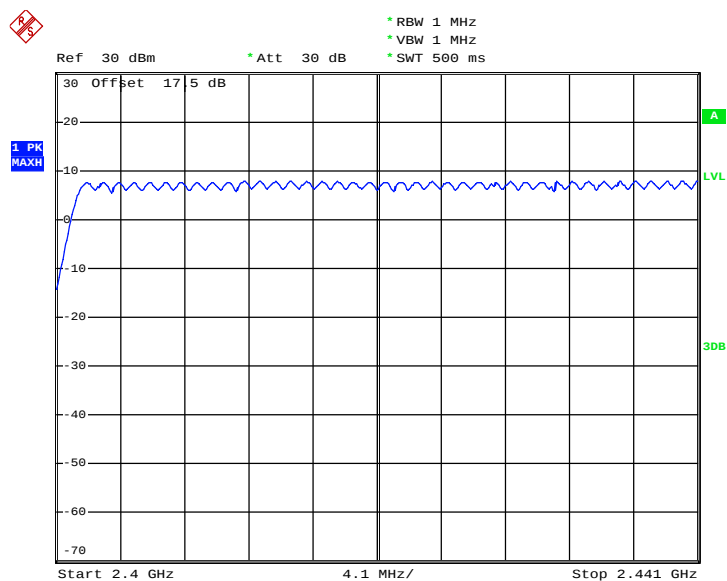

Date: 2.NOV.2012 08:08:00

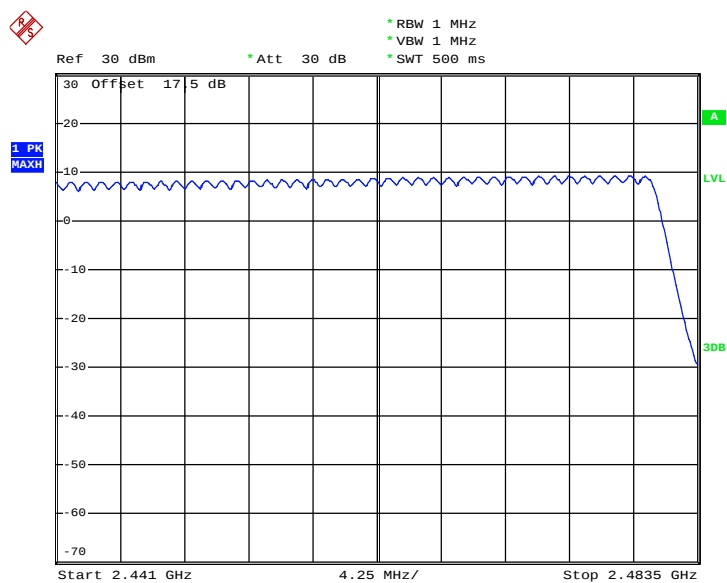

Date: 2.NOV.2012 08:17:17

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.

3.2.4 Test Setup

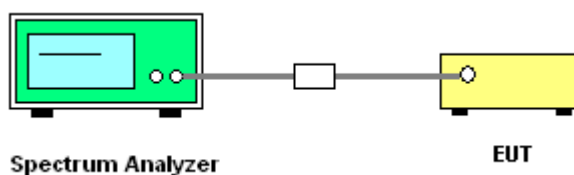


3.2.5 Test Result of Hopping Channel Separation


Test Mode :	1Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	0.996	0.6320	Pass
39	2441	1.008	0.6240	Pass
78	2480	1.002	0.5760	Pass


Channel Separation Plot on Channel 00 - 01

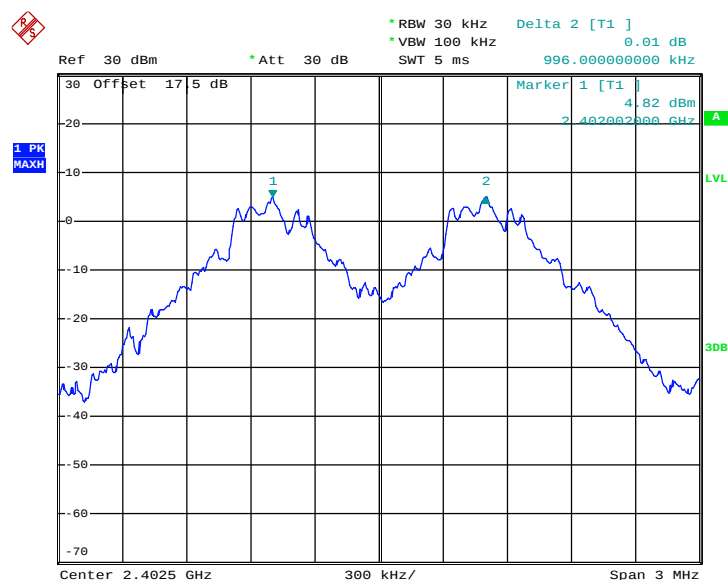

Date: 2.NOV.2012 08:18:56

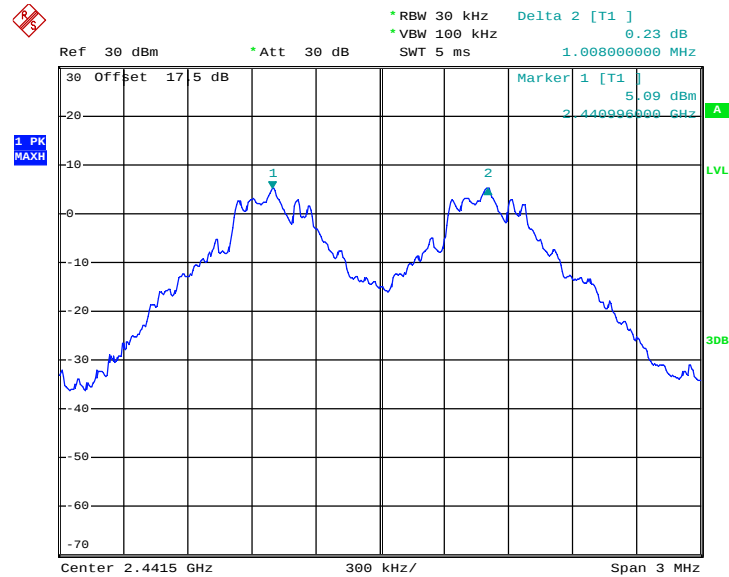Channel Separation Plot on Channel 39 - 40


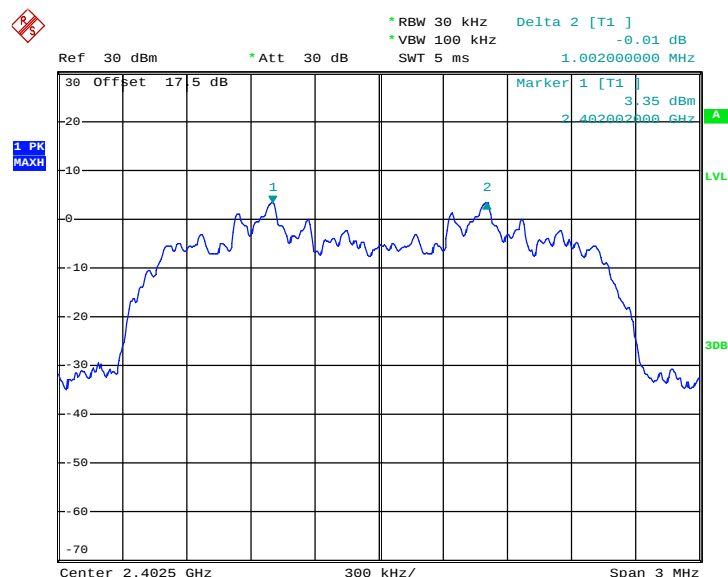
Date: 2.NOV.2012 08:19:27

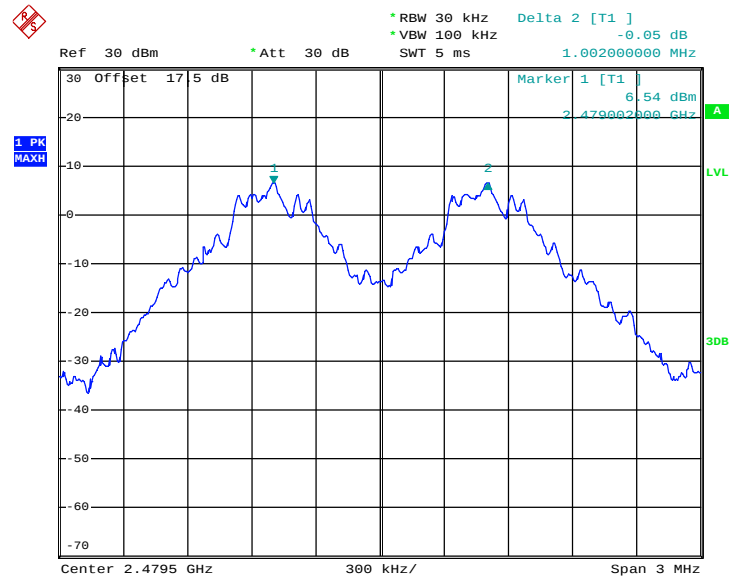Channel Separation Plot on Channel 77 - 78


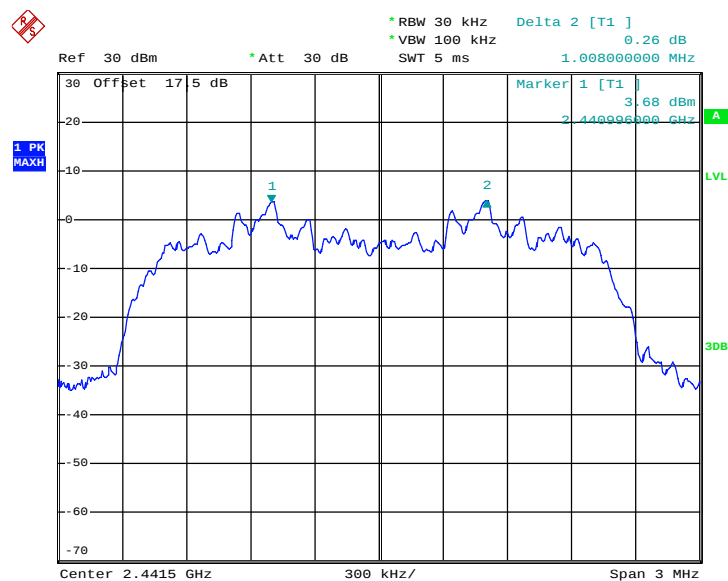
Date: 2.NOV.2012 08:19:51

Test Mode :	2Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8587	Pass
39	2441	1.008	0.8427	Pass
78	2480	1.002	0.8347	Pass

Channel Separation Plot on Channel 00 - 01


Date: 2.NOV.2012 08:20:36

Channel Separation Plot on Channel 39 - 40


Date: 2.NOV.2012 08:21:10

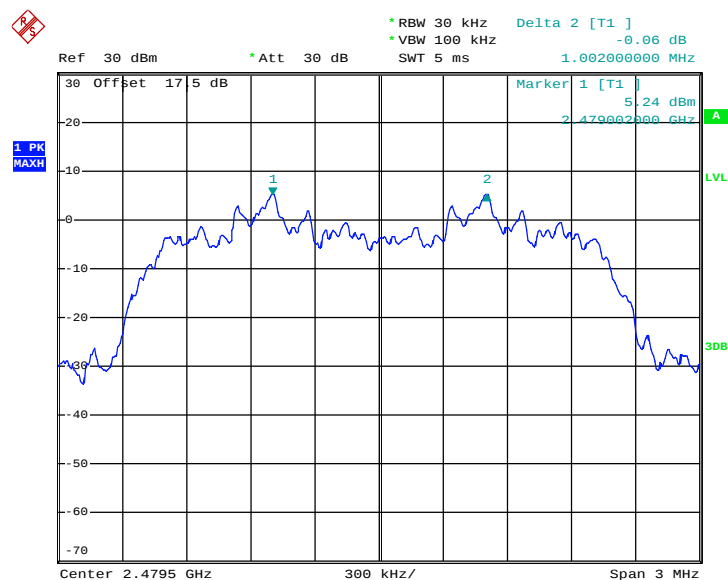Channel Separation Plot on Channel 77 - 78


Date: 2.NOV.2012 08:21:48




Test Mode :	3Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8507	Pass
39	2441	1.002	0.8667	Pass
78	2480	1.002	0.8667	Pass


Channel Separation Plot on Channel 00 - 01



Date: 2.NOV.2012 08:22:53

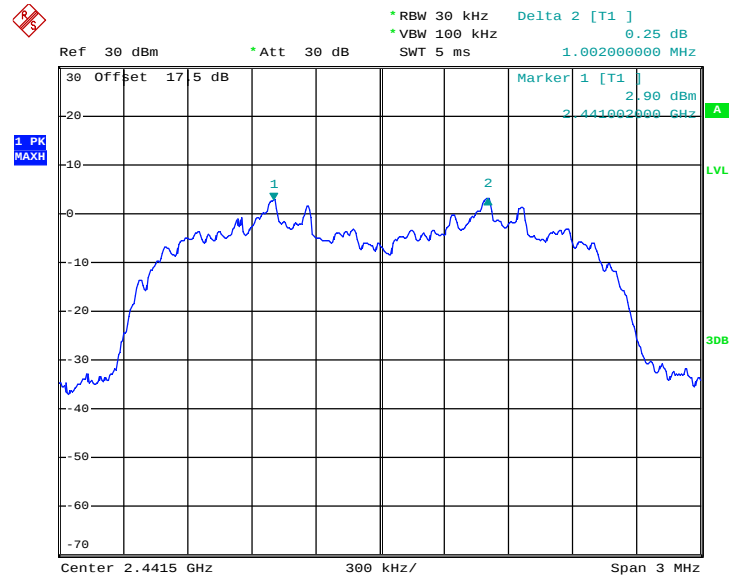Channel Separation Plot on Channel 39 - 40


Date: 2.NOV.2012 08:23:47

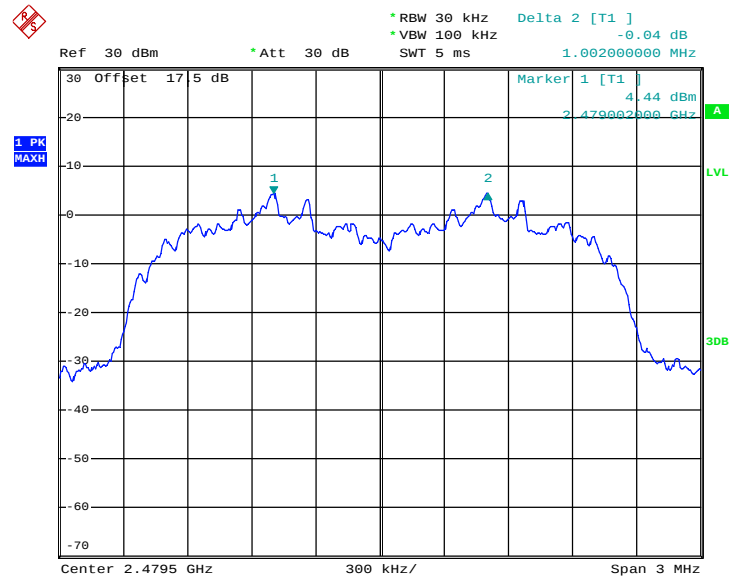Channel Separation Plot on Channel 77 - 78


Date: 2.NOV.2012 08:24:30

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output connector was connected to the spectrum analyzer through a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.

3.3.4 Test Setup

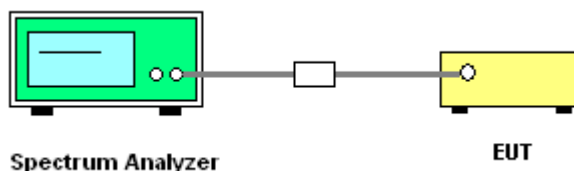


3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	4.10	2912.00	0.38	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. T: Package Transfer Time(us)

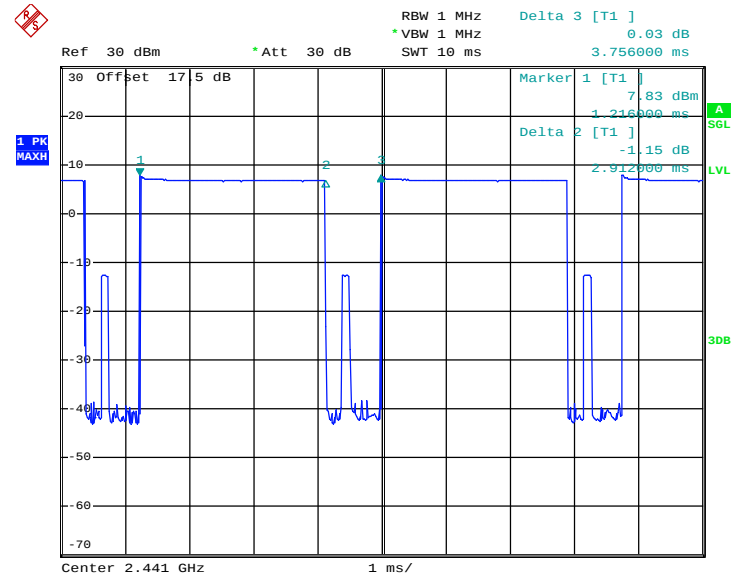DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 2.NOV.2012 03:54:33

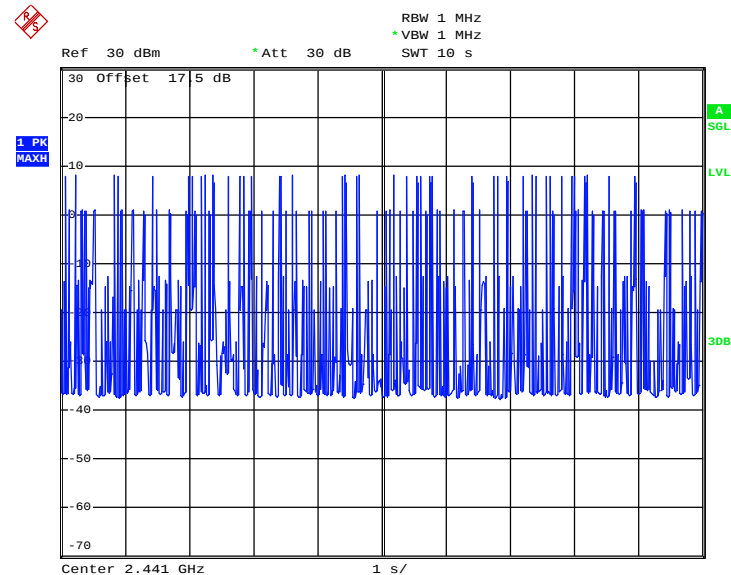DH5 Dwell Time (Count Pulses) Plot on Channel 39


Date: 2.NOV.2012 07:56:05

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.

3.4.4 Test Setup

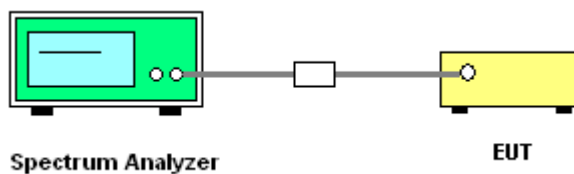


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.948
39	2441	0.936
78	2480	0.864


20 dB Bandwidth Plot on Channel 00

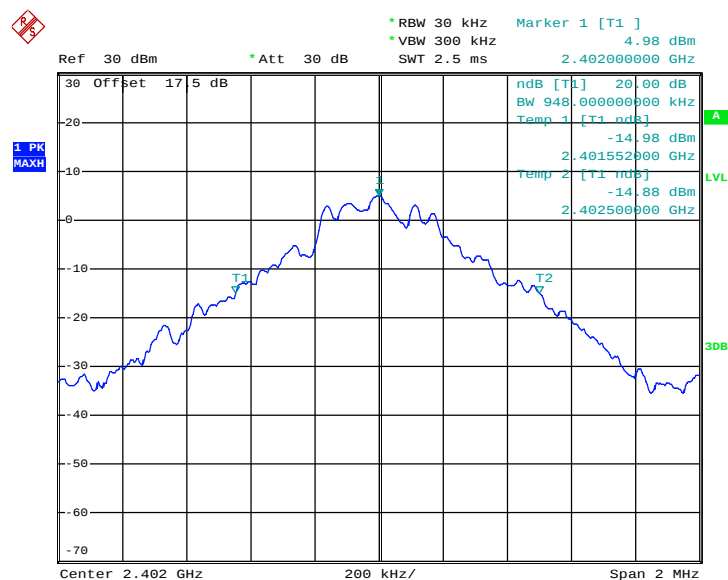

Date: 2.NOV.2012 07:39:38




20 dB Bandwidth Plot on Channel 39

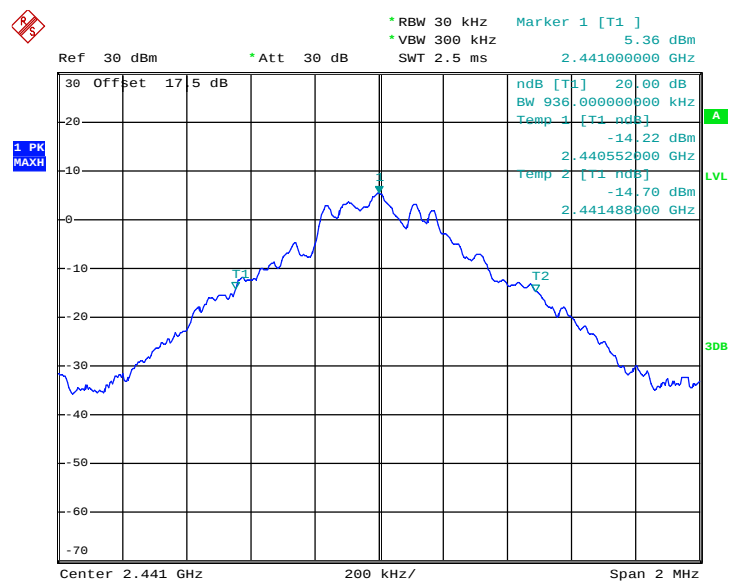

Date: 2.NOV.2012 07:40:22


20 dB Bandwidth Plot on Channel 78

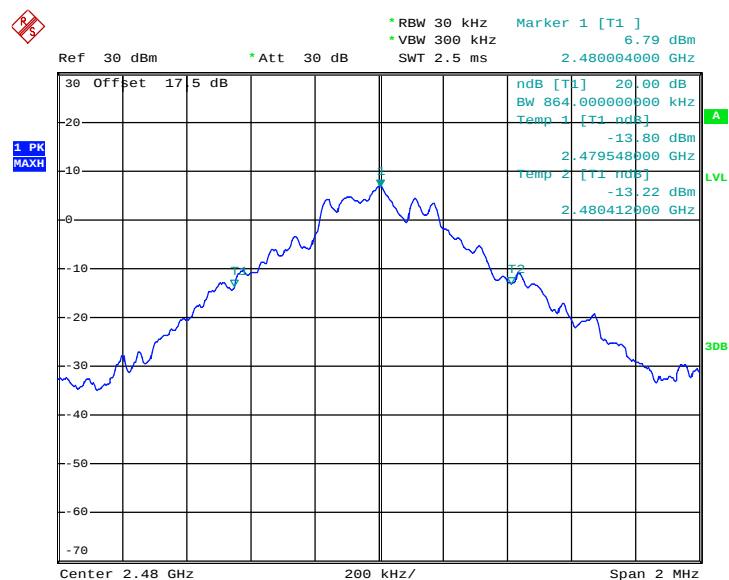


Date: 2.NOV.2012 07:40:47

Test Mode :	2Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.288
39	2441	1.264
78	2480	1.252

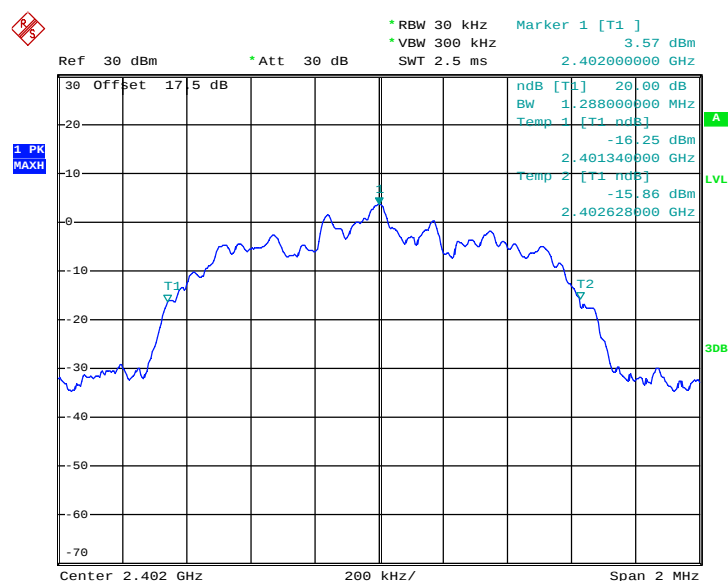20 dB Bandwidth Plot on Channel 00


Date: 2.NOV.2012 07:42:41

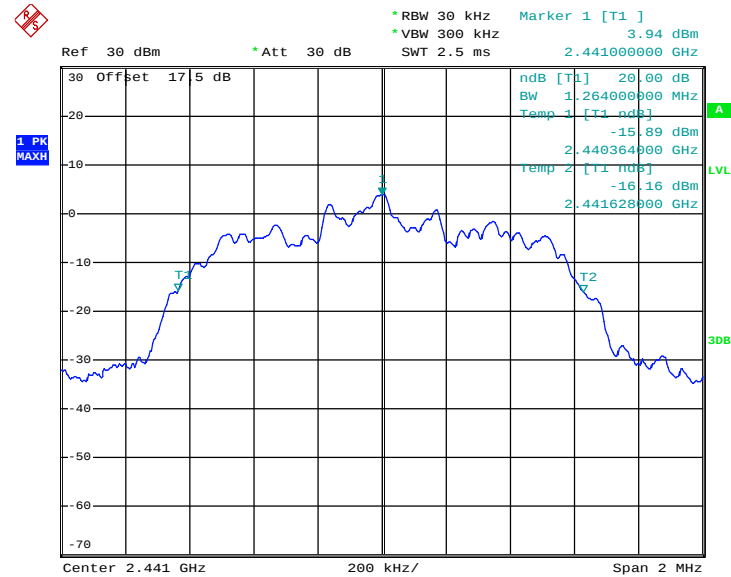20 dB Bandwidth Plot on Channel 39


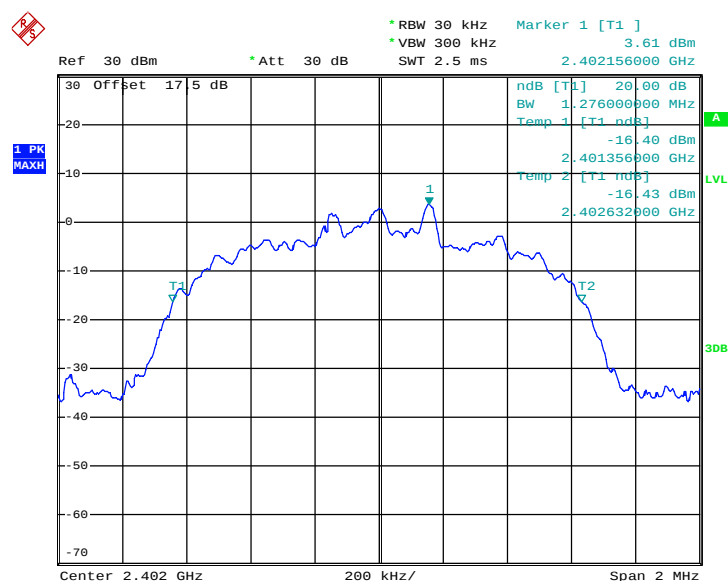
Date: 2.NOV.2012 07:42:08

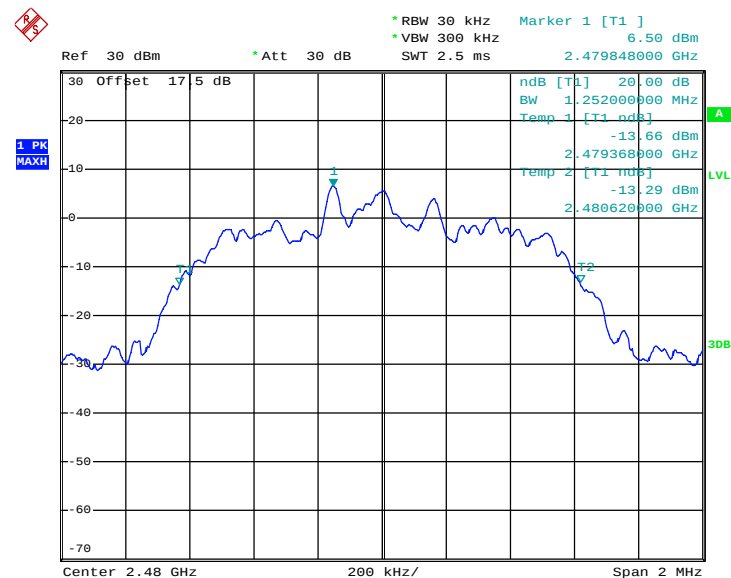20 dB Bandwidth Plot on Channel 78


Date: 2.NOV.2012 07:41:39

Test Mode :	3Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.276
39	2441	1.300
78	2480	1.300

20 dB Bandwidth Plot on Channel 00


Date: 2.NOV.2012 07:43:23




20 dB Bandwidth Plot on Channel 39

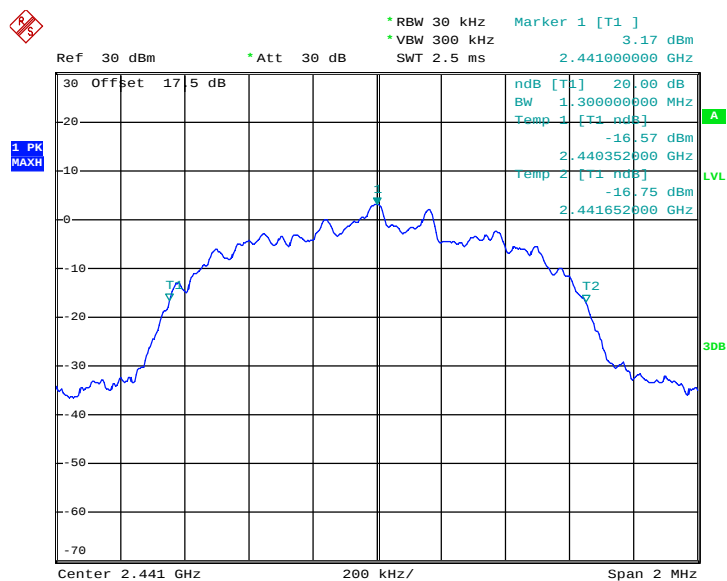

Date: 2.NOV.2012 07:44:21

20 dB Bandwidth Plot on Channel 78

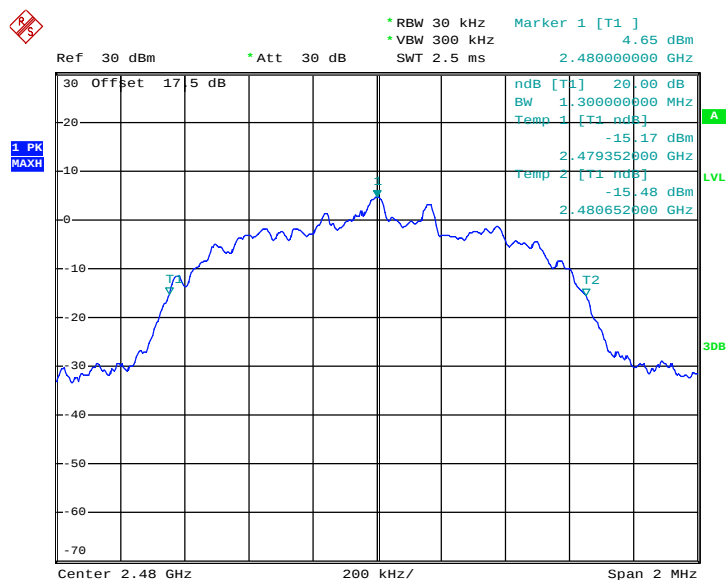


Date: 2.NOV.2012 07:44:56

3.4.6 Test Result of 99% Occupied Bandwidth


Test Mode :	1Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.876
39	2441	0.920
78	2480	0.892


99% Bandwidth Plot on Channel 00

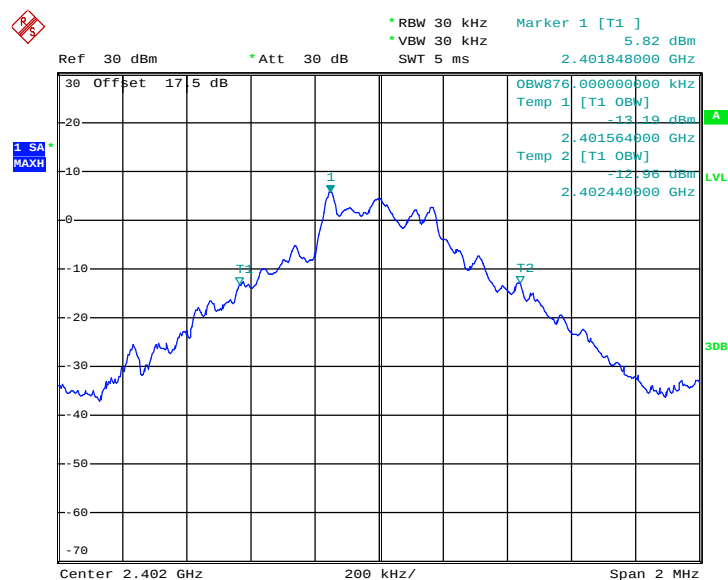

Date: 2.NOV.2012 07:53:06

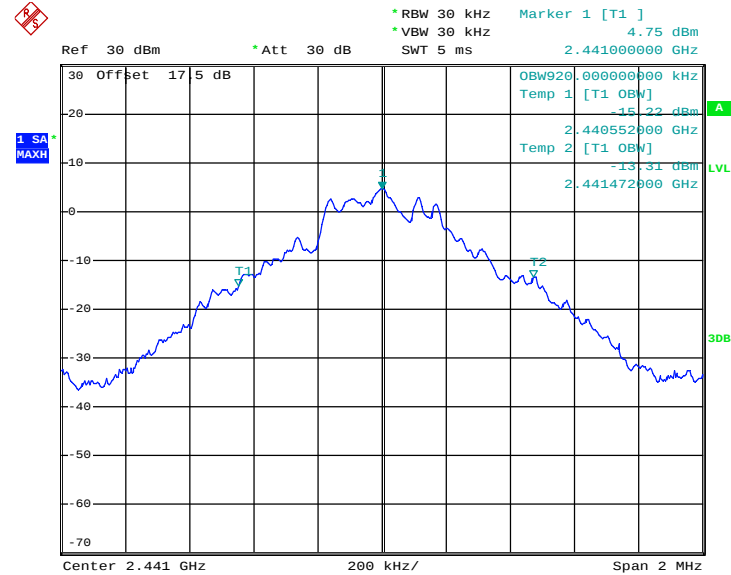99% Occupied Bandwidth Plot on Channel 39


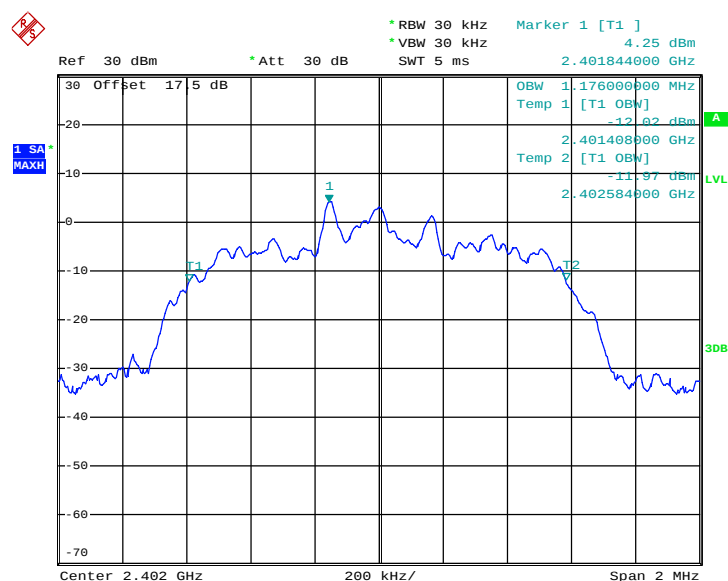
Date: 2.NOV.2012 07:48:06

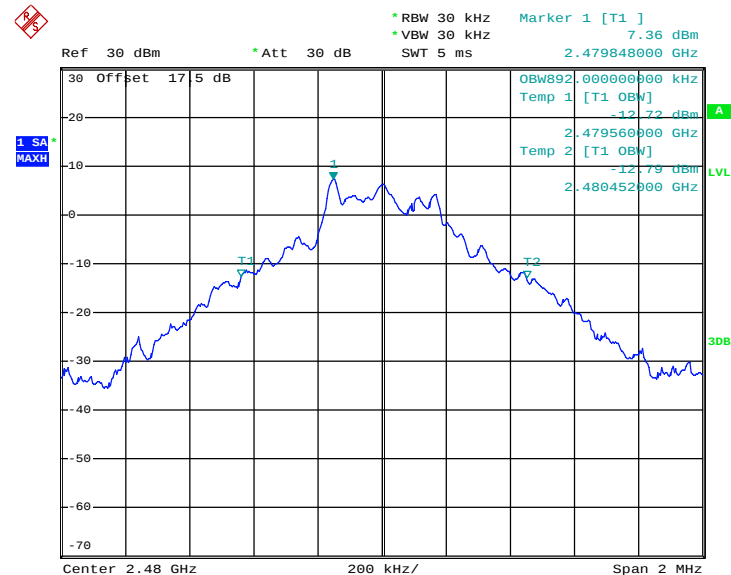99% Occupied Bandwidth Plot on Channel 78


Date: 2.NOV.2012 07:47:25

Test Mode :	2Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.176
39	2441	1.168
78	2480	1.168

99% Bandwidth Plot on Channel 00


Date: 2.NOV.2012 07:52:28




99% Occupied Bandwidth Plot on Channel 39

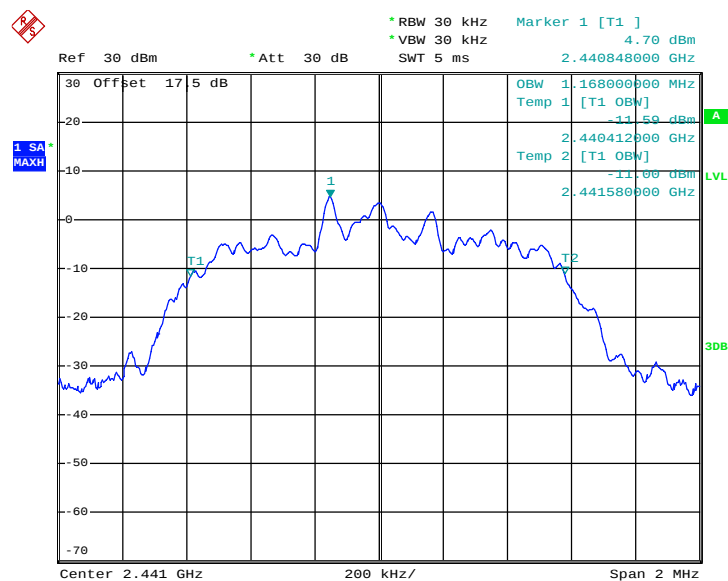

Date: 2.NOV.2012 07:48:42


99% Occupied Bandwidth Plot on Channel 78

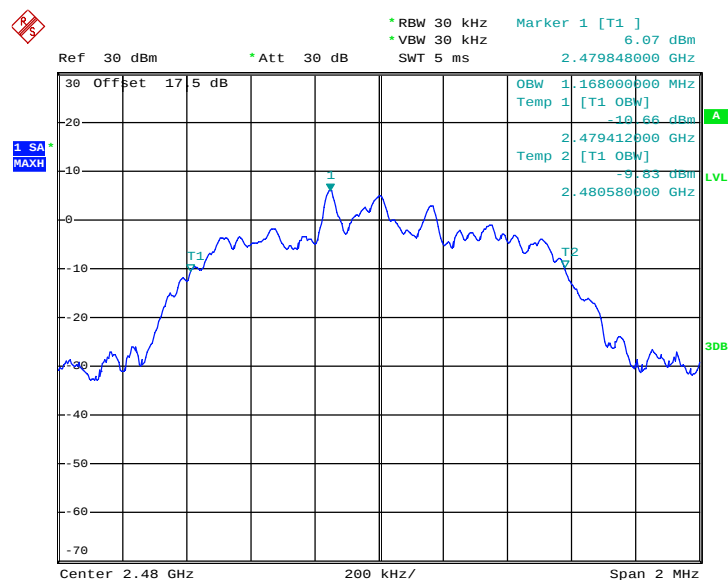


Date: 2.NOV.2012 07:47:01

Test Mode :	3Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.168
78	2480	1.188

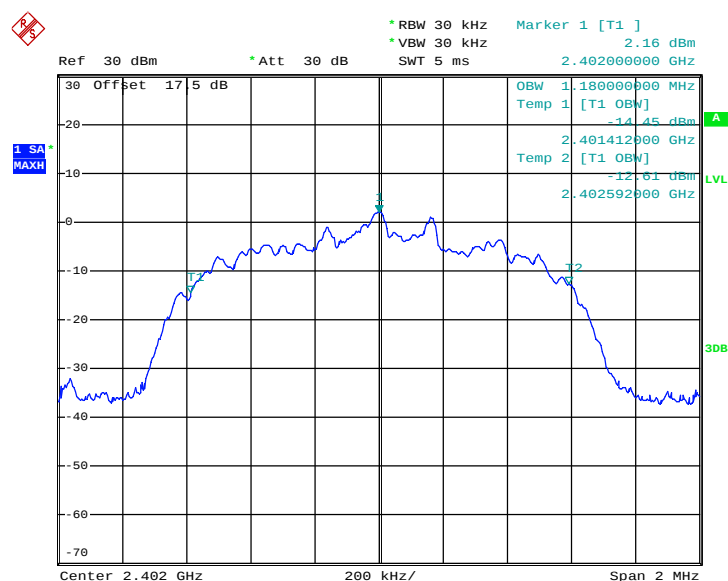99% Bandwidth Plot on Channel 00


Date: 2.NOV.2012 07:51:46

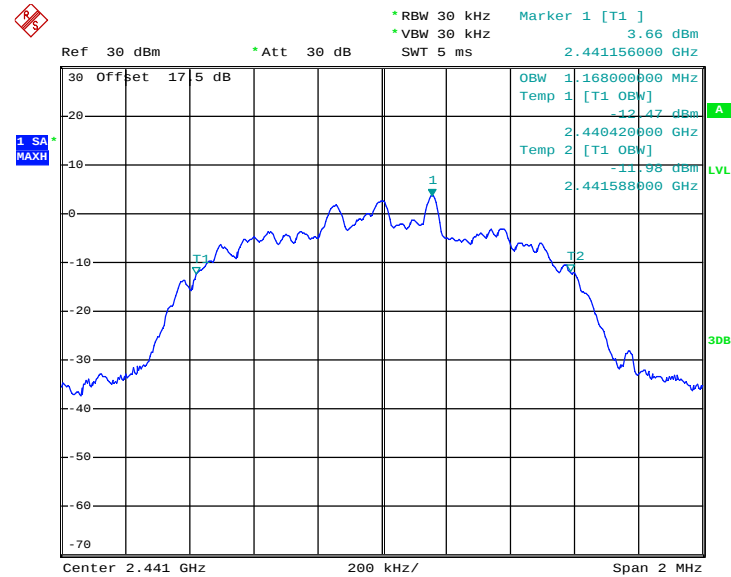99% Occupied Bandwidth Plot on Channel 39


Date: 2.NOV.2012 07:50:47

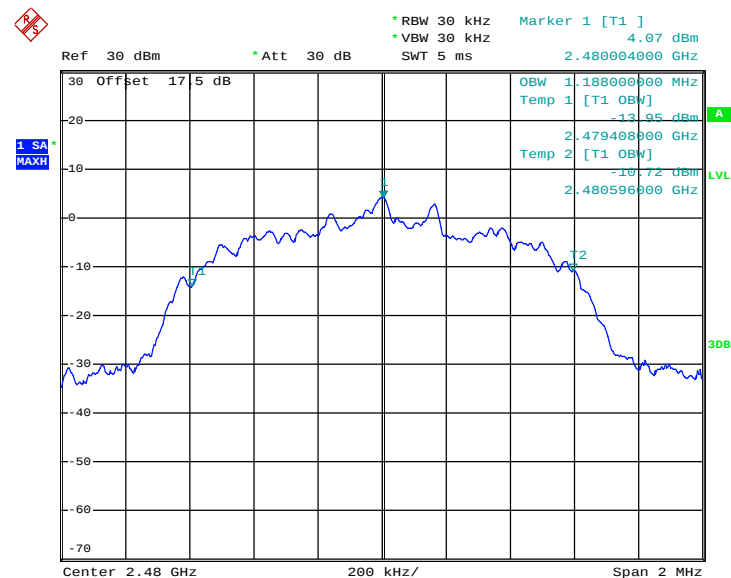99% Occupied Bandwidth Plot on Channel 78


Date: 2.NOV.2012 07:46:22

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.5.4 Test Setup

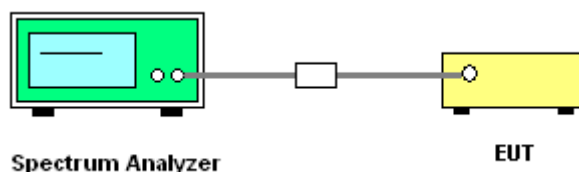


3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.51	30.00	Pass
39	2441	7.93	30.00	Pass
78	2480	9.26	30.00	Pass


Peak Output Power Plot on Channel 00

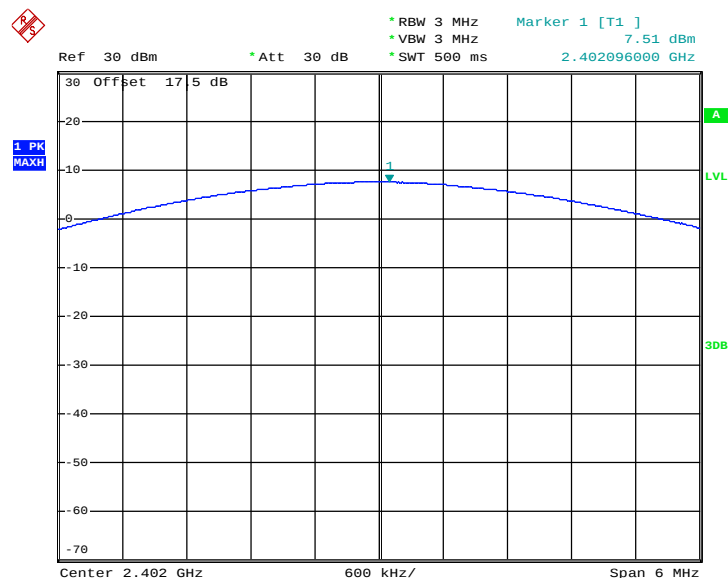

Date: 2.NOV.2012 03:17:41




Peak Output Power Plot on Channel 39

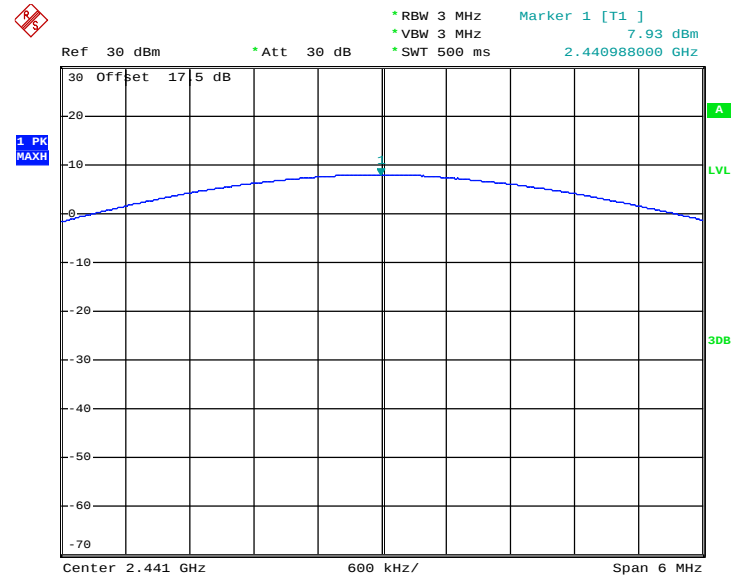

Date: 2.NOV.2012 03:21:55


Peak Output Power Plot on Channel 78

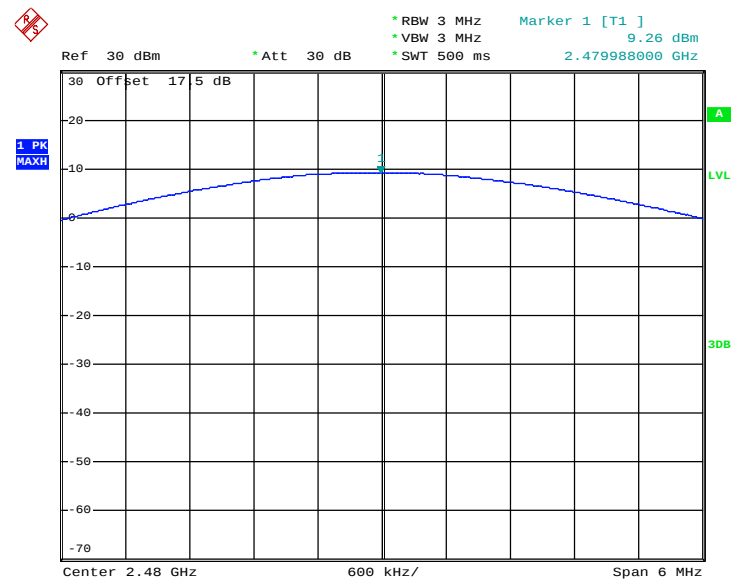

Date: 2.NOV.2012 03:30:53

Test Mode :	2Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.90	20.97	Pass
39	2441	7.31	20.97	Pass
78	2480	8.40	20.97	Pass

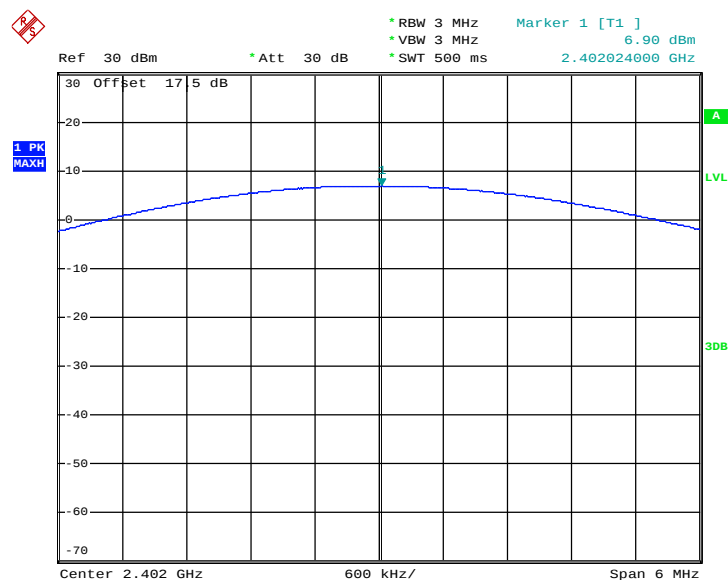Peak Output Power Plot on Channel 00


Date: 2.NOV.2012 03:19:31




Peak Output Power Plot on Channel 39

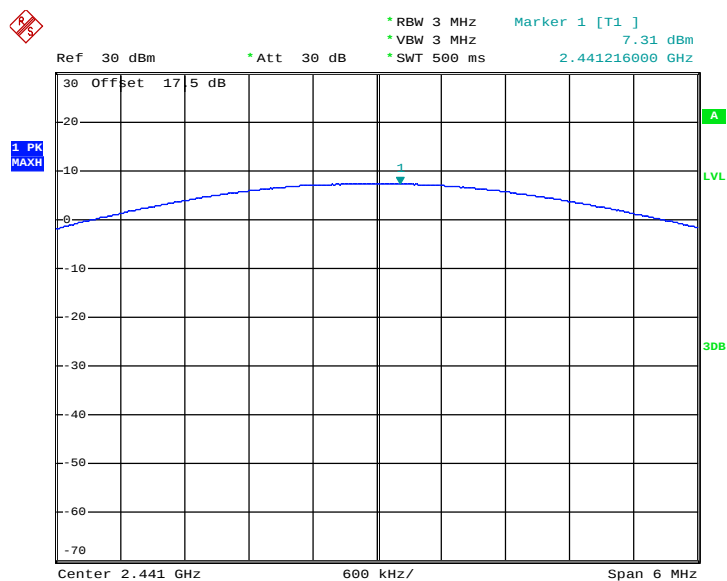

Date: 2.NOV.2012 03:23:51


Peak Output Power Plot on Channel 78

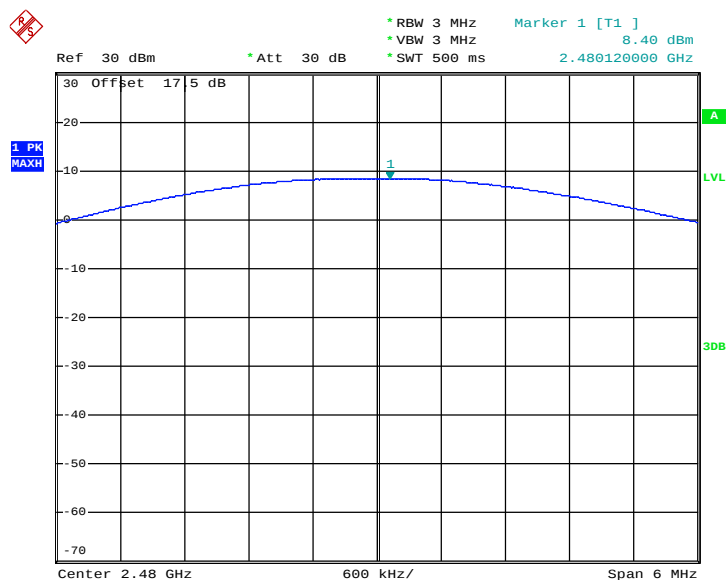


Date: 2.NOV.2012 03:28:18

Test Mode :	3Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%


Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	6.47	20.97	Pass
39	2441	6.76	20.97	Pass
78	2480	8.18	20.97	Pass

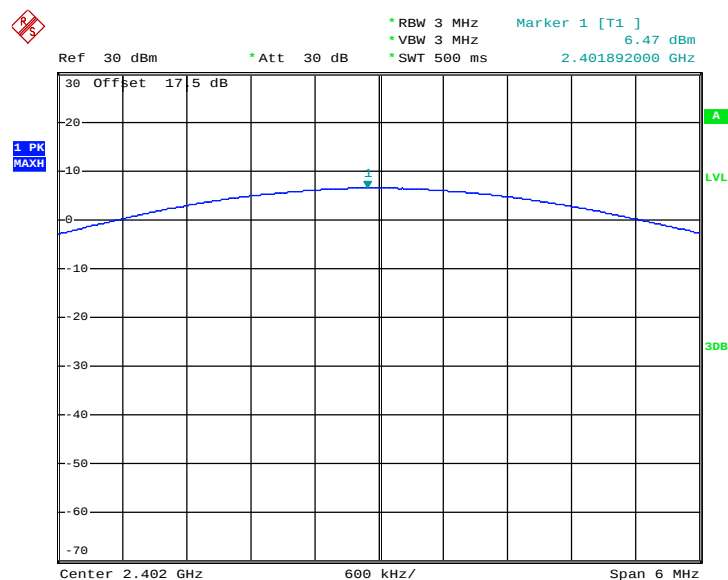Peak Output Power Plot on Channel 00


Date: 2.NOV.2012 03:21:21

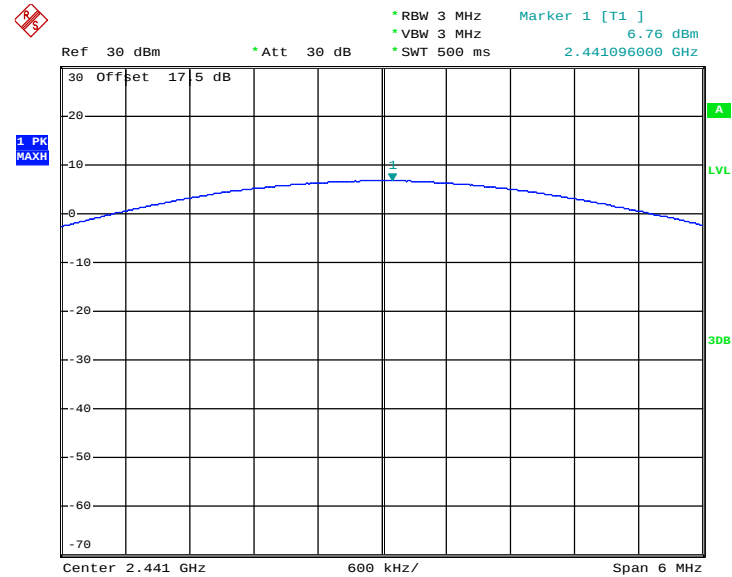Peak Output Power Plot on Channel 39


Date: 2.NOV.2012 03:25:10

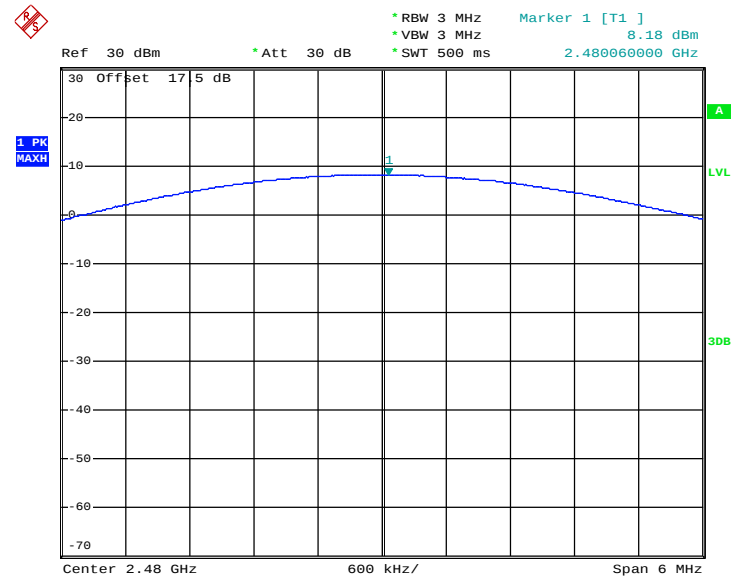Peak Output Power Plot on Channel 78


Date: 2.NOV.2012 03:26:57

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Record the results in the test report.


3.6.4 Test Setup

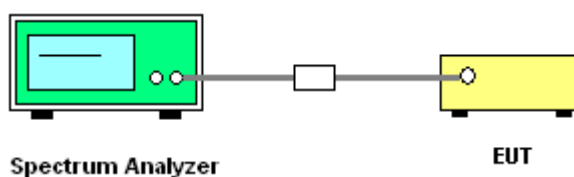

1.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	20~21℃
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

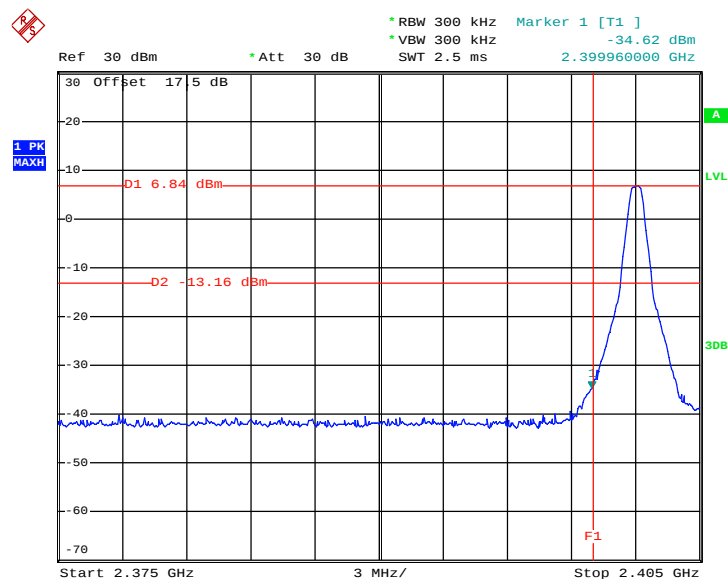

Date: 2.NOV.2012 08:36:55


High Band Edge Plot on Channel 78

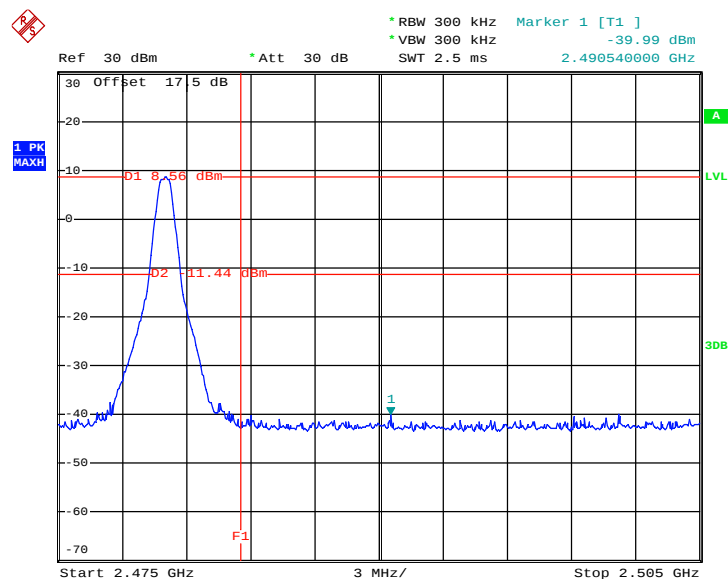

Date: 2.NOV.2012 08:38:46


Test Mode :	2Mbps	Temperature :	20~21℃
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

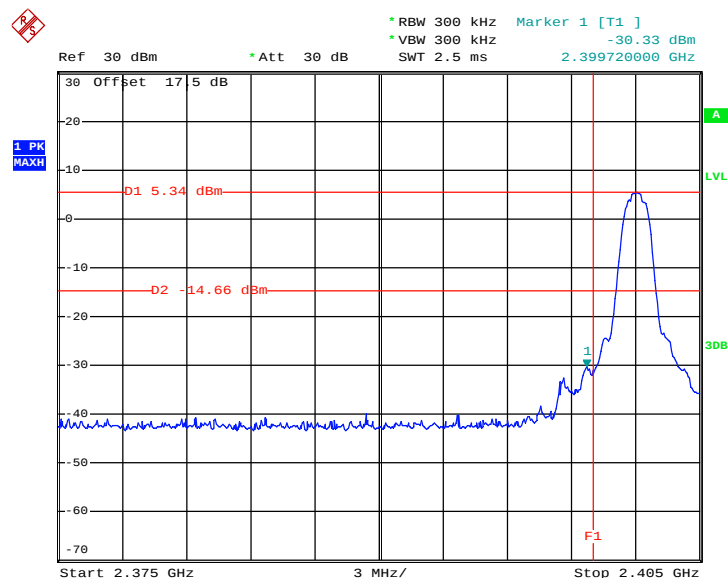

Date: 2.NOV.2012 08:40:57

High Band Edge Plot on Channel 78

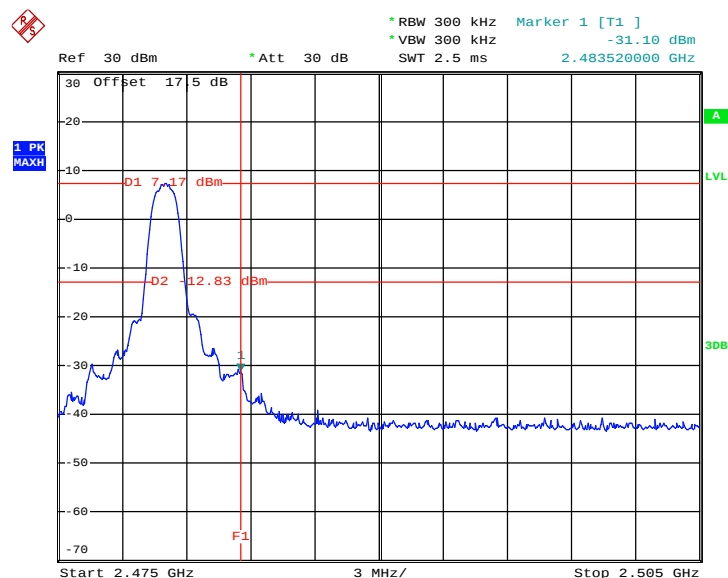

Date: 2.NOV.2012 08:39:48



Test Mode :	3Mbps	Temperature :	20~21℃
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

Ref 30 dBm Att 30 dB RBW 300 kHz VBW 300 kHz SWT 2.5 ms Marker 1 [T1] -29.28 dBm 2.399600000 GHz

30 Offset 17.5 dB

1 PK MAX

D1 4.56 dBm


D2 -15.44 dBm

1

F1

Start 2.375 GHz 3 MHz/ Stop 2.405 GHz


High Band Edge Plot on Channel 78

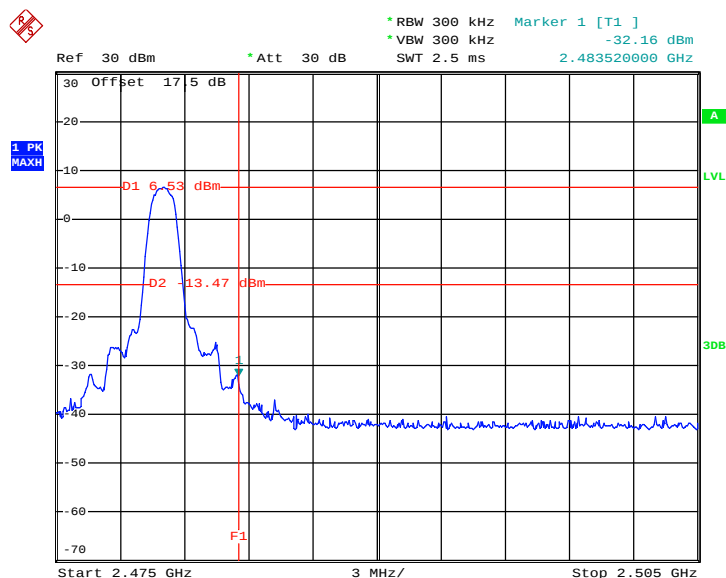


Date: 2.NOV.2012 08:46:03

1.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

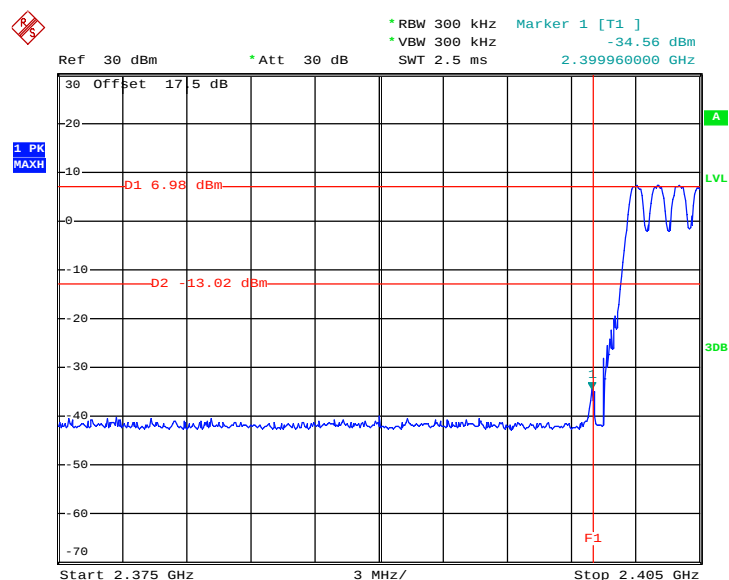Hopping Mode Low Band Edge Plot


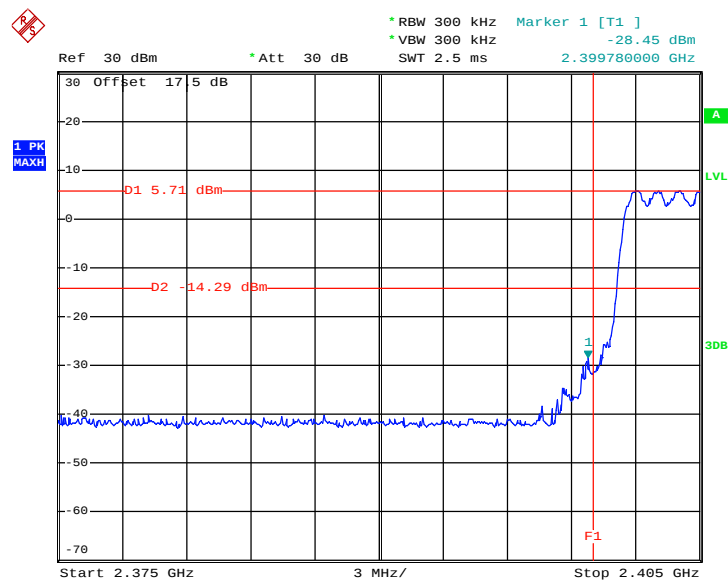
Date: 2.NOV.2012 09:08:56

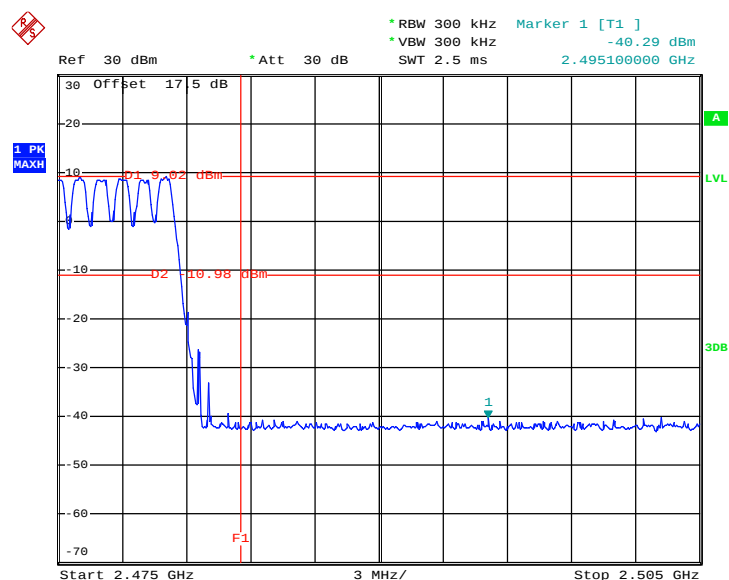Hopping Mode High Band Edge Plot


Date: 2.NOV.2012 09:06:18


Test Mode :	2Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Hopping Mode Low Band Edge Plot



Date: 2.NOV.2012 09:00:28


Hopping Mode High Band Edge Plot

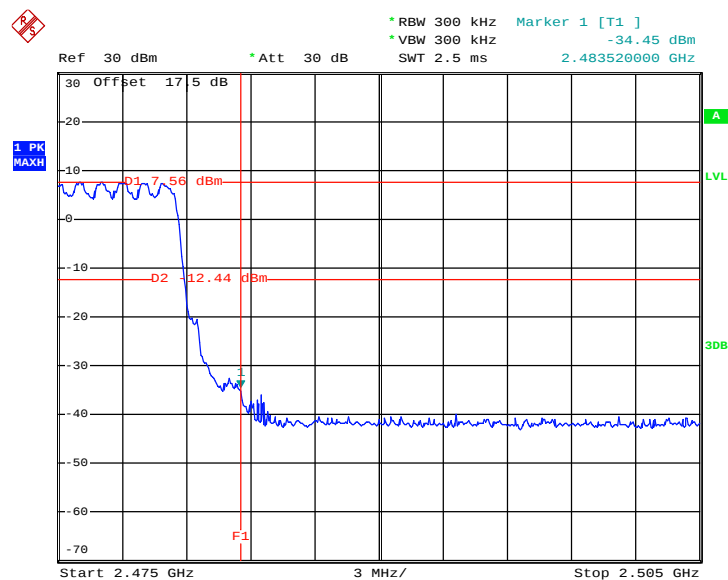

Date: 2.NOV.2012 08:57:23


Test Mode :	3Mbps	Temperature :	20~21℃
Test Engineer :	Zhi Lu	Relative Humidity :	41~42%

Hopping Mode Low Band Edge Plot

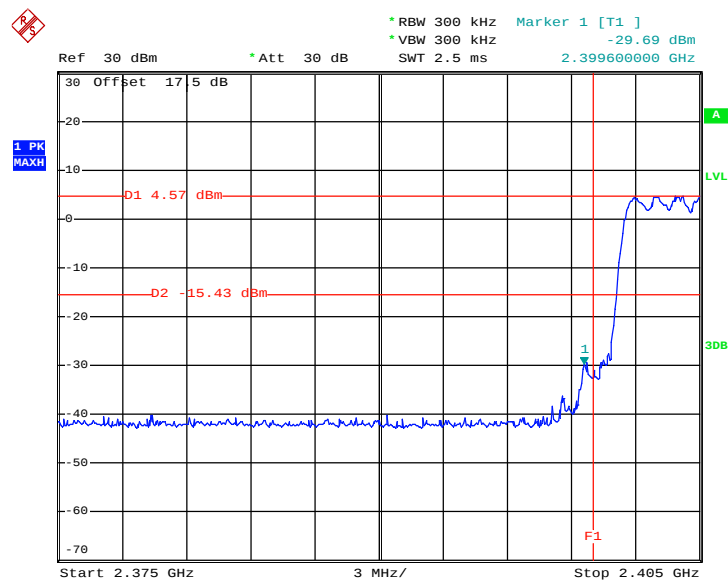

Date: 2.NOV.2012 08:51:53

Hopping Mode High Band Edge Plot

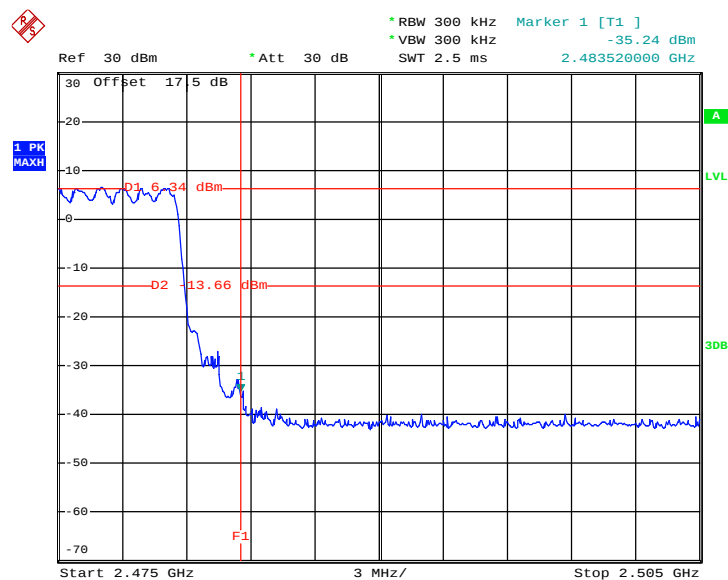

Date: 2.NOV.2012 08:49:38

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The transmitter output was connected to the spectrum analyzer via a low lose cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Record the results in the test report.


3.7.4 Test Setup

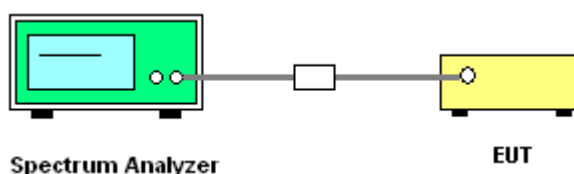

3.7.5 Test Result


Test Mode :	1Mbps	Temperature :	20~21℃
Test Channel :	00	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

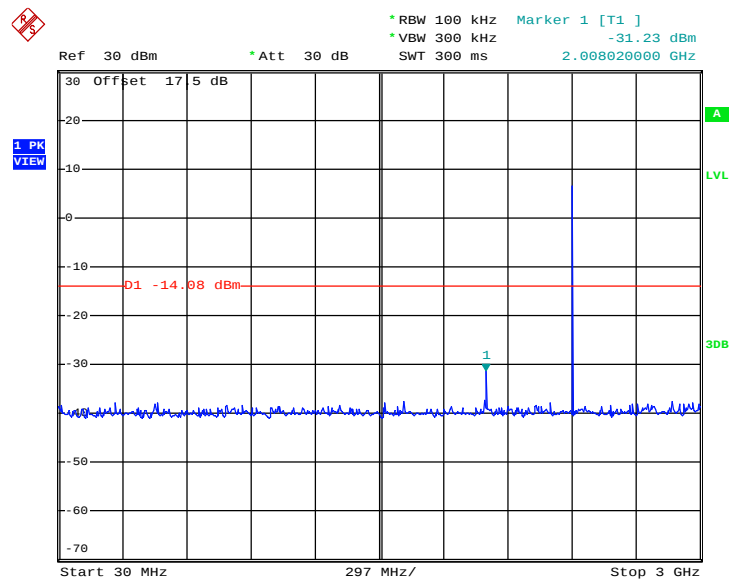

Date: 2.NOV.2012 08:28:30


Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

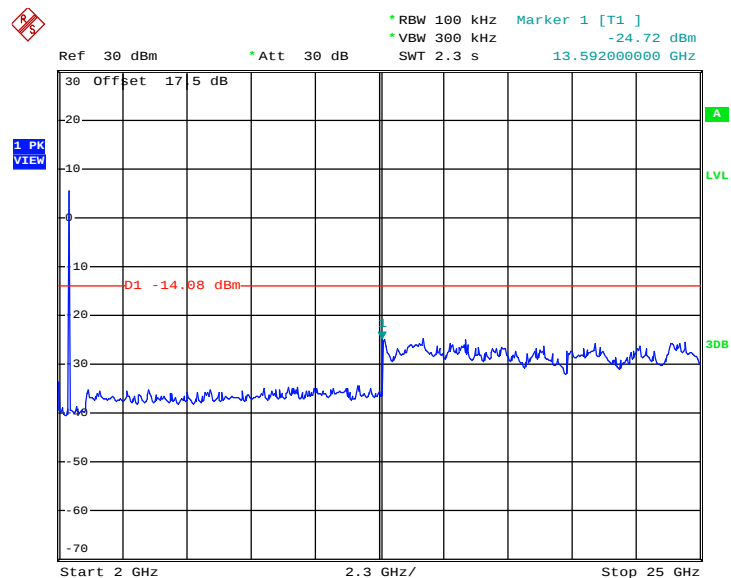


Date: 2.NOV.2012 08:29:02



Test Mode :	1Mbps	Temperature :	20~21℃
Test Channel :	39	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

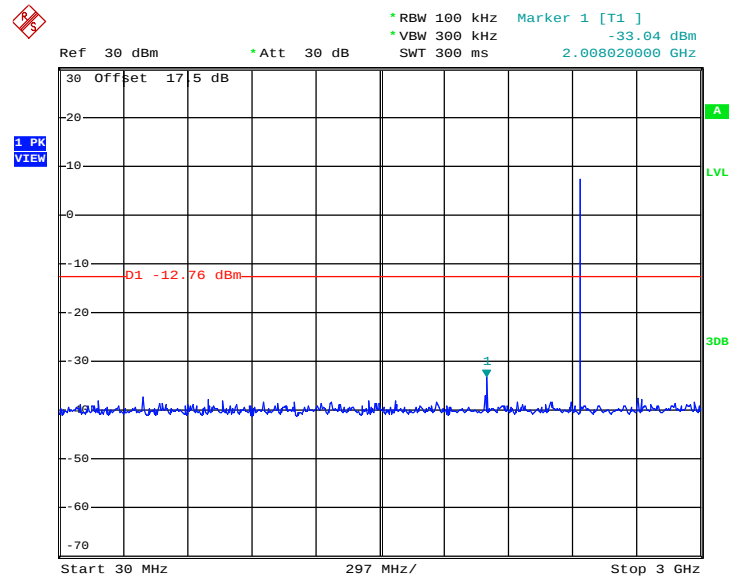
Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

Date: 2.NOV.2012 08:30:11

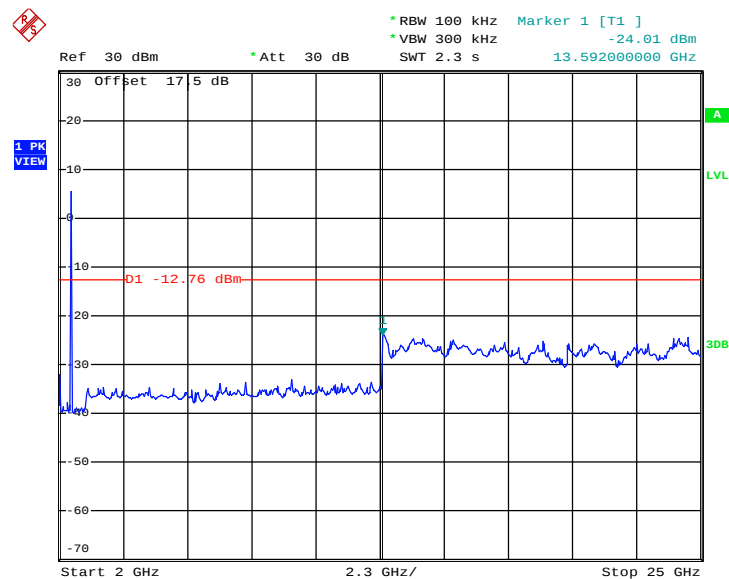
Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

Date: 2.NOV.2012 08:31:30

Test Mode :	1Mbps	Temperature :	20~21℃
Test Channel :	78	Relative Humidity :	41~42%
		Test Engineer :	Zhi Lu

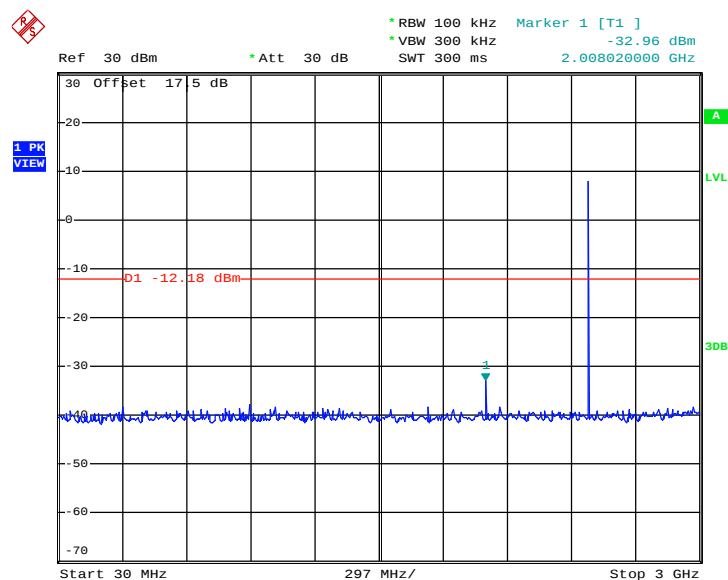Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 2.NOV.2012 08:32:09

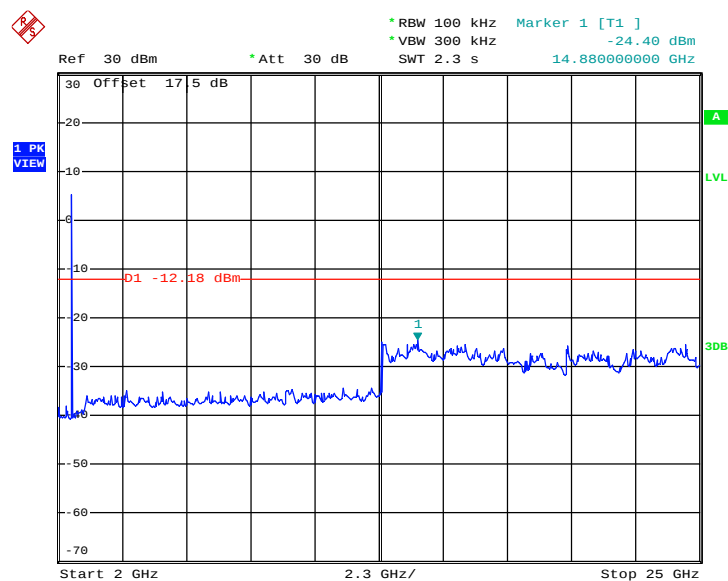Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz


Date: 2.NOV.2012 08:32:39

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.5dB) derived from $20 \log (\text{dwell time}/100\text{ms})$.


For example: Average level = $45.61\text{dBuV/m} - 24.5 \text{ (dB)} = 21.11\text{dBuV/m}$.

3.8.4 Test Setup


For radiated emissions below 30MHz

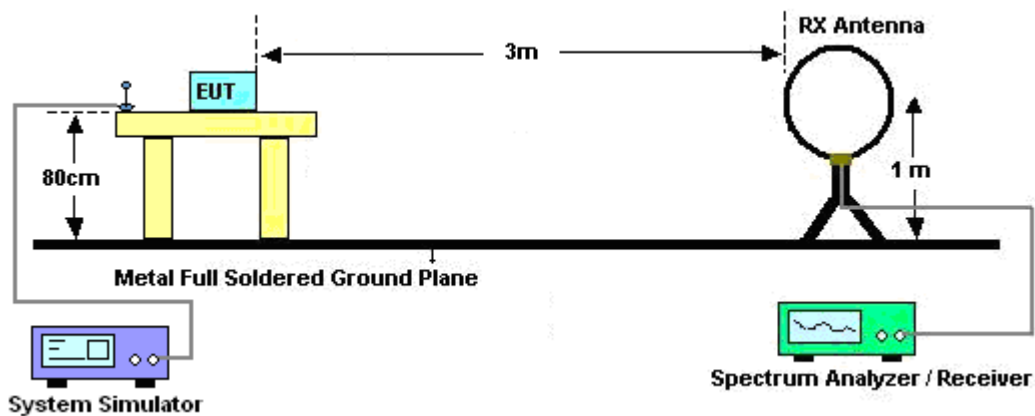

For radiated emissions from 30MHz to 1GHz

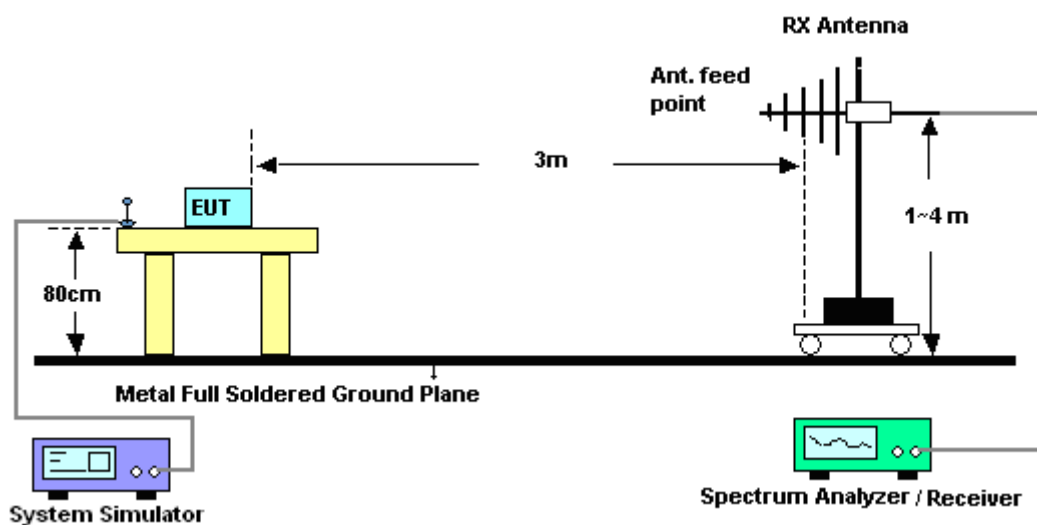

For radiated emissions above 1GHz

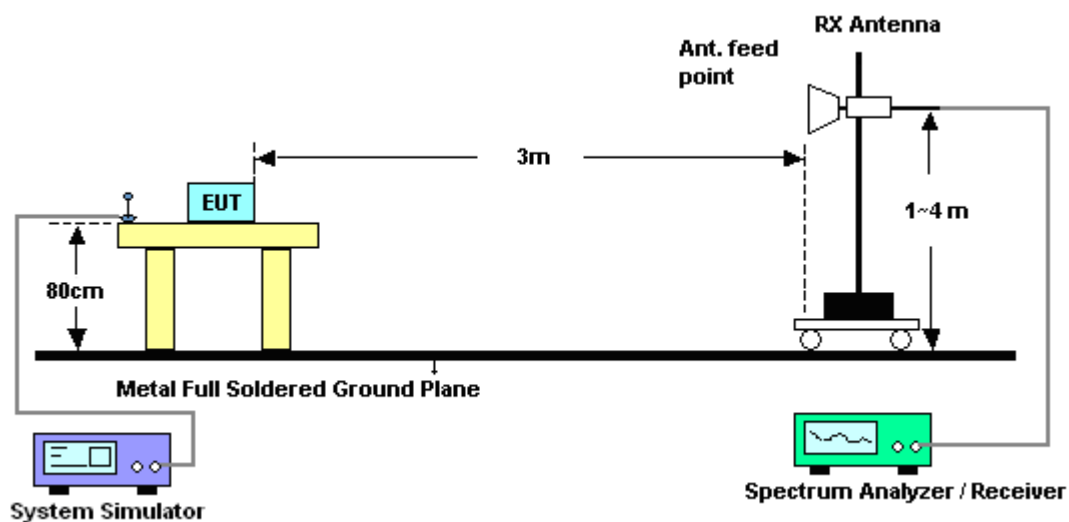


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

3DH5 on time/100ms (One Pulse) Plot on Channel 39

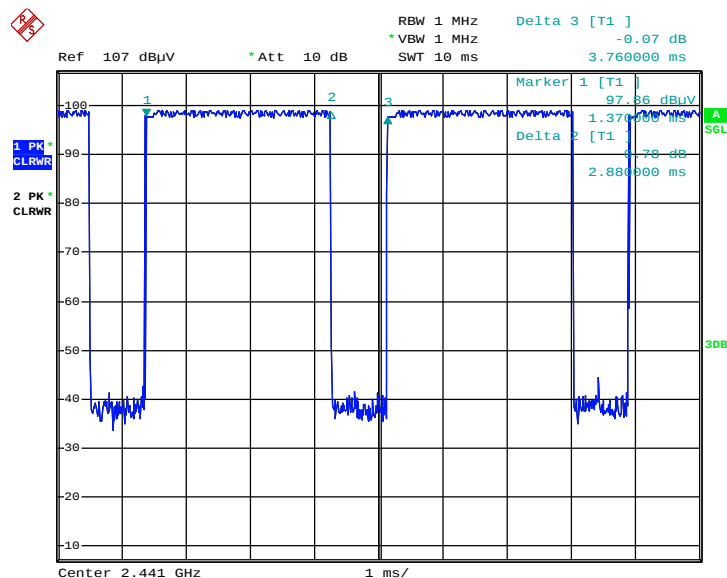

Date: 8.NOV.2012 04:08:50

3DH5 on time/100ms (Count Pulses) Plot on Channel 39

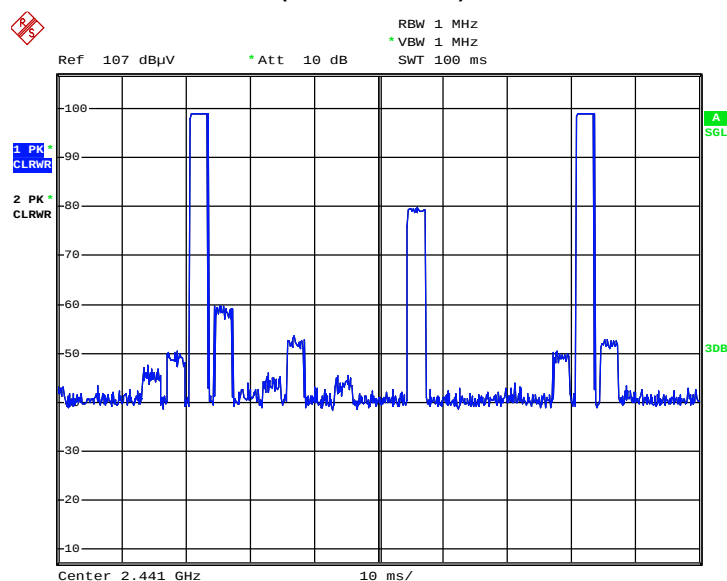

Date: 8.NOV.2012 04:08:09

Note:

1. Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle and is reported.

3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	46~47%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2383.44	47.9	-26.1	74	44.49	32.83	2.09	31.51	100	19	Peak
2383.44	23.11	-30.89	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.39	47.35	-26.65	74	43.89	32.86	2.11	31.51	100	12	Peak
2388.39	22.56	-31.44	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 47.35dBuV/m – 24.79 (dB) = 22.56dBuV/m.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	46~47%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.52	69.3	-4.7	74	65.64	33.01	2.16	31.51	100	60	Peak
2483.52	44.51	-9.49	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	68.17	-5.83	74	64.51	33.01	2.16	31.51	110	0	Peak
2483.5	43.38	-10.62	54	-	-	-	-	-	-	Average

3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.731	19.28	-20.72	40	35.96	16.55	0.35	33.58	-	-	Peak
119.436	19.23	-24.27	43.5	40.4	11.8	0.63	33.6	-	-	Peak
193.773	18.55	-24.95	43.5	42.6	8.7	0.81	33.56	-	-	Peak
307.831	22.39	-23.61	46	41.59	13.17	1	33.37	-	-	Peak
912.862	36.2	-9.8	46	46.35	20.51	1.77	32.43	100	116	Peak
942.131	34.27	-11.73	46	44.26	20.7	1.75	32.44	-	-	Peak
2402	102.56	-	-	99.1	32.86	2.11	31.51	100	60	Peak
2402	77.77	-	-	-	-	-	-	-	-	Average
2816	56.97	-17.03	74	52.8	33.52	2.16	31.51	100	112	Peak
2816	32.18	-21.82	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 56.97dBuV/m – 24.79 (dB) =32.18dBuV/m.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.095	21.26	-18.74	40	38.46	16.04	0.35	33.59	-	-	Peak
63.092	18.22	-21.78	40	46.07	5.25	0.49	33.59	-	-	Peak
110.569	21.99	-21.51	43.5	43.2	11.8	0.6	33.61	-	-	Peak
119.018	20.65	-22.85	43.5	41.82	11.8	0.63	33.6	-	-	Peak
171.393	18.21	-25.29	43.5	41.93	9.08	0.77	33.57	-	-	Peak
945.44	33.6	-12.4	46	43.58	20.71	1.75	32.44	100	152	Peak
2402	101.86	-	-	98.4	32.86	2.11	31.51	110	0	Peak
2402	77.07	-	-	-	-	-	-	-	-	Average
2814	61.39	-12.61	74	57.22	33.52	2.16	31.51	100	90	Peak
2814	36.6	-17.4	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
34.156	18.52	-21.48	40	36.2	15.56	0.36	33.6	-	-	Peak
118.601	19.85	-23.65	43.5	41.02	11.8	0.63	33.6	-	-	Peak
170.195	18.4	-25.1	43.5	42.07	9.14	0.76	33.57	-	-	Peak
197.2	19.13	-24.37	43.5	43.01	8.86	0.82	33.56	-	-	Peak
303.544	21.83	-24.17	46	41.12	13.08	1	33.37	-	-	Peak
942.131	32.73	-13.27	46	42.72	20.7	1.75	32.44	100	29	Peak
2441	103.21	-	-	99.63	32.95	2.14	31.51	100	60	Peak
2441	78.42	-	-	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.211	21.03	-18.97	40	38.23	16.04	0.35	33.59	-	-	Peak
63.313	18.44	-21.56	40	46.29	5.25	0.49	33.59	-	-	Peak
88.964	19.45	-24.05	43.5	43.91	8.61	0.55	33.62	-	-	Peak
111.347	22.76	-20.74	43.5	43.96	11.8	0.61	33.61	-	-	Peak
172.599	18.55	-24.95	43.5	42.34	9.01	0.77	33.57	-	-	Peak
945.44	33.2	-12.8	46	43.18	20.71	1.75	32.44	100	110	Peak
2441	101.21	-	-	97.63	32.95	2.14	31.51	110	0	Peak
2441	76.42	-	-	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.51	18.56	-21.44	40	35.24	16.55	0.35	33.58	-	-	Peak
118.601	20.22	-23.28	43.5	41.39	11.8	0.63	33.6	-	-	Peak
172.599	18.94	-24.56	43.5	42.73	9.01	0.77	33.57	-	-	Peak
299.316	22.49	-23.51	46	41.88	13	0.99	33.38	-	-	Peak
912.862	30.26	-15.74	46	40.41	20.51	1.77	32.43	-	-	Peak
942.131	32.92	-13.08	46	42.91	20.7	1.75	32.44	100	221	Peak
2480	104.64	-	-	100.98	33.01	2.16	31.51	100	199	Peak
2480	79.85	-	-	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.638	23	-17	40	38.95	17.29	0.34	33.58	-	-	Peak
38.752	20.43	-19.57	40	40.7	12.98	0.39	33.64	-	-	Peak
110.957	21.77	-21.73	43.5	42.98	11.8	0.6	33.61	-	-	Peak
118.601	21.31	-22.19	43.5	42.48	11.8	0.63	33.6	-	-	Peak
171.995	18.27	-25.23	43.5	41.99	9.08	0.77	33.57	-	-	Peak
945.44	33.46	-12.54	46	43.44	20.71	1.75	32.44	100	91	Peak
2480	103.21	-	-	99.55	33.01	2.16	31.51	100	21	Peak
2480	78.42	-	-	-	-	-	-	-	-	Average

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

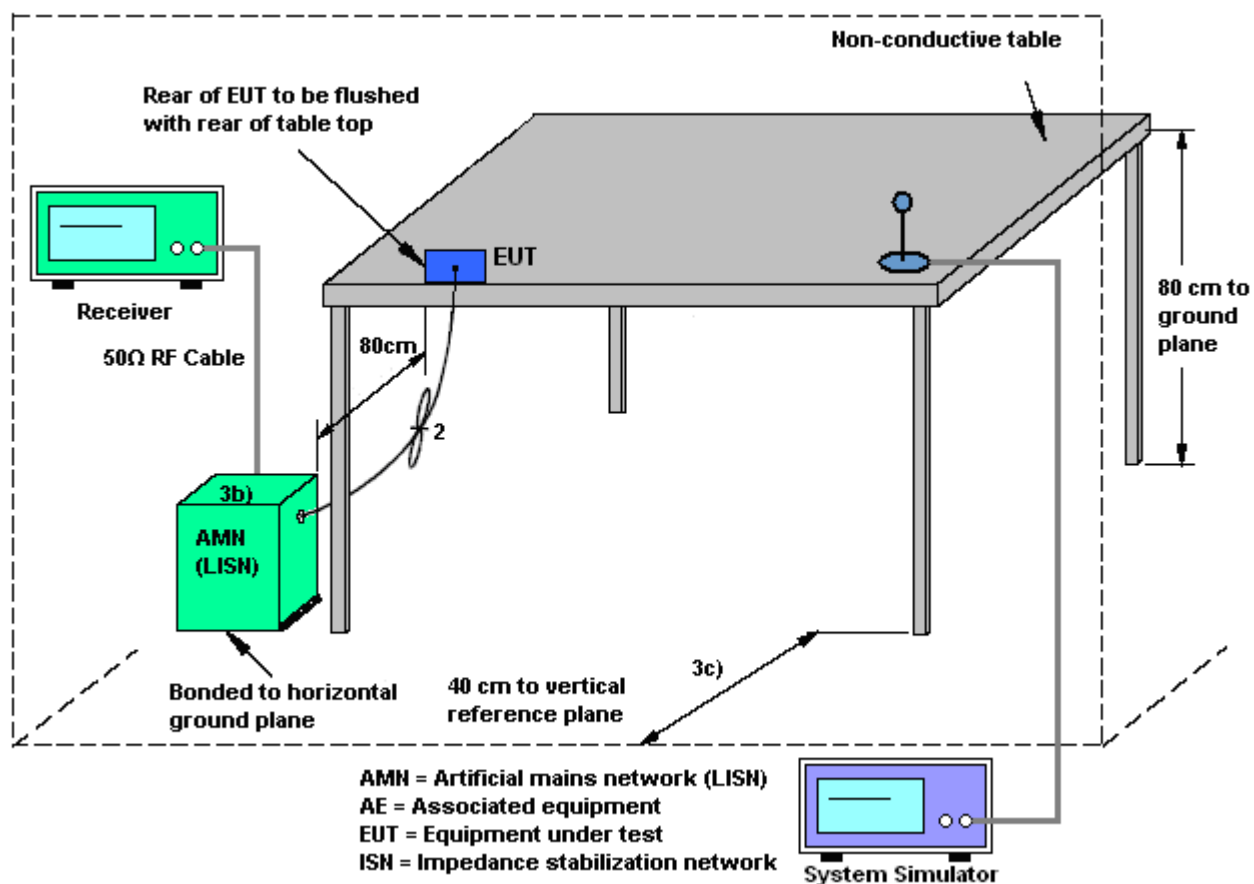

3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	19~20℃
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA BC0 Idle + Bluetooth Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

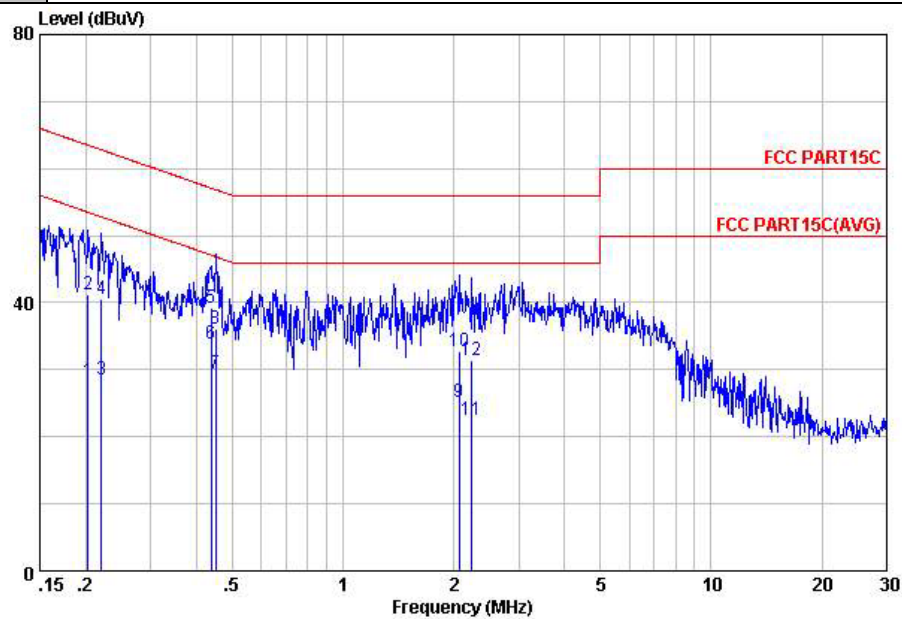

Site : C001-KS
Condition: FCC PART15C LISN-111230 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.20	28.23	-25.26	53.49	17.80	-0.07	10.50	Average
2	0.20	41.13	-22.36	63.49	30.70	-0.07	10.50	QP
3	0.22	28.54	-24.25	52.79	18.10	-0.07	10.51	Average
4	0.22	40.54	-22.25	62.79	30.10	-0.07	10.51	QP
5	0.44	39.24	-17.87	57.11	28.70	-0.08	10.62	QP
6	0.44	33.84	-13.27	47.11	23.30	-0.08	10.62	Average
7	0.45	29.44	-17.41	46.85	18.90	-0.08	10.62	Average
8	0.45	36.14	-20.71	56.85	25.60	-0.08	10.62	QP
9	2.07	25.19	-20.81	46.00	14.60	-0.11	10.70	Average
10	2.07	32.69	-23.31	56.00	22.10	-0.11	10.70	QP
11	2.24	22.60	-23.40	46.00	12.00	-0.11	10.71	Average
12	2.24	31.40	-24.60	56.00	20.80	-0.11	10.71	QP

Test Mode :	Mode 1	Temperature :	19~20℃
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA BC0 Idle + Bluetooth Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

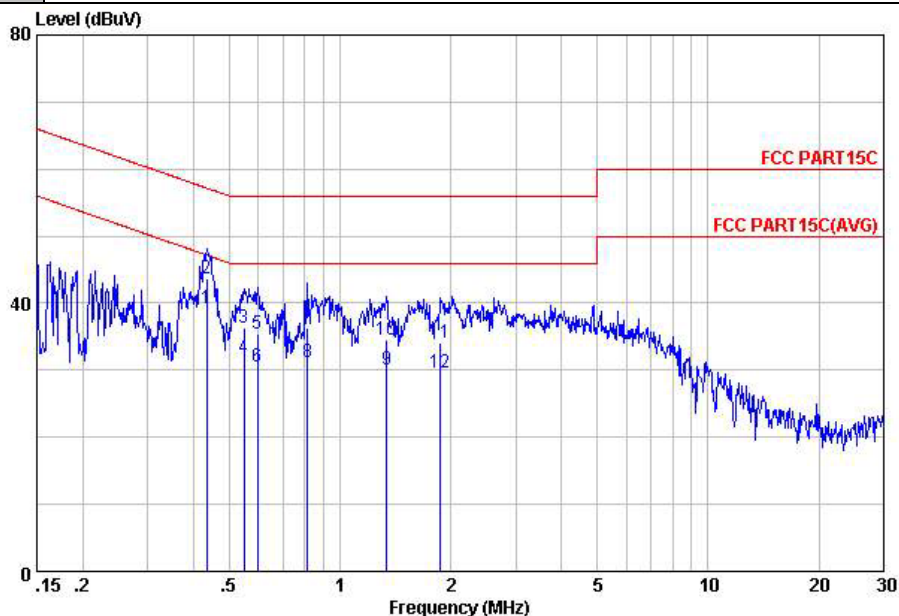

Site : C001-KS
Condition: FCC PART15C LISN-111230 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.44	39.24	-7.91	47.15	28.70	-0.08	10.62	Average
2	0.44	43.64	-13.51	57.15	33.10	-0.08	10.62	QP
3	0.55	36.35	-19.65	56.00	25.80	-0.08	10.63	QP
4	0.55	31.95	-14.05	46.00	21.40	-0.08	10.63	Average
5	0.60	35.35	-20.65	56.00	24.80	-0.08	10.63	QP
6	0.60	30.45	-15.55	46.00	19.90	-0.08	10.63	Average
7	0.82	36.26	-19.74	56.00	25.69	-0.08	10.65	QP
8	0.82	31.16	-14.84	46.00	20.59	-0.08	10.65	Average
9	1.34	30.07	-15.93	46.00	19.50	-0.10	10.67	Average
10	1.34	34.47	-21.53	56.00	23.90	-0.10	10.67	QP
11	1.88	33.99	-22.01	56.00	23.40	-0.11	10.70	QP
12	1.88	29.59	-16.41	46.00	19.00	-0.11	10.70	Average

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 02, 2012~ Nov. 08, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Nov. 02, 2012~ Nov. 08, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Nov. 02, 2012~ Nov. 08, 2012	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Nov. 02, 2012~ Nov. 08, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Nov. 02, 2012~ Nov. 08, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Nov. 02, 2012~ Nov. 08, 2012	Aug. 16, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Nov. 06, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Nov. 06, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Nov. 06, 2012	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Nov. 06, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	Nov. 06, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Oct. 10, 2012	Nov. 06, 2012	Oct. 09, 2013	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Nov. 06, 2012	Aug. 16, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Nov. 06, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	N/A	Nov. 16, 2011	Nov. 06, 2012	Nov. 15, 2012	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Nov. 06, 2012	Dec. 29, 2012	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72
--	------

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
--	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2O1106 as below.