



Shenzhen GTI Technology Co., Ltd.

1F,2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,
Shenzhen, Guangdong, China.

Tel: +86-755-27559792

Fax: +86-755-86116468

Report No.: GTI20150180F-2

Page 1 of 43

TEST REPORT

Product Name: Mobile Phone

Trademark: UNIMAX

Model/Type reference: V351

Listed Model(s): /

FCC ID.....: P46-V351

Test Standards: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

Applicant: UNIMAX Communications

Address of applicant: 18201 McDermott Street W.Suite E Irvine, CA 92614

Date of Receipt: May. 05, 2015

Date of Test Date.....: May. 10, 2015 - Jun. 02, 2015

Data of issue.: Jun. 02, 2015

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above


GENERAL DESCRIPTION OF EUT	
Equipment:	Mobile Phone
Model Name:	V351
Manufacturer:	Shenzhen Tonhorn Communication Technology CO., LTD
Manufacturer Address:	Room402, Block East, 2nd Phase of Innovation and Technology Square, Tian'an Digital City, Futian District, Shenzhen China.
Power Rating:	DC 3.7V form 1200mAh by rechargeable battery or DC 5.0V form Input:100-240V~,50/60Hz adapter Output: 5.0V===1000mA

Compiled By:




(Allen Wang)

Reviewed By:



(Tony Wang)

Approved By:



(Walter Chen)

This test report consists of 43 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of compiler, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Table of Contents

Page

1. SUMMARY.....	4
1.1. TEST STANDARDS.....	4
1.2. TEST DESCRIPTION.....	4
1.3. TEST FACILITY	5
1.4. MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION.....	6
2.1. ENVIRONMENTAL CONDITIONS	6
2.2. GENERAL DESCRIPTION OF EUT	6
2.3. DESCRIPTION OF TEST MODES	7
2.4. MEASUREMENT INSTRUMENTS LIST	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSION (AC MAIN)	9
3.2. RADIATED EMISSION	12
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....	19
3.4. POWER SPECTRAL DENSITY	20
3.5. 6dB BANDWIDTH.....	23
3.6. BAND EDGE COMPLIANCE OF RF EMISSION	26
3.7. SPURIOUS RF CONDUCTED EMISSION.....	31
3.8. ANTENNA REQUIREMENT.....	41
4. EUT TEST PHOTO	42
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	43

1. SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.4-2003](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen General Testing & Inspection Technology Co., Ltd.

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

FCC-Registration No.: 214666

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements and is documented in the Shenzhen General Testing & Inspection Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for General Testing & Inspection laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2.2. General Description of EUT

Product Name:	Mobile Phone
Model/Type reference:	V351
Power supply:	DC 3.7V from battery
Adapter information 1:	Model:V351 Input: AC100-240VAC, 50/60Hz 0.15A Output: DC5V---DC600mA
Adapter information 2:	Model:V351CHG Input: AC100-240VAC, 50/60Hz 0.15A Output: DC5V---DC600mA
Hardware version:	GW-SN01M_V1.1
Software version:	Android 4.4.2
WIFI :	
Supported type:	802.11b/802.11g/802.11n(H20)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	1.0dBi

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.3. Description of Test Modes

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

WIFI Operation Frequency :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11

2.4. Measurement Instruments List

Maximum Peak Output Power					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487B	110553	July 10,2015
2	Power Sensor	Anritsu	MA2411B	100345	July 10,2015

Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Jan 07,2016

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrate until
1	LISN	R&S	ENV216	101112	Jan. 07, 2016
2	LISN	R&S	ENV216	101113	Jan. 07, 2016
3	EMI Test Receiver	R&S	ESCI	100920	Jan. 07, 2016
4	Cable	Schwarzbeck	AK9515E	33156	Jan. 07, 2016

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100967	Jan 07,2016
2	High pass filter	micro-tranics	HPM50111	34202	Jan 07,2016
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Jan. 10,2016
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Jan. 10,2016
5	Loop Antenna	LAPLAC	RF300	9138	Jan. 10,2016
6	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Jan 07,2016
7	Horn Antenna	Schwarzbeck	BBHA 9120D	648	Jan. 10,2016
8	Pre-Amplifier	HP	8447D	1937A03050	Jan. 07,2016
9	Pre-Amplifier	EMCI	EMC05183 5	980075	Jan. 07,2016
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Jan. 07,2016
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX1 02	DA1580	Jan. 07,2016

Note: 1. The Cal.Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

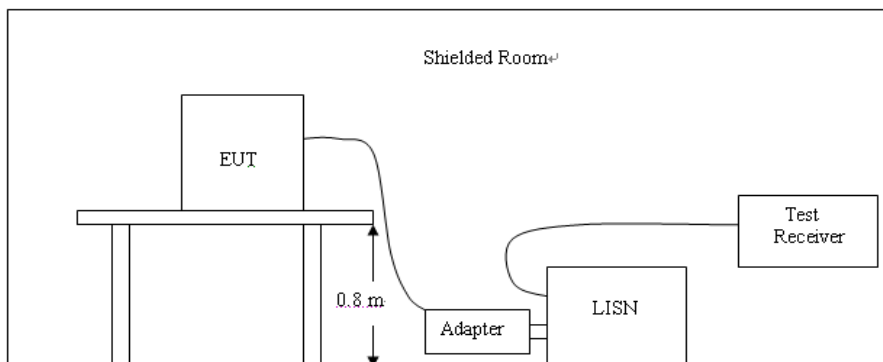

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2003.
2. Support equipment, if needed, was placed as per ANSI C63.4-2003
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2003
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


Note: We tested all modes with adapter 1 and adapter 2, recorded the worst case at wifi 802.11b mode with adapter 1.

LINE

L

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

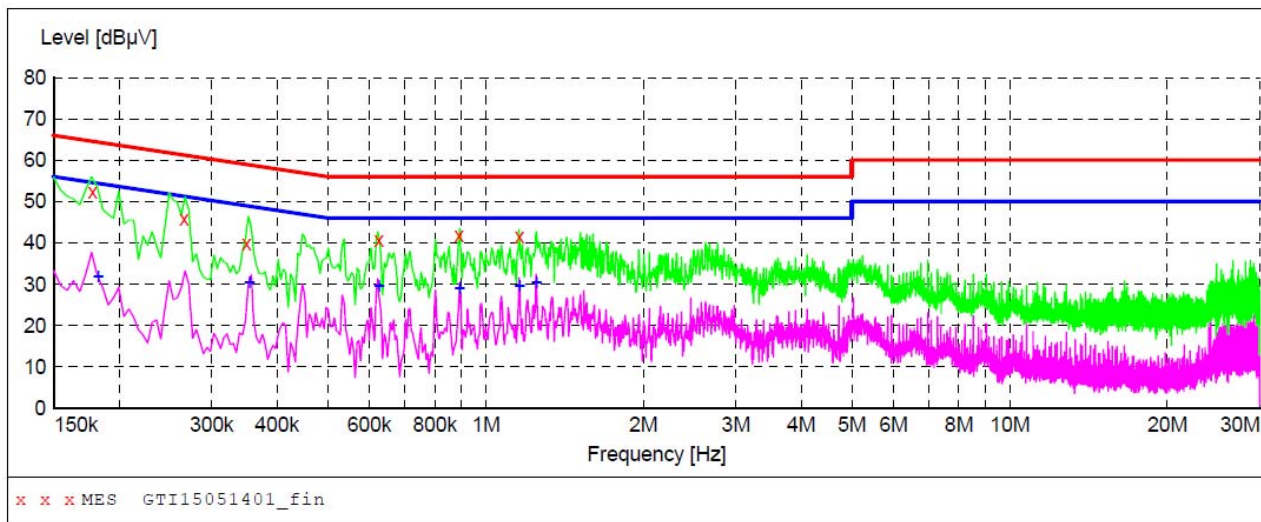

MEASUREMENT RESULT: "GTI15051401_fin"

5/14/2015 10:31AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.178000	52.40	9.9	65	12.2	QP	L1	GND
0.266000	45.70	9.9	61	15.5	QP	L1	GND
0.350000	39.80	9.9	59	19.2	QP	L1	GND
0.626000	40.80	10.0	56	15.2	QP	L1	GND
0.890000	41.80	10.1	56	14.2	QP	L1	GND
1.160000	41.60	10.2	56	14.4	QP	L1	GND

MEASUREMENT RESULT: "GTI15051401_fin2"

5/14/2015 10:31AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.182000	31.80	9.9	54	22.6	AV	L1	GND
0.354000	30.50	9.9	49	18.4	AV	L1	GND
0.626000	29.50	10.0	46	16.5	AV	L1	GND
0.890000	28.90	10.1	46	17.1	AV	L1	GND
1.160000	29.70	10.2	46	16.3	AV	L1	GND
1.250000	30.50	10.2	46	15.5	AV	L1	GND

LINE

N

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

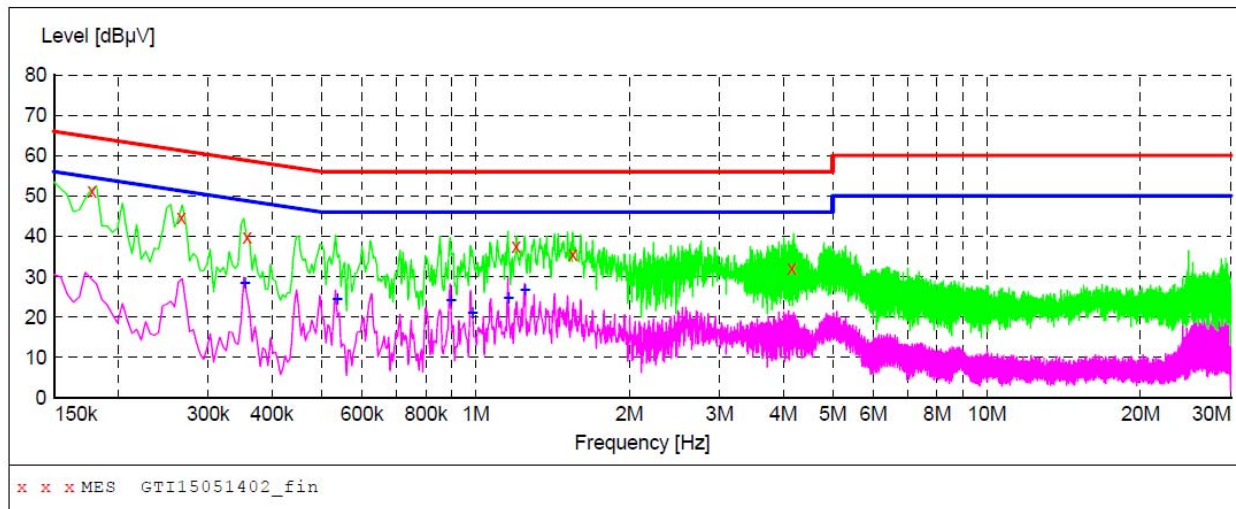
MEASUREMENT RESULT: "GTI15051402_fin"

5/14/2015 10:34AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.178000	51.10	9.9	65	13.5	QP	N	GND
0.266000	44.60	9.9	61	16.6	QP	N	GND
0.358000	39.70	9.9	59	19.1	QP	N	GND
1.202000	37.50	10.2	56	18.5	QP	N	GND
1.550000	35.70	10.3	56	20.3	QP	N	GND
4.160000	32.30	10.6	56	23.7	QP	N	GND

MEASUREMENT RESULT: "GTI15051402_fin2"

5/14/2015 10:34AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.354000	28.50	9.9	49	20.4	AV	N	GND
0.536000	24.40	9.9	46	21.6	AV	N	GND
0.896000	24.10	10.1	46	21.9	AV	N	GND
0.986000	21.00	10.1	46	25.0	AV	N	GND
1.160000	24.80	10.2	46	21.2	AV	N	GND
1.250000	26.60	10.2	46	19.4	AV	N	GND

3.2. Radiated Emission

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

For example


Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
150.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$


Test Configuration

For the actual test configuration, please refer to the related Item –EUT Test Photos.


Frequency range 9 KHz – 30MHz

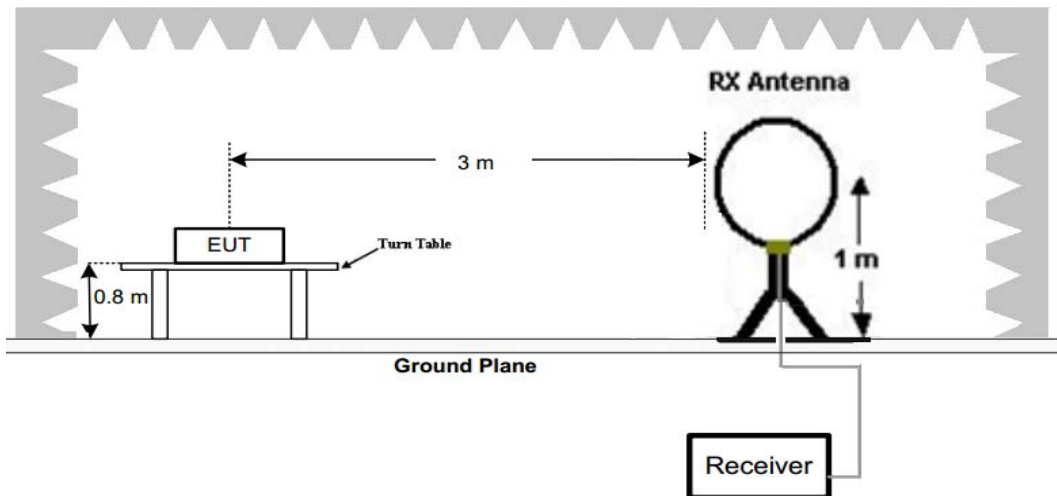

Frequency range 30MHz – 1000MHz

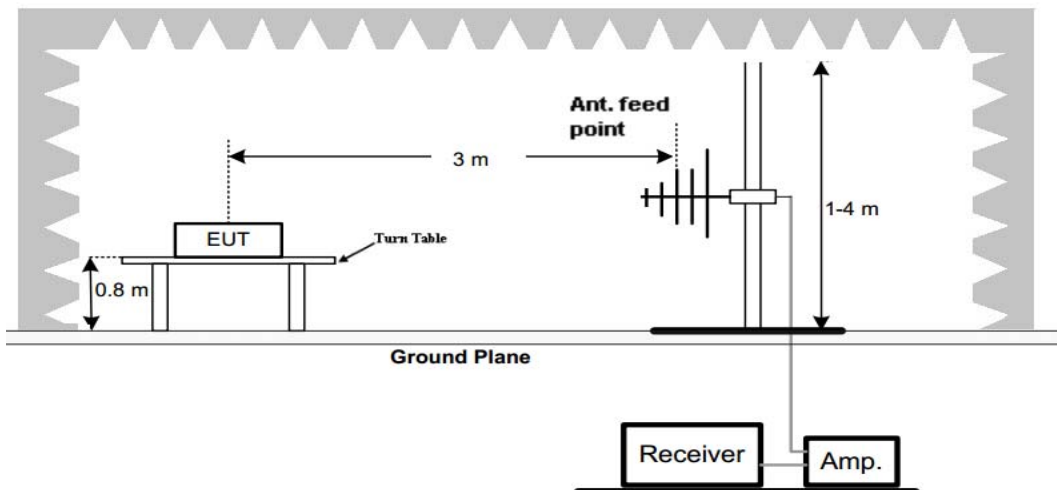

Frequency range above 1GHz-25GHz

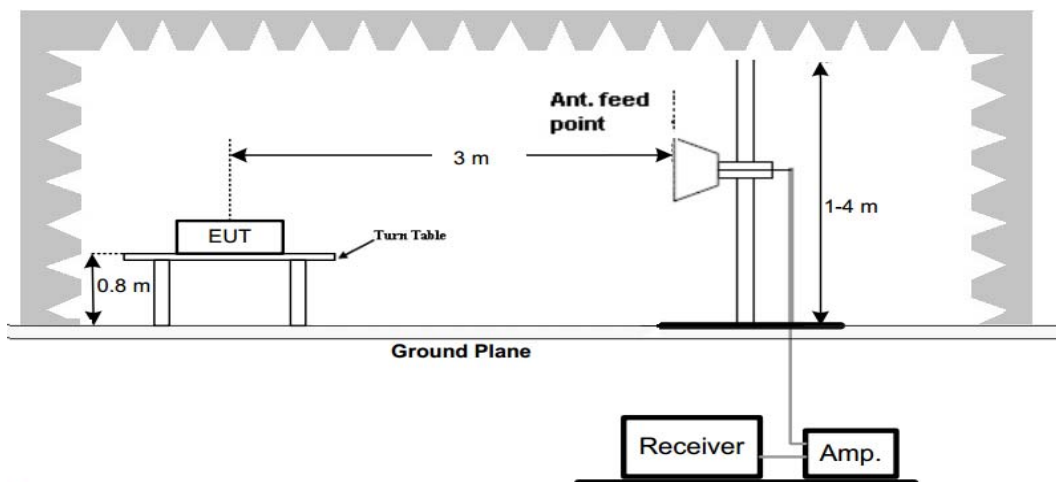

Test Results

Remark:

1. We tested three channels for each mode and recorded worst case at low channel of 802.11b mode below 1GHz.


For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.36	53.66	96.48	42.82	QP	PASS
1.55	42.58	63.80	21.22	QP	PASS
20.48	53.36	69.54	16.18	QP	PASS
25.78	50.48	69.54	19.06	QP	PASS

For 30MHz-1GHz

Horizontal


Data: 4

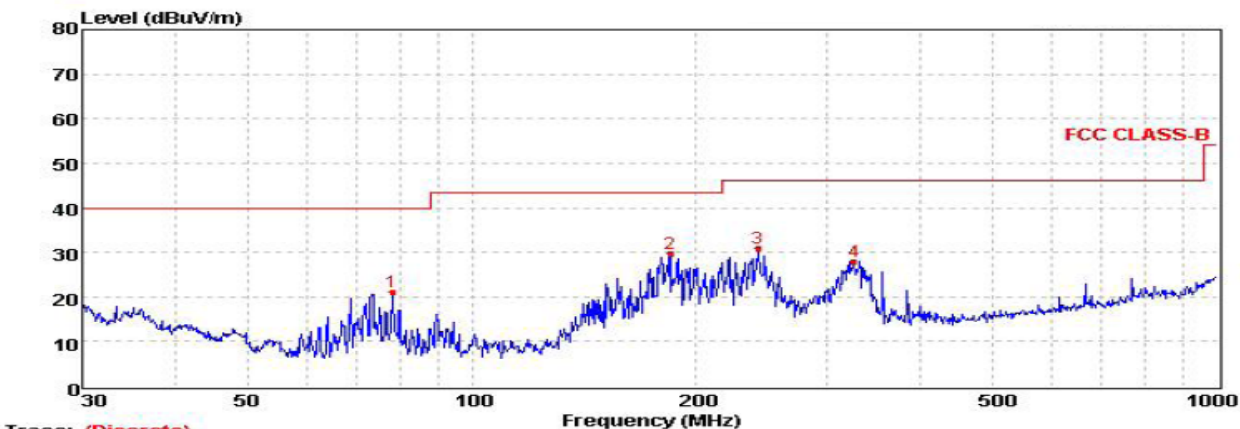

Mark	Frequency MHz	Level dBm	Factor dB	Reading dBm	Limit dB	Margin dB	Polarization	Detector
1	78.14	21.01	-21.94	42.95	40.00	18.99	HORIZONTAL	Peak
2	184.49	29.71	-19.42	49.13	43.50	13.79	HORIZONTAL	Peak
3	241.68	30.81	-17.63	48.44	46.00	15.19	HORIZONTAL	Peak
4	325.60	28.02	-16.24	44.26	46.00	17.98	HORIZONTAL	Peak

Vertical

Data: 4

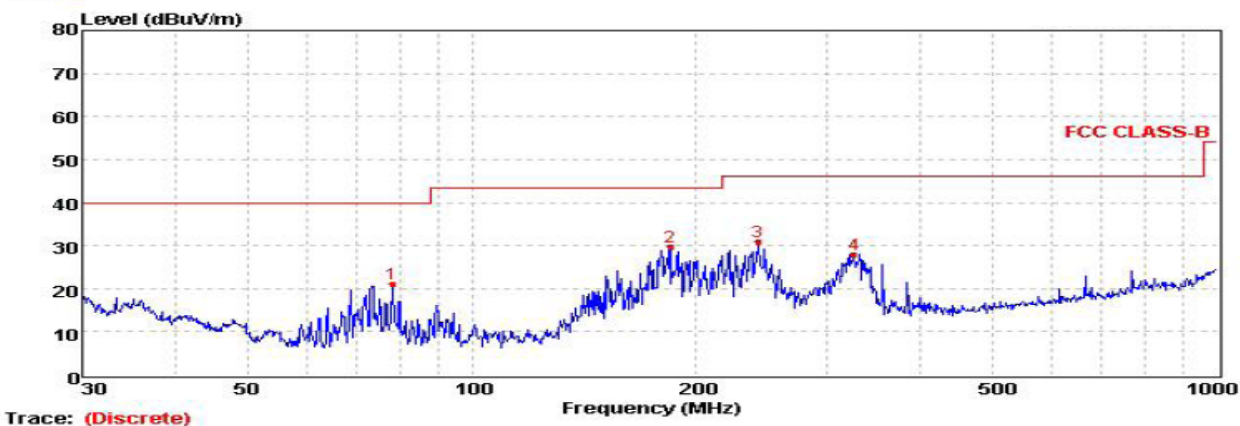

Mark	Frequency MHz	Level dBm	Factor dB	Reading dBm	Limit dB	Margin dB	Polarization	Detector
1	78.14	21.01	-21.94	42.95	40.00	18.99	HORIZONTAL	Peak
2	184.49	29.71	-19.42	49.13	43.50	13.79	HORIZONTAL	Peak
3	241.68	30.81	-17.63	48.44	46.00	15.19	HORIZONTAL	Peak
4	325.60	28.02	-16.24	44.26	46.00	17.98	HORIZONTAL	Peak



For 1GHz to 25GHz

802.11b Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	66.74	PK	74	7.26	1.00	50	64.64	31.6	7.00	36.5	2.10
1	4824	47.36	AV	54	6.64	1.00	50	45.26	31.6	7.00	36.5	2.10
2	7236	58.71	PK	74	15.29	1.00	101	47.78	37.33	8.90	35.3	10.93
2	7236	39.50	AV	54	14.50	1.00	101	28.57	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	67.87	PK	74	6.13	1.00	121	65.77	31.60	7.00	36.50	2.10
1	4824	46.54	AV	54	7.46	1.00	121	44.44	31.60	7.00	36.50	2.10
2	7236	60.46	PK	74	13.54	1.00	140	49.53	37.33	8.90	35.30	10.93
2	7236	41.63	AV	54	12.37	1.00	140	30.70	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	66.50	PK	74.00	7.50	1.00	115	64.38	31.02	7.60	36.5	2.12
1	4874.00	47.74	AV	54.00	6.26	1.00	115	45.62	31.02	7.60	36.5	2.12
2	7311.00	58.60	PK	74.00	15.40	1.00	180	47.52	37.28	8.60	34.8	11.08
2	7311.00	39.77	AV	54.00	14.23	1.00	180	28.69	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	67.79	PK	74.00	6.21	1.00	95	65.67	31.02	7.60	36.5	2.12
1	4874.00	48.50	AV	54.00	5.50	1.00	95	46.38	31.02	7.60	36.5	2.12
2	7311.00	60.60	PK	74.00	13.40	1.00	70	49.52	37.28	8.60	34.8	11.08
2	7311.00	41.39	AV	54.00	12.61	1.00	70	30.31	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	66.89	PK	74.00	7.11	1.00	125	63.69	31.58	7.82	36.2	3.20
1	4924.00	48.87	AV	54.00	5.13	1.00	125	45.67	31.58	7.82	36.2	3.20
2	7386.00	58.46	PK	74.00	15.54	1.00	125	46.52	38.51	8.73	35.3	11.94
2	7386.00	39.23	AV	54.00	14.77	1.00	125	27.29	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBUV/m)		Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	67.55	PK	74.00	6.45	1.00	45	64.35	31.58	7.82	36.2	3.20
1	4924.00	49.60	AV	54.00	4.40	1.00	48	46.40	31.58	7.82	36.2	3.20
2	7386.00	60.44	PK	74.00	13.56	1.00	87	48.50	38.51	8.73	35.3	11.94
2	7386.00	42.50	AV	54.00	11.50	1.00	87	30.56	38.51	8.73	35.3	11.94

802.11g Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	65.62	PK	74	8.38	1.00	50	64.64	31.6	7.00	36.5	2.10
1	4824	46.22	AV	54	7.78	1.00	50	45.26	31.6	7.00	36.5	2.10
2	7236	57.02	PK	74	16.98	1.00	101	47.78	37.33	8.90	35.3	10.93
2	7236	39.22	AV	54	14.78	1.00	101	28.57	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	66.25	PK	74	7.75	1.00	121	65.77	31.60	7.00	36.50	2.10
1	4824	45.84	AV	54	8.16	1.00	121	44.44	31.60	7.00	36.50	2.10
2	7236	58.98	PK	74	15.02	1.00	140	49.53	37.33	8.90	35.30	10.93
2	7236	40.36	AV	54	13.64	1.00	140	30.70	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	65.57	PK	74.00	8.43	1.00	115	64.38	31.02	7.60	36.5	2.12
1	4874.00	46.54	AV	54.00	7.46	1.00	115	45.62	31.02	7.60	36.5	2.12
2	7311.00	57.62	PK	74.00	16.38	1.00	180	47.52	37.28	8.60	34.8	11.08
2	7311.00	38.57	AV	54.00	15.43	1.00	180	28.69	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	66.58	PK	74.00	7.42	1.00	95	65.67	31.02	7.60	36.5	2.12
1	4874.00	47.51	AV	54.00	6.49	1.00	95	46.38	31.02	7.60	36.5	2.12
2	7311.00	58.62	PK	74.00	15.38	1.00	70	49.52	37.28	8.60	34.8	11.08
2	7311.00	40.37	AV	54.00	13.63	1.00	70	30.31	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	64.87	PK	74.00	9.13	1.00	125	63.69	31.58	7.82	36.2	3.20
1	4924.00	47.95	AV	54.00	6.05	1.00	125	45.67	31.58	7.82	36.2	3.20
2	7386.00	57.02	PK	74.00	16.98	1.00	125	46.52	38.51	8.73	35.3	11.94
2	7386.00	38.66	AV	54.00	15.34	1.00	125	27.29	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	65.22	PK	74.00	8.78	1.00	45	64.35	31.58	7.82	36.2	3.20
1	4924.00	47.94	AV	54.00	6.06	1.00	48	46.40	31.58	7.82	36.2	3.20
2	7386.00	57.94	PK	74.00	16.06	1.00	87	48.50	38.51	8.73	35.3	11.94
2	7386.00	40.62	AV	54.00	13.38	1.00	87	30.56	38.51	8.73	35.3	11.94

802.11n20 Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	63.54	PK	74	10.46	1.00	50	64.64	31.6	7.00	36.5	2.10
1	4824	45.24	AV	54	8.76	1.00	50	45.26	31.6	7.00	36.5	2.10
2	7236	56.57	PK	74	17.43	1.00	101	47.78	37.33	8.90	35.3	10.93
2	7236	38.21	AV	54	15.79	1.00	101	28.57	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824	65.62	PK	74	8.38	1.00	121	65.77	31.60	7.00	36.50	2.10
1	4824	45.62	AV	54	8.38	1.00	121	44.44	31.60	7.00	36.50	2.10
2	7236	58.92	PK	74	15.08	1.00	140	49.53	37.33	8.90	35.30	10.93
2	7236	40.11	AV	54	13.89	1.00	140	30.70	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	64.35	PK	74.00	9.65	1.00	115	64.38	31.02	7.60	36.5	2.12
1	4874.00	46.54	AV	54.00	7.46	1.00	115	45.62	31.02	7.60	36.5	2.12
2	7311.00	57.02	PK	74.00	16.98	1.00	180	47.52	37.28	8.60	34.8	11.08
2	7311.00	39.21	AV	54.00	14.79	1.00	180	28.69	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	66.32	PK	74.00	7.68	1.00	95	65.67	31.02	7.60	36.5	2.12
1	4874.00	45.14	AV	54.00	8.86	1.00	95	46.38	31.02	7.60	36.5	2.12
2	7311.00	57.22	PK	74.00	16.78	1.00	70	49.52	37.28	8.60	34.8	11.08
2	7311.00	39.36	AV	54.00	14.64	1.00	70	30.31	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	64.51	PK	74.00	9.49	1.00	125	63.69	31.58	7.82	36.2	3.20
1	4924.00	47.21	AV	54.00	6.79	1.00	125	45.67	31.58	7.82	36.2	3.20
2	7386.00	54.64	PK	74.00	19.36	1.00	125	46.52	38.51	8.73	35.3	11.94
2	7386.00	38.02	AV	54.00	15.98	1.00	125	27.29	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	64.62	PK	74.00	9.38	1.00	45	64.35	31.58	7.82	36.2	3.20
1	4924.00	45.36	AV	54.00	8.64	1.00	48	46.40	31.58	7.82	36.2	3.20
2	7386.00	56.34	PK	74.00	17.66	1.00	87	48.50	38.51	8.73	35.3	11.94
2	7386.00	40.27	AV	54.00	13.73	1.00	87	30.56	38.51	8.73	35.3	11.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

3.3. Maximum Conducted Output Power

Limit

30dBm for digital modulation systems.

Test Procedure


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

WIFI

Type	Channel	Output power PK(dBm)	Output power AV(dBm)	Limit (dBm)	Result
802.11b	01	20.80	16.87	30.00	Pass
	06	20.75	16.85		
	11	20.51	16.82		
802.11g	01	20.66	12.81	30.00	Pass
	06	20.48	12.77		
	11	20.23	12.52		
802.11n(H20)	01	20.65	12.77	30.00	Pass
	06	20.62	12.72		
	11	20.34	12.45		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Test Procedure

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

The resulting peak PSD level must be 8dBm.


Test Configuration




Test Results

WIFI				
Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-10.93	8.00	Pass
	06	-10.93		
	11	-10.97		
802.11g	01	-13.21	8.00	Pass
	06	-13.12		
	11	-13.40		
802.11n(HT20)	01	-11.79	8.00	Pass
	06	-13.26		
	11	-13.57		

Test plot as follows:

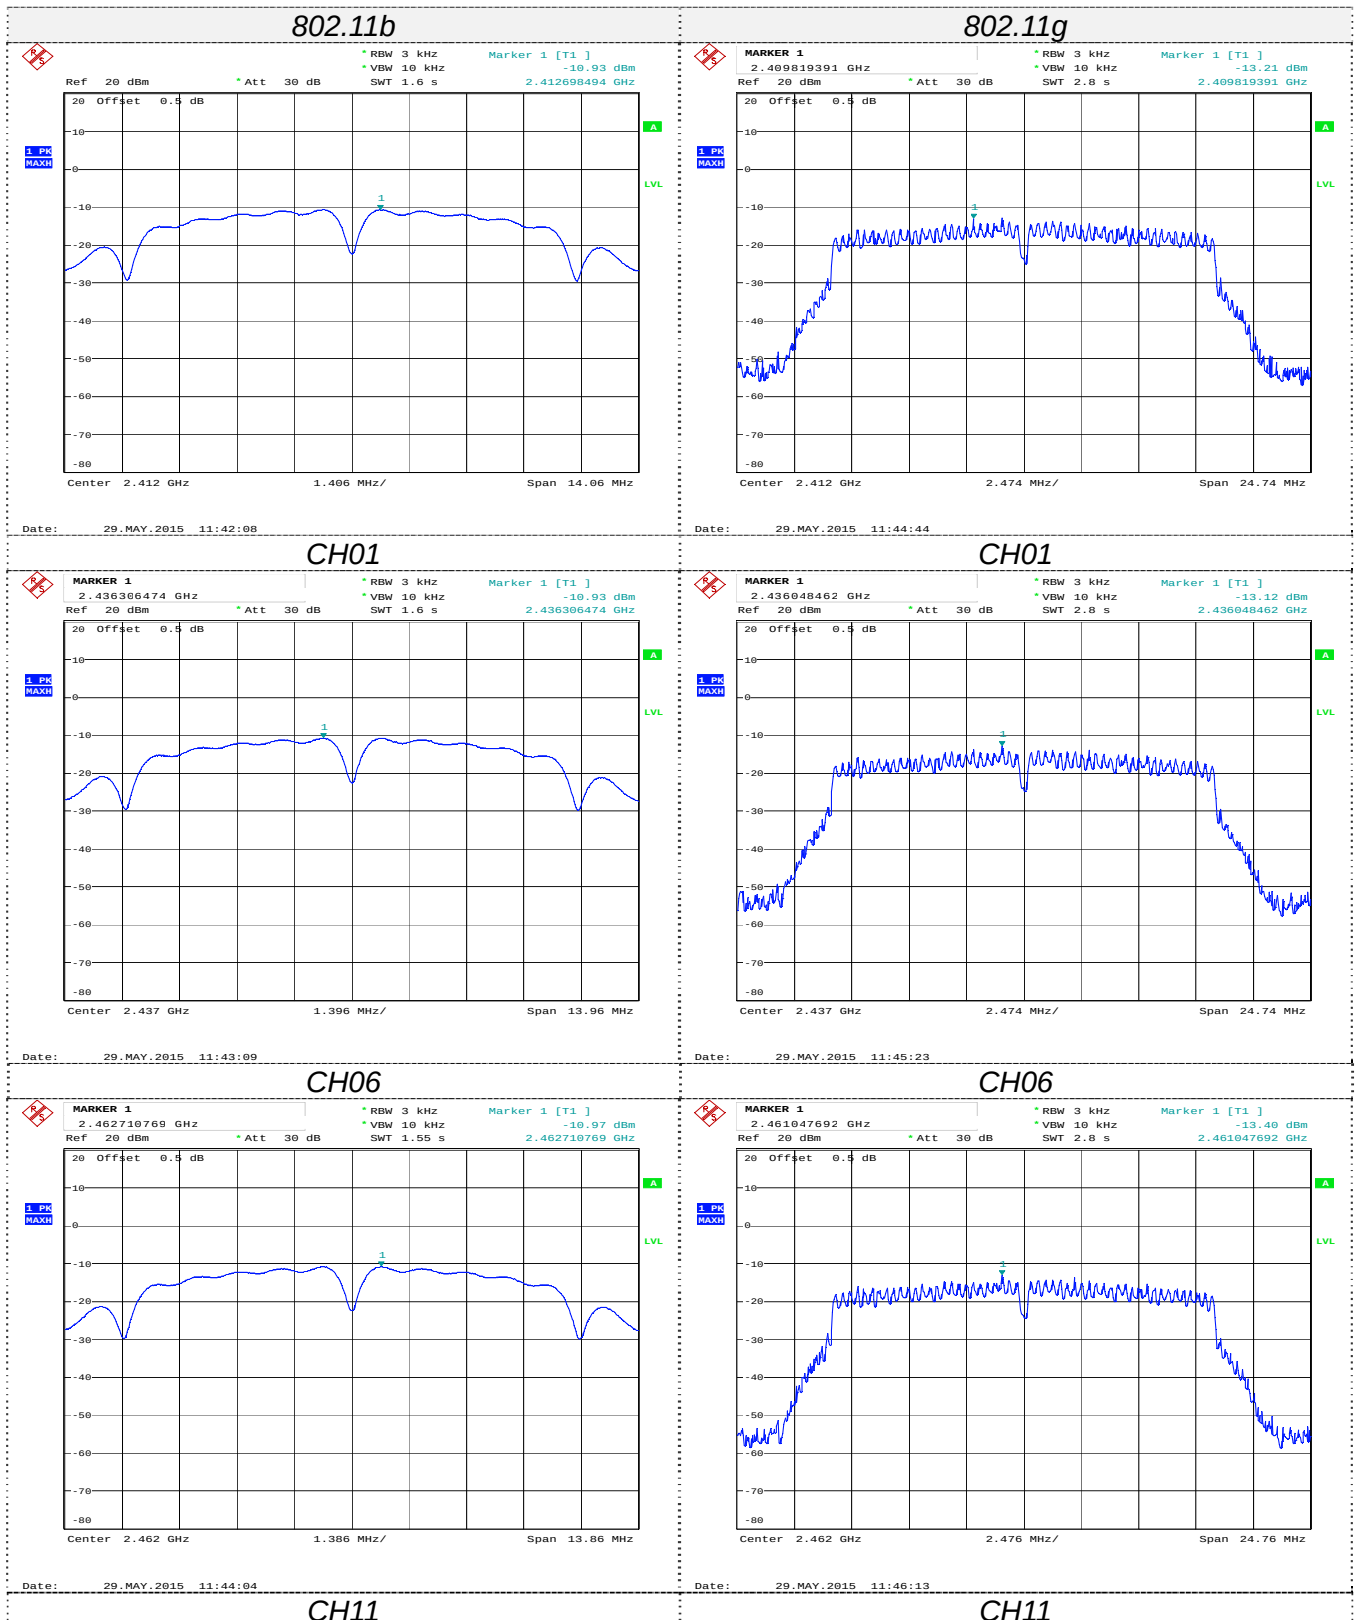

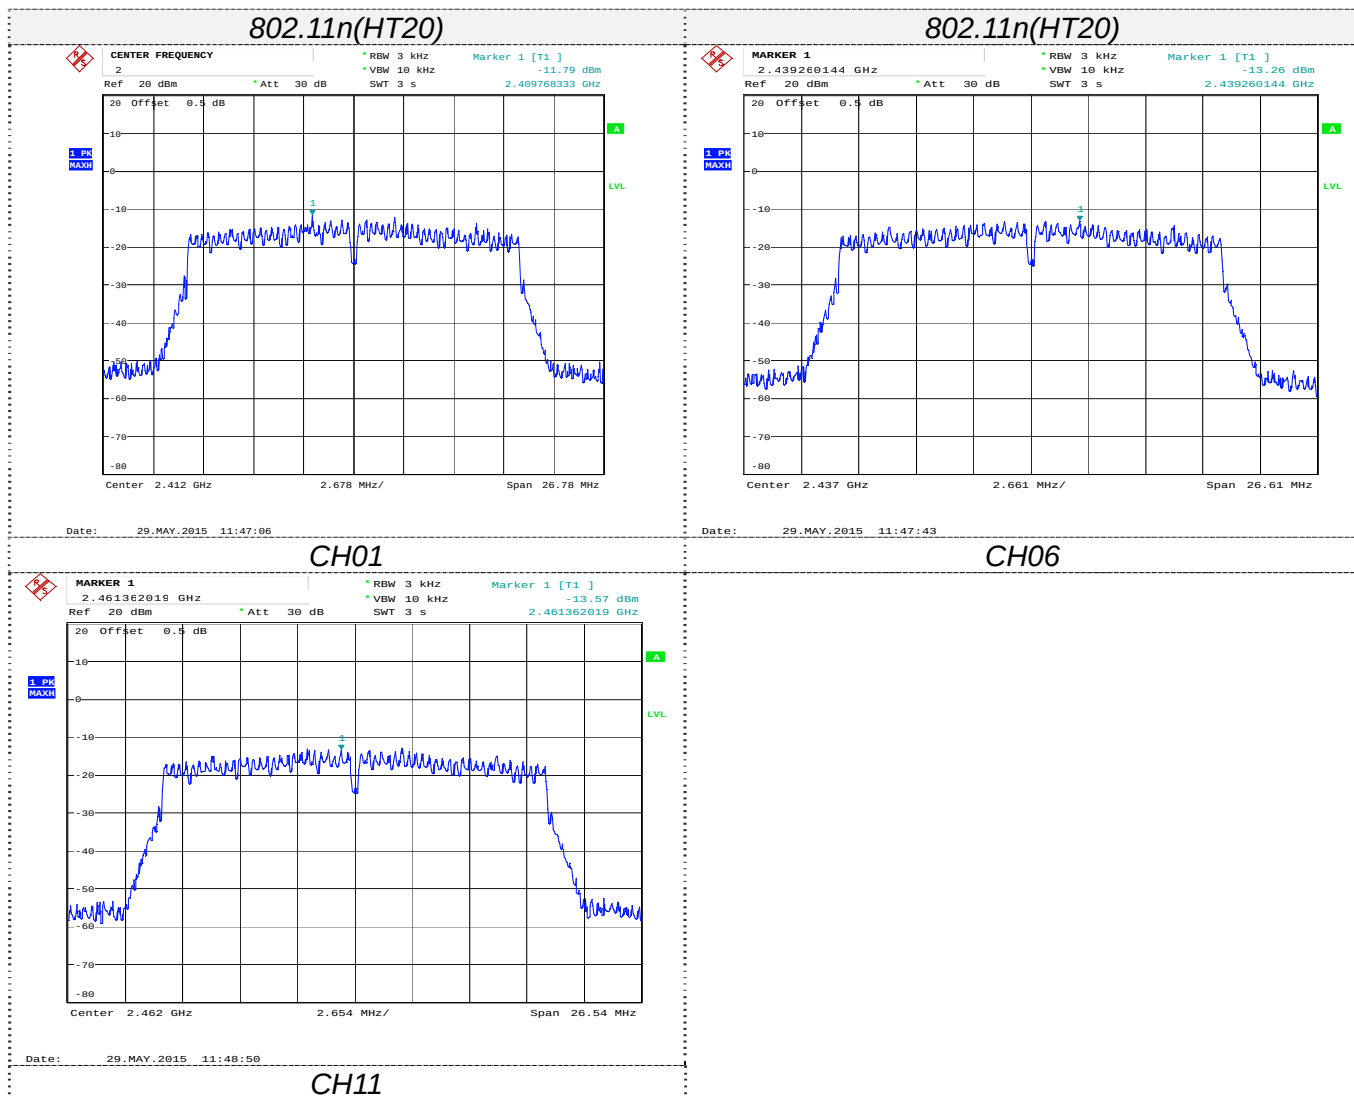

3.5. 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


Test Configuration




Test Results

WIFI				
Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	9.375	≥500	Pass
	06	9.308		
	11	9.240		
802.11g	01	16.49	≥500	Pass
	06	16.49		
	11	16.32		
802.11n(HT20)	01	17.71	≥500	Pass
	06	17.74		
	11	17.69		


Test plot as follows:

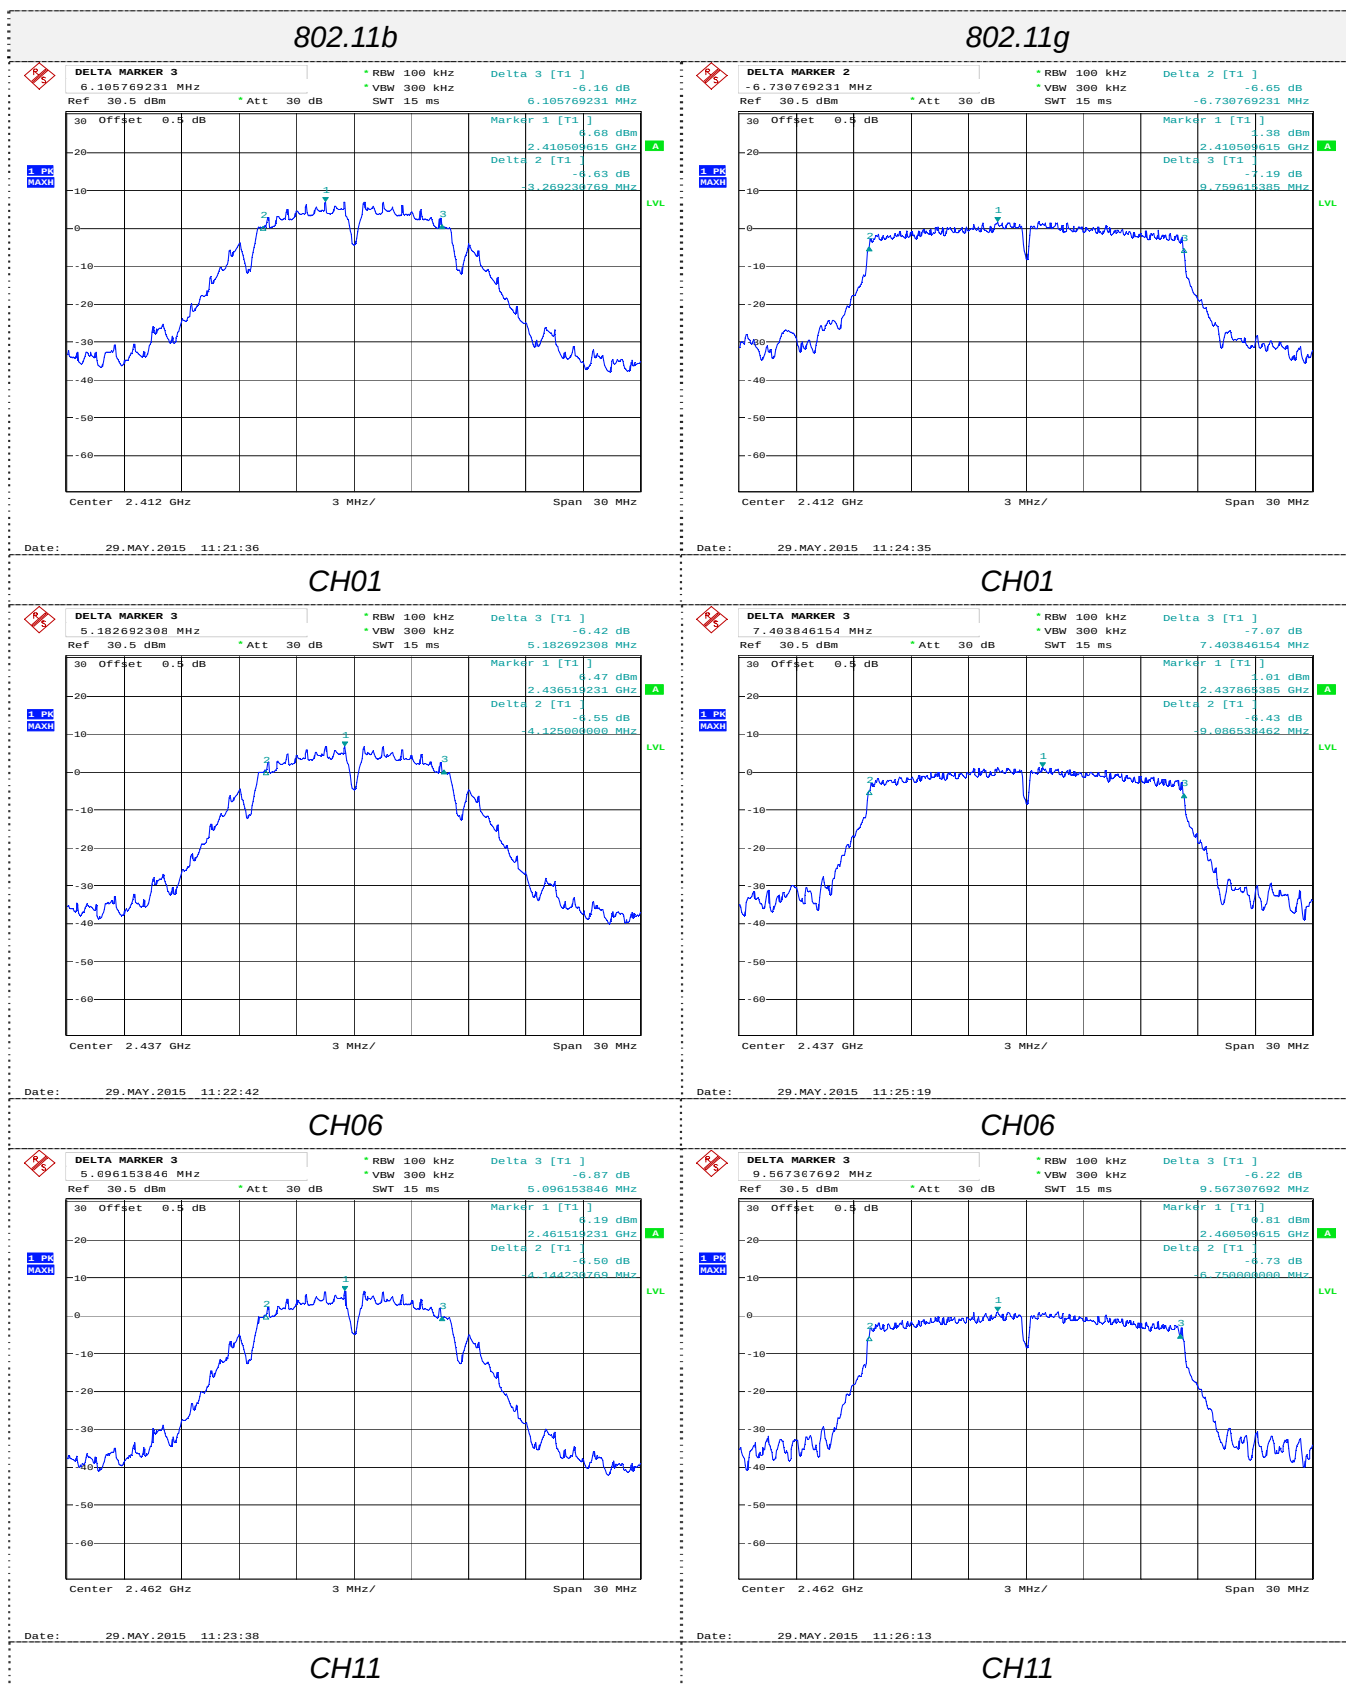

802.11n(HT20)

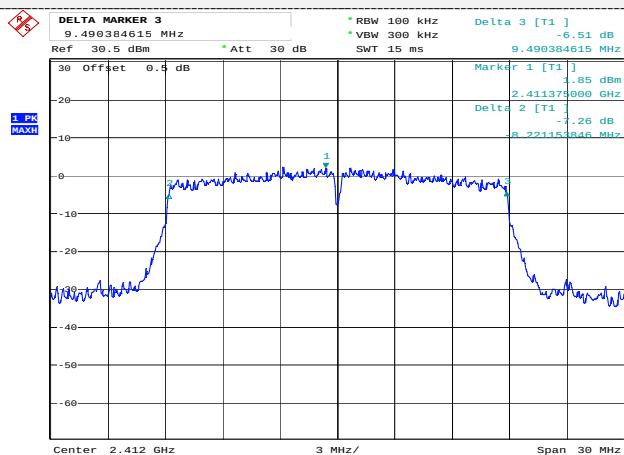


Date: 29.MAY.2015 11:26:51

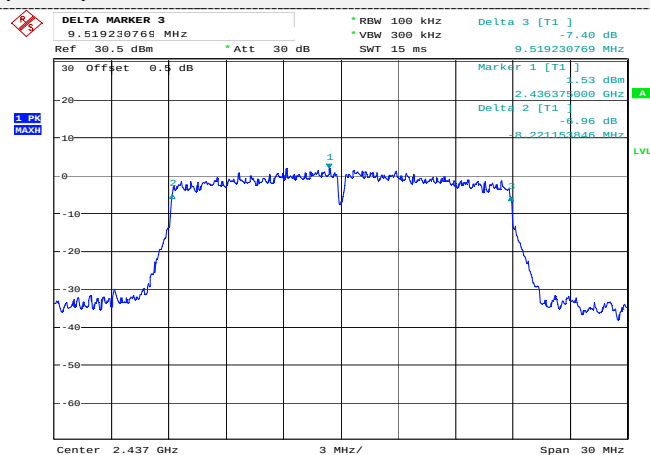

Date: 29.MAY.2015 11:27:41

CH01

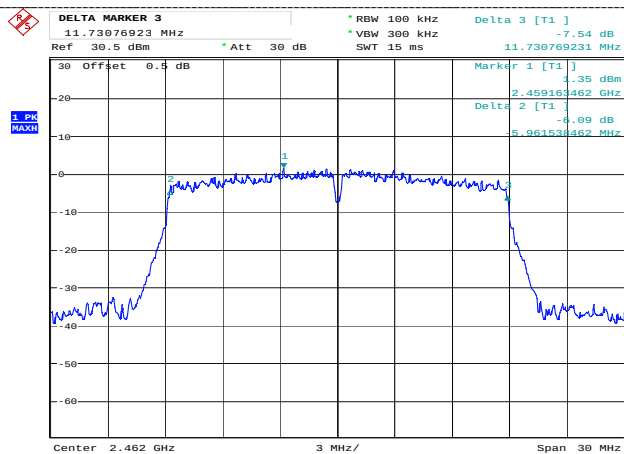

Date: 29.MAY.2015 11:28:39

CH11

CH06

3.6. Band Edge Compliance of RF Emission

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Test Procedure

Test Procedure for conducted method

1. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a spectrum analyzer
2. Turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer RBW =100 kHz and VBW=300 kHz
4. Use spectrum analyzer Maxhold function to allow trace to fully stabilize
5. Marker the highest point which fall into restricted frequency bands
6. Repeat above procedures until all measured frequencies were complete.


Test Procedure for radiated method

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
7. Test the EUT in the lowest channel, the highest channel
8. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
9. Repeat above procedures until all frequencies measured was complete.


Test Results

A. Conducted measurements

802.11b			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2359.535	33.13	20	PASS
2484.056	55.61	20	PASS

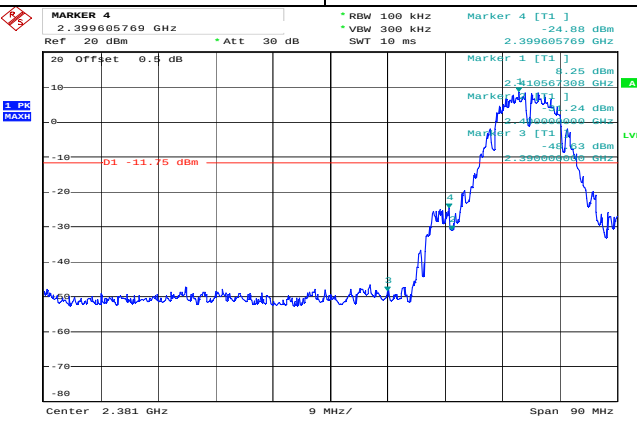


Marker 4 [T1] 2.39965769 GHz -24.88 dBm
Marker 1 [T1] 2.39965769 GHz 8.25 dBm
Marker 2 [T1] 2.39965769 GHz 1.24 dBm
Marker 3 [T1] 2.39965769 GHz -45.63 dBm
D1 -11.75 dBm
Center 2.381 GHz 9 MHz/ Span 90 MHz
Date: 29.MAY.2015 11:53:40

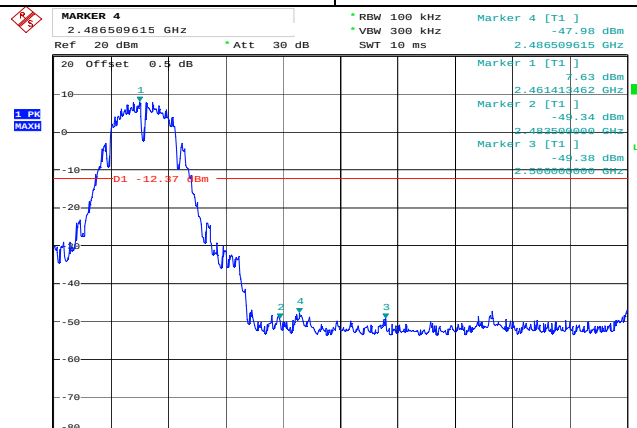


Marker 4 [T1] 2.486599615 GHz -47.98 dBm
Marker 1 [T1] 2.486599615 GHz 7.63 dBm
Marker 2 [T1] 2.486599615 GHz -45.34 dBm
Marker 3 [T1] 2.486599615 GHz -49.38 dBm
D1 -12.37 dBm
Center 2.493 GHz 9 MHz/ Span 90 MHz
Date: 29.MAY.2015 11:55:11

2412	2462
------	------

802.11g			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2389.528	34.48	30	PASS
2485.384	41.38	30	PASS


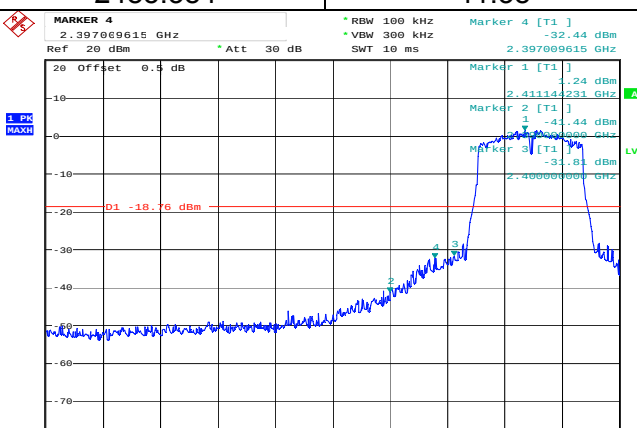


Marker 4 [T1] 2.397099615 GHz -32.44 dBm
Marker 1 [T1] 2.397099615 GHz 1.24 dBm
Marker 2 [T1] 2.397099615 GHz -42.44 dBm
Marker 3 [T1] 2.397099615 GHz -31.81 dBm
D1 -18.76 dBm
Center 2.381 GHz 9 MHz/ Span 90 MHz
Date: 29.MAY.2015 11:56:35

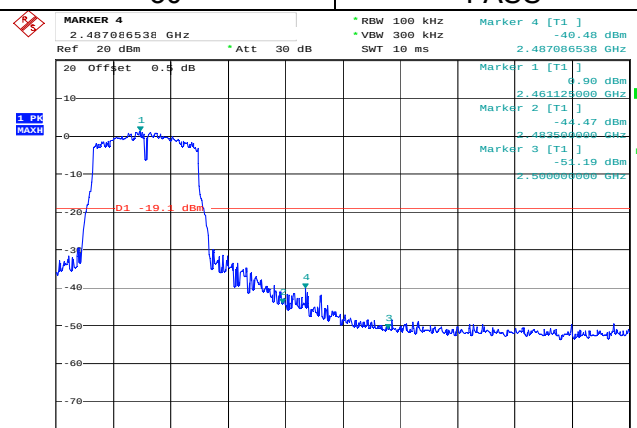

Marker 4 [T1] 2.487099638 GHz -40.48 dBm
Marker 1 [T1] 2.487099638 GHz 4.90 dBm
Marker 2 [T1] 2.487099638 GHz -44.47 dBm
Marker 3 [T1] 2.487099638 GHz -51.19 dBm
D1 -19.1 dBm
Center 2.493 GHz 9 MHz/ Span 90 MHz
Date: 29.MAY.2015 11:57:42

2412	2462
------	------

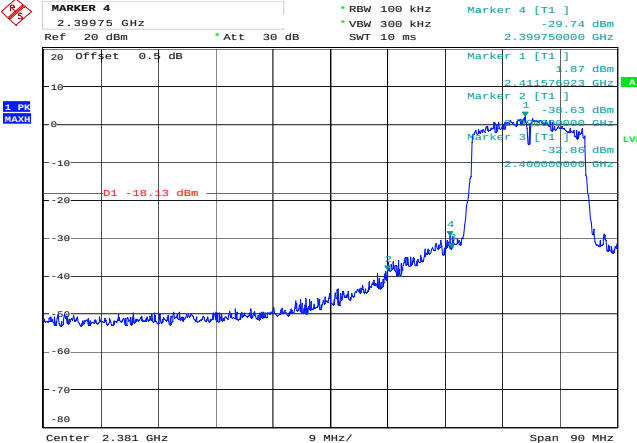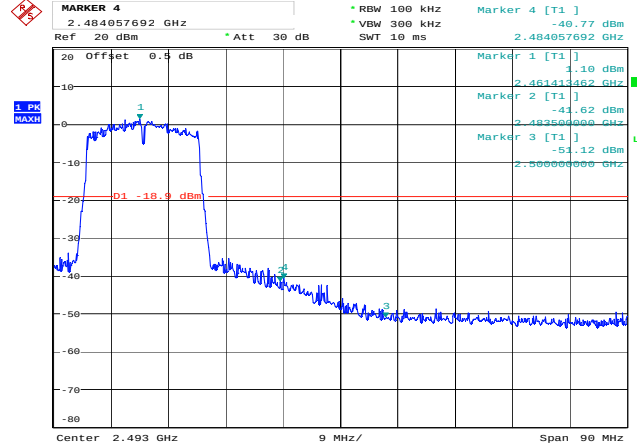802.11n20			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2389.235	31.61	30	PASS
2483.550	41.87	30	PASS
 MARKER 4 2.39975 GHz Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Marker 4 [T1] -29.74 dBm 2.399750000 GHz Marker 1 [T1] -1.87 dBm 2.411574923 GHz Marker 2 [T1] -38.63 dBm 2.423399800 GHz Marker 3 [T1] -32.86 dBm 2.435224677 GHz D1 -18.13 dBm Center 2.381 GHz 9 MHz/ Span 90 MHz Date: 29.MAY.2015 11:59:18		2412	
 MARKER 4 2.484057692 GHz Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Marker 4 [T1] -40.77 dBm 2.484057692 GHz Marker 1 [T1] -1.10 dBm 2.461413462 GHz Marker 2 [T1] -41.62 dBm 2.483560000 GHz Marker 3 [T1] -54.12 dBm 2.506000000 GHz D1 -18.9 dBm Center 2.493 GHz 9 MHz/ Span 90 MHz Date: 29.MAY.2015 12:00:29		2462	

B. Radiated measurements

802.11b

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	63.56	PK	74.00	10.44	1.00	130	68.87	27.49	3.32	36.12	-5.31
2390.00	45.84	AV	54.00	8.16	1.00	130	51.15	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	64.57	PK	74.00	9.43	1.00	45	69.88	27.49	3.32	36.12	-5.31
2390.00	47.47	AV	54.00	6.53	1.00	45	52.78	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	65.65	PK	74.00	8.35	1.00	170	71.37	27.45	3.38	36.55	-5.72
2483.50	46.47	AV	54.00	7.53	1.00	170	52.19	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	63.87	PK	74.00	10.13	1.00	145	69.59	27.45	3.38	36.55	-5.72
2483.50	47.54	AV	54.00	6.46	1.00	145	53.26	27.45	3.38	36.55	-5.72

802.11g

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	67.65	PK	74.00	6.35	1.00	150	72.96	27.49	3.32	36.12	-5.31
2390.00	49.32	AV	54.00	4.68	1.00	150	54.63	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	66.42	PK	74.00	7.58	1.00	48	71.73	27.49	3.32	36.12	-5.31
2390.00	49.35	AV	54.00	4.65	1.00	48	54.66	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	66.42	PK	74.00	7.58	1.00	50	72.14	27.45	3.38	36.55	-5.72
2483.50	50.33	AV	54.00	3.67	1.00	50	56.05	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	63.47	PK	74.00	10.53	1.00	120	69.19	27.45	3.38	36.55	-5.72
2483.50	49.32	AV	54.00	4.68	1.00	120	55.04	27.45	3.38	36.55	-5.72

802.11n20

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	64.25	PK	74.00	9.75	1.00	145	69.56	27.49	3.32	36.12	-5.31
2390.00	49.45	AV	54.00	4.55	1.00	145	54.76	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	65.63	PK	74.00	8.37	1.00	85	70.94	27.49	3.32	36.12	-5.31
2390.00	50.20	AV	54.00	3.80	1.00	85	55.51	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	66.47	PK	74.00	7.53	1.00	120	72.19	27.45	3.38	36.55	-5.72
2483.50	50.18	AV	54.00	3.82	1.00	120	55.90	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	65.53	PK	74.00	8.47	1.00	89	71.25	27.45	3.38	36.55	-5.72
2483.50	50.30	AV	54.00	3.70	1.00	89	56.02	27.45	3.38	36.55	-5.72

3.7. Spurious RF Conducted Emission


Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBM= 300 KHz to measure the peak field strength, and measured frequency range from 30MHz to 26.5GHz.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.


Test plot as follows:

Test Mode:

802.11b


Test channel :

01

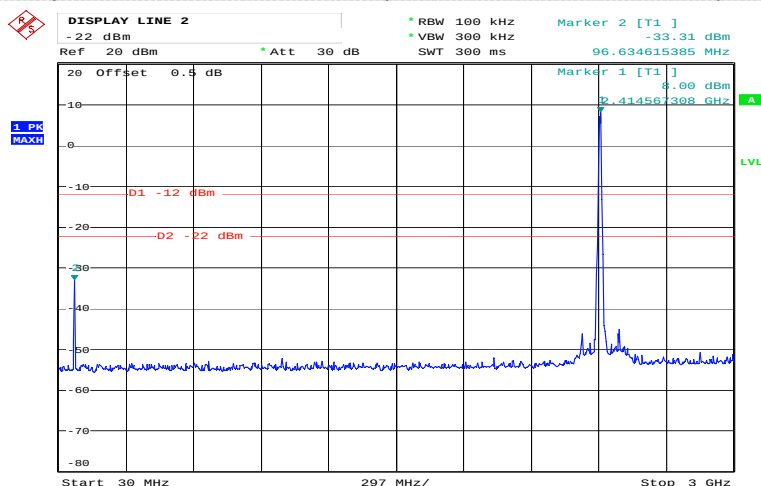


Date: 29.MAY.2015 12:02:27

30MHz~3GHz

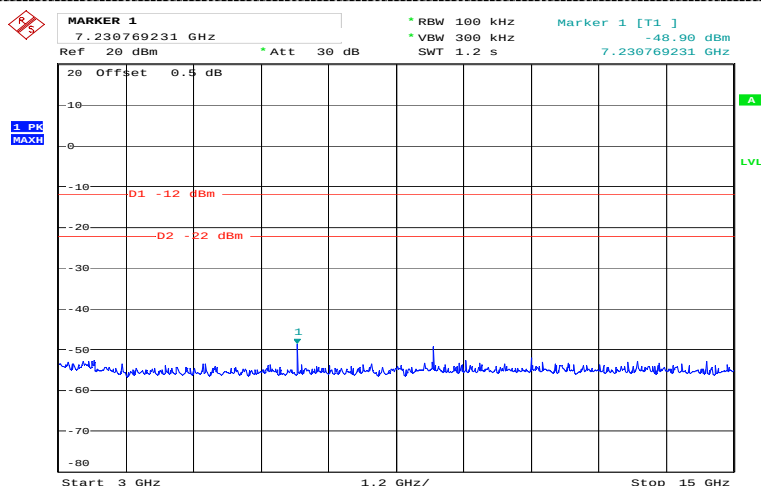

Date: 29.MAY.2015 12:03:37

3GHz~15GHz

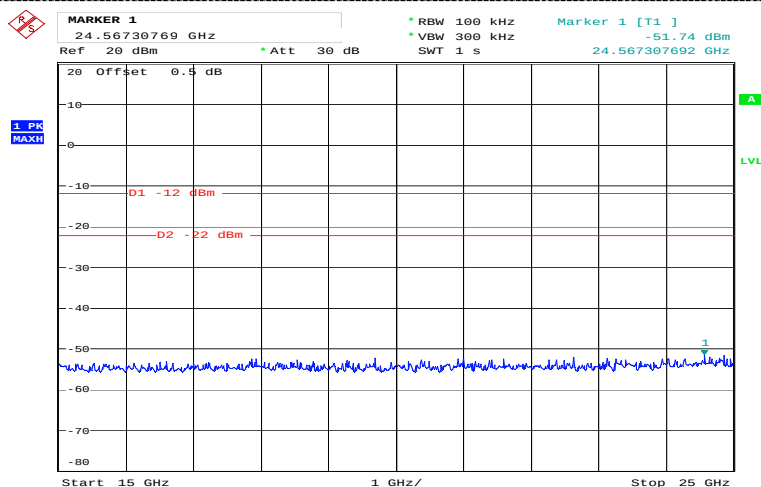

Date: 29.MAY.2015 12:03:57


15GHz~25GHz

Test Mode:

802.11b


Test channel :

06

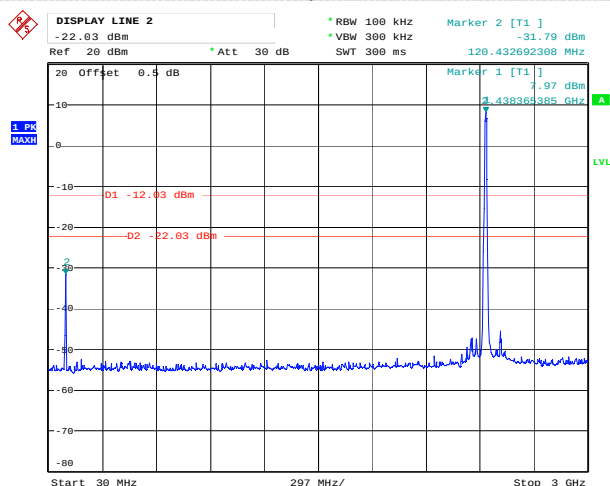


Date: 29.MAY.2015 12:05:24

30MHz~3GHz

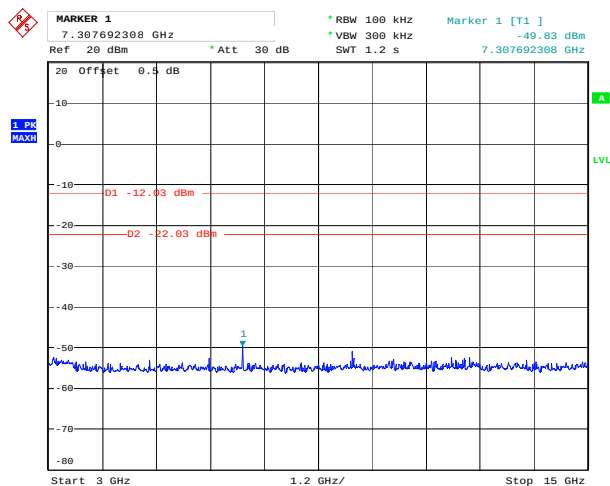

Date: 29.MAY.2015 12:05:54

3GHz~15GHz

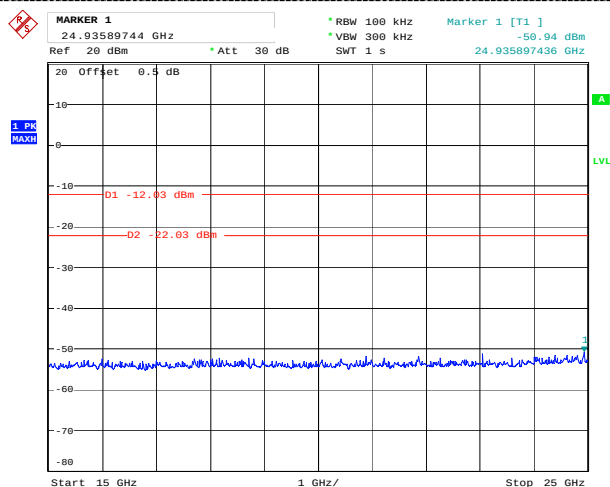

Date: 29.MAY.2015 12:06:34


15GHz~25GHz

Test Mode:

802.11b


Test channel :

11

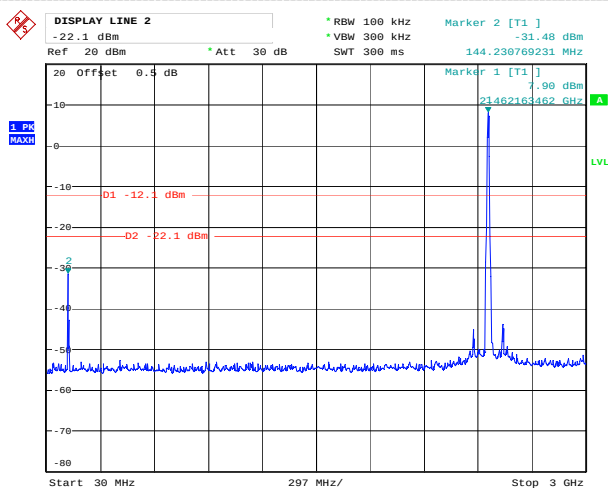


Date: 29.MAY.2015 12:07:20

30MHz~3GHz

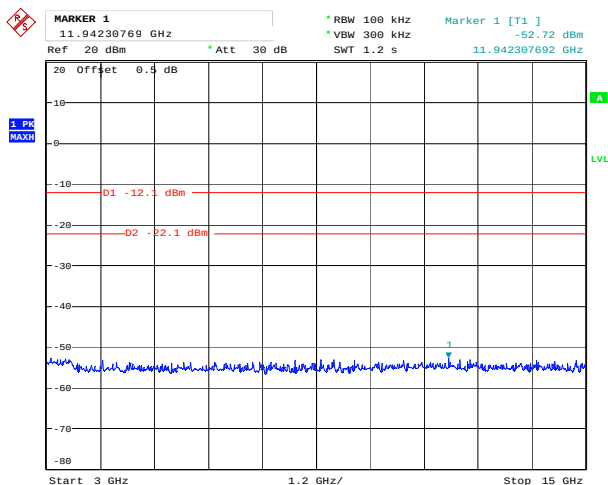

Date: 29.MAY.2015 12:07:42

3GHz~15GHz

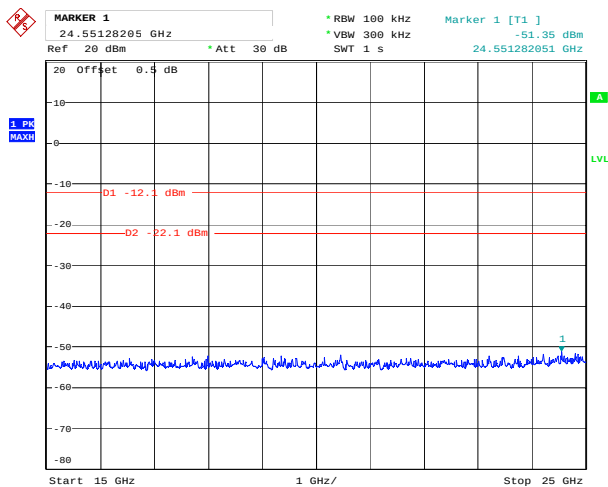

Date: 29.MAY.2015 12:08:00


15GHz~25GHz

Test Mode:

802.11g


Test channel :

01

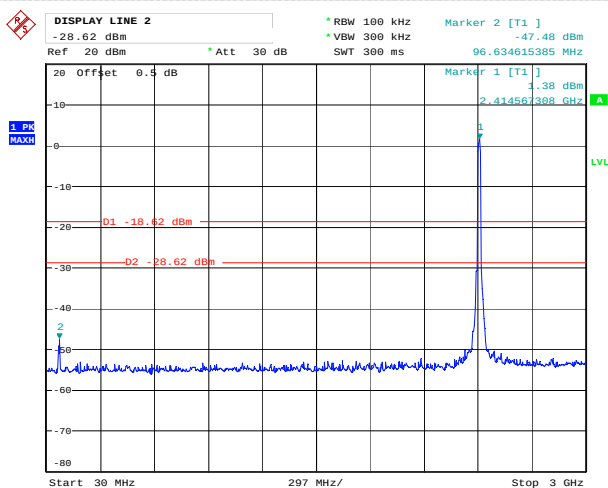


Date: 29.MAY.2015 12:08:57

30MHz~3GHz

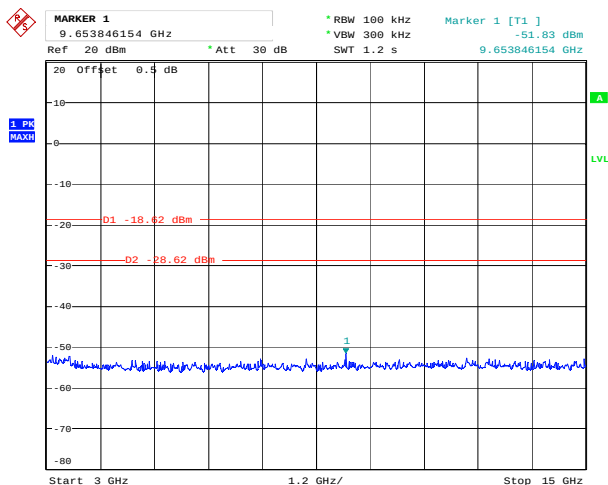

Date: 29.MAY.2015 12:09:28

3GHz~15GHz

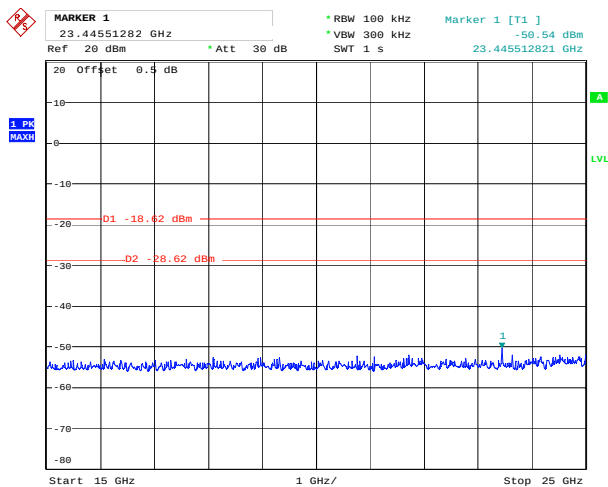

Date: 29.MAY.2015 12:09:41


15GHz~25GHz

Test Mode:

802.11g


Test channel :

06

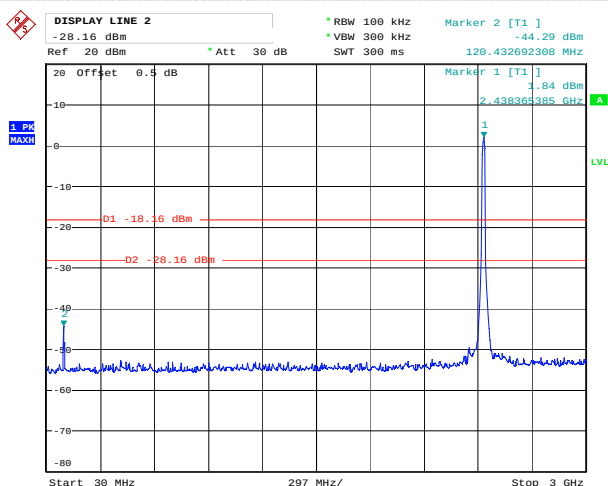


Date: 29.MAY.2015 12:10:38

30MHz~3GHz

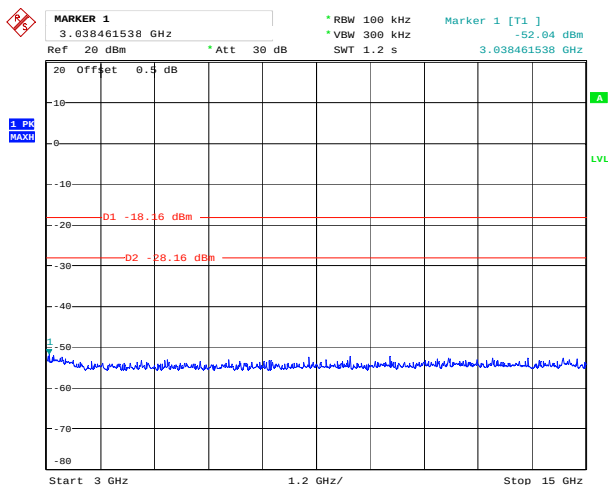

Date: 29.MAY.2015 12:11:15

3GHz~15GHz

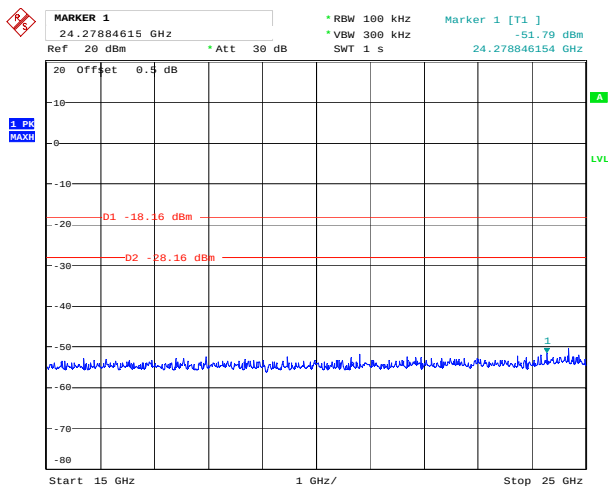

Date: 29.MAY.2015 12:11:37


15GHz~25GHz

Test Mode:

802.11g


Test channel :

11

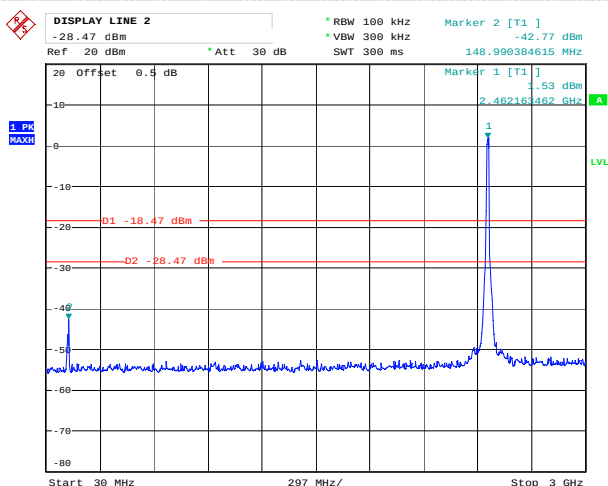


Date: 29.MAY.2015 12:17:44

30MHz~3GHz

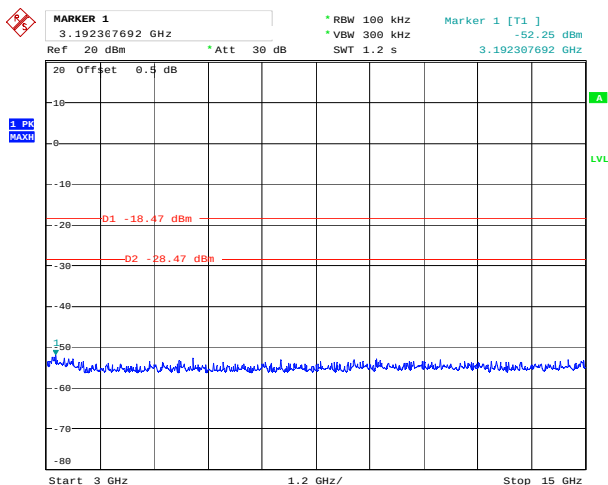

Date: 29.MAY.2015 12:18:13

3GHz~15GHz

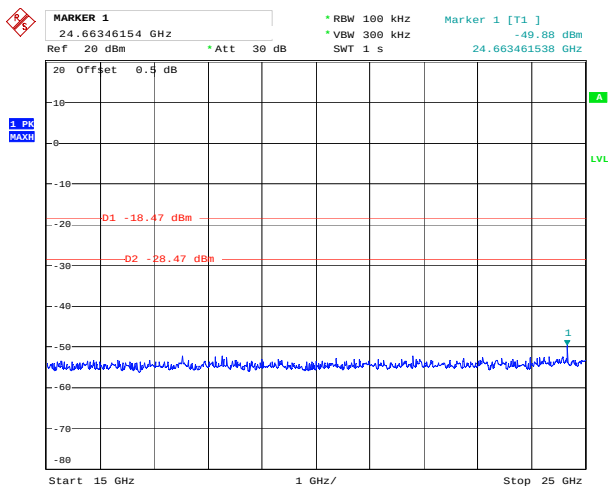

Date: 29.MAY.2015 12:18:28


15GHz~25GHz

Test Mode:

802.11n(HT20)


Test channel :

01

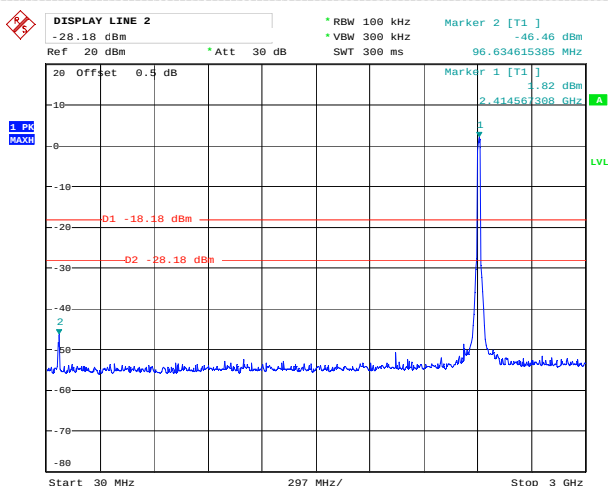


Date: 29.MAY.2015 12:12:39

30MHz~3GHz

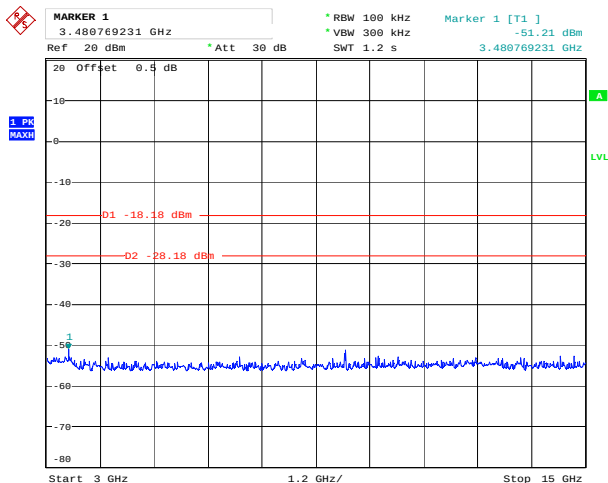

Date: 29.MAY.2015 12:13:11

3GHz~15GHz

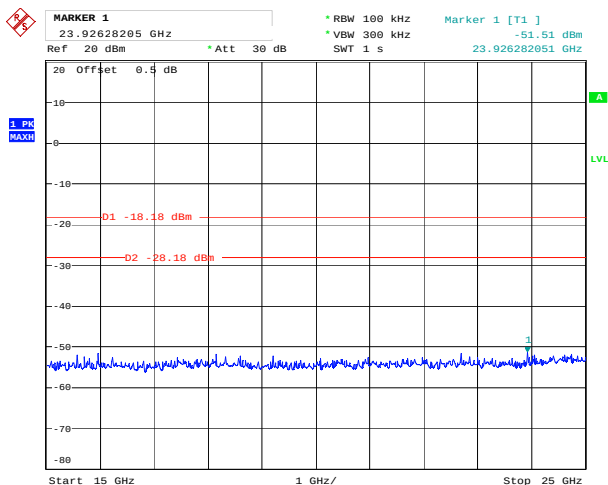

Date: 29.MAY.2015 12:13:35


15GHz~25GHz

Test Mode:

802.11n(HT20)


Test channel :

06

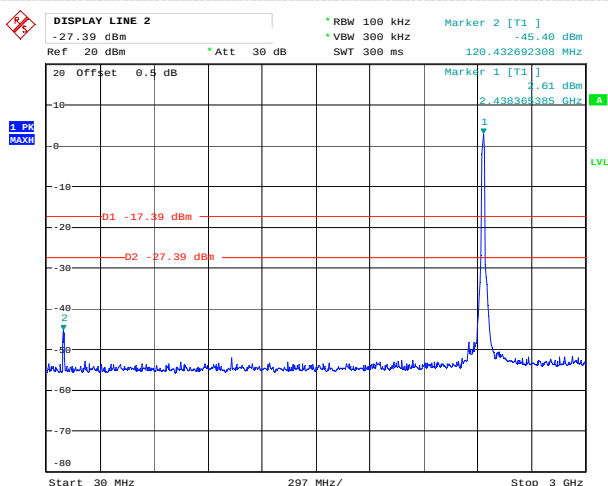


Date: 29.MAY.2015 12:19:44

30MHz~3GHz

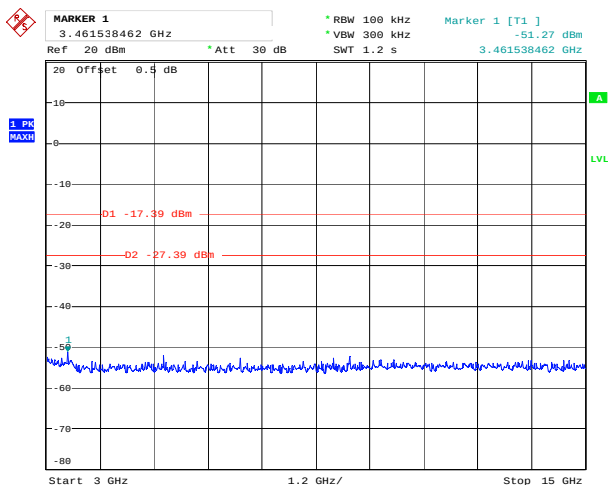

Date: 29.MAY.2015 12:20:07

3GHz~15GHz

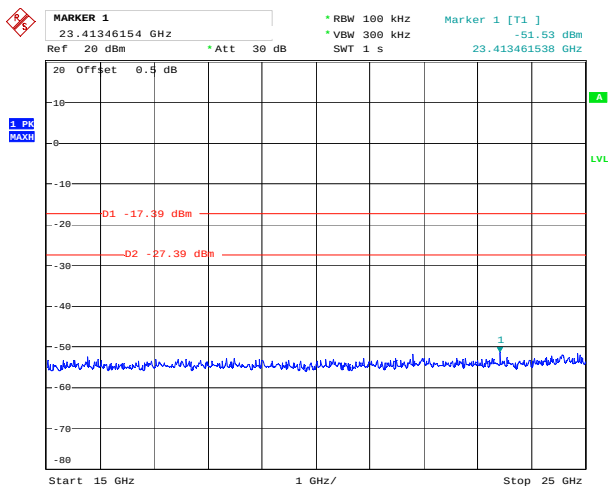

Date: 29.MAY.2015 12:20:27


15GHz~25GHz

Test Mode:

802.11n(HT20)


Test channel :

11

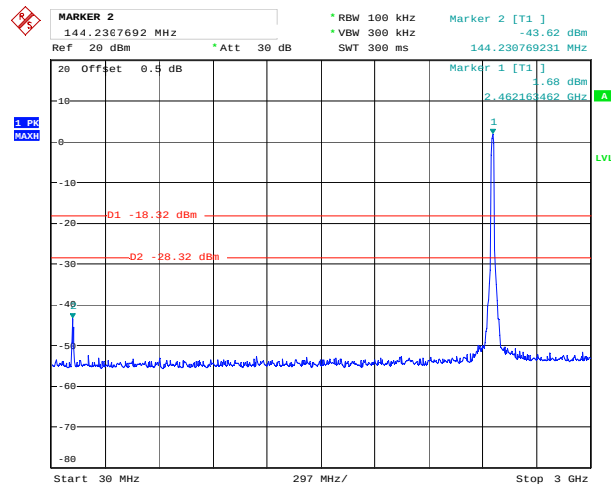


Date: 29.MAY.2015 12:22:01

30MHz~3GHz

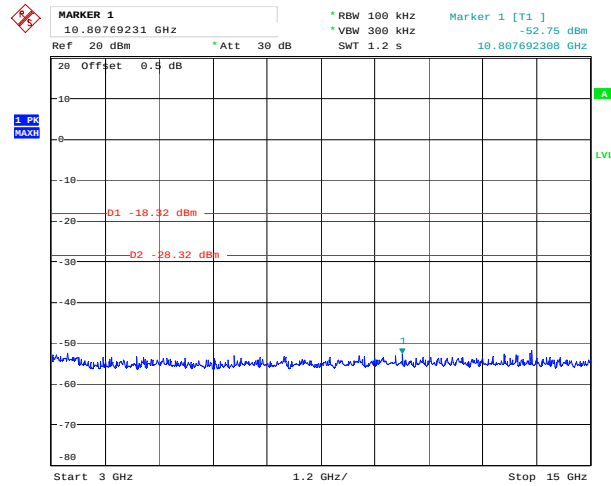

Date: 29.MAY.2015 12:22:36

3GHz~15GHz

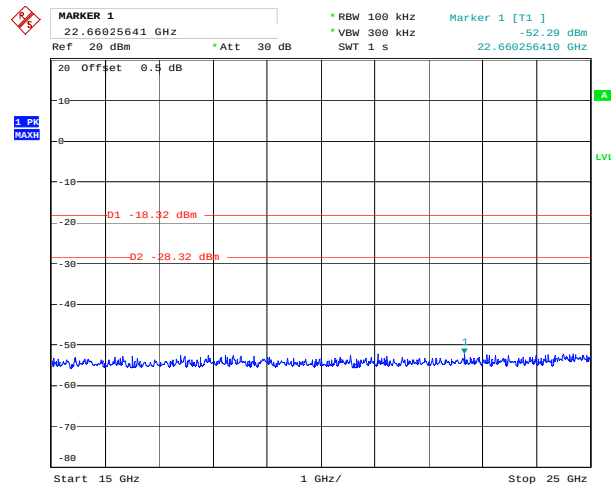

Date: 29.MAY.2015 12:22:56

15GHz~25GHz

3.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:



4. EUT TEST PHOTO

Radiated Emission (30MHz-1GHz)



Radiated Emission (1GHz-25GHz)



Conducted Emission



5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Please reference to the test report No.: GTI20150180F-1

*****THE END*****