



REPORT No. : SZ18080241S04

FCC RF EXPOSURE EVALUATION REPORT

APPLICANT : Flaircomm Microelectronics, Inc.

PRODUCT NAME : Bluetooth Module BT5.0

MODEL NAME : FLC-BTM702IQ2D

BRAND NAME : Flairmicro

FCC ID : P4I-BTM702D

STANDARD(S) : 47CFR 2.1093
KDB 447498

ISSUE DATE : 2018-09-25

Reviewer By: Gan Yueming
Gan Yueming (Reviewer)

Approved By: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Photographs of the EUT	4
1.4. Identification of all used EUT	5
1.5. Applied Reference Documents	5
2. Device Category And RF Exposure Limit	6
3. Measurement of RF Output Power	7
4. RF Exposure Evaluation	8
Annex A General Information	9

Change History		
Issue	Date	Reason for change
1.0	2018-09-25	First edition



1. Technical Information

Note: Provide by manufacturer.

1.1. Applicant and Manufacturer Information

Applicant:	Flaircomm Microelectronics, Inc.
Applicant Address:	7F, Guomai Building, 116 East JiangBin Ave, Fuzhou, Fujian, China
Manufacturer:	Flaircomm Microelectronics, Inc.
Manufacturer Address:	7F, Guomai Building, 116 East JiangBin Ave, Fuzhou, Fujian, China


1.2. Equipment Under Test (EUT) Description

EUT Type:	Bluetooth Module BT5.0
Hardware Version:	V1.0
Software Version:	V1.0
Frequency Bands:	Bluetooth: 2402MHz-2480MHz
Modulation Mode:	Bluetooth (BDR+EDR): GFSK, π/4-DQPSK, 8-DPSK Bluetooth BLE: GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi


This test report is updated from report SZ18080241S03, based on the similarity between before, only the FLC-BTM702IQ2C support aptX and without shielding case, the FLC-BTM702IQ2D support aptX, with shielding case. It is not affect the test result.

1.3. Photographs of the EUT

1. EUT Front View

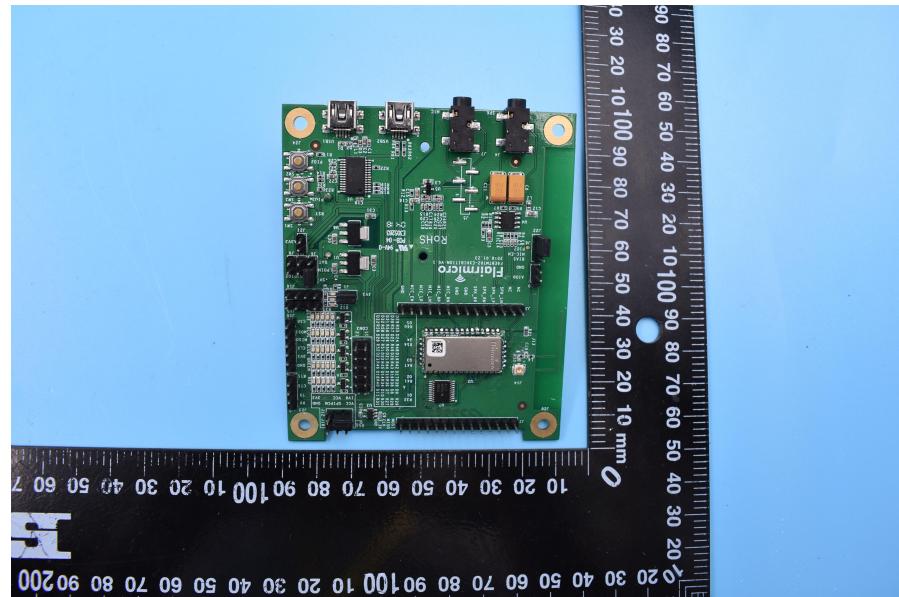

2. EUT Back View

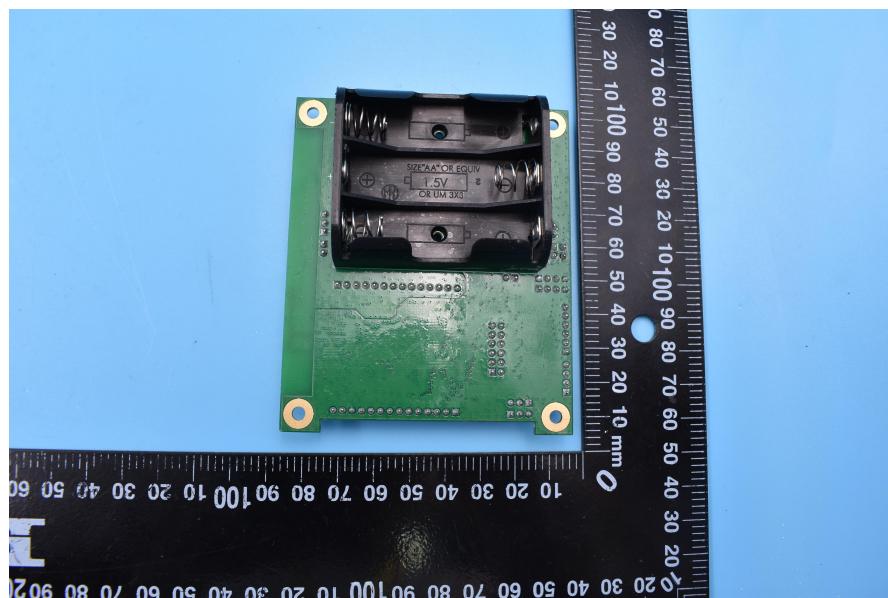



1.4. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	V1.0	V1.0

1.5. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radio Frequency Radiation Exposure Evaluation: portable devices
2	KDB 447498 D01v06	General RF Exposure Guidance



2. Device Category And RF Exposure Limit

Per user manual, this device is a Bluetooth Module BT5.0. Based on 47CFR 2.1093, this device belongs to portable device category with General Population/Uncontrolled exposure.

Portable Devices:

47CFR 2.1093(b)

For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

47CFR 2.1093(d) (2)

Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.



3. Measurement of RF Output Power

1. Bluetooth output Power

Mode	Channel	Frequency (MHz)	Peak power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	6.98	4.78	5.14
	CH 39	2441	8.58	6.61	6.95
	CH 78	2480	8.80	6.72	7.08
Tune-up Limit			9.50	7.50	7.50

Mode	Channel	Frequency (MHz)	Peak power (dBm)	
			GFSK	
LE	CH 00	2402	8.74	
	CH 19	2440	9.76	
	CH 39	2480	10.21	
Tune-up Limit			10.50	

Note: According to KDB 447498, maximum source-based time-average power including tune-up limit will be used for calculating MPE.



4. RF Exposure Evaluation

The device only incorporates a Bluetooth transmitter, so standalone SAR evaluation is required for Bluetooth and simultaneous SAR is not required.

Standalone transmission SAR evaluation

According to KDB 447498 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation Distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$

The maximum tune-up limit power is **11.22mW @ 2.480GHz**

When Bluetooth speaker with rechargeable battery is used on the hand/head, so use **10mm** as the most conservative minimum test separation distance,

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = 1.762 \leq 3.0$

So SAR evaluation is not required for this device.

Note: Declaration of the tune-up limit is 10.50dBm.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

— END OF REPORT —