

## Declaration letter

To: SIEMIC, INC.  
775 Montague Expressway,  
Milpitas, CA 95035  
USA

Dear Sir,

For our business development and marketing requirement, we would like to list different models numbers on the FCC\CE certificates and reports, as following:

Model No.: FLC-WFM301;  
FLC-WFM301IL2B;  
FLC-WFM301VL2B;  
FLC-WFM301CL2B;

The difference between the four models FLC-WFM301、FLC-WFM301IL2B、FLC-WFM301VL2B、FLC-WFM301CL2B is as follows:  
FLC-WFM301 is the main model.

1. FLC-WFM301IL2B is similar to FLC-WFM301. The only difference between them is the model names.
2. FLC-WFM301VL2B and FLC-WFM301CL2B are similar to FLC-WFM301. The only difference between them is the product grade.

Like all the other.

Thank you!


Signature:



Printed name/title: Marvin Zhao/President

## Ordering information

FLC-WFM301XYZA

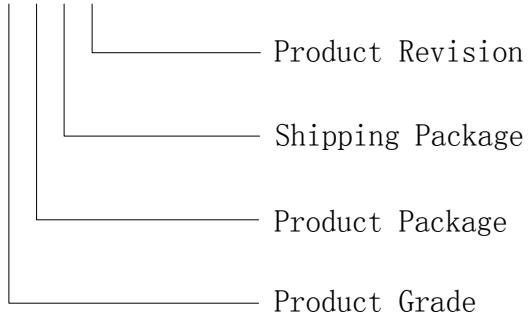

### Ordering Information

Note: Because the name “FLC-WFM301IL2B” is not easy to remember, we take “FLC-WFM301” for short as the main model of the product.

#### 1、Product Revision

Product Revision	Description	Availability
A	With CSR6027	Yes
B	With CSR6030	Yes

#### Product Revision

Note: CSR6030 is the latest product highly integrated with IEEE 802.11b/g/n standard. At present, the sample modules for testing of FCC certificates all use CSR6030 chip.

#### 2、Shipping Package

Shipping Package	Description	Quantity	Availability
0	Foam Tray	—	No
1	Plastic Tray	—	No
2	Tape	1500	Yes

#### Shipping Package

#### 3、Product Package

Product Package	Description	Availability
Q	QFN	No
L	LGA	Yes
B	BGA	No
C	Connector	No

#### Product Package

Fujian Flaircomm Microelectronics, Inc.

Address: 7F, Guomai Building, 116 East JiangBin Ave., Fuzhou, Fujian, P.R.China, 350015

<http://www.flairmicro.com>

#### **4、Product Grade**

<b>Product Grade</b>	<b>Description</b>	<b>Availability</b>
C	Consumer	Yes
I	Industrial	Yes
V	Automobile After-Market	Yes
A	Automobile Before-Market	No

##### **Product Grade**

Note:

- A、 Consumer Grade (C) : Operation temperature range from -20°C to 70°C. Products can be used as common consumer electronics.
- B、 Industrial Grade (I) : Operation temperature range from -40°C to 85°C. Product can be used for industrial applications.
- C、 Automobile After-Market Grade (V) : Operation temperature range from -20°C to 70°C. Product can be used for after-market applications.