

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM130100004101
Page: 1 of 34
FCC ID: P4L00M11201

TEST REPORT

Application No.:	GZEM1301000041RF
Applicant:	Foshan Lanchiya Digital Technology Co., Ltd.
FCC ID:	P4L00M11201
Product Name:	Wireless Bluetooth speaker
Product Description:	Speaker with BT function to transmit and receive audio signal
Model No.:	M1
Trade Mark:	AMETHYST
Standards:	47 CFR PART 15 Subpart C: 2012 section 15.249
Date of Receipt:	2013-01-16
Date of Test:	2013-01-17 to 2013-03-04
Date of Issue:	2013-03-06
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.



Strong Yao
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2013-03-06		Original

Authorized for issue by:			
Tested By	 (Daniel He) / Project Engineer	2013-01-17 to 2013-03-04	Date
Prepared By	 (Daniel He) / Project Engineer	2013-03-05	Date
Checked By	 Strong Yao/ Reviewer	2013-03-06	Date

3 Test Summary

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

4 Contents

1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS.....	4
5 GENERAL INFORMATION	5
5.1 Client Information	5
5.2 General Description of E.U.T	5
5.3 Details of E.U.T	5
5.4 Description of Support Units	5
5.5 Other Information Requested by the Customer	5
5.6 Deviation from Standards	5
5.7 Test Location	6
6 EQUIPMENT USED DURING TEST.....	8
7 TEST RESULTS	9
7.1 E.U.T. Operation.....	9
7.2 Antenna Requirement	11
7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge	12
7.4 Occupied Bandwidth	27
7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz	31

5 General Information

5.1 Client Information

Applicant: Foshan Lanchiya Digital Technology Co., Ltd.
Address of Applicant: No.1 Hongtu Rd., Songxia Ind. Park, Songgang, Nanhai, Foshan, Guangdong, China

5.2 General Description of E.U.T.

Product Name: Wireless bluetooth speaker
Model No.: M1

5.3 Details of E.U.T.

Operating Frequency 2402MHz to 2480MHz
Type of Modulation: GFSK, $(\pi/4)$ DQPSK, 8DPSK
Number of Channels 79
Channel Separation: 1 MHz
Antenna Type PCB Layout
Antenna gain: 3dBi
Power Supply: AC100-240V 50/60Hz
Adaptor: Model: SAW-0901500
Input: AC100-240V 50-60Hz 0.5A
Output: DC 9V 1500mA
Power cord: 1.8 m x 2 wires unscreened DC cable

5.4 Description of Support Units

Description	Manufacturer	Model No.	SN/Certificate NO
NoteBook	IBM	T30	S/N78-3VMLX 06/01
BT test board	SGS EMC	RF 06	RF 07

5.5 Other Information Requested by the Customer

None.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2014-08-30	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2013-06-29	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2013-03-12	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2013-06-01	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2013-12-17	2Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2013-11-27	2Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2013-03-26	2Y
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2013-11-28	2Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2014-07-01	2Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2013-03-12	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2013-03-12	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2013-03-12	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2014-04-07	2Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2014-06-01	3Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-04-27	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0006	DMM	Fluke	73	70681569	2013-11-5	1Y
EMC0007	DMM	Fluke	73	70671122	2013-11-5	1Y

7 Test Results

7.1 E.U.T. Operation

Test Voltage:	AC 120V
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Test frequencies and frequency range:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465	/	/
48	2450	64	2466	/	/

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

7.2 Antenna Requirement


Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is dBi.

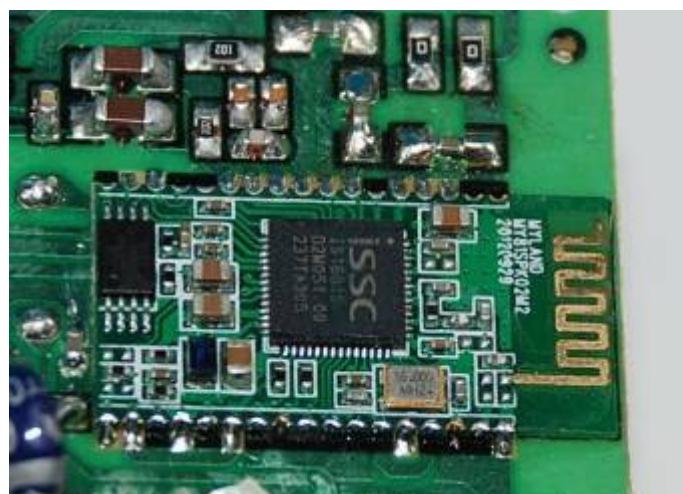

Test result: The unit does meet the FCC requirements.

7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency range is in the frequency band of the EUT is 2402MHz ~ 2480MHz.

The limit for Average field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the fundamental frequency = 114.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB μ V/m for the harmonics = 54.0 dB μ V/m.

The limit for peak field strength dB μ V/m for the harmonics = 74.0 dB μ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB μ V/m in 15.209. Here the limit for the other emission is 54.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental& Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 9 kHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.


3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Test Configuration:


1) 9 kHz to 30 MHz emissions:

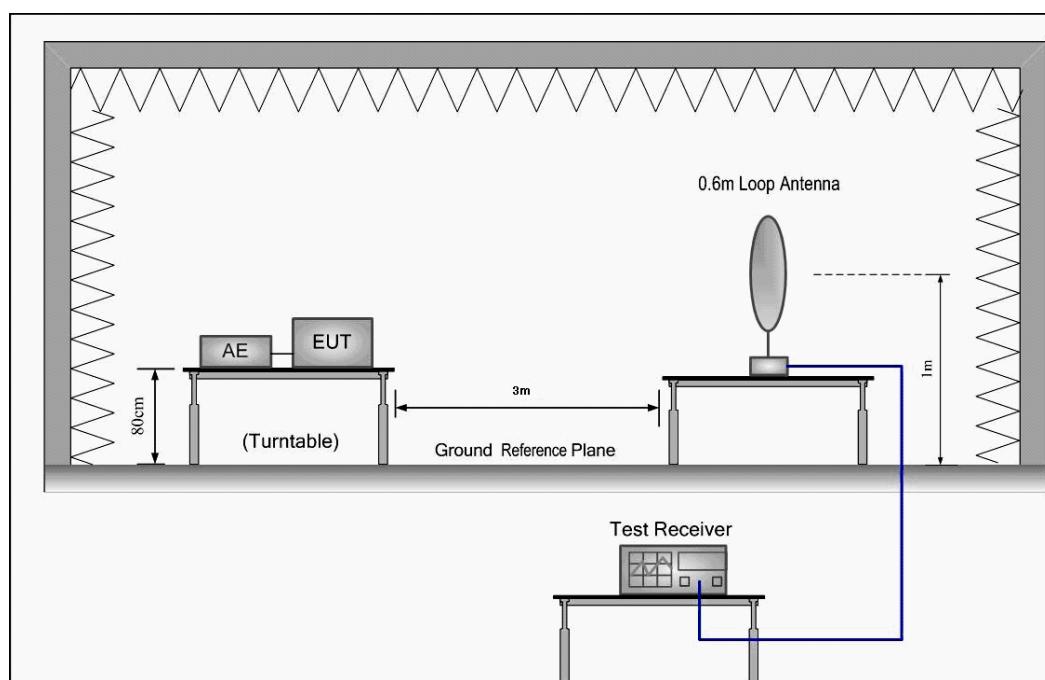

2) 30 MHz to 1 GHz emissions:

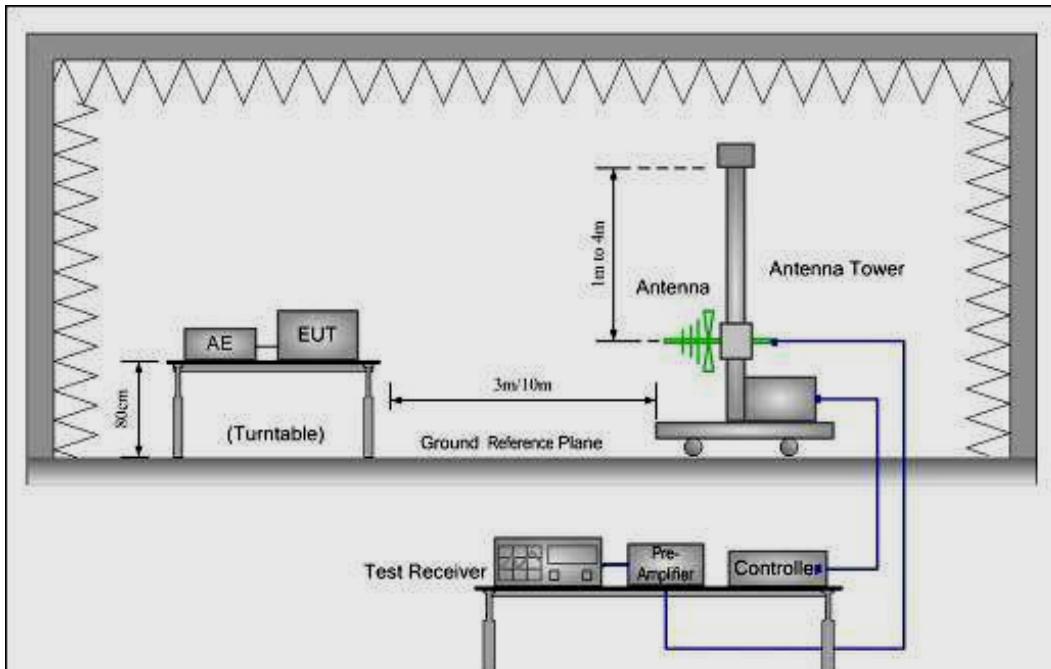

3) 1 GHz to 25 GHz emissions:

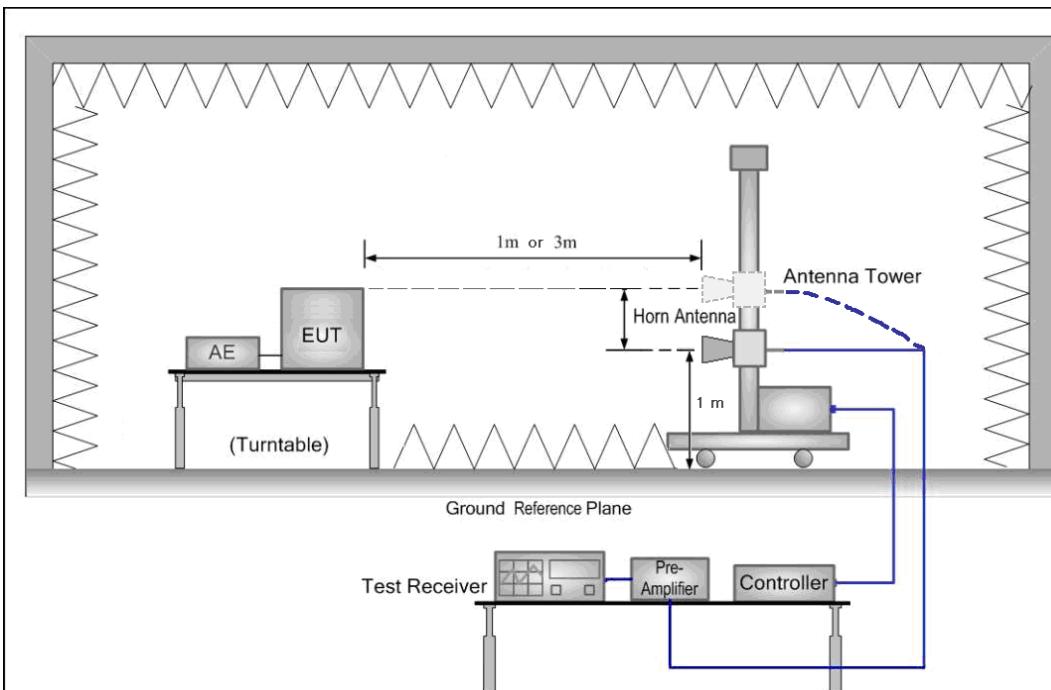

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor

Test at low Channel in transmitting status


9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

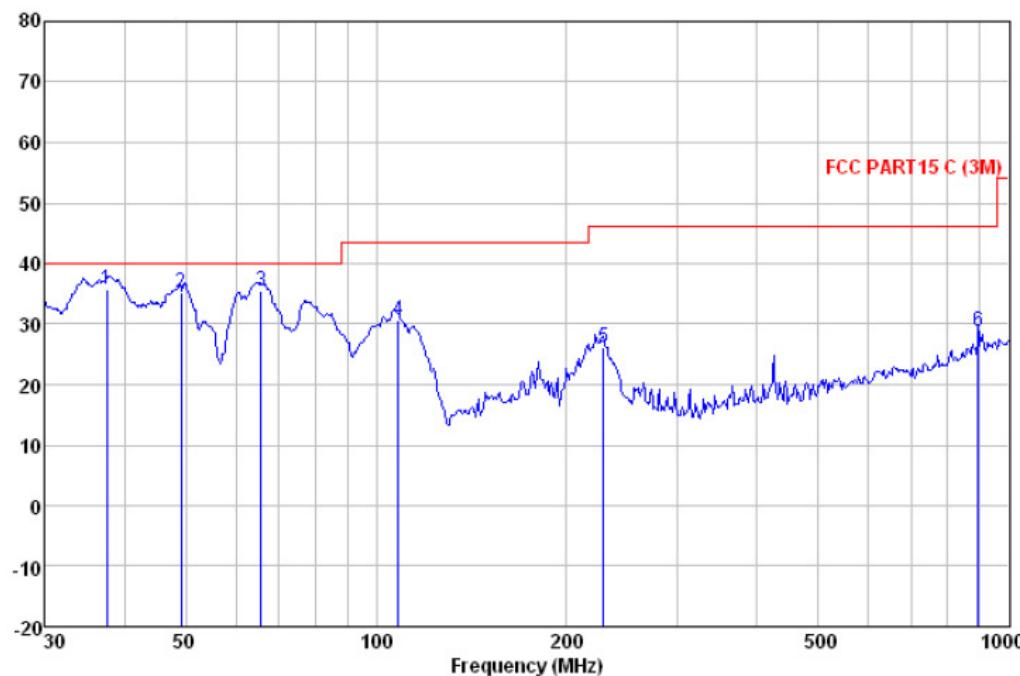
Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Limit Level	Over Line	Over Limit	Remark
	dB μ V	dB/m		dB	dB μ V/m	dB μ V/m	dB	
37.548	51.33	12.96	0.91	29.50	35.70	40.00	-4.30	QP
49.187	50.27	13.31	0.99	29.50	35.07	40.00	-4.93	QP
65.803	53.60	10.30	1.19	29.58	35.51	40.00	-4.49	QP
108.267	46.51	12.39	1.49	29.70	30.69	43.50	-12.81	QP
228.490	41.98	11.57	2.04	29.53	26.06	46.00	-19.94	QP
893.857	31.89	21.05	4.16	28.35	28.75	46.00	-17.25	QP

Horizontal:

Peak scan

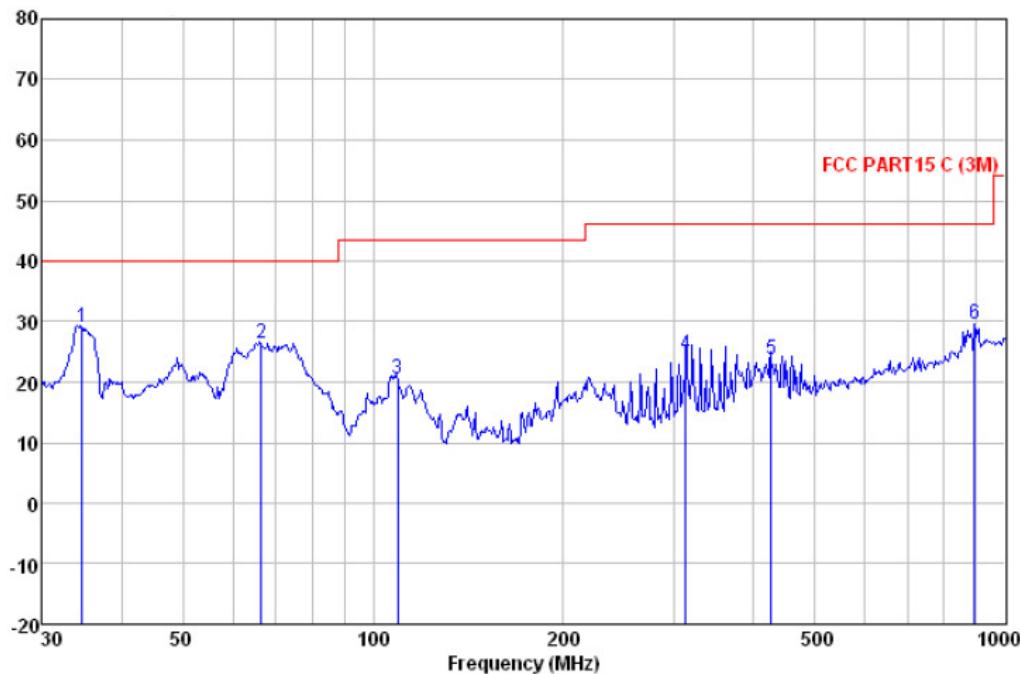Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Limit Level dB	Line dB	Over Line dB	Over Limit dB	Over Limit Remark
	dB μ V	dB/m	dB	dB μ V/m		dB μ V/m	dB μ V/m	dB	
34.639	45.30	12.30	0.88	29.50	28.98	40.00	-11.02	QP	
66.499	44.72	10.02	1.19	29.58	26.35	40.00	-13.65	QP	
109.412	36.44	12.30	1.49	29.70	20.53	43.50	-22.97	QP	
312.179	38.61	13.22	2.40	29.60	24.63	46.00	-21.37	QP	
426.521	35.09	15.50	2.83	29.57	23.85	46.00	-22.15	QP	
893.857	32.73	21.05	4.16	28.35	29.59	46.00	-16.41	QP	

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2402.000	27.58	6.56	49.44	87.75	72.45	114.00	V
4804.000	31.53	11.11	49.30	58.31	51.65	74.00	V
7206.000	36.47	12.90	49.69	50.36	50.04	74.00	V
9608.000	38.08	15.16	49.88	48.19	51.55	74.00	V
2402.000	27.58	6.56	49.44	87.24	71.94	114.00	H
4804.000	31.53	11.11	49.30	58.29	51.63	74.00	H
7206.000	36.47	12.90	49.69	50.16	49.84	74.00	H
9608.000	38.08	15.16	49.88	48.27	51.63	74.00	H

Average Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2402.000	27.58	6.56	49.44	80.24	64.94	94.00	V
4804.000	31.53	11.11	49.30	50.16	43.50	54.00	V
7206.000	36.47	12.90	49.69	43.34	43.02	54.00	V
9608.000	38.08	15.16	49.88	40.39	43.75	54.00	V
2402.000	27.58	6.56	49.44	79.68	64.38	94.00	H
4804.000	31.53	11.11	49.30	50.48	43.82	54.00	H
7206.000	36.47	12.90	49.69	40.64	40.32	54.00	H
9608.000	38.08	15.16	49.88	40.38	43.74	54.00	H

Band Edge:

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	55.84	40.54	74.00	V
2483.50	27.55	6.99	49.42	56.69	41.81	74.00	V
2400.00	27.58	6.56	49.44	55.35	40.05	74.00	H
2483.50	27.55	6.99	49.42	55.38	40.50	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	47.29	31.99	54.00	V
2483.50	27.55	6.99	49.42	48.35	33.47	54.00	V
2400.00	27.58	6.56	49.44	45.64	30.34	54.00	H
2483.50	27.55	6.99	49.42	47.37	32.49	54.00	H


Test at middle Channel in transmitting status**9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

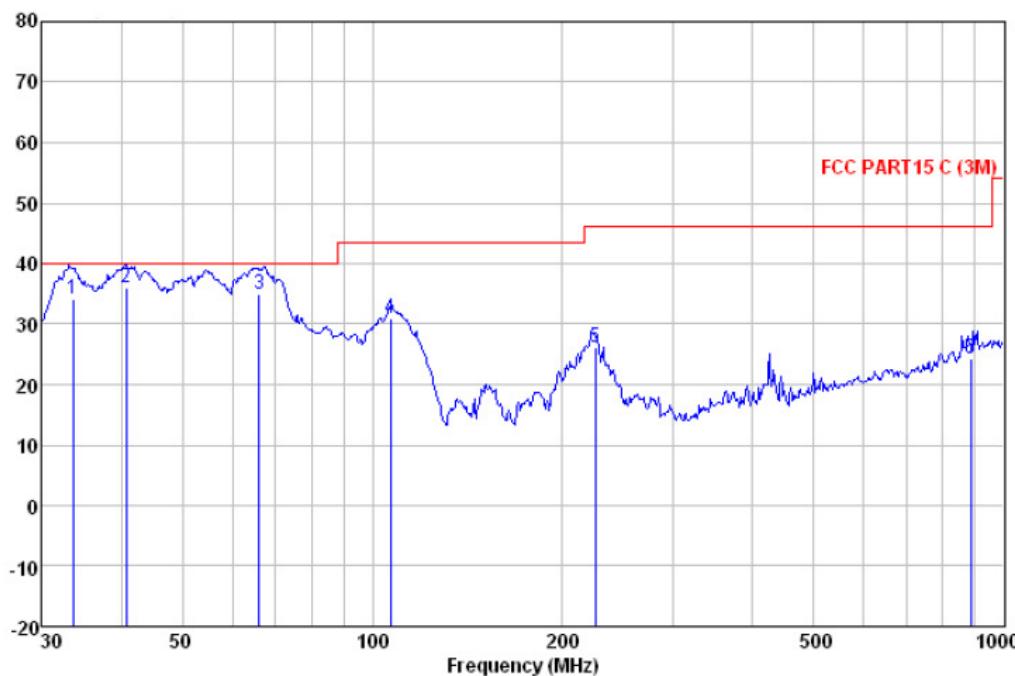
Level (dB μ V/m)

Quasi-peak measurement

Read Freq	Antenna Level	Cable Factor	Preamp Loss Factor	Limit Level	Over Line	Over Limit	Remark
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB
33.562	50.48	12.31	0.87	29.50	34.16	40.00	-5.84 QP
40.702	50.99	13.58	0.94	29.50	36.01	40.00	-3.99 QP
66.266	53.19	10.16	1.19	29.58	34.96	40.00	-5.04 QP
106.759	46.68	12.54	1.48	29.70	31.00	43.50	-12.50 QP
225.308	42.23	11.41	2.02	29.53	26.13	46.00	-19.87 QP
884.503	27.66	20.96	4.12	28.43	24.31	46.00	-21.69 QP

Horizontal:

Peak scan

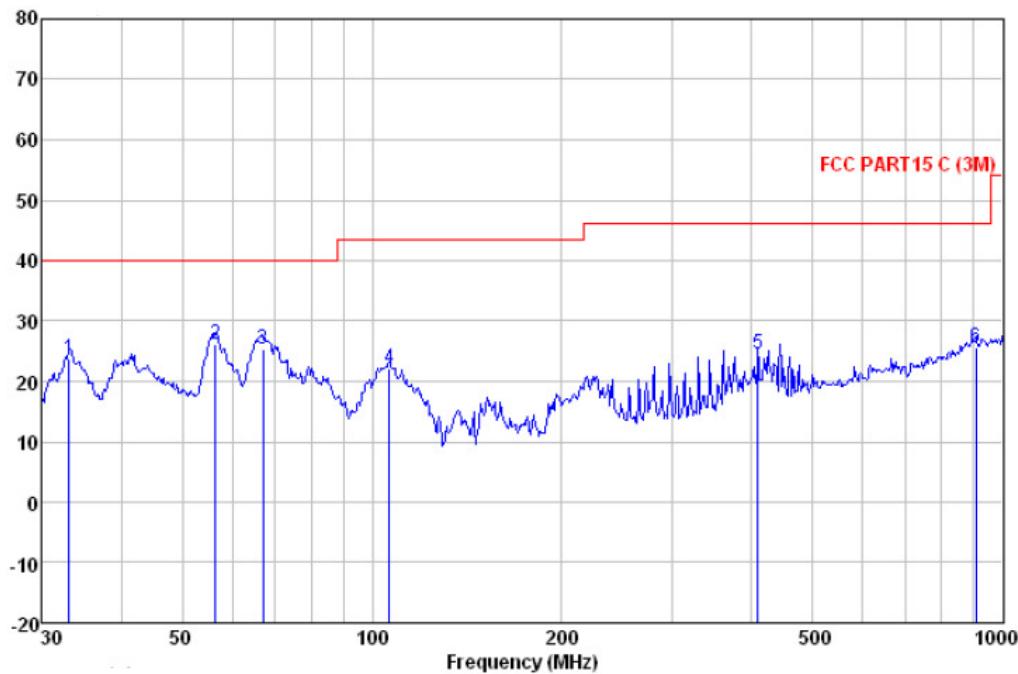Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Limit Level	Over Line	Over Limit	Over Remark
	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
33.095	40.04	12.31	0.86	29.50	23.71	40.00	-16.29	QP
56.395	41.58	12.93	1.08	29.53	26.06	40.00	-13.94	QP
67.202	44.09	9.75	1.20	29.59	25.45	40.00	-14.55	QP
106.385	37.82	12.59	1.47	29.70	22.18	43.50	-21.32	QP
408.946	36.14	15.27	2.75	29.59	24.57	46.00	-21.43	QP
906.482	28.41	21.15	4.18	28.24	25.50	46.00	-20.50	QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2441.000	27.57	6.81	49.43	87.69	72.64	114.00	V
4882.000	31.58	11.26	49.30	58.24	51.78	74.00	V
7323.000	36.50	13.28	49.71	50.39	50.46	74.00	V
9764.000	38.46	15.05	49.89	48.02	51.64	74.00	V
2441.000	27.57	6.81	49.43	87.31	72.26	114.00	H
4882.000	31.58	11.26	49.30	58.38	51.92	74.00	H
7323.000	36.50	13.28	49.71	50.09	50.16	74.00	H
9764.000	38.46	15.05	49.89	48.37	51.99	74.00	H

Average Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2441.000	27.57	6.81	49.43	80.35	65.30	94.00	V
4882.000	31.58	11.26	49.30	50.09	43.63	54.00	V
7323.000	36.50	13.28	49.71	43.32	43.39	54.00	V
9764.000	38.46	15.05	49.89	40.29	43.91	54.00	V
2441.000	27.57	6.81	49.43	79.35	64.30	94.00	H
4882.000	31.58	11.26	49.30	50.42	43.96	54.00	H
7323.000	36.50	13.28	49.71	40.61	40.68	54.00	H
9764.000	38.46	15.05	49.89	40.23	43.85	54.00	H

Band Edge:

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	55.21	39.91	74.00	V
2483.50	27.55	6.99	49.42	56.38	41.50	74.00	V
2400.00	27.58	6.56	49.44	55.67	40.37	74.00	H
2483.50	27.55	6.99	49.42	55.89	41.01	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	48.34	33.04	54.00	V
2483.50	27.55	6.99	49.42	49.25	34.37	54.00	V
2400.00	27.58	6.56	49.44	48.39	33.09	54.00	H
2483.50	27.55	6.99	49.42	48.42	33.54	54.00	H


Test at high Channel in transmitting status**9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

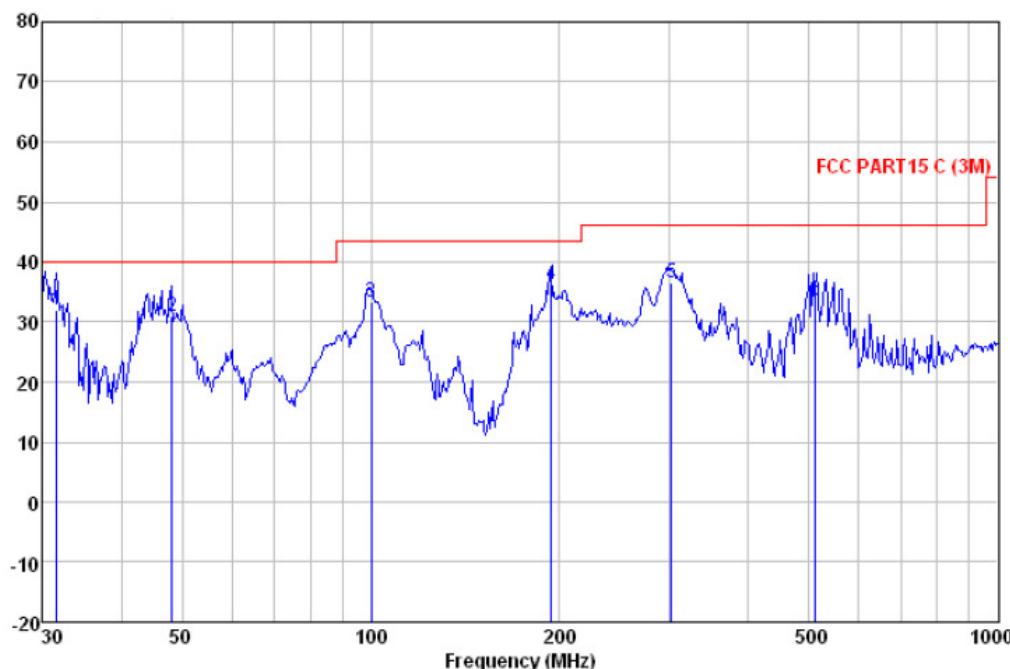
Level (dB μ V/m)

Quasi-peak measurement

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Over	
	Level	Factor	Loss	Factor				Remark
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
31.589	48.45	12.32	0.85	29.50	32.12	40.00	-7.88	QP
48.163	46.18	13.36	0.99	29.50	31.03	40.00	-8.97	QP
100.229	48.60	13.11	1.43	29.70	33.44	43.50	-10.06	QP
193.773	53.30	10.56	1.86	29.52	36.20	43.50	-7.30	QP
301.422	50.72	13.08	2.35	29.60	36.55	46.00	-9.45	QP
511.835	43.19	16.84	3.09	29.49	33.63	46.00	-12.37	QP

Horizontal:

Peak scan

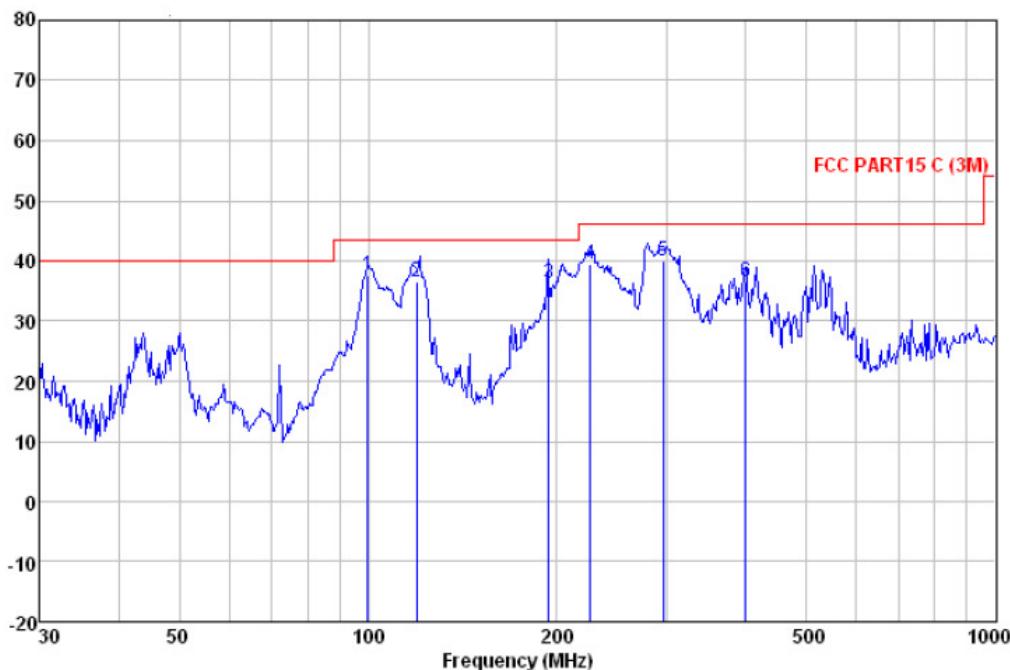Level (dB μ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB
99.878	52.71	13.16	1.43	29.70	37.60	43.50	-5.90 QP
119.436	54.20	10.58	1.55	29.70	36.63	43.50	-6.87 QP
193.773	53.27	10.56	1.86	29.52	36.17	43.50	-7.33 QP
226.099	55.37	11.46	2.03	29.53	39.33	46.00	-6.67 QP
295.147	54.29	12.95	2.33	29.60	39.97	46.00	-6.03 QP
399.030	48.25	15.06	2.71	29.60	36.42	46.00	-9.58 QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.**Peak & Average Measurement**

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2480.000	27.56	6.98	49.42	87.82	72.94	114.00	V
4960.000	31.70	11.39	49.30	58.34	52.13	74.00	V
7440.000	36.60	13.60	49.72	50.21	50.69	74.00	V
9920.000	38.65	14.92	49.90	48.09	51.76	74.00	V
2480.000	27.56	6.98	49.42	86.48	71.60	114.00	H
4960.000	31.70	11.39	49.30	58.29	52.08	74.00	H
7440.000	36.60	13.60	49.72	50.35	50.83	74.00	H
9920.000	38.65	14.92	49.90	48.46	52.13	74.00	H

Average Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2480.000	27.56	6.98	49.42	80.16	65.28	94.00	V
4960.000	31.70	11.39	49.30	49.96	43.75	54.00	V
7440.000	36.60	13.60	49.72	43.64	44.12	54.00	V
9920.000	38.65	14.92	49.90	40.59	44.26	54.00	V
2480.000	27.56	6.98	49.42	78.64	63.76	94.00	H
4960.000	31.70	11.39	49.30	50.35	44.14	54.00	H
7440.000	36.60	13.60	49.72	40.46	40.94	54.00	H
9920.000	38.65	14.92	49.90	40.21	43.88	54.00	H

Band Edge:

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	54.39	39.09	74.00	V
2483.50	27.55	6.99	49.42	55.23	40.35	74.00	V
2400.00	27.58	6.56	49.44	55.64	40.34	74.00	H
2483.50	27.55	6.99	49.42	55.42	40.54	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	27.58	6.56	49.44	48.23	32.93	54.00	V
2483.50	27.55	6.99	49.42	48.48	33.60	54.00	V
2400.00	27.58	6.56	49.44	47.62	32.32	54.00	H
2483.50	27.55	6.99	49.42	47.47	32.59	54.00	H

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.249

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


Test Method: ANSI C63.10: Clause 6.9.1

Operation within the band 2.400 to 2.4835 GHz


Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.

1. Test in the lowest frequency 2.402 GHz

Normal mode:

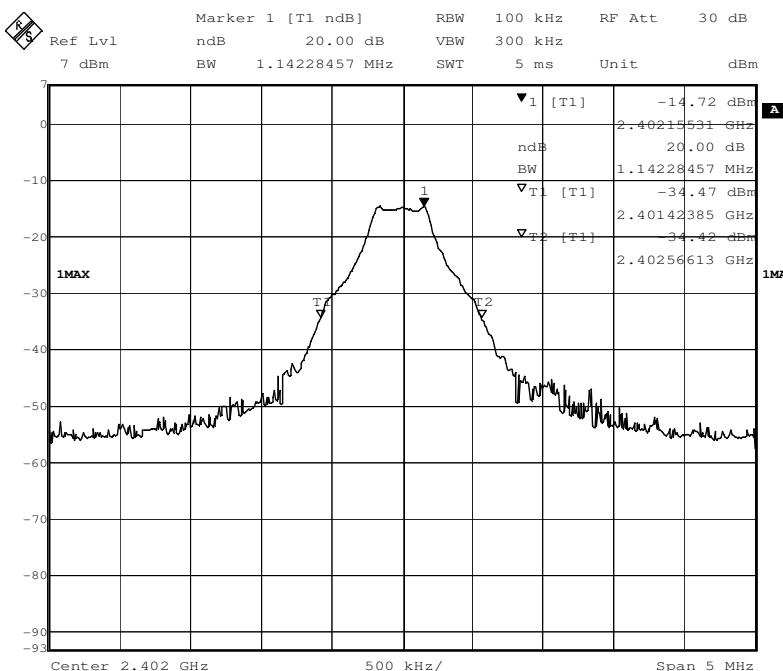


EDR mode:

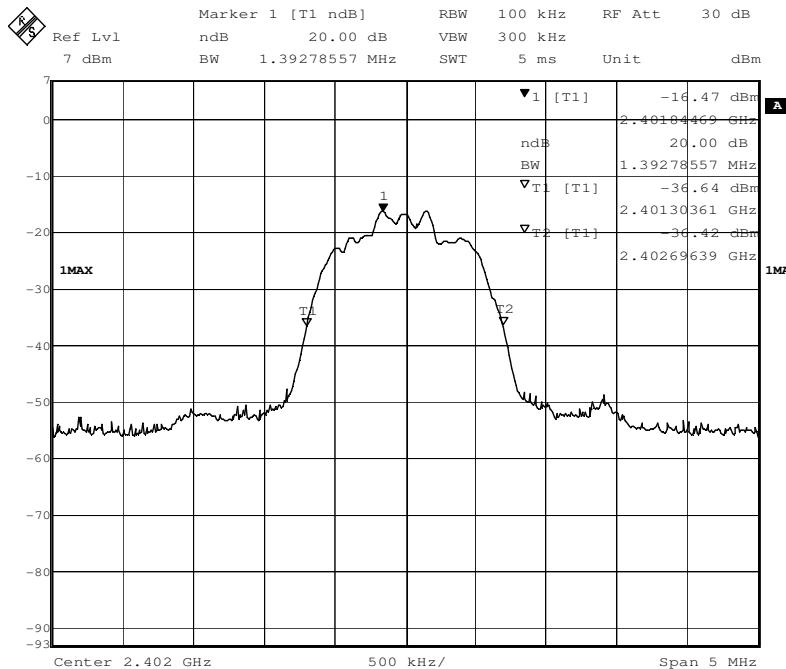


2. Test in the middle frequency 2.441GHz

Normal mode:

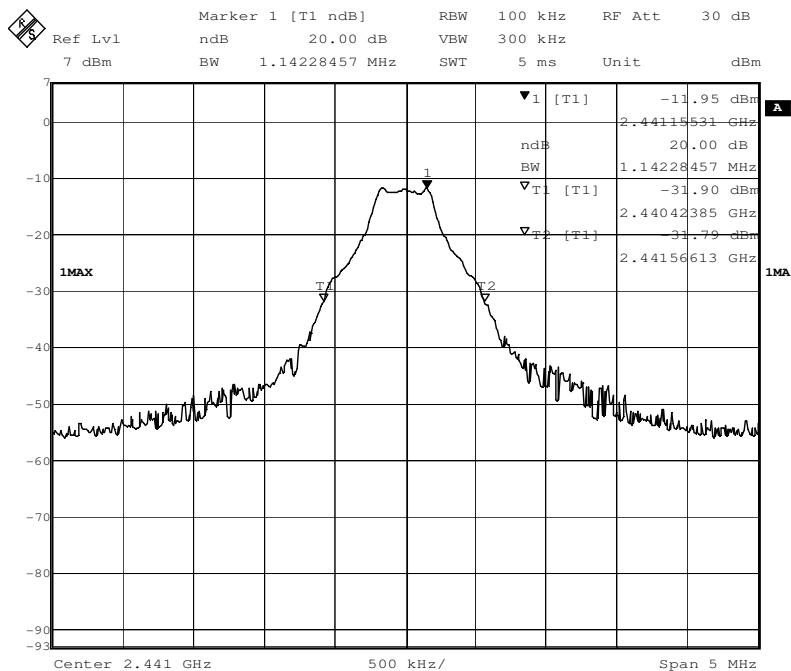


EDR mode:

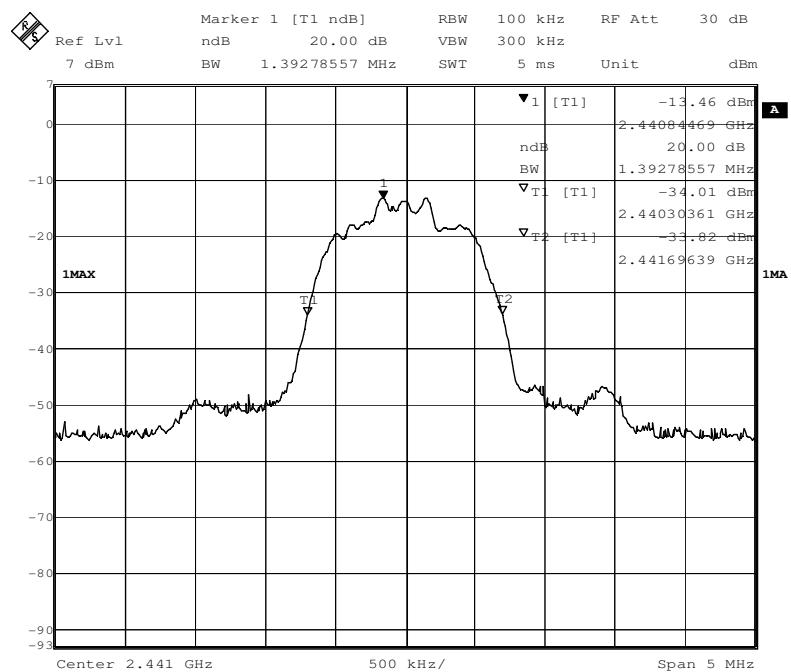


3. Test in the highest frequency 2.480GHz

Normal mode:

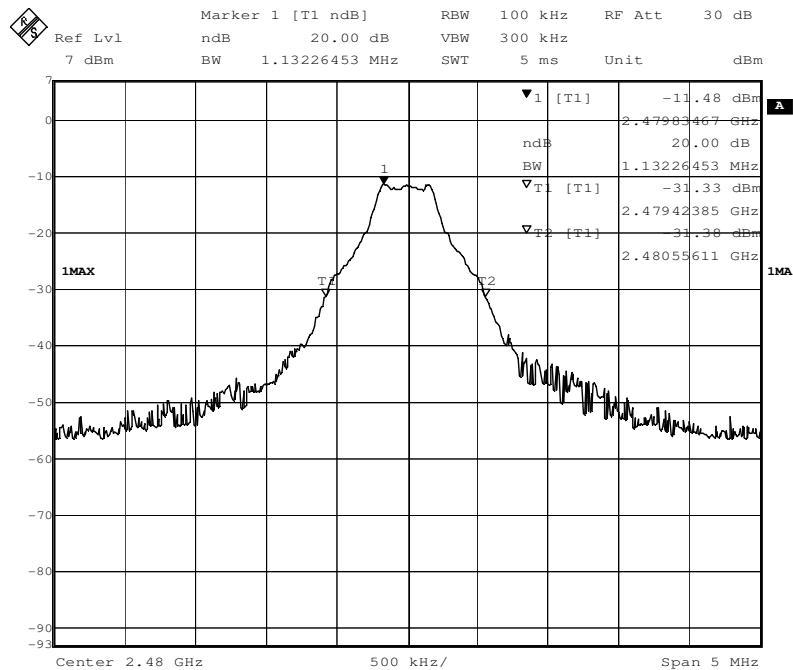

EDR mode:

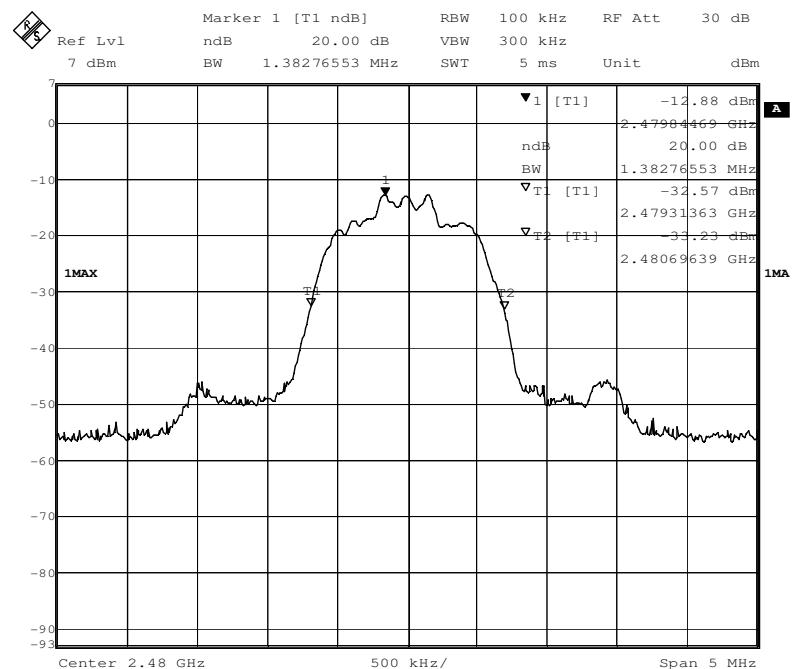

The results: The unit does meet the FCC requirements.

7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

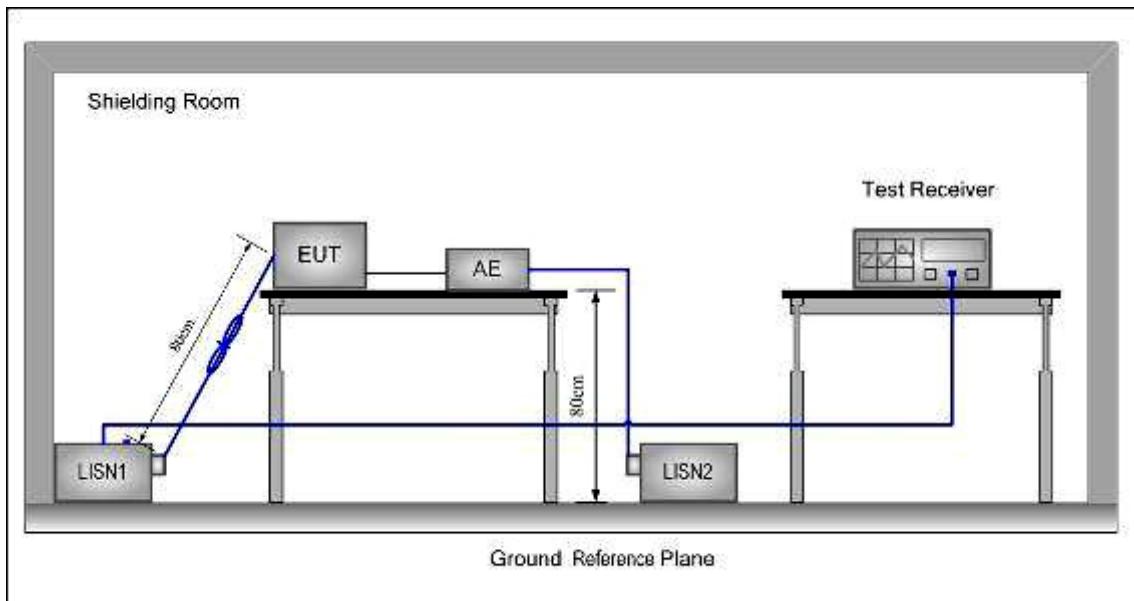

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

7.5.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT:


Neutral Line

Level(dB μ V)

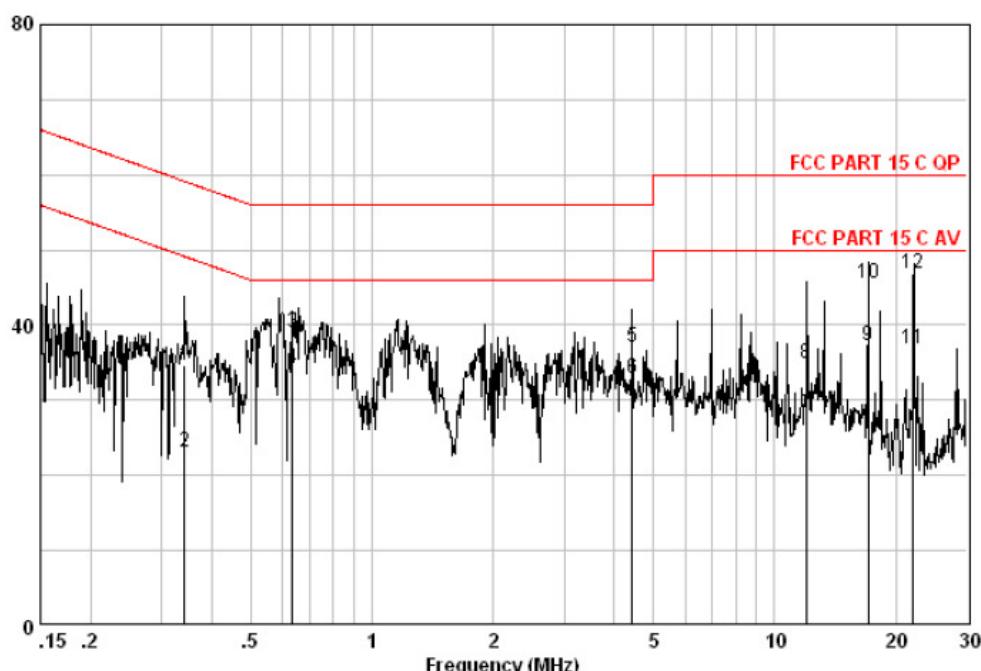

Measure data:

Freq MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Level dBuV	Limit Line dBuV	Over Limit dB		Remark
						Limit Line	Over Limit	
0.343	25.06	0.06	9.63	34.75	59.13	-24.38	QP	
0.343	13.43	0.06	9.63	23.12	49.13	-26.01	AVERAGE	
0.634	29.26	0.05	9.67	38.98	56.00	-17.02	QP	
0.634	24.55	0.05	9.67	34.27	46.00	-11.73	AVERAGE	
4.420	27.11	0.15	9.75	37.02	56.00	-18.98	QP	
4.420	23.08	0.15	9.75	32.99	46.00	-13.01	AVERAGE	
12.005	17.82	0.20	10.13	28.15	50.00	-21.85	AVERAGE	
12.005	24.61	0.20	10.13	34.94	60.00	-25.06	QP	
17.066	26.54	0.35	10.34	37.23	50.00	-12.77	AVERAGE	
17.066	34.88	0.35	10.34	45.57	60.00	-14.43	QP	
22.125	26.22	0.27	10.44	36.93	50.00	-13.07	AVERAGE	
22.125	36.24	0.27	10.44	46.95	60.00	-13.05	QP	

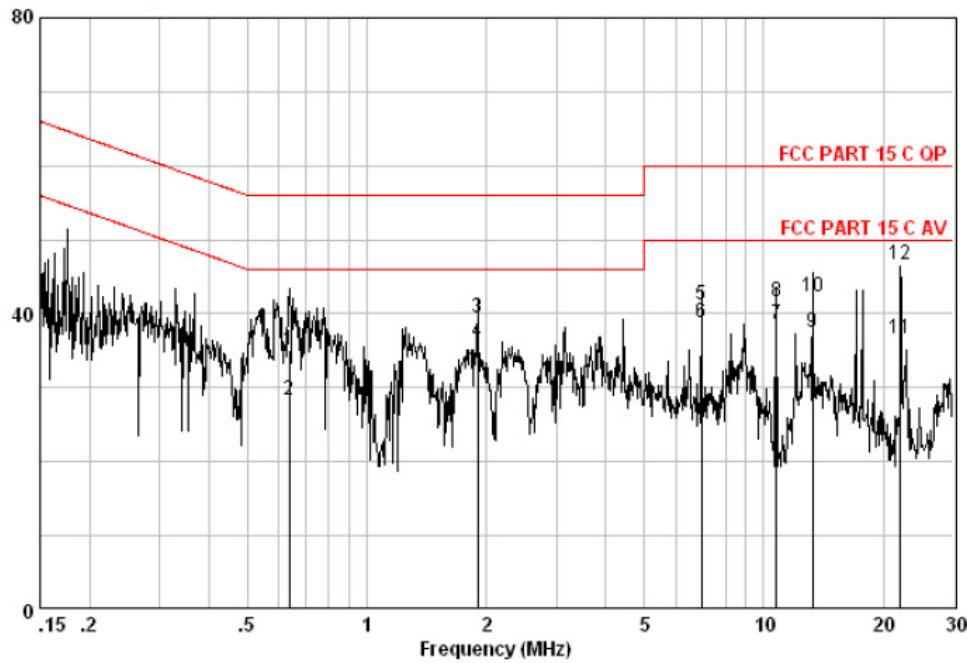Live Line
Level(dB μ V)

Measure result:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dB μ V	dB	dB	dB μ V	dB μ V	dB	
0.637	25.42	0.05	9.63	35.10	56.00	-20.90	QP
0.637	18.72	0.05	9.63	28.40	46.00	-17.60	AVERAGE
1.898	29.66	0.06	9.65	39.37	56.00	-16.63	QP
1.898	26.48	0.06	9.65	36.19	46.00	-9.81	AVERAGE
6.951	31.18	0.14	9.81	41.13	60.00	-18.87	QP
6.951	28.89	0.14	9.81	38.84	50.00	-11.16	AVERAGE
10.741	28.34	0.17	9.99	38.50	50.00	-11.50	AVERAGE
10.741	31.45	0.17	9.99	41.61	60.00	-18.39	QP
13.267	27.15	0.23	10.21	37.58	50.00	-12.42	AVERAGE
13.267	31.92	0.23	10.21	42.36	60.00	-17.65	QP
22.123	25.98	0.27	10.34	36.59	50.00	-13.41	AVERAGE
22.123	36.08	0.27	10.34	46.69	60.00	-13.31	QP

--End of the report--