

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : RF KEYBOARD

Model No. : RF-888

FCC ID : P4PRF-888

Filing Type : Certification

Applicant : **ZIPPY TECHNOLOGY CORP.**
10F, NO. 50, MIN CHYUAN RD., SHIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Features of Equipment under Test.....	2
2. Test Configuration of Equipment under Test.....	3
2.1. Test Manner	3
2.2. Description of Test System	3
2.3. Band edge compliance plot per 15.227(b).	5
2.4. Connection Diagram of Test System	7
3. General Information of Test.....	8
3.1. Test Facility	8
3.2. Test Voltage	8
3.3. Standard for Methods of Measurement.....	8
3.4. Test in Compliance with	8
3.5. Frequency Range Investigated	8
3.6. Test Distance	8
4. Test of Conducted Powerline	9
5. Test of Radiated Emission.....	10
5.1. Major Measuring Instruments.....	10
5.2. Test Procedures.....	11
5.3. Typical Test Setup Layout of Radiated Emission.....	12
5.4. Test Result of Radiated Emission	13
6. EMI Suppression Component List.....	14
7. Antenna Factor & Cable Loss	15
8. List of Measuring Equipments Used	16
9. Uncertainty of Test Site	17

History of this test report

Original Report Issue Date: Jan. 06, 2003

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : RF KEYBOARD
Model No. : RF-888
FCC ID : P4PRF-888
Filing Type : Certification
Applicant : **ZIPPY TECHNOLOGY CORP.**
10F, NO. 50, MIN CHYUAN RD., SHIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Dec. 31, 2002 at **SPORTON International Inc. LAB.**



K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

ZIPPY TECHNOLOGY CORP.
10F, NO. 50, MIN CHYUAN RD., SHIN TIEN CITY, TAIPEI HSIEN, TAIWAN, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment	: RF KEYBOARD
Model No.	: RF-888
FCC ID	: P4PRF-888
Trade Name	: ZIPPY
USB Cable	: Shielded, 1.6m
Power Supply Type	: From Battery 4.5V
AC Power Cord	: N/A

1.4. Features of Equipment under Test

- Channel number : 1
- Working Frequency: 27.092MHz
- Crystal / Osc. : 32.768KHz, 27.092MHz
- Power: DC 4.5V (1.5V x 3)

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been configured and operated pursuant to ANSI C63.4-1992 in a manner which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included ASUS PC, REALsync Monitor, LOGITECH USB Mouse, HP Printer, ACEEX Modem and EUT for EMI test.
- c. Frequency range investigated: radiation 30 MHz to 1000MHz.

2.2. Description of Test System

Support Unit 1. -- Monitor (REALsync)

FCC ID	: N/A
Model No.	: DJ72
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0023
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. – USB Mouse (LOGITECH)

FCC ID	: N/A
Model No.	: M-BE58
Serial No.	: SP0087
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DJ400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Shielded, 360 degree via metal backshells, 1.35m

Support Unit 4. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Unit 5. -- Personal Computer (ASUS)


FCC ID : N/A
Model No. : P43533-E
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0002
Remark : This support device was tested to comply with FCC standards and
authorized under a declaration of conformity.

Support Unit 6. -- Receiver (ZIPPY)

FCC ID : N/A
Model No. : RF-888
Serial No. : SP0088

2.3. Band edge compliance plot per 15.227(b).

HORIZONTAL

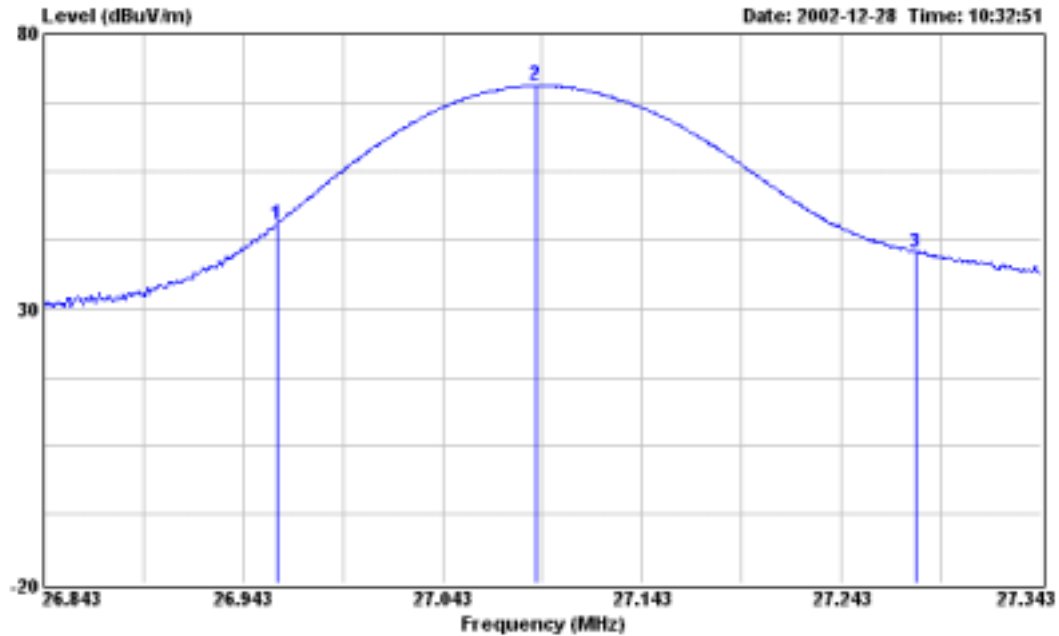


Mark 1 : 26.96MHz

Mark 3 : 27.28MHz

Conformation of the fundamental frequency

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Limits (dBUV/m)	(uV/m)	Emission (dBUV/m)	Level (uV/m)	Margin (dB)
26.960	H	15.40	0.93	14.98	69.54	2999	31.31	36.77	-38.23
27.280	H	15.40	0.93	9.79	69.54	2999	26.12	20.23	-43.42

VERTICAL:

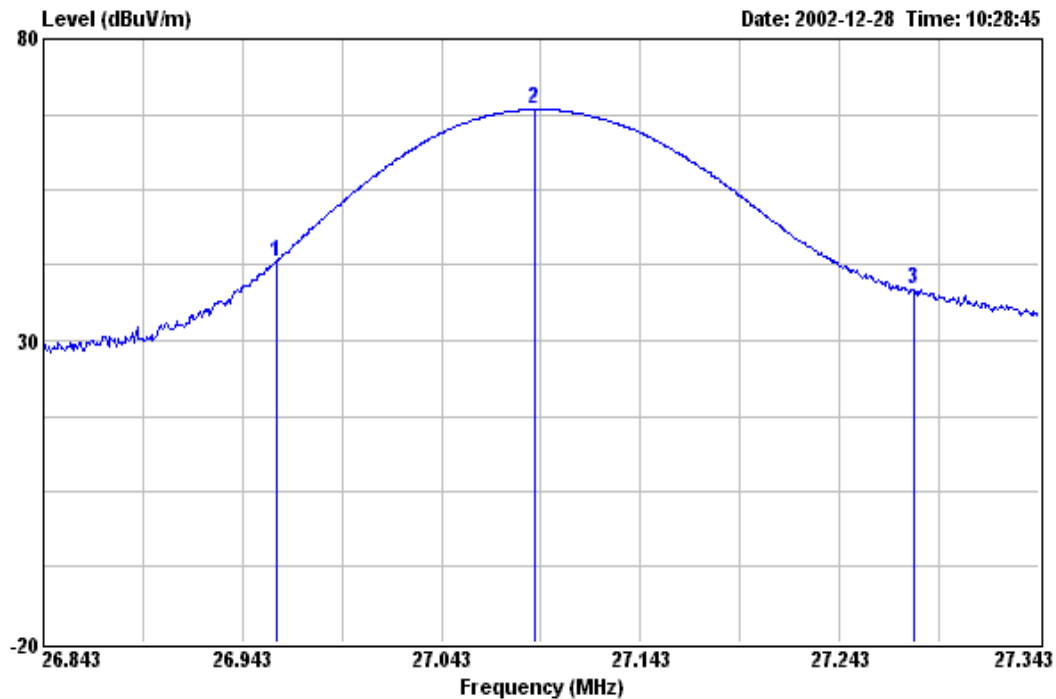


Mark 1 : 26.96MHz

Mark 3 : 27.28MHz

Conformation of the fundamental frequency

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (dB)	Margin (dB)
26.960	V	15.40	0.93	12.71	69.54 2999	29.04	28.31	-40.50
27.280	V	15.40	0.93	8.10	69.54 2999	24.43	16.65	-45.11

2.4. Connection Diagram of Test System

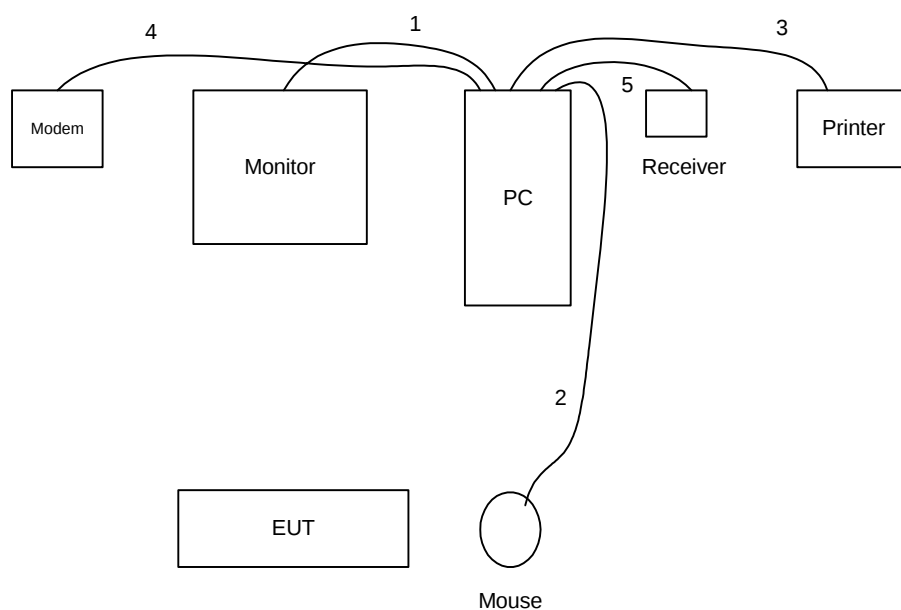

1. The I/O cable is connected from PC to the support unit 1.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The EUT cable is connected from PC to the support unit 6.

3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No. : 03CH02-HY

3.2. Test Voltage

DC 4.5V

3.3. Standard for Methods of Measurement

ANSI C63.4-1992

3.4. Test in Compliance with

FCC Part 15, Subpart C

3.5. Frequency Range Investigated

a. Radiation : from 30 MHz to 1 GHz

3.6. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

4. Test of Conducted Powerline

The power supply of the EUT is from battery.

So the conducted powerline test is not applicable to the EUT.

5. Test of Radiated Emission

Radiated emissions from 30 MHz to 1 GHz were measured with a bandwidth of **120 kHz** according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 5.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


5.1. Major Measuring Instruments

- Amplifier (ADVANTEST BB525C)
 - RF Gain 30 dB
 - Signal Input 9 KHz to 3 GHz
- Spectrum Analyzer (R&S FSP7)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 120 KHz
 - Signal Input 9 KHz to 7 GHz

5.2. Test Procedures

- a. The EUT was placed on a routable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then adjust the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Radiated Emission

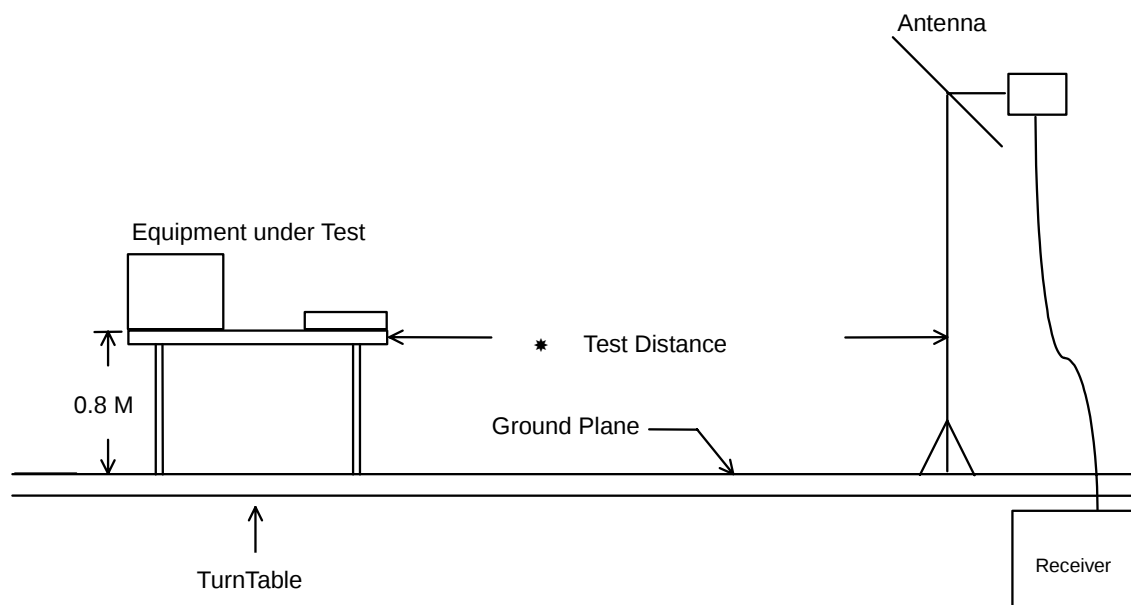

5.4. Test Result of Radiated Emission

- Test Distance : 3 M
- Temperature : 19°C
- Relative Humidity : 67%
- Test Date : Dec. 26, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

243.570 MHz /42.44 dBuV/m (HORIZONTAL) Antenna Height 1.23 Meter, Turntable Degree 67 °.


- Spurious Emissions:

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (dB)	Margin (dB)	Detect Mode
189.570	H	8.98	2.57	25.61	43.50 150	37.16 72.11	-6.34		Peak
216.570	H	9.81	2.69	29.31	46.00 200	41.81 123.17	-4.19		Peak
243.570	H	11.46	2.87	28.11	46.00 200	42.44 132.43	-3.56		Peak
271.380	H	12.60	3.05	24.96	46.00 200	40.61 107.28	-5.39		Peak
298.380	H	13.53	3.16	22.80	46.00 200	39.49 94.30	-6.51		Peak
324.500	H	14.03	3.32	17.93	46.00 200	35.28 58.08	-10.72		Peak

- Field strength of fundamental

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission Level (dBuV/m) (uV/m)	Margin (dB)	Detect Mode
27.090	H	15.40	0.93	38.37	80.00 10000	54.70 543.25	-25.30	Peak
27.090	V	15.40	0.93	39.26	80.00 10000	55.59 601.87	-24.41	Peak

Test Engineer :



Wayne Hsu

6. EMI Suppression Component List

No EMI suppression components.

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.27
35	13.83	1.37
40	12.41	1.44
45	11.69	1.50
50	7.77	1.56
55	6.68	1.60
60	5.58	1.69
65	5.51	1.74
70	5.43	1.79
75	6.65	1.85
80	8.11	1.87
85	9.23	1.96
90	10.34	1.98
95	10.85	2.03
100	11.36	2.05
110	11.27	2.19
120	11.17	1.88
130	11.17	2.10
140	11.72	2.17
150	10.52	2.24
160	9.39	3.06
170	8.93	2.41
180	9.20	2.47
190	8.98	2.57
200	8.76	2.63
220	10.01	2.71
240	11.20	2.86
260	12.19	2.94
280	12.89	3.08
300	13.56	3.17
320	13.94	3.28
340	14.32	3.36
360	14.69	3.54
380	15.07	3.61
400	15.43	3.63
450	16.08	3.77
500	16.73	4.13
550	17.70	4.21
600	18.69	4.47
650	18.99	4.79
700	19.30	5.02
750	19.84	5.01
800	20.39	5.25
850	20.60	5.58
900	20.82	5.42
950	20.98	5.71
1000	21.15	6.04

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP7	838858/039	9KHz – 7GHz	Jan. 07, 2002	Radiation (03CH02-HY)
Amplifier	ADVANTEST	BB525C	BB525C-04	9KHz – 3GHz	Oct. 31, 2002	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2681	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 ~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
Half-wave dipole antenna	R&S	HZ12 HZ13	83924403 83924503	30MHz - 1GHz	Sep. 23, 2002	Radiation (03CH02-HY)

Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \quad \text{for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \quad \text{for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz–30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$