



A D T

FCC TEST REPORT (NFC)

REPORT NO.: RF140410C14-4

MODEL NO.: N450

FCC ID: P4Q-N450W

RECEIVED: Apr. 10, 2014

TESTED: May 8, 2014 ~ May 11, 2014

ISSUED: May 19, 2014

APPLICANT: MITAC International Corp

ADDRESS: Building B, No. 209, Sec. 1, Nan Gang Rd.,
Nan Gang Dist., Taipei 11568, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3 DESCRIPTION OF SUPPORT UNITS	8
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	9
4. TEST TYPES AND RESULTS	10
4.1 RADIATED EMISSION MEASUREMENT	10
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	10
4.1.2 TEST INSTRUMENTS	11
4.1.3 TEST PROCEDURES	12
4.1.4 DEVIATION FROM TEST STANDARD	12
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 CONDUCTED EMISSION MEASUREMENT	46
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	46
4.2.2 TEST INSTRUMENTS	46
4.2.3 TEST PROCEDURES	47
4.2.4 DEVIATION FROM TEST STANDARD	47
4.2.5 TEST SETUP	47
4.2.6 EUT OPERATING CONDITIONS	47
4.2.7 TEST RESULTS	48
4.3 FREQUENCY STABILITY	72
4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	72
4.3.2 TEST INSTRUMENTS	72
4.3.3 TEST PROCEDURE	72
4.3.4 DEVIATION FROM TEST STANDARD	72
4.3.5 TEST SETUP	73
4.3.6 EUT OPERATING CONDITION	73
4.3.7 TEST RESULTS	74
4.4 20dB BANDWIDTH	78
4.4.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT	78
4.4.2 TEST INSTRUMENTS	78
4.4.3 TEST PROCEDURE	78
4.4.4 DEVIATION FROM TEST STANDARD	78
4.4.5 TEST SETUP	78
4.4.6 EUT OPERATING CONDITION	78
4.4.7 TEST RESULTS	79
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	83
6. INFORMATION ON THE TESTING LABORATORIES	84
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	85



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140410C14-4	Original release	May 19, 2014



A D T

1. CERTIFICATION

PRODUCT: Tablet

MODEL: N450

BRAND: Mio, Mitac

APPLICANT: MITAC International Corp

TESTED: May 8, 2014 ~ May 11, 2014

TEST SAMPLE: Production Unit

STANDARDS: FCC Part 15, Subpart C (Section 15.225)

FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10-2009

The above equipment (model: N450) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :

Ivonne Wu

Ivonne Wu / Supervisor

, DATE : May 19, 2014

APPROVED BY :

Sam chen

Sam Chen / Senior Project Engineer

, DATE : May 19, 2014

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.225, 15.215)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	Conducted emission test	PASS	Meet the requirement of limit. Minimum passing margin is -2.27dB at 0.66563MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -72.37dB at 13.56MHz.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -5.89dB at 40.80MHz.
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted Emission	150kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Tablet
MODEL NO.	N450
POWER SUPPLY	12Vdc (adapter or host equipment) 3.7Vdc (Li-ion battery)
MODULATION TYPE	ASK
OPERATING FREQUENCY	13.56MHz
ANTENNA TYPE	Loop Antenna
DATA CABLE	Refer to Note
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note

NOTE:

1. The EUT contains following accessory devices.

ITEM	BRAND	MODEL	SPECIFICATION
Adapter 1	SINO-AMERICAN	SA142B-12U	I/P: 110-240Vac, 1.2A O/P: 12Vdc, 3A
Adapter 2	SINPRO	HPU63A-105	I/P: 100-240Vac, 1.62-0.72A O/P: 12Vdc, 5.25A
Battery 1	GETAC	BP-TKS-12/3360 SN	3.7Vdc, 6720mAh
Battery 2	Tian Yu	Bk-N450X-510KNX-01	3.7Vdc, 510mAh
USB Cable	EMINENCE	JU-57405040525	0.9m cable
BCR-1 (1D)	Opticon	MDL2001	--
BCR-2 (2D)	HoneyWell	5680	--
BCR-3 (2D)	Code	CR8012	--
CPU	TI	44705GPCBS	1.5G Hz
eMMC	N/A	N/A	16GB
LCD Panel	N/A	N/A	10.1 inch
Front Camera	Liteon	10P2SF130	--
Rear Camera	Liteon	10P2SA511	--
WLAN,BT Module	Jorjin	WG7833-B0& WX7833-B0	--

2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE	PLC	FS	BW	
A	√	√	√	√	Tablet w/o Bar Code Scanner + Adapter 1
B	√	√	√	√	Tablet w/ 1D Opticon Scanner + Adapter 1
C	√	√	√	√	Tablet w/ 2D HoneyWell Scanner + Adapter 1
D	√	√	√	√	Tablet w/ 2D Code Scanner + Adapter 1
E	√	√	-	-	Tablet w/o Bar Code Scanner + Adapter 2
F	√	√	-	-	Tablet w/ 1D Opticon Scanner + Adapter 2
G	√	√	-	-	Tablet w/ 2D HoneyWell Scanner + Adapter 2
H	√	√	-	-	Tablet w/ 2D Code Scanner + Adapter 2

Where **RE:** Radiated Emission **PLC:** Power Line Conducted Emission
FS: Frequency Stability **BW:** 20dB Bandwidth

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

RADIATED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A ~ H	1	1	ASK

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A ~ H	1	1	ASK

FREQUENCY STABILITY:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A ~ D	1	1	ASK

20dB BANDWIDTH:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A ~ D	1	1	ASK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
FS	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao
PLC	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
BW	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Earphone	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

NOTE:

- All power cords of the above support units are non shielded (1.8m).

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

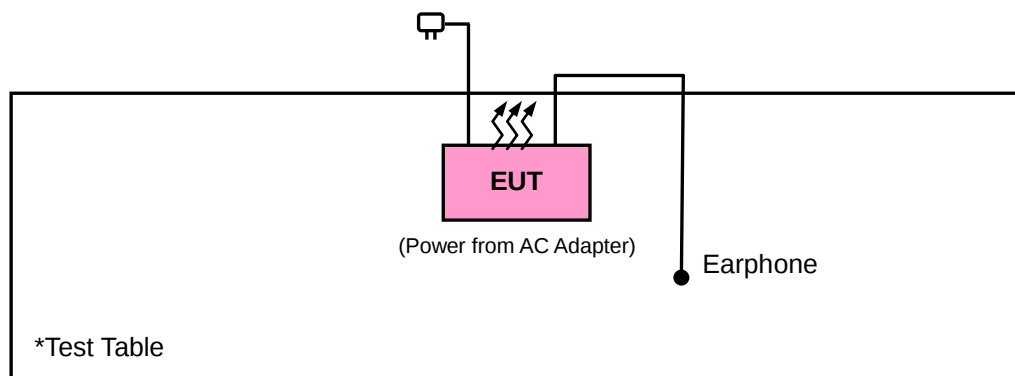

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RFID Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B. The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver AGILENT	N9038A	MY51210203	Jan. 17, 2014	Jan. 16, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2013	Dec. 20, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 27, 2014	Feb. 26, 2015
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 19, 2014	Feb. 18, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 18, 2013	Dec. 17, 2014
Loop Antenna	HFH2-Z2	100070	Mar. 06, 2014	Mar. 05, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 26, 2013	Dec. 25, 2014
Preamplifier EMCI	EMC 184045	980116	Jan. 13, 2014	Jan. 12, 2015
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2013	Dec. 26, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable Worken	RG-213	NA	Nov. 07, 2013	Nov. 06, 2014
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 10.
4. The FCC Site Registration No. is 690701.
5. The IC Site Registration No. is IC 7450F-10.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

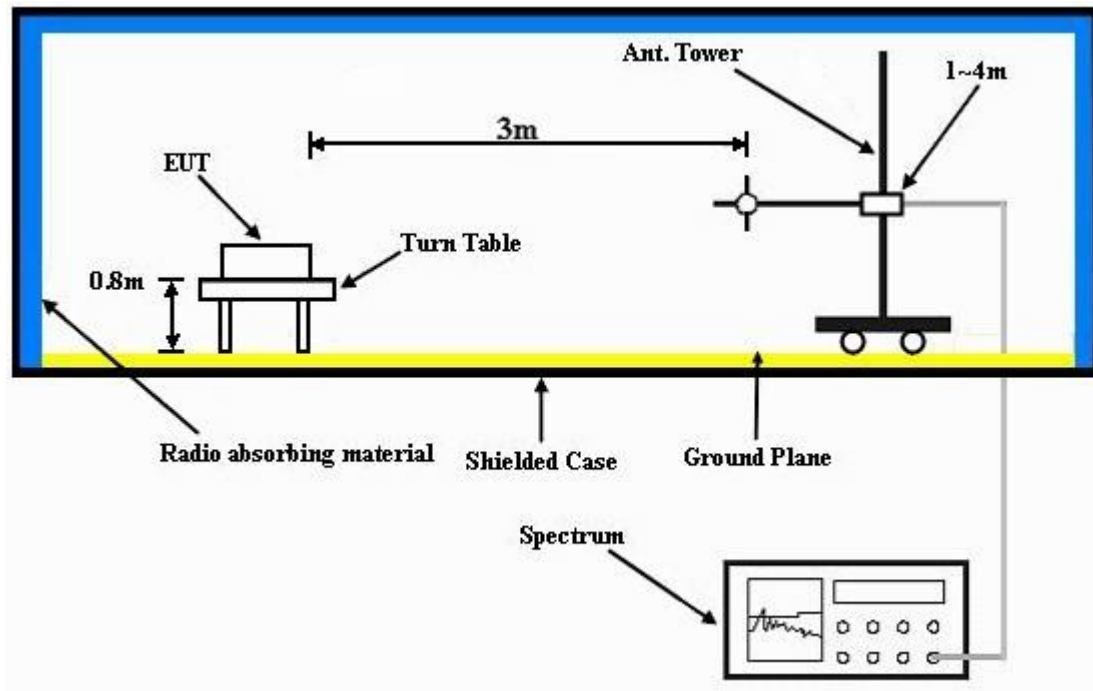

For the actual test configuration, please refer to the attached file (Test Setup Photo).


4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

MODE A

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

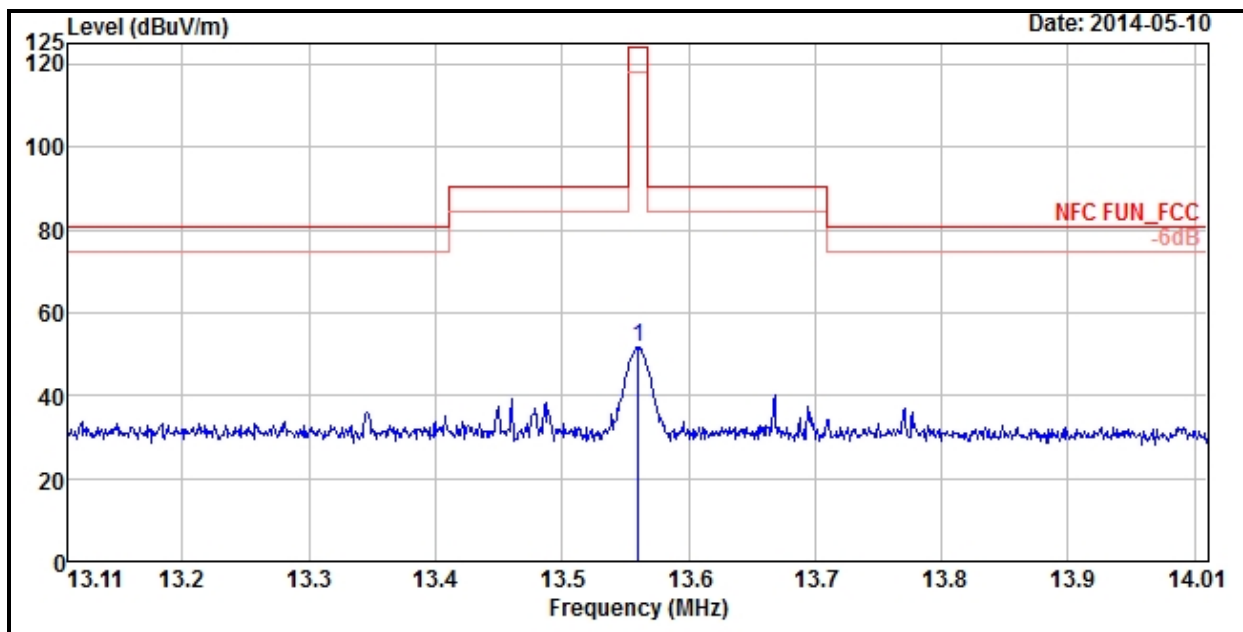

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	51.63	31.92	124	-72.37	19.71	100	188	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

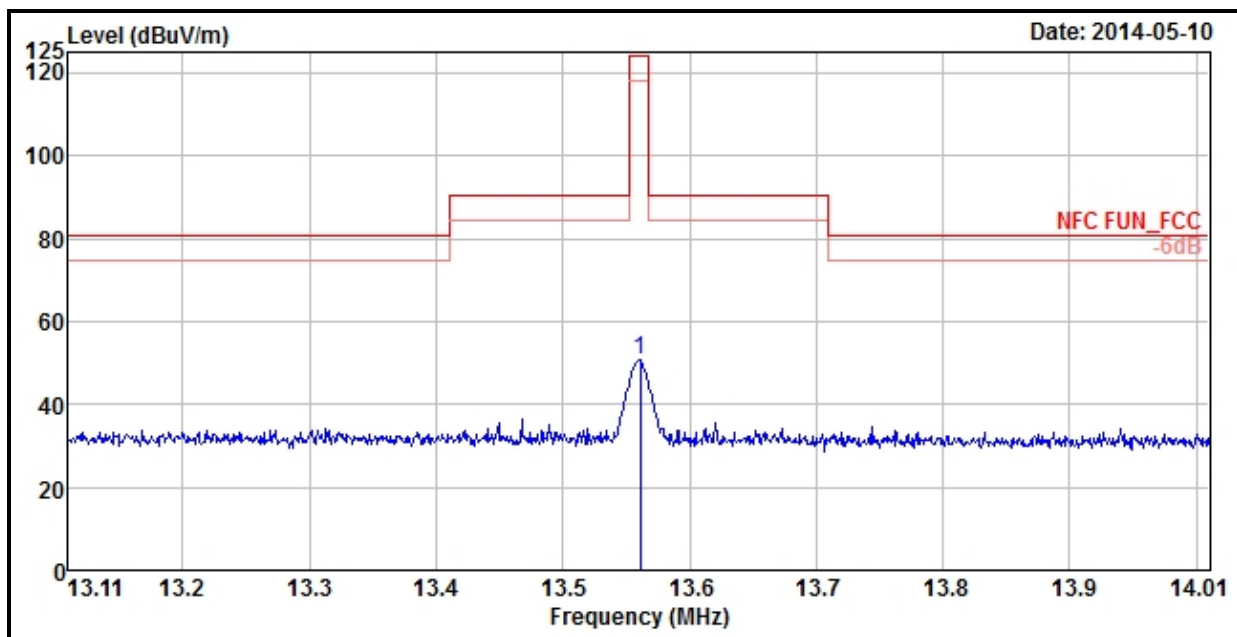

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	50.56	30.85	124	-73.44	19.71	100	254	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$


EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

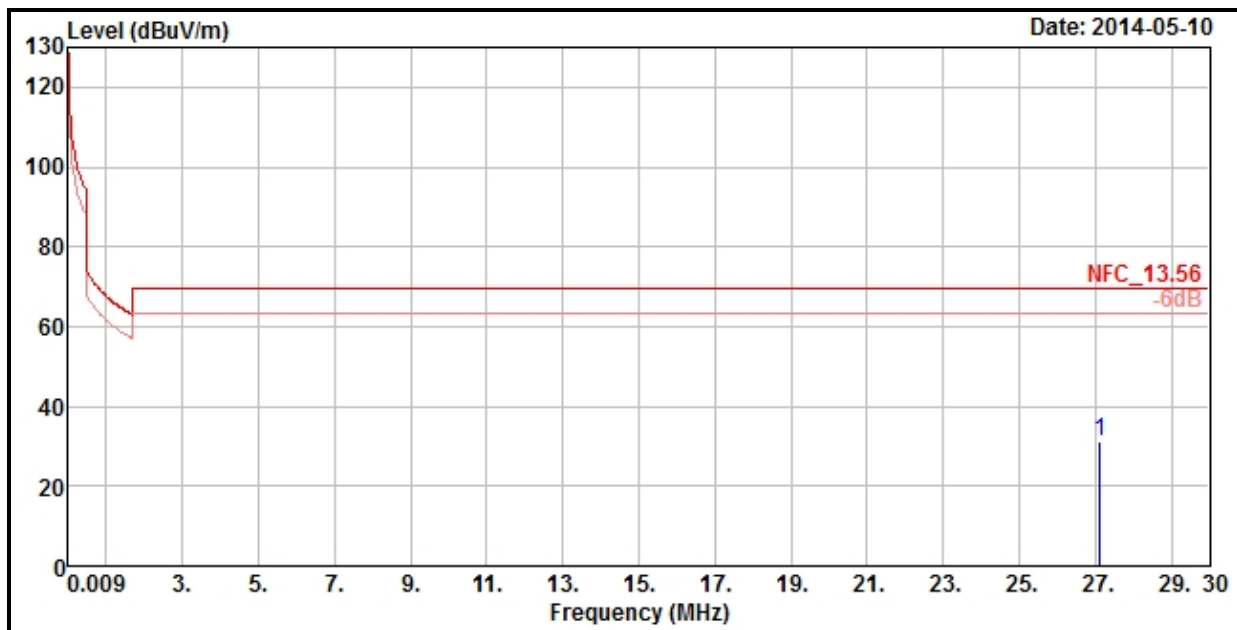

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	31.33	11.24	69.54	-38.21	20.09	100	0	Peak

- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

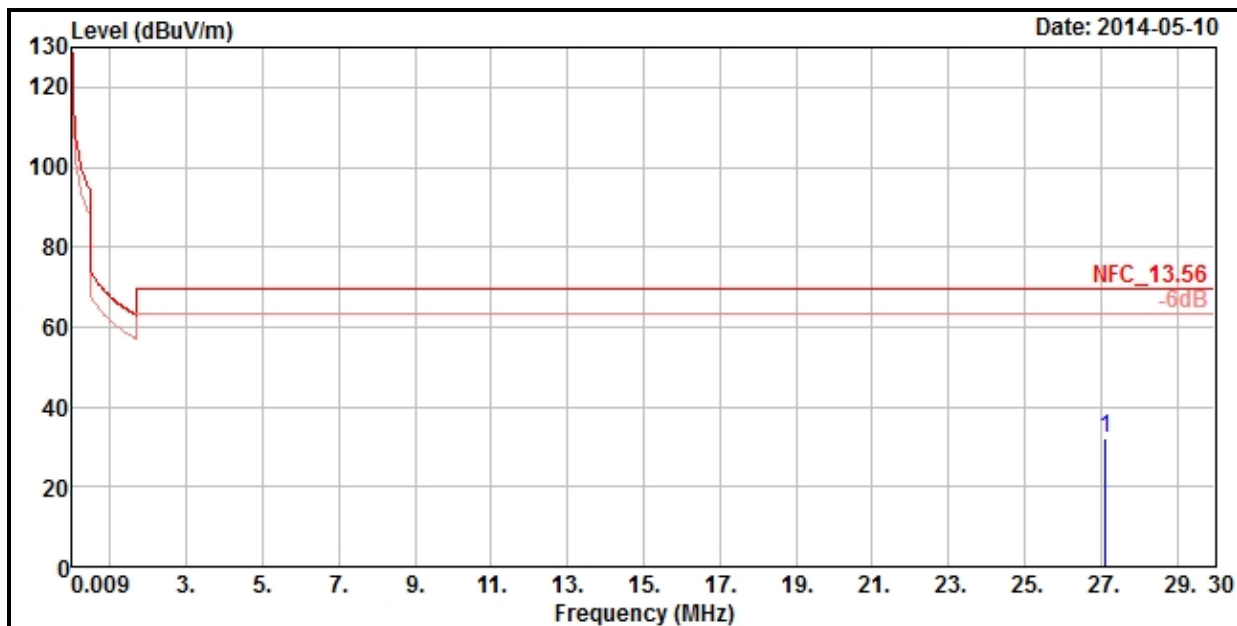


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	32.15	12.06	69.54	-37.39	20.09	100	360	Peak

REMARKS:


1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

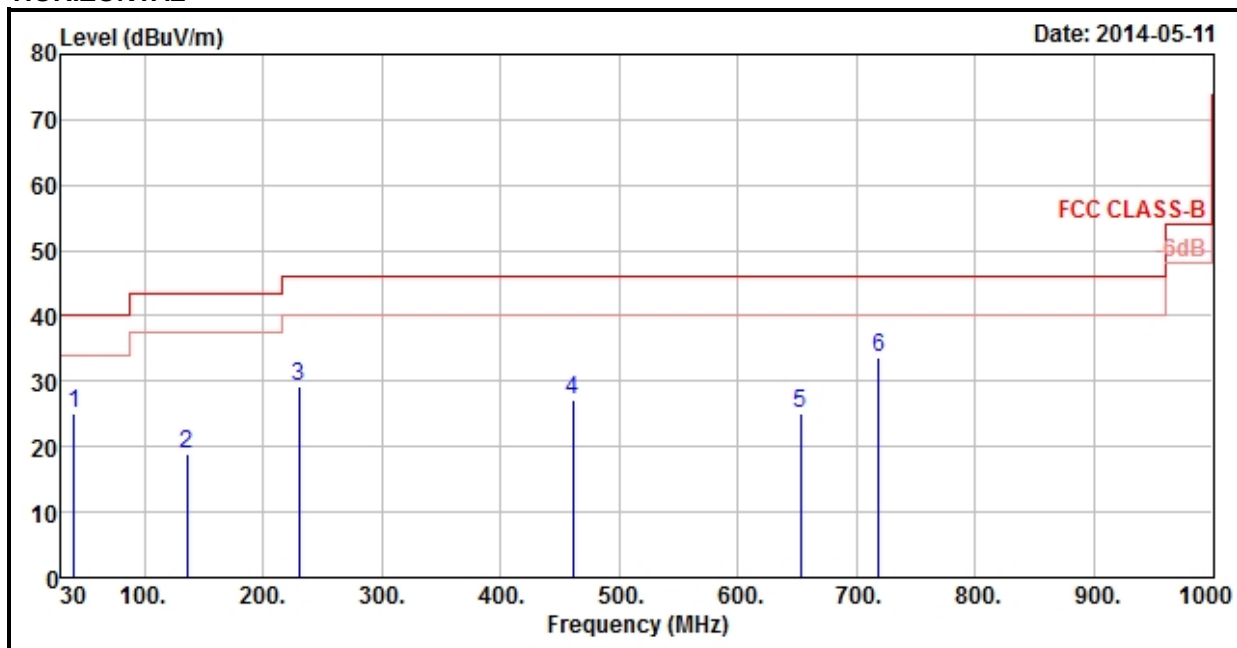

VERTICAL

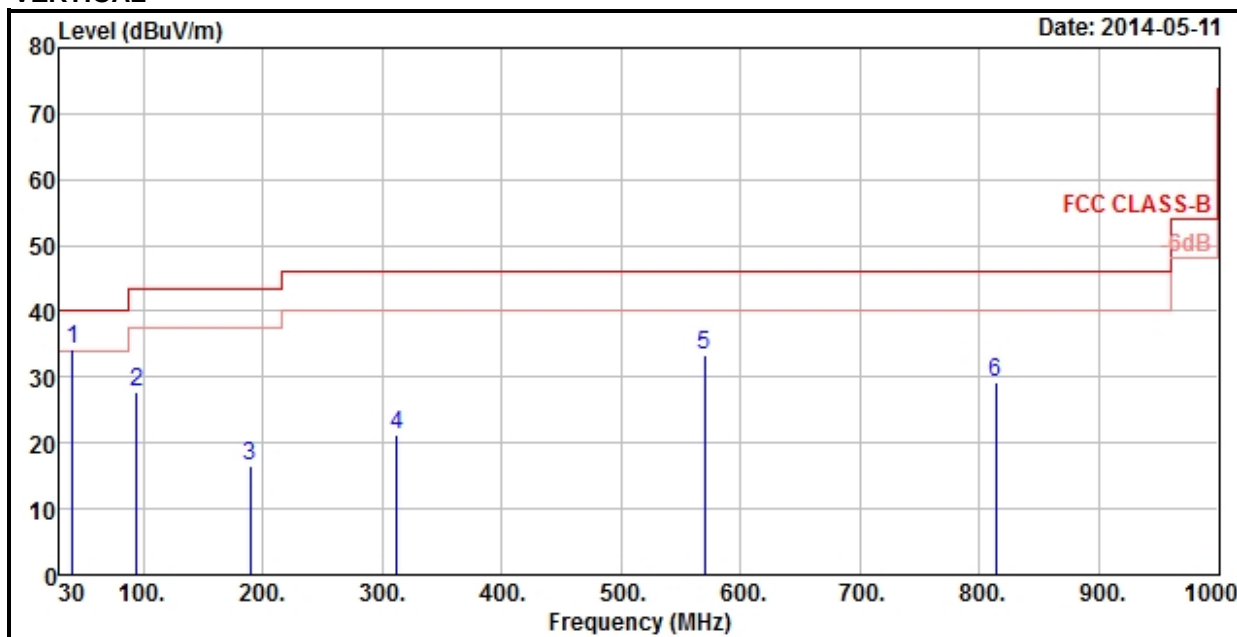

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
40.8	25.15	41.95	40	-14.85	13.55	0.67	31.02	108	158	Peak
135.57	18.95	37.34	43.5	-24.55	12.08	1.27	31.74	185	148	Peak
230.34	29.12	48.57	46	-16.88	10.66	1.74	31.85	152	233	Peak
461	27.21	40	46	-18.79	16.54	2.65	31.98	120	239	Peak
652.8	25.08	33.59	46	-20.92	20.24	3.25	32	128	266	Peak
718.6	33.77	40.87	46	-12.23	21.08	3.49	31.67	112	154	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
40.8	34.11	50.91	40	-5.89	13.55	0.67	31.02	101	86	Peak
94.8	27.62	49.86	43.5	-15.88	8.68	1.04	31.96	100	97	Peak
189.84	16.42	36.49	43.5	-27.08	10.05	1.55	31.67	134	253	Peak
311.9	21.17	37.77	46	-24.83	13.24	2.1	31.94	100	127	Peak
569.5	33.5	43.68	46	-12.5	18.9	3	32.08	105	348	Peak
813.8	29.27	34.65	46	-16.73	22.4	3.73	31.51	100	328	Peak


REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.

MODE B

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

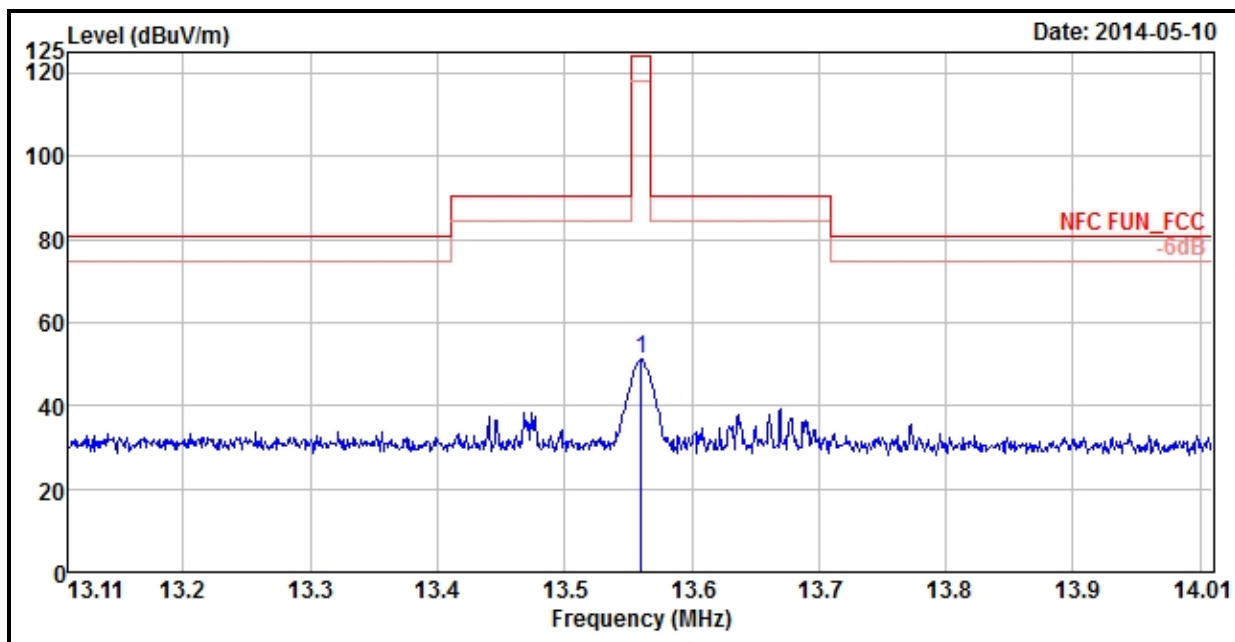

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	51.15	31.44	124	-72.85	19.71	100	129	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

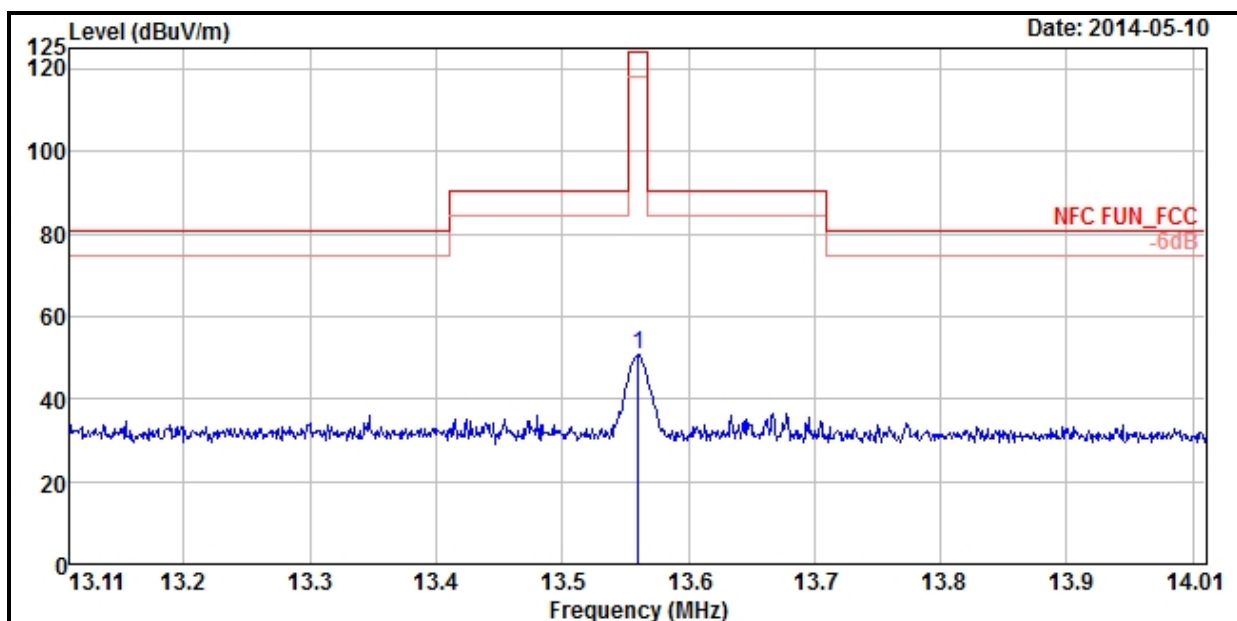

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	50.65	30.94	124	-73.35	19.71	100	272	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$


EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

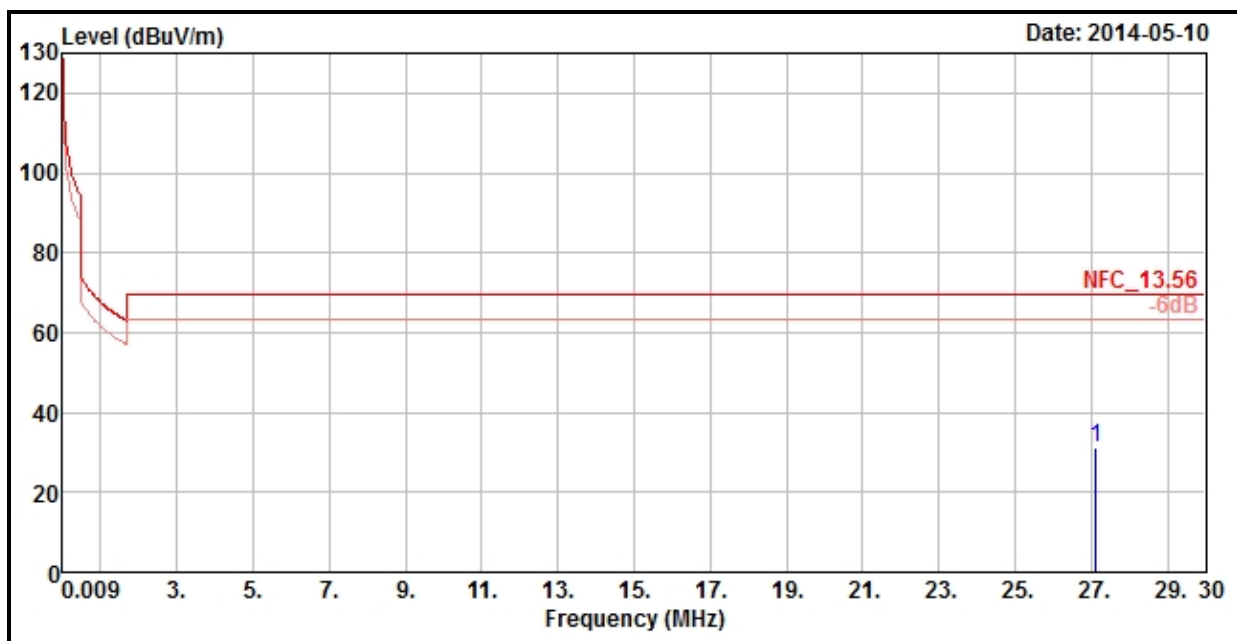

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	31.1	11.01	69.54	-38.44	20.09	100	0	Peak

- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

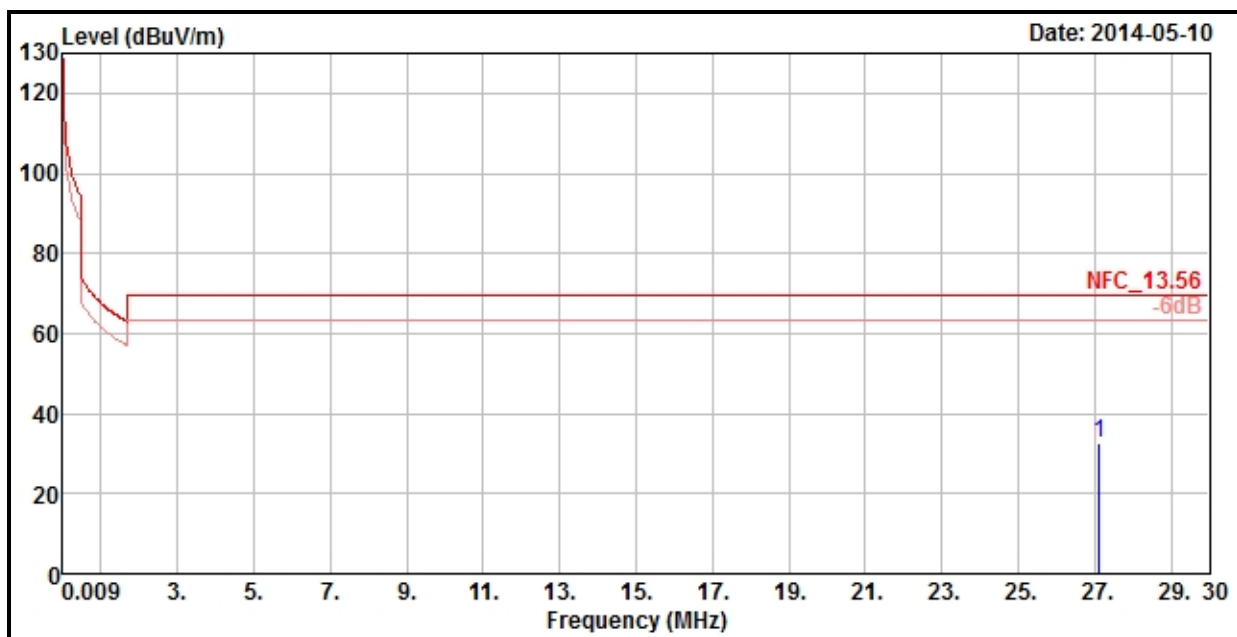


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	32.76	12.67	69.54	-36.78	20.09	100	360	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

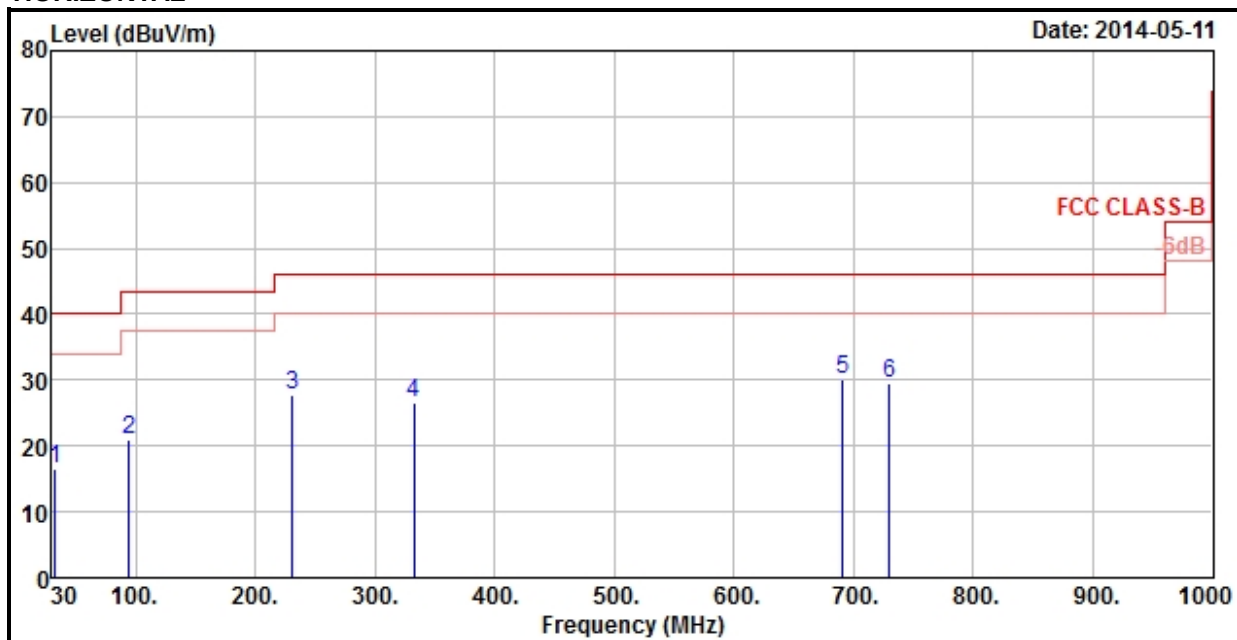

VERTICAL

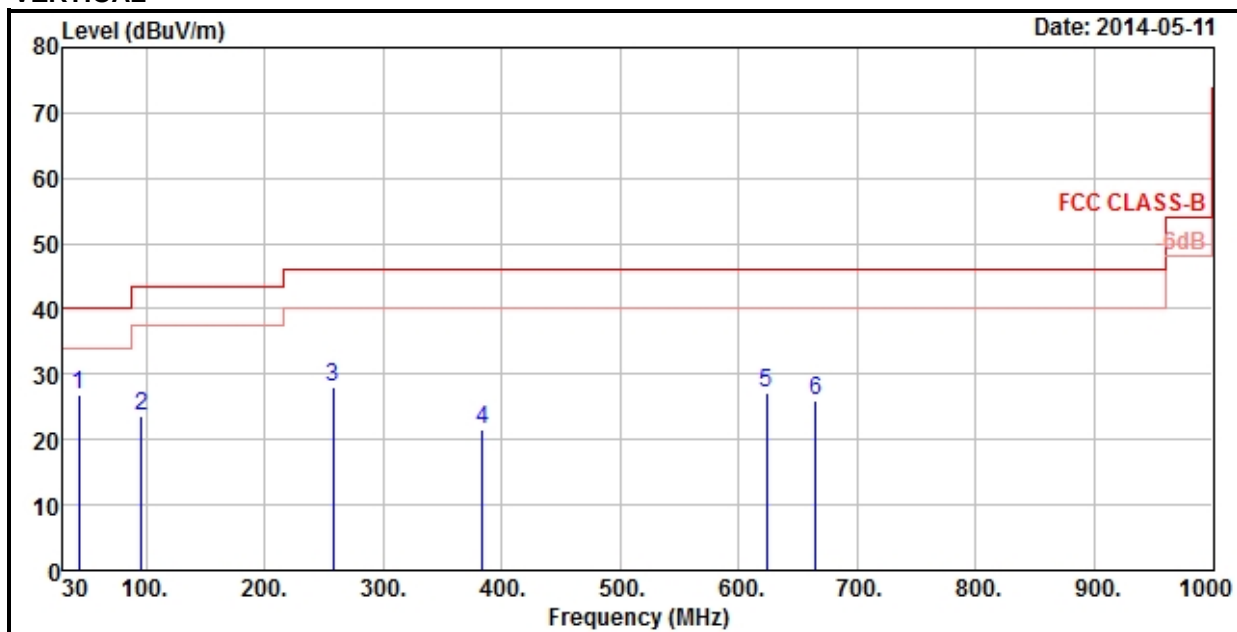

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
32.97	16.52	34.56	40	-23.48	12.47	0.58	31.09	167	231	Peak
94.8	20.82	43.06	43.5	-22.68	8.68	1.04	31.96	105	233	Peak
230.61	27.7	47.15	46	-18.3	10.66	1.74	31.85	200	154	Peak
332.9	26.54	42.45	46	-19.46	13.73	2.17	31.81	159	234	Peak
691.3	30.02	37.74	46	-15.98	20.71	3.4	31.83	120	331	Peak
729.8	29.64	36.49	46	-16.36	21.23	3.52	31.6	100	30	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
42.96	26.86	43.66	40	-13.14	13.58	0.7	31.08	165	287	Peak
96.15	23.67	45.82	43.5	-19.83	8.76	1.05	31.96	148	52	Peak
257.61	28.1	46.4	46	-17.9	11.71	1.86	31.87	145	237	Peak
384	21.42	36.09	46	-24.58	14.96	2.36	31.99	102	34	Peak
623.4	27.18	36.29	46	-18.82	19.89	3.16	32.16	100	162	Peak
664.7	26.07	34.27	46	-19.93	20.39	3.3	31.89	133	321	Peak


REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.

MODE C

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

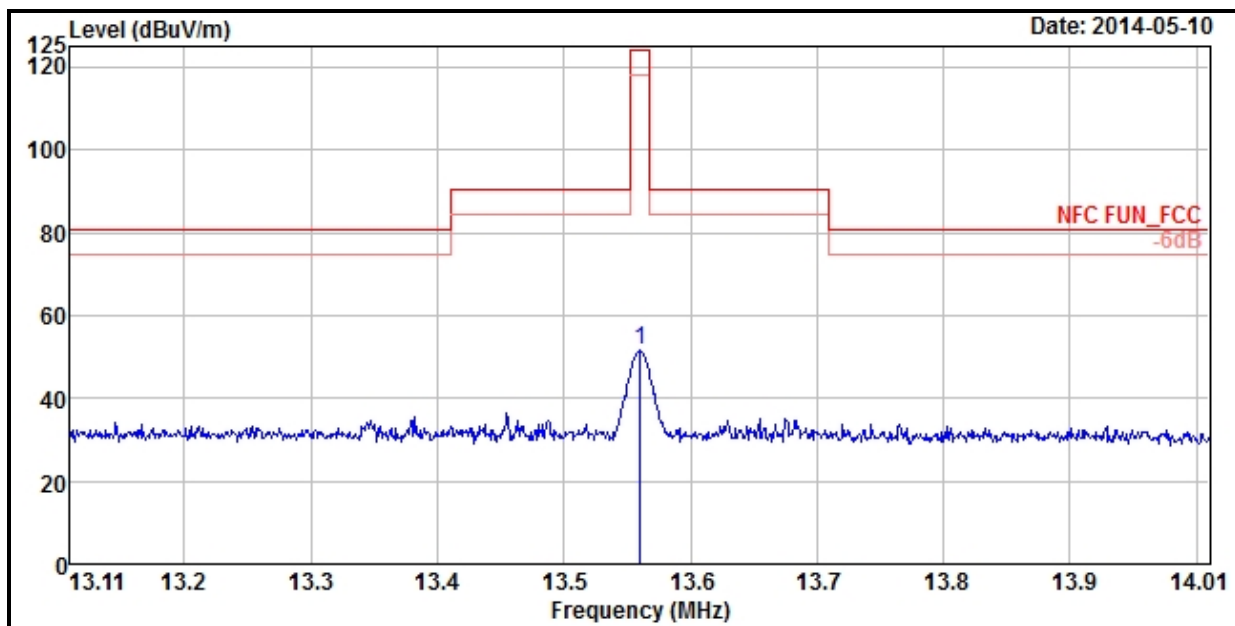

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	51.55	31.84	124	-72.45	19.71	100	142	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

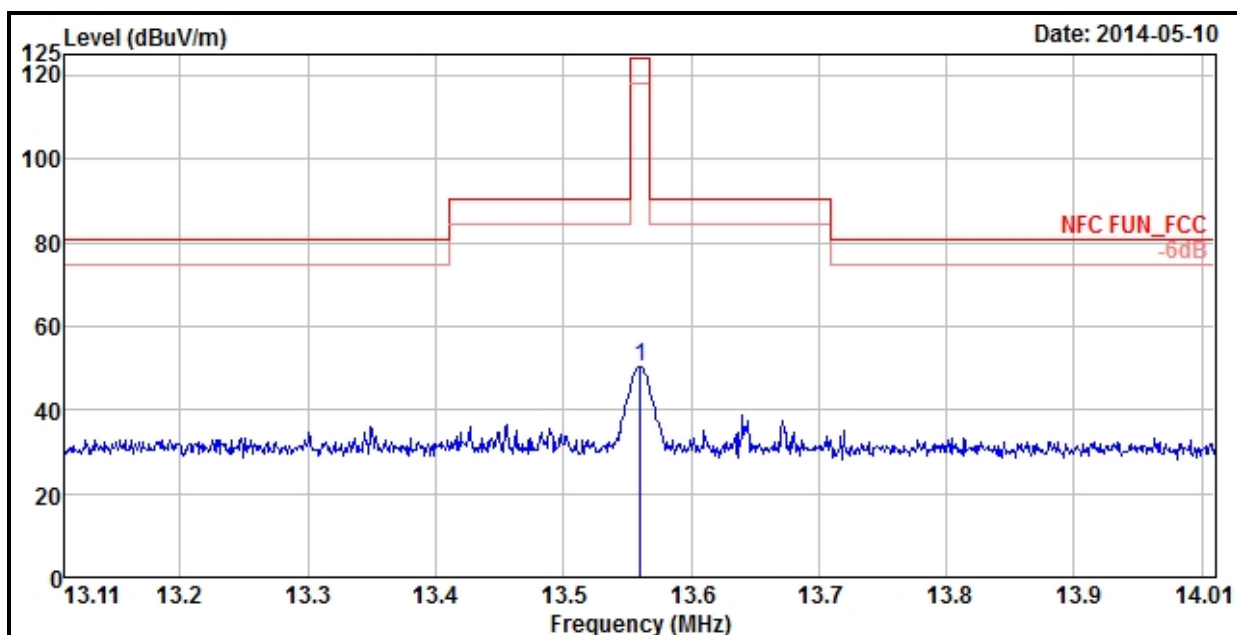

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	50.5	30.79	124	-73.5	19.71	100	145	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

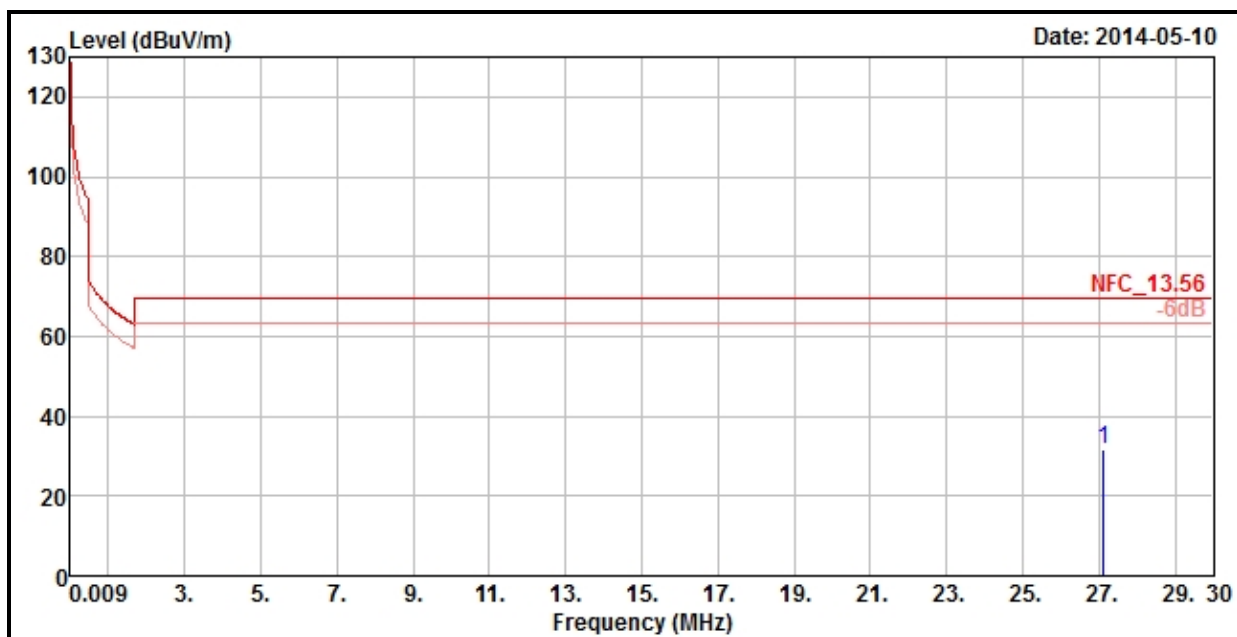


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	31.47	11.38	69.54	-38.07	20.09	100	0	Peak

REMARKS:

1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

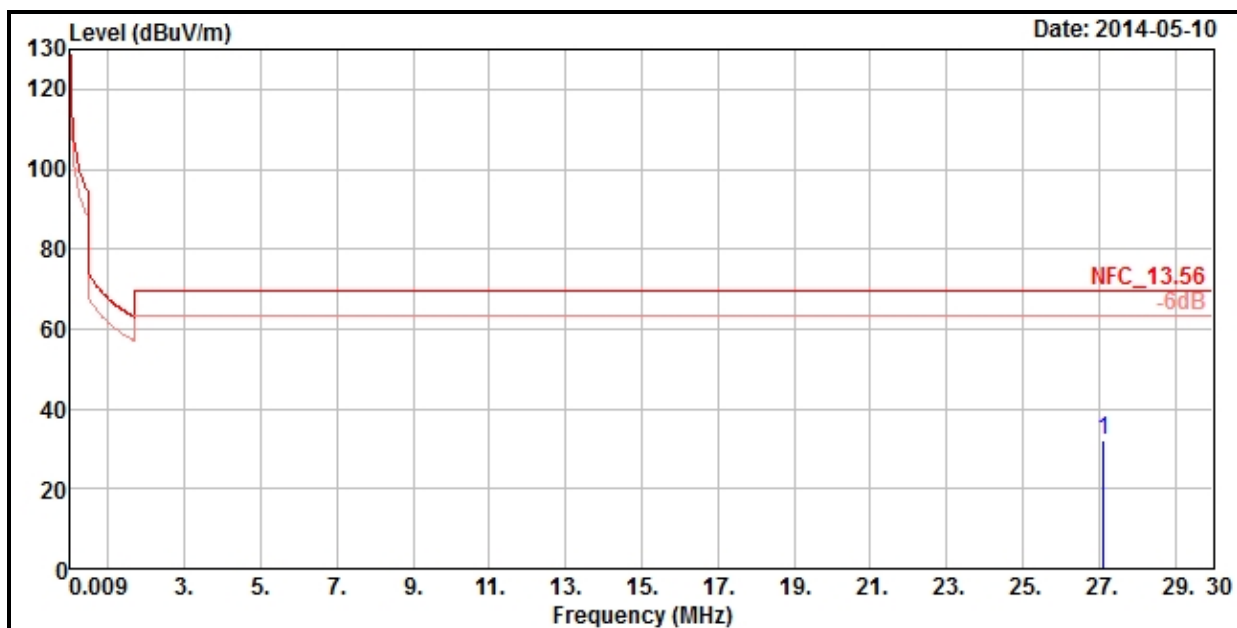


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	32.28	12.19	69.54	-37.26	20.09	100	360	Peak

REMARKS:


1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

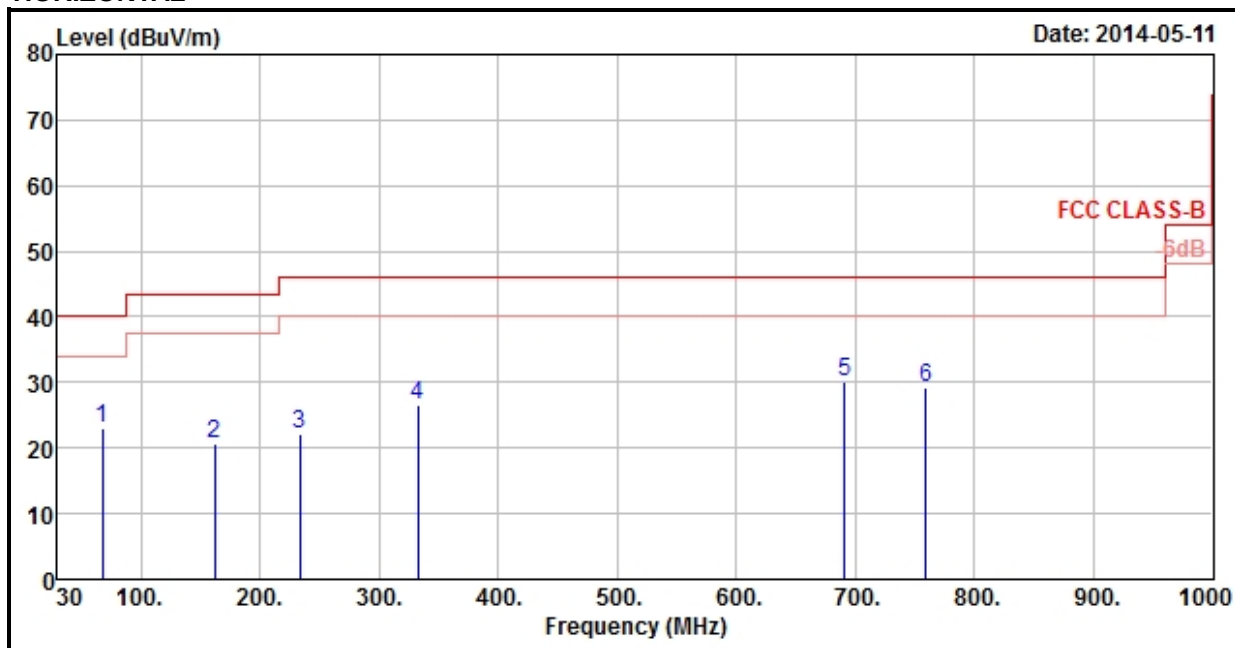

VERTICAL

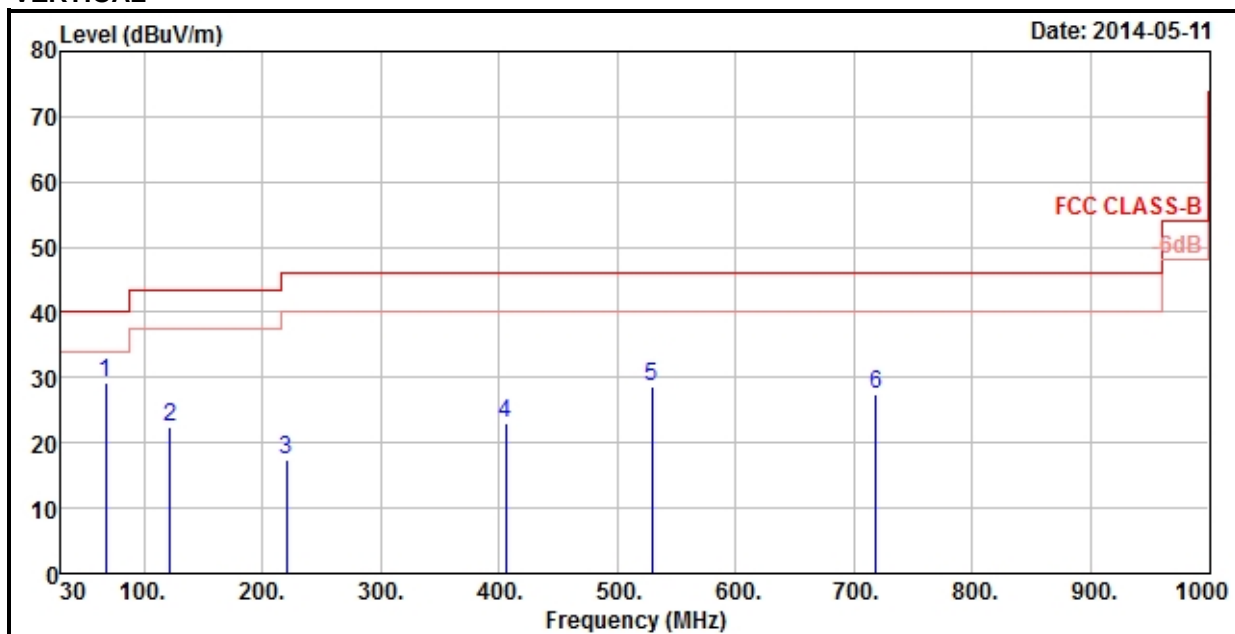

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
67.8	22.96	42.81	40	-17.04	11	0.88	31.73	136	28	Peak
162.03	20.67	38.58	43.5	-22.83	12.54	1.4	31.85	164	285	Peak
233.04	22.01	41.35	46	-23.99	10.75	1.75	31.84	154	223	Peak
332.9	26.54	42.45	46	-19.46	13.73	2.17	31.81	105	38	Peak
691.3	30.02	37.74	46	-15.98	20.71	3.4	31.83	185	233	Peak
759.2	29.24	35.42	46	-16.76	21.66	3.6	31.44	100	156	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
67.8	29.3	49.15	40	-10.7	11	0.88	31.73	165	233	Peak
122.07	22.45	42	43.5	-21.05	11.15	1.2	31.9	105	147	Peak
220.35	17.45	37.25	46	-28.55	10.22	1.69	31.71	174	226	Peak
405.7	23.01	37.16	46	-22.99	15.45	2.45	32.05	100	93	Peak
528.9	28.57	39.4	46	-17.43	17.97	2.88	31.68	100	188	Peak
718.6	27.37	34.47	46	-18.63	21.08	3.49	31.67	100	166	Peak


REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.

MODE D

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

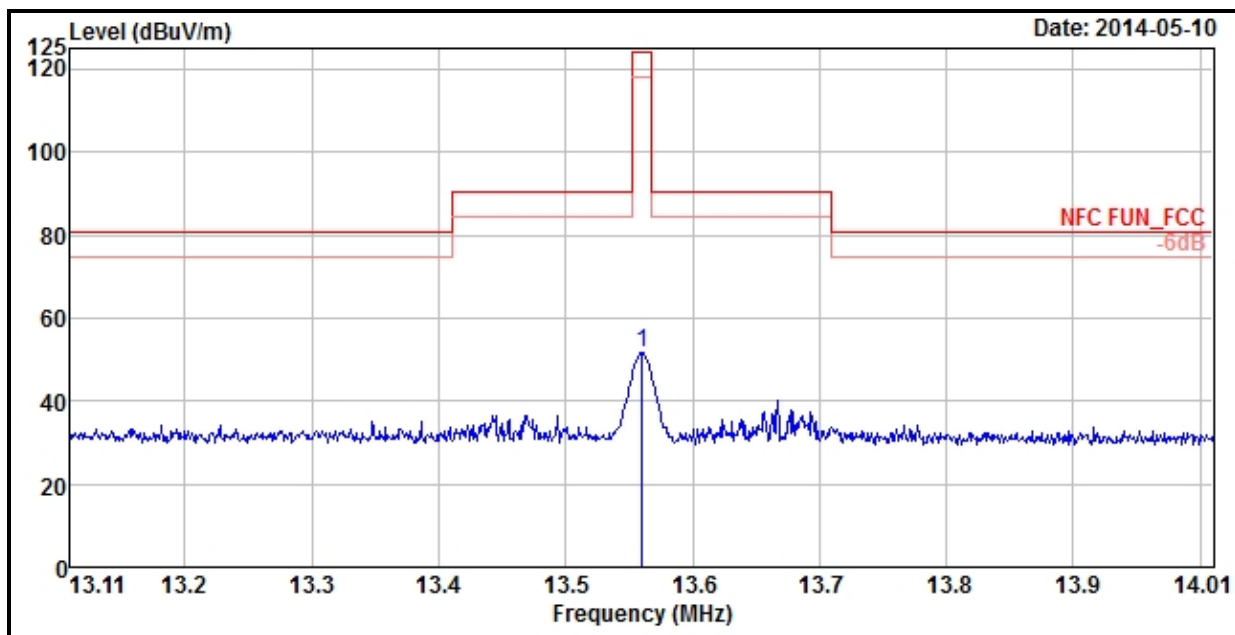

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	51.57	31.86	124	-72.43	19.71	100	178	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

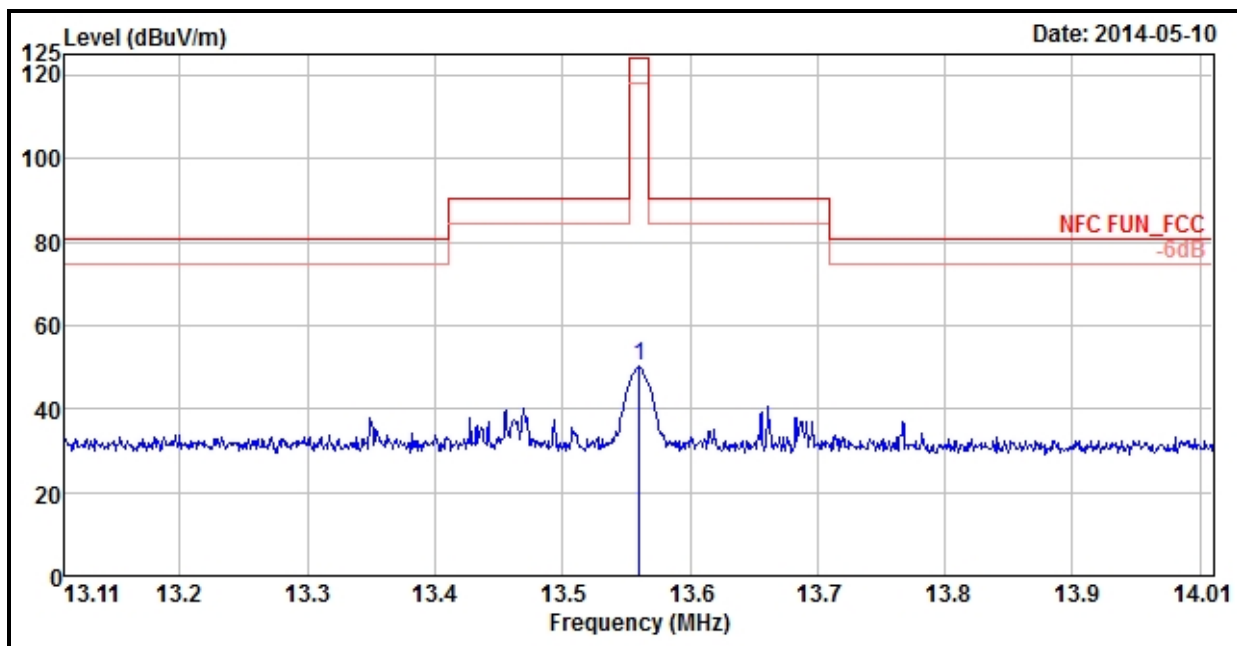

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
13.56	50.06	30.35	124	-73.94	19.71	100	80	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

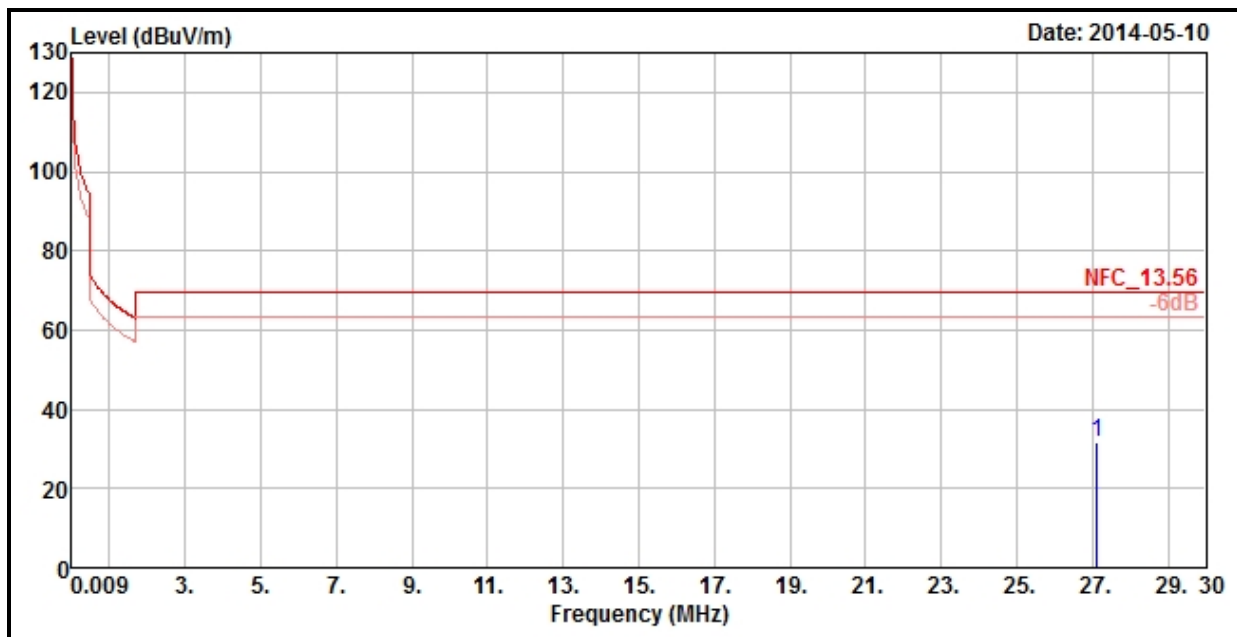


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	31.82	11.73	69.54	-37.72	20.09	100	0	Peak

- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

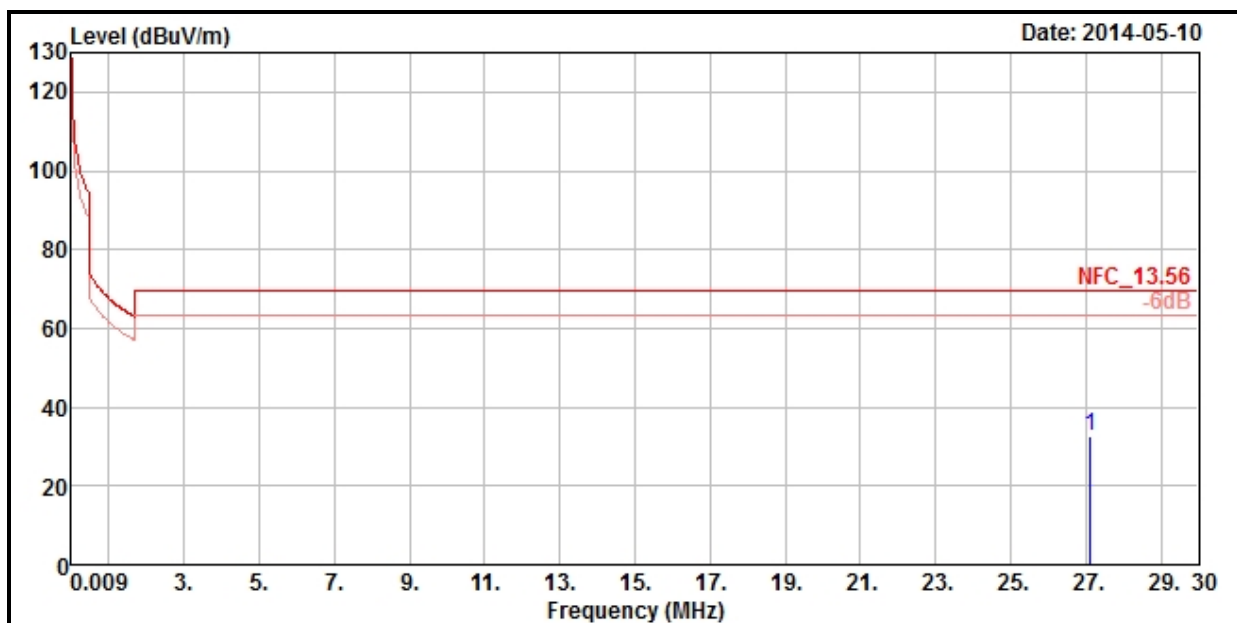


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M								
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
27.12	32.69	12.6	69.54	-36.85	20.09	100	360	Peak


- REMARKS:**
1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

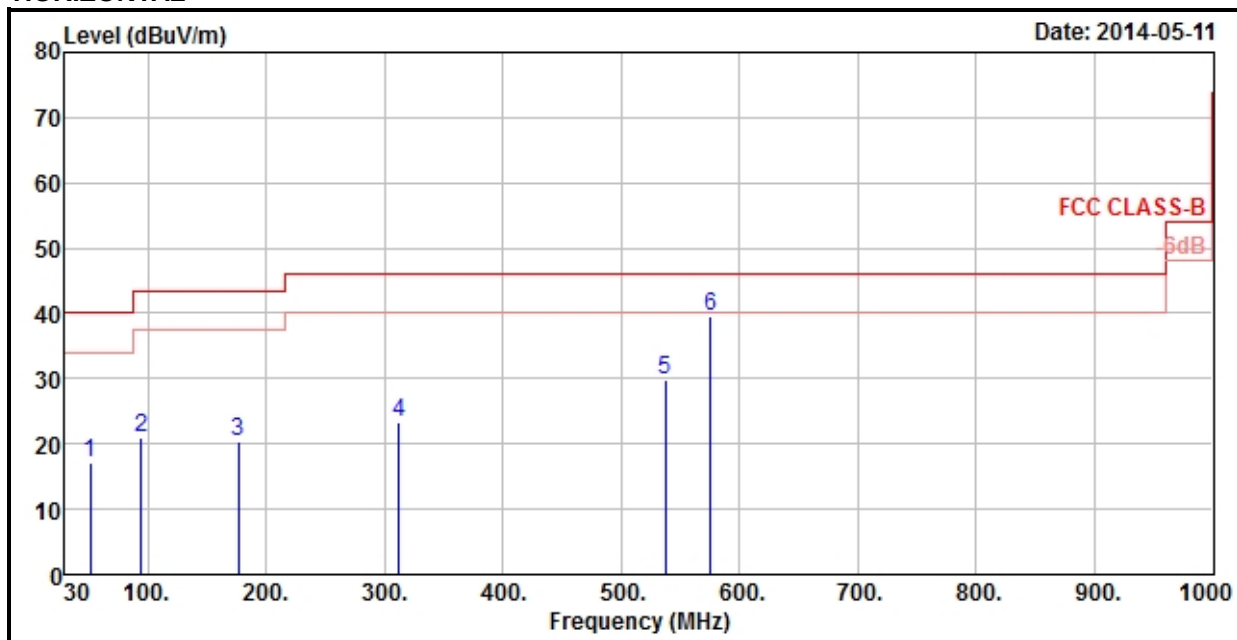

VERTICAL

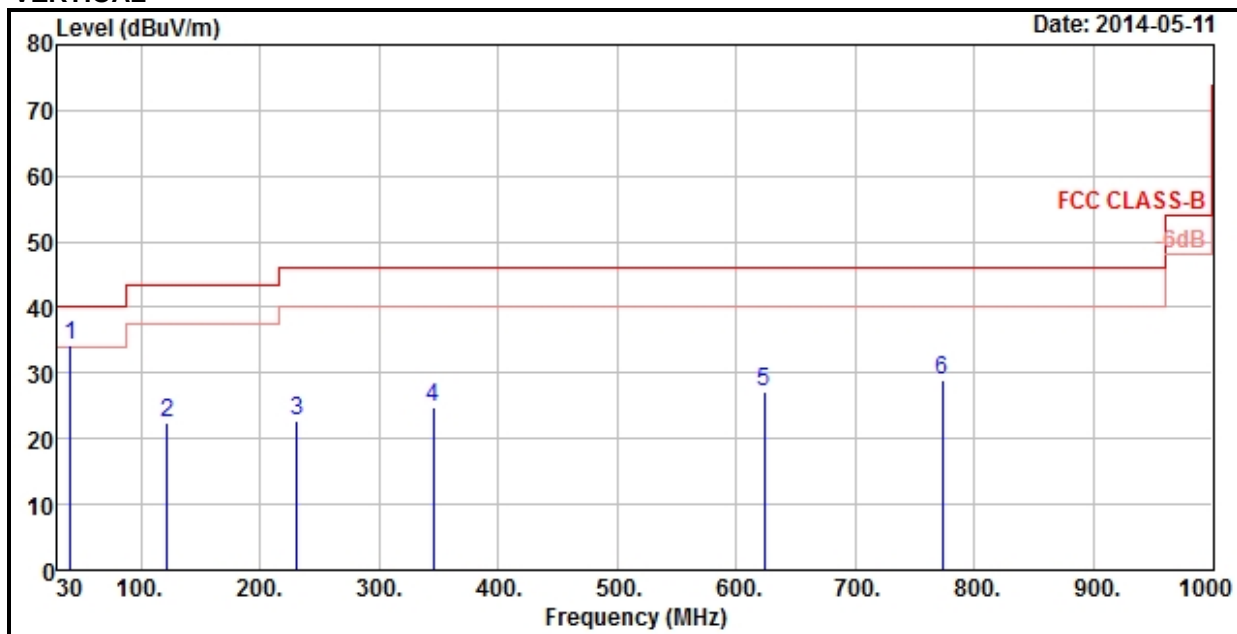

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
51.33	17.11	34.78	40	-22.89	12.87	0.77	31.31	100	278	Peak
94.8	20.82	43.06	43.5	-22.68	8.68	1.04	31.96	200	296	Peak
176.34	20.26	39.48	43.5	-23.24	11.1	1.48	31.8	154	258	Peak
311.9	23.28	39.88	46	-22.72	13.24	2.1	31.94	108	226	Peak
537.3	29.81	40.45	46	-16.19	18.17	2.91	31.72	105	269	Peak
575.8	39.46	49.48	46	-6.54	19.06	3.02	32.1	100	138	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
40.8	34.11	50.91	40	-5.89	13.55	0.67	31.02	185	207	Peak
122.07	22.45	42	43.5	-21.05	11.15	1.2	31.9	130	301	Peak
230.61	22.83	42.28	46	-23.17	10.66	1.74	31.85	185	224	Peak
345.5	24.67	40.26	46	-21.33	14.03	2.21	31.83	108	257	Peak
623.4	27.18	36.29	46	-18.82	19.89	3.16	32.16	169	266	Peak
773.2	28.97	34.83	46	-17.03	21.85	3.63	31.34	100	133	Peak

REMARKS:


1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.


MODE E

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

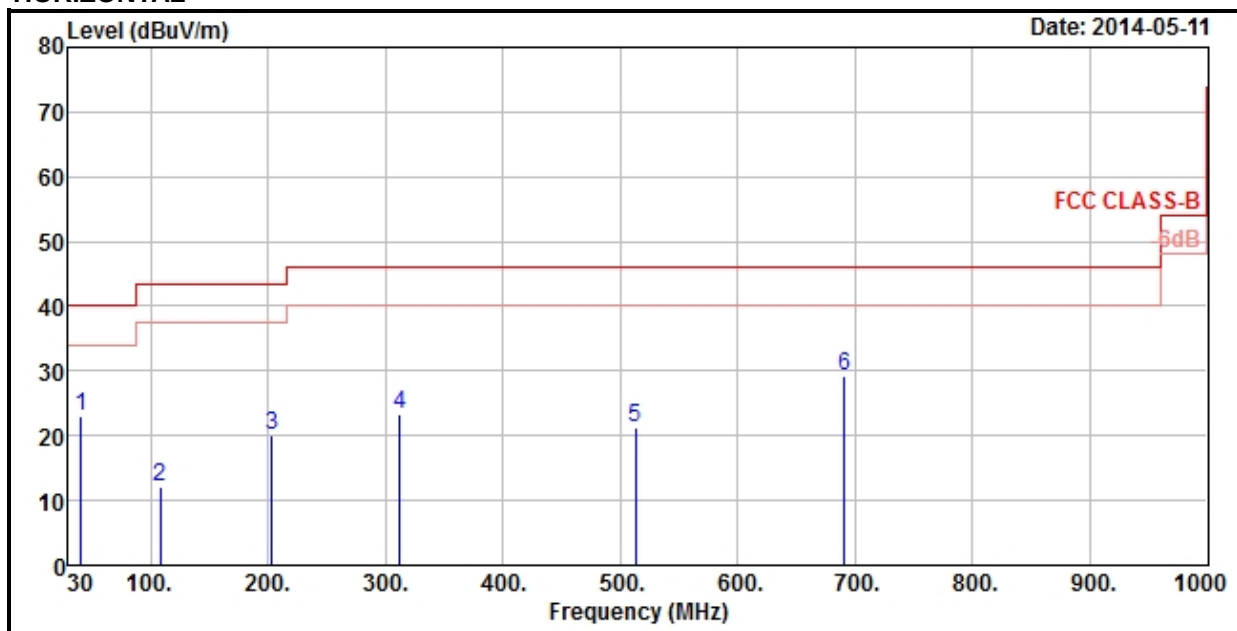

VERTICAL

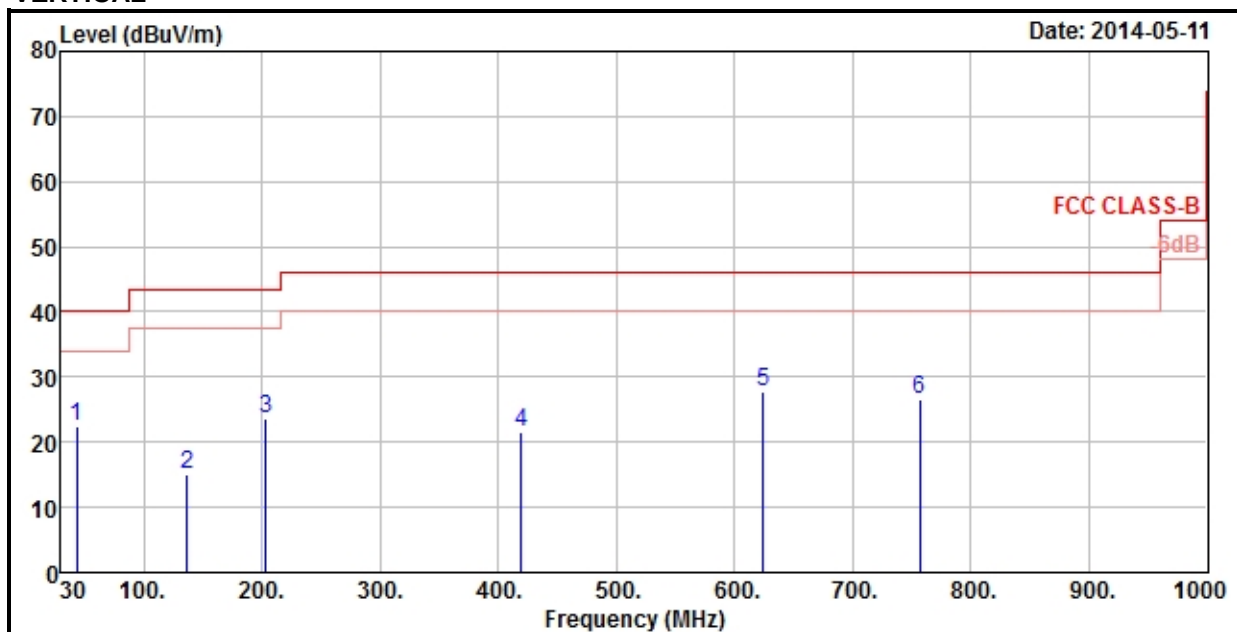

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
40.8	23.13	39.93	40	-16.87	13.55	0.67	31.02	159	330	Peak
108.3	12.15	32.98	43.5	-31.35	9.9	1.12	31.85	122	220	Peak
203.34	19.96	40.53	43.5	-23.54	9.52	1.61	31.7	100	150	Peak
311.9	23.42	40.02	46	-22.58	13.24	2.1	31.94	156	231	Peak
512.8	21.13	32.27	46	-24.87	17.62	2.82	31.58	100	188	Peak
691.3	29.29	37.01	46	-16.71	20.71	3.4	31.83	165	133	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
42.96	22.37	39.17	40	-17.63	13.58	0.7	31.08	100	69	Peak
136.65	15.12	33.41	43.5	-28.38	12.14	1.28	31.71	184	222	Peak
203.34	23.7	44.27	43.5	-19.8	9.52	1.61	31.7	100	313	Peak
419.7	21.66	35.48	46	-24.34	15.73	2.5	32.05	100	37	Peak
624.1	27.86	36.97	46	-18.14	19.89	3.16	32.16	145	267	Peak
757.1	26.45	32.64	46	-19.55	21.63	3.59	31.41	164	151	Peak

REMARKS:


1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.


MODE F

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

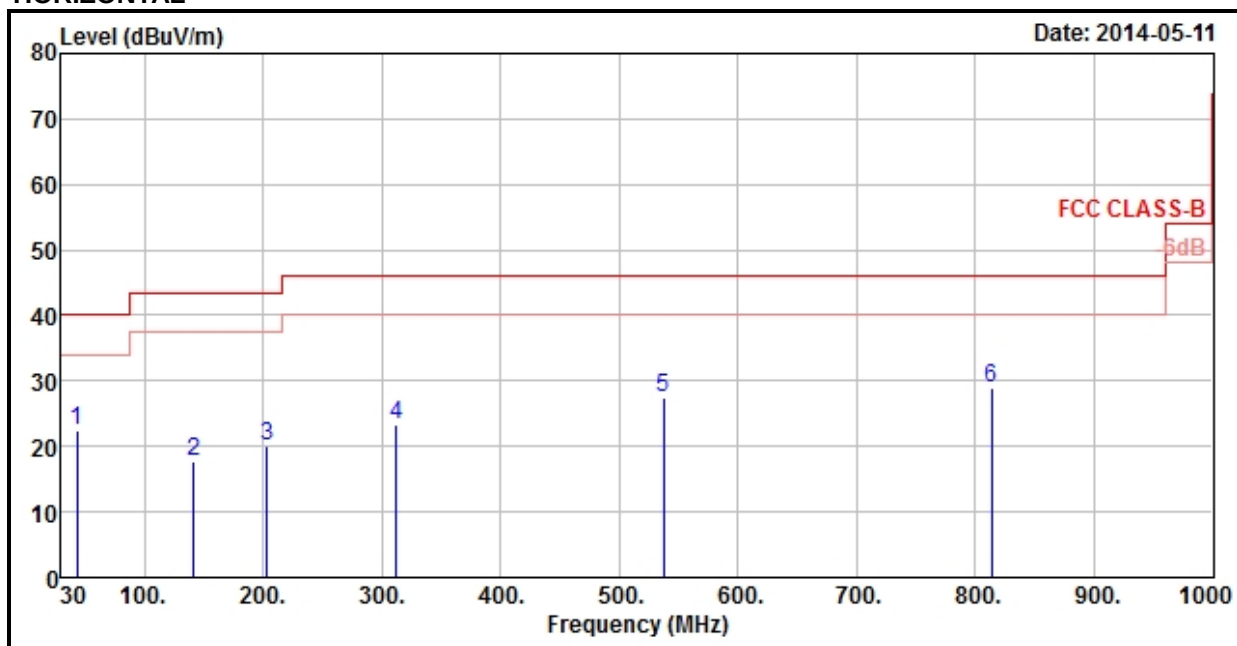

VERTICAL

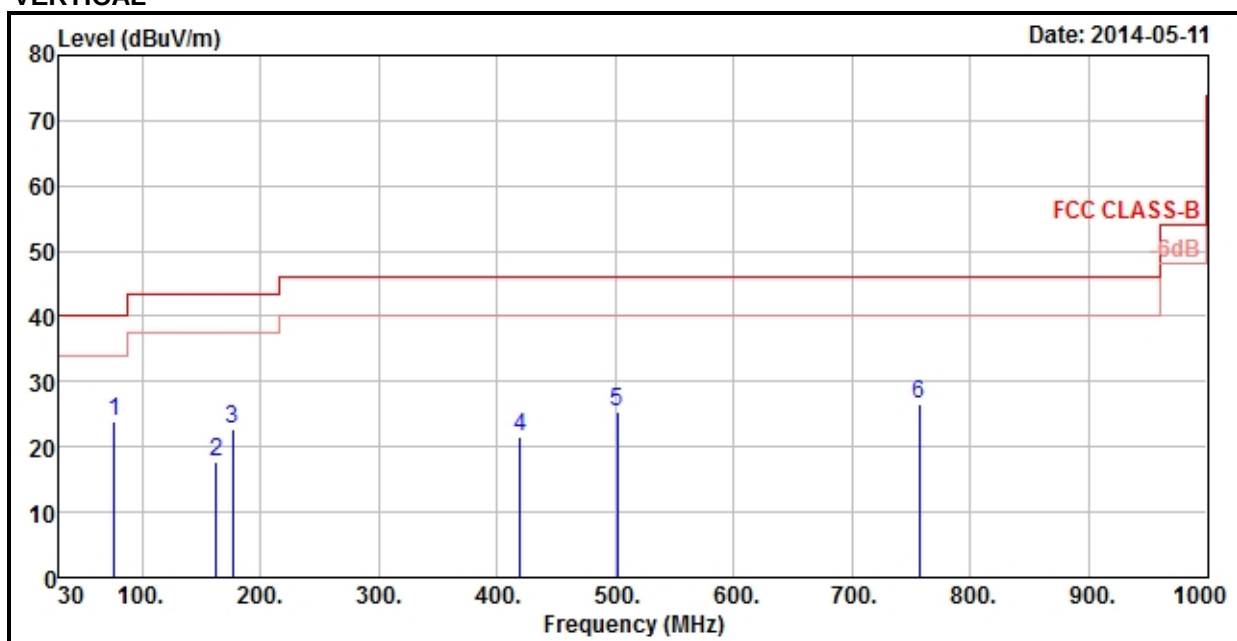

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
42.96	22.45	39.25	40	-17.55	13.58	0.7	31.08	162	324	Peak
141.24	17.83	35.75	43.5	-25.67	12.41	1.3	31.63	100	273	Peak
203.34	19.96	40.53	43.5	-23.54	9.52	1.61	31.7	100	152	Peak
311.9	23.42	40.02	46	-22.58	13.24	2.1	31.94	100	162	Peak
537.3	27.51	38.15	46	-18.49	18.17	2.91	31.72	100	188	Peak
813.8	28.94	34.32	46	-17.06	22.4	3.73	31.51	100	238	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
76.71	23.8	45.38	40	-16.2	9.09	0.95	31.62	196	243	Peak
162.84	17.79	35.77	43.5	-25.71	12.44	1.41	31.83	100	145	Peak
176.34	22.61	41.83	43.5	-20.89	11.1	1.48	31.8	105	287	Peak
419.7	21.66	35.48	46	-24.34	15.73	2.5	32.05	100	167	Peak
501.6	25.3	36.79	46	-20.7	17.35	2.78	31.62	133	24	Peak
757.1	26.45	32.64	46	-19.55	21.63	3.59	31.41	100	152	Peak

REMARKS:


1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.


MODE G

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

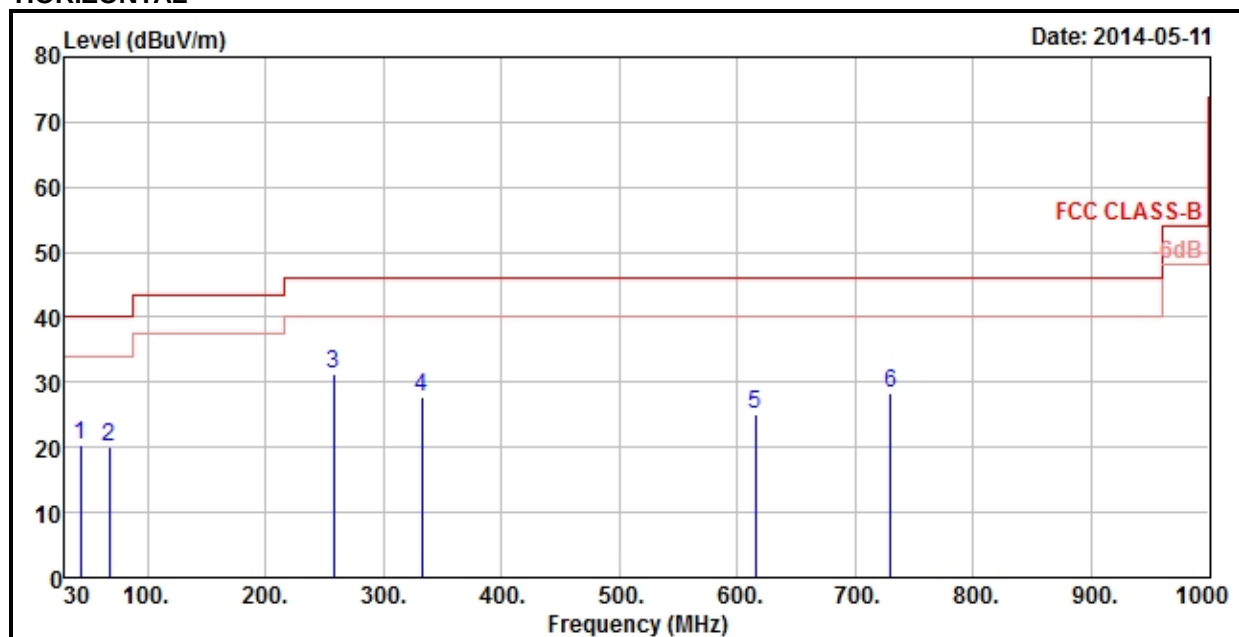

VERTICAL

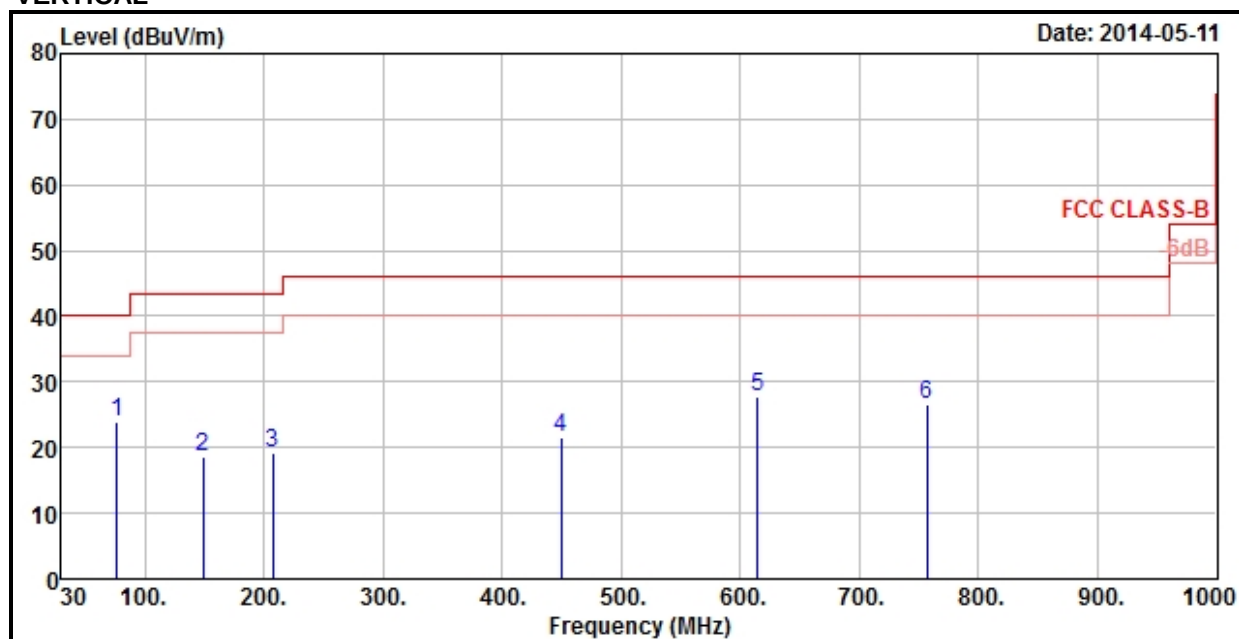

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
43.5	20.38	37.19	40	-19.62	13.59	0.71	31.11	151	231	Peak
67.8	20.18	40.03	40	-19.82	11	0.88	31.73	100	164	Peak
257.61	31.33	49.63	46	-14.67	11.71	1.86	31.87	100	333	Peak
332.9	27.71	43.62	46	-18.29	13.73	2.17	31.81	165	250	Peak
615	24.96	34.16	46	-21.04	19.79	3.13	32.12	187	222	Peak
729.8	28.2	35.05	46	-17.8	21.23	3.52	31.6	100	174	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
76.71	23.8	45.38	40	-16.2	9.09	0.95	31.62	154	232	Peak
149.07	18.46	36.05	43.5	-25.04	12.68	1.34	31.61	102	243	Peak
207.66	19.15	39.47	43.5	-24.35	9.69	1.63	31.64	100	265	Peak
449.8	21.49	34.52	46	-24.51	16.33	2.62	31.98	135	221	Peak
614.3	27.81	37.03	46	-18.19	19.77	3.13	32.12	185	97	Peak
757.1	26.45	32.64	46	-19.55	21.63	3.59	31.41	100	69	Peak

REMARKS:


1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.


MODE H

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Peter Weng

HORIZONTAL

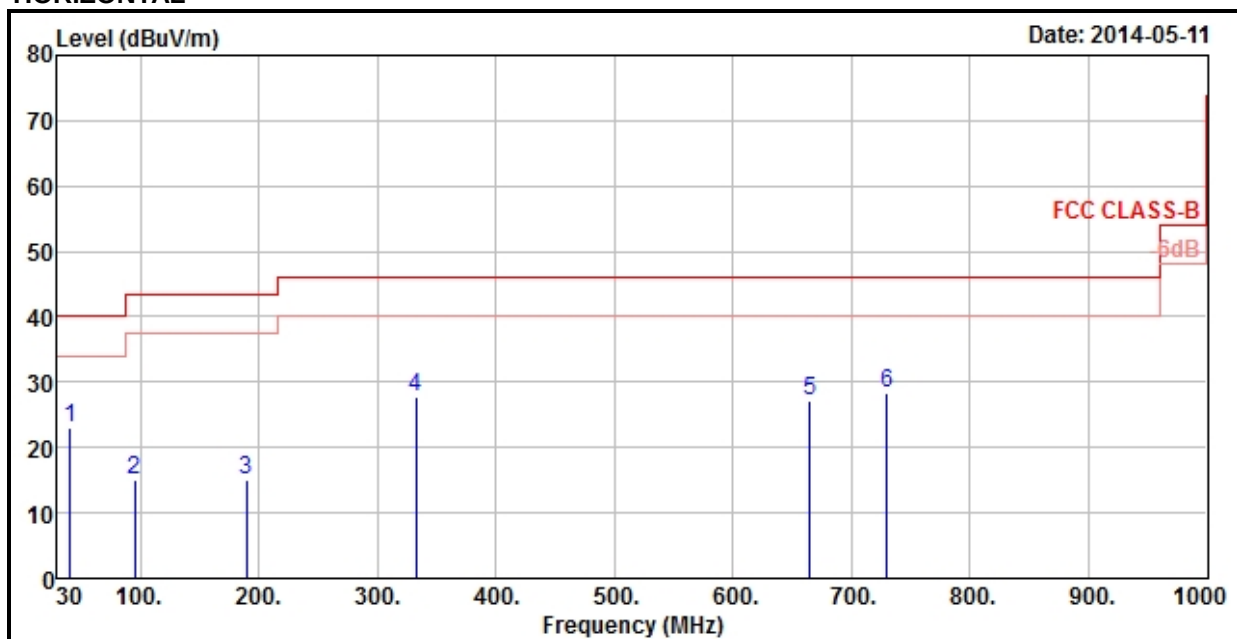

VERTICAL

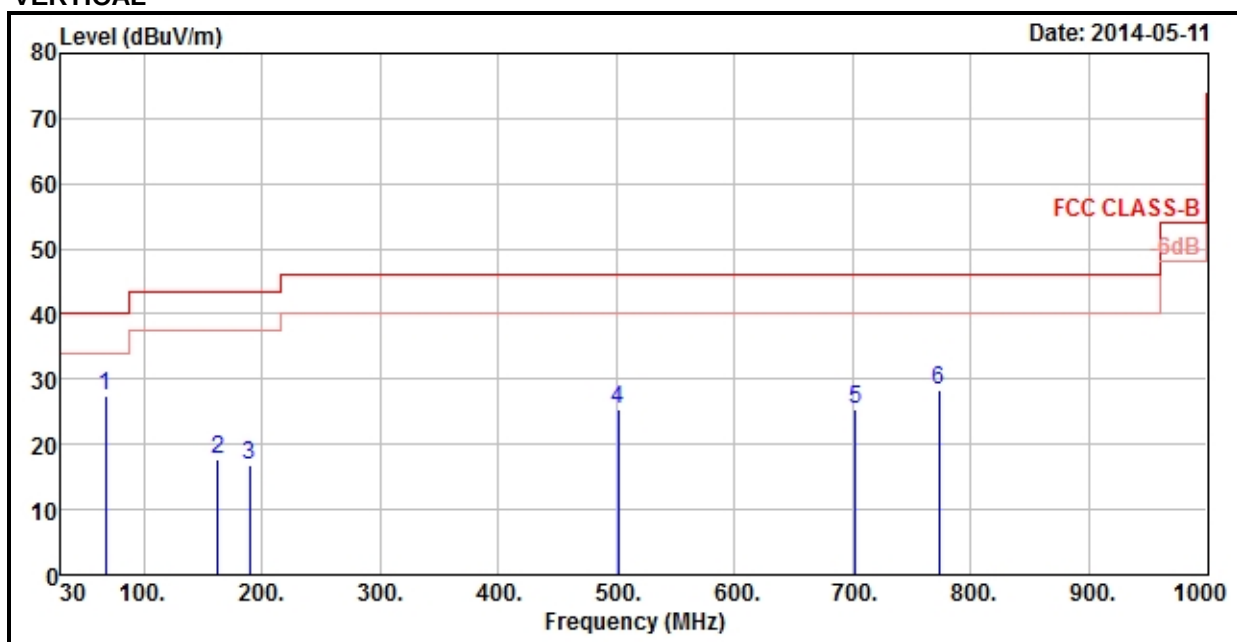

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
40.8	23.13	39.93	40	-16.87	13.55	0.67	31.02	185	224	Peak
95.07	15.05	37.29	43.5	-28.45	8.68	1.04	31.96	100	99	Peak
189.84	15.18	35.25	43.5	-28.32	10.05	1.55	31.67	100	265	Peak
332.9	27.71	43.62	46	-18.29	13.73	2.17	31.81	100	51	Peak
664.7	27.07	35.27	46	-18.93	20.39	3.3	31.89	166	321	Peak
729.8	28.2	35.05	46	-17.8	21.23	3.52	31.6	100	196	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
67.8	27.31	47.16	40	-12.69	11	0.88	31.73	152	228	Peak
162.84	17.79	35.77	43.5	-25.71	12.44	1.41	31.83	154	360	Peak
189.84	16.95	37.02	43.5	-26.55	10.05	1.55	31.67	100	352	Peak
501.6	25.3	36.79	46	-20.7	17.35	2.78	31.62	155	255	Peak
702.5	25.35	32.84	46	-20.65	20.85	3.44	31.78	100	108	Peak
773.2	28.2	34.06	46	-17.8	21.85	3.63	31.34	164	46	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Apr. 24, 2014	Apr. 23, 2015
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 23, 2013	Dec. 22, 2014
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 08, 2013	Jul. 07, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

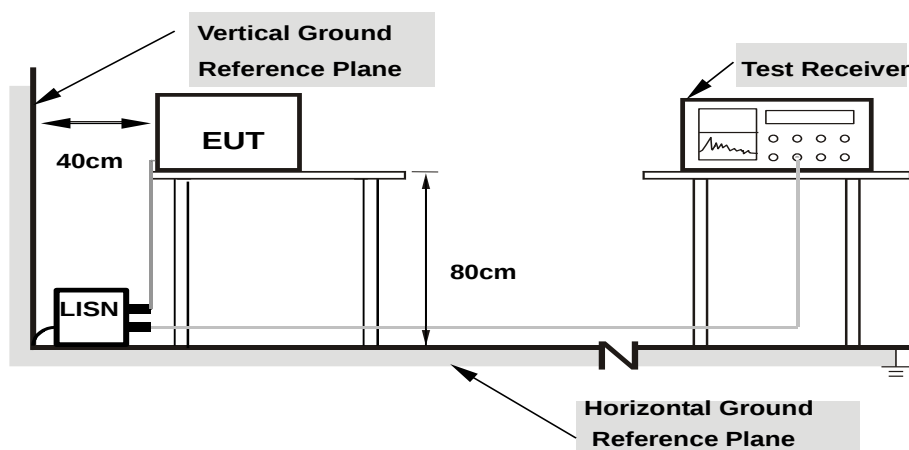

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


MODE A

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	50.28	35.50	50.55	35.77	64.98	54.98	-14.43	-19.21
2	0.24375	0.28	47.03	33.17	47.31	33.45	61.97	51.97	-14.65	-18.51
3	0.48594	0.31	42.15	30.88	42.46	31.19	56.24	46.24	-13.78	-15.05
4	0.97031	0.34	33.38	21.35	33.72	21.69	56.00	46.00	-22.28	-24.31
5	5.53516	0.45	24.21	19.95	24.66	20.40	60.00	50.00	-35.34	-29.60
6	13.55859	0.52	50.79	46.45	51.31	46.97	60.00	50.00	-8.69	-3.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

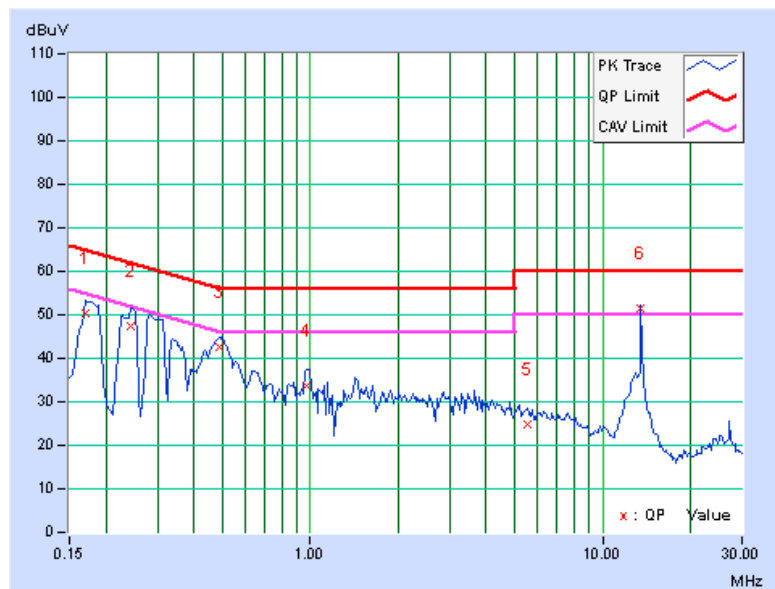


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	50.98	35.60	51.25	35.87	64.98	54.98	-13.73	-19.11
2	0.23984	0.28	49.00	35.56	49.28	35.84	62.10	52.10	-12.82	-16.26
3	0.53281	0.31	38.13	26.51	38.44	26.82	56.00	46.00	-17.56	-19.18
4	3.36719	0.42	27.18	19.11	27.60	19.53	56.00	46.00	-28.40	-26.47
5	8.19922	0.50	23.73	18.18	24.23	18.68	60.00	50.00	-35.77	-31.32
6	13.55859	0.55	48.94	45.26	49.49	45.81	60.00	50.00	-10.51	-4.19

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

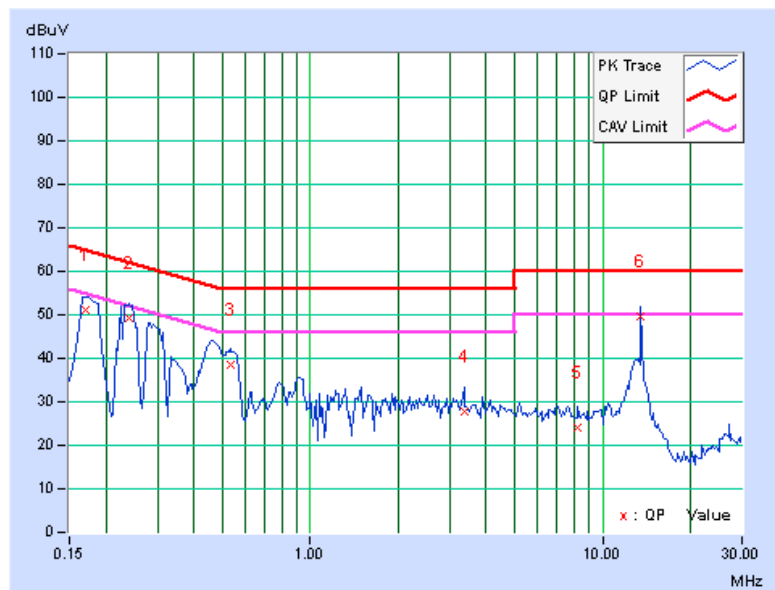


MODE B

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	57.53	41.82	57.80	42.09	64.98	54.98	-7.18	-12.89
2	0.28672	0.29	47.35	34.79	47.64	35.08	60.62	50.62	-12.98	-15.54
3	0.51328	0.31	34.31	22.46	34.62	22.77	56.00	46.00	-21.38	-23.23
4	1.67188	0.35	26.15	17.88	26.50	18.23	56.00	46.00	-29.50	-27.77
5	13.55859	0.52	49.66	45.94	50.18	46.46	60.00	50.00	-9.82	-3.54
6	18.36328	0.57	23.34	17.97	23.91	18.54	60.00	50.00	-36.09	-31.46

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

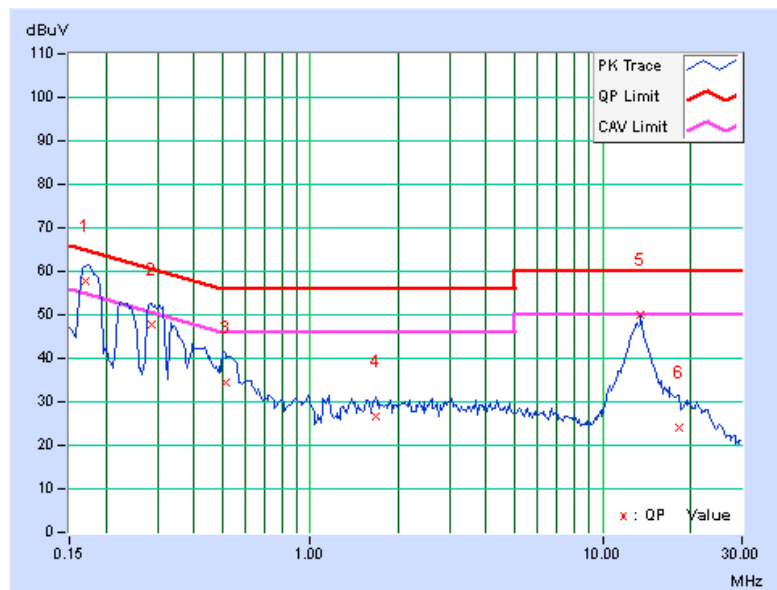


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.27	56.38	42.49	56.65	42.76	64.61	54.61	-7.96	-11.85
2	0.28281	0.29	41.18	25.65	41.47	25.94	60.73	50.73	-19.26	-24.79
3	0.56406	0.31	37.74	27.29	38.05	27.60	56.00	46.00	-17.95	-18.40
4	1.30078	0.35	28.46	19.38	28.81	19.73	56.00	46.00	-27.19	-26.27
5	13.56250	0.55	45.98	44.03	46.53	44.58	60.00	50.00	-13.47	-5.42
6	17.02734	0.60	24.54	19.18	25.14	19.78	60.00	50.00	-34.86	-30.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

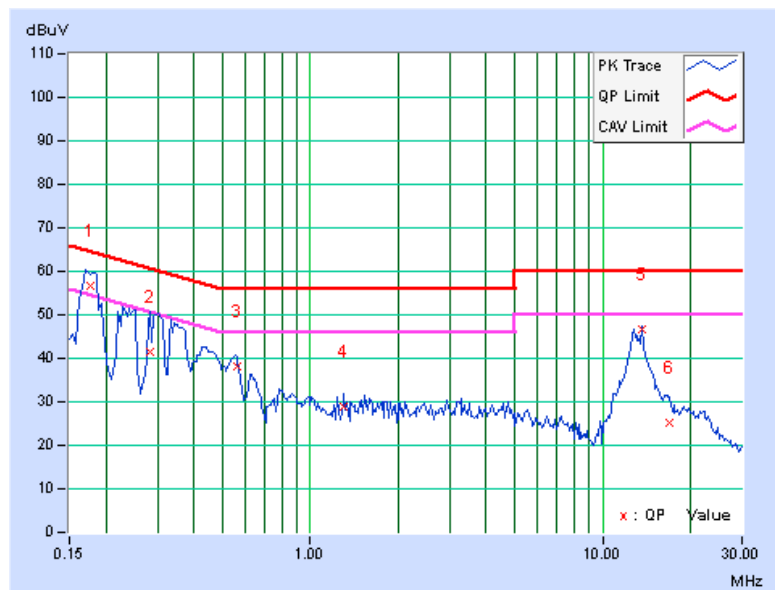


MODE C

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	55.09	39.25	55.36	39.52	64.98	54.98	-9.62	-15.46
2	0.24375	0.28	47.60	33.83	47.88	34.11	61.97	51.97	-14.08	-17.85
3	0.47031	0.30	40.68	29.72	40.98	30.02	56.51	46.51	-15.52	-16.48
4	1.46875	0.35	29.35	17.49	29.70	17.84	56.00	46.00	-26.30	-28.16
5	13.55859	0.52	47.65	45.48	48.17	46.00	60.00	50.00	-11.83	-4.00
6	27.11719	0.49	25.09	21.48	25.58	21.97	60.00	50.00	-34.42	-28.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

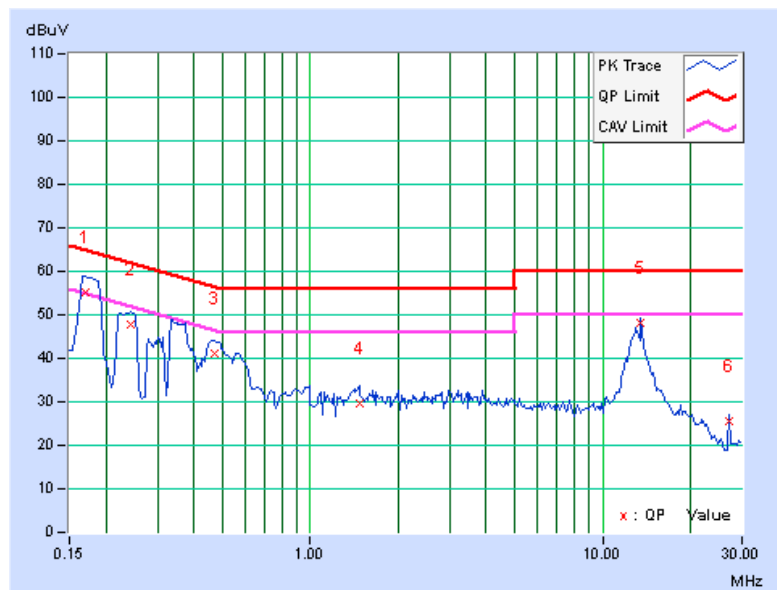


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.27	55.52	41.00	55.79	41.27	64.43	54.43	-8.63	-13.15
2	0.33750	0.29	44.68	32.30	44.97	32.59	59.26	49.26	-14.29	-16.67
3	0.56406	0.31	38.23	27.48	38.54	27.79	56.00	46.00	-17.46	-18.21
4	1.13281	0.34	29.09	18.71	29.43	19.05	56.00	46.00	-26.57	-26.95
5	13.55859	0.55	45.80	43.85	46.35	44.40	60.00	50.00	-13.65	-5.60
6	19.69141	0.64	22.31	17.63	22.95	18.27	60.00	50.00	-37.05	-31.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

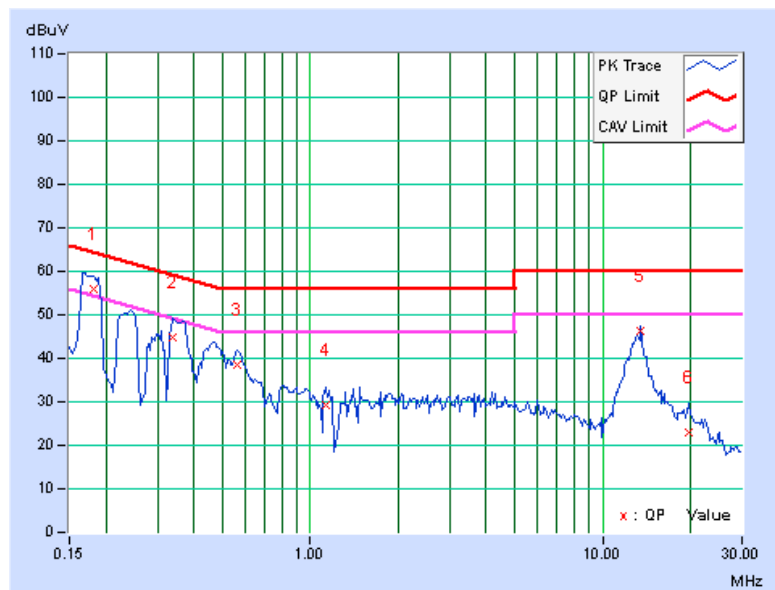


MODE D

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	55.09	39.25	55.36	39.52	64.98	54.98	-9.62	-15.46
2	0.33750	0.29	43.53	31.19	43.82	31.48	59.26	49.26	-15.44	-17.78
3	0.57188	0.31	36.08	24.53	36.39	24.84	56.00	46.00	-19.61	-21.16
4	2.04688	0.36	27.40	19.11	27.76	19.47	56.00	46.00	-28.24	-26.53
5	13.55859	0.52	48.59	46.05	49.11	46.57	60.00	50.00	-10.89	-3.43
6	15.86719	0.54	26.36	21.05	26.90	21.59	60.00	50.00	-33.10	-28.41

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

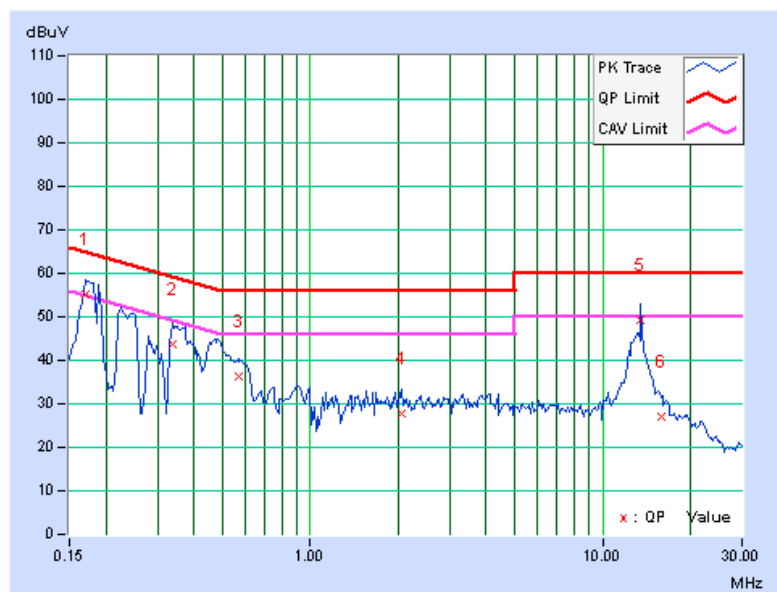


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.27	55.01	39.09	55.28	39.36	64.98	54.98	-9.70	-15.62
2	0.23203	0.28	49.35	37.47	49.63	37.75	62.38	52.38	-12.74	-14.62
3	0.48203	0.31	42.11	31.14	42.42	31.45	56.30	46.30	-13.89	-14.86
4	1.69922	0.36	29.50	19.84	29.86	20.20	56.00	46.00	-26.14	-25.80
5	13.55859	0.55	45.36	43.15	45.91	43.70	60.00	50.00	-14.09	-6.30
6	15.85156	0.58	25.48	19.81	26.06	20.39	60.00	50.00	-33.94	-29.61

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

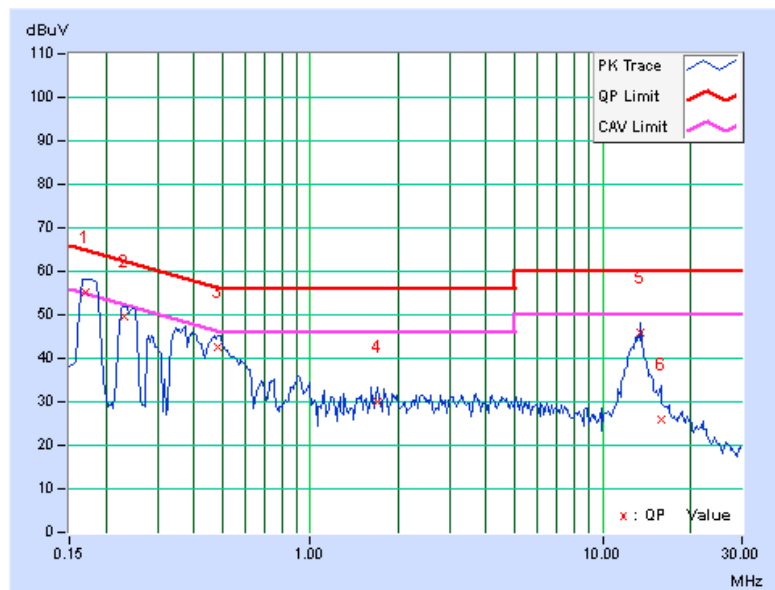


MODE E

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.28	45.45	39.46	45.73	39.74	63.58	53.58	-17.85	-13.84
2	0.26719	0.29	42.83	41.62	43.12	41.91	61.20	51.20	-18.09	-9.30
3	0.66563	0.32	42.33	40.27	42.65	40.59	56.00	46.00	-13.35	-5.41
4	2.72656	0.39	41.68	40.03	42.07	40.42	56.00	46.00	-13.93	-5.58
5	9.90625	0.50	42.65	38.38	43.15	38.88	60.00	50.00	-16.85	-11.12
6	13.55859	0.52	67.58	64.27	68.10	64.79	60.00	50.00	8.10	14.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

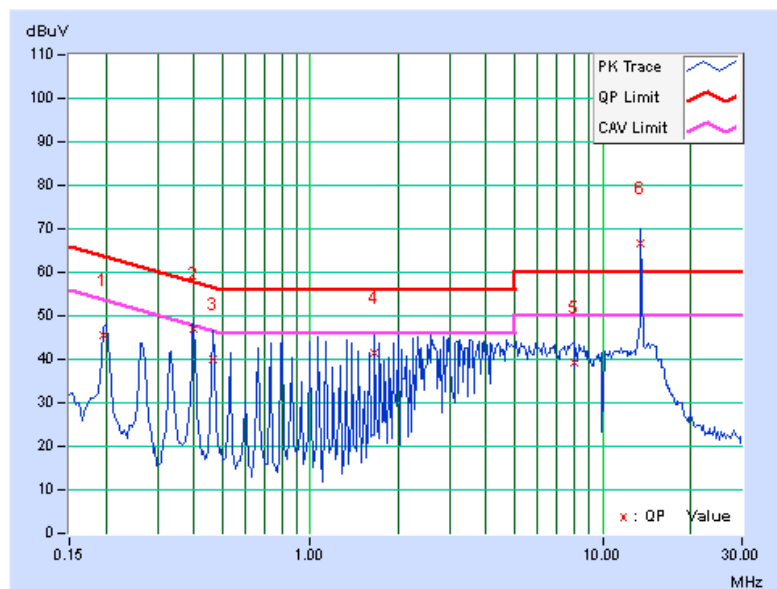


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	43.67	40.17	43.95	40.45	63.74	53.74	-19.79	-13.29
2	0.39609	0.30	44.22	43.78	44.52	44.08	57.93	47.93	-13.42	-3.86
3	0.66563	0.32	43.72	43.41	44.04	43.73	56.00	46.00	-11.96	-2.27
4	3.45703	0.42	43.78	41.69	44.20	42.11	56.00	46.00	-11.80	-3.89
5	7.83984	0.49	39.13	37.61	39.62	38.10	60.00	50.00	-20.38	-11.90
6	13.55859	0.55	66.18	62.79	66.73	63.34	60.00	50.00	6.73	13.34

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

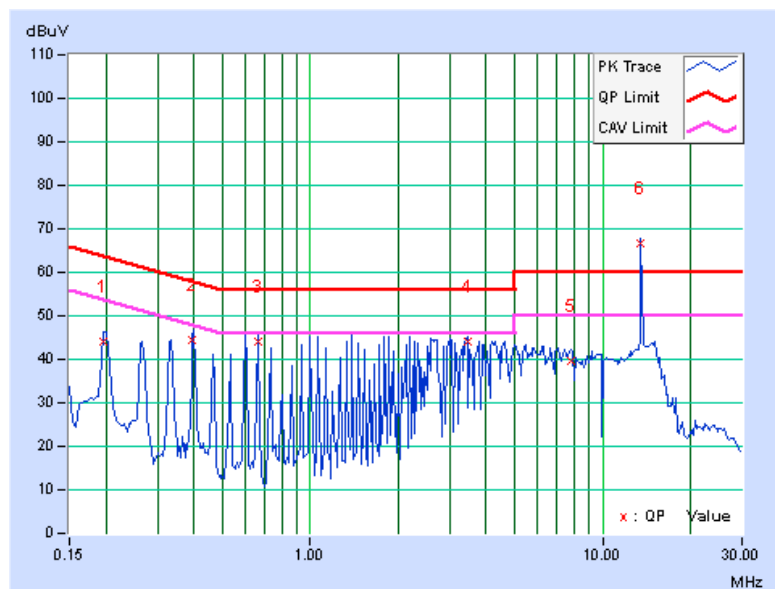


Test with suitable dummy load

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	43.96	39.66	44.24	39.94	63.74	53.74	-19.50	-13.80
2	0.39609	0.30	41.93	40.32	42.23	40.62	57.93	47.93	-15.71	-7.32
3	0.59922	0.31	44.46	40.27	44.77	40.58	56.00	46.00	-11.23	-5.42
4	3.58984	0.42	44.42	40.60	44.84	41.02	56.00	46.00	-11.16	-4.98
5	9.10547	0.49	43.57	39.56	44.06	40.05	60.00	50.00	-15.94	-9.95
6	13.55859	0.52	50.30	45.37	50.82	45.89	60.00	50.00	-9.18	-4.11

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

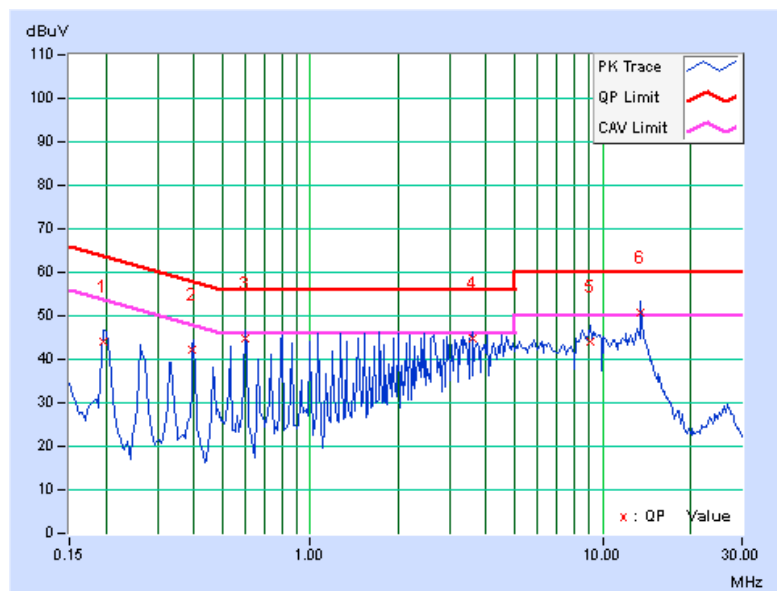


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	44.10	37.49	44.38	37.77	63.74	53.74	-19.36	-15.97
2	0.46641	0.30	41.33	41.05	41.63	41.35	56.58	46.58	-14.94	-5.22
3	0.86484	0.33	41.09	40.02	41.42	40.35	56.00	46.00	-14.58	-5.65
4	1.79297	0.36	40.41	36.25	40.77	36.61	56.00	46.00	-15.23	-9.39
5	9.44141	0.51	40.26	35.63	40.77	36.14	60.00	50.00	-19.23	-13.86
6	13.55859	0.55	47.93	43.99	48.48	44.54	60.00	50.00	-11.52	-5.46

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

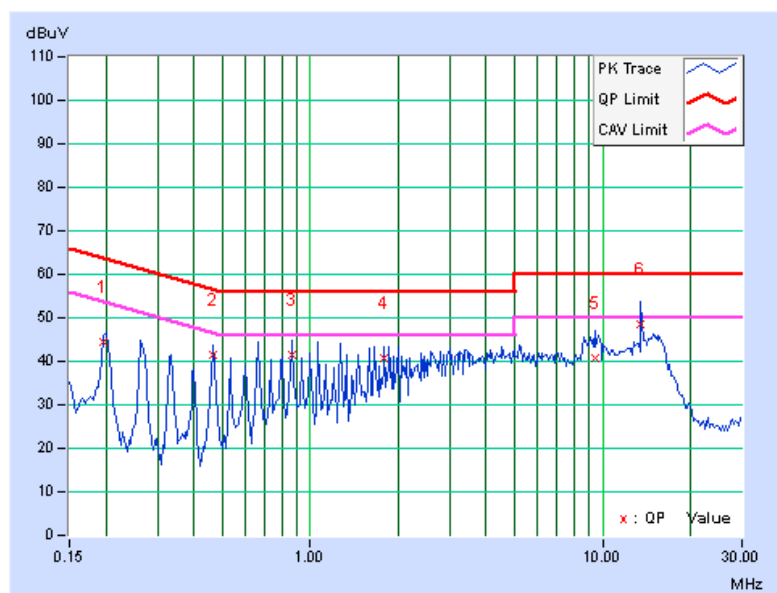


MODE F

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	44.90	39.27	45.18	39.55	63.74	53.74	-18.56	-14.19
2	0.46641	0.30	35.06	33.89	35.36	34.19	56.58	46.58	-21.21	-12.38
3	1.06250	0.34	42.37	41.24	42.71	41.58	56.00	46.00	-13.29	-4.42
4	3.65625	0.42	42.00	39.05	42.42	39.47	56.00	46.00	-13.58	-6.53
5	9.37109	0.49	43.52	40.18	44.01	40.67	60.00	50.00	-15.99	-9.33
6	13.55859	0.52	69.53	64.22	70.05	64.74	60.00	50.00	10.05	14.74

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

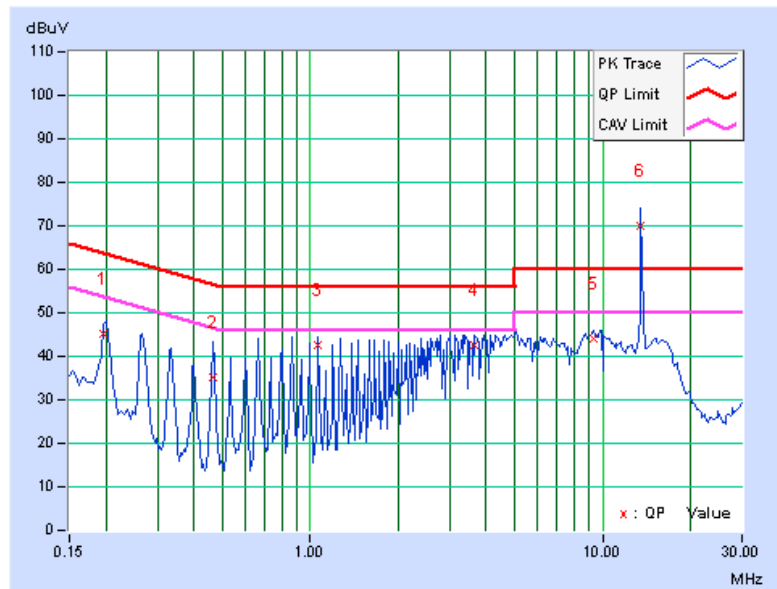


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.28	46.34	42.60	46.62	42.88	63.58	53.58	-16.96	-10.70
2	0.46641	0.30	45.85	40.46	46.15	40.76	56.58	46.58	-10.42	-5.81
3	1.06250	0.34	44.22	41.95	44.56	42.29	56.00	46.00	-11.44	-3.71
4	4.25391	0.44	42.00	41.54	42.44	41.98	56.00	46.00	-13.56	-4.02
5	8.17578	0.50	42.53	41.37	43.03	41.87	60.00	50.00	-16.97	-8.13
6	13.55859	0.55	68.19	63.94	68.74	64.49	60.00	50.00	8.74	14.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

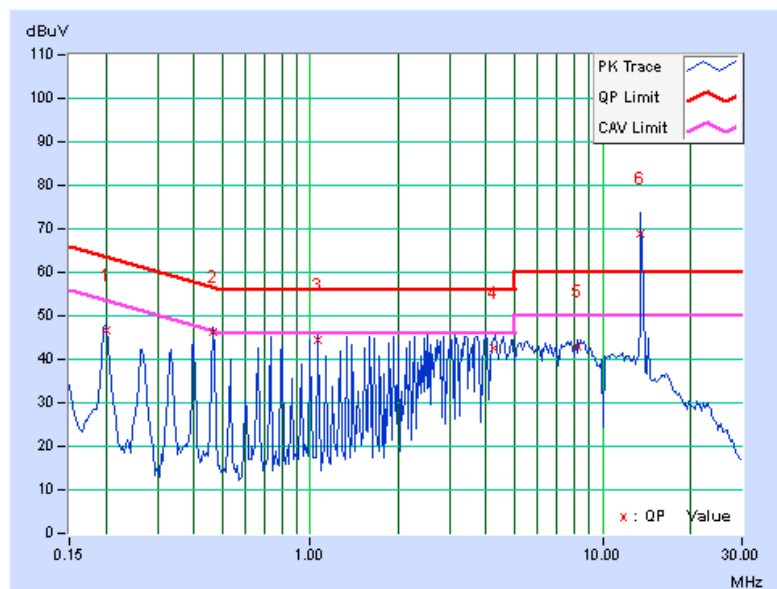


Test with suitable dummy load

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.28	46.14	42.44	46.42	42.72	63.58	53.58	-17.16	-10.86
2	0.46641	0.30	45.98	41.62	46.28	41.92	56.58	46.58	-10.29	-4.65
3	0.73203	0.32	43.77	43.48	44.09	43.80	56.00	46.00	-11.91	-2.20
4	2.79297	0.39	43.97	39.89	44.36	40.28	56.00	46.00	-11.64	-5.72
5	8.57422	0.48	40.14	35.08	40.62	35.56	60.00	50.00	-19.38	-14.44
6	13.55859	0.52	49.23	45.83	49.75	46.35	60.00	50.00	-10.25	-3.65

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

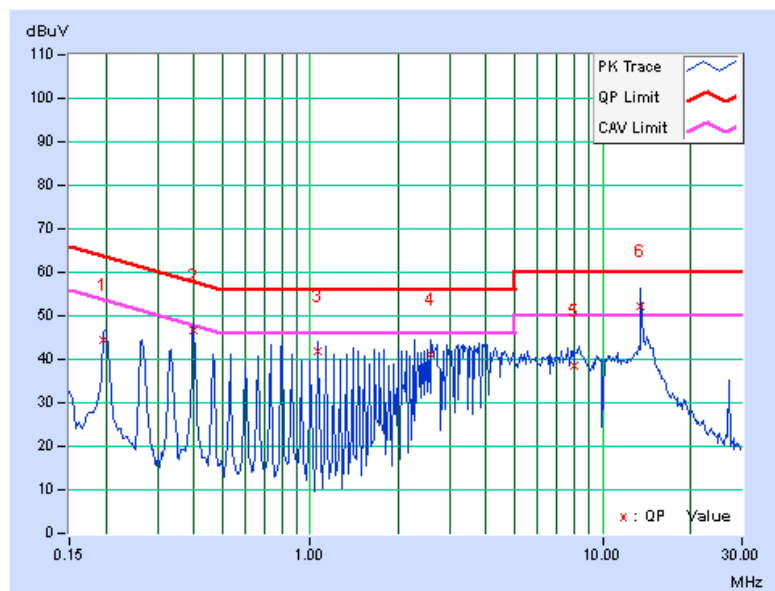


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.26719	0.29	42.95	40.39	43.24	40.68	61.20	51.20	-17.97	-10.53
2	0.40000	0.30	44.80	44.25	45.10	44.55	57.85	47.85	-12.75	-3.30
3	0.66563	0.32	41.44	40.50	41.76	40.82	56.00	46.00	-14.24	-5.18
4	2.19531	0.38	42.56	41.28	42.94	41.66	56.00	46.00	-13.06	-4.34
5	7.04688	0.48	40.06	38.62	40.54	39.10	60.00	50.00	-19.46	-10.90
6	13.55859	0.55	46.11	42.72	46.66	43.27	60.00	50.00	-13.34	-6.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

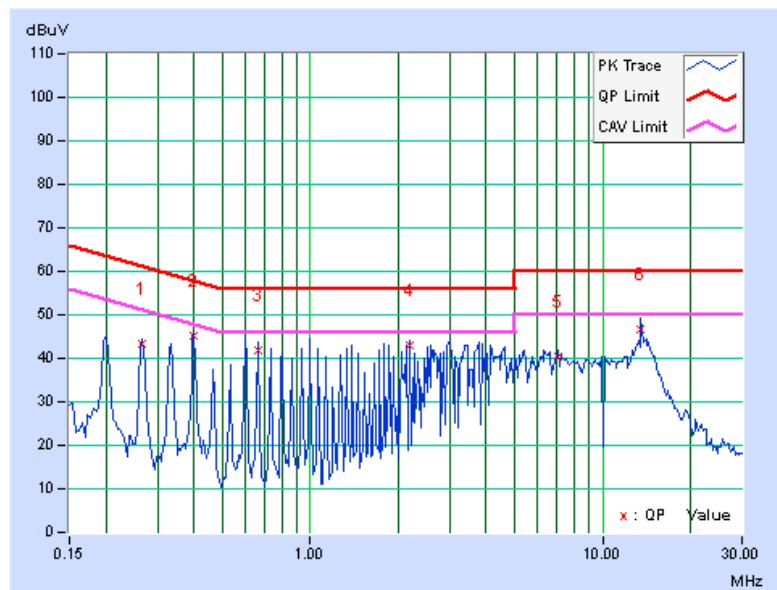


MODE G

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.28	45.38	41.62	45.66	41.90	63.58	53.58	-17.92	-11.68
2	0.39609	0.30	42.16	41.50	42.46	41.80	57.93	47.93	-15.48	-6.14
3	0.79453	0.33	41.07	40.91	41.40	41.24	56.00	46.00	-14.60	-4.76
4	2.66016	0.38	44.30	40.84	44.68	41.22	56.00	46.00	-11.32	-4.78
5	8.64063	0.48	43.44	40.24	43.92	40.72	60.00	50.00	-16.08	-9.28
6	13.55859	0.52	67.51	64.20	68.03	64.72	60.00	50.00	8.03	14.72

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

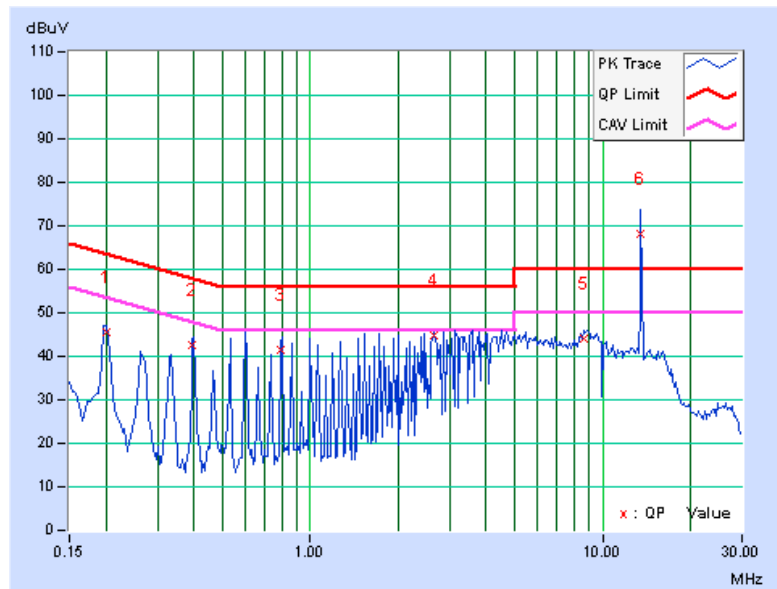


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.28	46.59	43.04	46.87	43.32	63.58	53.58	-16.71	-10.26
2	0.46641	0.30	45.17	41.70	45.47	42.00	56.58	46.58	-11.10	-4.57
3	0.73203	0.32	43.91	40.72	44.23	41.04	56.00	46.00	-11.77	-4.96
4	2.46094	0.39	42.61	42.61	43.00	43.00	56.00	46.00	-13.00	-3.00
5	8.83984	0.50	40.91	37.86	41.41	38.36	60.00	50.00	-18.59	-11.64
6	13.55859	0.55	68.54	64.12	69.09	64.67	60.00	50.00	9.09	14.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

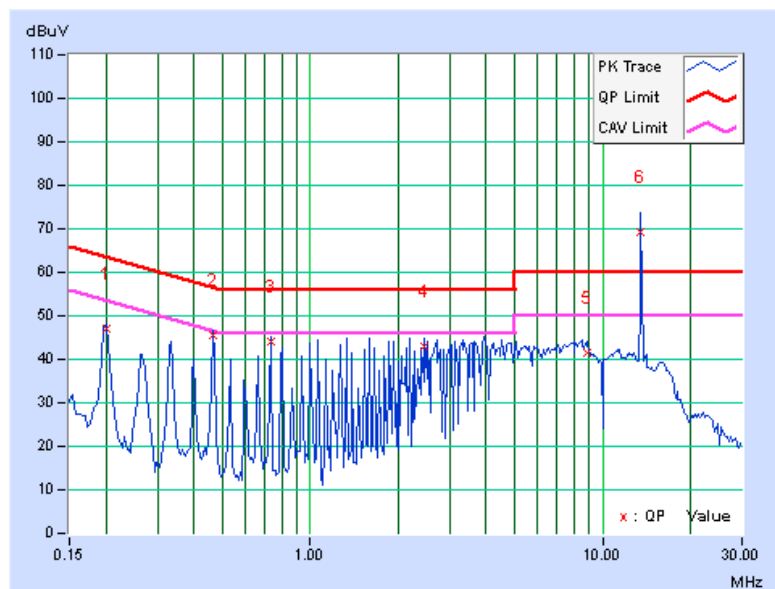


Test with suitable dummy load

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	44.97	41.17	45.25	41.45	63.74	53.74	-18.49	-12.29
2	0.40000	0.30	45.22	41.85	45.52	42.15	57.85	47.85	-12.33	-5.70
3	1.32813	0.35	41.94	41.35	42.29	41.70	56.00	46.00	-13.71	-4.30
4	3.98828	0.43	40.43	36.74	40.86	37.17	56.00	46.00	-15.14	-8.83
5	8.10938	0.48	39.32	36.94	39.80	37.42	60.00	50.00	-20.20	-12.58
6	13.55859	0.52	49.02	45.76	49.54	46.28	60.00	50.00	-10.46	-3.72

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

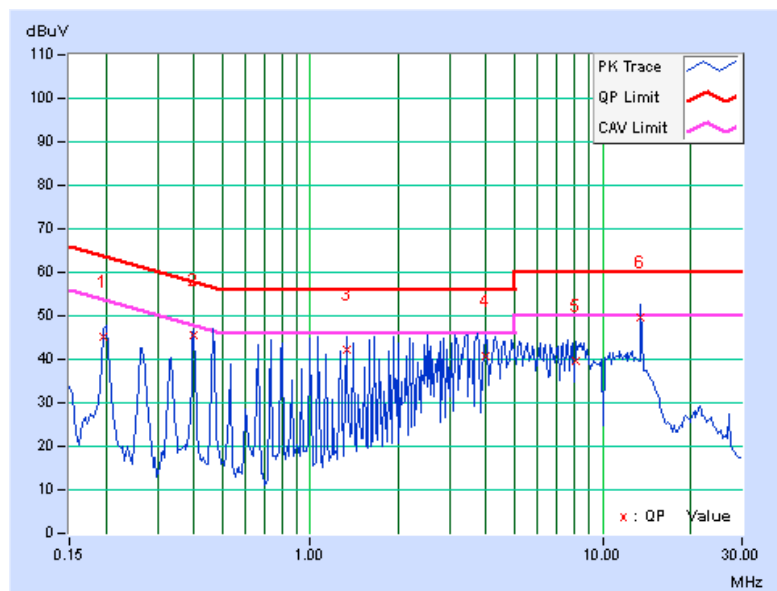


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.26719	0.29	43.19	40.59	43.48	40.88	61.20	51.20	-17.73	-10.33
2	0.40000	0.30	44.90	41.33	45.20	41.63	57.85	47.85	-12.65	-6.22
3	0.99766	0.34	43.03	41.65	43.37	41.99	56.00	46.00	-12.63	-4.01
4	3.32422	0.42	41.71	41.38	42.13	41.80	56.00	46.00	-13.87	-4.20
5	7.64844	0.49	38.09	35.95	38.58	36.44	60.00	50.00	-21.42	-13.56
6	13.56250	0.55	46.18	43.03	46.73	43.58	60.00	50.00	-13.27	-6.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

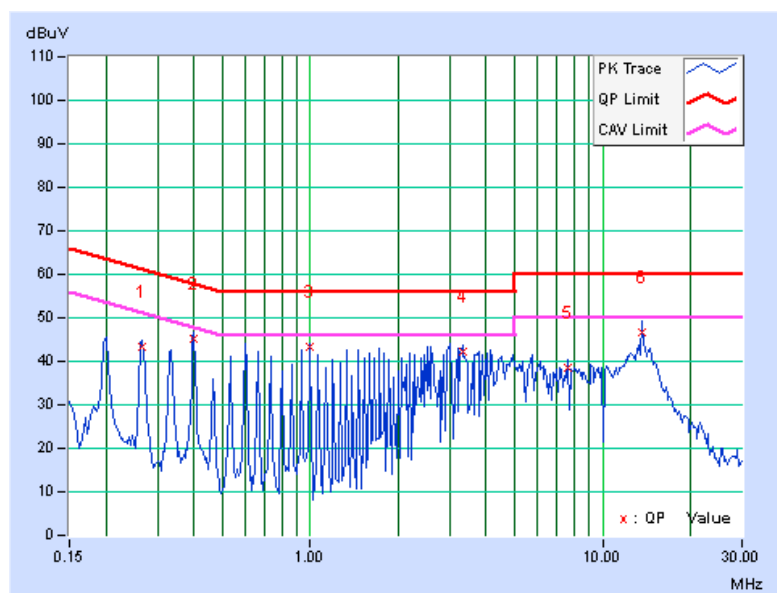


MODE H

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	45.83	42.48	46.11	42.76	63.74	53.74	-17.63	-10.98
2	0.40000	0.30	38.04	33.80	38.34	34.10	57.85	47.85	-19.51	-13.75
3	0.79844	0.33	37.89	36.89	38.22	37.22	56.00	46.00	-17.78	-8.78
4	3.58984	0.42	41.11	37.67	41.53	38.09	56.00	46.00	-14.47	-7.91
5	9.17578	0.49	37.53	33.44	38.02	33.93	60.00	50.00	-21.98	-16.07
6	13.55859	0.52	68.20	65.89	68.72	66.41	60.00	50.00	8.72	16.41

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

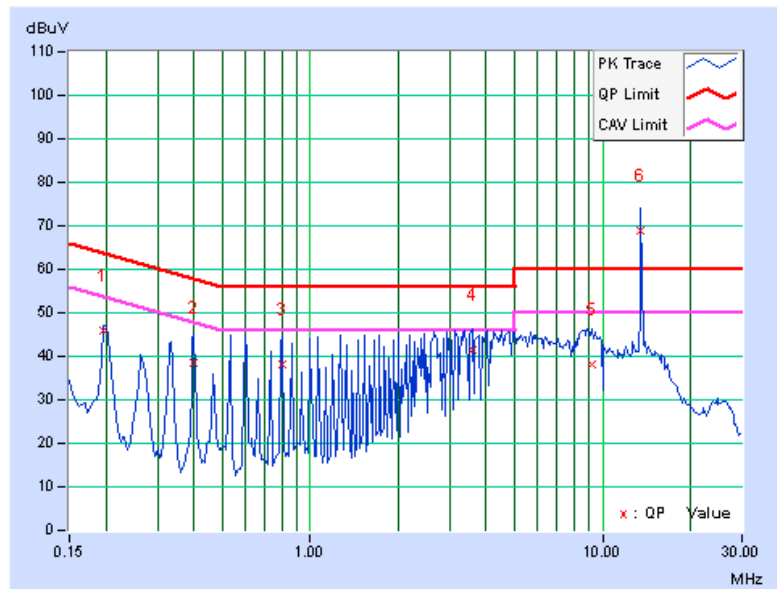


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	46.06	42.38	46.34	42.66	63.74	53.74	-17.40	-11.08
2	0.46641	0.30	44.14	43.56	44.44	43.86	56.58	46.58	-12.13	-2.71
3	1.59375	0.36	42.96	42.53	43.32	42.89	56.00	46.00	-12.68	-3.11
4	3.45313	0.42	36.27	31.56	36.69	31.98	56.00	46.00	-19.31	-14.02
5	8.30859	0.50	42.38	38.26	42.88	38.76	60.00	50.00	-17.12	-11.24
6	13.55859	0.55	68.30	64.97	68.85	65.52	60.00	50.00	8.85	15.52

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value
6. No. 6 is NFC signal inductive with measurement system. Please see the test result for EUT with a suitable dummy load.

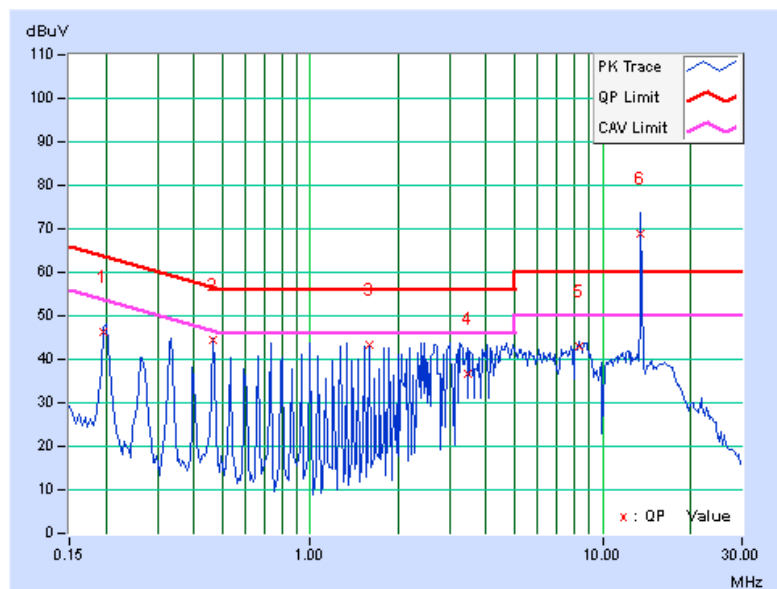


Test with suitable dummy load

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	44.10	40.13	44.38	40.41	63.74	53.74	-19.36	-13.33
2	0.40000	0.30	46.45	41.93	46.75	42.23	57.85	47.85	-11.10	-5.62
3	1.06250	0.34	41.68	40.54	42.02	40.88	56.00	46.00	-13.98	-5.12
4	2.59375	0.38	40.88	38.69	41.26	39.07	56.00	46.00	-14.74	-6.93
5	8.04297	0.48	38.05	34.09	38.53	34.57	60.00	50.00	-21.47	-15.43
6	13.55859	0.52	51.80	46.06	52.32	46.58	60.00	50.00	-7.68	-3.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

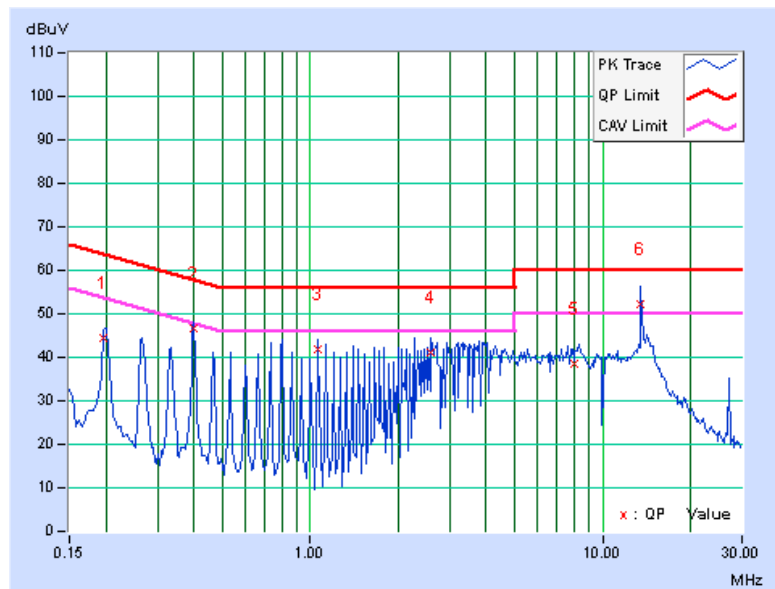


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.28	43.65	39.66	43.93	39.94	63.74	53.74	-19.81	-13.80
2	0.39609	0.30	44.20	43.48	44.50	43.78	57.93	47.93	-13.44	-4.16
3	0.73203	0.32	39.09	38.26	39.41	38.58	56.00	46.00	-16.59	-7.42
4	3.65625	0.43	40.36	37.63	40.79	38.06	56.00	46.00	-15.21	-7.94
5	9.77344	0.52	36.16	33.23	36.68	33.75	60.00	50.00	-23.32	-16.25
6	13.56250	0.55	45.37	42.80	45.92	43.35	60.00	50.00	-14.08	-6.65

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

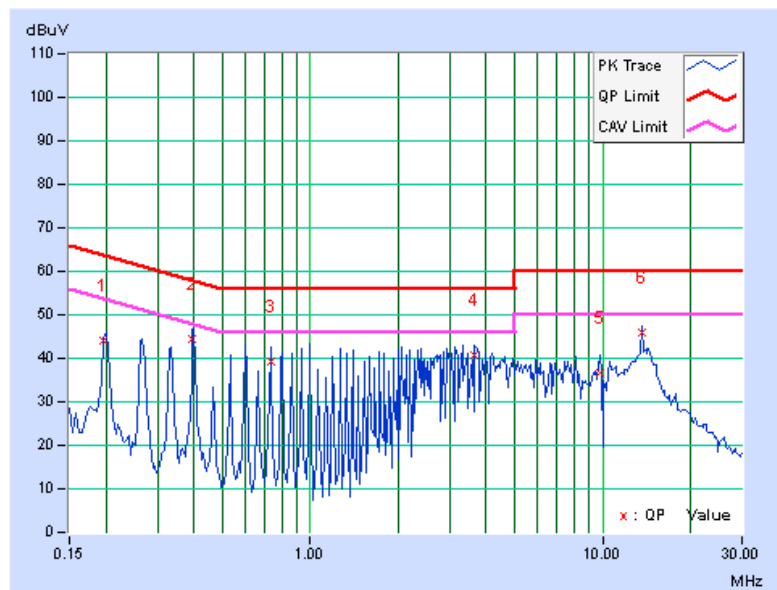

4.3 FREQUENCY STABILITY

4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSU43	101261	Dec. 21, 2013	Dec. 20, 2014
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 10, 2013	Jun. 09, 2014

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% range and the frequency record.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

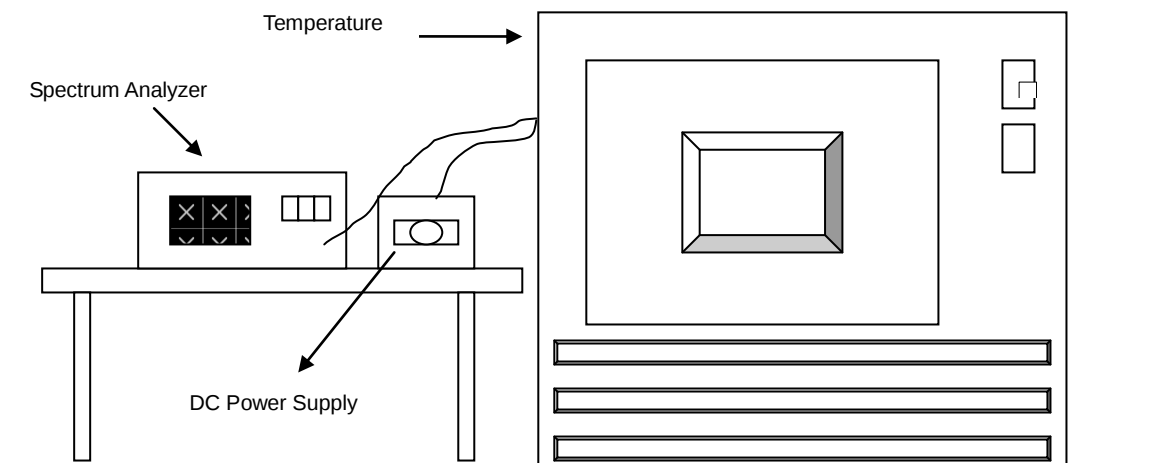

4.3.6 EUT OPERATING CONDITION

Same as Item 4.1.6.

4.3.7 TEST RESULTS

MODE A

FREQUENCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	3.8	13.560031	0.00023	13.560023	0.00017	13.560032	0.00024	13.560021	0.00015
40	3.8	13.560022	0.00016	13.560024	0.00018	13.560018	0.00013	13.560013	0.00010
30	3.8	13.559965	-0.00026	13.559943	-0.00042	13.559962	-0.00028	13.559965	-0.00026
20	3.8	13.559997	-0.00002	13.559981	-0.00014	13.559997	-0.00002	13.55999	-0.00007
10	3.8	13.560012	0.00009	13.56002	0.00015	13.560008	0.00006	13.560024	0.00018
0	3.8	13.55993	-0.00052	13.559923	-0.00057	13.55994	-0.00044	13.559945	-0.00041
-10	3.8	13.56002	0.00015	13.560005	0.00004	13.56002	0.00015	13.560028	0.00021
-20	3.8	13.560012	0.00009	13.560007	0.00005	13.560012	0.00009	13.560017	0.00013

FREQUENCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	4.2	13.559995	-0.00004	13.559983	-0.00013	13.559996	-0.00003	13.559987	-0.00010
	3.8	13.559997	-0.00002	13.559981	-0.00014	13.559997	-0.00002	13.55999	-0.00007
	3.4	13.559995	-0.00004	13.55998	-0.00015	13.559997	-0.00002	13.559987	-0.00010

MODE B

FREQUENCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	3.8	13.559997	-0.00002	13.559993	-0.00005	13.559983	-0.00013	13.559982	-0.00013
40	3.8	13.559951	-0.00036	13.559949	-0.00038	13.559953	-0.00035	13.559932	-0.00050
30	3.8	13.559983	-0.00013	13.559978	-0.00016	13.559965	-0.00026	13.559972	-0.00021
20	3.8	13.559998	-0.00001	13.559991	-0.00007	13.559998	-0.00001	13.559988	-0.00009
10	3.8	13.559935	-0.00048	13.559951	-0.00036	13.55994	-0.00044	13.559934	-0.00049
0	3.8	13.560068	0.00050	13.560052	0.00038	13.560076	0.00056	13.560071	0.00052
-10	3.8	13.559967	-0.00024	13.559957	-0.00032	13.55995	-0.00037	13.559953	-0.00035
-20	3.8	13.559955	-0.00033	13.559963	-0.00027	13.559967	-0.00024	13.559954	-0.00034

FREQUENCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	4.2	13.559996	-0.00003	13.559989	-0.00008	13.559999	-0.00001	13.559986	-0.00010
	3.8	13.559998	-0.00001	13.559991	-0.00007	13.559998	-0.00001	13.559988	-0.00009
	3.4	13.56	0.00000	13.559987	-0.00010	13.559993	-0.00005	13.559987	-0.00010

MODE C

FREQUENCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	3.8	13.559948	-0.00038	13.559967	-0.00024	13.559949	-0.00038	13.559958	-0.00031
40	3.8	13.560006	0.00004	13.560004	0.00003	13.560009	0.00007	13.560008	0.00006
30	3.8	13.560044	0.00032	13.56005	0.00037	13.560052	0.00038	13.560034	0.00025
20	3.8	13.559942	-0.00043	13.559957	-0.00032	13.559957	-0.00032	13.559954	-0.00034
10	3.8	13.559972	-0.00021	13.559953	-0.00035	13.559968	-0.00024	13.559946	-0.00040
0	3.8	13.559929	-0.00052	13.559941	-0.00044	13.559946	-0.00040	13.559945	-0.00041
-10	3.8	13.560015	0.00011	13.560021	0.00015	13.560009	0.00007	13.560001	0.00001
-20	3.8	13.560058	0.00043	13.560055	0.00041	13.560061	0.00045	13.560066	0.00049

FREQUENCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	4.2	13.559942	-0.00043	13.559956	-0.00032	13.559957	-0.00032	13.55995	-0.00037
	3.8	13.559942	-0.00043	13.559957	-0.00032	13.559957	-0.00032	13.559954	-0.00034
	3.4	13.559942	-0.00043	13.559957	-0.00032	13.559955	-0.00033	13.559952	-0.00035

MODE D

FREQUENCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	3.8	13.560031	0.00023	13.560052	0.00038	13.56005	0.00037	13.560051	0.00038
40	3.8	13.559958	-0.00031	13.559956	-0.00032	13.559955	-0.00033	13.559961	-0.00029
30	3.8	13.559983	-0.00013	13.559983	-0.00013	13.559978	-0.00016	13.559973	-0.00020
20	3.8	13.559986	-0.00010	13.559986	-0.00010	13.559982	-0.00013	13.559984	-0.00012
10	3.8	13.560063	0.00046	13.560054	0.00040	13.560062	0.00046	13.56005	0.00037
0	3.8	13.560005	0.00004	13.560009	0.00007	13.560005	0.00004	13.560028	0.00021
-10	3.8	13.559976	-0.00018	13.559979	-0.00015	13.55998	-0.00015	13.559982	-0.00013
-20	3.8	13.560021	0.00015	13.560011	0.00008	13.560008	0.00006	13.560017	0.00013

FREQUENCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	4.2	13.559986	-0.00010	13.559989	-0.00008	13.559983	-0.00013	13.55998	-0.00015
	3.8	13.559986	-0.00010	13.559986	-0.00010	13.559982	-0.00013	13.559984	-0.00012
	3.4	13.559983	-0.00013	13.559989	-0.00008	13.559984	-0.00012	13.55998	-0.00015

4.4 20dB BANDWIDTH

4.4.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The 20dB bandwidth shall be specified in operating frequency band.

4.4.2 TEST INSTRUMENTS

Same as Item 4.1.2.

4.4.3 TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

Same as Item 4.1.5.


4.4.6 EUT OPERATING CONDITION

Same as Item 4.1.6.

4.4.7 TEST RESULTS


MODE A

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.558717949 MHz	13.561314103 MHz	13.553~13.567	PASS

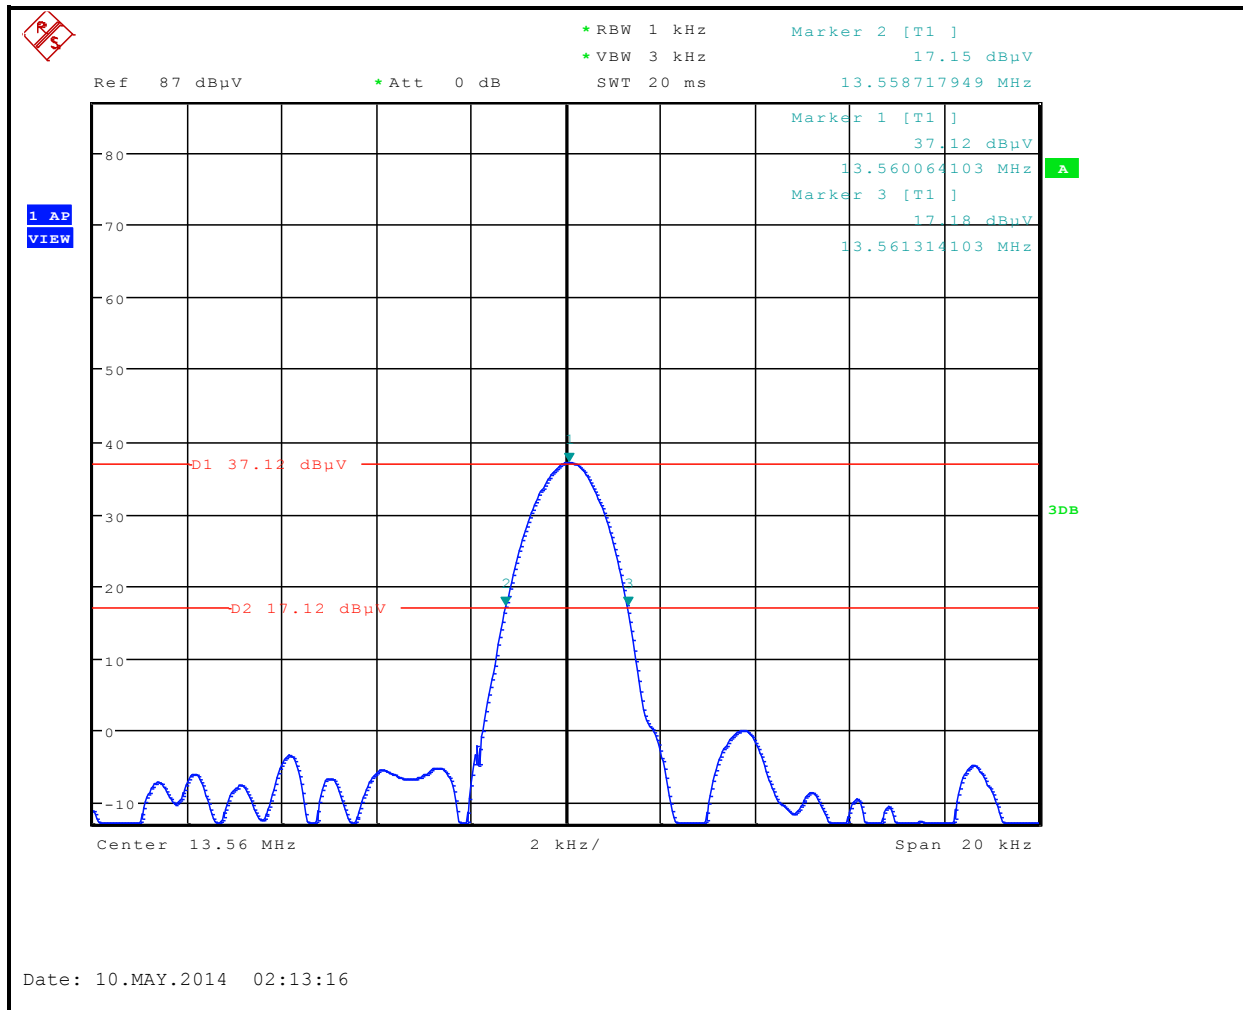


MODE B

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.558750000 MHz	13.561282051 MHz	13.553~13.567	PASS

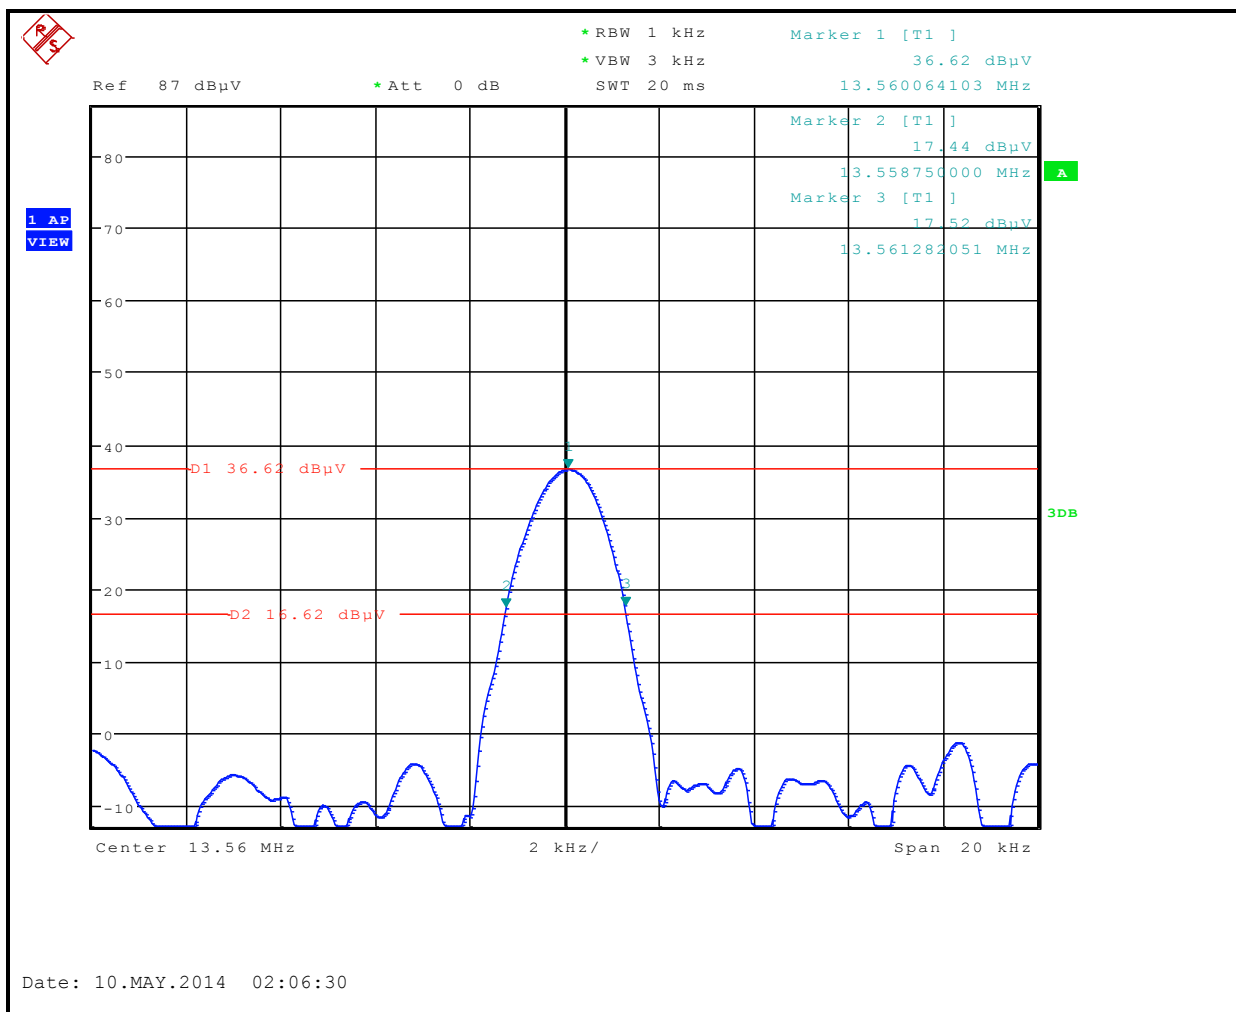


MODE C

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.558717949 MHz	13.561314103 MHz	13.553~13.567	PASS

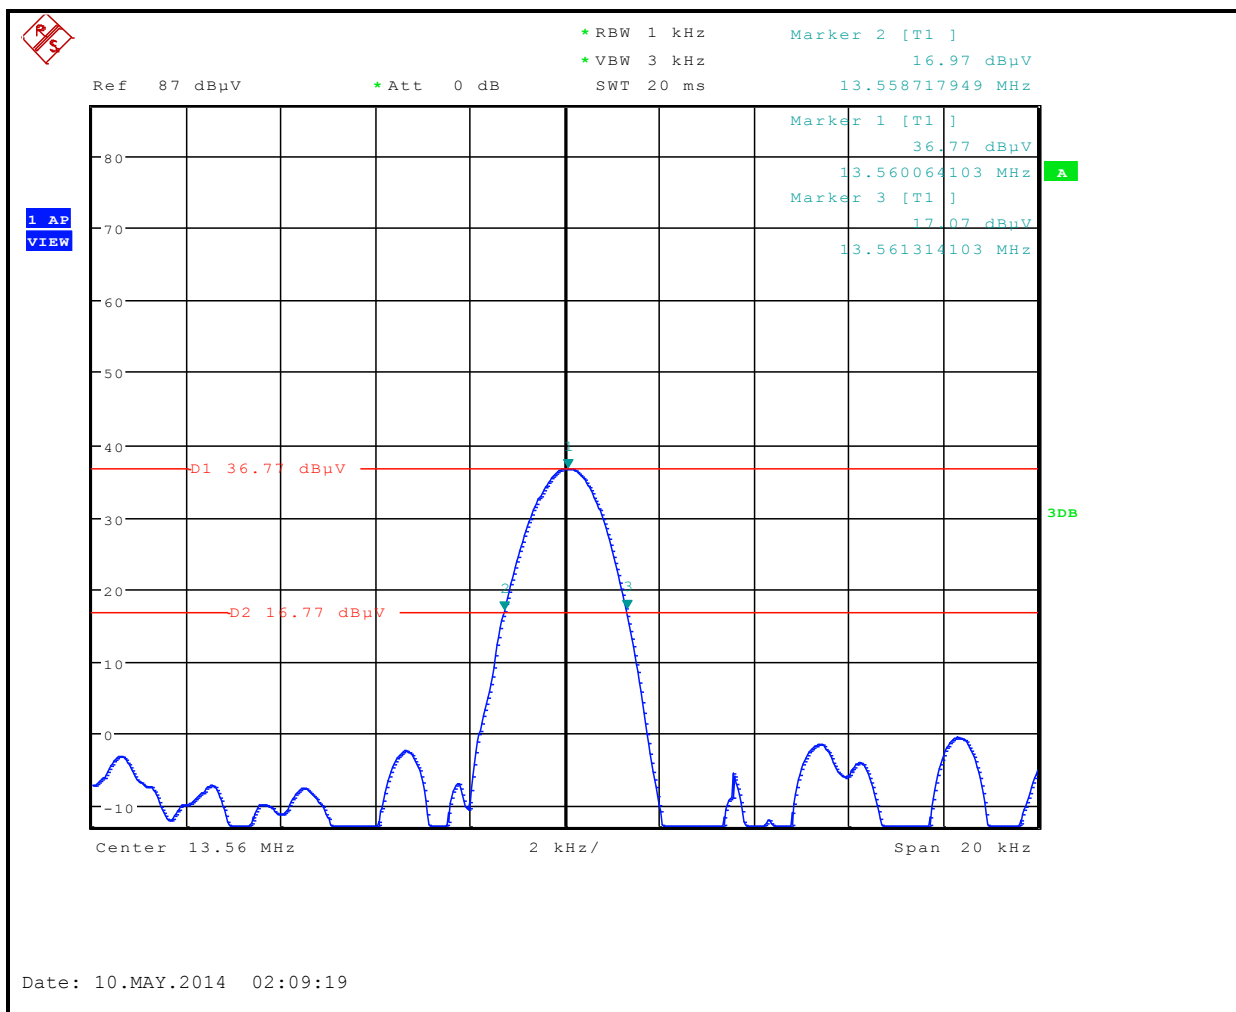

MODE D

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.558750000 MHz	13.561282051 MHz	13.553~13.567	PASS

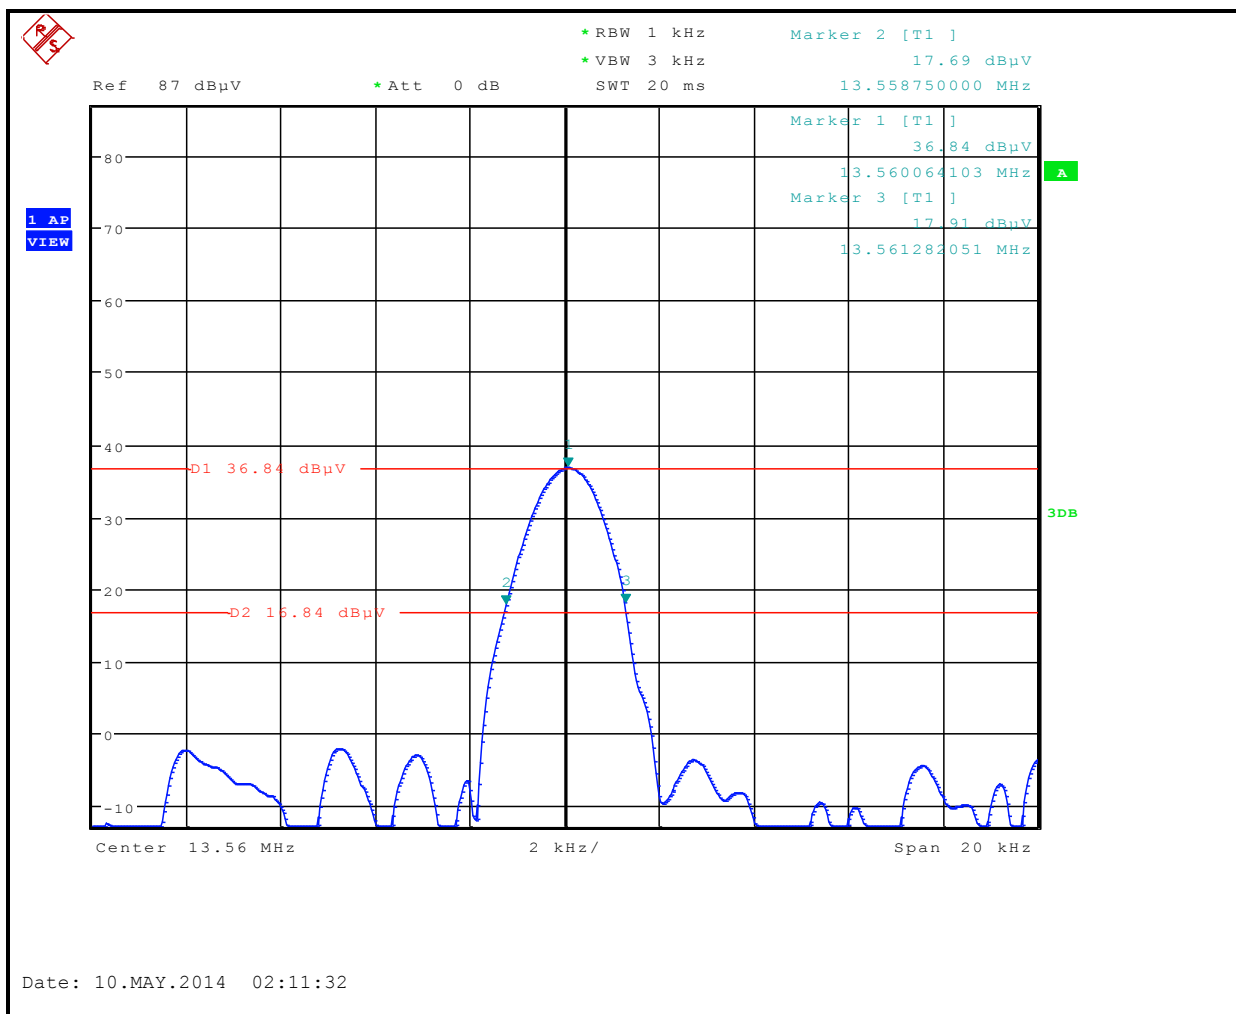

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---