

Project No.: TM-2405000413P
Report No.: TMWK2405001811KS

FCC ID: P4Q-SC680A

Page: 1 / 76
Rev.: 00

SAR TEST REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

for
Smart Module

Model Name.: SC680A-NA

Prepared for:

Mitac Digital Technology Corporation
4F., No. 1, R&D Road 2, Hsinchu Science Park, Hsinchu 30076 Taiwan

Prepared by

Compliance Certification Services Inc.
Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan.

Issued Date: September 16, 2024

Note: This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 16, 2024	Initial Issue	ALL	Peggy Tsai


Table of Contents

1	ATTESTATION OF TEST RESULTS	5
2	TEST SPECIFICATION, METHODS AND PROCEDURES.....	6
3	DEVICE UNDER TEST (DUT) INFORMATION	7
3.1	DUT DESCRIPTION	7
3.2	WIRELESS TECHNOLOGIES.....	8
3.3	GENERAL LTE SAR TEST AND REPORTING CONSIDERATIONS.....	9
4	SAR MEASUREMENT SYSTEM.....	12
4.1	SYSTEM COMPONENTS	13
4.2	SAR SCAN PROCEDURES	16
5	MEASUREMENT UNCERTAINTY	18
6	RF EXPOSURE CONDITIONS (TEST CONFIGURATIONS)	19
6.1	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	19
6.2	REQUIRED TEST CONFIGURATIONS.....	21
7	DIELECTRIC PROPERTY MEASUREMENTS & SYSTEM CHECK.....	22
7.1	DIELECTRIC PROPERTY MEASUREMENTS	22
7.2	SYSTEM CHECK.....	25
8	POWER REDUCTION BY PROXIMITY SENSING.....	27
8.1	PROXIMITY SENSOR TRIGGERING DISTANCE (KDB 616217 D04 SECTION 6.2)	28
8.2	PROXIMITY SENSOR TRIGGERING COVERAGE (KDB 616217 D04 SECTION 6.3).....	30
8.3	TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING (KDB 616217 D04 SECTION 6.4)	31
9	CONDUCTED OUTPUT POWER MEASUREMENTS.....	34
9.1	LTE.....	34
9.2	WI-FI 2.4GHZ (DTS BAND)	57
9.3	WI-FI 5GHZ (U-NII BANDS)	58
9.4	BLUETOOTH.	60
10	MEASURED AND REPORTED (SCALED) SAR RESULTS.....	62
10.1	LTE BAND 5 (10MHZ BANDWIDTH)	62
10.2	LTE BAND 7 (20MHZ BANDWIDTH)	62
10.3	LTE BAND 12 (10MHZ BANDWIDTH)	62
10.4	LTE BAND 13 (10MHZ BANDWIDTH)	63
10.5	LTE BAND 14 (10MHZ BANDWIDTH)	63
10.6	LTE BAND 25 (20MHZ BANDWIDTH)	63
10.7	LTE BAND 26 (15MHZ BANDWIDTH)	64
10.8	LTE BAND 41 (20MHZ BANDWIDTH)	64
10.9	LTE BAND 66 (20MHZ BANDWIDTH)	65

Report No.: TMWK2405001811KS

10.10 LTE BAND 71 (20MHZ BANDWIDTH)	65
10.11 WI-FI (DTS BAND).....	65
10.12 WI-FI (U-NII BAND)	65
10.13 BLUETOOTH	66
10.14 NFC.....	66
11 SAR MEASUREMENT VARIABILITY	67
12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	69
12.1 SUM OF THE SAR FOR LTE BAND 5 & WI-FI & BT & NFC	72
12.2 SUM OF THE SAR FOR LTE BAND 7 & WI-FI & BT & NFC	72
12.3 SUM OF THE SAR FOR LTE BAND 12 & WI-FI & BT & NFC	72
12.4 SUM OF THE SAR FOR LTE BAND 13 & WI-FI & BT & NFC	72
12.5 SUM OF THE SAR FOR LTE BAND 14 & WI-FI & BT & NFC	72
12.6 SUM OF THE SAR FOR LTE BAND 25 & WI-FI & BT & NFC	72
12.7 SUM OF THE SAR FOR LTE BAND 26 & WI-FI & BT & NFC	72
12.8 SUM OF THE SAR FOR LTE BAND 41 & WI-FI & BT & NFC	72
12.9 SUM OF THE SAR FOR LTE BAND 66 & WI-FI & BT & NFC	73
12.10 SUM OF THE SAR FOR LTE BAND 71 & WI-FI & BT & NFC	73
12.11 SUM OF THE SAR FOR WI-FI & BT & NFC	73
13 EQUIPMENT LIST & CALIBRATION STATUS.....	74
14 FACILITIES.....	75
15 APPENDIXES	76

1 Attestation of Test Results

Applicant Name	Mitac Digital Technology Corporation				
Model Name	SC680A-NA				
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013				
Exposure Category	SAR Limits (W/Kg) Peak spatial-average (1g of tissue)				
General population	1.6				
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)				
	PCE	DTS	NII	DSS	NFC
Body	1.16	0.69	0.74	0.10	0
Simultaneous TX	1.56				
Receive EUT Date:	5/29/2024				
Date Tested	6/20/2024 to 7/5/2024				
Test Results	Pass				
Compliance Certification Services Inc. , tested the above equipment in accordance with the requirements set forth in the above standards. Determination of compliance is based on the results of the compliance measurement,not taking into account measurement instrumentation uncertainty.All indications of Pass/Fail in this report are opinions expressed by Compliance Certification Services Inc, based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.					
Approved & Released By:			Tested by:		
					
Sky Zhou Asst. Section Manager Compliance Certification Services Inc.			Jack Yang Engineer Compliance Certification Services Inc.		

2 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 Interim General RF Exposure Guidance v01
- 616217 D04 SAR for laptop and tablets v01r02
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D05 SAR for LTE Devices v02r05

In addition to the above, the following information was used:

- [TCB workshop](#) April 2015; Page 33, RF Exposure Procedures (Overlapping LTE Bands)

3 Device Under Test (DUT) Information

3.1 DUT Description

Applicant Name	Mitac Digital Technology Corporation
Applicant Address	4F., No. 1, R&D Road 2, Hsinchu Science Park, Hsinchu 30076 Taiwan
Manufacturer Name	Mitac Digital Technology Corporation
Manufacturer Address	4F., No. 1, R&D Road 2, Hsinchu Science Park, Hsinchu 30076 Taiwan
Product	Smart Module
Trade Name	Mio/MAGELLAN/NAVMAN /MiTAC
Model No.	SC680A-NA
Model Discrepancy	Difference of the those trade names (list on this report) are just for marketing purpose only.
Host Equipment	Tablet
Host model	N727
HMN	PRO X
Device Dimension	Overall (Length x Width): 228 mm x 134 mm Overall Diagonal: 264 mm
Back Cover	☒ The Back Cover is not removable.
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.8Vdc, 15.2Wh
Hardware Version	R01
Software Version	R01
Sample Stage	PVT

3.2 Wireless Technologies

Wireless technologies	Frequency bands	Peak Antenna Gain (dBi)	Operating mode	Duty Cycle used for SAR testing
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 14 FDD Band 17 FDD Band 25 FDD Band 26 TDD Band 41 FDD Band 66 FDD Band 71	-0.1 -2.4 -0.7 -4.7 -0.7 1.6 1.5 -0.7 -0.1 -0.7 -3.9 -2.4 -0.7	QPSK 16QAM 64AQM	100% (FDD) 63.3% (TDD) _{Power class3}
Antenna Specification	Type	Monopole+coupling Antenna		
Wi-Fi	2.4 GHz ¹	0.44	802.11b 802.11g 802.11n (HT20) 802.11n (HT40)	98.83% _(802.11b) 98.21% _(802.11g) 97.93% _(802.11n 20MHz BW) 94.27% _(802.11n 40MHz BW)
	5.2 GHz ¹ 5.3 GHz ¹ 5.5 GHz ¹ 5.8 GHz ¹	-0.74 -0.74 -0.3 0.53	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	98.16% _(802.11a) 97.93% _(802.11n/ac 20MHz BW) 95.66% _(802.11n/ac 40MHz BW) 92.00% _(802.11ac 80MHz BW)
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	2.4 GHz ¹	0.44	BR,EDR,LE	77.20%
Antenna Specification	Brand Name	MIO		
	Type	PIFA antenna		
	Parts Number	N722 8" PAD		
NFC	13.56MHz			N/A
Antenna Specification	Type	Loop Antenna		

Notes:

- Duty cycle for Wi-Fi and BT is referenced from the DTS and U-NII and BT reports.
- The sample selected for test was prototype that representative to production product and was provided by manufacturer
- Variant information between/among model numbers / trademarks is provided by the applicant, test results of this report are applicable to the sample EUT received of main test model name.
- Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
- The device uses loudspeaker mode for calls.

3.3 General LTE SAR Test and Reporting Considerations

Item	Description					
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	18700/ 1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5
	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)				
		Channel Bandwidth				
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5
	Band 7	Frequency range: 2500 - 2570 MHz (BW = 70 MHz)				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20850/ 2510	20825/ 2507.5	20800/ 2505	20775/ 2502.5	
	Mid	21100/ 2535	21100/ 2535	21100/ 2535	21100/ 2535	
	High	21350/ 2560	21375/ 2562.5	21400/ 2565	21425/ 2567.5	
	Band 12	Frequency range: 698 - 716 MHz (BW = 17 MHz)				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz
	Low				23205/ 779.5	
	Mid			23230/ 782	23230/ 782	
	High				23255/ 784.5	
	Band 14	Frequency range: 788 - 798 MHz (BW = 10 MHz)				


	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
Low				23305/ 790.5		
Mid			23330/ 793	23330/ 793		
High				23355/ 795.5		
Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)					
	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
Low			23780/ 709	23755/ 706.5		
Mid			23790/ 710	23790/ 710		
High			23800/ 711	23825/ 713.5		
Band 25	Frequency range: 1850 - 1915 MHz (BW = 65 MHz)					
	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7
Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5
High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3
Band 26	Frequency range: 814 - 849 MHz (BW = 35 MHz)					
	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low		26765/ 821.5	26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7
Mid		26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5
High		26965/ 841.5	26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3
Band 41 ²	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)					
	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low	39750/2506					
Low-Mid	40185/2549.5					
Mid	40620/2593					
Mid-High	41055/2636.5					
High	41490/2680					
Band 66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)					
	Channel Bandwidth					
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7
Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745
High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3
Band 71	Frequency range: 663 - 698 MHz (BW = 35 MHz)					
	Channel Bandwidth					
	20 MHz ¹	15 MHz ¹	10 MHz	5 MHz	3 MHz	1.4 MHz
Low	133222/ 673	133197/ 670.5	133172/ 668	133147/ 665.5		

Maximum power reduction (MPR)	Mid	133297/ 680.5	133297/ 680.5	133297/ 680.5	133297/ 680.5																																																																
	High	133372/ 688	133397/ 690.5	133422/ 693	133447/ 695.5																																																																
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr> <tr> <td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr> </table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report																																																																				

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)


4 SAR Measurement System

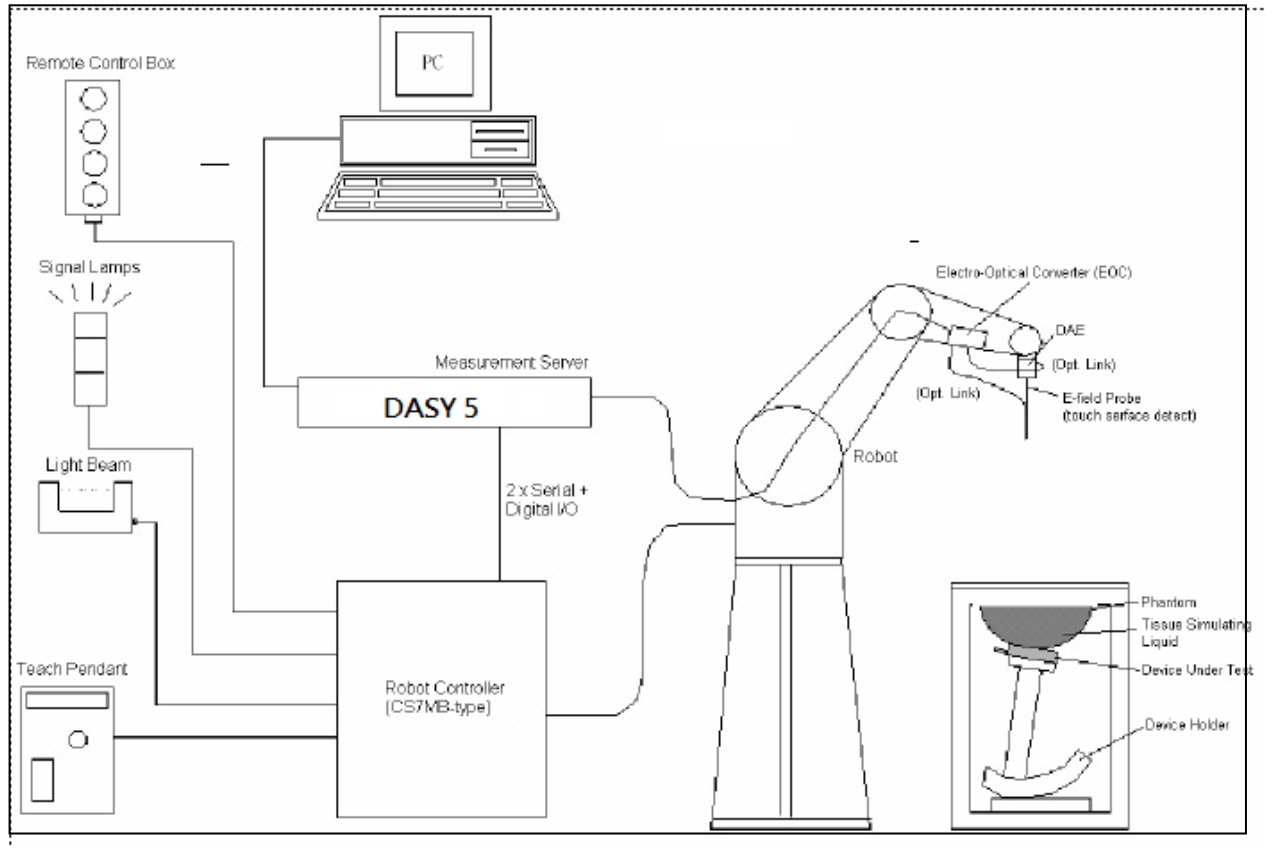


The DASYS5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7 or Windows XP.
- DASYS software version: NEO52 D10.3 S14.6.13.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

4.1 System Components

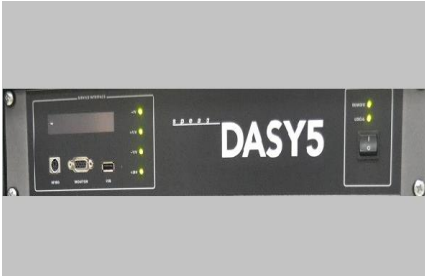DASY5 Measurement Server	
	The DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE4 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
	The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.
Data Acquisition Electronics (DAE)	
	The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MΩ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements	
	Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) Calibration: Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) Directivity: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) Dynamic Range: 10 μW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
	Dimensions: Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
SAM Phantom	
	Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE1528: 2013. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot. Shell Thickness: 2 ± 0.2 mm Filling Volume: Approx. 25 liters Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm
ELI Phantom	
	Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEEE1528: 2013 and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%) Filling Volume: Approx. 25 liters Dimensions: Major ellipse axis: 600 mm Minor axis: 400 mm 500mm

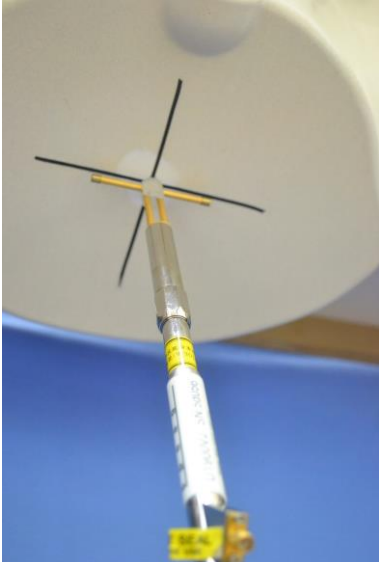Device Holder for SAM Twin Phantom	
	Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).
System Validation Kits for SAM Phantom	
	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 2450, 5300, 5600, 5800 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm
System Validation Kits for ELI phantom	
	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 2450, 5300, 5600, 5800 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

4.2 SAR Scan Procedures

Step 1: Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

- Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1

5 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE1528: 2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6 RF Exposure Conditions (Test Configurations)

Refer to Appendixes 1 for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

6.1 Standalone SAR Test Exclusion Considerations

Since the Dedicated Host Approach is applied, the SAR-based exemption in Appendix B of KDB 447498 D04 is applied together with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
- The available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula.

P_{th} is given by:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

- The separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz .
 P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distances (cm).



Report No.: TMWK2405001811KS

Page: 20 / 76
Rev.: 00

SAR Test Exclusion Calculations for $0.3 \text{ GHz} \leq f < 1.5 \text{ GHz}$

Tx Interface	Frequency (GHz)	Output Power		Antenna Gain (dBi)	ERP (dBm)	ERP Threshold (mW)	Separation Distances (cm)					P _e (mW)					Exemption result				
		dBm	mW				Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Full Power, Proximity Sensor Off																					
LTE Band 5	0.844	25.00	316	-0.7	22.15	164.06	0.76	4.28	21.1	0.58	0.53	17	193	1722	11	10	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 12	0.711	25.00	316	-0.7	22.15	164.06	0.76	4.28	21.1	0.58	0.53	20	193	1450	14	13	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 13	0.782	25.00	316	1.6	24.45	278.61	0.76	4.28	21.1	0.58	0.53	18	193	1595	12	11	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 14	0.793	25.00	316	1.5	24.35	272.27	0.76	4.28	21.1	0.58	0.53	18	193	1618	12	11	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 17	0.711	25.00	316	-0.7	22.15	164.06	0.76	4.28	21.1	0.58	0.53	20	193	1450	14	13	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 26	0.8415	25.00	316	-0.7	22.15	164.06	0.76	4.28	21.1	0.58	0.53	17	193	1717	11	10	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE
LTE Band 71	0.688	25.00	316	-0.7	22.15	164.06	0.76	4.28	21.1	0.58	0.53	21	193	1454	15	13	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE

SAR Test Exclusion Calculations for $1.5 \text{ GHz} \leq f \leq 6 \text{ GHz}$

Tx Interface	Frequency (GHz)	Output Power		Antenna Gain (dBi)	ERP (dBm)	ERP Threshold (mW)	Separation Distances (cm)					P _e (mW)					Exemption result						
		dBm	mW				Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4		
Full Power, Proximity Sensor Off																							
LTE Band 2	1.9	23.50	224	-0.1	21.25	133.35	0.76	4.28	21.1	0.58	0.53	7	177	3900	4	4	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
LTE Band 4	1.745	23.50	224	-2.4	18.95	78.52	0.76	4.28	21.1	0.58	0.53	8	183	3900	5	4	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
LTE Band 7	2.56	24.00	251	-4.7	17.15	51.88	0.76	4.28	21.1	0.58	0.53	6	161	3900	4	3	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
LTE Band 25	1.905	23.50	224	-0.1	21.25	133.35	0.76	4.28	21.1	0.58	0.53	7	177	3900	4	4	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
LTE Band 41	2.68	23.50	224	-3.9	17.45	55.59	0.76	4.28	21.1	0.58	0.53	6	158	3900	3	3	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
LTE Band 66	1.77	23.50	224	-2.4	18.95	78.52	0.76	4.28	21.1	0.58	0.53	8	182	3900	5	4	-MEASURE	-MEASURE	-EXEMPT	-MEASURE	-MEASURE		
WiFi 2.4GHz	2.462	16.00	40	0.44	14.29	26.85	1.07	0.7	3	12.46	19.5	12	5	83	1243	2916	-MEASURE	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		
WiFi 5.2GHz	5.24	16.00	40	-0.74	13.11	20.46	1.07	0.7	3	12.46	19.5	7	3	61	1150	2904	-MEASURE	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		
WiFi 5.3GHz	5.32	16.00	40	-0.74	13.11	20.46	1.07	0.7	3	12.46	19.5	7	3	60	1149	2904	-MEASURE	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		
WiFi 5.5GHz	5.7	16.00	40	-0.3	13.55	22.65	1.07	0.7	3	12.46	19.5	7	3	59	1141	2903	-MEASURE	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		
WiFi 5.8GHz	5.825	16.00	40	0.53	14.38	27.42	1.07	0.7	3	12.46	19.5	7	3	58	1138	2902	-MEASURE	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		
BT	2.48	7.00	5	0.44	5.29	3.38	1.07	0.7	3	12.46	19.5	12	5	82	1242	2916	-EXEMPT	-MEASURE	-EXEMPT	-EXEMPT	-EXEMPT		

Tx Interface	Frequency (GHz)	Output Power		Antenna Gain (dBi)	ERP (dBm)	ERP Threshold (mW)	Separation Distances (cm)		P _m (mW)		Exemption result	
		dBm	mW				Rear	Edge4	Rear	Edge4	Rear	Edge4
Full Power,Proximity Sensor On												
LTE Band 2	1.9	16.00	40	-0.1	13.75	23.71	0.76	0.53	7	4	-MEASURE	-MEASURE
LTE Band 4	1.745	16.00	40	-2.4	11.45	13.96	0.76	0.53	8	4	-MEASURE	-MEASURE
LTE Band 7	2.56	14.50	28	-4.7	7.65	5.82	0.76	0.53	6	3	-MEASURE	-MEASURE
LTE Band 25	1.905	16.00	40	-0.1	13.75	23.71	0.76	0.53	7	4	-MEASURE	-MEASURE
LTE Band 41	2.68	16.00	40	-3.9	9.95	9.89	0.76	0.53	6	3	-MEASURE	-MEASURE
LTE Band 66	1.77	16.00	40	-2.4	11.45	13.96	0.76	0.53	8	4	-MEASURE	-MEASURE

6.2 Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 6.1:

0.3 GHz $\leq f < 1.5$ GHz

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Full Power, Proximity Sensor Off					
LTE Band 5	Yes	Yes	No	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes
LTE Band 14	Yes	Yes	No	Yes	Yes
LTE Band 17	Yes	Yes	No	Yes	Yes
LTE Band 26	Yes	Yes	No	Yes	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes

1.5 GHz $\leq f \leq 6$ GHz

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Full Power, Proximity Sensor Off					
LTE Band 2	Yes	Yes	No	Yes	Yes
LTE Band 4	Yes	Yes	No	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes
LTE Band 25	Yes	Yes	No	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes
LTE Band 66	Yes	Yes	No	Yes	Yes
WiFi 2.4GHz	Yes	Yes	No	No	No
WiFi 5.2GHz	Yes	Yes	No	No	No
WiFi 5.3GHz	Yes	Yes	No	No	No
WiFi 5.5GHz	Yes	Yes	No	No	No
WiFi 5.8GHz	Yes	Yes	No	No	No
BT	No	Yes	No	No	No

Test Configurations	Rear	Edge4
Full Power, Proximity Sensor On		
LTE Band 2	Yes	Yes
LTE Band 4	Yes	Yes
LTE Band 7	Yes	Yes
LTE Band 25	Yes	Yes
LTE Band 41	Yes	Yes
LTE Band 66	Yes	Yes

Note(s):

Yes = Testing is required.

No = Testing is not required.

7 Dielectric Property Measurements & System Check

7.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Report No.: TMWK2405001811KS

Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99+% Pure Sodium Chloride Sugar: 98+% Pure Sucrose
Water: De-ionized, 16 MΩ⁺ resistivity HEC: Hydroxy thyl Cellulose
DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

Dielectric Property Measurements Results:

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
			Measured	Target	Delta (%)	Measured	Target	Delta (%)
2024/6/25	Head	805	40.59	41.64	-2.52	0.91	0.90	1.00
		835	40.46	41.50	-2.51	0.92	0.90	1.78
		850	40.40	41.50	-2.65	0.92	0.92	0.55
2024/6/26	Head	805	41.37	41.64	-0.65	0.92	0.90	2.90
		835	41.24	41.50	-0.63	0.93	0.90	3.67
		850	41.18	41.50	-0.77	0.94	0.92	2.29
2024/6/27	Head	1850	40.65	40.00	1.63	1.37	1.40	-2.14
		1900	40.58	40.00	1.45	1.39	1.40	-0.50
		1920	40.58	40.00	1.45	1.40	1.40	0.29
2024/6/28	Head	1710	40.70	40.14	1.40	1.30	1.35	-3.71
		1750	40.68	40.10	1.45	1.32	1.37	-4.01
		1760	40.65	40.08	1.42	1.32	1.38	-4.00
2024/7/1	Head	2495	39.31	39.14	0.43	1.91	1.85	3.52
		2600	38.92	39.00	-0.21	2.03	1.96	3.78
		2690	38.56	38.89	-0.85	2.14	2.06	3.69
2024/7/2	Head	2495	39.09	39.14	-0.13	1.87	1.85	1.30
		2600	39.00	39.00	0.00	1.96	1.96	-0.20
		2690	38.88	38.89	-0.03	2.02	2.06	-1.89
2024/7/3	Head	670	40.92	42.33	-3.33	0.87	0.89	-1.58
		750	40.89	41.90	-2.41	0.89	0.89	0.45
		800	40.46	41.66	-2.88	0.92	0.90	2.12
2024/7/4	Head	670	42.35	42.33	0.05	0.87	0.89	-2.15
		750	42.21	41.90	0.74	0.89	0.89	0.11
		800	42.13	41.66	1.13	0.91	0.90	1.23
2024/7/5	Head	2400	38.87	39.30	-1.09	1.73	1.76	-1.31
		2450	38.80	39.20	-1.02	1.77	1.80	-1.56
		2480	38.80	39.16	-0.92	1.80	1.83	-1.86
2024/7/5	Head	5200	37.06	36.00	2.94	4.69	4.66	0.62
		5250	36.90	35.95	2.64	4.68	4.71	-0.59
		5350	36.85	35.85	2.79	4.91	4.81	1.98
2024/7/5	Head	5500	36.69	35.65	2.92	5.01	4.97	0.95
		5600	36.40	35.50	2.54	5.09	5.07	0.39
		5720	36.15	35.38	2.18	5.29	5.19	1.91
2024/7/5	Head	5720	36.15	35.38	2.18	5.29	5.19	1.91
		5750	36.16	35.35	2.29	5.30	5.22	1.48
		5850	35.86	35.25	1.73	5.30	5.32	-0.47

7.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube
- Distance between probe sensors and phantom surface was set to 2 mm.
- The dipole input power (forward power) was 250 mW (below 2GHz) and 100 mW
- The results are normalized to 1 W input power.


System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix 2 for the SAR System Check Plots.

Date	Tissue Type	Dipole S/N	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ± 10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ± 10 (%)	Plot No.
2024/6/25	Head	D835V2-4d063	250	2.33	9.53	9.32	-2.20	1.51	6.11	6.04	-1.15	1
2024/6/26	Head	D835V2-4d063	250	2.51	9.53	10.04	5.35	1.64	6.11	6.56	7.36	2
2024/6/27	Head	D1900V2-5d173	250	9.48	39.90	37.92	-4.96	4.92	21.00	19.68	-6.29	3
2024/6/28	Head	D1750V2-1008	250	9.34	36.40	37.36	2.64	4.96	19.40	19.84	2.27	4
2024/7/1	Head	D2600V2-1005	250	14.70	56.00	58.8	5.00	6.55	25.20	26.2	3.97	5
2024/7/2	Head	D2600V2-1005	250	13.60	56.00	54.4	-2.86	6.03	25.20	24.12	-4.29	6
2024/7/3	Head	D750V3-1015	250	2.08	8.63	8.32	-3.59	1.36	5.56	5.44	-2.16	7
2024/7/4	Head	D750V3-1015	250	2.24	8.63	8.96	3.82	1.47	5.56	5.88	5.76	8
2024/7/5	Head	D2450V2-727	250	13.50	52.70	54	2.47	6.37	24.60	25.48	3.58	9
2024/7/5	Head	D5GHzV2-1023-5250	100	8.49	78.80	84.9	7.74	2.42	22.70	24.2	6.61	10
2024/7/5	Head	D5GHzV2-1023-5600	100	8.34	81.30	83.4	2.58	2.33	23.30	23.3	0.00	11
2024/7/5	Head	D5GHzV2-1023-5750	100	7.46	78.00	74.6	-4.36	2.10	22.10	21	-4.98	12

8 Power Reduction by Proximity Sensing

The DUT has one proximity sensors to reduce the output power. The position of the sensors and antenna are as shown in the graphic.

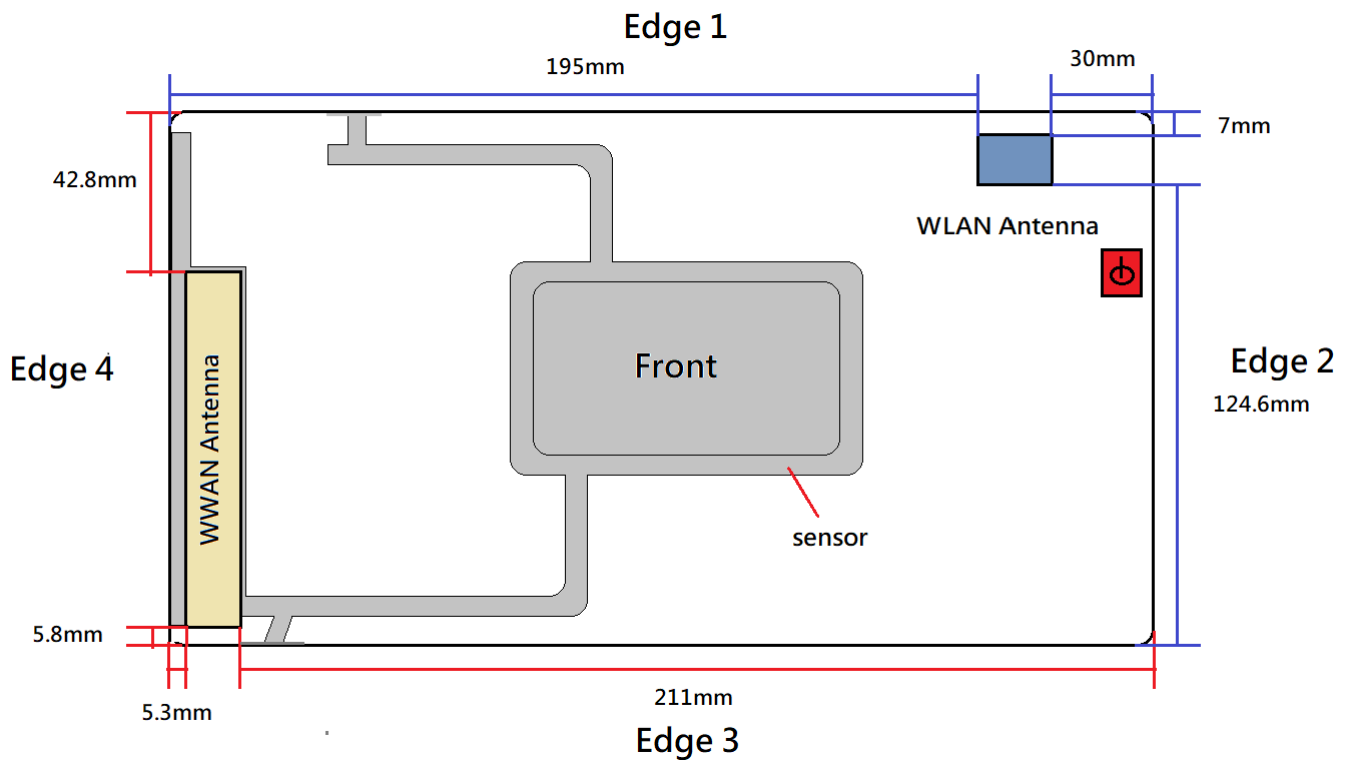


8.1 Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated in the exhibit “P-Sensor operational description”, and the shortest triggering distances were reported and used for SAR assessment.

Proximity Sensor Status Table of trigger distance


Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Edge 4
30	OFF	OFF
29	OFF	OFF
28	OFF	OFF
27	OFF	ON
25	OFF	ON
24	OFF	ON
23	OFF	ON
22	OFF	ON
21	OFF	ON
20	OFF	ON
19	OFF	ON
18	OFF	ON
17	OFF	ON
16	OFF	ON
15	OFF	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON

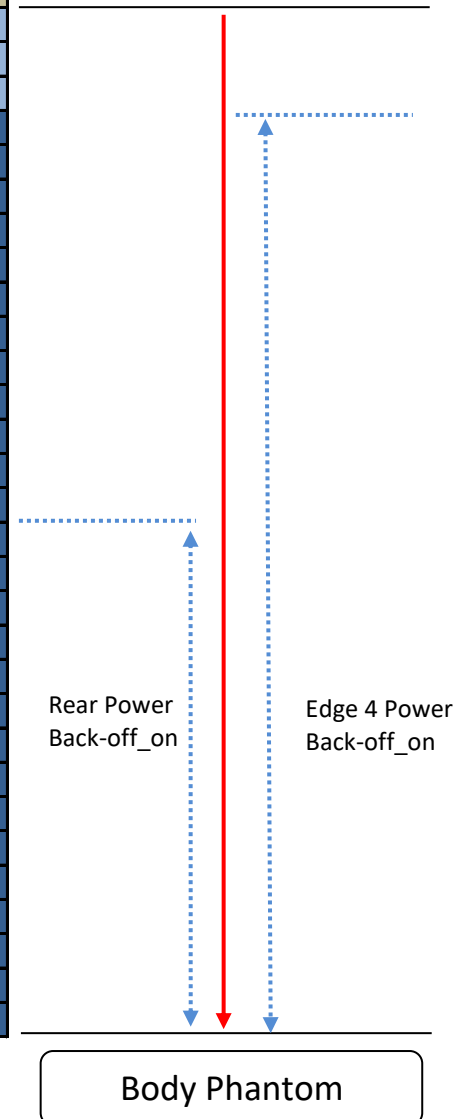

Proximity Sensor Status Table when DUT is moving away from the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Edge 4
0	ON	ON
1	ON	ON
2	ON	ON
3	ON	ON
4	ON	ON
5	ON	ON
6	ON	ON
7	ON	ON
8	ON	ON
9	ON	ON
10	ON	ON
11	ON	ON
12	ON	ON
13	ON	ON
14	ON	ON
15	ON	ON
16	OFF	ON
17	OFF	ON
18	OFF	ON
19	OFF	ON
20	OFF	ON
21	OFF	ON
22	OFF	ON
23	OFF	ON
24	OFF	ON
25	OFF	ON
27	OFF	ON
28	OFF	ON
29	OFF	ON
30	OFF	OFF

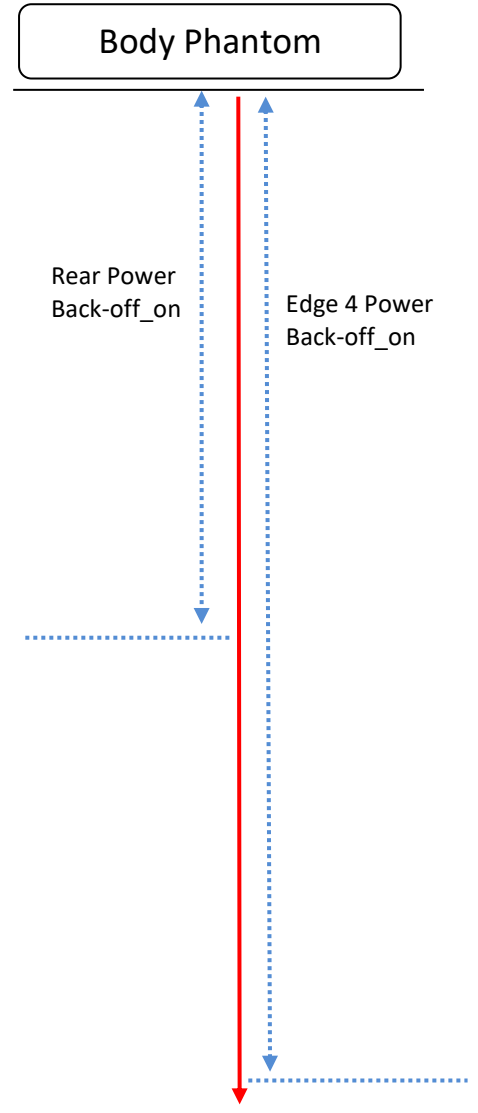

Proximity Sensor Trigger Distance (mm)		
Position	Rear	Edge 4
Minimum	14	27

8.2 Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.


Although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

The sensor is not spatially offset from the antenna. Sensor coverage testing is not required.

8.3 Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 15 mm separation. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

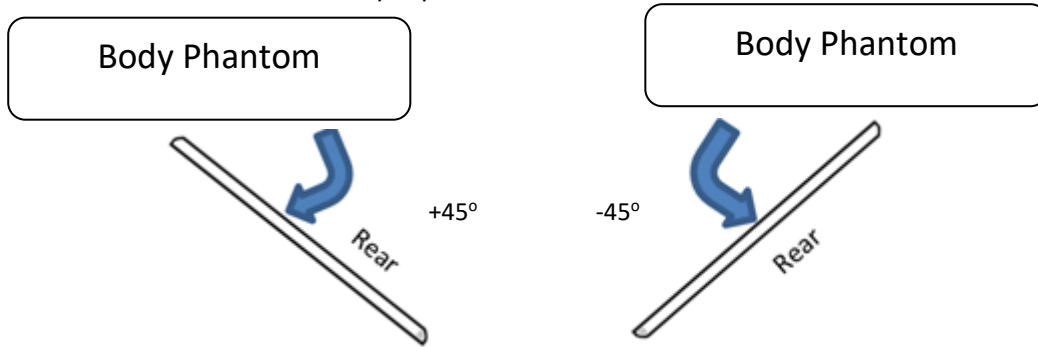

Distance to the DUT (mm)	Proximity Sensor Status	Proximity Sensor Status
0	ON	ON
1	ON	ON
2	ON	ON
3	ON	ON
4	ON	ON
5	ON	ON
6	ON	ON
7	ON	ON
8	ON	ON
9	ON	ON
10	ON	ON
11	ON	ON
12	ON	ON
13	ON	ON
14	ON	ON
15	ON	ON
16	ON	ON
17	ON	ON
18	ON	ON
19	ON	ON
20	ON	ON
21	ON	ON
22	ON	ON
23	ON	ON
24	OFF	ON



The Sensor Trigger Distance (mm)	
Position	Edge 4
Minimum	23



Remark:

- For verification of compliance of power reduction scheme, additional SAR testing with DUT transmitting at full RF power at a conservative trigger distance was performed:
Rear : 13 mm
Edge 4 : 22 mm

Power Reduction per Air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Rear and Edge 4 Surface.

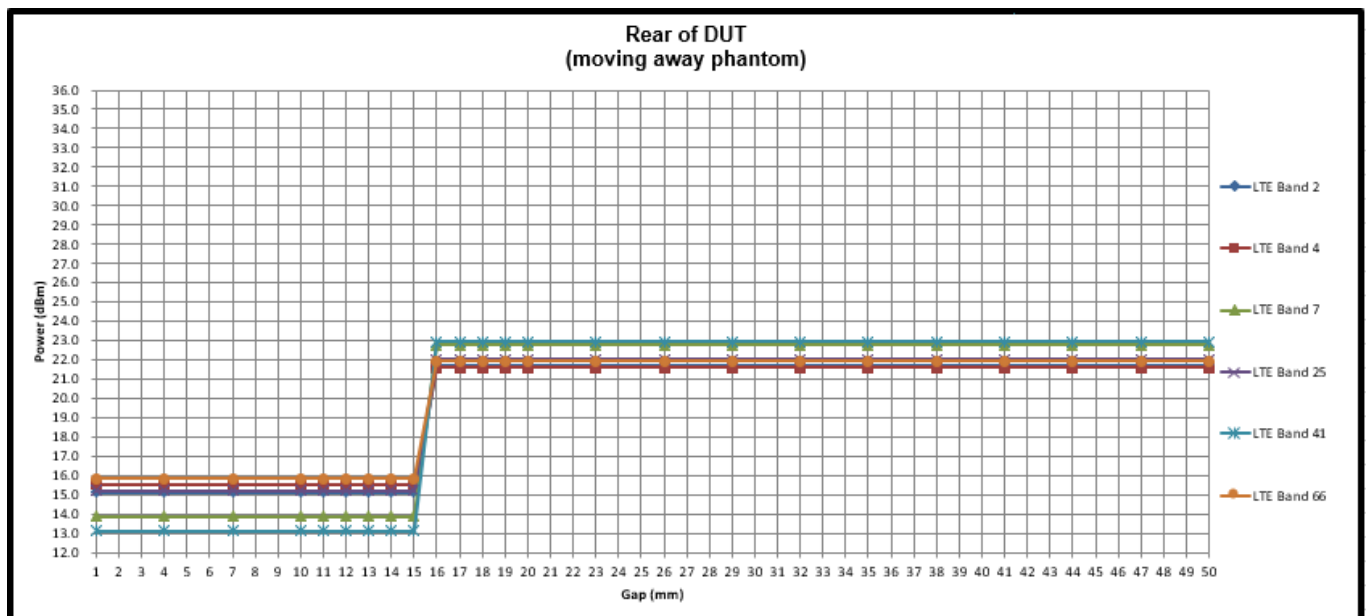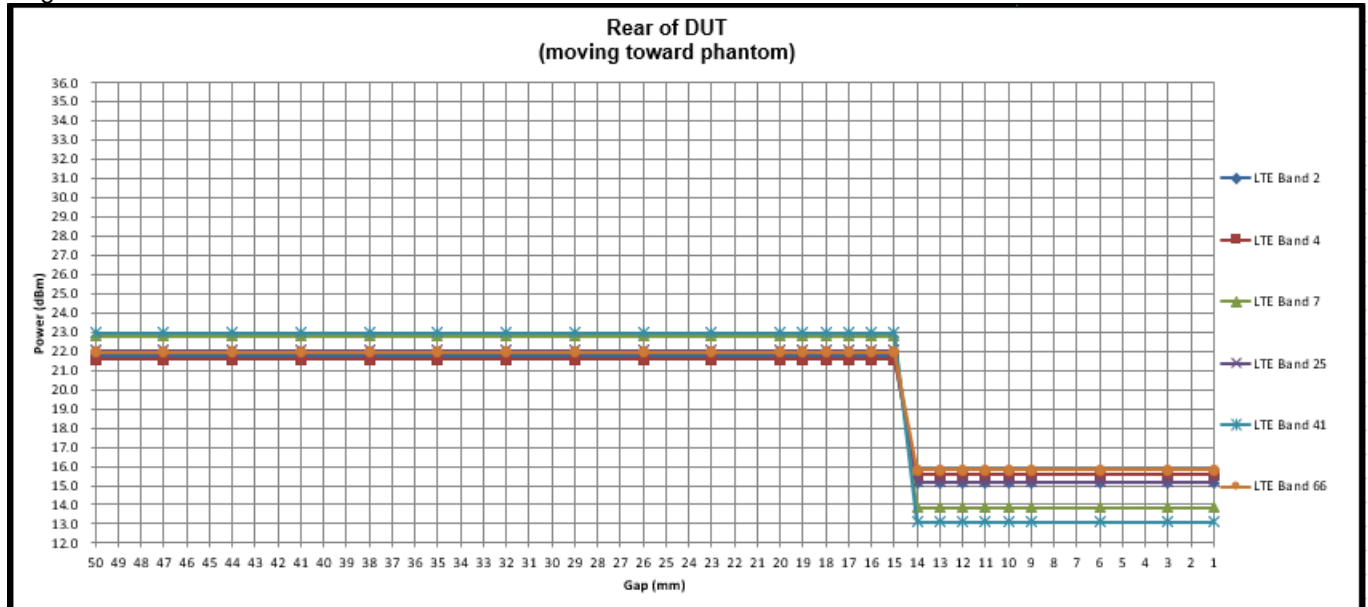

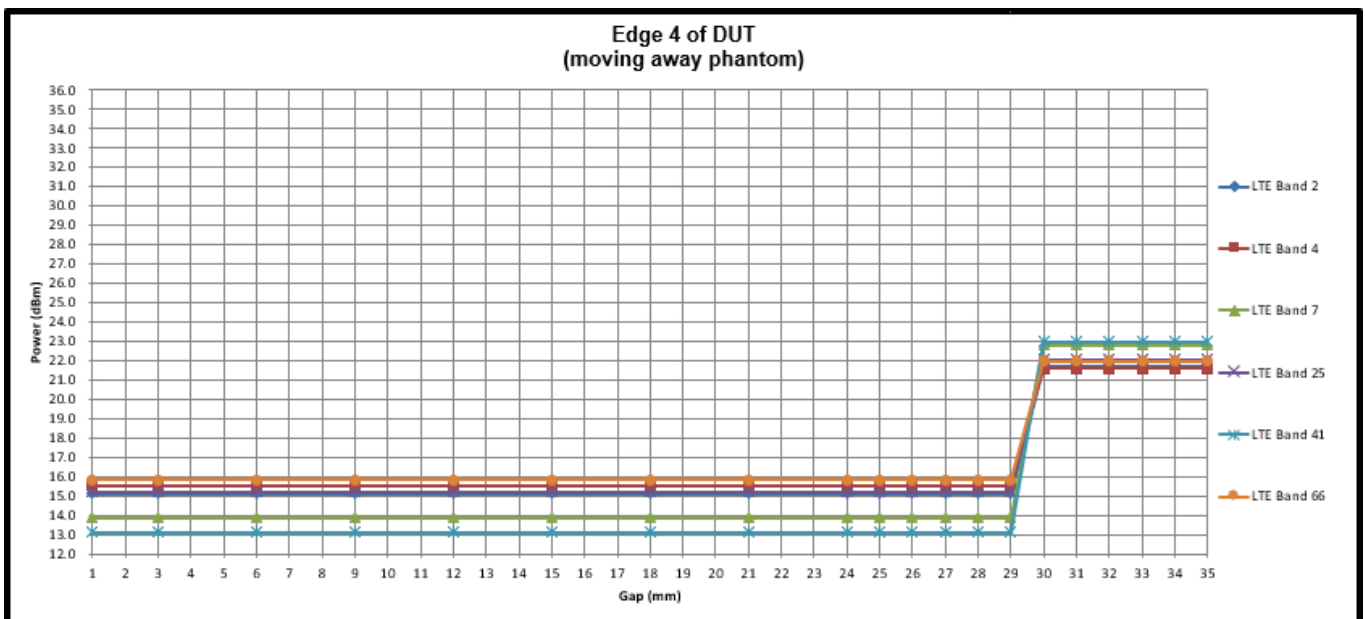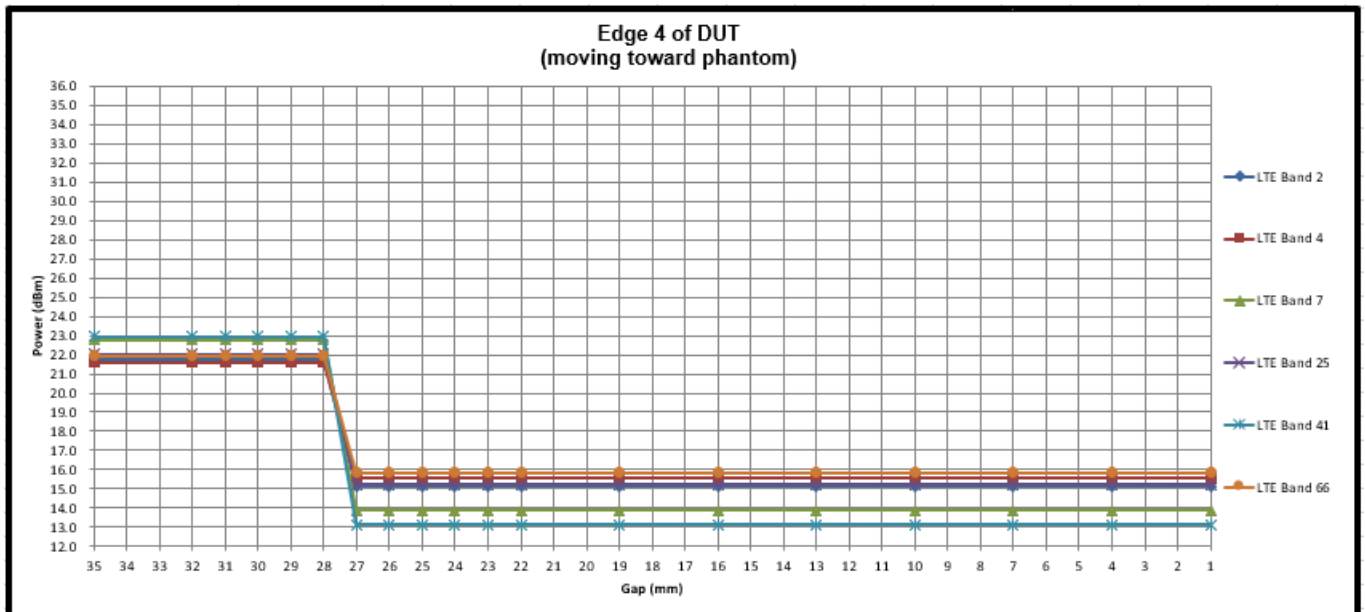

9 Conducted Output Power Measurements

9.1 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

- LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
- LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
- LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

Please refer to section 3.3. for LTE detail test channels.

Frequency bands	Mode	Maximum Output Power (Tune-up Limit) (dBm)
LTE Band 2	QPSK	23.5
LTE Band 4	QPSK	23.5
LTE Band 5	QPSK	25
LTE Band 7	QPSK	24
LTE Band 12	QPSK	25
LTE Band 13	QPSK	25
LTE Band 14	QPSK	25
LTE Band 17	QPSK	25
LTE Band 25	QPSK	23.5
LTE Band 26	QPSK	25
LTE Band 41	QPSK	23.5
LTE Band 66	QPSK	23.5
LTE Band 71	QPSK	25

Frequency bands	Mode	Maximum Output Power (Tune-up Limit) (dBm)
		Reduced Meas. Pwr
LTE Band 2	QPSK	16
LTE Band 4	QPSK	16
LTE Band 7	QPSK	14.5
LTE Band 25	QPSK	16
LTE Band 41	QPSK	14
LTE Band 66	QPSK	16

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
							20525		
							836.5 MHz		
LTE Band 5	10	QPSK	1	0	0		24.06		25.0
			1	25	0		23.80		
			1	49	0		23.96		
			25	0	1		22.83		24.0
			25	12	1		22.74		
			25	25	1		22.73		
			50	0	1		22.87		
		16QAM	1	0	1		23.00		24.0
			1	25	1		22.99		
			1	49	1		23.18		
			25	0	2		21.81		23.0
			25	12	2		21.83		
			25	25	2		21.86		
			50	0	2		21.65		
		64QAM	1	0	2		22.84		23.0
			1	25	2		22.98		
			1	49	2		22.86		
			25	0	3		21.86		22.0
			25	12	3		21.76		
			25	25	3		21.89		
			50	0	3		21.79		

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
						20425	20525	20625	
						826.5 MHz	836.5 MHz	846.5 MHz	
LTE Band 5	5	QPSK	1	0	0	23.87	23.92	23.94	25.0
			1	12	0	23.84	23.87	23.80	
			1	24	0	23.96	23.67	23.89	
			12	0	1	22.83	22.86	22.85	24.0
			12	7	1	22.81	22.72	22.86	
			12	13	1	22.94	22.82	22.88	
			25	0	1	22.88	22.89	22.86	
		16QAM	1	0	1	23.21	23.22	22.88	24.0
			1	12	1	23.23	23.41	23.13	
			1	24	1	23.39	23.21	23.26	
			12	0	2	21.85	21.74	21.89	23.0
			12	7	2	21.90	21.82	21.82	
			12	13	2	21.88	21.92	21.81	
			25	0	2	21.82	21.81	21.75	
		64QAM	1	0	2	22.59	22.62	22.93	23.0
			1	12	2	22.95	22.55	22.74	
			1	24	2	22.74	22.67	22.39	
			12	0	3	21.79	21.71	21.85	22.0
			12	7	3	21.83	21.70	21.86	
			12	13	3	21.73	21.72	21.81	
			25	0	3	21.81	21.78	21.86	

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						20415	20525	20635	
						825.5 MHz	836.5 MHz	847.5 MHz	
LTE Band 5	3	QPSK	1	0	0	23.81	23.68	23.80	25.0
			1	8	0	23.72	23.86	23.71	
			1	14	0	23.78	23.79	23.75	
			8	0	1	22.69	22.74	22.71	24.0
			8	4	1	22.81	22.81	22.67	
			8	7	1	22.79	22.82	22.86	
			15	0	1	22.79	22.76	22.73	
		16QAM	1	0	1	23.34	22.92	23.10	24.0
			1	8	1	23.24	23.07	23.24	
			1	14	1	22.82	23.29	23.20	
			8	0	2	21.80	21.86	21.79	23.0
			8	4	2	21.84	21.79	21.73	
			8	7	2	21.76	21.89	21.77	
			15	0	2	21.70	21.83	21.77	
		64QAM	1	0	2	22.86	22.88	22.87	23.0
			1	8	2	22.79	22.89	22.89	
			1	14	2	22.87	22.92	22.82	
			8	0	3	21.61	21.91	21.93	22.0
			8	4	3	21.71	21.71	21.74	
			8	7	3	21.73	21.76	21.76	
			15	0	3	21.76	21.82	21.75	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						20407	20525	20643	
						824.7 MHz	836.5 MHz	848.3 MHz	
LTE Band 5	1.4	QPSK	1	0	0	23.70	23.77	23.78	25.0
			1	3	0	23.82	23.72	23.84	
			1	5	0	23.87	23.75	23.79	
			3	0	0	23.79	23.88	23.68	
			3	1	0	24.00	23.78	23.66	
			3	3	0	23.88	23.74	24.12	
			6	0	1	22.77	22.74	22.82	24.0
		16QAM	1	0	1	23.13	23.21	22.98	24.0
			1	3	1	23.20	23.40	23.03	
			1	5	1	23.30	23.29	23.10	
			3	0	1	23.00	22.95	22.83	
			3	1	1	22.92	22.84	22.72	
			3	3	1	23.03	22.81	22.85	
			6	0	2	21.80	21.91	21.94	23.0
		64QAM	1	0	2	22.92	22.84	22.91	23.0
			1	3	2	22.84	22.92	22.78	
			1	5	2	22.82	22.91	22.87	
			3	0	2	22.90	22.93	22.86	
			3	1	2	22.78	22.89	22.98	
			3	3	2	22.94	22.85	22.81	
			6	0	3	21.78	21.76	21.79	22.0

LTE Band 7 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit									
						20850	21100	21350			20850	21100	21350										
						2510 MHz	2535 MHz	2560 MHz			2510 MHz	2535 MHz	2560 MHz										
LTE Band 7	20	QPSK	1	0	0	22.86	22.68	22.54	24.0	0	14.12	13.87	13.55	14.5									
			1	49	0	22.89	22.79	22.69		0	13.91	13.75	13.47										
			1	99	0	22.81	22.57	22.38		0	13.95	13.81	13.43										
			50	0	1	21.81	21.74	21.65	23.0	1	12.97	12.63	12.71	13.5									
			50	24	1	21.87	21.80	21.73		1	12.95	12.54	12.54										
			50	50	1	21.78	21.64	21.62		1	12.85	12.46	12.63										
		100	0	1	21.90	21.77	21.66	1	12.91	12.65	12.81	13.5											
		16QAM	1	0	1	22.16	21.73	21.56	1	13.34	12.91		12.56										
			1	49	1	22.27	21.85	21.84	1	13.31	12.88		12.48										
			1	99	1	22.08	22.18	22.35	1	13.14	12.81		12.38										
			50	0	2	20.84	20.72	20.74	2	11.96	11.65		11.83										
			50	24	2	20.92	20.81	20.79	2	11.81	11.58		11.71										
			50	50	2	20.75	20.65	20.67	2	11.83	11.53	11.67											
		100	0	2	20.81	20.75	20.69	2	11.94	11.59	11.76	12.5											
		64QAM	1	0	2	21.89	21.62	21.62	2	12.45	12.00		11.87										
			1	49	2	21.94	21.96	21.83	2	12.35	11.92	11.68											
			1	99	2	21.89	21.82	21.82	2	12.31	11.84	11.74											
			50	0	3	20.73	20.84	20.60	3	11.13	10.82	11.01											
			50	24	3	20.81	20.70	20.84	3	11.12	10.70	10.89											
			50	50	3	20.73	20.66	20.64	3	10.95	10.67	10.91											
		100	0	3	20.79	20.75	20.75	3	11.18	10.76	10.95	11.5											
		Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit		MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit						
								20825	21100	21375		20825		21100	21375								
								2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz		2535 MHz	2562.5 MHz								
LTE Band 7	15							QPSK	1	0		0		22.60	22.62	22.63		24.0	0	14.09	13.84	13.41	14.5
									1	37		0		22.88	22.63	22.84			0	13.98	13.76	13.43	
									1	74		0		22.63	22.65	22.60			0	13.95	13.78	13.37	
		36	0	1	21.68	21.67	21.61		23.0	1	12.86	12.47	12.53	13.5									
		36	20	1	21.81	21.76	21.73			1	12.89	12.61	12.59										
		36	39	1	21.78	21.78	21.76			1	12.82	12.57	12.68										
		75	0	1	21.76	21.80	21.59	1	12.93	12.60	12.64	13.5											
		16QAM	1	0	1	22.03	22.01	22.00	1	13.24	12.78		12.54										
			1	37	1	22.10	22.13	22.31	1	13.15	12.85		12.53										
			1	74	1	22.16	22.18	22.25	1	13.24	12.77		12.44										
			36	0	2	20.69	20.75	20.64	2	11.94	11.55		11.67										
			36	20	2	20.82	20.76	20.70	2	11.89	11.53		11.81										
			36	39	2	20.70	20.73	20.63	2	11.87	11.47	11.77											
		75	0	2	20.78	20.72	20.76	2	11.77	11.45	11.74	12.5											
		64QAM	1	0	2	21.95	21.88	21.72	2	12.38	11.97		11.72										
			1	37	2	21.90	21.95	21.92	2	12.33	11.88	11.83											
			1	74	2	21.92	21.75	21.85	2	12.29	11.89	11.87											
			36	0	3	20.62	20.79	20.61	3	11.05	10.68	10.93											
			36	20	3	20.71	20.76	20.67	3	11.04	10.78	10.89											
			36	39	3	20.72	20.70	20.73	3	11.06	10.76	10.99											
		75	0	3	20.77	20.73	20.63	3	11.11	10.66	10.85	11.5											

LTE Band 7 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						20800	21100	21400			20800	21100	21400	
						2505 MHz	2535 MHz	2565 MHz			2505 MHz	2535 MHz	2565 MHz	
LTE Band 7	10	QPSK	1	0	0	22.82	23.04	22.88	24.0	0	14.07	13.67	13.52	14.5
			1	25	0	22.70	22.72	22.68		0	13.95	13.75	13.36	
			1	49	0	22.74	22.70	22.74		0	13.97	13.77	13.43	
			25	0	1	21.72	21.68	21.62	23.0	1	12.88	12.48	12.58	13.5
			25	12	1	21.63	21.65	21.63		1	12.89	12.54	12.55	
			25	25	1	21.64	21.62	21.59		1	12.92	12.49	12.56	
		16QAM	50	0	1	21.81	21.65	21.70	23.0	1	12.86	12.51	12.62	13.5
			1	0	1	22.34	22.32	22.20		1	13.14	12.75	12.44	
			1	25	1	22.14	22.08	22.16		1	13.21	12.73	12.47	
			1	49	1	22.31	22.35	22.30	22.0	1	13.28	12.87	12.39	12.5
			25	0	2	20.72	20.75	20.68		2	11.78	11.56	11.68	
			25	12	2	20.64	20.73	20.60		2	11.81	11.65	11.72	
		64QAM	25	25	2	20.70	20.62	20.69	22.0	2	11.79	11.47	11.82	12.5
			50	0	2	20.77	20.66	20.75		2	11.86	11.54	11.64	
			1	0	2	21.93	21.71	21.77	22.0	2	12.32	11.88	11.83	12.5
			1	25	2	21.87	21.72	21.71		2	12.30	11.98	11.73	
			1	49	2	21.70	21.67	21.73	21.0	2	12.44	11.89	11.72	11.5
			25	0	3	20.68	20.69	20.72		3	11.04	10.75	10.85	
			25	12	3	20.66	20.70	20.63		3	10.94	10.68	10.95	
			25	25	3	20.65	20.63	20.67	21.0	3	11.13	10.67	10.84	
			50	0	3	20.74	20.67	20.72		3	11.05	10.67	11.01	
			50	0	3	20.74	20.67	20.72		3	11.05	10.67	11.01	
LTE Band 7	5	QPSK	1	0	0	22.78	22.91	22.62	24.0	0	14.04	13.73	13.43	14.5
			1	12	0	22.64	22.86	22.58		0	13.98	13.87	13.48	
			1	24	0	22.63	22.87	22.70		0	13.95	13.76	13.37	
		QPSK	12	0	1	21.70	21.76	21.76	23.0	1	12.93	12.46	12.54	13.5
			12	7	1	21.68	21.70	21.78		1	12.95	12.51	12.58	
			12	13	1	21.69	21.74	21.77		1	12.78	12.53	12.66	
		16QAM	25	0	1	21.65	21.75	21.71	23.0	1	12.88	12.58	12.68	13.5
			1	0	1	22.18	22.22	22.16		1	13.31	12.82	12.47	
			1	12	1	22.36	22.52	22.35		1	13.16	12.88	12.46	
			1	24	1	22.34	22.15	22.34	22.0	1	13.23	12.89	12.39	12.5
			12	0	2	20.81	20.83	20.72		2	11.77	11.51	11.67	
			12	7	2	20.85	20.80	20.74		2	11.90	11.65	11.74	
		64QAM	12	13	2	20.72	20.70	20.68	22.0	2	11.91	11.53	11.77	12.5
			25	0	2	20.82	20.69	20.63		2	11.79	11.61	11.74	
			1	0	2	21.61	21.41	21.63	22.0	2	12.28	11.89	11.68	12.5
			1	12	2	21.47	21.48	21.79		2	12.33	11.82	11.75	
			1	24	2	21.52	21.38	21.84	21.0	2	12.41	11.95	11.71	11.5
			12	0	3	20.82	20.81	20.75		3	11.06	10.66	10.93	
			12	7	3	20.74	20.74	20.77		3	11.01	10.62	10.94	
			12	13	3	20.71	20.69	20.71	21.0	3	11.07	10.65	11.01	11.5
			25	0	3	20.69	20.71	20.73		3	11.02	10.78	10.85	
			25	0	3	20.69	20.71	20.73		3	11.02	10.78	10.85	

LTE Band 12 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
							23095		
							707.5 MHz		
LTE Band 12	10	QPSK	1	0	0		23.86		25.0
			1	25	0		23.58		
			1	49	0		24.03		
			25	0	1		22.77		24.0
			25	12	1		22.72		
			25	25	1		22.69		
			50	0	1		22.66		
		16QAM	1	0	1		23.29		24.0
			1	25	1		23.07		
			1	49	1		23.32		
			25	0	2		21.74		23.0
			25	12	2		21.73		
			25	25	2		21.66		
			50	0	2		21.77		
		64QAM	1	0	2		22.68		23.0
			1	25	2		22.81		
			1	49	2		22.91		
			25	0	3		21.73		22.0
			25	12	3		21.71		
			25	25	3		21.79		
			50	0	3		21.69		

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
						23035	23095	23155	
						701.5 MHz	707.5 MHz	713.5 MHz	
LTE Band 12	5	QPSK	1	0	0	23.57	23.59	23.67	25.0
			1	12	0	23.46	23.45	23.57	
			1	24	0	23.58	23.58	23.41	
			12	0	1	22.54	22.62	22.42	
			12	7	1	22.53	22.59	22.48	
			12	13	1	22.48	22.57	22.52	
			25	0	1	22.51	22.61	22.46	
		16QAM	1	0	1	23.03	22.88	23.11	24.0
			1	12	1	23.00	22.80	23.12	
			1	24	1	22.97	23.10	23.06	
			12	0	2	21.56	21.62	21.51	23.0
			12	7	2	21.61	21.67	21.53	
			12	13	2	21.53	21.57	21.58	
			25	0	2	21.55	21.58	21.59	
		64QAM	1	0	2	22.28	22.75	22.83	23.0
			1	12	2	22.57	22.50	22.69	
			1	24	2	22.35	22.51	22.90	
			12	0	3	21.52	21.62	21.52	22.0
			12	7	3	21.54	21.68	21.55	
			12	13	3	21.48	21.63	21.48	
			25	0	3	21.60	21.59	21.54	

LTE Band 12 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						23025	23095	23165	
						700.5 MHz	707.5 MHz	714.5 MHz	
LTE Band 12	3	QPSK	1	0	0	23.44	23.56	23.61	25.0
			1	8	0	23.42	23.48	23.54	
			1	14	0	23.48	23.59	23.44	
			8	0	1	22.41	22.57	22.38	24.0
			8	4	1	22.39	22.55	22.36	
			8	7	1	22.40	22.44	22.40	
			15	0	1	22.50	22.58	22.44	
		16QAM	1	0	1	22.92	23.17	22.90	24.0
			1	8	1	22.77	23.12	22.94	
			1	14	1	22.86	23.06	22.98	
			8	0	2	21.45	21.65	21.46	23.0
			8	4	2	21.51	21.67	21.49	
			8	7	2	21.55	21.56	21.53	
			15	0	2	21.37	21.65	21.61	
		64QAM	1	0	2	22.90	22.48	22.34	23.0
			1	8	2	22.69	22.52	22.50	
			1	14	2	22.61	22.37	22.60	
			8	0	3	21.49	21.56	21.33	22.0
			8	4	3	21.45	21.59	21.43	
			8	7	3	21.42	21.53	21.45	
			15	0	3	21.43	21.51	21.48	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						23017	23095	23173	
						699.7 MHz	707.5 MHz	715.3 MHz	
LTE Band 12	1.4	QPSK	1	0	0	23.58	23.64	23.49	25.0
			1	3	0	23.48	23.71	23.48	
			1	5	0	23.49	23.64	23.46	
			3	0	0	23.56	23.46	23.53	
			3	1	0	23.35	23.49	23.41	
			3	3	0	23.39	23.48	23.51	
			6	0	1	22.52	22.48	22.47	24.0
		16QAM	1	0	1	22.86	22.98	23.01	24.0
			1	3	1	22.89	23.14	23.10	
			1	5	1	22.97	23.19	22.91	
			3	0	1	22.56	22.71	22.48	
			3	1	1	22.42	22.62	22.69	
			3	3	1	22.39	22.65	22.49	
			6	0	2	21.55	21.66	21.56	23.0
		64QAM	1	0	2	22.71	22.84	22.58	23.0
			1	3	2	22.84	22.63	22.59	
			1	5	2	22.45	22.55	22.82	
			3	0	2	22.78	22.60	22.56	
			3	1	2	22.46	22.77	22.69	
			3	3	2	22.59	22.68	22.52	
			6	0	3	21.50	21.56	21.48	22.0

LTE Band 13 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
							23230		
							782 MHz		
LTE Band 13	10	QPSK	1	0	0		24.17		25.0
			1	25	0		23.79		
			1	49	0		23.87		
			25	0	1		22.83		24.0
			25	12	1		22.77		
			25	25	1		22.76		
			50	0	1		22.88		
		16QAM	1	0	1		23.45	24.0	
			1	25	1		23.22		
			1	49	1		23.37		
			25	0	2		21.86	23.0	
			25	12	2		21.83		
			25	25	2		21.77		
			50	0	2		21.89		
		64QAM	1	0	2		22.92	23.0	
			1	25	2		22.75		
			1	49	2		22.80		
			25	0	3		21.88	22.0	
			25	12	3		21.86		
			25	25	3		21.81		
			50	0	3		21.91		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
							23230		
							782 MHz		
LTE Band 13	5	QPSK	1	0	0		23.81		25.0
			1	12	0		23.76		
			1	24	0		23.83		
			12	0	1		22.97		24.0
			12	7	1		22.92		
			12	13	1		22.81		
			25	0	1		22.74		
		16QAM	1	0	1		23.14	24.0	
			1	12	1		23.01		
			1	24	1		23.12		
			12	0	2		21.93	23.0	
			12	7	2		21.85		
			12	13	2		21.87		
			25	0	2		21.79		
		64QAM	1	0	2		22.59	23.0	
			1	12	2		22.81		
			1	24	2		22.93		
			12	0	3		21.94	22.0	
			12	7	3		21.87		
			12	13	3		21.84		
			25	0	3		21.88		

LTE Band 14 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
							23330		
							793 MHz		
LTE Band 14	10	QPSK	1	0	0		24.14		25.0
			1	25	0		23.93		
			1	49	0		24.00		
			25	0	1		22.84		24.0
			25	12	1		22.80		
			25	25	1		22.65		
			50	0	1		22.86		
		16QAM	1	0	1		23.53		24.0
			1	25	1		23.29		
			1	49	1		23.26		
			25	0	2		21.86		23.0
			25	12	2		21.96		
			25	25	2		21.77		
			50	0	2		21.84		
		64QAM	1	0	2		22.97		23.0
			1	25	2		22.91		
			1	49	2		22.76		
			25	0	3		21.90		22.0
			25	12	3		21.91		
			25	25	3		21.82		
50	0			3	21.90				
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)			Tune-up Limit
						23305	23330	23355	
						790.5 MHz	793 MHz	795.5 MHz	
LTE Band 14	5	QPSK	1	0	0	24.13	23.69	23.79	25.0
			1	12	0	24.62	23.80	23.87	
			1	24	0	23.92	23.76	23.79	
			12	0	1	23.04	22.89	22.81	24.0
			12	7	1	22.98	22.91	22.76	
			12	13	1	23.00	22.85	22.70	
			25	0	1	22.92	22.71	22.74	
		16QAM	1	0	1	23.44	23.41	23.29	24.0
			1	12	1	23.51	23.52	23.20	
			1	24	1	23.35	23.30	23.04	
			12	0	2	22.01	21.97	21.80	23.0
			12	7	2	22.03	21.94	21.78	
			12	13	2	22.00	21.90	21.76	
			25	0	2	21.93	21.87	21.78	
		64QAM	1	0	2	22.92	22.66	22.91	23.0
			1	12	2	22.85	22.86	22.81	
			1	24	2	22.93	22.88	22.90	
			12	0	3	21.98	21.91	21.71	22.0
			12	7	3	21.91	21.90	21.75	
			12	13	3	21.93	21.93	21.70	
			25	0	3	21.95	21.87	21.73	

LTE Band 25 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						26140	26365	26590			26140	26365	26590	
						1860 MHz	1882.5 MHz	1905 MHz			1860 MHz	1882.5 MHz	1905 MHz	
LTE Band 25	20	QPSK	1	0	0	21.64	21.88	22.21	23.5	0	15.15	15.20	15.55	16.0
			1	49	0	21.55	22.03	22.13		0	14.98	15.09	15.41	
			1	99	0	21.58	21.56	21.82		0	15.04	15.16	15.44	
			50	0	1	20.62	20.76	21.13	22.5	1	14.13	14.14	14.39	15.0
			50	24	1	20.74	20.86	21.23		1	14.08	14.09	14.29	
			50	50	1	20.71	20.97	21.10		1	14.09	13.99	14.37	
		16QAM	100	0	1	20.68	20.92	21.11	22.5	1	14.06	14.18	14.55	15.0
			1	0	1	20.76	21.42	21.68		1	14.51	14.75	14.71	
			1	49	1	21.07	20.99	21.60		1	14.36	14.56	14.69	
			1	99	1	21.23	21.05	21.12	21.5	1	14.41	14.73	14.69	14.0
			50	0	2	19.69	19.83	20.21		2	13.14	13.13	13.59	
			50	24	2	19.66	19.87	20.07		2	13.02	13.05	13.53	
		64QAM	50	50	2	19.76	19.78	20.06	21.5	2	13.11	12.99	13.53	14.0
			100	0	2	19.69	20.02	20.28		2	13.05	13.15	13.65	
			1	0	2	20.65	21.25	21.18	21.5	2	13.83	13.71	13.97	14.0
			1	49	2	20.81	21.14	20.98		2	13.66	13.63	13.87	
			1	99	2	20.73	20.54	20.89	20.5	2	13.79	13.55	13.81	13.0
			50	0	3	19.64	19.78	20.10		3	12.39	12.41	12.81	
			50	24	3	19.57	19.93	20.14		3	12.33	12.35	12.62	
			50	50	3	19.66	19.85	20.02		3	12.38	12.26	12.76	
			100	0	3	19.61	19.99	20.16		3	12.35	12.46	12.80	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						26115	26365	26615			26115	26365	26615	
						1857.5 MHz	1882.5 MHz	1907.5 MHz			1857.5 MHz	1882.5 MHz	1907.5 MHz	
LTE Band 25	15	QPSK	1	0	0	21.56	22.01	22.13	23.5	0	15.05	15.09	15.53	16.0
			1	37	0	22.22	22.16	21.84		0	14.96	15.03	15.54	
			1	74	0	21.88	21.95	22.14		0	15.12	15.15	15.50	
			36	0	1	20.67	20.97	21.20	22.5	1	14.10	14.09	14.31	15.0
			36	20	1	20.65	21.09	21.26		1	14.08	14.05	14.27	
			36	39	1	20.78	21.04	21.35		1	14.11	14.02	14.35	
		16QAM	75	0	1	20.79	21.09	21.28	22.5	1	13.99	14.05	14.38	15.0
			1	0	1	20.97	21.38	21.87		1	14.44	14.71	14.68	
			1	37	1	20.96	20.99	21.12		1	14.47	14.70	14.54	
			1	74	1	20.86	20.92	21.44	21.5	1	14.41	14.63	14.66	14.0
			36	0	2	19.62	19.96	20.24		2	13.08	13.05	13.52	
			36	20	2	19.65	20.17	20.16		2	12.99	12.96	13.46	
		64QAM	36	39	2	19.77	20.07	20.31	21.5	2	12.94	13.05	13.56	14.0
			75	0	2	19.75	19.97	20.19		2	12.97	13.08	13.58	
			1	0	2	20.57	21.49	21.47	21.5	2	13.64	13.70	13.81	14.0
			1	37	2	20.76	21.14	21.43		2	13.69	13.68	13.91	
			1	74	2	21.24	21.40	21.34	20.5	2	13.61	13.62	13.84	13.0
			36	0	3	19.67	19.91	20.28		3	12.38	12.40	12.74	
			36	20	3	19.66	20.08	20.18		3	12.26	12.21	12.63	
			36	39	3	19.77	19.88	20.29		3	12.23	12.24	12.75	
			75	0	3	19.65	19.94	20.22		3	12.38	12.27	12.68	

LTE Band 25 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						26090	26365	26640			26090	26365	26640	
						1855 MHz	1882.5 MHz	1910 MHz			1855 MHz	1882.5 MHz	1910 MHz	
LTE Band 25	10	QPSK	1	0	0	21.78	21.90	22.08	23.5	0	14.98	15.15	15.43	16.0
			1	25	0	21.61	21.82	21.98		0	15.03	15.19	15.46	
			1	49	0	21.78	22.04	22.04		0	15.09	15.03	15.42	
			25	0	1	20.64	20.85	20.94	22.5	1	13.94	14.02	14.27	15.0
			25	12	1	20.63	20.92	20.99		1	14.10	13.98	14.28	
			25	25	1	20.52	20.81	20.92		1	13.98	14.07	14.31	
		16QAM	50	0	1	20.53	20.76	21.05	22.5	1	14.03	14.05	14.33	15.0
			1	0	1	21.25	21.39	21.57		1	14.33	14.73	14.63	
			1	25	1	20.93	21.02	20.84		1	14.50	14.65	14.58	
			1	49	1	20.89	21.76	21.55	21.5	1	14.34	14.66	14.56	14.0
			25	0	2	19.57	19.82	19.94		2	13.13	13.03	13.42	
			25	12	2	19.64	19.86	20.10		2	13.05	13.05	13.45	
		64QAM	25	25	2	19.55	19.81	20.05	21.5	2	13.09	13.10	13.48	14.0
			50	0	2	19.65	19.90	20.09		2	13.06	13.11	13.55	
			1	0	2	21.17	21.42	21.46	21.5	2	13.76	13.61	13.83	14.0
			1	25	2	20.81	20.96	21.04		2	13.74	13.64	13.78	
			1	49	2	21.22	21.05	21.02	20.5	2	13.77	13.58	13.78	13.0
			25	0	3	19.54	19.82	19.88		3	12.33	12.36	12.65	
			25	12	3	19.60	19.88	19.99		3	12.28	12.33	12.70	
			25	25	3	19.58	19.84	19.91	20.5	3	12.34	12.33	12.67	
			50	0	3	19.57	19.75	19.96		3	12.32	12.24	12.74	
			1	0	0	21.66	21.82	22.06	23.5	0	14.97	15.13	15.43	16.0
		QPSK	1	12	0	21.61	22.01	21.79		0	14.96	15.12	15.52	
			1	24	0	21.53	21.82	22.00		0	15.13	15.05	15.47	
			12	0	1	20.58	20.89	20.96	22.5	1	14.09	14.11	14.28	15.0
			12	7	1	20.56	20.81	20.98		1	13.99	14.14	14.26	
			12	13	1	20.51	20.76	20.95		1	14.07	14.03	14.25	
		16QAM	25	0	1	20.54	20.81	20.90	22.5	1	14.17	14.11	14.33	15.0
			1	0	1	21.09	21.42	21.19		1	14.36	14.70	14.65	
			1	12	1	20.97	21.18	21.31		1	14.31	14.67	14.55	
			1	24	1	21.03	21.54	21.16	21.5	1	14.36	14.72	14.52	14.0
			12	0	2	19.60	19.83	20.02		2	13.09	13.02	13.49	
			12	7	2	19.56	19.91	20.00		2	13.12	13.08	13.51	
LTE Band 25	5	QPSK	12	13	2	19.52	19.76	20.07	21.5	2	13.06	13.06	13.45	14.0
			25	0	2	19.54	19.94	19.92		2	13.07	13.02	13.52	
			1	0	2	20.85	20.98	21.22	21.5	2	13.66	13.60	13.85	14.0
		16QAM	1	12	2	20.54	20.93	21.12		2	13.72	13.67	13.81	
			1	24	2	20.94	20.88	21.17		2	13.77	13.54	13.82	
			12	0	3	19.57	19.94	19.91	20.5	3	12.35	12.41	12.63	13.0
		64QAM	12	7	3	19.53	19.82	20.09		3	12.39	12.36	12.69	
			12	13	3	19.45	19.80	20.02		3	12.39	12.35	12.66	
			25	0	3	19.53	19.84	19.90		3	12.27	12.28	12.73	

LTE Band 25 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						26055	26365	26675			26055	26365	26675	
						1851.5 MHz	1882.5 MHz	1913.5 MHz			1851.5 MHz	1882.5 MHz	1913.5 MHz	
LTE Band 25	3	QPSK	1	0	0	21.68	21.94	22.01	23.5	0	15.05	15.02	15.42	16.0
			1	8	0	21.63	21.90	21.95		0	15.02	15.03	15.36	
			1	14	0	21.62	21.77	21.91		0	15.09	15.12	15.41	
			8	0	1	20.62	20.74	20.94	22.5	1	13.96	14.13	14.23	15.0
			8	4	1	20.74	20.76	20.93		1	14.12	13.96	14.25	
			8	7	1	20.51	20.73	20.96		1	14.15	14.03	14.29	
		16QAM	15	0	1	20.66	20.80	20.92	22.5	1	13.95	14.14	14.22	15.0
			1	0	1	21.24	21.39	21.29		1	14.40	14.55	14.67	
			1	8	1	21.12	21.36	21.45		1	14.36	14.68	14.61	15.0
			1	14	1	21.17	21.04	21.48	21.5	1	14.37	14.63	14.55	
			8	0	2	19.82	19.91	20.02		2	13.12	13.04	13.52	
			8	4	2	19.72	19.92	19.95	21.5	2	13.08	13.02	13.44	14.0
		64QAM	8	7	2	19.65	19.82	20.01		2	13.07	13.03	13.47	
			15	0	2	19.74	19.99	19.89		2	13.03	13.08	13.54	
			1	0	2	20.84	21.10	21.13	21.5	2	13.63	13.75	13.79	14.0
			1	8	2	20.83	21.04	21.00		2	13.72	13.59	13.83	
			1	14	2	21.03	21.00	21.07	20.5	2	13.72	13.71	13.81	
			8	0	3	19.71	19.95	19.99		3	12.23	12.39	12.68	13.0
			8	4	3	19.68	20.00	19.98		3	12.26	12.41	12.79	
			8	7	3	19.61	19.83	20.00		3	12.21	12.38	12.73	
			15	0	3	19.70	19.84	20.06		3	12.29	12.36	12.71	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						26047	26365	26683			26047	26365	26683	
						1850.7 MHz	1882.5 MHz	1914.3 MHz			1850.7 MHz	1882.5 MHz	1914.3 MHz	
LTE Band 25	1.4	QPSK	1	0	0	21.60	21.86	21.94	23.5	0	15.12	15.13	15.52	16.0
			1	3	0	21.70	21.96	21.98		0	15.15	15.03	15.54	
			1	5	0	21.53	21.99	21.87		0	15.04	15.18	15.52	
			3	0	0	21.74	21.80	21.82	22.5	0	15.09	15.12	15.35	15.0
			3	1	0	21.70	21.82	21.79		0	15.11	15.03	15.51	
			3	3	0	21.65	21.79	21.95		0	15.04	15.22	15.45	
		16QAM	6	0	1	20.67	20.79	20.79	22.5	1	14.05	13.95	14.28	15.0
			1	0	1	21.05	21.12	21.29		1	14.13	14.04	14.28	
			1	3	1	20.96	21.22	21.10		1	14.08	14.07	14.24	15.0
			1	5	1	21.16	21.36	21.27	21.5	1	14.12	13.99	14.20	
			3	0	1	20.79	20.90	20.95		1	13.98	13.95	14.24	
			3	1	1	20.78	20.99	20.79	21.5	1	14.39	14.68	14.64	14.0
		64QAM	3	3	1	20.63	21.05	20.92		1	14.32	14.63	14.53	
			6	0	2	19.78	19.81	20.03		2	13.04	13.06	13.53	
			1	0	2	20.77	20.94	21.13	21.5	2	13.61	13.25	13.55	14.0
			1	3	2	20.70	21.28	21.41		2	13.59	13.35	13.61	
			1	5	2	20.66	21.31	21.30		2	13.51	13.25	13.55	
			3	0	2	20.75	21.14	20.94	20.5	2	13.41	13.37	13.45	13.0
			3	1	2	20.88	21.08	20.97		2	13.43	13.35	13.44	
			3	3	2	20.63	21.20	21.01		2	13.39	13.27	13.35	
			6	0	3	19.70	19.88	19.90		3	12.26	12.18	12.40	

LTE Band 26 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						26765	26865	26965	
						821.5 MHz	831.5 MHz	841.5 MHz	
LTE Band 26	15	QPSK	1	0	0	23.66	23.89	24.31	25.0
			1	37	0	24.04	24.09	24.47	
			1	74	0	24.25	24.27	24.66	
			36	0	1	22.81	22.86	23.29	24.0
			36	20	1	22.69	22.83	23.13	
			36	39	1	22.63	22.67	22.94	
			75	0	1	22.73	22.86	23.19	
		16QAM	1	0	1	23.18	23.31	23.64	24.0
			1	37	1	23.21	23.32	23.65	
			1	74	1	23.32	23.32	23.69	
			36	0	2	21.66	21.83	22.07	23.0
			36	20	2	21.69	21.87	22.15	
			36	39	2	21.62	21.63	21.94	
			75	0	2	21.69	21.86	22.13	
		64QAM	1	0	2	22.93	22.96	22.83	23.0
			1	37	2	22.28	22.29	22.23	
			1	74	2	22.92	22.95	22.90	
			36	0	3	21.62	21.75	21.94	22.0
			36	20	3	21.59	21.78	21.91	
			36	39	3	21.42	21.43	21.72	
			75	0	3	21.62	21.65	21.88	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						26740	26865	26990	
						819 MHz	831.5 MHz	844 MHz	
LTE Band 26	10	QPSK	1	0	0	23.42	23.75	24.15	25.0
			1	25	0	23.86	23.83	24.29	
			1	49	0	24.04	24.16	24.45	
			25	0	1	22.59	22.73	23.05	24.0
			25	12	1	22.60	22.65	22.99	
			25	25	1	22.47	22.57	22.68	
			50	0	1	22.53	22.72	23.09	
		16QAM	1	0	1	23.09	23.19	23.41	24.0
			1	25	1	23.12	23.07	23.41	
			1	49	1	23.20	23.11	23.52	
			25	0	2	21.46	21.73	21.89	23.0
			25	12	2	21.46	21.71	21.90	
			25	25	2	21.47	21.42	21.85	
			50	0	2	21.43	21.74	22.00	
		64QAM	1	0	2	22.73	22.92	22.88	23.0
			1	25	2	22.03	22.13	22.44	
			1	49	2	22.69	22.88	22.86	
			25	0	3	21.38	21.60	21.71	22.0
			25	12	3	21.41	21.65	21.79	
			25	25	3	21.27	21.24	21.60	
			50	0	3	21.49	21.45	21.90	

LTE Band 26 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						26715	26865	27015	
						816.5 MHz	831.5 MHz	846.5 MHz	
LTE Band 26	5	QPSK	1	0	0	23.22	23.66	23.92	25.0
			1	12	0	23.76	23.62	24.05	
			1	24	0	23.82	24.09	24.31	
			12	0	1	22.36	22.59	22.95	24.0
			12	7	1	22.38	22.44	22.76	
			12	13	1	22.35	22.43	22.47	
			25	0	1	22.36	22.52	23.00	
		16QAM	1	0	1	22.98	23.02	23.24	24.0
			1	12	1	23.02	22.82	23.29	
			1	24	1	23.00	22.90	23.45	
			12	0	2	21.23	21.53	21.81	23.0
			12	7	2	21.33	21.58	21.67	
			12	13	2	21.40	21.26	21.72	
			25	0	2	21.34	21.68	21.85	
		64QAM	1	0	2	22.55	22.71	22.86	23.0
			1	12	2	21.96	22.01	22.40	
			1	24	2	22.54	22.70	22.95	
			12	0	3	21.25	21.36	21.51	22.0
			12	7	3	21.19	21.57	21.65	
			12	13	3	21.06	21.10	21.51	
			25	0	3	21.43	21.35	21.77	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						26705	26865	27025	
						815.5 MHz	831.5 MHz	847.5 MHz	
LTE Band 26	3	QPSK	1	0	0	23.05	23.60	23.79	25.0
			1	8	0	23.65	23.45	23.95	
			1	14	0	23.74	24.05	24.19	
			8	0	1	22.13	22.44	22.76	24.0
			8	4	1	22.21	22.38	22.60	
			8	7	1	22.25	22.33	22.36	
			15	0	1	22.30	22.28	22.93	
		16QAM	1	0	1	22.87	22.94	23.10	24.0
			1	8	1	22.93	22.67	23.21	
			1	14	1	22.79	22.68	23.34	
			8	0	2	21.03	21.45	21.65	23.0
			8	4	2	21.21	21.52	21.43	
			8	7	2	21.29	21.16	21.57	
			15	0	2	21.26	21.47	21.78	
		64QAM	1	0	2	22.43	22.64	22.68	23.0
			1	8	2	21.87	21.97	22.28	
			1	14	2	22.31	22.50	22.85	
			8	0	3	21.06	21.21	21.27	22.0
			8	4	3	21.04	21.40	21.41	
			8	7	3	20.89	20.90	21.38	
			15	0	3	21.21	21.11	21.56	

LTE Band 26 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						26697	26865	27033	
						814.7 MHz	831.5 MHz	848.3 MHz	
LTE Band 26	1.4	QPSK	1	0	0	23.00	23.39	23.71	25.0
			1	3	0	23.44	23.42	23.82	
			1	5	0	23.62	23.98	24.07	
			3	0	0	23.04	23.24	23.69	
			3	1	0	23.18	23.20	23.47	
			3	3	0	23.09	23.30	23.24	
			6	0	1	23.15	23.11	23.72	24.0
		16QAM	1	0	1	22.73	22.75	23.04	24.0
			1	3	1	22.87	22.46	23.11	
			1	5	1	22.75	22.59	23.30	
			3	0	1	22.05	22.49	22.58	
			3	1	1	22.17	22.45	22.43	
			3	3	1	22.25	22.23	22.47	
			6	0	2	21.10	21.39	21.73	23.0
		64QAM	1	0	2	22.37	22.54	22.66	23.0
			1	3	2	21.66	21.88	22.14	
			1	5	2	22.18	22.33	22.67	
			3	0	2	21.08	21.01	21.18	
			3	1	2	21.10	21.22	21.24	
			3	3	2	21.04	21.06	21.21	
			6	0	3	21.03	21.00	21.53	22.0

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MFR	Max. Meas. Avg Pwr (dBm)					Tune-up Limit	MFR	Reduced Meas. Avg Pwr (dBm)					Tune-up Limit
						39750	40185	40620	41055	41490			39750	40185	40620	41055	41490	
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz	
LTE Band 41	20	QPSK	1	0	0	22.45	22.55	22.96	22.66	21.82	23.5	0	13.18	13.04	13.11	13.23	12.45	14.00
			1	49	0	22.12	22.40	22.82	22.50	21.66		0	12.99	13.16	12.96	13.21	12.32	
			1	99	0	22.12	22.34	22.80	22.45	21.50		0	12.94	13.02	13.04	13.04	12.45	
			50	0	1	21.38	21.45	21.97	21.62	20.82	22.5	1	12.47	12.28	12.20	12.47	11.58	13.00
			50	24	1	21.47	21.49	22.08	21.75	20.78		1	12.33	12.20	12.08	12.45	11.52	
			50	50	1	21.36	21.53	22.02	21.74	20.74		1	12.41	12.22	12.07	12.30	11.38	
		16QAM	100	0	1	21.43	21.54	21.99	21.72	20.76	22.5	1	12.51	12.27	12.23	12.40	11.49	13.00
			1	0	1	21.13	21.23	21.73	21.39	20.51		1	12.19	12.13	12.04	12.29	11.53	
			1	49	1	21.25	21.49	21.94	21.59	20.62		1	12.02	12.04	11.90	12.26	11.36	
			1	99	1	21.32	21.37	21.89	21.61	20.74	21.5	1	12.12	11.97	11.87	12.28	11.49	12.00
			50	0	2	20.37	20.41	20.95	20.65	19.63		2	11.51	11.31	11.23	11.48	10.59	
			50	24	2	20.40	20.51	20.99	20.77	19.73		2	11.35	11.21	11.05	11.41	10.48	
		64QAM	50	50	2	20.50	20.55	21.04	20.75	19.71	21.5	2	11.34	11.12	11.04	11.31	10.52	12.00
			100	0	2	20.37	20.49	21.01	20.78	19.76		2	11.53	11.27	11.26	11.41	10.47	
			1	0	2	21.06	21.14	21.39	21.23	20.36	21.5	2	11.48	11.04	10.98	11.46	10.52	12.00
			1	49	2	20.96	21.11	21.47	21.38	20.38		2	10.72	11.01	10.94	11.39	10.51	
			1	99	2	20.76	20.97	21.43	21.09	20.11	20.5	2	10.65	10.92	10.80	11.35	10.39	11.00
			50	0	3	19.93	20.04	20.35	20.26	19.32		3	10.74	10.55	10.43	10.71	9.79	
			50	24	3	20.04	20.14	20.39	20.37	19.47		3	10.66	10.50	10.24	10.68	9.66	
			50	50	3	19.94	20.09	20.31	20.17	19.19	20.5	3	10.63	10.49	10.35	10.57	9.79	11.00
			100	0	3	19.84	19.86	20.34	20.18	19.18		3	10.87	10.61	10.54	10.75	9.84	
			1	0	0	22.25	22.52	22.90	22.47	21.79	23.5	0	12.97	13.11	13.06	13.12	12.43	14.00
		QPSK	1	37	0	22.05	22.37	22.76	22.43	21.57		0	12.85	13.18	12.93	13.13	12.34	
			1	74	0	22.03	22.25	22.77	22.41	21.52		0	12.96	13.13	12.92	13.21	12.29	
			36	0	1	21.22	21.26	21.77	21.43	20.64	22.5	1	12.36	12.22	12.06	12.30	11.42	13.00
			36	20	1	21.33	21.32	21.96	21.72	20.57		1	12.32	12.18	12.05	12.42	11.51	
			36	39	1	21.21	21.44	21.88	21.72	20.65		1	12.28	12.25	12.02	12.32	11.55	
		16QAM	75	0	1	21.35	21.45	21.78	21.52	20.69	22.5	1	12.41	12.13	12.19	12.45	11.41	13.00
			1	0	1	20.97	21.02	21.63	21.29	20.29		1	12.08	11.95	11.95	12.29	11.51	
			1	37	1	21.13	21.30	21.82	21.44	20.40		1	12.10	12.06	11.94	12.18	11.52	
			1	74	1	21.29	21.28	21.75	21.49	20.61	21.5	1	12.02	11.97	11.96	12.09	11.39	12.00
			36	0	2	20.28	20.25	20.88	20.44	19.53		2	11.33	11.31	11.20	11.33	10.52	
			36	20	2	20.18	20.42	20.82	20.56	19.63		2	11.31	11.17	11.04	11.31	10.57	
		64QAM	36	39	2	20.42	20.44	20.93	20.57	19.53	21.5	2	11.36	11.25	11.08	11.46	10.54	12.00
			75	0	2	20.30	20.28	20.99	20.74	19.64		2	11.35	11.73	11.55	11.48	11.15	
			1	0	2	20.92	21.06	21.36	21.04	20.34	21.5	2	10.82	10.96	10.95	11.45	10.33	12.00
			1	37	2	20.89	21.05	21.32	21.24	20.32		2	10.70	10.97	10.78	11.35	10.46	
			1	74	2	20.70	20.80	21.21	20.92	19.99		2	10.68	10.87	10.90	11.26	10.42	
			36	0	3	19.74	19.89	20.37	20.18	19.15	20.5	3	10.71	10.54	10.35	10.66	9.74	11.00
			36	20	3	19.87	19.99	20.41	20.30	19.31		3	10.73	10.47	10.28	10.53	9.72	
			36	39	3	19.80	19.94	20.42	19.95	18.98		3	10.55	10.47	10.39	10.52	9.78	
			75	0	3	19.72	19.77	20.34	20.06	19.01	20.5	3	10.68	10.42	10.52	10.58	9.65	

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MFR	Max. Meas. Avg Pwr (dBm)					Tune-up Limit	MFR	Reduced Meas. Avg Pwr (dBm)					Tune-up Limit
						39750	40185	40620	41055	41490			39750	40185	40620	41055	41490	
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz	
LTE Band 41	10	QPSK	1	0	0	22.15	22.40	22.82	22.29	21.75	23.5	0	13.03	13.14	13.12	13.05	12.44	14.00
			1	25	0	21.83	22.18	22.67	22.28	21.57		0	12.91	13.13	13.11	13.15	12.41	
			1	49	0	21.97	22.22	22.66	22.34	21.52		0	13.09	13.15	13.09	13.22	12.31	
			25	0	1	21.16	21.15	21.75	21.38	20.57	22.5	1	12.46	12.12	12.05	12.37	11.39	13.00
			25	12	1	21.15	21.22	21.92	21.64	20.55		1	12.42	12.13	12.12	12.27	11.57	
			25	25	1	21.10	21.26	21.70	21.61	20.59		1	12.44	12.27	12.16	12.42	11.58	
		16QAM	50	0	1	21.33	21.41	21.65	21.41	20.62	22.5	1	12.46	12.17	12.13	12.30	11.43	13.00
			1	0	1	20.77	20.99	21.59	21.21	20.51		1	12.02	11.97	11.93	12.17	11.40	
			1	25	1	21.09	21.13	21.73	21.30	20.63		1	12.10	12.02	11.86	12.28	11.38	
			1	49	1	21.20	21.10	21.55	21.41	20.76	21.5	1	12.13	12.04	11.94	12.09	11.50	12.00
			25	0	2	20.22	20.21	20.70	20.28	19.62		2	11.34	11.16	11.07	11.31	10.56	
			25	12	2	20.01	20.33	20.71	20.54	19.71		2	11.37	11.12	11.17	11.33	10.51	
		64QAM	25	25	2	20.30	20.35	20.77	20.50	19.68	21.5	2	11.36	11.13	11.22	11.35	10.45	12.00
			50	0	2	20.24	20.14	20.79	20.63	19.82		2	11.52	11.22	11.16	11.31	10.32	
			1	0	2	20.87	20.99	21.45	20.84	20.18	21.5	2	10.77	11.02	10.89	11.36	10.43	12.00
			1	25	2	20.72	20.85	21.44	21.14	20.29		2	10.71	10.97	10.92	11.44	10.51	
			1	49	2	20.62	20.74	21.12	20.74	19.78	20.5	2	10.68	10.99	10.97	11.24	10.53	11.00
			25	0	3	19.57	19.84	20.33	20.04	19.05		3	10.63	10.35	10.26	10.57	9.69	
			25	12	3	19.75	19.84	20.42	20.17	19.26		3	10.58	10.52	10.33	10.73	9.71	
			25	25	3	19.76	19.89	20.22	19.76	18.94	20.5	3	10.55	10.38	10.27	10.58	9.68	11.00
			50	0	3	19.53	19.58	20.16	19.89	18.85		3	10.85	10.42	10.36	10.71	9.69	
			1	0	0	21.96	22.26	22.63	22.27	21.89	23.5	0	12.99	13.11	12.93	13.07	12.27	14.00
LTE Band 41	5	QPSK	1	12	0	21.62	22.10	22.46	22.18	21.54		0	12.94	13.07	12.96	13.14	12.35	
			1	24	0	21.94	22.07	22.48	22.21	21.55		0	12.92	13.05	12.93	13.11	12.34	
			12	0	1	21.00	20.98	21.61	21.30	20.69	22.5	1	12.47	12.26	12.16	12.33	11.44	13.00
			12	7	1	20.94	21.20	21.88	21.60	20.62		1	12.29	12.17	12.08	12.47	11.46	
			12	13	1	20.99	21.18	21.55	21.47	20.61		1	12.41	12.19	12.03	12.35	11.55	
			25	0	1	21.16	21.31	21.46	21.36	20.72	22.5	1	12.43	12.23	12.05	12.43	11.41	13.00
		16QAM	1	0	1	20.60	20.89	21.45	21.06	20.52		1	12.02	12.11	11.91	12.11	11.39	
			1	12	1	20.92	20.95	21.67	21.18	20.58		1	12.17	12.13	11.95	12.23	11.44	
			1	24	1	21.07	21.00	21.35	21.32	20.74	21.5	1	12.05	12.08	11.93	12.19	11.37	12.00
			12	0	2	20.11	19.99	20.60	20.17	19.53		2	11.34	11.28	11.15	11.34	10.42	
			12	7	2	19.96	20.11	20.57	20.37	19.75		2	11.41	11.23	11.16	11.39	10.55	
			12	13	2	20.11	20.32	20.64	20.36	19.67	21.5	2	11.35	11.22	11.04	11.28	10.56	
		64QAM	25	0	2	20.11	20.05	20.58	20.48	19.75		2	11.47	11.14	11.12	11.34	10.39	12.00
			1	0	2	20.67	20.77	21.30	20.63	20.13	21.5	2	10.73	10.87	10.93	11.46	10.35	
			1	12	2	20.65	20.69	21.34	21.01	20.08		2	10.75	10.84	10.84	11.35	10.49	
			1	24	2	20.52	20.61	21.02	20.54	19.73	20.5	2	10.68	10.97	10.87	11.28	10.39	11.00
			12	0	3	19.52	19.82	20.14	19.95	18.93		3	10.55	10.47	10.29	10.62	9.70	
			12	7	3	19.73	19.74	20.38	20.07	19.20		3	10.66	10.51	10.27	10.52	9.73	
			12	13	3	19.59	19.79	20.06	19.57	18.86	20.5	3	10.62	10.59	10.25	10.65	9.71	
			25	0	3	19.33	19.47	20.08	19.80	18.78		3	10.78	10.56	10.44	10.69	9.68	

LTE Band 66 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						132072	132322	132572			132072	132322	132572	
						1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz	
LTE Band 66	20	QPSK	1	0	0	22.15	21.95	22.07	23.5	0	15.89	15.83	15.85	16.0
			1	49	0	22.05	21.89	21.97		0	15.72	15.73	15.82	
			1	99	0	22.06	21.85	21.93		0	15.80	15.67	15.68	
			50	0	1	21.10	21.07	21.95	22.5	1	14.58	14.47	14.55	15.0
			50	24	1	20.97	20.94	21.81		1	14.84	14.77	14.85	
			50	50	1	20.95	21.06	21.85		1	14.73	14.82	14.80	
		16QAM	100	0	1	21.04	20.98	20.52	22.5	1	14.59	14.53	14.53	15.0
			1	0	1	21.36	21.04	21.19		1	14.82	14.51	14.86	
			1	49	1	21.35	20.98	21.06		1	14.84	14.42	14.81	15.0
			1	99	1	21.29	20.93	21.03	21.5	1	14.74	14.46	14.68	
			50	0	2	20.19	19.94	20.02		2	13.58	13.49	13.48	14.0
			50	24	2	20.16	19.99	20.18		2	13.46	13.42	13.32	
		64QAM	50	50	2	20.25	19.89	20.15	21.5	2	13.57	13.39	13.41	
			100	0	2	20.18	20.02	20.08		2	13.62	13.52	13.59	14.0
			1	0	2	21.11	20.94	21.11	21.5	2	13.85	13.59	13.77	
			1	49	2	21.08	20.80	21.13		2	13.72	13.51	13.69	14.0
			1	99	2	21.02	20.77	21.04	20.5	2	13.69	13.49	13.64	
			50	0	3	20.09	19.92	20.08		3	12.64	12.62	12.58	13.0
			50	24	3	20.02	19.75	20.04		3	12.67	12.43	12.59	
			50	50	3	20.07	19.76	19.99		3	12.85	12.56	12.60	
			100	0	3	20.03	19.93	19.97		3	12.73	12.61	12.68	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						132047	132322	132597			132047	132322	132597	
						1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz	
LTE Band 66	15	QPSK	1	0	0	22.28	22.29	22.32	23.5	0	15.71	15.66	15.71	16.0
			1	37	0	22.23	22.25	22.12		0	15.75	15.81	15.82	
			1	74	0	22.25	22.12	22.31		0	15.82	15.76	15.67	
			36	0	1	21.18	21.12	21.26	22.5	1	14.76	14.69	14.74	15.0
			36	20	1	21.12	21.27	21.14		1	14.88	14.77	14.66	
			36	39	1	21.28	21.20	21.27		1	14.74	14.71	14.79	
		16QAM	75	0	1	21.20	21.10	21.26	22.5	1	14.76	14.82	14.82	15.0
			1	0	1	21.76	21.38	21.63		1	14.70	14.34	14.85	
			1	37	1	21.73	21.20	21.49		1	14.84	14.38	14.67	14.0
			1	74	1	21.59	21.33	21.52	21.5	1	14.79	14.39	14.84	
			36	0	2	20.58	20.37	20.63		2	13.44	13.48	13.32	
			36	20	2	20.67	20.25	20.56	21.5	2	13.42	13.34	13.39	14.0
			36	39	2	20.73	20.24	20.62		2	13.53	13.51	13.45	
		64QAM	75	0	2	20.75	20.26	20.49	21.5	2	13.41	13.55	13.31	14.0
			1	0	2	21.42	21.37	21.41		2	13.71	13.44	13.58	
			1	37	2	21.36	20.23	21.23	20.5	2	13.85	13.45	13.74	13.0
			1	74	2	21.40	20.20	21.27		2	13.79	13.47	13.72	
			36	0	3	20.41	19.35	20.34		3	12.84	12.54	12.72	
			36	20	3	20.35	19.38	20.37		3	12.72	12.44	12.74	
			36	39	3	20.40	19.36	20.32		3	12.77	12.48	12.58	
			75	0	3	20.42	19.18	20.22		3	12.68	12.55	12.61	

LTE Band 66 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						132022	132322	132622			132022	132322	132622	
						1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz	
LTE Band 66	10	QPSK	1	0	0	21.61	21.62	21.71	23.5	0	15.77	15.74	15.81	16.0
			1	25	0	21.55	21.51	21.67		0	15.83	15.63	15.84	
			1	49	0	21.52	21.57	21.54		0	15.76	15.72	15.66	
			25	0	1	20.74	20.61	20.85	22.5	1	14.75	14.68	14.79	15.0
			25	12	1	20.70	20.64	20.73		1	14.75	14.81	14.83	
			25	25	1	20.63	20.52	20.87		1	14.81	14.68	14.72	
		16QAM	50	0	1	20.76	20.63	20.85	22.5	1	14.73	14.64	14.79	15.0
			1	0	1	20.92	20.73	20.91		1	14.84	14.49	14.81	
			1	25	1	20.81	20.72	20.79		1	14.79	14.34	14.65	15.0
			1	49	1	20.75	20.54	20.72	21.5	1	14.72	14.50	14.77	
			25	0	2	19.90	19.60	19.77		2	13.57	13.42	13.42	14.0
			25	12	2	19.84	19.53	19.72		2	13.53	13.33	13.38	
		64QAM	25	25	2	19.77	19.68	19.74	21.5	2	13.56	13.42	13.43	
			50	0	2	19.87	19.64	19.89		2	13.38	13.35	13.36	14.0
			1	0	2	20.79	20.65	20.72	21.5	2	13.75	13.58	13.67	
			1	25	2	20.70	20.57	20.65		2	13.78	13.42	13.59	14.0
			1	49	2	20.67	20.60	20.68		2	13.82	13.42	13.65	
			25	0	3	19.66	19.65	19.58	20.5	3	12.67	12.57	12.62	13.0
			25	12	3	19.60	19.61	19.61		3	12.67	12.48	12.58	
			25	25	3	19.77	19.53	19.56		3	12.73	12.45	12.61	
			50	0	3	19.69	19.52	19.66		3	12.71	12.49	12.70	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						131997	132322	132647			131997	132322	132647	
						1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz	
LTE Band 66	5	QPSK	1	0	0	22.27	22.13	22.31	23.5	0	15.69	15.82	15.72	16.0
			1	12	0	22.15	22.03	22.30		0	15.72	15.67	15.77	
			1	24	0	22.23	22.08	22.11		0	15.74	15.66	15.71	
			12	0	1	21.10	21.11	21.21	22.5	1	14.86	14.78	14.81	15.0
			12	7	1	21.25	20.99	21.22		1	14.82	14.82	14.79	
			12	13	1	21.12	20.98	21.14		1	14.86	14.78	14.77	
		16QAM	25	0	1	21.15	21.03	21.12	22.5	1	14.78	14.76	14.71	15.0
			1	0	1	21.52	21.44	21.59		1	14.72	14.49	14.73	
			1	12	1	21.51	21.32	21.41		1	14.83	14.35	14.83	15.0
			1	24	1	21.45	21.26	21.45	21.5	1	14.89	14.34	14.81	
			12	0	2	20.49	20.41	20.55		2	13.56	13.49	13.45	14.0
			12	7	2	20.47	20.31	20.43		2	13.46	13.42	13.32	
		64QAM	12	13	2	20.37	20.30	20.39	21.5	2	13.42	13.33	13.46	
			25	0	2	20.48	20.39	20.42		2	13.47	13.44	13.36	14.0
			1	0	2	21.46	21.36	21.49	21.5	2	13.68	13.45	13.73	14.0
			1	12	2	21.43	21.21	21.30		2	13.81	13.53	13.77	
			1	24	2	21.34	21.25	21.37		2	13.84	13.58	13.52	13.0
			12	0	3	20.35	20.20	20.42	20.5	3	12.79	12.56	12.63	
			12	7	3	20.33	20.34	20.47		3	12.73	12.42	12.69	
			12	13	3	20.46	20.36	20.37		3	12.69	12.54	12.73	
			25	0	3	20.29	20.18	20.31		3	12.62	12.56	12.62	

LTE Band 66 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit	MPR	Reduced Meas. Avg Pwr (dBm)			Tune-up Limit
						131987	132322	132657			131987	132322	132657	
						1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz	
LTE Band 66	3	QPSK	1	0	0	22.14	22.21	22.21	23.5	0	15.74	15.71	15.84	16.0
			1	8	0	21.98	22.16	22.17		0	15.85	15.73	15.79	
			1	14	0	22.08	22.12	22.14		0	15.84	15.64	15.75	
			8	0	1	21.03	21.02	21.18	22.5	1	14.85	14.67	14.85	15.0
			8	4	1	21.04	21.11	21.16		1	14.79	14.81	14.81	
			8	7	1	21.09	21.15	21.20		1	14.72	14.75	14.74	
		16QAM	15	0	1	21.06	21.08	21.15	22.5	1	14.81	14.74	14.72	15.0
			1	0	1	21.45	21.64	21.66		1	14.87	14.48	14.62	
			1	8	1	21.33	21.64	21.49		1	14.77	14.46	14.66	15.0
			1	14	1	21.30	21.61	21.63	21.5	1	14.84	14.35	14.67	
			8	0	2	20.28	20.46	20.61		2	13.42	13.45	13.47	14.0
			8	4	2	20.37	20.57	20.47		2	13.53	13.34	13.41	
		64QAM	8	7	2	20.41	20.62	20.53	21.5	2	13.51	13.37	13.38	
			15	0	2	20.44	20.46	20.52		2	13.56	13.48	13.35	14.0
			1	0	2	21.29	21.32	21.40	21.5	2	13.68	13.51	13.74	
			1	8	2	21.19	21.26	21.31		2	13.66	13.49	13.58	13.0
			1	14	2	21.10	21.31	21.26	20.5	2	13.71	13.57	13.62	
			8	0	3	20.27	20.23	20.30		3	12.67	12.55	12.74	
		64QAM	8	4	3	20.19	20.23	20.39	20.5	3	12.65	12.42	12.68	13.0
			8	7	3	20.16	20.16	20.23		3	12.79	12.53	12.72	
			15	0	3	20.28	20.13	20.37		3	12.76	12.48	12.61	
LTE Band 66	1.4	QPSK	1	0	0	22.06	22.11	22.14	23.5	0	15.79	15.57	15.51	16.0
			1	3	0	21.96	21.93	22.09		0	15.77	15.69	15.83	
			1	5	0	22.01	21.95	22.04		0	15.75	15.71	15.59	15.0
			3	0	0	21.94	22.09	22.13	22.5	0	15.71	15.51	15.49	
			3	1	0	22.06	22.02	22.00		0	15.74	15.57	15.54	
			3	3	0	22.05	22.10	21.97		0	15.68	15.48	15.53	14.0
		16QAM	6	0	1	20.92	21.09	21.03	22.5	1	14.71	14.64	14.51	
			1	0	1	21.34	21.42	21.46		1	14.65	14.14	14.19	
			1	3	1	21.21	21.33	21.28	22.5	1	14.56	14.30	14.22	15.0
			1	5	1	21.26	21.24	21.32		1	14.50	14.32	14.86	
			3	0	1	21.25	21.34	21.31		1	14.17	14.18	14.16	14.0
			3	1	1	21.20	21.33	21.33	21.5	1	14.21	14.13	14.03	
		64QAM	3	3	1	21.14	21.35	21.45		1	14.15	14.10	14.02	
			6	0	2	20.34	20.41	20.31	21.5	2	13.25	13.28	13.11	14.0
			1	0	2	21.27	21.47	21.47		2	13.35	13.72	13.21	
			1	3	2	21.07	21.33	21.45	21.5	2	13.33	13.62	13.43	14.0
			1	5	2	21.18	21.29	21.38		2	13.30	13.69	13.33	
			3	0	2	21.14	21.43	21.42		2	13.26	13.36	13.36	13.0
			3	1	2	21.26	21.41	21.35	20.5	2	13.27	13.32	13.41	
			3	3	2	21.08	21.39	21.32		2	13.29	13.33	13.35	
			6	0	3	20.12	20.32	20.43		3	12.73	12.67	12.58	

LTE Band 71 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)		Tune-up Limit
						133297		
						680.5 MHz		
LTE Band 71	20	QPSK	1	0	0		23.83	25.0
			1	49	0		23.70	
			1	99	0		23.74	
			50	0	1		22.86	24.0
			50	24	1		22.71	
			50	50	1		22.63	
			100	0	1		22.69	
		16QAM	1	0	1		23.26	24.0
			1	49	1		23.30	
			1	99	1		23.25	
			50	0	2		21.83	23.0
			50	24	2		21.78	
			50	50	2		21.65	
			100	0	2		21.79	
		64QAM	1	0	2		22.99	23.0
			1	49	2		22.92	
			1	99	2		22.90	
			50	0	3		21.79	22.0
			50	24	3		21.66	
			50	50	3		21.64	
			100	0	3		21.71	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pw r (dBm)		Tune-up Limit
						133297		
						680.5 MHz		
LTE Band 71	15	QPSK	1	0	0		23.79	25.0
			1	37	0		23.76	
			1	74	0		23.98	
			36	0	1		22.88	24.0
			36	20	1		22.71	
			36	39	1		22.54	
			75	0	1		22.68	
		16QAM	1	0	1		23.09	24.0
			1	37	1		23.15	
			1	74	1		23.27	
			36	0	2		21.86	23.0
			36	20	2		21.67	
			36	39	2		21.47	
			75	0	2		21.70	
		64QAM	1	0	2		22.61	23.0
			1	37	2		22.54	
			1	74	2		22.96	
			36	0	3		21.91	22.0
			36	20	3		21.58	
			36	39	3		21.54	
			75	0	3		21.69	

LTE Band 71 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						133172	133297	133422	
						668 MHz	680.5 MHz	693 MHz	
LTE Band 71	10	QPSK	1	0	0	24.31	24.38	24.09	25.0
			1	25	0	24.13	24.18	23.99	
			1	49	0	24.51	24.46	24.10	
			25	0	1	22.99	23.29	22.98	24.0
			25	12	1	23.11	23.24	22.97	
			25	25	1	23.27	23.20	22.88	
			50	0	1	23.22	23.36	22.99	
		16QAM	1	0	1	23.31	23.33	23.02	24.0
			1	25	1	23.45	23.63	23.35	
			1	49	1	23.89	23.64	23.62	
			25	0	2	22.26	22.28	21.93	23.0
			25	12	2	22.08	22.15	21.90	
			25	25	2	22.34	22.19	21.95	
			50	0	2	22.19	22.17	21.92	
		64QAM	1	0	2	22.81	22.63	22.72	23.0
			1	25	2	22.96	22.88	22.40	
			1	49	2	22.87	22.90	22.95	
			25	0	3	21.66	21.63	21.37	22.0
			25	12	3	21.47	21.59	21.21	
			25	25	3	21.72	21.66	21.30	
			50	0	3	21.60	21.56	21.32	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			Tune-up Limit
						133147	133297	133447	
						665.5 MHz	680.5 MHz	695.5 MHz	
LTE Band 71	5	QPSK	1	0	0	24.00	23.94	23.82	25.0
			1	12	0	24.07	24.41	23.79	
			1	24	0	23.97	23.99	23.67	
			12	0	1	22.68	22.96	22.80	24.0
			12	7	1	23.00	22.97	22.75	
			12	13	1	22.86	22.96	22.71	
			25	0	1	22.72	22.99	22.70	
		16QAM	1	0	1	23.15	23.14	23.27	24.0
			1	12	1	23.53	23.42	23.29	
			1	24	1	23.41	23.46	23.14	
			12	0	2	21.69	22.04	21.85	23.0
			12	7	2	21.96	22.03	21.79	
			12	13	2	21.85	21.97	21.77	
			25	0	2	21.83	22.14	21.70	
		64QAM	1	0	2	22.42	22.51	22.30	23.0
			1	12	2	22.51	22.94	22.76	
			1	24	2	22.62	22.78	22.58	
			12	0	3	21.29	21.73	21.42	22.0
			12	7	3	21.49	21.56	21.34	
			12	13	3	21.37	21.53	21.32	
			25	0	3	21.53	21.56	21.31	

9.2 Wi-Fi 2.4GHz (DTS Band)

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n/ac/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Tune-up Limit (dBm)	SAR Test (Yes/No)
2.4GHz (DTS)	802.11b	1 Mbps	1	2412	15.33	16.0	Yes
			6	2437	15.42		
			11	2462	15.31		
	802.11g	6 Mbps	1	2412	11.20	11.5	No
			6	2437	14.83	15.0	
			11	2462	12.34	13.0	
	802.11n (HT20)	MCS0	1	2412	10.42	11.0	No
			6	2437	14.68	15.0	
			11	2462	11.38	12.0	
	802.11n (HT40)	MCS0	3	2422	9.46	10.0	No
			6	2437	13.88	15.0	
			9	2452	9.41	10.0	

9.3 Wi-Fi 5GHz (U-NII Bands)

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Tune-up Limit (dBm)	SAR Test (Yes/No)
5.2GHz (U-NII 1)	802.11a	6 Mbps	36	5180	15.81	16.0	No
			40	5200	15.86		
			44	5220	15.69		
			48	5240	15.53		
	802.11n (HT20)	MCS0	36	5180	14.74	15.0	No
			40	5200	14.77		
			44	5220	14.63		
			48	5240	14.50		
	802.11ac (VHT20)	MCS0	36	5180	14.74	15.0	No
			40	5200	14.71		
			44	5220	14.67		
			48	5240	14.57		
	802.11n (HT40)	MCS0	38	5190	14.51	15.0	No
			46	5230	14.45		
	802.11ac (VHT40)	MCS0	38	5190	14.53	15.0	No
			46	5230	14.42		
	802.11ac (VHT80)	MCS0	42	5210	14.34	15.0	No
5.3GHz (U-NII 2A)	802.11a	6 Mbps	52	5260	15.89	16.0	Yes
			56	5280	15.70		
			60	5300	15.67		
			64	5320	15.62		
	802.11n (HT20)	MCS0	52	5260	14.70	15.0	No
			56	5280	14.80		
			60	5300	14.65		
			64	5320	14.68		
	802.11ac (VHT20)	MCS0	52	5260	14.65	15.0	No
			56	5280	14.73		
			60	5300	14.79		
			64	5320	14.64		
	802.11n (HT40)	MCS0	54	5270	14.76	15.0	No
			62	5310	14.72		
	802.11ac (VHT40)	MCS0	54	5270	14.75	15.0	No
			62	5310	14.75		
	802.11ac (VHT80)	MCS0	58	5290	14.63	15.0	No

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Tune-up Limit (dBm)	SAR Test (Yes/No)
5.5GHz (U-NII 2C)	802.11a	6 Mbps	100	5500	15.55	16.0	Yes
			116	5580	15.42		
			124	5620	15.33		
			132	5660	15.41		
			140	5700	15.31		
			144	5720	15.49		
	802.11n (HT20)	MCS0	100	5500	14.34	15.0	No
			116	5580	14.44		
			124	5620	14.33		
			132	5660	14.41		
			140	5700	14.40		
			144	5720	14.39		
	802.11ac (VHT20)	MCS0	100	5500	14.38	15.0	No
			116	5580	14.32		
			124	5620	14.46		
			132	5660	14.45		
			140	5700	14.44		
			144	5720	14.36		
	802.11n (HT40)	MCS0	102	5510	14.41	15.0	No
			110	5550	14.40		
			118	5590	14.33		
			126	5630	14.32		
			134	5670	14.38		
			142	5710	14.38		
	802.11ac (VHT40)	MCS0	102	5510	14.39	15.0	No
			110	5550	14.37		
			118	5590	14.42		
			126	5630	14.37		
			134	5670	14.39		
			142	5710	14.32		
	802.11ac (VHT80)	MCS0	106	5530	14.48	15.0	No
			122	5610	14.30		
			138	5690	14.36		
5.8GHz (U-NII 3)	802.11a	6 Mbps	149	5745	15.74	16.0	Yes
			157	5785	15.52		
			165	5825	15.48		
	802.11n (HT20)	MCS0	149	5745	14.57	15.0	No
			157	5785	14.36		
			165	5825	14.79		
	802.11ac (VHT20)	MCS0	149	5745	14.78	15.0	No
			157	5785	14.47		
			165	5825	14.89		
	802.11n (HT40)	MCS0	151	5755	14.96	15.0	No
			159	5795	14.78		
	802.11ac (VHT40)	MCS0	151	5755	14.49	15.0	No
			159	5795	14.31		
	802.11ac (VHT80)	MCS0	155	5775	14.98	15.0	No

9.4 Bluetooth.


Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Meas. Avg Pwr (mW)	Tune-up Limit (dBm)	SAR Test (Yes/No)
2.4	GFSK	1 Mbps	0	2402	4.71	2.96	5.0	Yes
			39	2441	4.07	2.55	5.0	
			78	2480	6.45	4.42	7.0	
	EDR, $\pi/4$ DQPSK	2 Mbps	0	2402	3.43	2.20	4.0	No
			39	2441	2.50	1.78	4.0	
			78	2480	5.07	3.21	6.0	
	EDR, 8-DPSK	3 Mbps	0	2402	3.41	2.19	4.0	No
			39	2441	2.51	1.78	4.0	
			78	2480	5.03	3.18	6.0	
	LE, GFSK	1 Mbps	0	2402	-4.45	0.36	-4.0	No
			19	2440	-4.77	0.33	-4.0	
			39	2480	-1.67	0.68	-1.0	

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.895	3.75	77.20%	1.30

Duty Cycle plots

GFSK

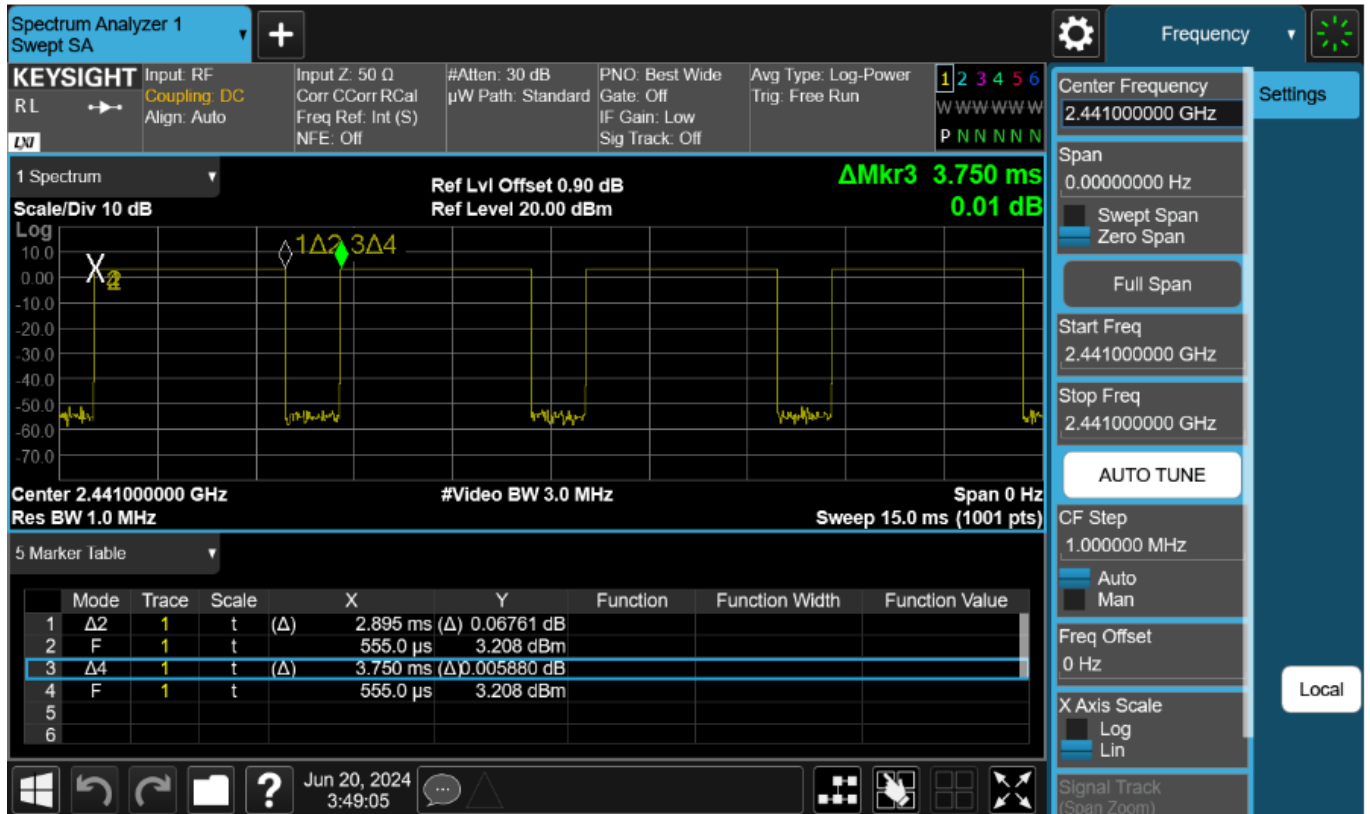

10 Measured and Reported (Scaled) SAR Results

10.1 LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	20525	836.5	1	0	25.0	24.06	0.667	0.83	1
		0	Rear			25	0	24.0	22.83	0.542	0.71	
		0	Rear			50	0	24.0	22.87	0.580	0.75	
		0	Edge 1	20525	836.5	1	0	25.0	24.06	0.291	0.36	
		0	Edge 1			25	0	24.0	22.83	0.239	0.31	
		0	Edge 3	20525	836.5	1	0	25.0	24.06	0.242	0.30	
		0	Edge 3			25	0	24.0	22.83	0.167	0.22	
		0	Edge 4	20525	836.5	1	0	25.0	24.06	0.326	0.40	
		0	Edge 4			25	0	24.0	22.83	0.240	0.31	

10.2 LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	On	0	Rear	20850	2510.0	1	0	14.5	14.12	0.066	0.07	
		On	0	Rear			50	0	13.5	12.97	0.055	0.06	
		On	0	Edge 4	20850	2510.0	1	0	14.5	14.12	0.158	0.17	2
		On	0	Edge 4			50	0	13.5	12.97	0.138	0.16	
		Off	13	Rear	20850	2510.0	1	49	24.0	22.89	0.043	0.06	
		Off	13	Rear			50	24	23.0	21.87	0.052	0.07	
		Off	0	Edge 1	20850	2510.0	1	49	24.0	22.89	0.027	0.04	
		Off	0	Edge 1			50	24	23.0	21.87	0.020	0.03	
		Off	0	Edge 3	20850	2510.0	1	49	24.0	22.89	0.044	0.06	
		Off	0	Edge 3			50	24	23.0	21.87	0.055	0.07	
		Off	22	Edge 4	20850	2510.0	1	49	24.0	22.89	0.033	0.04	
		Off	22	Edge 4			50	24	23.0	21.87	0.042	0.05	

10.3 LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	23095	707.5	1	49	25.0	24.03	0.869	1.09	3
		0	Rear			25	0	24.0	22.77	0.668	0.89	
		0	Rear			50	0	24.0	22.66	0.654	0.89	
		0	Edge 1	23095	707.5	1	49	25.0	24.03	0.154	0.19	
		0	Edge 1			25	0	24.0	22.77	0.122	0.16	
		0	Edge 3	23095	707.5	1	49	25.0	24.03	0.238	0.30	
		0	Edge 3			25	0	24.0	22.77	0.236	0.31	
		0	Edge 4	23095	707.5	1	49	25.0	24.03	0.747	0.93	
		0	Edge 4			25	0	24.0	22.77	0.563	0.75	
		0	Edge 4			50	0	24.0	22.66	0.472	0.64	

10.4 LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	23230	782.0	1	0	25.0	24.17	0.961	1.16	4
		0	Rear			25	0	24.0	22.83	0.732	0.96	
		0	Rear			50	0	24.0	22.88	0.725	0.94	
		0	Edge 1	23230	782.0	1	0	25.0	24.17	0.225	0.27	
		0	Edge 1			25	0	24.0	22.83	0.176	0.23	
		0	Edge 3	23230	782.0	1	0	25.0	24.17	0.393	0.48	
		0	Edge 3			25	0	24.0	22.83	0.320	0.42	
		0	Edge 4	23230	782.0	1	0	25.0	24.17	0.597	0.72	
		0	Edge 4			25	0	24.0	22.83	0.448	0.59	

10.5 LTE Band 14 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	23330	793.0	1	0	25.0	24.14	0.875	1.07	5
		0	Rear			25	0	24.0	22.84	0.669	0.87	
		0	Rear			50	0	24.0	22.86	0.662	0.86	
		0	Edge 1	23330	793.0	1	0	25.0	24.14	0.225	0.27	
		0	Edge 1			25	0	24.0	22.84	0.176	0.23	
		0	Edge 3	23330	793.0	1	0	25.0	24.14	0.422	0.51	
		0	Edge 3			25	0	24.0	22.84	0.323	0.42	
		0	Edge 4	23330	793.0	1	0	25.0	24.14	0.673	0.82	
		0	Edge 4			25	0	24.0	22.84	0.485	0.63	

10.6 LTE Band 25 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	On	0	Rear	26590	1905.0	1	0	16.0	15.55	0.158	0.18	
		On	0	Rear			50	0	15.0	14.39	0.123	0.14	
		On	0	Edge 4	26590	1905.0	1	0	16.0	15.55	0.145	0.16	
		On	0	Edge 4			50	0	15.0	14.39	0.108	0.12	
		Off	13	Rear	26590	1905.0	1	0	23.5	22.21	0.234	0.31	
		Off	13	Rear			50	24	22.5	21.23	0.166	0.22	
		Off	0	Edge 1	26590	1905.0	1	0	23.5	22.21	0.083	0.11	
		Off	0	Edge 1			50	24	22.5	21.23	0.062	0.08	
		Off	0	Edge 3	26590	1905.0	1	0	23.5	22.21	0.306	0.41	6
		Off	0	Edge 3			50	24	22.5	21.23	0.249	0.33	
		Off	22	Edge 4	26590	1905.0	1	0	23.5	22.21	0.122	0.16	
		Off	22	Edge 4			50	24	22.5	21.23	0.110	0.15	

10.7 LTE Band 26 (15MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	26765	821.5	1	74	25.0	24.25	0.652	0.77	7
		0	Rear			36	0	24.0	22.81	0.572	0.75	
		0	Rear	26865	831.5	1	74	25.0	24.27	0.801	0.95	
		0	Rear			36	0	24.0	22.86	0.529	0.69	
		0	Rear	26965	841.5	1	74	25.0	24.66	0.837	0.91	
		0	Rear			36	0	24.0	23.29	0.667	0.79	
		0	Rear			75	0	24.0	23.19	0.647	0.78	
		0	Edge 1	26965	841.5	1	74	25.0	24.66	0.423	0.46	
		0	Edge 1			36	0	24.0	23.29	0.303	0.36	
		0	Edge 3	26965	841.5	1	74	25.0	24.66	0.111	0.12	
		0	Edge 3			36	0	24.0	23.29	0.159	0.19	
		0	Edge 4	26965	841.5	1	74	25.0	24.66	0.573	0.62	
		0	Edge 4			36	0	24.0	23.29	0.258	0.30	

10.8 LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	On	0	Rear	41055	2636.5	1	0	14.0	13.23	0.125	0.15	8
		On	0	Rear			50	0	13.0	12.47	0.094	0.11	
		On	0	Edge 4	41055	2636.5	1	0	14.0	13.23	0.160	0.19	
		On	0	Edge 4			50	0	13.0	12.47	0.121	0.14	
		Off	13	Rear	40620	2593.0	1	0	23.5	22.96	0.120	0.14	
		Off	13	Rear			50	24	22.5	22.08	0.093	0.10	
		Off	0	Edge 1	40620	2593.0	1	0	23.5	22.96	0.024	0.03	
		Off	0	Edge 1			50	24	22.5	22.08	0.019	0.02	
		Off	0	Edge 3	39750	2506.0	1	0	23.5	22.45	0.020	0.03	
		Off	0	Edge 3			50	24	22.5	21.47	0.022	0.03	
		Off	0	Edge 3	40185	2549.5	1	0	23.5	22.55	0.019	0.02	
		Off	0	Edge 3			50	50	22.5	21.53	0.027	0.03	
		Off	0	Edge 3	40620	2593.0	1	0	23.5	22.96	0.180	0.20	
		Off	0	Edge 3			50	24	22.5	22.08	0.156	0.17	
		Off	0	Edge 3	41055	2636.5	1	0	23.5	22.66	0.225	0.27	
		Off	0	Edge 3			50	24	22.5	21.75	0.086	0.10	
		Off	0	Edge 3	41490	2680.0	1	0	23.5	21.82	0.151	0.22	
		Off	0	Edge 3			50	0	22.5	20.82	0.230	0.34	
		Off	22	Edge 4	40620	2593.0	1	0	23.5	22.96	0.080	0.09	
		Off	22	Edge 4			50	24	22.5	22.08	0.065	0.07	

10.9 LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	On	0	Rear	132072	1720.0	1	0	16.0	15.89	0.376	0.39	
		On	0	Rear			50	24	15.0	14.84	0.348	0.36	
		On	0	Edge 4	132072	1720.0	1	0	16.0	15.89	0.347	0.36	
		On	0	Edge 4			50	24	15.0	14.84	0.312	0.32	
		Off	13	Rear	132072	1720.0	1	0	24.0	22.15	0.611	0.94	
		Off	13	Rear			50	0	23.0	21.10	0.536	0.83	
		Off	13	Rear			100	0	23.0	21.04	0.554	0.87	
		Off	13	Rear	132322	1745.0	1	0	24.0	21.95	0.591	0.95	
		Off	13	Rear			50	0	23.0	21.07	0.291	0.45	
		Off	13	Rear	132572	1770.0	1	0	24.0	22.07	0.449	0.70	
		Off	13	Rear			50	0	23.0	21.95	0.352	0.45	
		Off	0	Edge 1	132072	1720.0	1	0	24.0	22.15	0.081	0.12	
		Off	0	Edge 1			50	0	23.0	21.10	0.071	0.11	
		Off	0	Edge 3	132072	1720.0	1	0	24.0	22.15	0.637	0.98	9
		Off	0	Edge 3			50	0	23.0	21.10	0.558	0.86	
		Off	0	Edge 3			100	0	23.0	21.04	0.567	0.89	
		Off	0	Edge 3	132322	1745.0	1	0	24.0	21.95	0.591	0.95	
		Off	0	Edge 3			50	0	23.0	21.07	0.475	0.74	
		Off	0	Edge 3	132572	1770.0	1	0	24.0	22.07	0.435	0.68	
		Off	0	Edge 3			50	0	23.0	21.95	0.349	0.44	
		Off	22	Edge 4	132072	1720.0	1	0	24.0	22.15	0.477	0.73	
		Off	22	Edge 4			50	0	23.0	21.10	0.393	0.61	

10.10 LTE Band 71 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	QPSK	0	Rear	133297	680.5	1	0	25.0	23.83	0.642	0.84	
		0	Rear			50	0	24.0	22.86	0.532	0.69	
		0	Rear			100	0	24.0	22.69	0.545	0.74	
		0	Edge 1	133297	680.5	1	0	25.0	23.83	0.116	0.15	
		0	Edge 1			50	0	24.0	22.86	0.100	0.13	
		0	Edge 3	133297	680.5	1	0	25.0	23.83	0.178	0.23	
		0	Edge 3			50	0	24.0	22.86	0.153	0.20	
		0	Edge 4	133297	680.5	1	0	25.0	23.83	0.781	1.02	10
		0	Edge 4			50	0	24.0	22.86	0.532	0.69	
		0	Edge 4			100	0	24.0	22.69	0.601	0.81	

10.11 Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Body	802.11b	0	Rear	6	2437	98.83%	16.0	15.42	0.263	0.30	
		0	Edge 1	6	2437	98.83%	16.0	15.42	0.596	0.69	11

10.12 Wi-Fi (U-NII Band)

RF Exposure Conditions	Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	5.3 (U-NII 2A)	802.11a	0	Rear	52	5260	98.16%	16.0	15.89	0.191	0.20	
		802.11a	0	Edge 1	52	5260	98.16%	16.0	15.89	0.707	0.74	12
Body	5.5 (U-NII 2C)	802.11a	0	Rear	100	5500	98.16%	16.0	15.55	0.262	0.30	
		802.11a	0	Edge 1	100	5500	98.16%	16.0	15.55	0.529	0.60	13
Body	5.8 (U-NII 3)	802.11a	0	Rear	149	5745	98.16%	16.0	15.74	0.186	0.20	
		802.11a	0	Edge 1	149	5745	98.16%	16.0	15.74	0.479	0.52	14

10.13 Bluetooth

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Body	GFSK_1M	0	Rear	78	2480	77.2%	7.0	6.45	0.022	0.03	
		0	Edge 1	78	2480	77.2%	7.0	6.45	0.065	0.10	15

10.14 NFC

Refer to test report TESA2407000436E5.

11 SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

LTE Band 12

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
								Original	Repeated	
Body	QPSK	0	Rear	23095	707.5	1	49	0.869	0.859	1.01

LTE Band 13

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
								Original	Repeated	
Body	QPSK	0	Rear	23230	782.0	1	0	0.961	0.932	1.03

LTE Band 14

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
								Original	Repeated	
Body	QPSK	0	Rear	23330	793.0	1	0	0.875	0.851	1.03

LTE Band 26

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
								Original	Repeated	
Body	QPSK	0	Rear	26965	841.5	1	74	0.837	0.828	1.01

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20.

12 Simultaneous Transmission SAR Analysis

KDB 447498 D04 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D04 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest reported SAR for the frequency bands should be used to determine SAR₁ or SAR₂. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations					
Body	1	LTE	+	DTS			
	2	LTE	+	DTS	+	BT	
	3	LTE	+	DTS	+	BT	+
	4	LTE	+	U-NII			
	5	LTE	+	U-NII	+	BT	
	6	LTE	+	U-NII	+	BT	+
	7	LTE	+	BT			
	8	LTE	+	BT	+	NFC	
	9	LTE	+	NFC			
	10	DTS	+	BT			
	11	DTS	+	BT	+	NFC	
	12	U-NII	+	BT			
	13	U-NII	+	BT	+	NFC	
	14	BT	+	NFC			

Report No.: TMWK2405001811KS

Estimated SAR for Simultaneous Transmission SAR Analysis Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.
3. Refer to Appendix E of KDB 447498 D04 and multiply the corresponding ratio by the 1-g SAR limit of 1.6 W/kg SAR.

SAR_{est} is given by:

$$SAR_{est} = 1.6 * P_{ant} / P_{th} [W/kg]$$

Estimated SAR for $0.3 \text{ GHz} \leq f < 1.5 \text{ GHz}$

Tx Interface	Frequency (GHz)	Output Power		Antenna Gain (dBi)	ERP (dBm)	ERP Threshold (mW)	Separation Distances (mm)					Separation Distances (cm)					P ₁ (mW)					Estimated 1-g SAR Value (W/kg)				
		dBm	mW				Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
LTE Band 5	0.844	25.00	316	-0.7	22.15	154.06	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	17	180	1722	11	10	MEASURE	MEASURE	0.29	MEASURE	MEASURE
LTE Band 12	0.711	25.00	316	-0.7	22.15	154.06	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	20	180	1494	14	13	MEASURE	MEASURE	0.35	MEASURE	MEASURE
LTE Band 13	0.782	25.00	316	-1.6	24.45	278.61	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	18	180	1506	17	11	MEASURE	MEASURE	0.32	MEASURE	MEASURE
LTE Band 14	0.793	25.00	316.5	-1.5	24.35	277.27	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	18	180	1506	17	11	MEASURE	MEASURE	0.31	MEASURE	MEASURE
LTE Band 17	0.711	25.00	316	-0.7	22.15	154.06	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	20	180	1494	14	13	MEASURE	MEASURE	0.35	MEASURE	MEASURE
LTE Band 26	0.9415	25.00	316	-0.7	22.15	154.06	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	17	180	1727	11	10	MEASURE	MEASURE	0.29	MEASURE	MEASURE
LTE Band 71	0.688	25.00	316	-0.7	22.15	154.06	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	21	180	1494	15	13	MEASURE	MEASURE	0.36	MEASURE	MEASURE

Estimated SAR for $1.5 \text{ GHz} \leq f \leq 6 \text{ GHz}$

Tx Interface	Frequency (GHz)	Output Power		Antenna Gain (dBi)	ERP (dBm)	ERP Threshold (mW)	Separation Distances (mm)					Separation Distances (cm)					P ₁ (mW)					Estimated 1-g SAR Value (W/kg)				
		dBm	mW				Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
LTE Band 2	1.9	23.50	224	-0.1	21.25	133.35	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	7	177	3800	4	4	MEASURE	MEASURE	0.12	MEASURE	MEASURE
LTE Band 4	1.745	23.50	224	-2.4	18.95	78.52	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	8	182	3950	5	4	MEASURE	MEASURE	0.12	MEASURE	MEASURE
LTE Band 7	2.56	24.00	251	-4.7	17.15	51.88	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	5	182	3950	4	3	MEASURE	MEASURE	0.13	MEASURE	MEASURE
LTE Band 25	1.905	23.50	224	-0.1	21.25	133.35	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	7	177	3800	4	4	MEASURE	MEASURE	0.12	MEASURE	MEASURE
LTE Band 41	2.68	23.50	224	-3.9	17.45	55.59	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	6	180	3850	3	3	MEASURE	MEASURE	0.12	MEASURE	MEASURE
LTE Band 66	1.77	23.50	224	-2.4	18.95	78.52	74	42.8	221	5.8	5.3	0.76	4.28	21.1	0.58	0.53	8	182	3950	5	4	MEASURE	MEASURE	0.12	MEASURE	MEASURE
WRR 2.4GHz	2.482	16.00	40	0.44	14.29	26.85	107	7	30	124.6	185	1.07	0.7	3	12.46	185	12	5	61	1149	2903	MEASURE	MEASURE	0.77	0.05	0.02
WRR 5.2GHz	5.24	16.00	40	-0.74	13.11	20.45	107	7	30	124.6	185	1.07	0.7	3	12.46	185	7	3	61	1149	2904	MEASURE	MEASURE	1.05	0.06	0.02
WRR 5.3GHz	5.32	16.00	40	-0.74	13.11	20.45	107	7	30	124.6	185	1.07	0.7	3	12.46	185	7	3	61	1149	2904	MEASURE	MEASURE	1.07	0.06	0.02
WRR 5.5GHz	5.7	16.00	40	-0.3	13.55	22.65	107	7	30	124.6	185	1.07	0.7	3	12.46	185	7	3	59	1141	2903	MEASURE	MEASURE	1.08	0.06	0.02
WRR 5.8GHz	5.825	16.00	40	0.53	14.38	27.42	107	7	30	124.6	185	1.07	0.7	3	12.46	185	7	3	58	1138	2902	MEASURE	MEASURE	1.10	0.06	0.02
BT	2.48	7.00	5	0.44	5.29	9.38	107	7	30	124.6	185	1.07	0.7	3	12.46	185	12	5	61	1149	2904	0.67	MEASURE	0.10	0.01	0.00

12.1 Sum of the SAR for LTE Band 5 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	0.83	0.30	0.30	0.03	0.001	1.13	1.16	1.16	1.13	1.16	1.16	0.86	0.86	0.83	
Edge 1	0.36	0.69	0.74	0.10	0.001	1.05	1.15	1.15	1.10	1.20	1.20	0.46	0.46	0.36	
Edge 2	0.29	0.77	1.10	0.10	0.001	1.06	1.16	1.16	1.39	1.49	1.49	0.39	0.39	0.29	
Edge 3	0.30	0.05	0.06	0.01	0.001	0.35	0.36	0.36	0.36	0.37	0.37	0.31	0.31	0.30	
Edge 4	0.40	0.02	0.02	0.00	0.002	0.42	0.42	0.42	0.42	0.42	0.42	0.40	0.40	0.40	

12.2 Sum of the SAR for LTE Band 7 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	0.07	0.30	0.30	0.03	0.001	0.37	0.40	0.40	0.37	0.40	0.40	0.10	0.10	0.07	
Edge 1	0.04	0.69	0.74	0.10	0.001	0.73	0.83	0.83	0.78	0.88	0.88	0.14	0.14	0.04	
Edge 2	0.13	0.77	1.10	0.10	0.001	0.90	1.00	1.00	1.23	1.33	1.33	0.23	0.23	0.13	
Edge 3	0.07	0.05	0.06	0.01	0.001	0.12	0.13	0.13	0.13	0.14	0.14	0.08	0.08	0.07	
Edge 4	0.17	0.02	0.02	0.00	0.002	0.19	0.19	0.19	0.19	0.19	0.19	0.17	0.17	0.17	

12.3 Sum of the SAR for LTE Band 12 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	1.09	0.30	0.30	0.03	0.001	1.39	1.42	1.42	1.39	1.42	1.42	1.12	1.12	1.09	
Edge 1	0.19	0.69	0.74	0.10	0.001	0.88	0.98	0.98	0.93	1.03	1.03	0.29	0.29	0.19	
Edge 2	0.35	0.77	1.10	0.10	0.001	1.12	1.22	1.22	1.45	1.55	1.55	0.45	0.45	0.35	
Edge 3	0.31	0.05	0.06	0.01	0.001	0.36	0.37	0.37	0.37	0.38	0.38	0.32	0.32	0.31	
Edge 4	0.93	0.02	0.02	0.00	0.002	0.95	0.95	0.95	0.95	0.95	0.95	0.93	0.93	0.93	

12.4 Sum of the SAR for LTE Band 13 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	1.16	0.30	0.30	0.03	0.001	1.46	1.49	1.49	1.46	1.49	1.49	1.19	1.19	1.16	
Edge 1	0.27	0.69	0.74	0.10	0.001	0.96	1.06	1.06	1.01	1.11	1.11	0.37	0.37	0.27	
Edge 2	0.32	0.77	1.10	0.10	0.001	1.09	1.19	1.19	1.42	1.52	1.52	0.42	0.42	0.32	
Edge 3	0.48	0.05	0.06	0.01	0.001	0.53	0.54	0.54	0.54	0.55	0.55	0.49	0.49	0.48	
Edge 4	0.72	0.02	0.02	0.00	0.002	0.74	0.74	0.74	0.74	0.74	0.74	0.72	0.72	0.72	

12.5 Sum of the SAR for LTE Band 14 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	1.07	0.30	0.30	0.03	0.001	1.37	1.40	1.40	1.37	1.40	1.40	1.10	1.10	1.07	
Edge 1	0.27	0.69	0.74	0.10	0.001	0.96	1.06	1.06	1.01	1.11	1.11	0.37	0.37	0.27	
Edge 2	0.31	0.77	1.10	0.10	0.001	1.08	1.18	1.18	1.41	1.51	1.51	0.41	0.41	0.31	
Edge 3	0.51	0.05	0.06	0.01	0.001	0.56	0.57	0.57	0.57	0.58	0.58	0.52	0.52	0.51	
Edge 4	0.82	0.02	0.02	0.00	0.002	0.84	0.84	0.84	0.84	0.84	0.84	0.82	0.82	0.82	

12.6 Sum of the SAR for LTE Band 25 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	0.31	0.30	0.30	0.03	0.001	0.61	0.64	0.64	0.61	0.64	0.64	0.34	0.34	0.31	
Edge 1	0.11	0.69	0.74	0.10	0.001	0.80	0.90	0.90	0.85	0.95	0.95	0.21	0.21	0.11	
Edge 2	0.12	0.77	1.10	0.10	0.001	0.89	0.99	0.99	1.22	1.32	1.32	0.22	0.22	0.12	
Edge 3	0.41	0.05	0.06	0.01	0.001	0.46	0.47	0.47	0.47	0.48	0.48	0.42	0.42	0.41	
Edge 4	0.16	0.02	0.02	0.00	0.002	0.18	0.18	0.18	0.18	0.18	0.18	0.16	0.16	0.16	

12.7 Sum of the SAR for LTE Band 26 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	0.95	0.30	0.30	0.03	0.001	1.25	1.28	1.28	1.25	1.28	1.28	0.98	0.98	0.95	
Edge 1	0.46	0.69	0.74	0.10	0.001	1.15	1.25	1.25	1.20	1.30	1.30	0.56	0.56	0.46	
Edge 2	0.29	0.77	1.10	0.10	0.001	1.06	1.16	1.16	1.39	1.49	1.49	0.39	0.39	0.29	
Edge 3	0.19	0.05	0.06	0.01	0.001	0.24	0.25	0.25	0.25	0.26	0.26	0.20	0.20	0.19	
Edge 4	0.62	0.02	0.02	0.00	0.002	0.64	0.64	0.64	0.64	0.64	0.64	0.62	0.62	0.62	

12.8 Sum of the SAR for LTE Band 41 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)									
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + NFC	
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(5)	
Rear	0.15	0.30	0.30	0.03	0.001	0.45	0.48	0.48	0.45	0.48	0.48	0.18	0.18	0.15	
Edge 1	0.03	0.69	0.74	0.10	0.001	0.72	0.82	0.82	0.77	0.87	0.87	0.13	0.13	0.03	
Edge 2	0.12	0.77	1.10	0.10	0.001	0.89	0.99	0.99	1.22	1.32	1.32	0.22	0.22	0.12	
Edge 3	0.34	0.05	0.06	0.01	0.001	0.39	0.40	0.40	0.40	0.41	0.41	0.35	0.35	0.34	
Edge 4	0.19	0.02	0.02	0.00	0.002	0.21	0.21	0.21	0.21	0.21	0.21	0.19	0.19	0.19	

12.9 Sum of the SAR for LTE Band 66 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)								
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + BT + NFC + U-NII
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(4)+(5)+(3)
Rear	0.95	0.30	0.30	0.03	0.001	1.25	1.28	1.28	1.25	1.28	1.28	0.98	0.98	0.95
Edge 1	0.12	0.69	0.74	0.10	0.001	0.81	0.91	0.91	0.86	0.96	0.96	0.22	0.22	0.12
Edge 2	0.12	0.77	1.10	0.10	0.001	0.89	0.99	0.99	1.22	1.32	1.32	0.22	0.22	0.12
Edge 3	0.98	0.05	0.06	0.01	0.001	1.03	1.04	1.04	1.04	1.05	1.05	0.99	0.99	0.98
Edge 4	0.73	0.02	0.02	0.00	0.002	0.75	0.75	0.75	0.75	0.75	0.75	0.73	0.73	0.73

12.10 Sum of the SAR for LTE Band 71 & Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)								
	WWAN	DTS	U-NII	BT	NFC	WWAN + DTS	WWAN + DTS + BT	WWAN + DTS + BT + NFC	WWAN + U-NII	WWAN + U-NII + BT	WWAN + U-NII + BT + NFC	WWAN + BT	WWAN + BT + NFC	WWAN + BT + NFC + U-NII
	(1)	(2)	(3)	(4)	(5)	(1)+(2)	(1)+(2)+(4)	(1)+(2)+(4)+(5)	(1)+(3)	(1)+(3)+(4)	(1)+(3)+(4)+(5)	(1)+(4)	(1)+(4)+(5)	(1)+(4)+(5)+(3)
Rear	0.84	0.30	0.30	0.03	0.001	1.14	1.17	1.17	1.14	1.17	1.17	0.87	0.87	0.84
Edge 1	0.15	0.69	0.74	0.10	0.001	0.84	0.94	0.94	0.89	0.99	0.99	0.25	0.25	0.15
Edge 2	0.36	0.77	1.10	0.10	0.001	1.13	1.23	1.23	1.46	1.56	1.56	0.46	0.46	0.36
Edge 3	0.23	0.05	0.06	0.01	0.001	0.28	0.29	0.29	0.29	0.30	0.30	0.24	0.24	0.23
Edge 4	1.02	0.02	0.02	0.00	0.002	1.04	1.04	1.04	1.04	1.04	1.04	1.02	1.02	1.02

12.11 Sum of the SAR for Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)				
	DTS	U-NII	BT	NFC	DTS + BT	DTS + BT + NFC	U-NII + BT	U-NII + BT + NFC	BT + NFC
	(1)	(2)	(3)	(4)	(1)+(3)	(1)+(3)+(4)	(2)+(3)	(2)+(3)+(4)	(3)+(4)
Rear	0.30	0.30	0.03	0.001	0.33	0.33	0.33	0.33	0.03
Edge 1	0.69	0.74	0.10	0.001	0.79	0.79	0.84	0.84	0.10
Edge 2	0.77	1.10	0.10	0.001	0.87	0.87	1.20	1.20	0.10
Edge 3	0.05	0.06	0.01	0.001	0.06	0.06	0.07	0.07	0.01
Edge 4	0.02	0.02	0.00	0.002	0.02	0.02	0.02	0.02	0.00

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

13 Equipment List & Calibration Status

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements				
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1053	2025/2/20
Thermometer	TES	TES-1306	210801061	2024/11/1

System Check				
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50145826	2024/9/21
Power Meter	Anritsu	ML2496A	2136002	2024/11/15
Power Sensor	Anritsu	MA2411B	1911386	2024/7/24
Power Sensor	Anritsu	MA2411B	1911387	2024/7/24
Dual Directional Coupler	Agilent	778D	MY48220468	2024/9/25
Dual Directional Coupler	Agilent	772D	MY46151258	2024/9/25
Amplifier	EMCI	ZHL-42	980189	N/A
Amplifier	EMCI	ZVE-8G	980190	N/A
Data Acquisition Electronics	SPEAG	DAE4	1751	2025/3/12
Dosimetric E-Field Probe	SPEAG	EX3DV4	3665	2024/8/17
System Validation Dipole	SPEAG	D750V3	1015	2024/9/17
System Validation Dipole	SPEAG	D835V2	4d063	2024/9/19
System Validation Dipole	SPEAG	D1750V2	1008	2024/9/18
System Validation Dipole	SPEAG	D1900V2	5d173	2025/4/24
System Validation Dipole	SPEAG	D2450V2	727	2025/4/21
System Validation Dipole	SPEAG	D2600V2	1005	2025/1/21
System Validation Dipole	SPEAG	D5GHzV2	1023	2025/1/23
Humidity/Temp meter	TECEP	DTM-303A	TP131515	2025/5/22
Thermometer	TES	TES-1306	210801061	2024/11/1

OTHER				
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Radio Communication Analyzer	Anritsu	MT-8821C	6272374568	2025/2/16

Software Version	
DASY NEO52 D10.3 S14.6.13	
SEMCAD-X-PostPro	



Report No.: TMWK2405001811KS

Page: 75 / 76
Rev.: 00

14 Facilities

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.



Report No.: TMWK2405001811KS

Page: 76 / 76
Rev.: 00

15 Appendixes

Exhibit	Content
1	SAR Setup Photos
2	SAR System Check Plots
3	Highest SAR Test Plots
4	SAR DAE and Probe Calibration Certificates
5	SAR Dipole Calibration Certificates

END OF REPORT