




FCC RADIO TEST REPORT

FCC ID : P4Q-TG2A001
Equipment : Internet Gateway
Brand Name : Amazon, AWS, SKF, 
Model Name : TG2A001,
TG2A001YYYY (Y= 10 characters, Y can be
0-9, a-z, A-Z, “-“, “_” or blank for marketing
purpose and no impact safety related critical
components and constructions.)
Applicant : Mitac Digital Technology Corp.
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE
PARK, HSINCHU 30076, TAIWAN, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 26, 2024 and testing was performed from Jul. 02, 2024 to Jul. 24, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
3 Test Result.....	10
3.1 Output Power Measurement.....	10
3.2 Radiated Band Edges and Spurious Emission Measurement	11
3.3 Antenna Requirements.....	14
4 List of Measuring Equipment	15
5 Measurement Uncertainty	16
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Data	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR430401A	01	Initial issue of report	Nov. 29, 2024
FR430401A	02	Revise Summary of Test Result This report is an updated version, replacing the report issued on Nov. 29, 2024.	Dec. 13, 2024
FR430401A	03	Revise Summary of Test Result This report is an updated version, replacing the report issued on Dec. 13, 2024.	Dec. 18, 2024
FR430401A	04	Revise Product Feature of Equipment Under Test This report is an updated version, replacing the report issued on Dec. 18, 2024.	Dec. 25, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	Pass	See Note
-	15.247(a)(1)	Hopping Channel Separation	Pass	See Note
-	15.247(a)(1)	Dwell Time of Each Channel	Pass	See Note
-	15.247(a)(1)	20dB Bandwidth	Pass	See Note
-	2.1049	99% Occupied Bandwidth	Pass	See Note
3.1	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	Pass	See Note
-	15.247(d)	Conducted Spurious Emission	Pass	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	9.99 dB under the limit at 2487.42 MHz
-	15.207	AC Conducted Emission	Pass	See Note
3.3	15.203	Antenna Requirement	Pass	-

Note:

- For host device, Radiated Spurious Emission is verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: AW-XM553)
- Spot-check testing on unwanted (spurious) radiated emissions is carried out on the worst-case modulation and channel per frequency range as shown in original module's filing.
- Radiated Spurious Emission is verified and complies with the limit in this test report.
- Bluetooth BR and Bluetooth LE have the same modulation, therefore the low frequency test data can refer to report no. FR430401B.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

- The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
- The purpose of different brand name is for marketing segmentation.

Reviewed by: Sheng Kuo
Report Producer: Mila Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Sub 1GHz.
Antenna Type WLAN: PIFA Antenna Bluetooth: PIFA Antenna Sub 1G: PIFA Antenna

Antenna information
2400 MHz ~ 2483.5 MHz Peak Gain (dBi) 2.89

SKU List					
SKU	Variant num	Wifi/BT	BLE	Sub GHz	Sound
1	1	X	X	X	X
2	2	X	X	X	-
3	3	X	X	-	X
4	4	X	X	-	-
5	5	X	-	X	X
6	6	X	-	X	-
7	7	-	-	X	X
8	8	-	-	X	-

Remark:

- The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
- The RF related hardware (including WLAN, Bluetooth, Sub 1Ghz module, and Sound) of all models are identical. The RF feature differences are controlled by the embedded software.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (1 GHz to 18 GHz). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH78_2480 MHz
Remark: 1. For Radiated Test Cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission. 2. For Radiated Test Cases, the tests were performed with SKU 1 (F).	

2.3 Connection Diagram of Test System

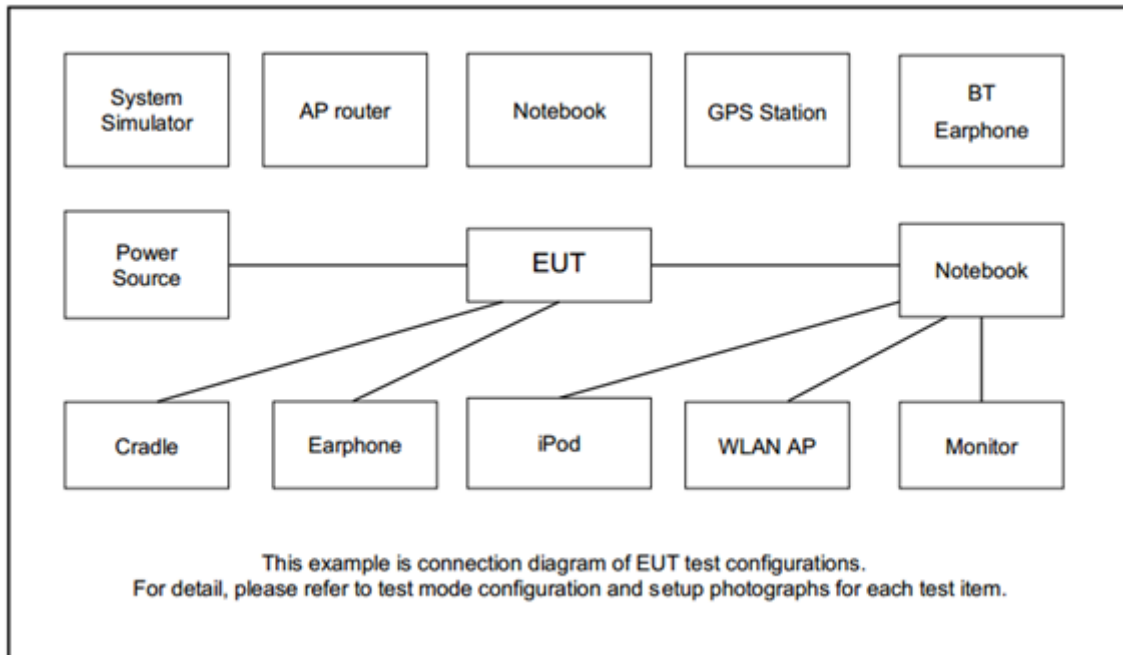

2.4 EUT Operation Test Setup

The RF test items, utility “Tera Tera 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

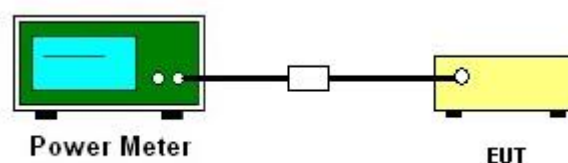

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


1. The EUT is placed on a turntable with 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup

For radiated test from 1GHz to 18GHz

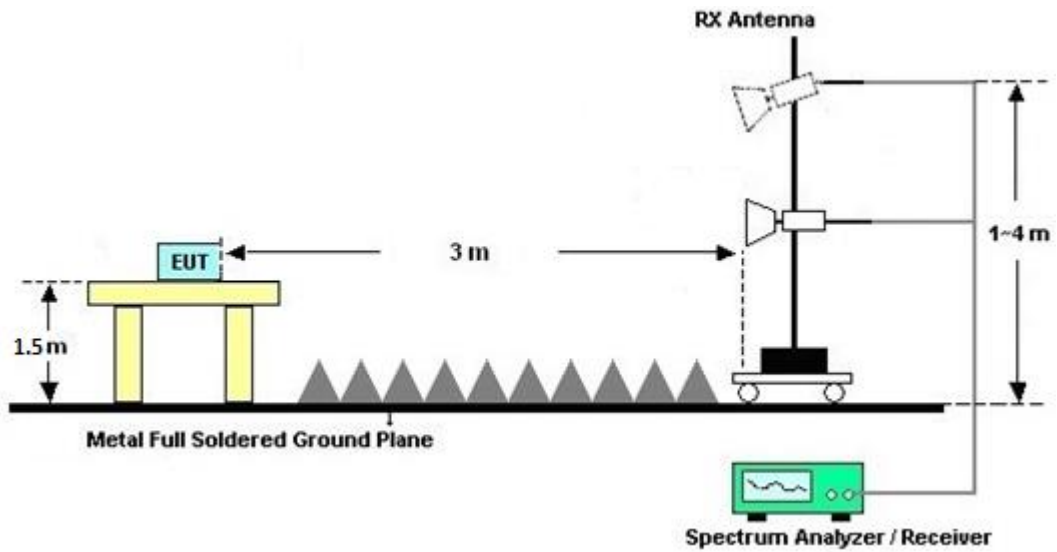

3.2.5 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.6 Duty Cycle

Please refer to Appendix C.

3.2.7 Test Result of Radiated Spurious Emission

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.3.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jul. 02, 2024~ Jul. 24, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jun. 26, 2024	Jul. 02, 2024~ Jul. 24, 2024	Jun. 25, 2025	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Jun. 25, 2024	Jul. 02, 2024~ Jul. 24, 2024	Jun. 24, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Jul. 02, 2024~ Jul. 24, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	EMSW18SE	SW200302 (BOX9)	N/A	Mar. 08, 2024	Jul. 02, 2024~ Jul. 24, 2024	Mar. 07, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version:1.0(2024-04-11)	N/A	Conducted Items	N/A	Jul. 02, 2024~ Jul. 24, 2024	N/A	Conducted (TH05-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 04, 2023	Jul. 17, 2024~ Jul. 20, 2024	Dec. 03, 2024	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Jul. 17, 2024~ Jul. 20, 2024	Mar. 27, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 07, 2023	Jul. 17, 2024~ Jul. 20, 2024	Dec. 06, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Jul. 17, 2024~ Jul. 20, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Jul. 17, 2024~ Jul. 20, 2024	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Jul. 17, 2024~ Jul. 20, 2024	Jun. 27, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN27	6.75GHz High Pass Filter	Nov. 13, 2023	Jul. 17, 2024~ Jul. 20, 2024	Nov. 12, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5757,805935/4,802434/4	30MHz~18GHz	Aug. 08, 2023	Jul. 17, 2024~ Jul. 20, 2024	Aug. 07, 2024	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Jul. 17, 2024~ Jul. 20, 2024	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jul. 17, 2024~ Jul. 20, 2024	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 17, 2024~ Jul. 20, 2024	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 17, 2024~ Jul. 20, 2024	N/A	Radiation (03CH16-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ju Chang	Temperature:	21~25	°C
Test Date:	2024/7/2~2024/7/24	Relative Humidity:	51~54	%

<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	78	1	2.20	20.97	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	78	1	1.69	5.11



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Bill Chang, Gary Guo, and Steven Wu	Temperature :	18.2~20.2°C
		Relative Humidity :	54.2~56.1%



B1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	3Mbps	-	-



B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	78	2487.42	64.01	74.00	-9.99	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	6660.00	56.08	74.00	-17.92	V	Peak	Pass	-	Harmonic

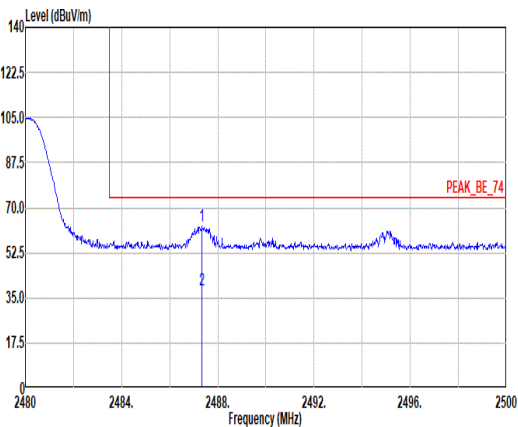
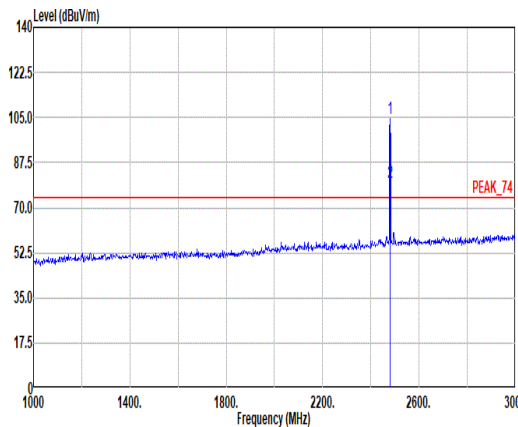


Mode	1																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.34</td><td>62.61</td><td>74.00</td><td>-11.39</td><td>47.23</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>2</td><td>2487.34</td><td>37.82</td><td>54.00</td><td>-16.18</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.34	62.61	74.00	-11.39	47.23	27.70	7.64	29.88	9.92	400	276	PEAK	2	2487.34	37.82	54.00	-16.18	--	--	--	--	--	--	--	AVERAGE	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>104.59</td><td>79.80</td><td>24.79</td><td>89.21</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>79.80</td><td>79.80</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.59	79.80	24.79	89.21	27.70	7.65	29.89	9.92	400	276	PEAK	2	2480.00	79.80	79.80	0.00	--	--	--	--	--	--	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2487.34	62.61	74.00	-11.39	47.23	27.70	7.64	29.88	9.92	400	276	PEAK																																																																																																								
2	2487.34	37.82	54.00	-16.18	--	--	--	--	--	--	--	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2480.00	104.59	79.80	24.79	89.21	27.70	7.65	29.89	9.92	400	276	PEAK																																																																																																								
2	2480.00	79.80	79.80	0.00	--	--	--	--	--	--	--	AVERAGE																																																																																																								



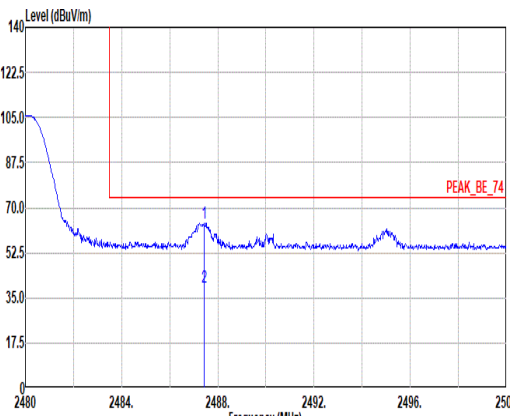
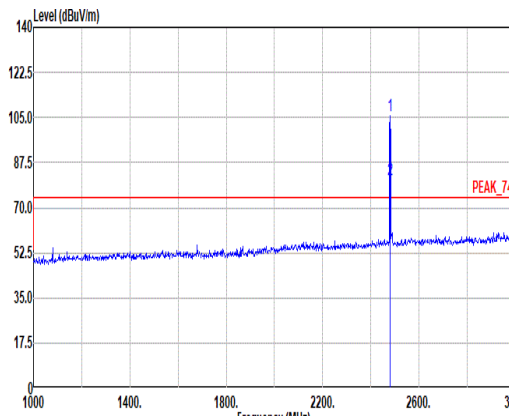


Mode	1																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.42</td><td>64.01</td><td>74.00</td><td>-9.99</td><td>48.63</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>139</td><td>354</td><td>PEAK</td></tr><tr><td>2</td><td>2487.42</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.42	64.01	74.00	-9.99	48.63	27.70	7.64	29.88	9.92	139	354	PEAK	2	2487.42	39.22	54.00	-14.78	--	--	--	--	--	--	--	AVERAGE	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.80</td><td>-----</td><td>-----</td><td>90.42</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>139</td><td>354</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>81.01</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.80	-----	-----	90.42	27.70	7.65	29.89	9.92	139	354	PEAK	2	2480.00	81.01	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2487.42	64.01	74.00	-9.99	48.63	27.70	7.64	29.88	9.92	139	354	PEAK																																																																																																																		
2	2487.42	39.22	54.00	-14.78	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	105.80	-----	-----	90.42	27.70	7.65	29.89	9.92	139	354	PEAK																																																																																																																		
2	2480.00	81.01	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		

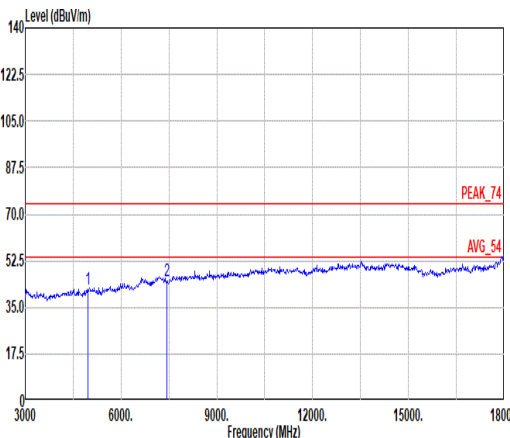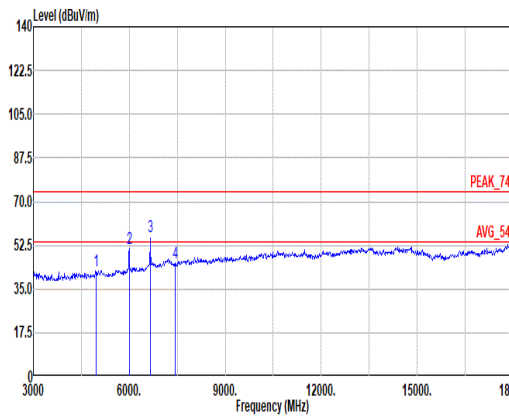


Mode	1																																																																																														
	Harmonic																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal						Vertical																																																																																								
Peak Avg.																																																																																															
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.56</td><td>74.00</td><td>-32.44</td><td>62.87</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>60.03</td><td>36.32</td><td>13.48</td><td>65.47</td><td>0.40</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.56	74.00	-32.44	62.87	33.02	11.09	65.87	0.45	--	--	PEAK	2	7440.00	44.76	74.00	-29.24	60.03	36.32	13.48	65.47	0.40	--	--	PEAK																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4960.00	41.56	74.00	-32.44	62.87	33.02	11.09	65.87	0.45	--	--	PEAK																																																																																			
2	7440.00	44.76	74.00	-29.24	60.03	36.32	13.48	65.47	0.40	--	--	PEAK																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>42.21</td><td>74.00</td><td>-31.79</td><td>63.52</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>6000.00</td><td>50.99</td><td>74.00</td><td>-23.01</td><td>69.53</td><td>34.10</td><td>12.50</td><td>65.63</td><td>0.49</td><td>113</td><td>157</td><td>PEAK</td></tr><tr><td>3</td><td>6660.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>72.39</td><td>35.82</td><td>12.85</td><td>65.37</td><td>0.39</td><td>129</td><td>329</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>60.53</td><td>36.32</td><td>13.48</td><td>65.47</td><td>0.40</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	42.21	74.00	-31.79	63.52	33.02	11.09	65.87	0.45	--	--	PEAK	2	6000.00	50.99	74.00	-23.01	69.53	34.10	12.50	65.63	0.49	113	157	PEAK	3	6660.00	56.08	74.00	-17.92	72.39	35.82	12.85	65.37	0.39	129	329	PEAK	4	7440.00	45.26	74.00	-28.74	60.53	36.32	13.48	65.47	0.40	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4960.00	42.21	74.00	-31.79	63.52	33.02	11.09	65.87	0.45	--	--	PEAK																																																																																			
2	6000.00	50.99	74.00	-23.01	69.53	34.10	12.50	65.63	0.49	113	157	PEAK																																																																																			
3	6660.00	56.08	74.00	-17.92	72.39	35.82	12.85	65.37	0.39	129	329	PEAK																																																																																			
4	7440.00	45.26	74.00	-28.74	60.53	36.32	13.48	65.47	0.40	--	--	PEAK																																																																																			

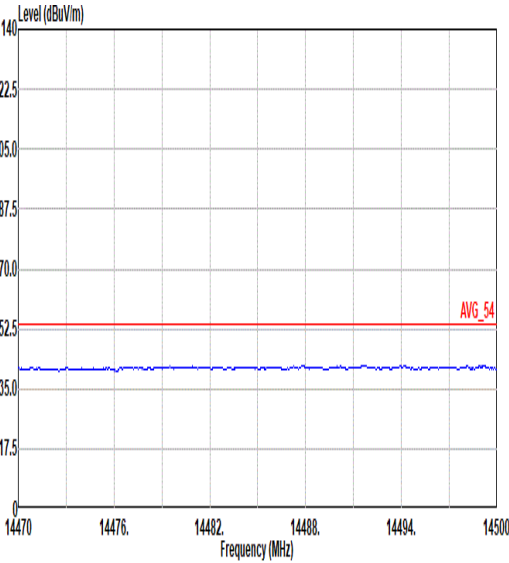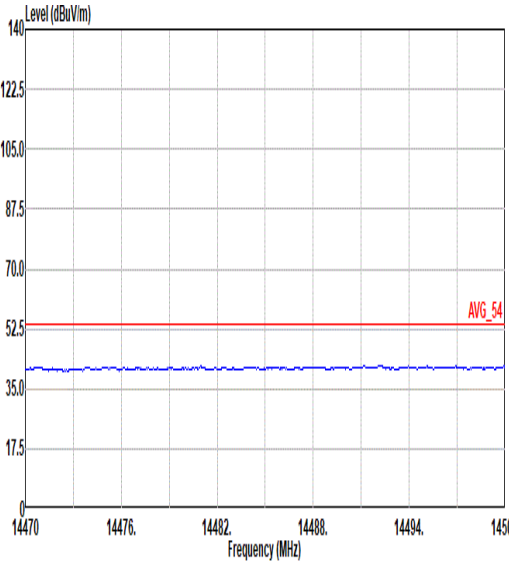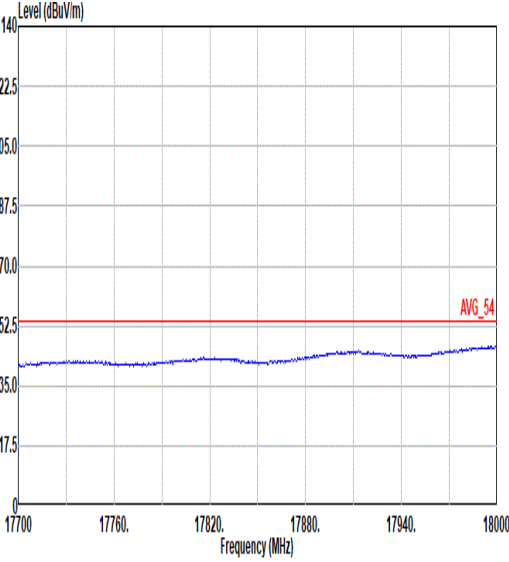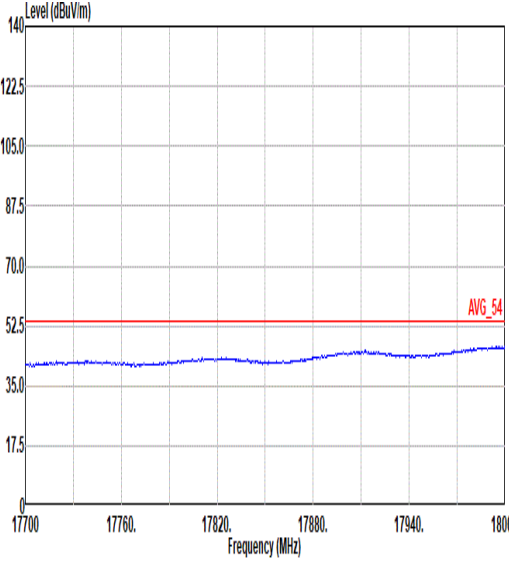

Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL



Appendix C. Duty Cycle Plots

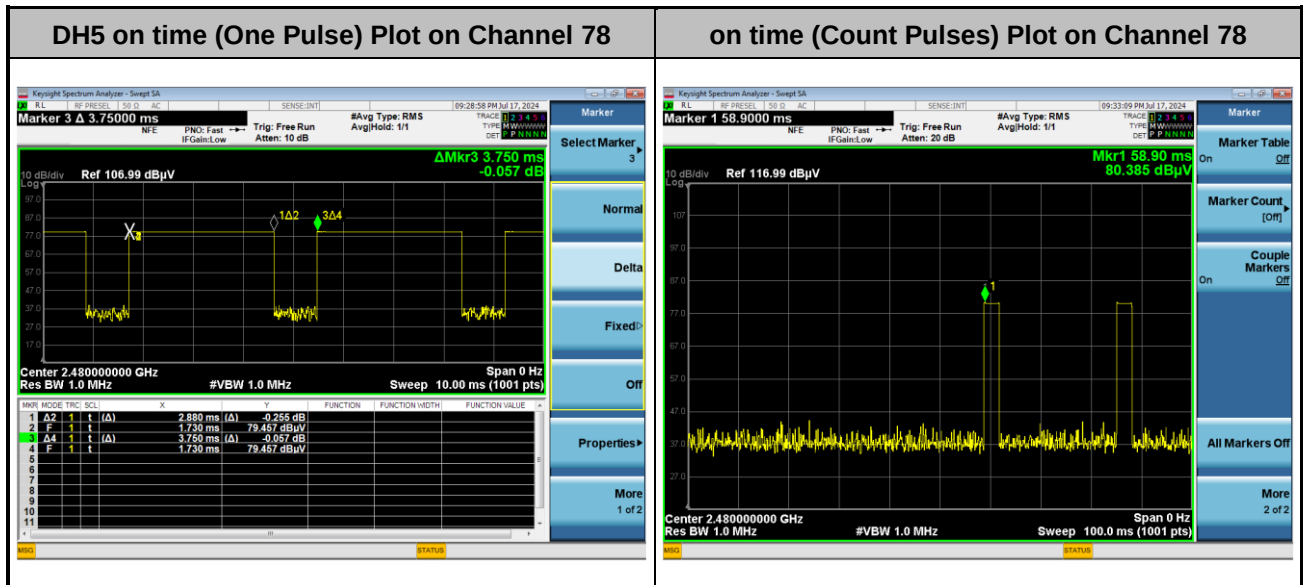

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. **DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100 \text{ ms}) = -24.79 \text{ dB}$$