




FCC RADIO TEST REPORT

FCC ID : P4Q-TG2A001
Equipment : Internet Gateway
Brand Name : Amazon, AWS, SKF, 
Model Name : TG2A001,
TG2A001YYYY (Y= 10 characters, Y can be 0-9, a-z,
A-Z, "-", "_" or blank for marketing purpose and no
impact safety related critical components and
constructions.)
Applicant : Mitac Digital Technology Corp.
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE PARK,
HSINCHU 30076, TAIWAN, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 18, 2024 and testing was performed from Jun. 18, 2024 to Aug. 03, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR430401F	01	Initial issue of report	Nov. 29, 2024
FR430401F	02	Revise Product Feature of Equipment Under Test This report is an updated version, replacing the report issued on Nov. 29, 2024.	Dec. 25, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	2.21 dB under the limit at 840.92 MHz
3.6	15.207	AC Conducted Emission	Pass	22.39 dB under the limit at 2.01 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different brand name is for marketing segmentation.

Reviewed by: Sheng Kuo

Report Producer: Lucy Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Sub 1GHz.		
Antenna Type WLAN: PIFA Antenna Bluetooth: PIFA Antenna Sub 1G: PIFA Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	2.52

SKU List					
SKU	Variant num	Wifi/BT	BLE	Sub GHz	Sound
1	1	X	X	X	X
2	2	X	X	X	-
3	3	X	X	-	X
4	4	X	X	-	-
5	5	X	-	X	X
6	6	X	-	X	-
7	7	-	-	X	X
8	8	-	-	X	-

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The RF related hardware (including WLAN, Bluetooth, Sub 1Ghz module, and Sound) of all models are identical. The RF feature differences are controlled by the embedded software.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link (nRF52840) + Adapter + LAN (Load) for SKU 1 (G)
Remark:	
1. For Radiated Test Cases, the tests were performed with SKU 1 (E).	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Mobile Phone	SAMSUNG	SM-A730F/DS	A3LSMA730F	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

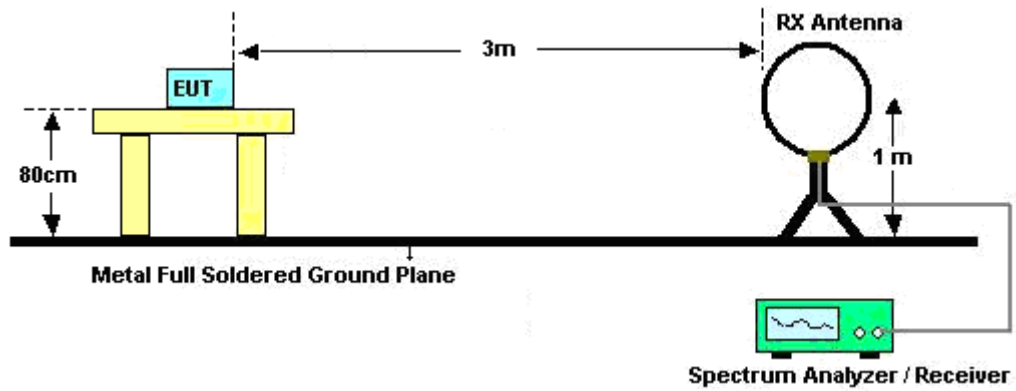

For radiated test from 30MHz to 1GHz

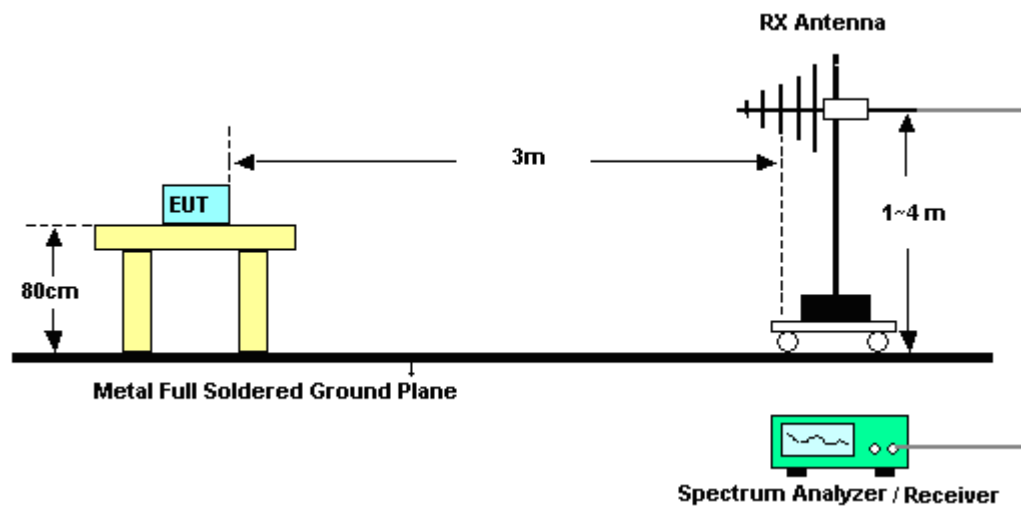

For radiated test from 1GHz to 18GHz

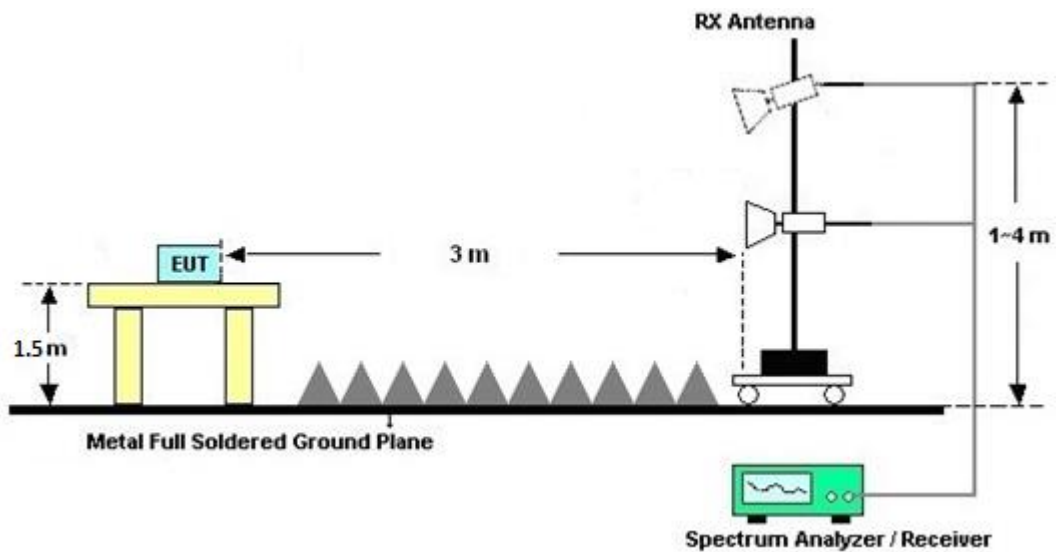

For radiated test above 18GHz



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

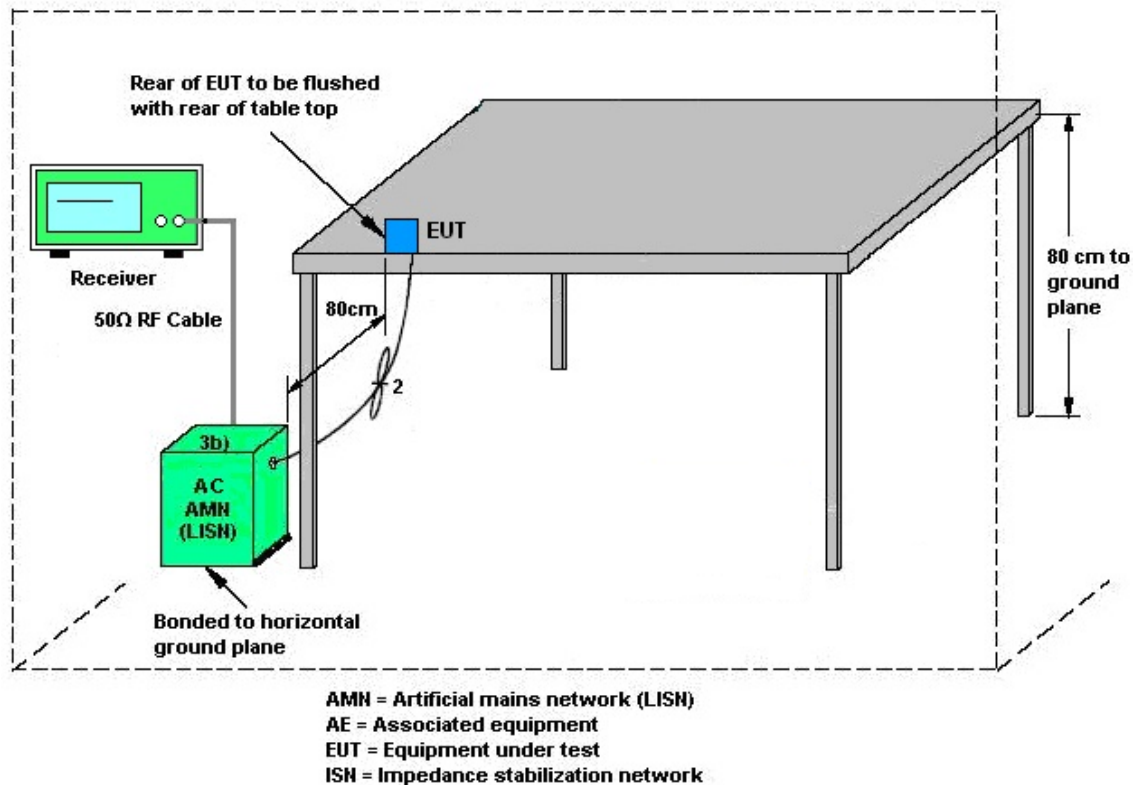

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Jul. 17, 2024~ Aug. 03, 2024	Sep. 11, 2024	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	Jul. 17, 2024~ Aug. 03, 2024	Nov. 23, 2024	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 04, 2023	Jul. 17, 2024~ Aug. 03, 2024	Dec. 03, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 07, 2023	Jul. 17, 2024~ Aug. 03, 2024	Oct. 06, 2024	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Jul. 17, 2024~ Aug. 03, 2024	Mar. 27, 2025	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Jul. 17, 2024~ Aug. 03, 2024	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 07, 2023	Jul. 17, 2024~ Aug. 03, 2024	Dec. 06, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Jul. 17, 2024~ Aug. 03, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060872	18GHz~40GHz	Sep. 06, 2023	Jul. 17, 2024~ Aug. 03, 2024	Sep. 05, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Jul. 17, 2024~ Aug. 03, 2024	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Jul. 17, 2024~ Aug. 03, 2024	Jun. 27, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Nov. 13, 2023	Jul. 17, 2024~ Aug. 03, 2024	Nov. 12, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Jul. 17, 2024~ Aug. 03, 2024	Mar. 05, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 08, 2023	Jul. 17, 2024~ Aug. 03, 2024	Aug. 07, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Jan. 02, 2024	Jul. 17, 2024~ Aug. 03, 2024	Jan. 01, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Jul. 17, 2024~ Aug. 03, 2024	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jul. 17, 2024~ Aug. 03, 2024	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 17, 2024~ Aug. 03, 2024	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 17, 2024~ Aug. 03, 2024	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jun. 18, 2024~ Jul. 26, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Jun. 18, 2024~ Jul. 26, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Jun. 18, 2024~ Jul. 26, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	EMSW18SE	SW191204 (BOX8)	N/A	Jan. 02, 2024	Jun. 18, 2024~ Jul. 26, 2024	Jan. 01, 2025	Conducted (TH05-HY)
Software	Sporton	BTWiFi_Final_ version:1.0(20 24-04-11)	N/A	Conducted Items	N/A	Jun. 18, 2024~ Jul. 26, 2024	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 17, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Jul. 17, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	Jul. 17, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Jul. 17, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jul. 17, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2023	Jul. 17, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Jul. 17, 2024	Dec. 27, 2024	Conduction (CO05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ju Chang	Temperature:	21~25	°C
Test Date:	2024/6/18~2024/7/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	00	2402	1.063	0.737	0.50	Pass
BLE	1Mbps	1	19	2440	1.060	0.700	0.50	Pass
BLE	1Mbps	1	39	2480	1.079	0.733	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	00	2402	3.90	30.00	2.52	6.42	36.00	Pass
BLE	1Mbps	1	19	2440	3.80	30.00	2.52	6.32	36.00	Pass
BLE	1Mbps	1	39	2480	3.60	30.00	2.52	6.12	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	00	2402	3.46	-7.23	2.52	8.00	Pass
BLE	1Mbps	1	19	2440	3.82	-9.96	2.52	8.00	Pass
BLE	1Mbps	1	39	2480	3.37	-9.40	2.52	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.072	1.291	0.50	Pass
BLE	2Mbps	1	19	2440	2.088	1.263	0.50	Pass
BLE	2Mbps	1	39	2480	2.096	1.174	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.00	30.00	2.52	6.52	36.00	Pass
BLE	2Mbps	1	19	2440	3.80	30.00	2.52	6.32	36.00	Pass
BLE	2Mbps	1	39	2480	3.60	30.00	2.52	6.12	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	3.27	-12.51	2.52	8.00	Pass
BLE	2Mbps	1	19	2440	2.68	-11.97	2.52	8.00	Pass
BLE	2Mbps	1	39	2480	3.02	-10.57	2.52	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1Mbps>

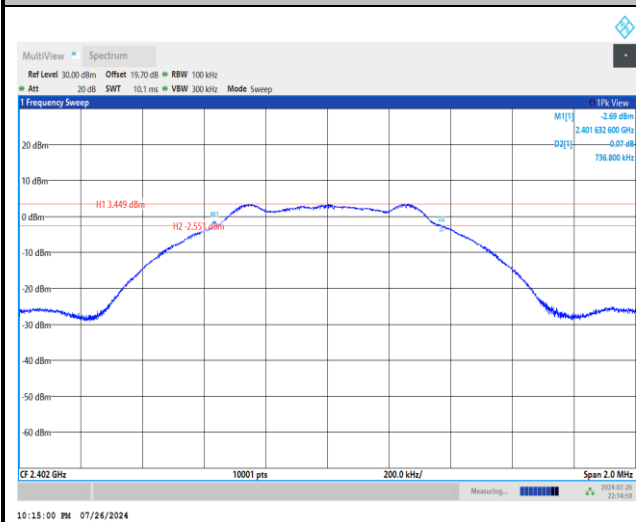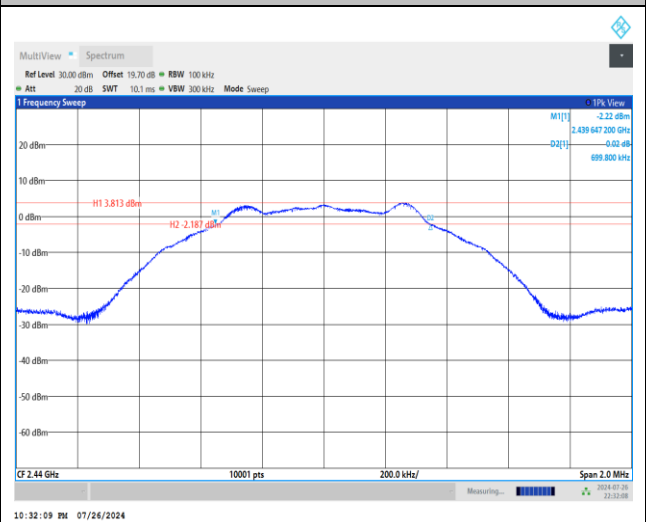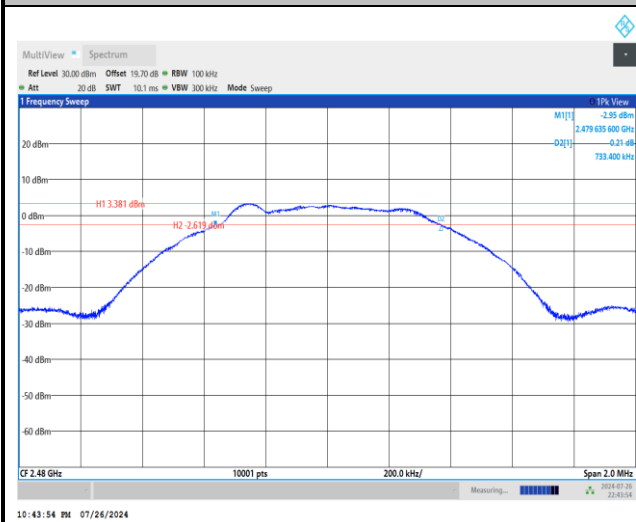6 dB Bandwidth Plot on Channel 00**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




<2Mbps>


6 dB Bandwidth Plot on Channel 00

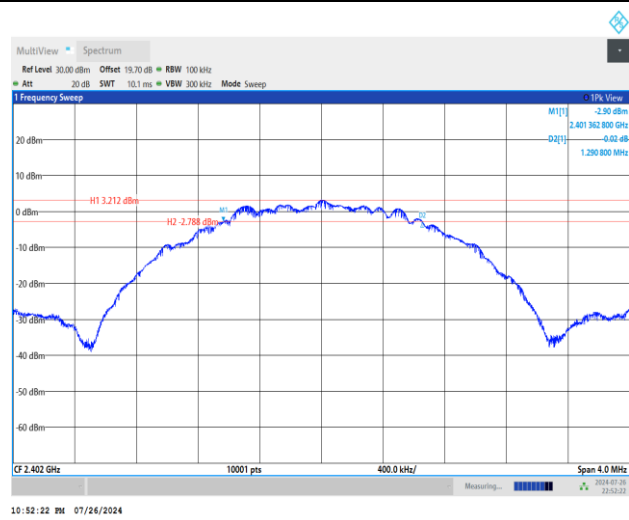

6 dB Bandwidth Plot on Channel 19



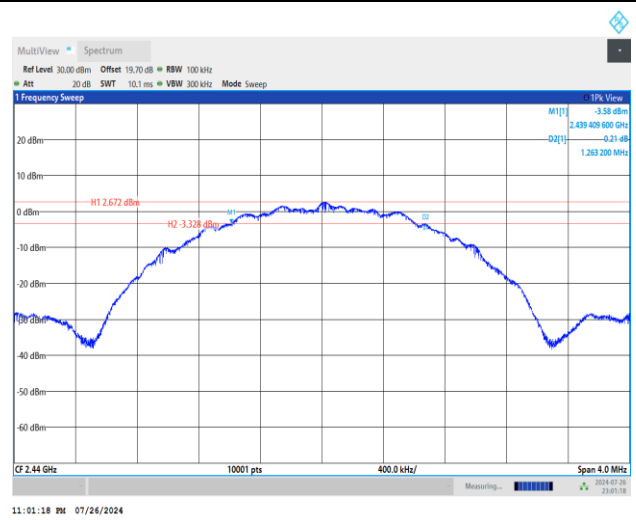


6 dB Bandwidth Plot on Channel 39

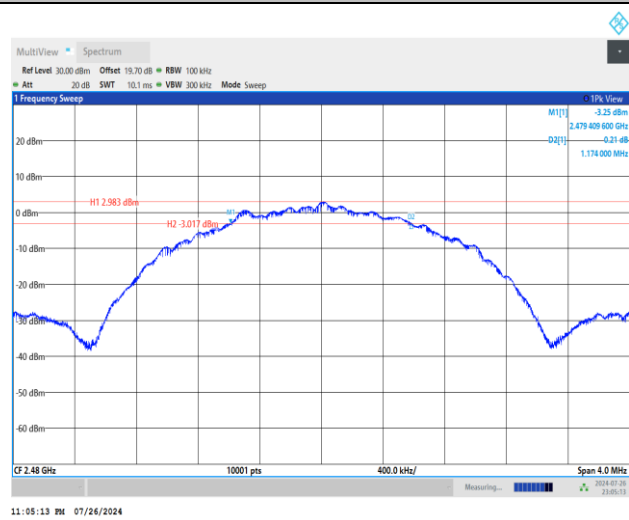

**99% Occupied Bandwidth**


<1Mbps>

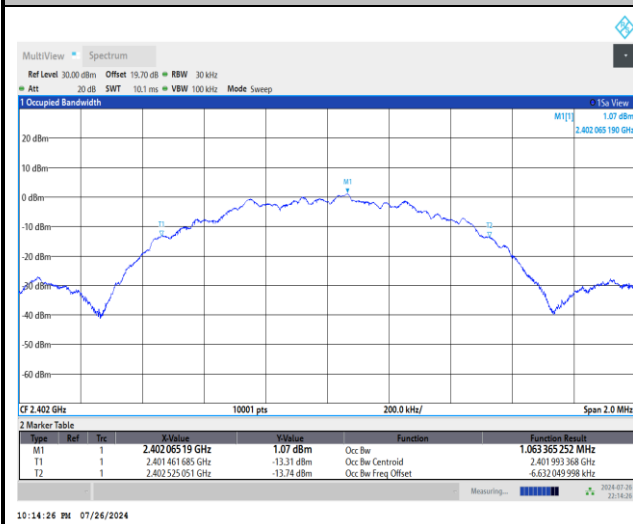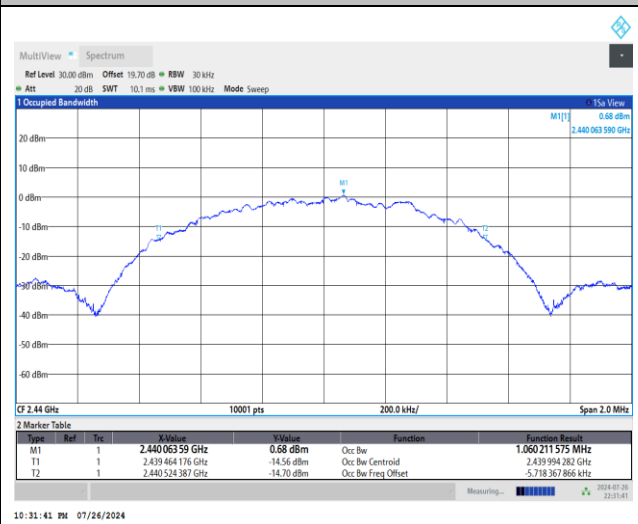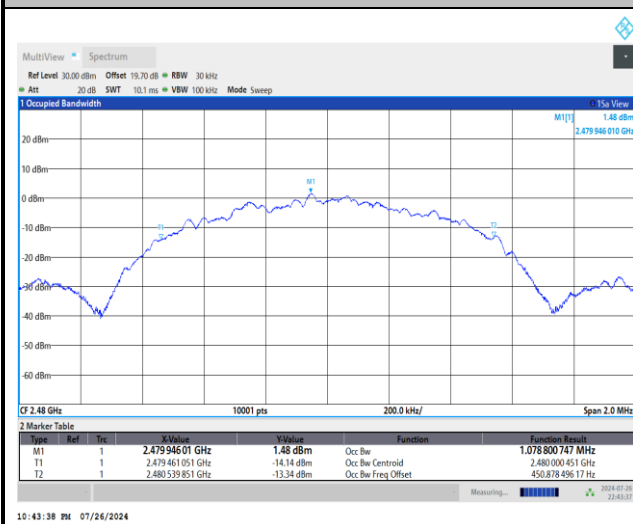99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

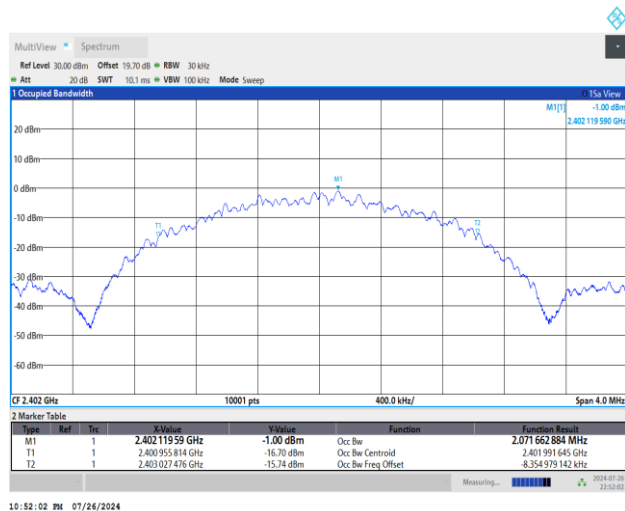

99% Occupied Bandwidth Plot on Channel 19



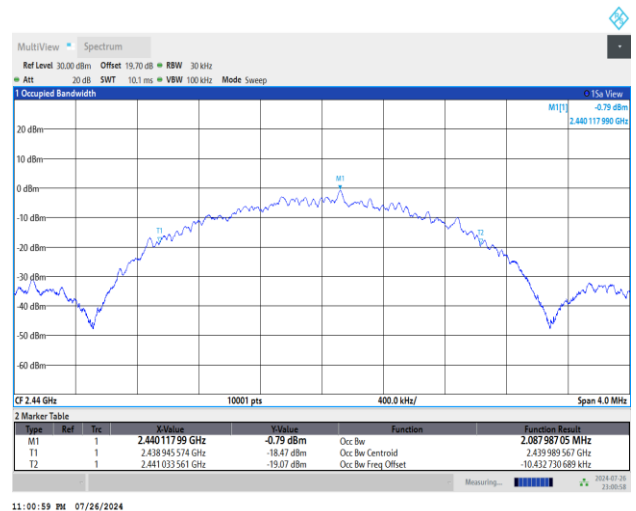


99% Occupied Bandwidth Plot on Channel 39

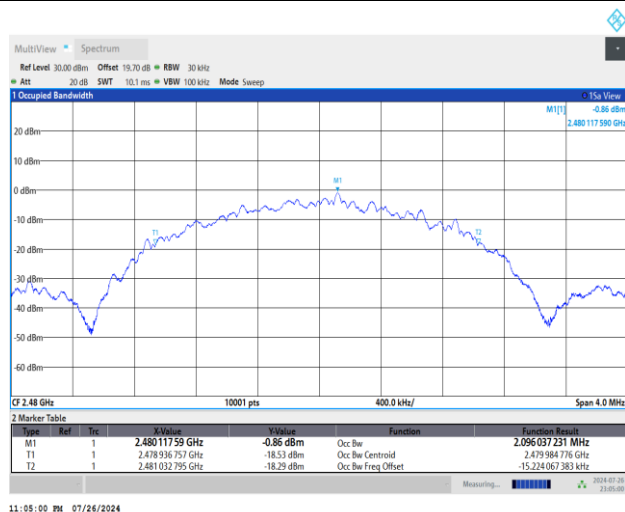

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

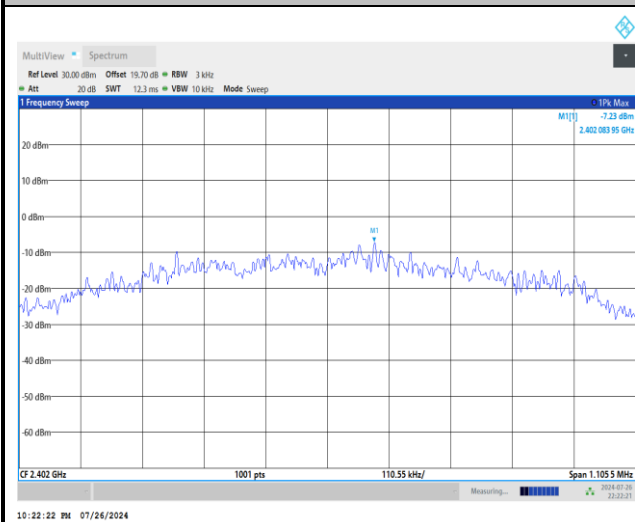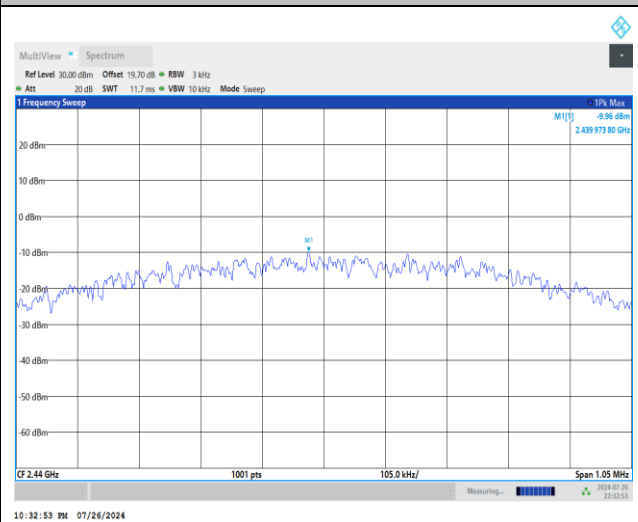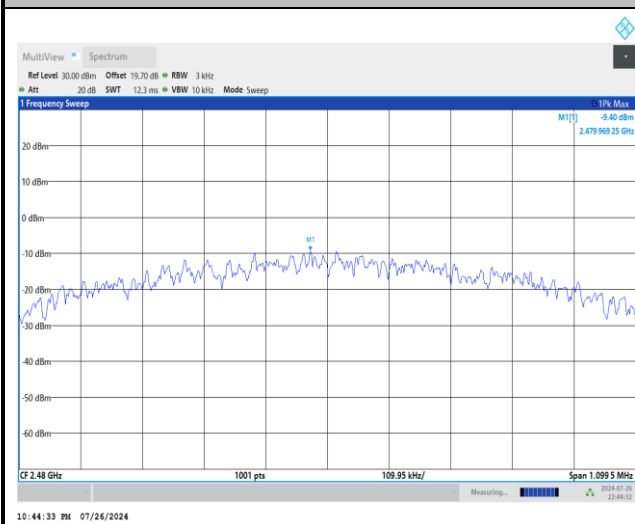Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

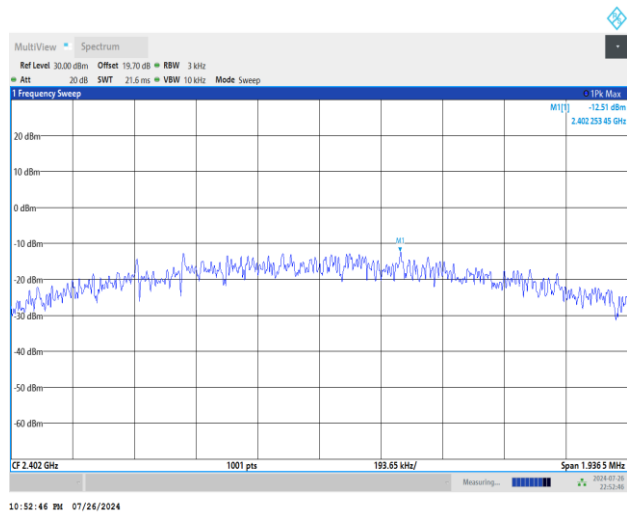

Power Density (dBm/3kHz) Plot Channel 19




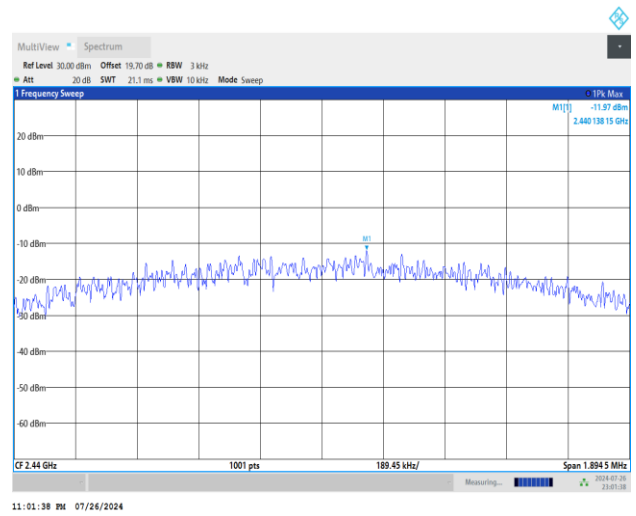


Power Density (dBm/3kHz) Plot Channel 39

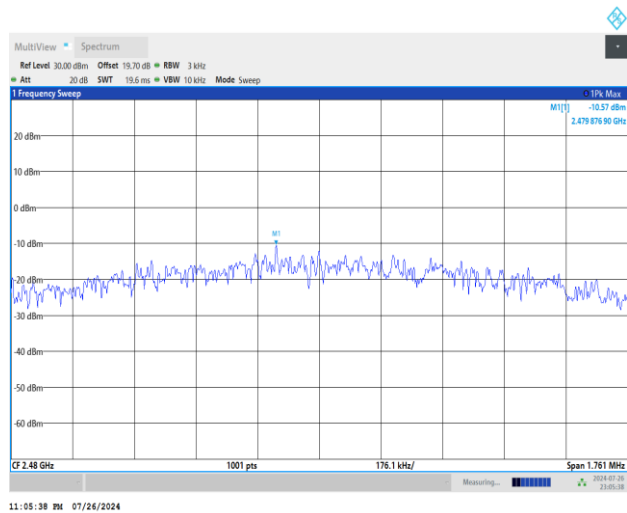

**Band Edge and Conducted Spurious Emission**


<1Mbps>

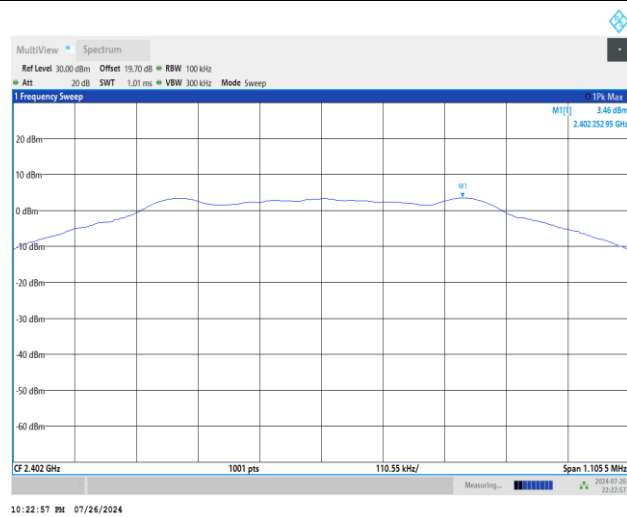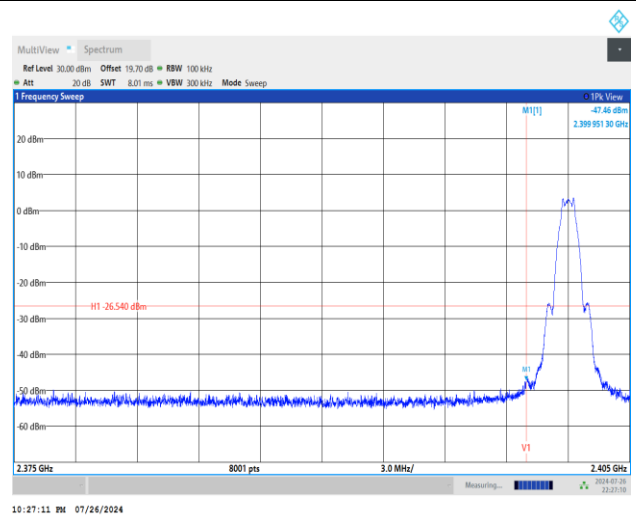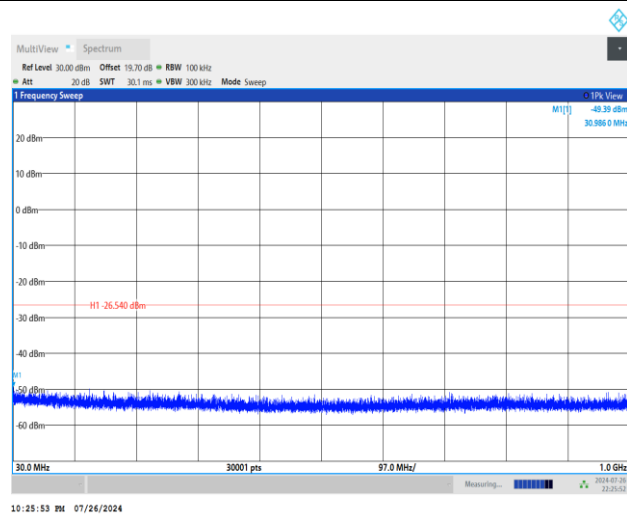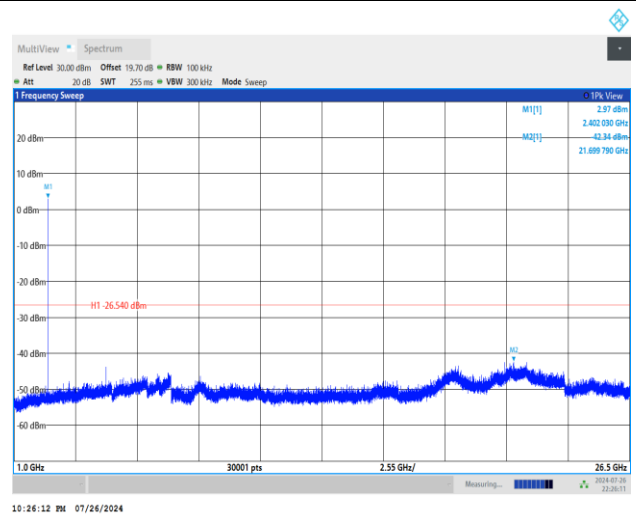Channel 00**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19

100kHz PSD reference Level Plot

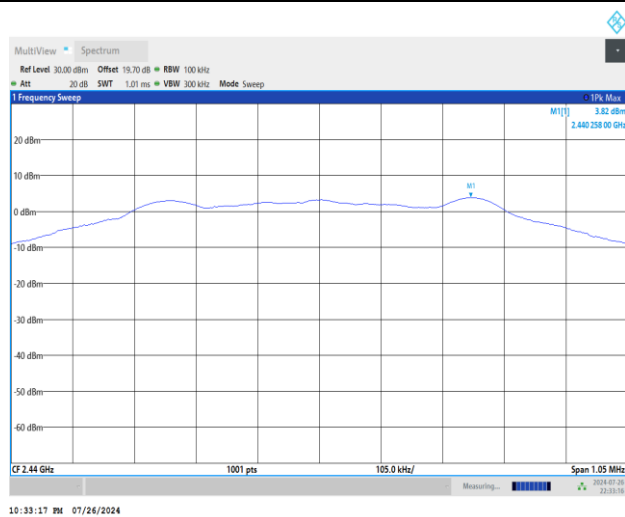


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

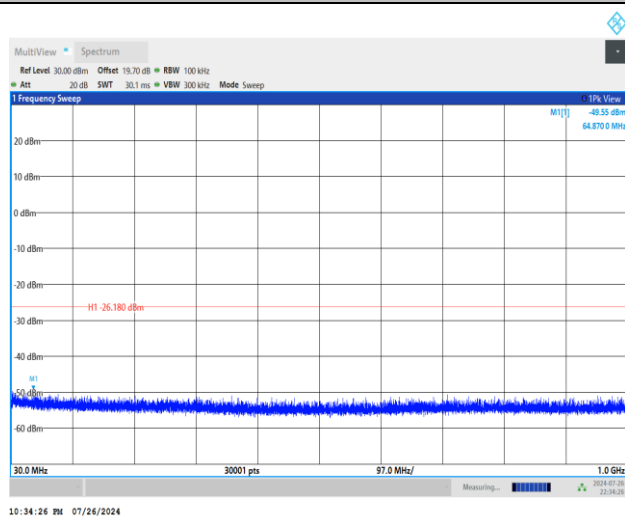


Spurious Emission 1GHz~26.5GHz Plot

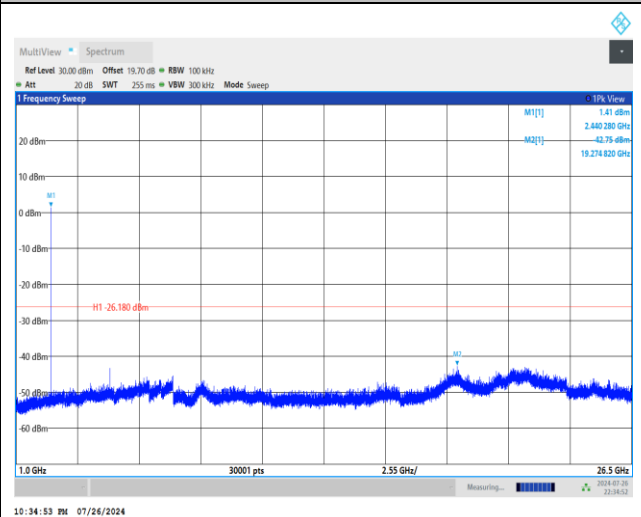




Channel 39


100kHz PSD reference Level Plot

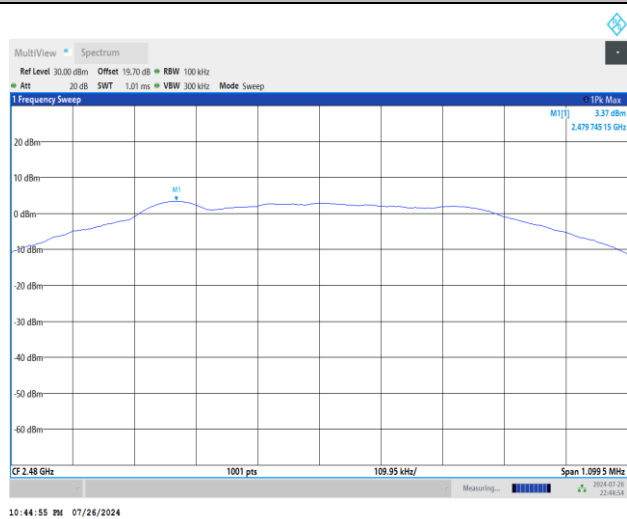


High Channel Plot

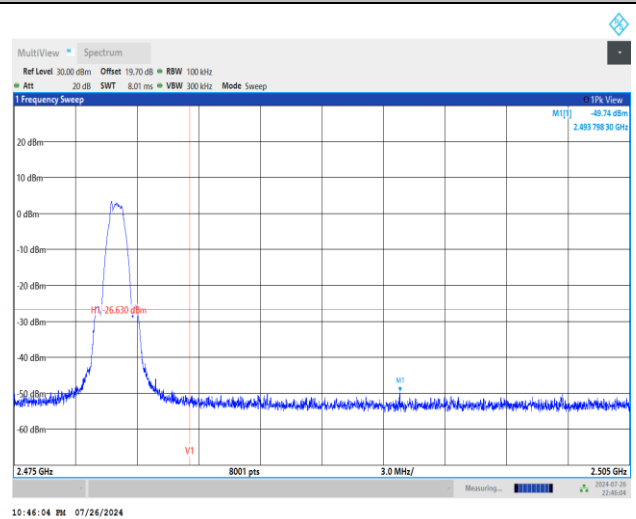


Spurious Emission 30MHz~1GHz Plot

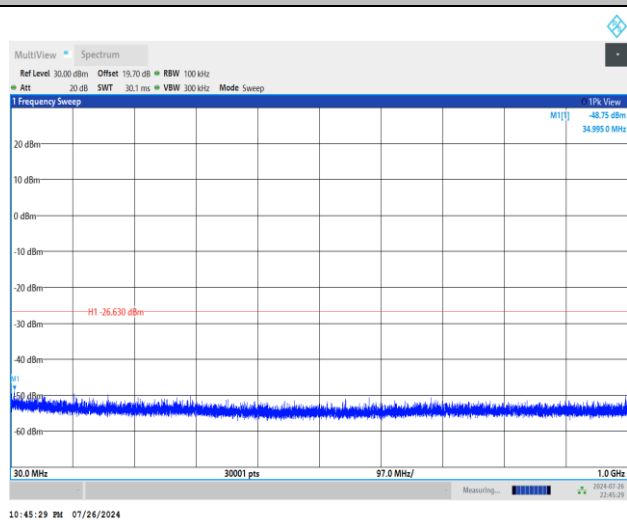

Spurious Emission 1GHz~26.5GHz Plot

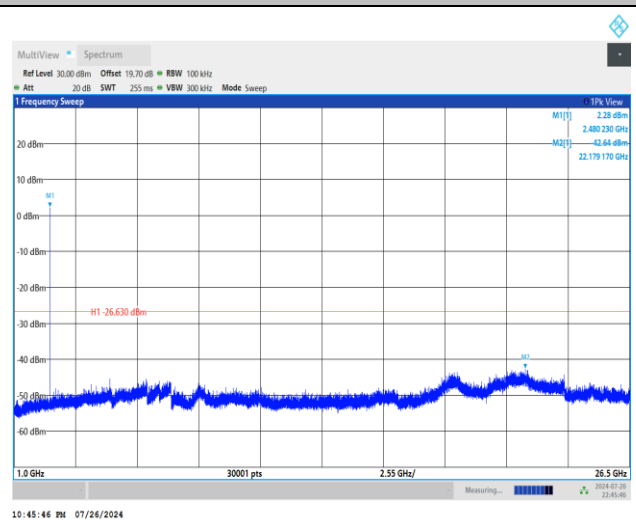







Channel 19

100kHz PSD reference Level Plot

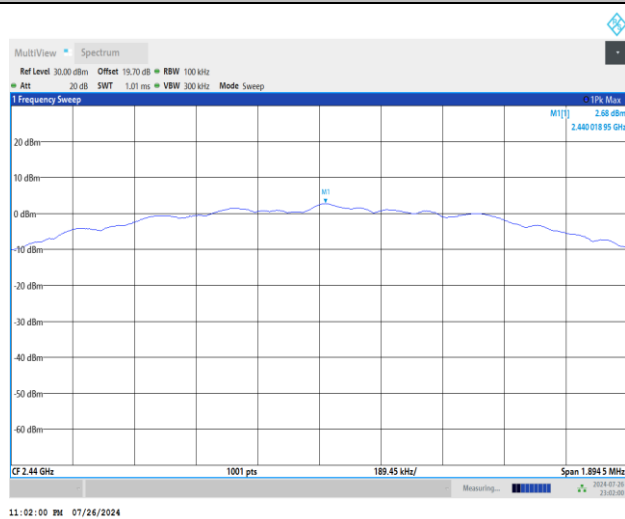


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

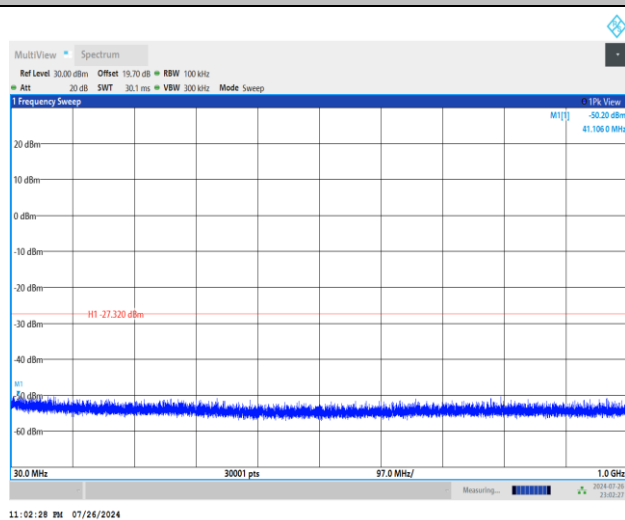


Spurious Emission 1GHz~26.5GHz Plot

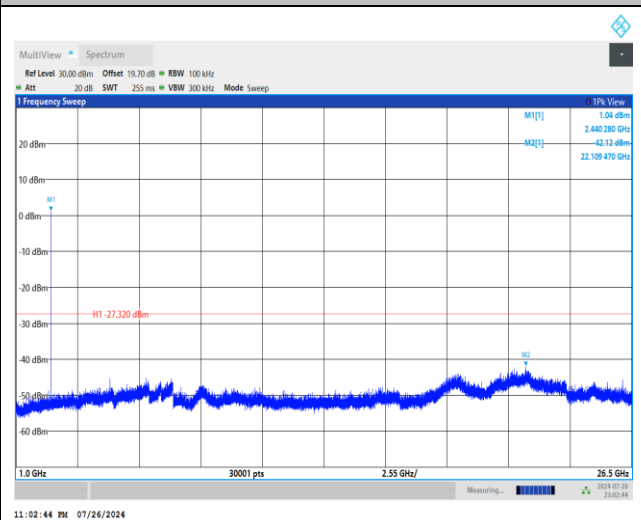




Channel 39


100kHz PSD reference Level Plot

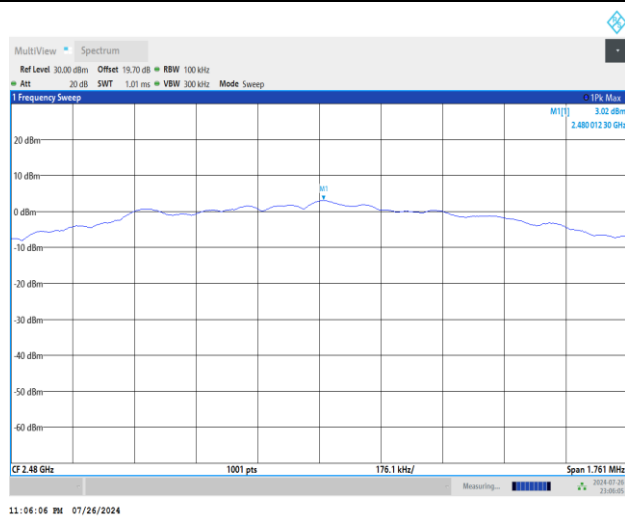


High Channel Plot

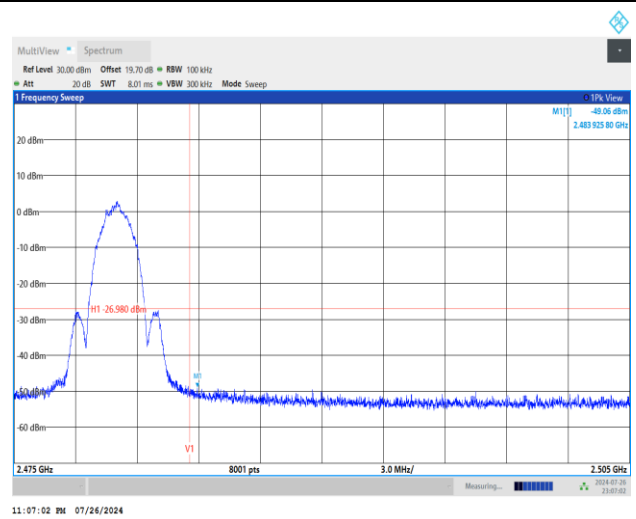

Spurious Emission 30MHz~1GHz Plot

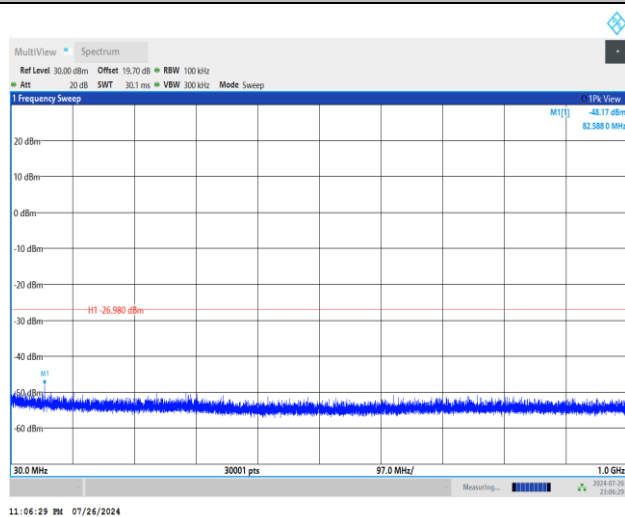

Spurious Emission 1GHz~26.5GHz Plot

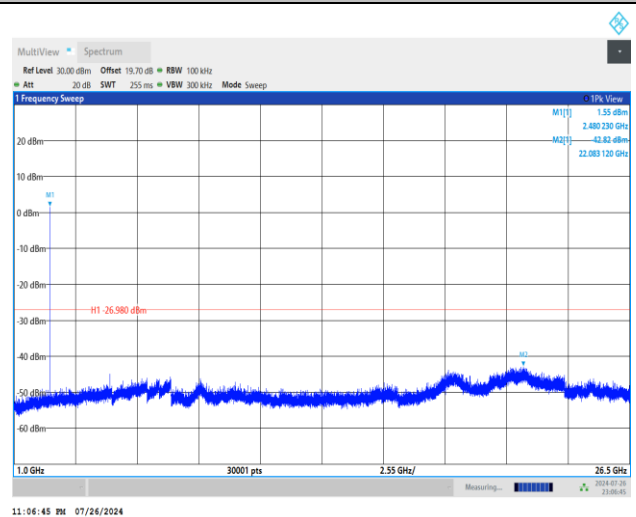



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

430401
Mode 1
120Vac/60Hz
Line

Full Spectrum

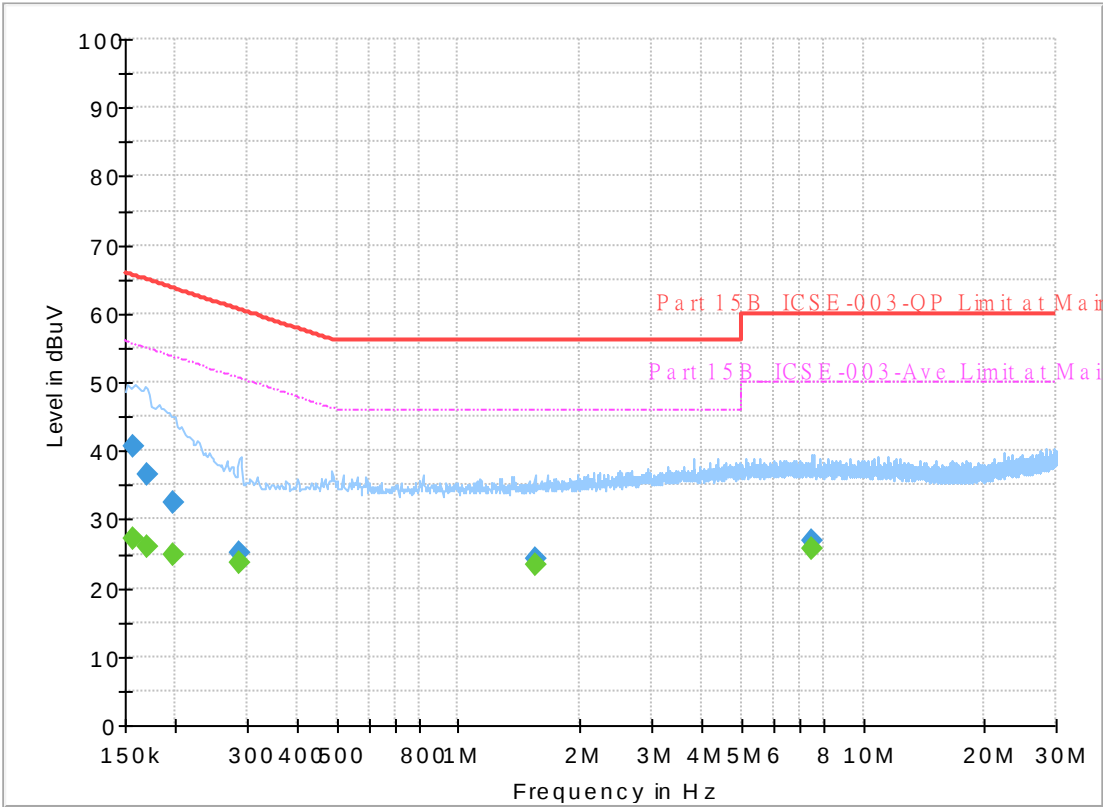

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	27.24	55.63	28.39	L1	OFF	19.8
0.156750	40.52	---	65.63	25.11	L1	OFF	19.8
0.170250	---	25.93	54.95	29.02	L1	OFF	19.8
0.170250	36.44	---	64.95	28.51	L1	OFF	19.8
0.197250	---	24.98	53.73	28.75	L1	OFF	19.8
0.197250	32.41	---	63.73	31.32	L1	OFF	19.8
0.287250	---	23.59	50.60	27.01	L1	OFF	19.8
0.287250	25.03	---	60.60	35.57	L1	OFF	19.8
1.545000	---	23.32	46.00	22.68	L1	OFF	19.9
1.545000	24.33	---	56.00	31.67	L1	OFF	19.9
7.460250	---	25.64	50.00	24.36	L1	OFF	20.1
7.460250	26.99	---	60.00	33.01	L1	OFF	20.1

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

430401
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

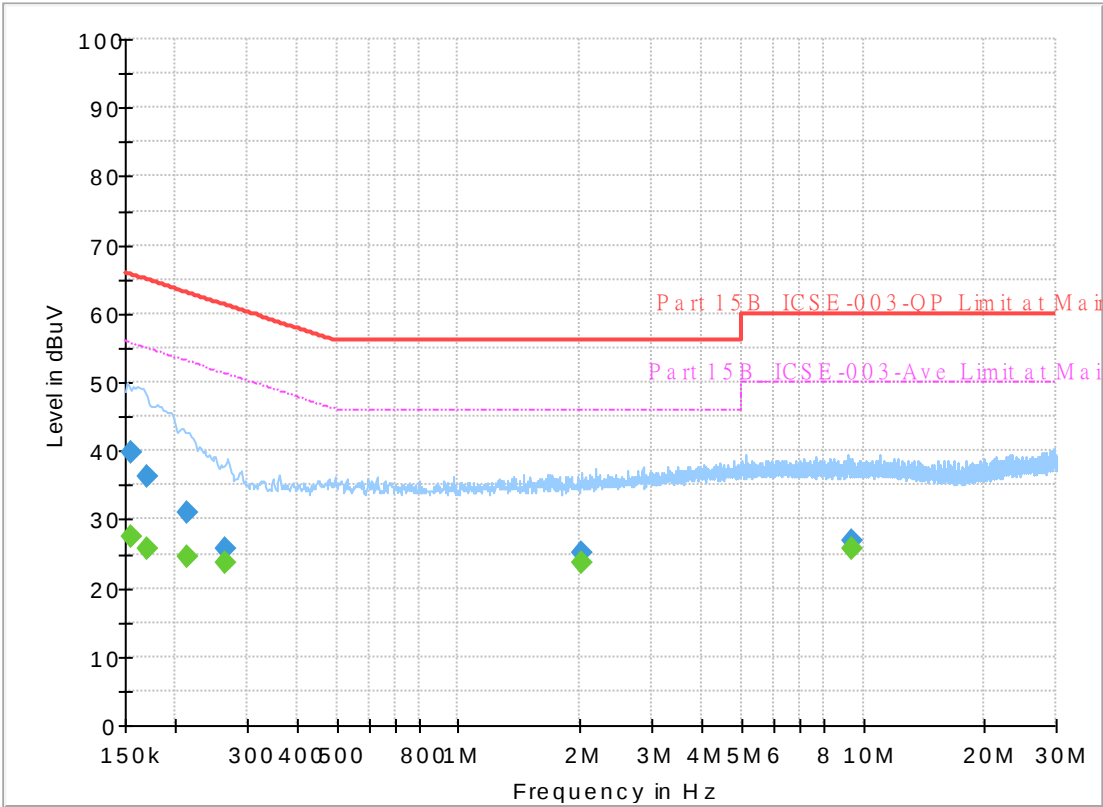

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	27.59	55.75	28.16	N	OFF	19.8
0.154500	39.87	---	65.75	25.88	N	OFF	19.8
0.170250	---	25.84	54.95	29.11	N	OFF	19.8
0.170250	36.35	---	64.95	28.60	N	OFF	19.8
0.213000	---	24.64	53.09	28.45	N	OFF	19.8
0.213000	31.00	---	63.09	32.09	N	OFF	19.8
0.264750	---	23.77	51.28	27.51	N	OFF	19.8
0.264750	25.59	---	61.28	35.69	N	OFF	19.8
2.013000	---	23.61	46.00	22.39	N	OFF	19.9
2.013000	25.09	---	56.00	30.91	N	OFF	19.9
9.390750	---	25.61	50.00	24.39	N	OFF	20.3
9.390750	26.78	---	60.00	33.22	N	OFF	20.3



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Bill Chang, Gary Guo and Steven Wu	Temperature :	18.2~20.2°C
		Relative Humidity :	54.2~56.1%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	SHF
Mode 8	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	LF







C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE	00	2369.98	44.44	54.00	-9.56	H	Avg.	Pass	-	Band Edge
1	Bluetooth-LE	00	4804.00	51.72	54.00	-2.28	V	Avg.	Pass	-	Harmonic
2	Bluetooth-LE	19	2488.78	44.19	54.00	-9.81	V	Avg.	Pass	-	Band Edge
2	Bluetooth-LE	19	4880.00	48.24	54.00	-5.76	H	Avg.	Pass	-	Harmonic
3	Bluetooth-LE	39	2483.52	45.88	54.00	-8.12	H	Avg.	Pass	-	Band Edge
3	Bluetooth-LE	39	4960.00	46.41	54.00	-7.59	H	Avg.	Pass	-	Harmonic
4	Bluetooth-LE	00	2389.95	44.58	54.00	-9.42	H	Avg.	Pass	-	Band Edge
4	Bluetooth-LE	00	4804.00	48.42	54.00	-5.58	H	Avg.	Pass	-	Harmonic
5	Bluetooth-LE	19	2483.62	44.15	54.00	-9.85	V	Avg.	Pass	-	Band Edge
5	Bluetooth-LE	19	4880.00	46.23	54.00	-7.77	H	Avg.	Pass	-	Harmonic
6	Bluetooth-LE	39	2483.52	48.40	54.00	-5.60	H	Avg.	Pass	-	Band Edge
6	Bluetooth-LE	39	4960.00	43.29	54.00	-10.71	H	Avg.	Pass	-	Harmonic
7	SHF	00	24850.61	40.71	74.00	-33.29	H	Peak	Pass	-	SHF
8	LF	00	840.92	43.79	46.00	-2.21	H	Peak	Pass	-	LF

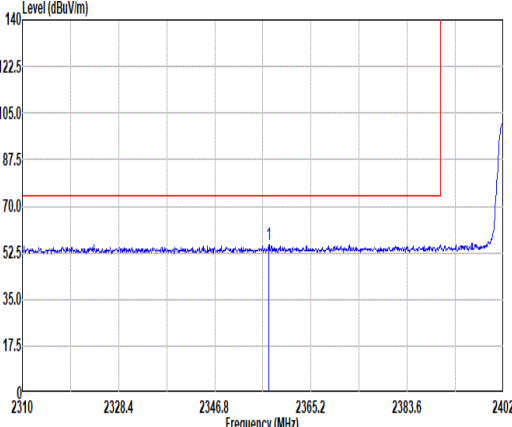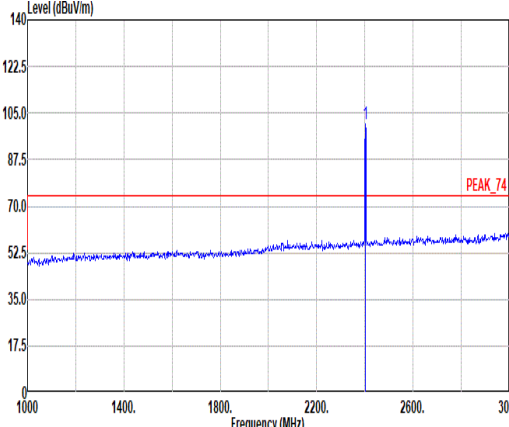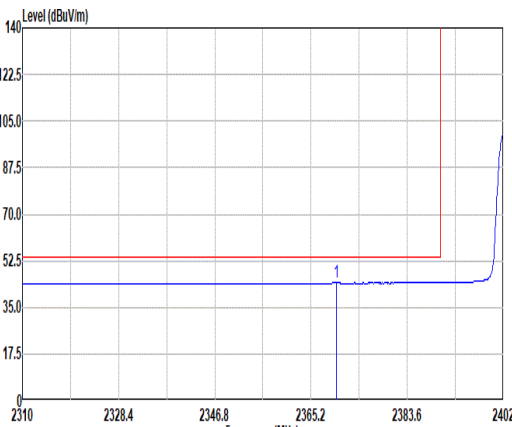
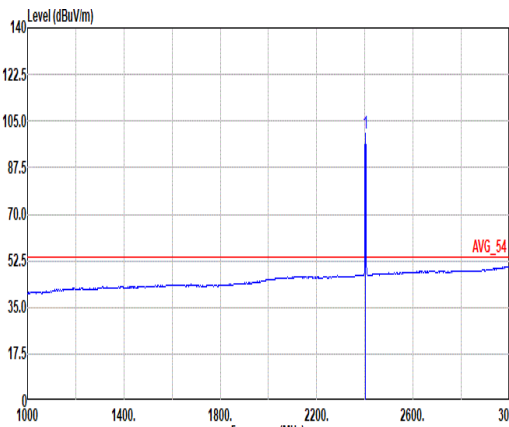


		1																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2357.10</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>40.52</td><td>27.17</td><td>7.63</td><td>29.92</td><td>9.92</td><td>200</td><td>218</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.10	55.32	74.00	-18.68	40.52	27.17	7.63	29.92	9.92	200	218	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.08</td><td>-----</td><td>-----</td><td>85.96</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>200</td><td>218</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.08	-----	-----	85.96	27.40	7.71	29.91	9.92	200	218
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2357.10	55.32	74.00	-18.68	40.52	27.17	7.63	29.92	9.92	200	218	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	101.08	-----	-----	85.96	27.40	7.71	29.91	9.92	200	218	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.98</td><td>44.44</td><td>54.00</td><td>-9.56</td><td>29.58</td><td>27.20</td><td>7.66</td><td>29.92</td><td>9.92</td><td>200</td><td>218</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.98	44.44	54.00	-9.56	29.58	27.20	7.66	29.92	9.92	200	218	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.54</td><td>-----</td><td>-----</td><td>85.42</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>200</td><td>218</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.54	-----	-----	85.42	27.40	7.71	29.91	9.92	200	218
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2369.98	44.44	54.00	-9.56	29.58	27.20	7.66	29.92	9.92	200	218	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	100.54	-----	-----	85.42	27.40	7.71	29.91	9.92	200	218	AVERAGE																																																																																							

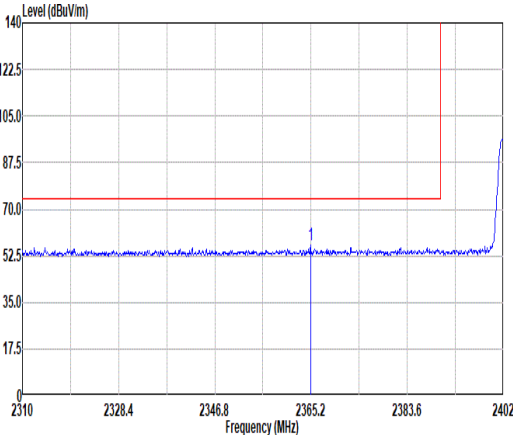
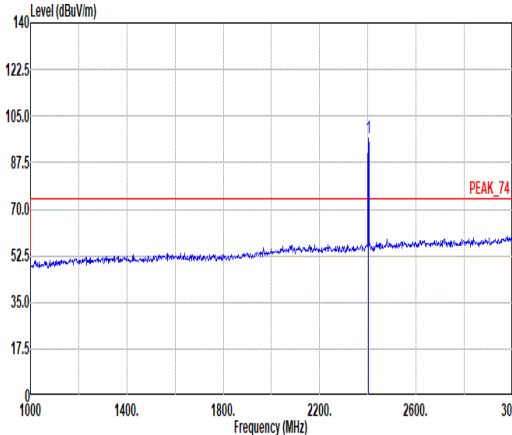
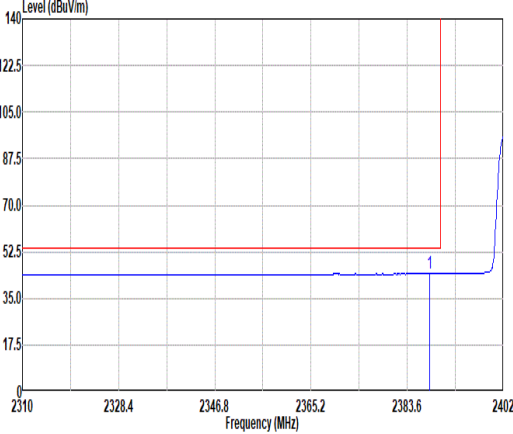
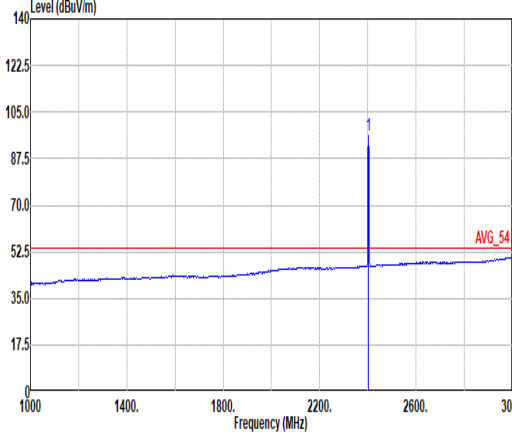


Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2365.11</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>41.62</td><td>27.20</td><td>7.65</td><td>29.92</td><td>9.92</td><td>237</td><td>304</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2365.11	56.47	74.00	-17.53	41.62	27.20	7.65	29.92	9.92	237	304	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.62</td><td>-----</td><td>-----</td><td>81.50</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>237</td><td>304</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2402.00	96.62	-----	-----	81.50	27.40	7.71	29.91	9.92	237	304	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2365.11	56.47	74.00	-17.53	41.62	27.20	7.65	29.92	9.92	237	304	PEAK																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2402.00	96.62	-----	-----	81.50	27.40	7.71	29.91	9.92	237	304	PEAK																																																																				
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.83</td><td>44.24</td><td>54.00</td><td>-9.76</td><td>29.26</td><td>27.28</td><td>7.69</td><td>29.91</td><td>9.92</td><td>237</td><td>304</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2387.83	44.24	54.00	-9.76	29.26	27.28	7.69	29.91	9.92	237	304	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.07</td><td>-----</td><td>-----</td><td>80.95</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>237</td><td>304</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2402.00	96.07	-----	-----	80.95	27.40	7.71	29.91	9.92	237	304	AVERAGE
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2387.83	44.24	54.00	-9.76	29.26	27.28	7.69	29.91	9.92	237	304	AVERAGE																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2402.00	96.07	-----	-----	80.95	27.40	7.71	29.91	9.92	237	304	AVERAGE																																																																				



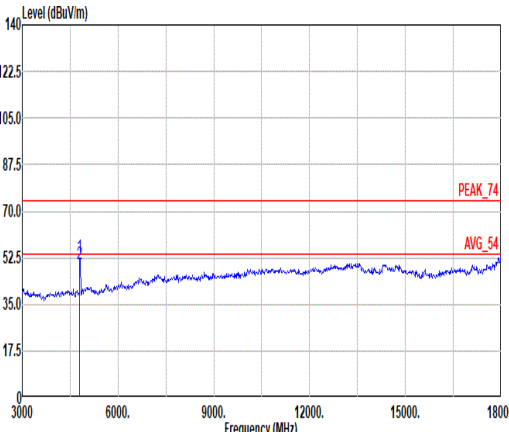
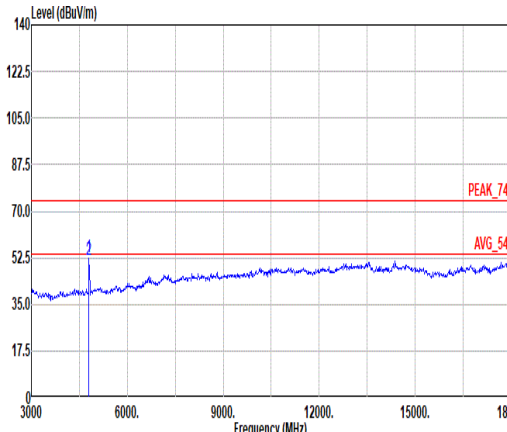


Mode	1																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>75.72</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>100</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>50.07</td><td>54.00</td><td>-3.93</td><td>72.79</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>100</td><td>217</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	53.00	74.00	-21.00	75.72	32.32	10.68	66.16	0.44	100	217	PEAK	2	4804.00	50.07	54.00	-3.93	72.79	32.32	10.68	66.16	0.44	100	217	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4804.00	53.00	74.00	-21.00	75.72	32.32	10.68	66.16	0.44	100	217	PEAK																																																									
2	4804.00	50.07	54.00	-3.93	72.79	32.32	10.68	66.16	0.44	100	217	AVERAGE																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>75.73</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>100</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>51.72</td><td>54.00</td><td>-2.28</td><td>74.44</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>399</td><td>242</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	53.01	74.00	-20.99	75.73	32.32	10.68	66.16	0.44	100	217	PEAK	2	4804.00	51.72	54.00	-2.28	74.44	32.32	10.68	66.16	0.44	399	242	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4804.00	53.01	74.00	-20.99	75.73	32.32	10.68	66.16	0.44	100	217	PEAK																																																									
2	4804.00	51.72	54.00	-2.28	74.44	32.32	10.68	66.16	0.44	399	242	AVERAGE																																																									

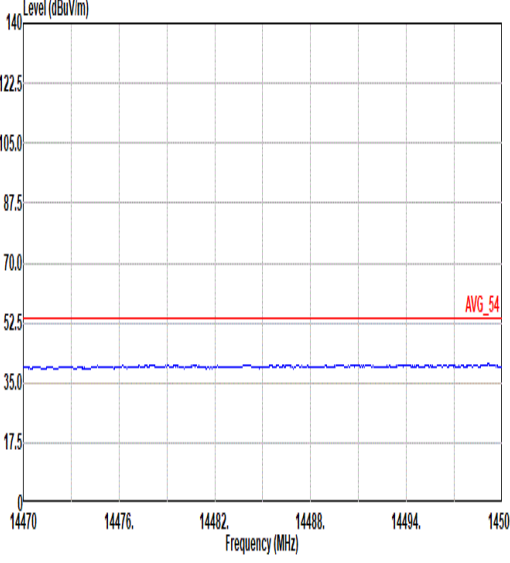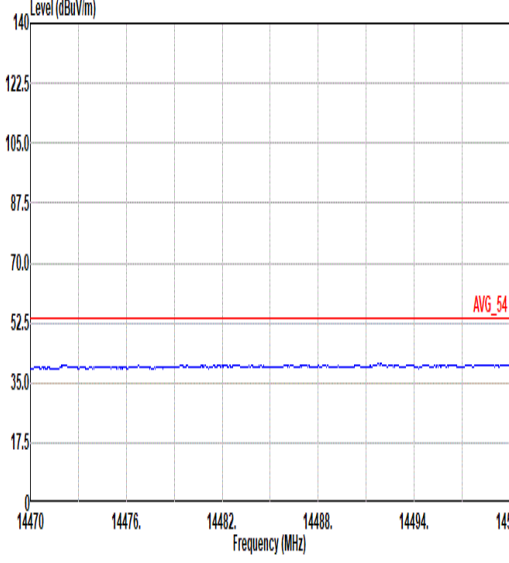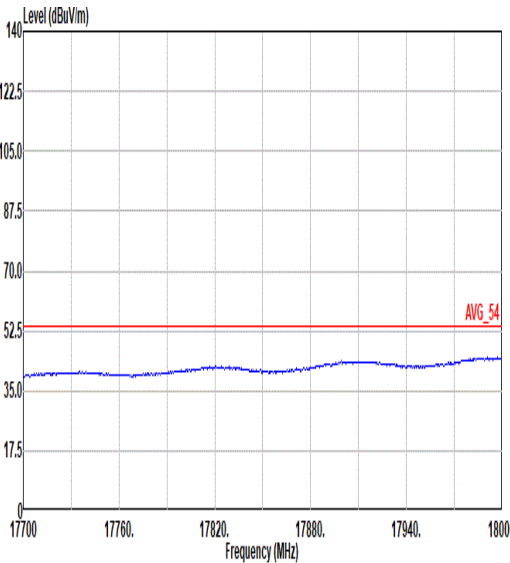
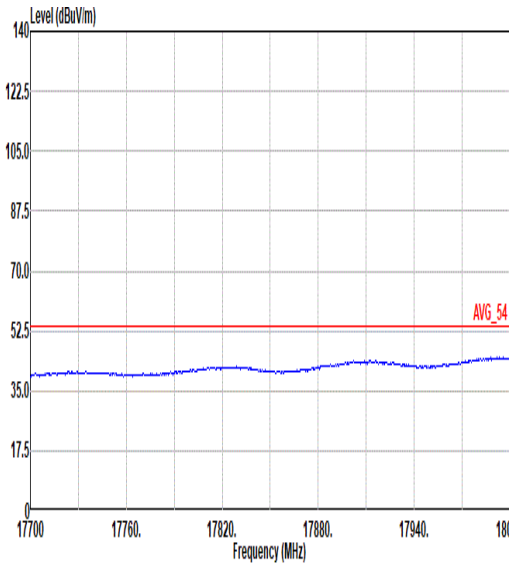


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

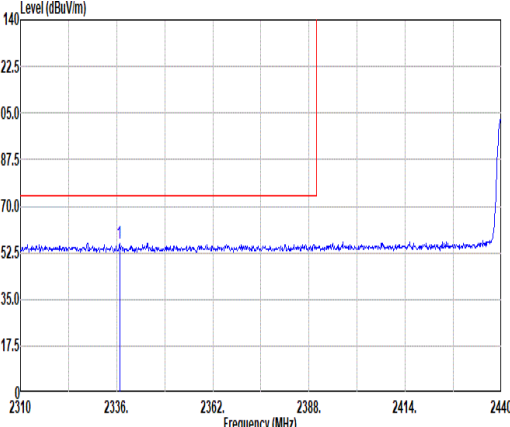
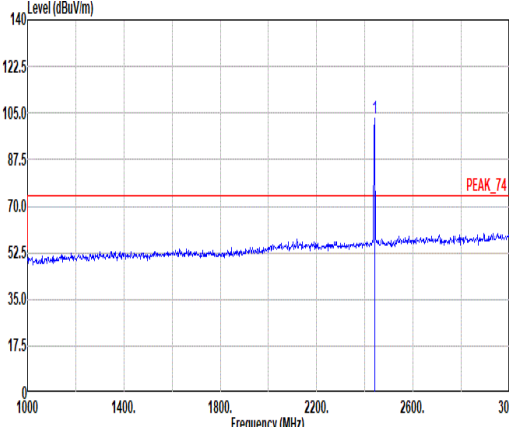
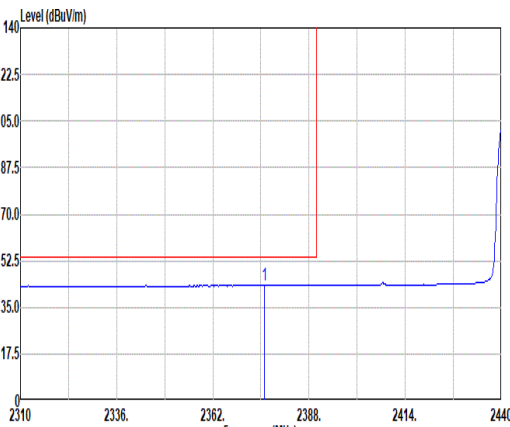
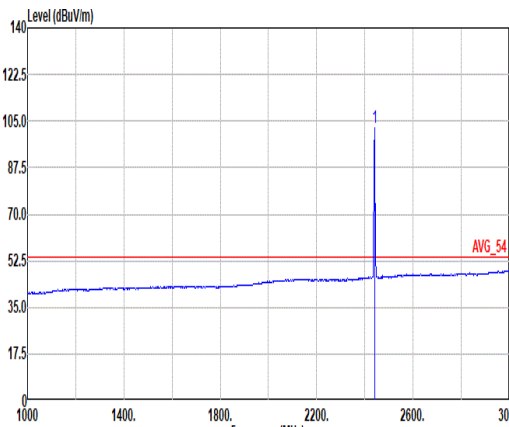


Mode	2																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2336.78</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>41.48</td><td>27.10</td><td>7.60</td><td>29.93</td><td>9.92</td><td>244 205 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2336.78	56.17	74.00	-17.83	41.48	27.10	7.60	29.93	9.92	244 205 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2440.00</td><td>102.81</td><td>-----</td><td>-----</td><td>87.51</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>244 205 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2440.00	102.81	-----	-----	87.51	27.60	7.68	29.90	9.92	244 205 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2336.78	56.17	74.00	-17.83	41.48	27.10	7.60	29.93	9.92	244 205 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2440.00	102.81	-----	-----	87.51	27.60	7.68	29.90	9.92	244 205 PEAK																																																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2375.91</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>28.52</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>244 205 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2375.91	43.39	54.00	-10.61	28.52	27.20	7.67	29.92	9.92	244 205 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2440.00</td><td>102.26</td><td>-----</td><td>-----</td><td>86.96</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>244 205 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2440.00	102.26	-----	-----	86.96	27.60	7.68	29.90	9.92	244 205 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2375.91	43.39	54.00	-10.61	28.52	27.20	7.67	29.92	9.92	244 205 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2440.00	102.26	-----	-----	86.96	27.60	7.68	29.90	9.92	244 205 AVERAGE																																																																									

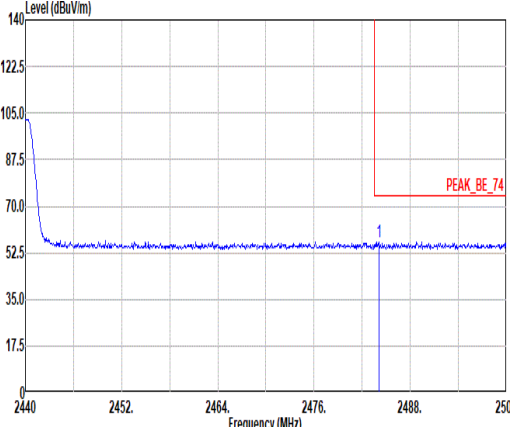
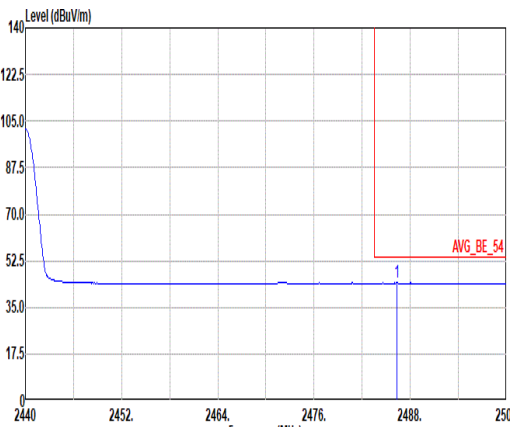


Mode	2																																											
	Band Edge - R																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																											
ANT	1																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.10</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>41.17</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>244</td><td>205</td><td></td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2484.10	56.55	74.00	-17.45	41.17	27.70	7.64	29.88	9.92	244	205		PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																
1	2484.10	56.55	74.00	-17.45	41.17	27.70	7.64	29.88	9.92	244	205		PEAK																															
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2486.38</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>28.75</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>244</td><td>205</td><td></td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2486.38	44.13	54.00	-9.87	28.75	27.70	7.64	29.88	9.92	244	205		AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																
1	2486.38	44.13	54.00	-9.87	28.75	27.70	7.64	29.88	9.92	244	205		AVERAGE																															

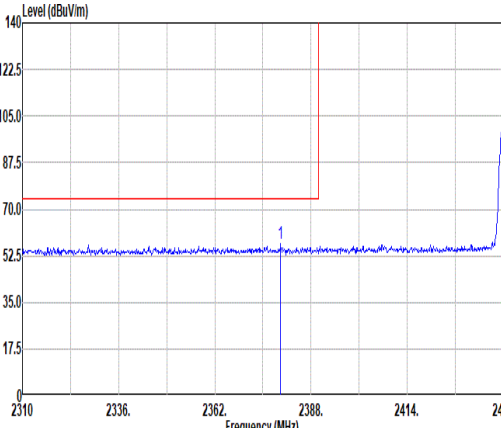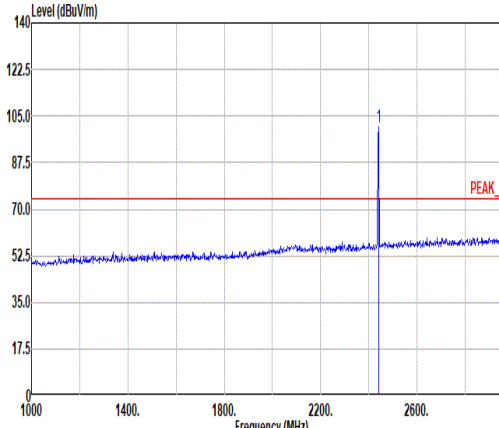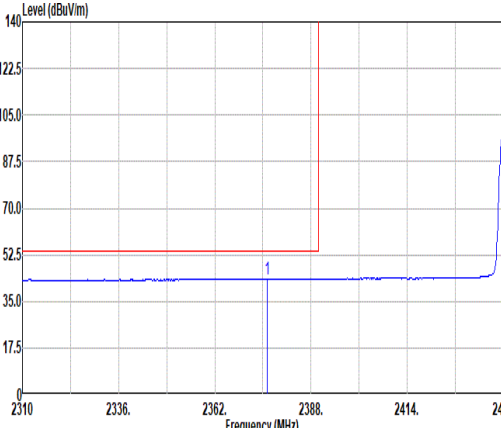
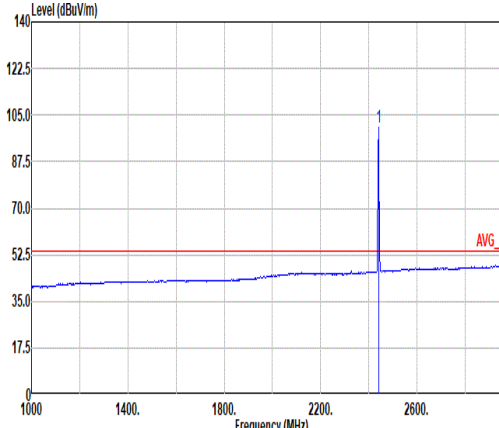


		2																																																																											
Mode	Band Edge - L																																																																												
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																												
ANT	1																																																																												
Pol.	Vertical						Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.81</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>42.17</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>283</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	2379.81	57.04	74.00	-16.96	42.17	27.20	7.67	29.92	9.92	283	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.77</td><td>-----</td><td>-----</td><td>85.47</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>283</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	2440.00	100.77	-----	-----	85.47	27.60	7.68	29.90	9.92	283
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																			
1	2379.81	57.04	74.00	-16.96	42.17	27.20	7.67	29.92	9.92	283																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																			
1	2440.00	100.77	-----	-----	85.47	27.60	7.68	29.90	9.92	283																																																																			
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2376.17</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>28.60</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>283</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	2376.17	43.47	54.00	-10.53	28.60	27.20	7.67	29.92	9.92	283	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.16</td><td>-----</td><td>-----</td><td>84.86</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>283</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	2440.00	100.16	-----	-----	84.86	27.60	7.68	29.90	9.92	283
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																			
1	2376.17	43.47	54.00	-10.53	28.60	27.20	7.67	29.92	9.92	283																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																			
1	2440.00	100.16	-----	-----	84.86	27.60	7.68	29.90	9.92	283																																																																			



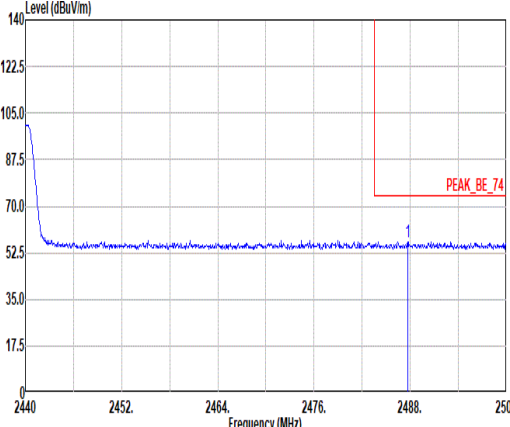
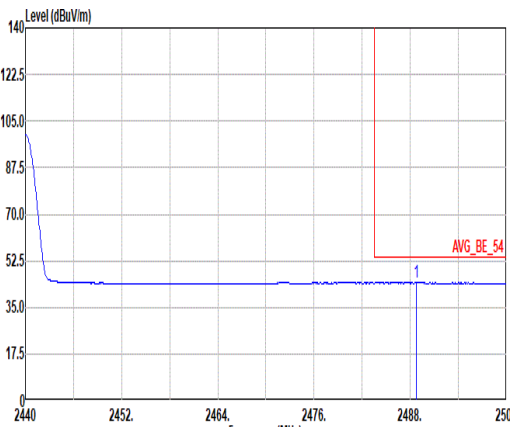


Mode	2																																																					
	Band Edge - R																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																					
ANT	1																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.70</td><td>56.76</td><td>74.00</td><td>-17.24</td><td></td><td>41.38</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>100</td><td>283</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2487.70	56.76	74.00	-17.24		41.38	27.70	7.64	29.88	9.92	100	283	PEAK	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	2487.70	56.76	74.00	-17.24		41.38	27.70	7.64	29.88	9.92	100	283	PEAK																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.78</td><td>44.19</td><td>54.00</td><td>-9.81</td><td></td><td>28.81</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>100</td><td>283</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.78	44.19	54.00	-9.81		28.81	27.70	7.64	29.88	9.92	100	283	AVERAGE	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	2488.78	44.19	54.00	-9.81		28.81	27.70	7.64	29.88	9.92	100	283	AVERAGE																																									



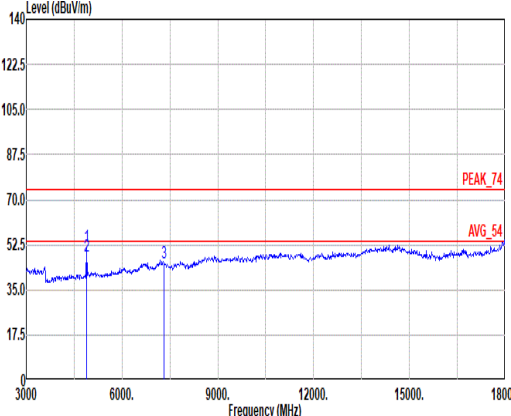
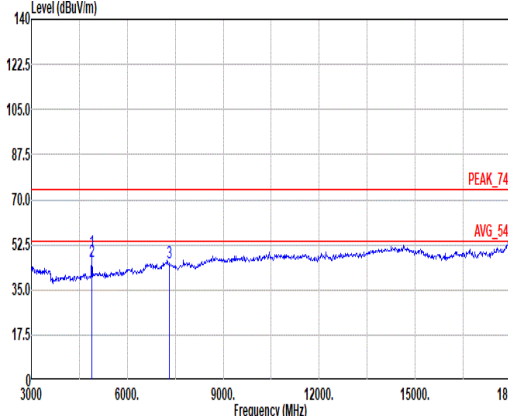


Mode	2																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>51.55</td><td>74.00</td><td>-22.45</td><td>73.63</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>100</td><td>226</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>48.24</td><td>54.00</td><td>-5.76</td><td>70.32</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>100</td><td>226</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>60.49</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	51.55	74.00	-22.45	73.63	32.62	10.88	66.02	0.44	100	226	PEAK	2	4880.00	48.24	54.00	-5.76	70.32	32.62	10.88	66.02	0.44	100	226	AVERAGE	3	7320.00	45.61	74.00	-28.39	60.49	36.78	13.36	65.46	0.44	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>71.83</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>104</td><td>87</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>68.01</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>104</td><td>87</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>45.48</td><td>74.00</td><td>-28.52</td><td>60.36</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	49.75	74.00	-24.25	71.83	32.62	10.88	66.02	0.44	104	87	PEAK	2	4880.00	45.93	54.00	-8.07	68.01	32.62	10.88	66.02	0.44	104	87	AVERAGE	3	7320.00	45.48	74.00	-28.52	60.36	36.78	13.36	65.46	0.44	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	51.55	74.00	-22.45	73.63	32.62	10.88	66.02	0.44	100	226	PEAK																																																																																																																																											
2	4880.00	48.24	54.00	-5.76	70.32	32.62	10.88	66.02	0.44	100	226	AVERAGE																																																																																																																																											
3	7320.00	45.61	74.00	-28.39	60.49	36.78	13.36	65.46	0.44	--	--	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	49.75	74.00	-24.25	71.83	32.62	10.88	66.02	0.44	104	87	PEAK																																																																																																																																											
2	4880.00	45.93	54.00	-8.07	68.01	32.62	10.88	66.02	0.44	104	87	AVERAGE																																																																																																																																											
3	7320.00	45.48	74.00	-28.52	60.36	36.78	13.36	65.46	0.44	--	--	PEAK																																																																																																																																											

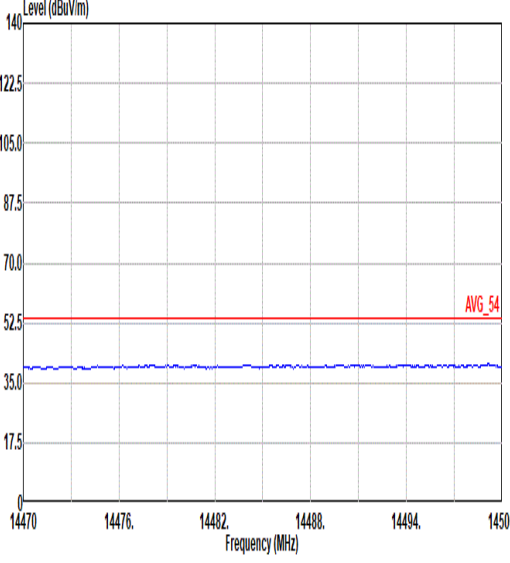
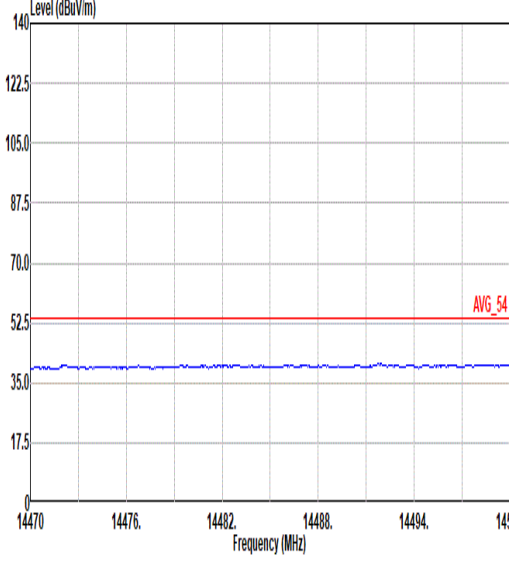
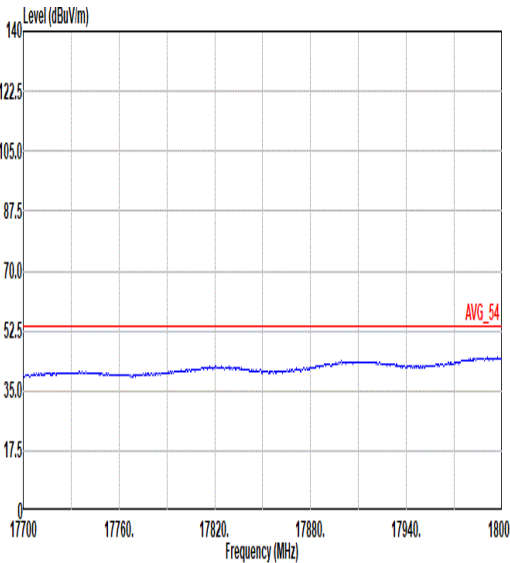
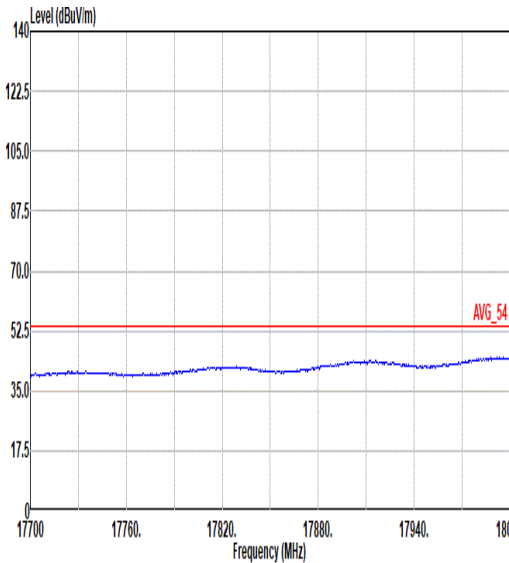


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

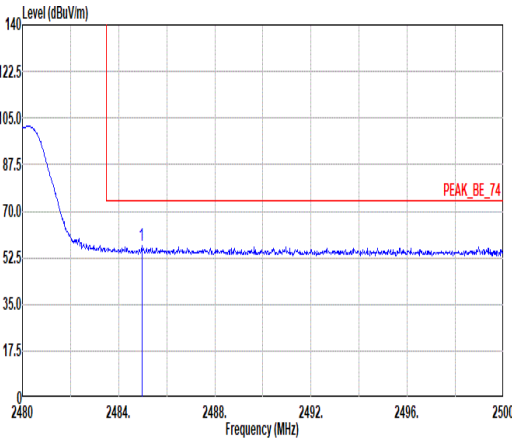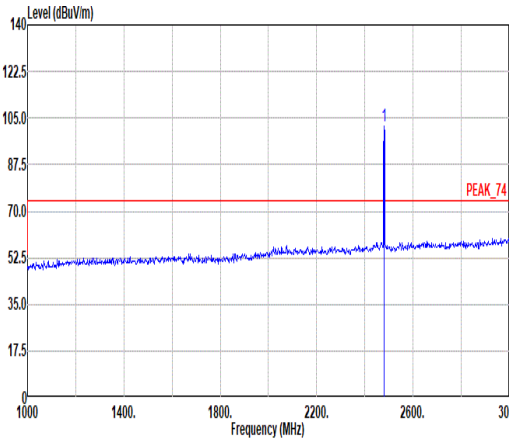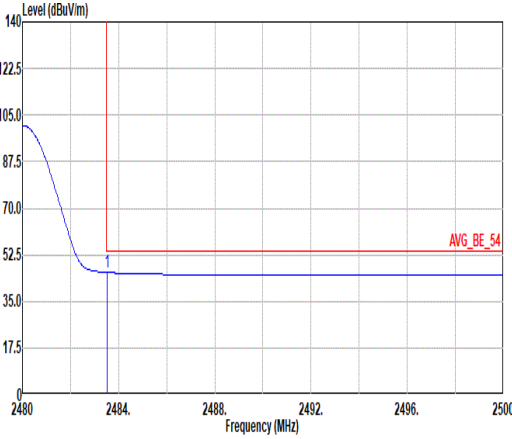
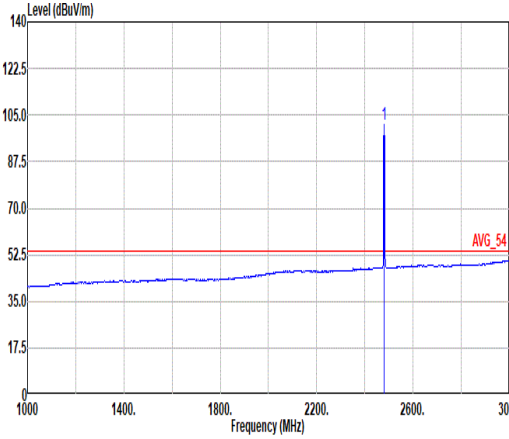


Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.96</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>41.52</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>310</td><td>196</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.96	56.90	74.00	-17.10	41.52	27.70	7.64	29.88	9.92	310	196	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.10</td><td>-----</td><td>-----</td><td>86.72</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>310</td><td>196</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.10	-----	-----	86.72	27.70	7.65	29.89	9.92	310	196	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.96	56.90	74.00	-17.10	41.52	27.70	7.64	29.88	9.92	310	196	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	102.10	-----	-----	86.72	27.70	7.65	29.89	9.92	310	196	PEAK																																																																														
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>45.88</td><td>54.00</td><td>-8.12</td><td>30.50</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>310</td><td>196</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	45.88	54.00	-8.12	30.50	27.70	7.64	29.88	9.92	310	196	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.63</td><td>-----</td><td>-----</td><td>86.25</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>310</td><td>196</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.63	-----	-----	86.25	27.70	7.65	29.89	9.92	310	196	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.52	45.88	54.00	-8.12	30.50	27.70	7.64	29.88	9.92	310	196	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	101.63	-----	-----	86.25	27.70	7.65	29.89	9.92	310	196	AVERAGE																																																																														

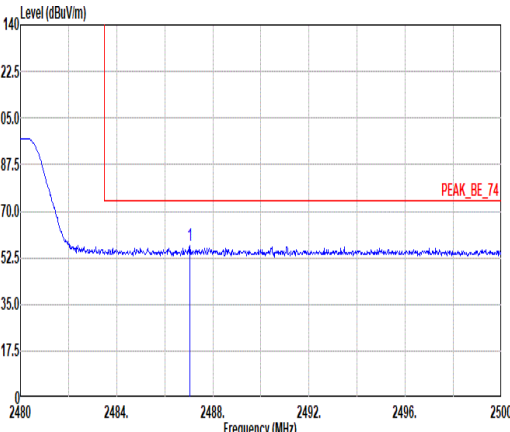
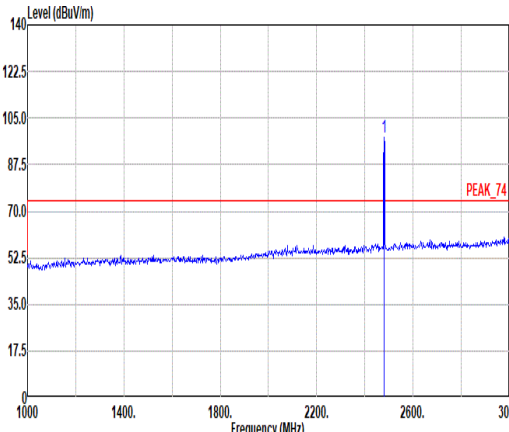
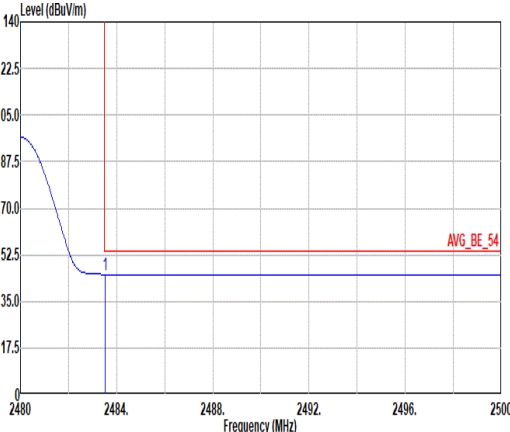
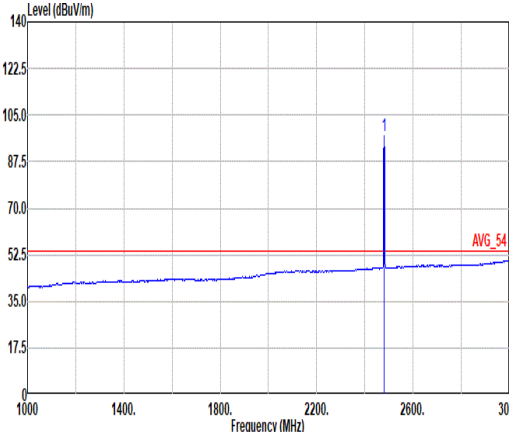


Mode	3																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2487.04</td><td>56.93</td><td>74.00</td><td>-17.07</td><td>41.55</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>395</td><td>296 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2487.04	56.93	74.00	-17.07	41.55	27.70	7.64	29.88	9.92	395	296 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>97.67</td><td>-----</td><td>-----</td><td>82.29</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>395</td><td>296 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	97.67	-----	-----	82.29	27.70	7.65	29.89	9.92	395	296 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2487.04	56.93	74.00	-17.07	41.55	27.70	7.64	29.88	9.92	395	296 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2480.00	97.67	-----	-----	82.29	27.70	7.65	29.89	9.92	395	296 PEAK																																																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.52</td><td>45.11</td><td>54.00</td><td>-8.89</td><td>29.73</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>395</td><td>296 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.52	45.11	54.00	-8.89	29.73	27.70	7.64	29.88	9.92	395	296 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>97.07</td><td>-----</td><td>-----</td><td>81.69</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>395</td><td>296 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	97.07	-----	-----	81.69	27.70	7.65	29.89	9.92	395	296 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2483.52	45.11	54.00	-8.89	29.73	27.70	7.64	29.88	9.92	395	296 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2480.00	97.07	-----	-----	81.69	27.70	7.65	29.89	9.92	395	296 AVERAGE																																																																												



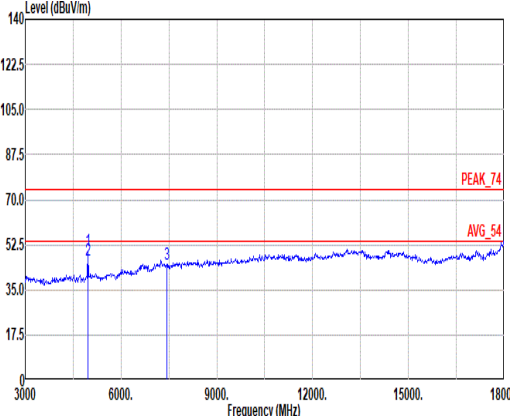
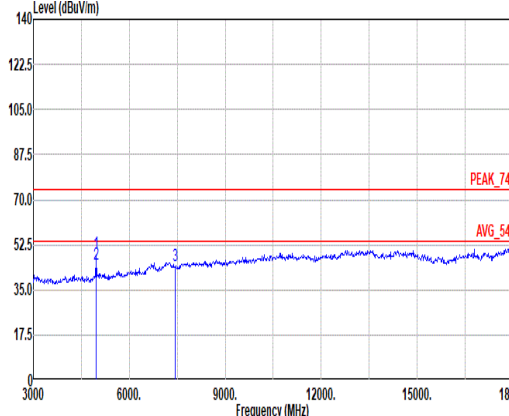


Mode	3																																																																																																																																																																
	Harmonic																																																																																																																																																																
	2400-2483.5_Bluetooth-LE _CH39_2480MHZ																																																																																																																																																																
ANT	1																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																										
Peak Avg																																																																																																																																																																	
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																																																																																										
<table><tr><th></th><th></th><th>Limit</th><th></th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>50.18</td><td>74.00</td><td>-23.82</td><td>71.49</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>269</td><td>215 PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>46.41</td><td>54.00</td><td>-7.59</td><td>67.72</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>269</td><td>215 AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>60.00</td><td>36.32</td><td>13.48</td><td>65.47</td><td>0.40</td><td>--</td><td>-- PEAK</td></tr></table>														Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	50.18	74.00	-23.82	71.49	33.02	11.09	65.87	0.45	269	215 PEAK	2	4960.00	46.41	54.00	-7.59	67.72	33.02	11.09	65.87	0.45	269	215 AVERAGE	3	7440.00	44.73	74.00	-29.27	60.00	36.32	13.48	65.47	0.40	--	-- PEAK	<table><tr><th></th><th></th><th>Limit</th><th></th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>49.07</td><td>74.00</td><td>-24.93</td><td>70.38</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>397</td><td>246 PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>44.71</td><td>54.00</td><td>-9.29</td><td>66.02</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>397</td><td>246 AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>44.25</td><td>74.00</td><td>-29.75</td><td>59.52</td><td>36.32</td><td>13.48</td><td>65.47</td><td>0.40</td><td>--</td><td>-- PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	49.07	74.00	-24.93	70.38	33.02	11.09	65.87	0.45	397	246 PEAK	2	4960.00	44.71	54.00	-9.29	66.02	33.02	11.09	65.87	0.45	397	246 AVERAGE	3	7440.00	44.25	74.00	-29.75	59.52	36.32	13.48	65.47	0.40	--	-- PEAK
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1	4960.00	50.18	74.00	-23.82	71.49	33.02	11.09	65.87	0.45	269	215 PEAK																																																																																																																																																						
2	4960.00	46.41	54.00	-7.59	67.72	33.02	11.09	65.87	0.45	269	215 AVERAGE																																																																																																																																																						
3	7440.00	44.73	74.00	-29.27	60.00	36.32	13.48	65.47	0.40	--	-- PEAK																																																																																																																																																						
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1	4960.00	49.07	74.00	-24.93	70.38	33.02	11.09	65.87	0.45	397	246 PEAK																																																																																																																																																						
2	4960.00	44.71	54.00	-9.29	66.02	33.02	11.09	65.87	0.45	397	246 AVERAGE																																																																																																																																																						
3	7440.00	44.25	74.00	-29.75	59.52	36.32	13.48	65.47	0.40	--	-- PEAK																																																																																																																																																						

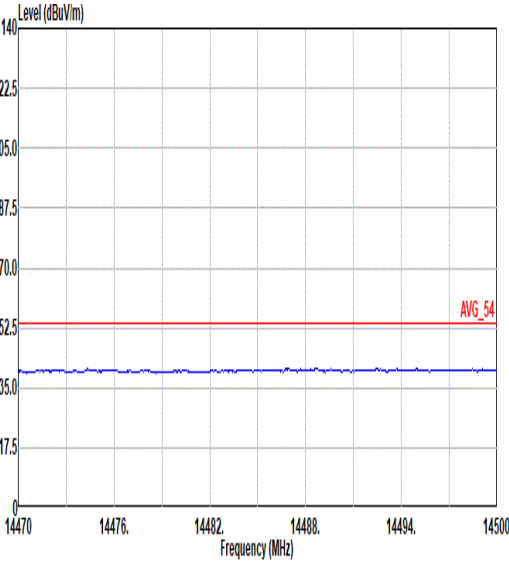
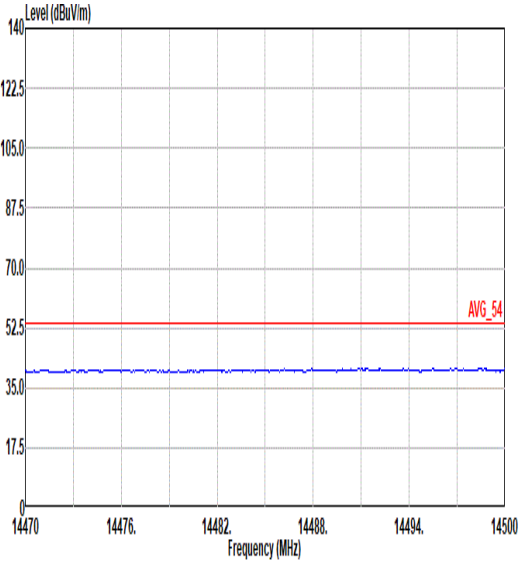
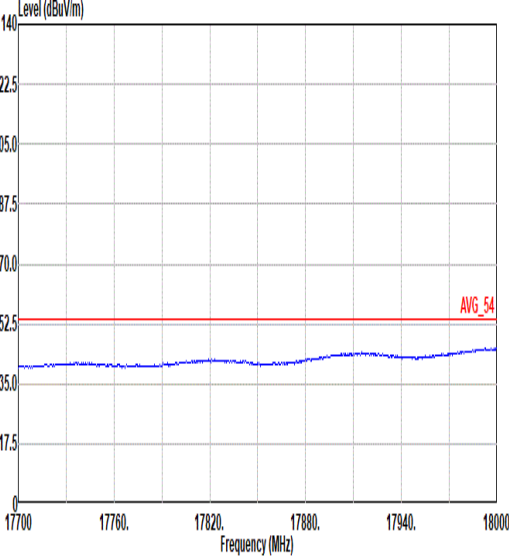
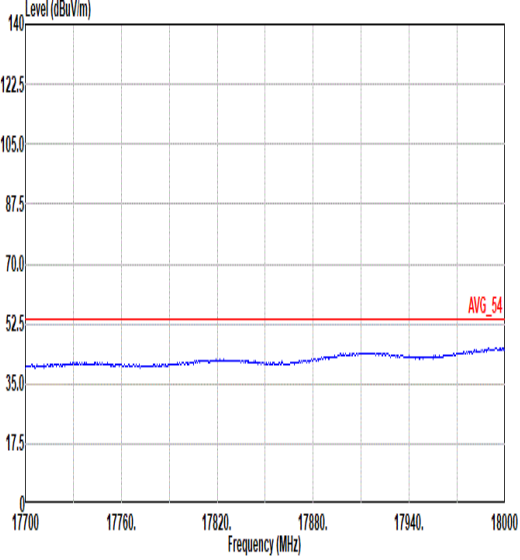


Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

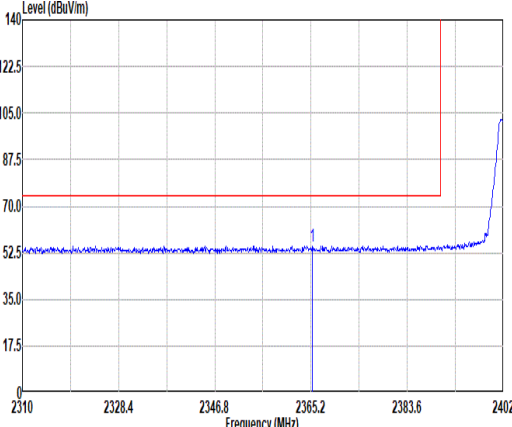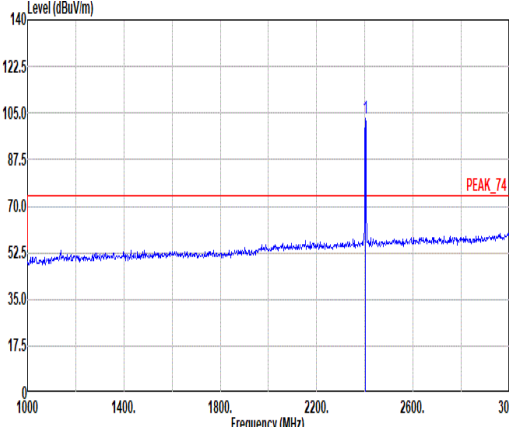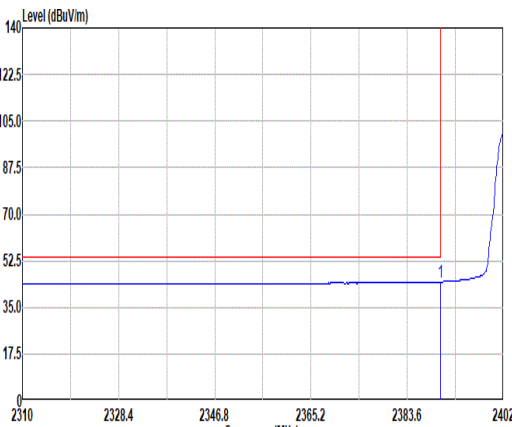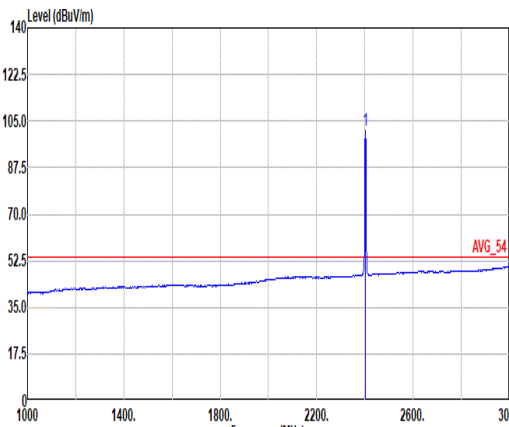

		4																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																											
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2365.38</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>40.34</td><td>27.20</td><td>7.65</td><td>29.92</td><td>9.92</td><td>339 212 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.38	55.19	74.00	-18.81	40.34	27.20	7.65	29.92	9.92	339 212 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>102.85</td><td>-----</td><td>-----</td><td>87.73</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>339 212 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.85	-----	-----	87.73	27.40	7.71	29.91	9.92	339 212 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2365.38	55.19	74.00	-18.81	40.34	27.20	7.65	29.92	9.92	339 212 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	102.85	-----	-----	87.73	27.40	7.71	29.91	9.92	339 212 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																											
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>29.58</td><td>27.30</td><td>7.69</td><td>29.91</td><td>9.92</td><td>339 212 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.58	54.00	-9.42	29.58	27.30	7.69	29.91	9.92	339 212 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.54</td><td>-----</td><td>-----</td><td>86.42</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>339 212 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.54	-----	-----	86.42	27.40	7.71	29.91	9.92	339 212 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	44.58	54.00	-9.42	29.58	27.30	7.69	29.91	9.92	339 212 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	101.54	-----	-----	86.42	27.40	7.71	29.91	9.92	339 212 AVERAGE																																																																																								

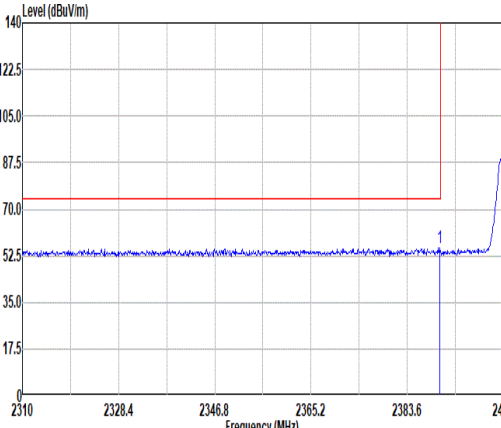
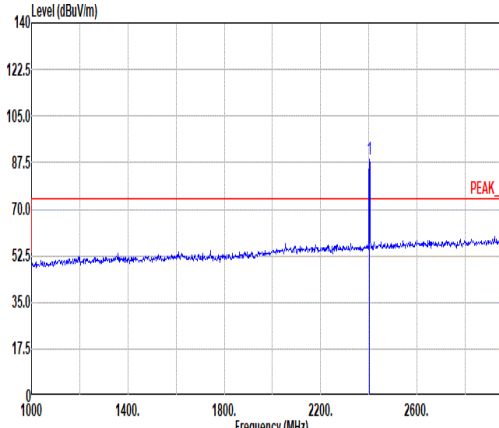
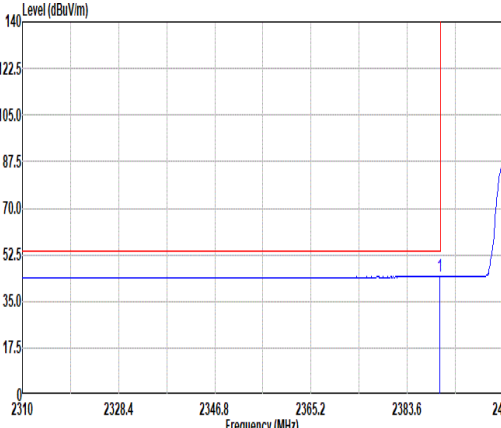
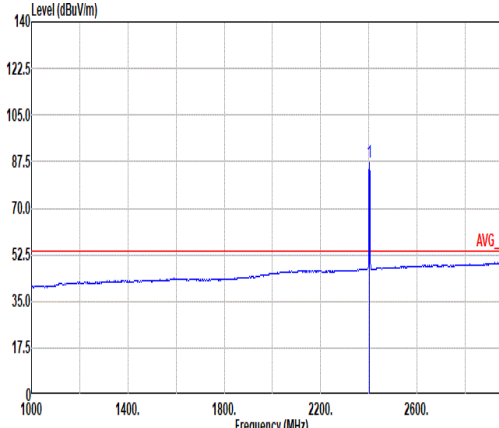


		4																																																																																																			
Mode	Band Edge																																																																																																				
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical					Fundamental																																																																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.86</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>40.42</td><td>27.30</td><td>7.69</td><td>29.91</td><td>9.92</td><td>333</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2389.86	55.42	74.00	-18.58	40.42	27.30	7.69	29.91	9.92	333	0 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>88.81</td><td>-----</td><td>-----</td><td>73.69</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>333</td><td>0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2402.00	88.81	-----	-----	73.69	27.40	7.71	29.91	9.92	333	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																											
1	2389.86	55.42	74.00	-18.58	40.42	27.30	7.69	29.91	9.92	333	0 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																											
1	2402.00	88.81	-----	-----	73.69	27.40	7.71	29.91	9.92	333	0 PEAK																																																																																										
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.76</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>29.28</td><td>27.30</td><td>7.69</td><td>29.91</td><td>9.92</td><td>333</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2389.76	44.28	54.00	-9.72	29.28	27.30	7.69	29.91	9.92	333	0 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>87.35</td><td>-----</td><td>-----</td><td>72.23</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>333</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2402.00	87.35	-----	-----	72.23	27.40	7.71	29.91	9.92	333	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																											
1	2389.76	44.28	54.00	-9.72	29.28	27.30	7.69	29.91	9.92	333	0 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																											
1	2402.00	87.35	-----	-----	72.23	27.40	7.71	29.91	9.92	333	0 AVERAGE																																																																																										







Mode	4																																																																																																																																												
	Harmonic																																																																																																																																												
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																												
ANT	1																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>76.12</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>258</td><td>218</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>48.42</td><td>54.00</td><td>-5.58</td><td>71.14</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>258</td><td>218</td><td>AVERAGE</td></tr><tr><td>3</td><td>7206.00</td><td>45.65</td><td>74.00</td><td>-28.35</td><td>60.52</td><td>36.82</td><td>13.22</td><td>65.45</td><td>0.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	53.40	74.00	-20.60	76.12	32.32	10.68	66.16	0.44	258	218	PEAK	2	4804.00	48.42	54.00	-5.58	71.14	32.32	10.68	66.16	0.44	258	218	AVERAGE	3	7206.00	45.65	74.00	-28.35	60.52	36.82	13.22	65.45	0.54	--	--	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>74.43</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>399</td><td>241</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>46.54</td><td>54.00</td><td>-7.46</td><td>69.26</td><td>32.32</td><td>10.68</td><td>66.16</td><td>0.44</td><td>399</td><td>241</td><td>AVERAGE</td></tr><tr><td>3</td><td>7206.00</td><td>45.74</td><td>74.00</td><td>-28.26</td><td>60.61</td><td>36.82</td><td>13.22</td><td>65.45</td><td>0.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	51.71	74.00	-22.29	74.43	32.32	10.68	66.16	0.44	399	241	PEAK	2	4804.00	46.54	54.00	-7.46	69.26	32.32	10.68	66.16	0.44	399	241	AVERAGE	3	7206.00	45.74	74.00	-28.26	60.61	36.82	13.22	65.45	0.54	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4804.00	53.40	74.00	-20.60	76.12	32.32	10.68	66.16	0.44	258	218	PEAK																																																																																																																																	
2	4804.00	48.42	54.00	-5.58	71.14	32.32	10.68	66.16	0.44	258	218	AVERAGE																																																																																																																																	
3	7206.00	45.65	74.00	-28.35	60.52	36.82	13.22	65.45	0.54	--	--	PEAK																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4804.00	51.71	74.00	-22.29	74.43	32.32	10.68	66.16	0.44	399	241	PEAK																																																																																																																																	
2	4804.00	46.54	54.00	-7.46	69.26	32.32	10.68	66.16	0.44	399	241	AVERAGE																																																																																																																																	
3	7206.00	45.74	74.00	-28.26	60.61	36.82	13.22	65.45	0.54	--	--	PEAK																																																																																																																																	

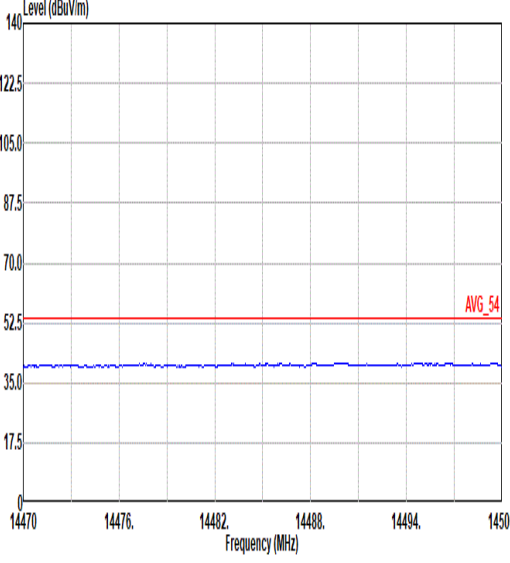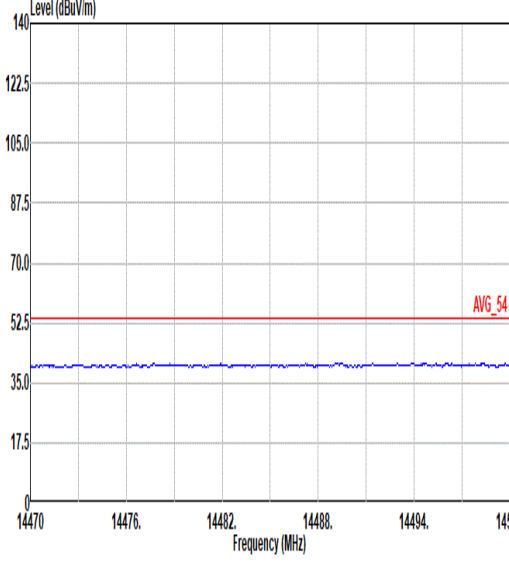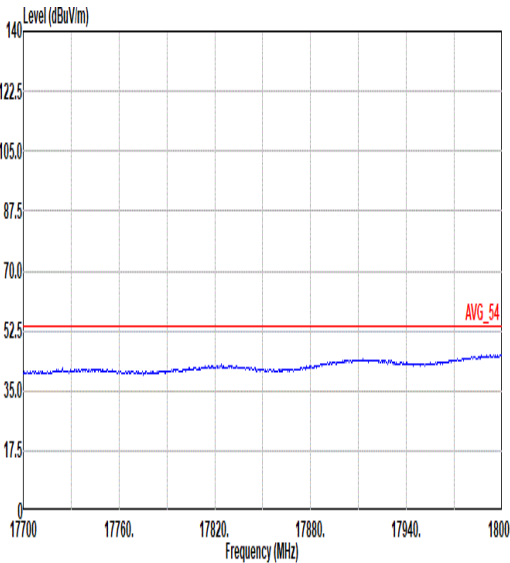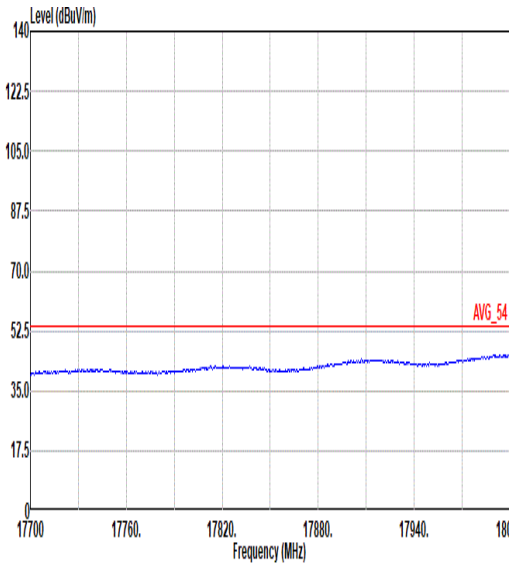

Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

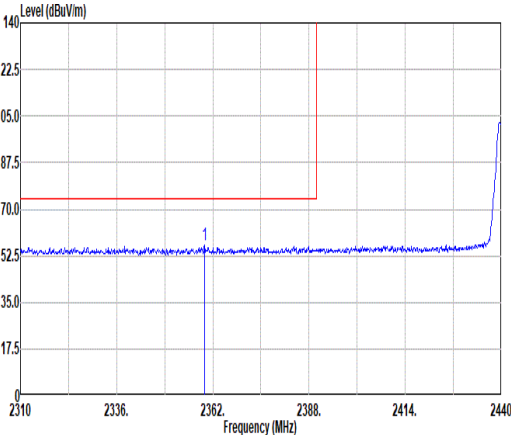
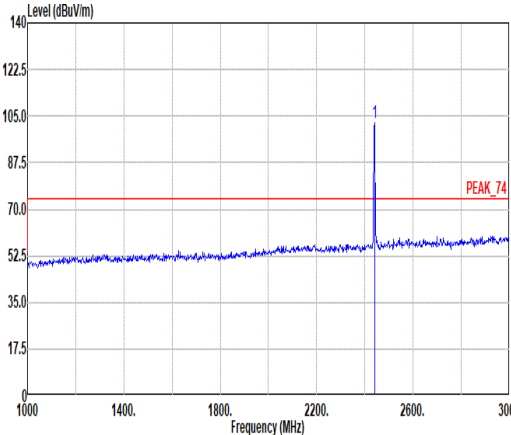
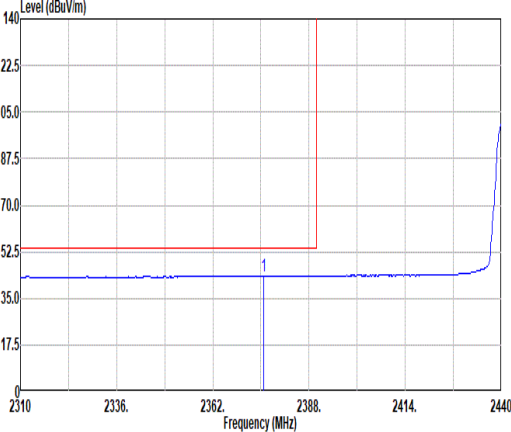
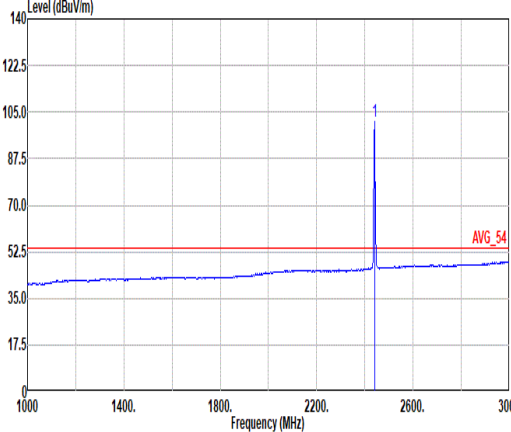


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2359.79</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>41.43</td><td>27.20</td><td>7.64</td><td>29.92</td><td>9.92</td><td>300</td><td>218</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.79	56.27	74.00	-17.73	41.43	27.20	7.64	29.92	9.92	300	218	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>102.69</td><td>-----</td><td>-----</td><td>87.39</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>300</td><td>218</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	102.69	-----	-----	87.39	27.60	7.68	29.90	9.92	300	218
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2359.79	56.27	74.00	-17.73	41.43	27.20	7.64	29.92	9.92	300	218	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	102.69	-----	-----	87.39	27.60	7.68	29.90	9.92	300	218	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.78</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>28.58</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>300</td><td>218</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.78	43.45	54.00	-10.55	28.58	27.20	7.67	29.92	9.92	300	218	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>101.37</td><td>-----</td><td>-----</td><td>86.07</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>300</td><td>218</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.37	-----	-----	86.07	27.60	7.68	29.90	9.92	300	218
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2375.78	43.45	54.00	-10.55	28.58	27.20	7.67	29.92	9.92	300	218	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	101.37	-----	-----	86.07	27.60	7.68	29.90	9.92	300	218	AVERAGE																																																																																							





Mode	5																																																		
	Band Edge - R																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2489.56</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>41.10</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>300</td><td>218</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.56	56.48	74.00	-17.52	41.10	27.70	7.64	29.88	9.92	300	218	PEAK	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2489.56	56.48	74.00	-17.52	41.10	27.70	7.64	29.88	9.92	300	218	PEAK																																							
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.76</td><td>44.14</td><td>54.00</td><td>-9.86</td><td>28.76</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>300</td><td>218</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.76	44.14	54.00	-9.86	28.76	27.70	7.64	29.88	9.92	300	218	AVERAGE	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2484.76	44.14	54.00	-9.86	28.76	27.70	7.64	29.88	9.92	300	218	AVERAGE																																							

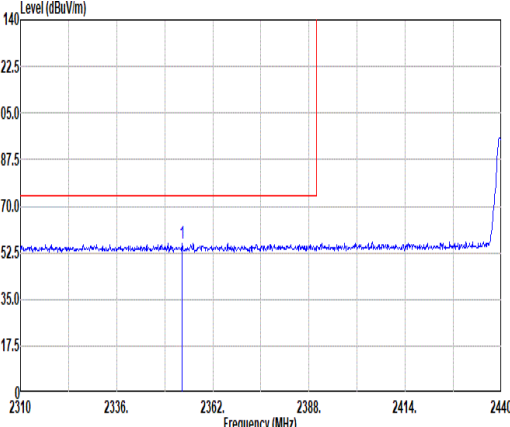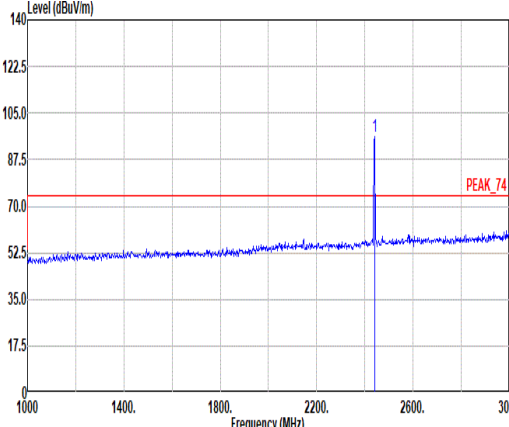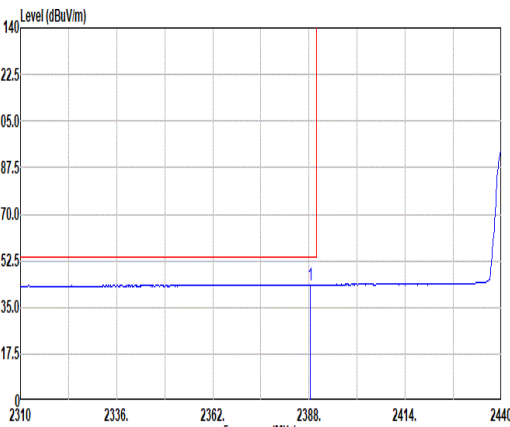
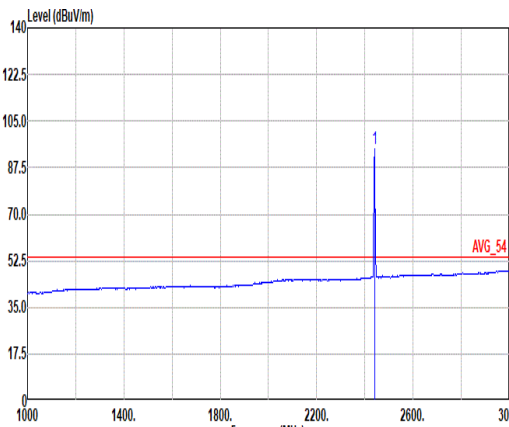


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2353.68</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>41.44</td><td>27.14</td><td>7.63</td><td>29.92</td><td>9.92</td><td>300</td><td>85</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2353.68	56.21	74.00	-17.79	41.44	27.14	7.63	29.92	9.92	300	85	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>95.98</td><td>-----</td><td>-----</td><td>80.68</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>300</td><td>85</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	95.98	-----	-----	80.68	27.60	7.68	29.90	9.92	300	85
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2353.68	56.21	74.00	-17.79	41.44	27.14	7.63	29.92	9.92	300	85	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	95.98	-----	-----	80.68	27.60	7.68	29.90	9.92	300	85	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.39</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>28.49</td><td>27.28</td><td>7.69</td><td>29.91</td><td>9.92</td><td>300</td><td>85</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.39	43.47	54.00	-10.53	28.49	27.28	7.69	29.91	9.92	300	85	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>94.62</td><td>-----</td><td>-----</td><td>79.32</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>300</td><td>85</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.62	-----	-----	79.32	27.60	7.68	29.90	9.92	300	85
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.39	43.47	54.00	-10.53	28.49	27.28	7.69	29.91	9.92	300	85	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	94.62	-----	-----	79.32	27.60	7.68	29.90	9.92	300	85	AVERAGE																																																																																							



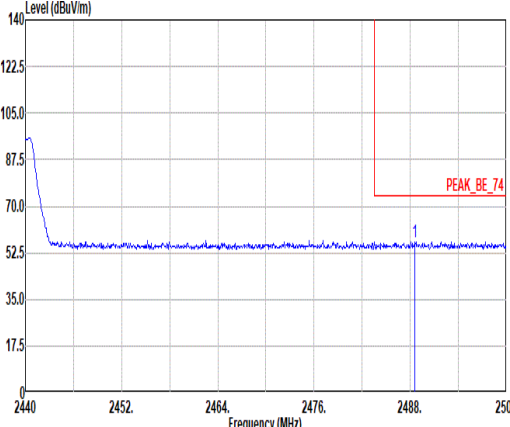
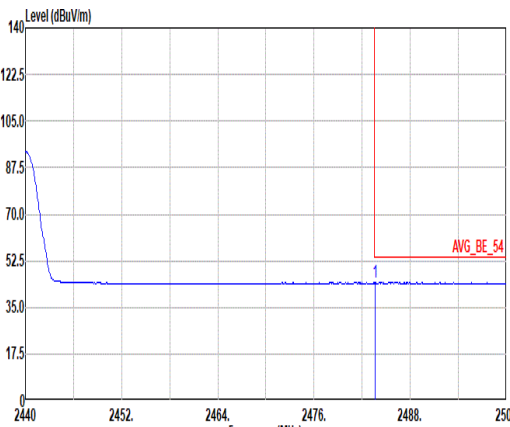


Mode	5																																																				
	Band Edge - R																																																				
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																				
ANT	1																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.60</td><td>56.70</td><td>74.00</td><td>-17.30</td><td>41.32</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>300</td><td>85</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.60	56.70	74.00	-17.30	41.32	27.70	7.64	29.88	9.92	300	85	PEAK	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	2488.60	56.70	74.00	-17.30	41.32	27.70	7.64	29.88	9.92	300	85	PEAK																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>44.15</td><td>54.00</td><td>-9.85</td><td>28.77</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>300</td><td>85</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.62	44.15	54.00	-9.85	28.77	27.70	7.64	29.88	9.92	300	85	AVERAGE	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	2483.62	44.15	54.00	-9.85	28.77	27.70	7.64	29.88	9.92	300	85	AVERAGE																																									



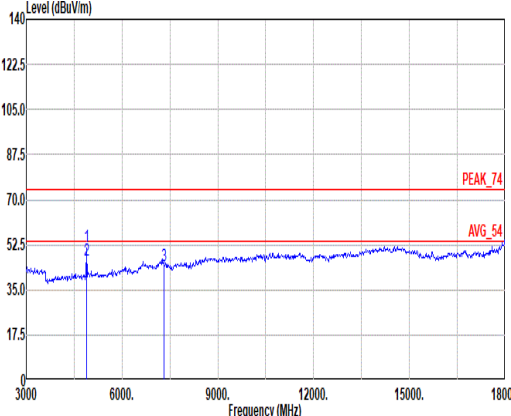
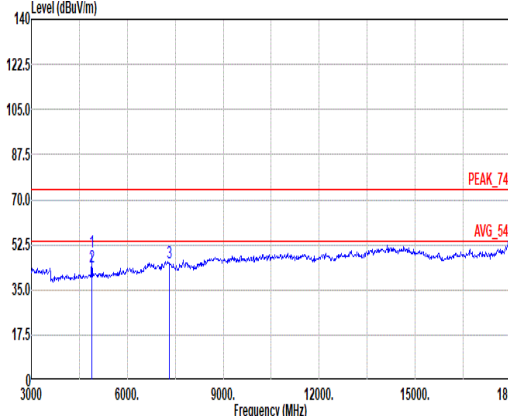


Mode	5																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>51.74</td><td>74.00</td><td>-22.26</td><td>73.82</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>268</td><td>226</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>46.23</td><td>54.00</td><td>-7.77</td><td>68.31</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>268</td><td>226</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>59.22</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	51.74	74.00	-22.26	73.82	32.62	10.88	66.02	0.44	268	226	PEAK	2	4880.00	46.23	54.00	-7.77	68.31	32.62	10.88	66.02	0.44	268	226	AVERAGE	3	7320.00	44.34	74.00	-29.66	59.22	36.78	13.36	65.46	0.44	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>49.78</td><td>74.00</td><td>-24.22</td><td>71.86</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>102</td><td>87</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>43.89</td><td>54.00</td><td>-10.11</td><td>65.97</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>102</td><td>87</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>60.09</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	49.78	74.00	-24.22	71.86	32.62	10.88	66.02	0.44	102	87	PEAK	2	4880.00	43.89	54.00	-10.11	65.97	32.62	10.88	66.02	0.44	102	87	AVERAGE	3	7320.00	45.21	74.00	-28.79	60.09	36.78	13.36	65.46	0.44	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4880.00	51.74	74.00	-22.26	73.82	32.62	10.88	66.02	0.44	268	226	PEAK																																																																																																																																		
2	4880.00	46.23	54.00	-7.77	68.31	32.62	10.88	66.02	0.44	268	226	AVERAGE																																																																																																																																		
3	7320.00	44.34	74.00	-29.66	59.22	36.78	13.36	65.46	0.44	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4880.00	49.78	74.00	-24.22	71.86	32.62	10.88	66.02	0.44	102	87	PEAK																																																																																																																																		
2	4880.00	43.89	54.00	-10.11	65.97	32.62	10.88	66.02	0.44	102	87	AVERAGE																																																																																																																																		
3	7320.00	45.21	74.00	-28.79	60.09	36.78	13.36	65.46	0.44	--	--	Peak																																																																																																																																		

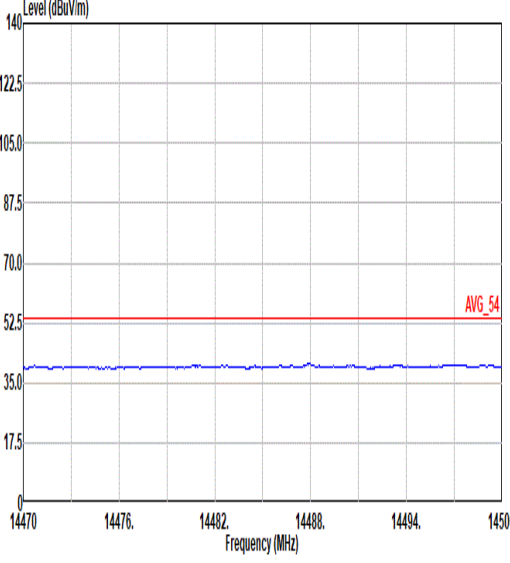
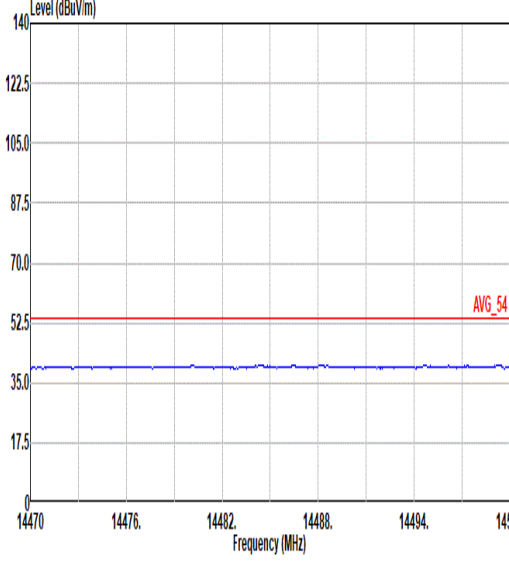
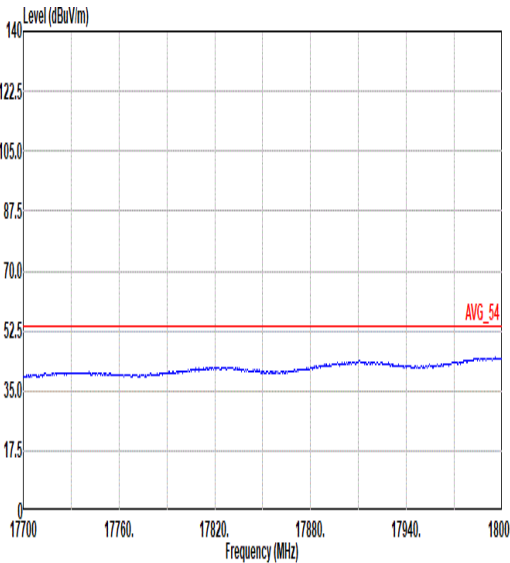
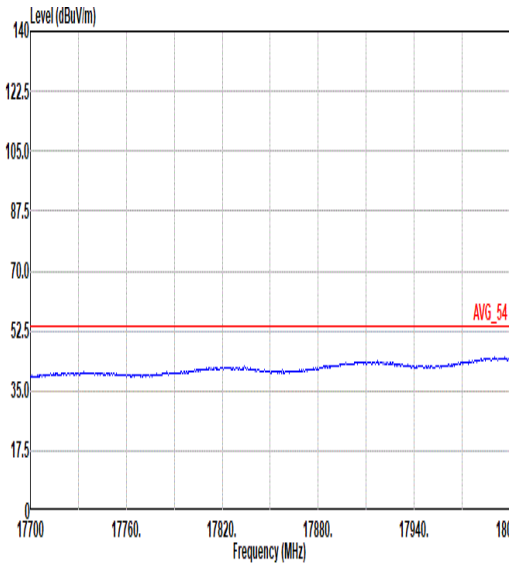


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

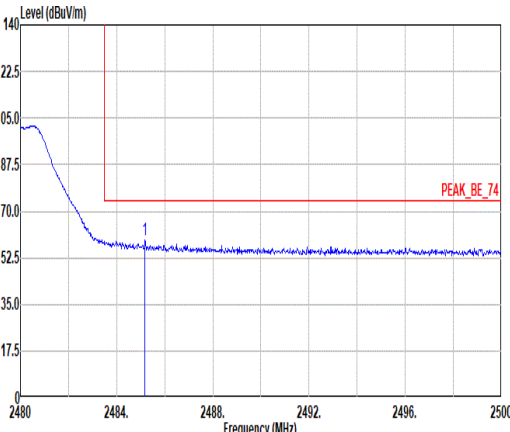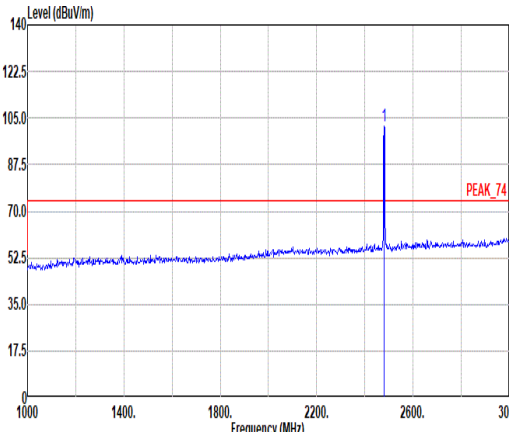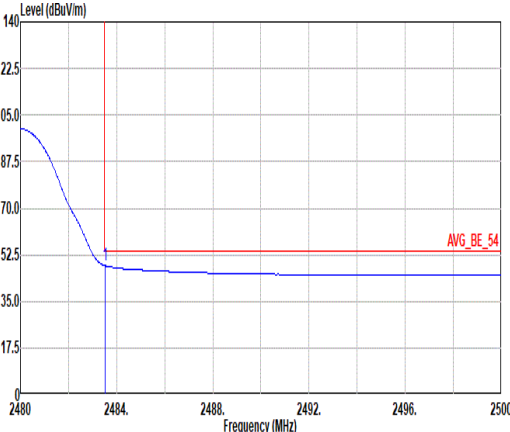
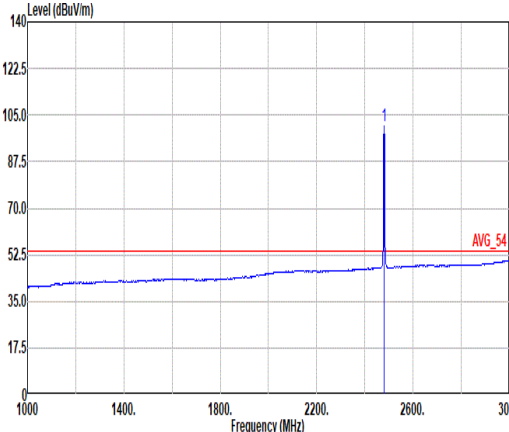


Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.18</td><td>58.93</td><td>74.00</td><td>-15.07</td><td>43.55</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>310</td><td>199</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.18	58.93	74.00	-15.07	43.55	27.70	7.64	29.88	9.92	310	199	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.16</td><td>-----</td><td>-----</td><td>86.78</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>310</td><td>199</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.16	-----	-----	86.78	27.70	7.65	29.89	9.92	310	199
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.18	58.93	74.00	-15.07	43.55	27.70	7.64	29.88	9.92	310	199	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	102.16	-----	-----	86.78	27.70	7.65	29.89	9.92	310	199	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>48.40</td><td>54.00</td><td>-5.60</td><td>33.02</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>310</td><td>199</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	48.40	54.00	-5.60	33.02	27.70	7.64	29.88	9.92	310	199	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>100.00</td><td>-----</td><td>-----</td><td>85.42</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>310</td><td>199</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.00	-----	-----	85.42	27.70	7.65	29.89	9.92	310	199
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	48.40	54.00	-5.60	33.02	27.70	7.64	29.88	9.92	310	199	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	100.00	-----	-----	85.42	27.70	7.65	29.89	9.92	310	199	AVERAGE																																																																																							

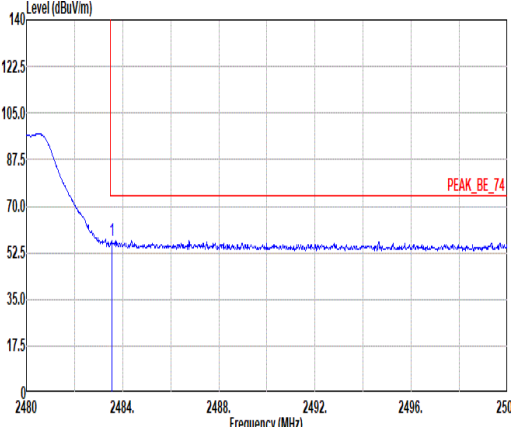
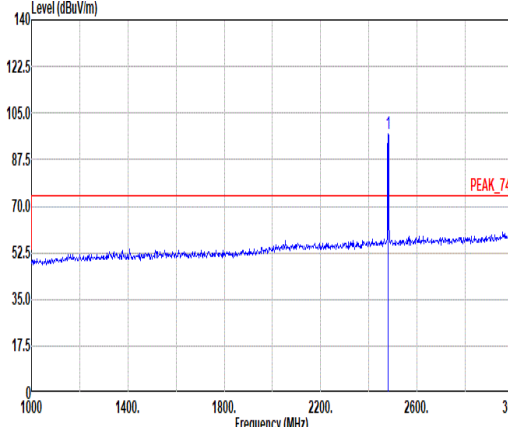
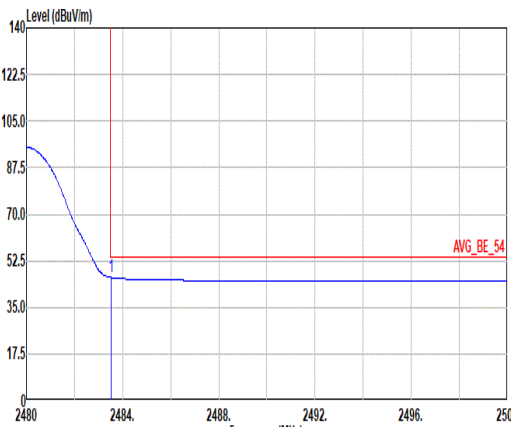
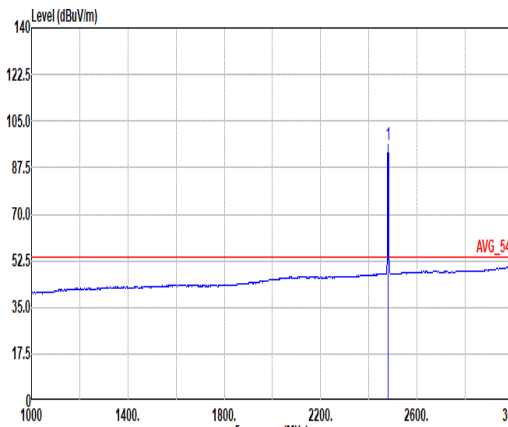


Mode	6																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>41.60</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>400</td><td>297</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.56	56.98	74.00	-17.02	41.60	27.70	7.64	29.88	9.92	400	297	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>97.46</td><td>-----</td><td>-----</td><td>82.08</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>400</td><td>297</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2480.00	97.46	-----	-----	82.08	27.70	7.65	29.89	9.92	400	297	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2483.56	56.98	74.00	-17.02	41.60	27.70	7.64	29.88	9.92	400	297	PEAK																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2480.00	97.46	-----	-----	82.08	27.70	7.65	29.89	9.92	400	297	PEAK																																																																				
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>46.25</td><td>54.00</td><td>-7.75</td><td>30.87</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>400</td><td>297</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.52	46.25	54.00	-7.75	30.87	27.70	7.64	29.88	9.92	400	297	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.10</td><td>-----</td><td>-----</td><td>80.72</td><td>27.70</td><td>7.65</td><td>29.89</td><td>9.92</td><td>400</td><td>297</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2480.00	96.10	-----	-----	80.72	27.70	7.65	29.89	9.92	400	297	AVERAGE
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2483.52	46.25	54.00	-7.75	30.87	27.70	7.64	29.88	9.92	400	297	AVERAGE																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	2480.00	96.10	-----	-----	80.72	27.70	7.65	29.89	9.92	400	297	AVERAGE																																																																				

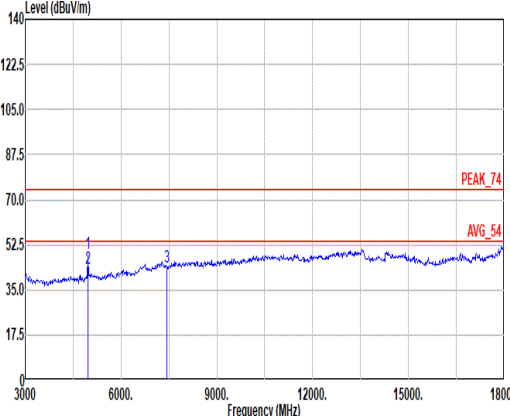
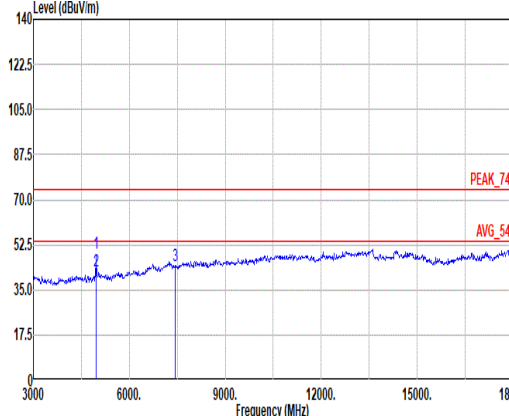


Mode	6																																																																																				
	Harmonic																																																																																				
	2400-2483.5_Bluetooth-LE _CH39_2480MHZ																																																																																				
ANT	1																																																																																				
Pol.	Horizontal						Vertical																																																																														
Peak Avg																																																																																					
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																														
<table><tr><th></th><th></th><th>Limit</th><th></th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>70.47</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>100</td><td>221 PEAK</td></tr><tr><td>2</td><td>4968.00</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>64.60</td><td>33.02</td><td>11.09</td><td>65.87</td><td>0.45</td><td>100</td><td>221 AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>59.20</td><td>36.32</td><td>13.48</td><td>65.47</td><td>0.40</td><td>--</td><td>-- PEAK</td></tr></table>																Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	49.16	74.00	-24.84	70.47	33.02	11.09	65.87	0.45	100	221 PEAK	2	4968.00	43.29	54.00	-10.71	64.60	33.02	11.09	65.87	0.45	100	221 AVERAGE	3	7440.00	43.93	74.00	-30.07	59.20	36.32	13.48	65.47	0.40	--	-- PEAK
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	4960.00	49.16	74.00	-24.84	70.47	33.02	11.09	65.87	0.45	100	221 PEAK																																																																										
2	4968.00	43.29	54.00	-10.71	64.60	33.02	11.09	65.87	0.45	100	221 AVERAGE																																																																										
3	7440.00	43.93	74.00	-30.07	59.20	36.32	13.48	65.47	0.40	--	-- PEAK																																																																										

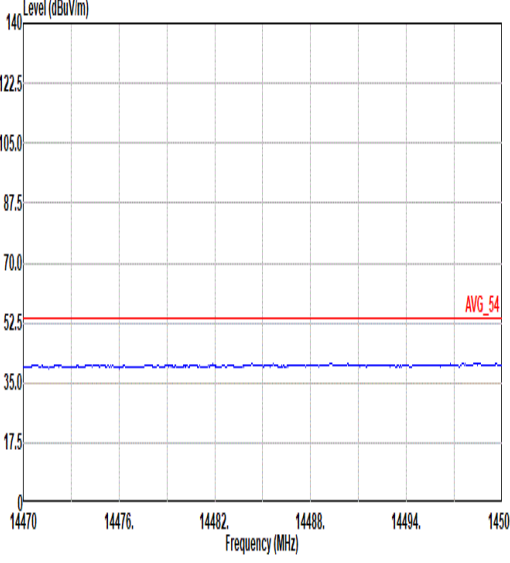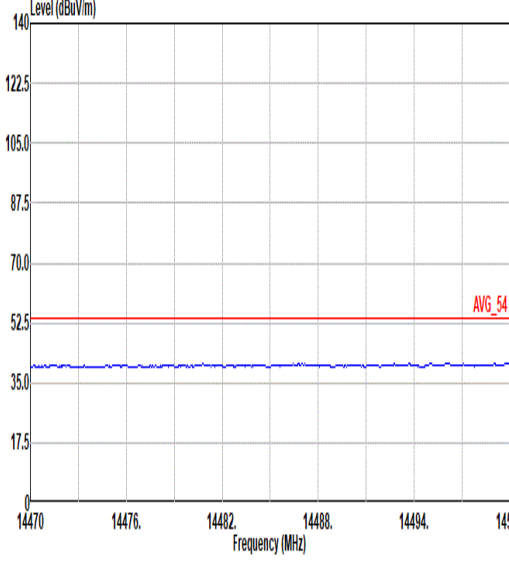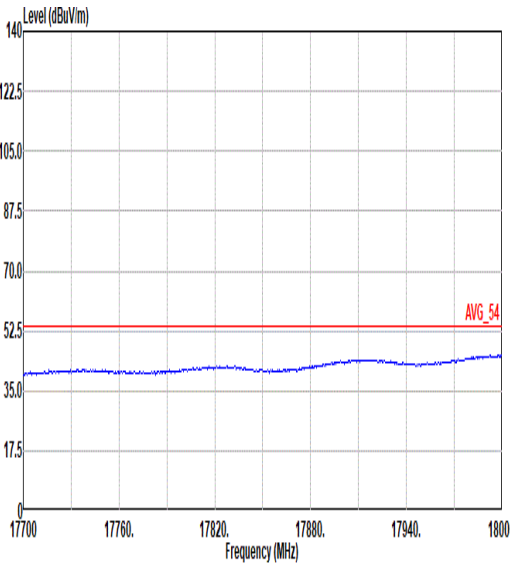
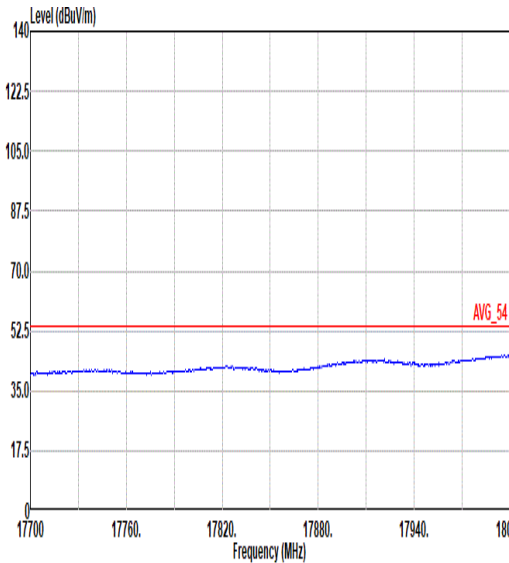


Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

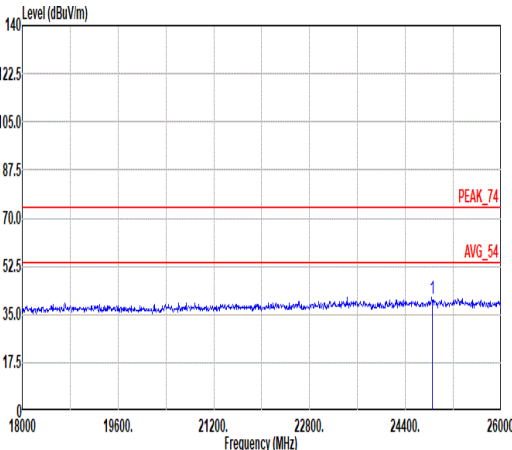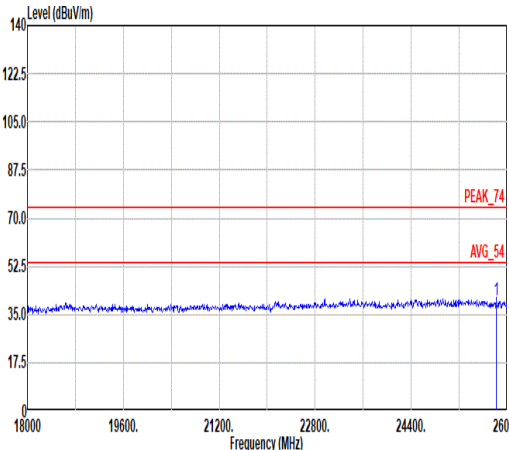

Mode	7																																																																																									
	SHF																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Vertical																																																																																			
Peak																																																																																										
	Site : 03CH16-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 24850.61</td><td>40.71</td><td>74.00</td><td>-33.29</td><td>57.19</td><td>39.30</td><td>7.12</td><td>53.36</td><td>-9.54</td><td>-- -- PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 24850.61	40.71	74.00	-33.29	57.19	39.30	7.12	53.36	-9.54	-- -- PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 25815.42</td><td>39.93</td><td>74.00</td><td>-34.07</td><td>56.73</td><td>38.94</td><td>7.10</td><td>53.30</td><td>-9.54</td><td>-- -- PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 25815.42	39.93	74.00	-34.07	56.73	38.94	7.10	53.30	-9.54
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 24850.61	40.71	74.00	-33.29	57.19	39.30	7.12	53.36	-9.54	-- -- PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 25815.42	39.93	74.00	-34.07	56.73	38.94	7.10	53.30	-9.54	-- -- PEAK																																																																																	

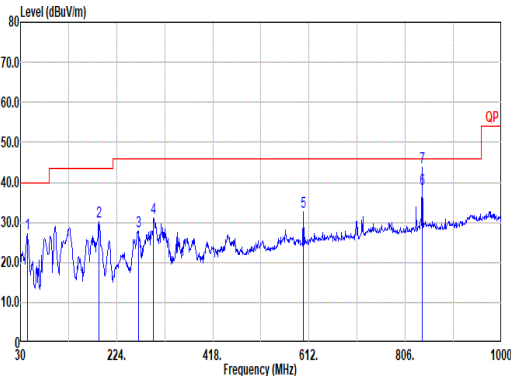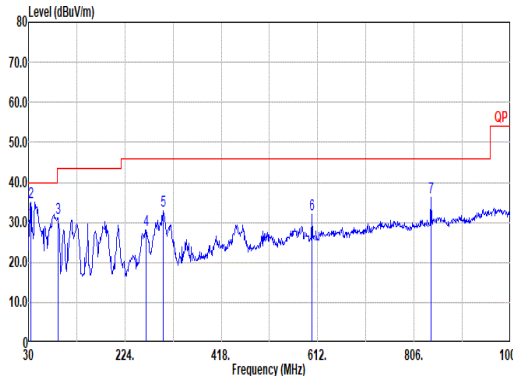

Mode	8																																																																																																																																																																																																																																																													
	LF																																																																																																																																																																																																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																																																																																																																																													
ANT	1																																																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																												
QP/ Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D080002N1D01N-06_47020 & 06 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>43.58</td><td>27.27</td><td>40.00</td><td>-12.73</td><td>41.33</td><td>17.52</td><td>0.89</td><td>32.47</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>188.11</td><td>30.25</td><td>43.50</td><td>-13.25</td><td>45.81</td><td>14.91</td><td>1.89</td><td>32.36</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>268.62</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>38.00</td><td>19.19</td><td>2.34</td><td>32.42</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>298.69</td><td>31.09</td><td>46.00</td><td>-14.91</td><td>41.79</td><td>19.21</td><td>2.50</td><td>32.41</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>600.36</td><td>32.61</td><td>46.00</td><td>-13.39</td><td>36.26</td><td>25.58</td><td>3.57</td><td>32.80</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>840.92</td><td>38.27</td><td>46.00</td><td>-7.73</td><td>37.45</td><td>28.85</td><td>4.24</td><td>32.27</td><td>0.00</td><td>100</td><td>119</td><td>QP</td><td></td></tr><tr><td>7</td><td>840.92</td><td>43.79</td><td>46.00</td><td>-2.21</td><td>42.97</td><td>28.85</td><td>4.24</td><td>32.27</td><td>0.00</td><td>100</td><td>119</td><td>Peak</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	43.58	27.27	40.00	-12.73	41.33	17.52	0.89	32.47	0.00	--	--	--	Peak	2	188.11	30.25	43.50	-13.25	45.81	14.91	1.89	32.36	0.00	--	--	--	Peak	3	268.62	27.91	46.00	-18.09	38.00	19.19	2.34	32.42	0.00	--	--	--	Peak	4	298.69	31.09	46.00	-14.91	41.79	19.21	2.50	32.41	0.00	--	--	--	Peak	5	600.36	32.61	46.00	-13.39	36.26	25.58	3.57	32.80	0.00	--	--	--	Peak	6	840.92	38.27	46.00	-7.73	37.45	28.85	4.24	32.27	0.00	100	119	QP		7	840.92	43.79	46.00	-2.21	42.97	28.85	4.24	32.27	0.00	100	119	Peak		 Site : 03CH16-HY Condition: QP 3m CBL6111D080002N1D01N-06_47020 & 06 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>34.85</td><td>30.07</td><td>40.00</td><td>-9.93</td><td>39.51</td><td>22.24</td><td>0.78</td><td>32.46</td><td>0.00</td><td>100</td><td>101</td><td>QP</td><td></td></tr><tr><td>2</td><td>34.85</td><td>35.05</td><td>40.00</td><td>-4.95</td><td>44.49</td><td>22.24</td><td>0.78</td><td>32.46</td><td>0.00</td><td>100</td><td>101</td><td>Peak</td><td></td></tr><tr><td>3</td><td>89.17</td><td>31.19</td><td>43.50</td><td>-12.31</td><td>47.65</td><td>14.66</td><td>1.28</td><td>32.40</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>266.68</td><td>28.11</td><td>46.00</td><td>-17.89</td><td>38.70</td><td>19.50</td><td>2.33</td><td>32.42</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>300.63</td><td>33.00</td><td>46.00</td><td>-13.00</td><td>43.68</td><td>19.22</td><td>2.51</td><td>32.41</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>600.36</td><td>31.89</td><td>46.00</td><td>-14.11</td><td>35.54</td><td>25.58</td><td>3.57</td><td>32.80</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>839.95</td><td>36.10</td><td>46.00</td><td>-9.90</td><td>35.31</td><td>28.83</td><td>4.24</td><td>32.28</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	34.85	30.07	40.00	-9.93	39.51	22.24	0.78	32.46	0.00	100	101	QP		2	34.85	35.05	40.00	-4.95	44.49	22.24	0.78	32.46	0.00	100	101	Peak		3	89.17	31.19	43.50	-12.31	47.65	14.66	1.28	32.40	0.00	--	--	--	Peak	4	266.68	28.11	46.00	-17.89	38.70	19.50	2.33	32.42	0.00	--	--	--	Peak	5	300.63	33.00	46.00	-13.00	43.68	19.22	2.51	32.41	0.00	--	--	--	Peak	6	600.36	31.89	46.00	-14.11	35.54	25.58	3.57	32.80	0.00	--	--	--	Peak	7	839.95	36.10	46.00	-9.90	35.31	28.83	4.24	32.28	0.00	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																	
1	43.58	27.27	40.00	-12.73	41.33	17.52	0.89	32.47	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
2	188.11	30.25	43.50	-13.25	45.81	14.91	1.89	32.36	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
3	268.62	27.91	46.00	-18.09	38.00	19.19	2.34	32.42	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
4	298.69	31.09	46.00	-14.91	41.79	19.21	2.50	32.41	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
5	600.36	32.61	46.00	-13.39	36.26	25.58	3.57	32.80	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
6	840.92	38.27	46.00	-7.73	37.45	28.85	4.24	32.27	0.00	100	119	QP																																																																																																																																																																																																																																																		
7	840.92	43.79	46.00	-2.21	42.97	28.85	4.24	32.27	0.00	100	119	Peak																																																																																																																																																																																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																		
1	34.85	30.07	40.00	-9.93	39.51	22.24	0.78	32.46	0.00	100	101	QP																																																																																																																																																																																																																																																		
2	34.85	35.05	40.00	-4.95	44.49	22.24	0.78	32.46	0.00	100	101	Peak																																																																																																																																																																																																																																																		
3	89.17	31.19	43.50	-12.31	47.65	14.66	1.28	32.40	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
4	266.68	28.11	46.00	-17.89	38.70	19.50	2.33	32.42	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
5	300.63	33.00	46.00	-13.00	43.68	19.22	2.51	32.41	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
6	600.36	31.89	46.00	-14.11	35.54	25.58	3.57	32.80	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	
7	839.95	36.10	46.00	-9.90	35.31	28.83	4.24	32.28	0.00	--	--	--	Peak																																																																																																																																																																																																																																																	



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 1Mbps	100.00	-	-	10Hz
Bluetooth –LE for 2Mbps	100.00	-	-	10Hz

