

FCC ID PER PART 15.227

EMI MEASUREMENT AND TEST REPORT

For

Dynapoint (Dong Guan) Electronics Co. Ltd

Hua Guo Shan Industry Park, Jie Kou, Chang An, Dong Guan
Guan Dong, China

FCC ID: P4XKB778

January 20, 2003

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Cordless Mouse, ITE
Test Engineer: <u>Benjamin Jing</u>	
Report No.: <u>R0301102</u>	
Test Date: <u>January 14, 2003</u>	
Reviewed By: <u>Hans Mellberg</u>	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is specially limited to the above client company and product model only.
It may not be duplicated without prior written consent of Bay Area Compliance
Laboratory Corporation. This report **must not** be used by the client to claim product
endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 OBJECTIVE	3
1.3 RELATED SUBMITTAL(S)/GRANT(S)	3
1.4 TEST METHODOLOGY.....	3
1.5 TEST FACILITY	3
1.6 TEST EQUIPMENT LIST	4
1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	4
1.8 EXTERNAL I/O CABLES LIST AND DETAILS.....	4
2 - SYSTEM TEST CONFIGURATION	5
2.1 JUSTIFICATION.....	5
2.2 SCHEMATICS AND BLOCK DIAGRAM.....	5
2.3 EQUIPMENT MODIFICATIONS.....	5
2.4 TEST SETUP CONFIGURATION.....	5
3 - SUMMARY OF TEST RESULTS	6
4 - RADIATED EMISSIONS TEST	7
4.1 MEASUREMENT UNCERTAINTY	7
4.2 EUT SETUP	7
4.3 SPECTRUM ANALYZER SETUP.....	7
4.4 TEST PROCEDURE	7
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	8
4.6 SUMMARY OF TEST RESULTS.....	8
4.7 RADIATED EMISSIONS TEST RESULT DATA.....	8

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *Dynapoint (Dong Guan) Electronics Co. Ltd.* 's product, model *KB778* or the "EUT" as referred to in this report is a wireless mouse. EUT measures approximately 4.8" L x 2.2" W x 1.5" H .

1.2 Objective

This Type approval report is prepared on behalf of *Dynapoint (Dong Guan) Electronics Co. Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules, sec 15.209 and sec 15.227.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	12/6/03
HP	Spectrum Analyzer	8593B	2919A00242	12/20/03
HP	Amplifier	8349B	2644A02662	12/20/03
HP	Quasi-Peak Adapter	85650A	917059	12/6/03
HP	Amplifier	8447E	1937A01046	12/6/03
A.H. System	Horn Antenna	SAS0200/571	261	12/27/03
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/03
Com-Power	Biconical Antenna	AB-100	14012	11/2/03
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/03
Com-Power	LISN	LI-200	12208	12/20/03
Com-Power	LISN	LI-200	12005	12/20/03
BACL	Data Entry Software	DES1	0001	12/20/03

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)

1.7 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Microsoft	KB	Elite	E06401COMB	DOC
Compaq	PC System	CM 7360	2H04DCT6225	DOC
Qptquest	Monitor	VS-4D	1281150371	DOC
HP	Printer	2225C	NA	DOC
EVEREX	Modem	EV-945	None	E3E5UVEV-945

1.8 External I/O Cables List and Details

Description	Length (M)	From	To
Shielded KB Cable	1.6	KB Port/Host	Keyboard
Shielded Serial Cable	1.5	Serial Port/Host	Modem
Shielded Printer Cable	2.0	Parallel Port/Host	Printer
Shielded Video Cable	1.5	VGA Port/Host	Monitor

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing in a typical fashion (as normally used in a typical application).


2.2 Schematics and Block Diagram

Please refer to Appendix D.

2.3 Equipment Modifications

No modifications were necessary for the EUT to comply with the applicable limits and standards.

2.4 Test Setup Configuration

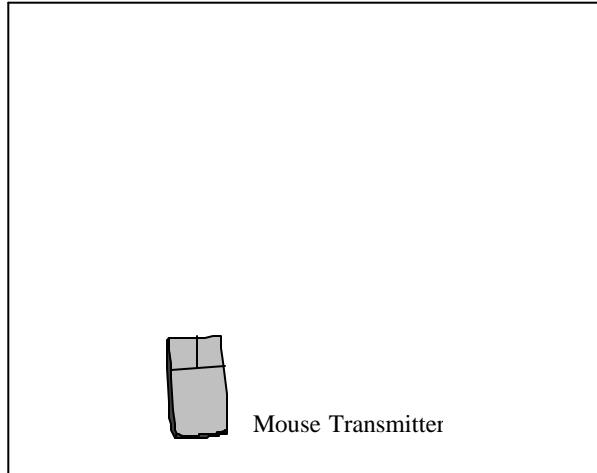

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna requirement	Compliant
§ 15.205	Restricted Band	Compliant
§ 15.209 § 15.227	Radiated emission limit	Compliant

4 - RADIATED EMISSIONS TEST

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

4.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-2000. The specification used was the FCC Part 15 Subpart C limits.

The spacing between the peripherals was 10 cm.

External I/O cables are draped over edge of test table or bundled when necessary.

The host PC was connected to a 120Vac/60Hz power source.

4.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33, the EUT was tested to 1000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency27 MHz
Stop Frequency1000 MHz
Sweep Speed.....	.Auto
IF Bandwidth.....	.100 kHz
Video Bandwidth.....	.1 MHz
Quasi-Peak Adapter Bandwidth.....	.120 kHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth.....	.1MHz

4.4 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -4 dB μ V of specification limitation), and are distinguished with a "QP" in the data table.

The EUT was operating in continuous transmission mode to represent worst case during final qualification test. Therefore, this configuration was used for final test data recorded in the table(s) listed under section 4.7 of this report.

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

4.6 Summary of Test Results

According to the final data in section 5.6, the EUT complied with the FCC 15.227 and FCC 15.209 standards, and had the worst margin of:

-11.1 dB at 36.20 MHz in the **Horizontal** polarization, 27-1000MHz, 3 meters

4.7 Radiated Emissions Test Result Data

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC SUBPART C	
Frequency MHz	Ampl. dB μ V/m		Angle Degree	Height Meter	Polar H/ V	Antenna dB μ V/m	Cable dB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
36.20	37.8	210	1.2	H	15.8	0.3	25.0	28.9	40	-11.1
43.06	40.3	0	1.0	H	12.1	0.7	25.0	28.1	40	-11.9
74.10	41.5	30	1.0	V	9.6	1.6	25.0	27.7	40	-12.3
54.08	40.1	340	1.0	H	10.5	1.0	25.0	26.6	40	-13.4
54.08	32.6	45	1.2	V	10.5	1.0	25.0	19.1	40	-20.9
* 27.04	59.8	0	1.0	H	15.8	0.3	25.0	50.9	80	-29.1
* 27.04	52.7	15	1.0	V	15.8	0.3	25.0	43.8	80	-36.2

* Fundamental Frequency

The mouse transmitter was placed in continuous transmit mode for all tests.