



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n

Report No.: S20240620077202E01

Issue Date: 08-23-2024

Applicant: Shanghai MXCHIP Information Technology Co., Ltd
Address: Floor 9, Building B, Lane 2145, JinshaJiang Road, Putuo District, Shanghai
FCC ID: P53-EMC3183
Product: 2.4GHz Wi-Fi/BLE Module
Model No.: EMC3183-E
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Result: Pass
Receipt date: Jun. 26 2024
Test Date: Jul. 01~ Jul. 22, 2024

Compiled By

Chuang Li
(Chuang Li)
Senior Test Engineer

Approved By

Line Chen
(Line Chen)
Engineer Manager



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of Fangguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

Revision History

Report No.	Version	Description	Issue Date
S20240620077202E01	Rev. 01	/	08-23-2024

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. Fangguang Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Report	7
2.3. Operation Frequency / Channel List	7
2.4. Description of Available Antennas	8
2.5. Device Capabilities	9
2.6. Description of Test Software	15
2.7. Test Mode	15
2.8. Test Configuration	15
2.9. EMI Suppression Device(s)/Modifications	15
2.10. Labeling Requirements	15
3. DESCRIPTION OF TEST	16
3.1. Evaluation Procedure	16
3.2. AC Line Conducted Emissions	16
3.3. Radiated Emissions	17
4. ANTENNA REQUIREMENTS	18
5. TEST EQUIPMENT CALIBRATION DATE	19
6. MEASUREMENT UNCERTAINTY	20
7. TEST RESULT	21
7.1. Summary	21
7.2. 6dB Bandwidth Measurement	23
7.2.1. Test Limit	23
7.2.2. Test Procedure used	23
7.2.3. Test Setting	23
7.2.4. Test Setup	23
7.2.5. Test Result	24
7.3. Output Power Measurement	35
7.3.1. Test Limit	35

7.3.2.	Test Procedure Used	35
7.3.3.	Test Setting	35
7.3.4.	Test Setup	36
7.3.5.	Test Result	37
7.4.	Power Spectral Density Measurement	44
7.4.1.	Test Limit	44
7.4.2.	Test Procedure Used	44
7.4.3.	Test Setting	44
7.4.4.	Test Setup	45
7.4.5.	Test Result	46
7.5.	Conducted Band Edge and Out-of-Band Emissions	52
7.5.1.	Test Limit	52
7.5.2.	Test Procedure Used	52
7.5.3.	Test Setting	52
7.5.4.	Test Setup	52
7.5.5.	Test Result	53
7.6.	Radiated Spurious Emission Measurement	71
7.6.1.	Test Limit	71
7.6.2.	Test Procedure Used	71
7.6.3.	Test Setting	71
7.6.4.	Test Setup	73
7.6.5.	Test Result	75
7.7.	Restricted Band Edge Measurement	84
7.7.1.	Test Limit	84
7.7.2.	Test Procedure Used	85
7.7.3.	Test Setting	85
7.7.4.	Test Setup	86
7.7.5.	Test Result	87
7.8.	AC Conducted Emissions Measurement	111
7.8.1.	Test Limit	111
7.8.2.	Test Setup	111
7.8.3.	Test Result	112
8.	CONCLUSION	113

§2.1033 General Information

Applicant:	Shanghai MXCHIP Information Technology Co., Ltd
Applicant Address:	Floor 9, Building B, Lane 2145, JinshaJiang Road, Putuo District, Shanghai
Manufacturer:	Shanghai MXCHIP Information Technology Co., Ltd
Manufacturer Address:	Floor 9, Building B, Lane 2145, JinshaJiang Road, Putuo District, Shanghai
Factory:	Chengdu Xuguang Technology Co., Ltd
Factory Address:	No. 86, Section 2, Gongyuan Road, Longquanyi, Chengdu, Sichuan
Test Site:	Fangguang Inspection & Testing Co., Ltd.
LAB ID:	CN5037
Test Site Address:	G9 Building, China Sensor Network International Innovation Park No.200, Linghu Avenue Wuxi, Jiangsu 214000 China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	P53-EMC3183
Test Device Serial No.:	S/N:/ <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fangguang Test Location

These measurement tests were performed at the Fangguang Inspection and testing Co.,LTD located at 200 Linghu Avenue, Xinwu District, Wuxi City. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	2.4GHz Wi-Fi/BLE Module
Model Name:	EMC3183-E
Trade Mark:	MXCHIP
Input Voltage Range:	DC 3.3V
Wi-Fi Specification:	802.11b/g/n20
Software Version:	A258
Hardware Version:	1.0

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n20: 2412 ~ 2462MHz
Channel Number:	802.11b/g/n20: 11
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS0~MCS7
Antenna Type:	Copper tube antenna
Antenna Gain:	2dBi

2.3. Operation Frequency / Channel List

802.11b/g/n20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

2.4. Description of Available Antennas

Antenna	Frequency Band (MHz)	Product Number	Tx Paths	Antenna
Copper tube antenna	2400 ~ 2500	/	1	Ant 1

Antenna	Frequency Band (MHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)	Beam Forming Directional Gain (dBi)	CDD Directional Gain (dBi)
			Ant 1		
Copper tube antenna	2400 ~ 2500	1	2	NA	NA

Note:

Unequal Antenna gains, with equal transmit powers. For Antenna gains given by G_1, G_2, \dots, G_N dBi transmit signals are correlated, then

Directional gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

2.5. Device Capabilities

This device contains the following capabilities:


2.4GHz WLAN (DTS)

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles:

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	12.42	12.56	98.89
		2437	12.41	12.54	98.96
		2462	7.00	7.00	100.00
11G	Ant1	2412	2.06	2.19	94.06
		2437	2.07	2.20	94.09
		2462	2.06	2.19	94.06
11N20SISO	Ant1	2412	1.93	2.06	93.69
		2437	1.92	2.05	93.66
		2462	1.92	2.05	93.66

Test Graphs




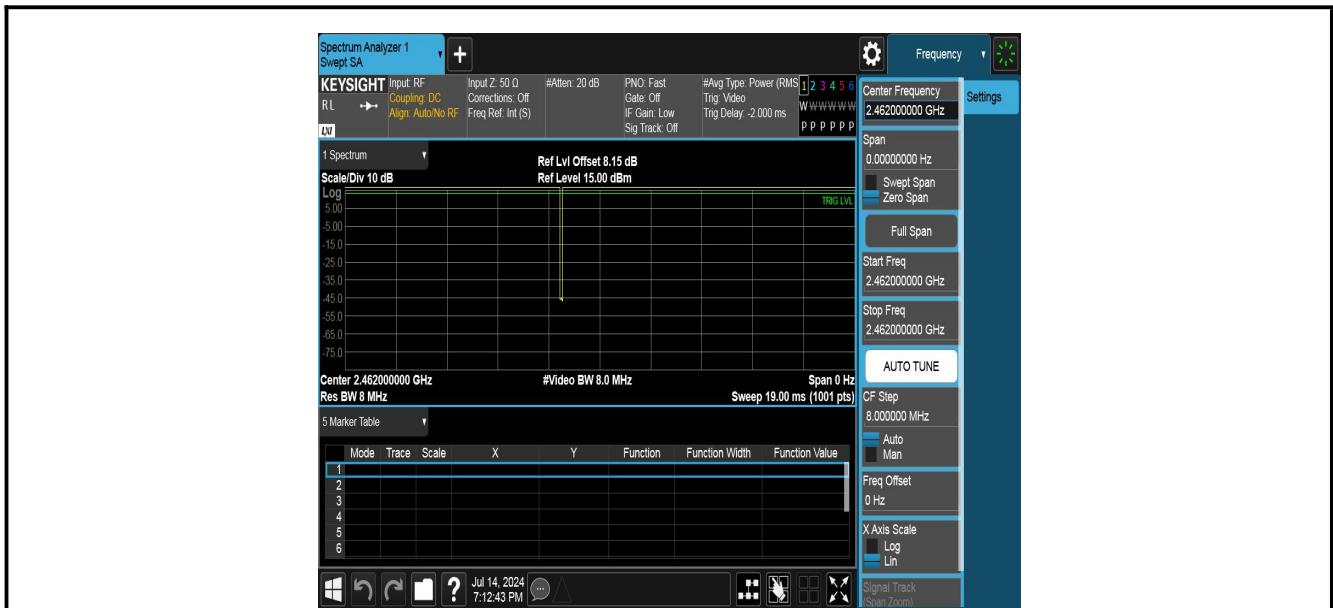


11G_Ant1_2412




11G_Ant1_2437

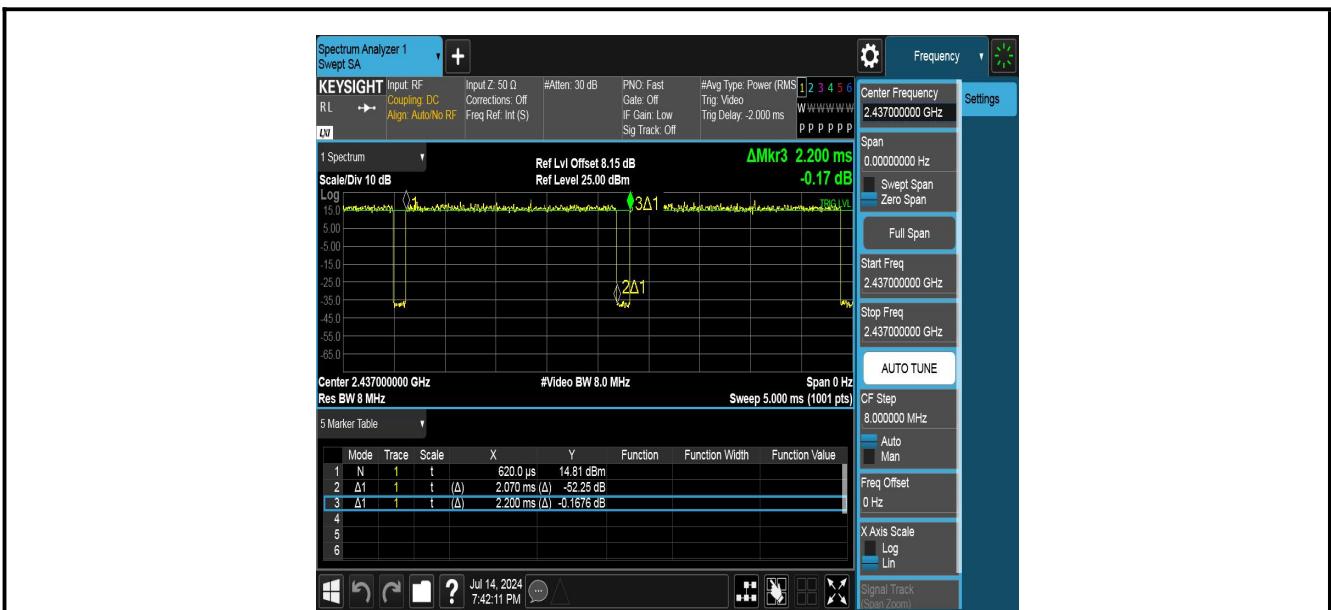

11G_Ant1_2462

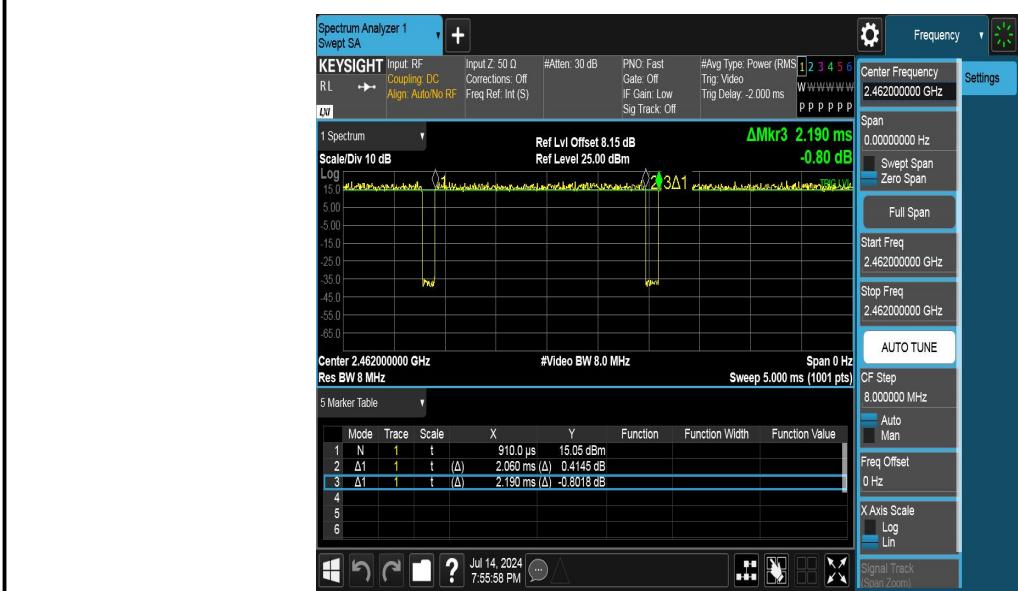


11N20SISO_Ant1_2412

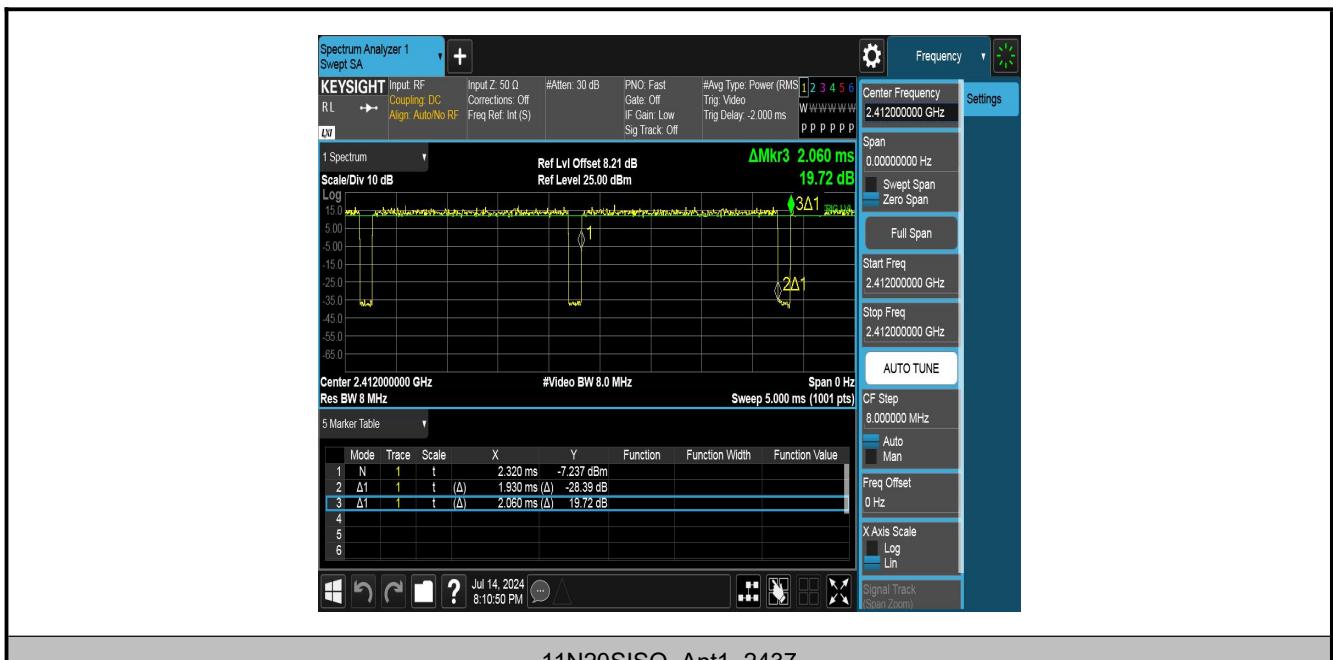

11N20SISO_Ant1_2437



11N20SISO_Ant1_2462

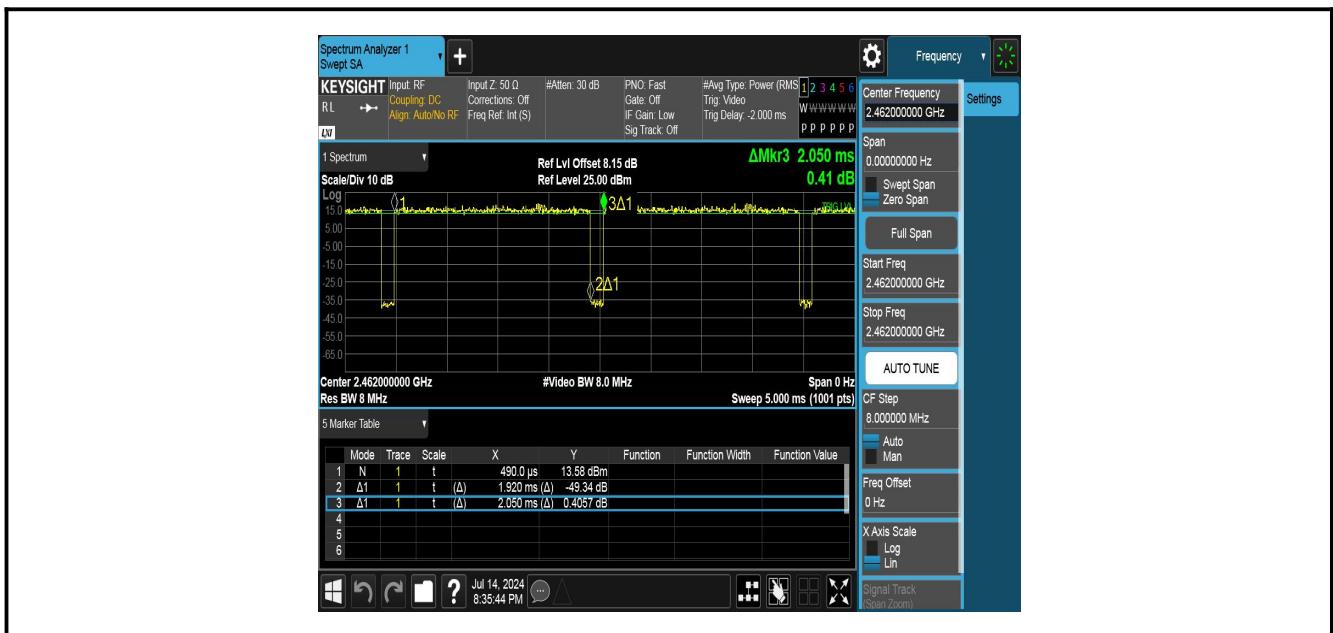

2.6. Description of Test Software

The test utility software used during testing was “UI_mptool.exe”, Power Parameter Value:

Test Mode	Channel	ANT1
B	2412	84
	2437	83
	2462	83
G	2412	95
	2437	95
	2462	95
N20	2412	87
	2437	93
	2462	91

2.7. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n20

2.8. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure..........**None**

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- Use a unique coupling to the intentional radiator.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	FWXGJC-2016-181	1 year	2025/03/07
Two-Line V-Network	R&S	ENV 216	FWXGJC-2016-182	1 year	2025/04/28
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2025/02/25

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	3 year	2025/07/07
Bi-Log Antenna	R&S	HL562E	FWXGJC-2016-267-06	1 year	2025/03/02
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2025/03/01
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	3 year	2025/05/31
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2024/11/05
Pre-Amplifier	R&S	SCU-18D	FWXGJC-2016-267-05	1 year	2024/11/05
Pre-Amplifier	R&S	EMC184055 SE	FWXGJC-2018-018	3 year	2025/04/13
Hygrothermograph	Mittel	HTC-1	FWXDA-2016-386	1 year	2024/11/03
Anechoic Chamber	Aimuke	EMCCT-3	FWXGJC-2016-270	3 year	2025/06/07

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2025/03/02
RF Control Unit	Toncend	JS0806-2	FWXGJC-2018-013	1 year	2025/05/19
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2025/02/25

Test Software	Manufacturer	Version	Asset No.	Function
EMI Test Software	Tonscend	V2.5.2.4	FWXWA-2018-004	Emission Test
RF Test Software	Tonscend	3.3.10	/	/

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.05dB
Radiated Emission Measurement (below 1GHz)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.06dB
Radiated Emission Measurement (above 1GHz)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.13dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 30MHz-1GHz: 1.00 dB 1GHz-12.75GHz: 1.30 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.60dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.80dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.20MHz

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.203	Antenna Requirement	/	Conducted	Pass	Section 4
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge	$\geq 20\text{dBc}$		Pass	Section 7.5
15.247(d)	Out-of-Band Emissions	$\geq 20\text{dBc}$		Pass	Section 7.5
15.205	Restricted Bands	Emissions in restricted bands must meet the radiated limits detailed in 15.205	Radiated	Pass	Section 7.7
15.209	General Field Strength Limits (Radiated Emission Limits)	Radiated Emission must meet the radiated limits detailed in 15.209 (RSS GEN [8.9])		Pass	Section 7.6
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	AC Line Conducted	N/A	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

7.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

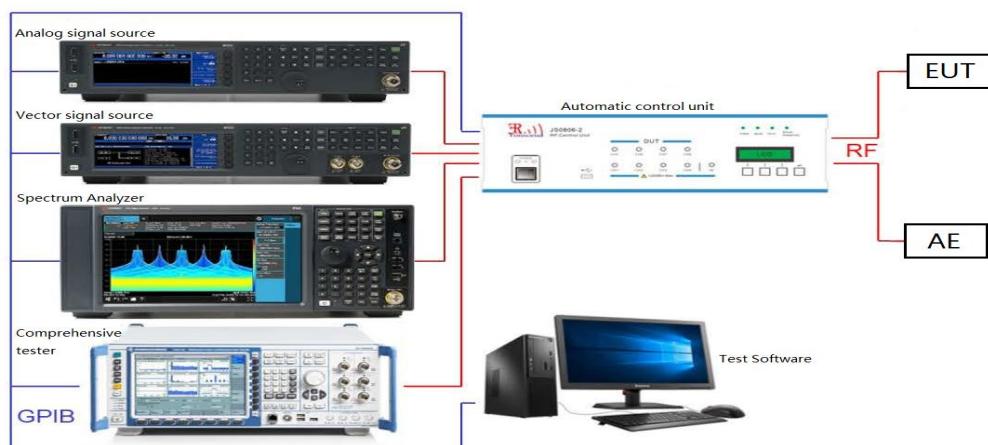


7.2.5. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	99%BW	Verdict
11B	Ant1	2412	9.000	2407.440	2416.440	0.5	14.127	PASS
		2437	9.520	2432.440	2441.960	0.5	14.179	PASS
		2462	9.040	2457.440	2466.480	0.5	14.121	PASS
11G	Ant1	2412	16.320	2403.800	2420.120	0.5	17.292	PASS
		2437	16.320	2428.800	2445.120	0.5	17.246	PASS
		2462	16.320	2453.800	2470.120	0.5	17.420	PASS
11N20SISO	Ant1	2412	17.160	2403.360	2420.520	0.5	18.555	PASS
		2437	17.280	2428.440	2445.720	0.5	18.373	PASS
		2462	17.040	2453.440	2470.480	0.5	18.414	PASS

Test Graphs of 6dB Bandwidth




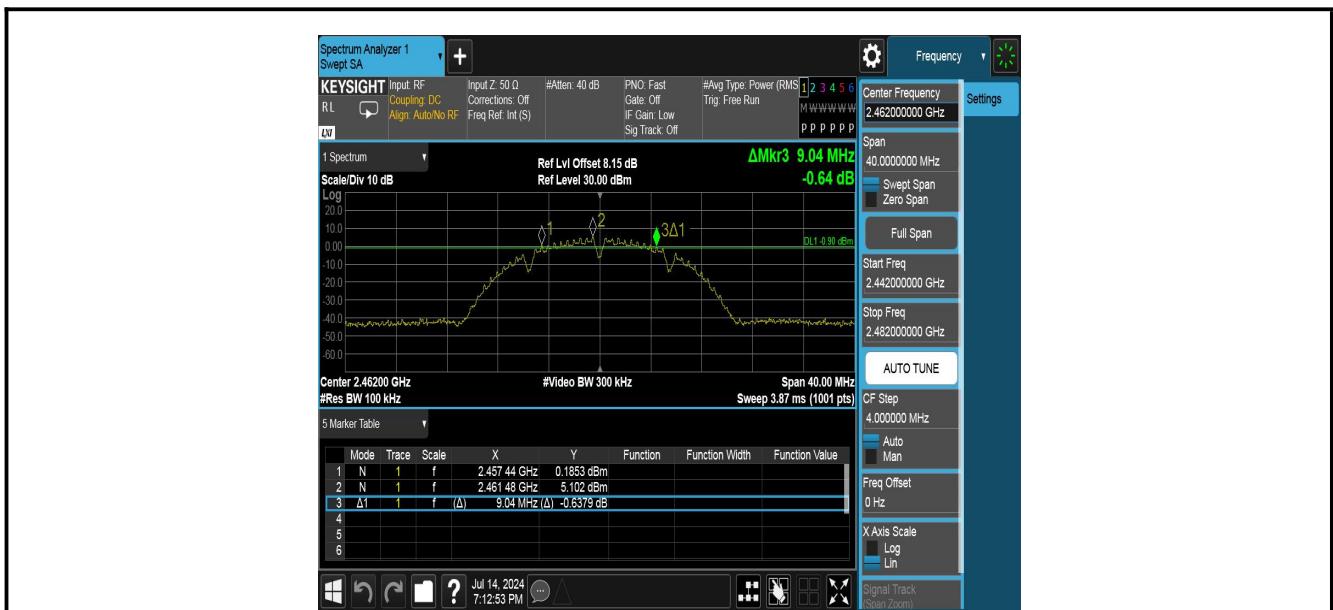

11G_Ant1_2412



11G_Ant1_2437

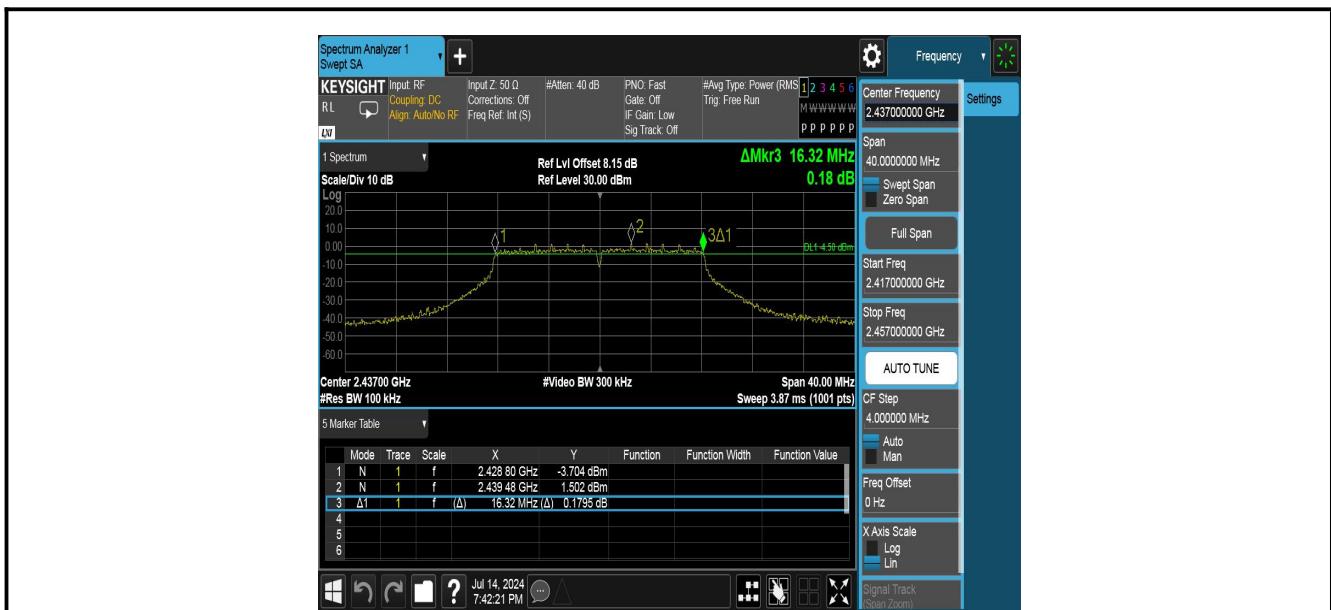

11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



Test Graphs of Occupied Channel Bandwidth

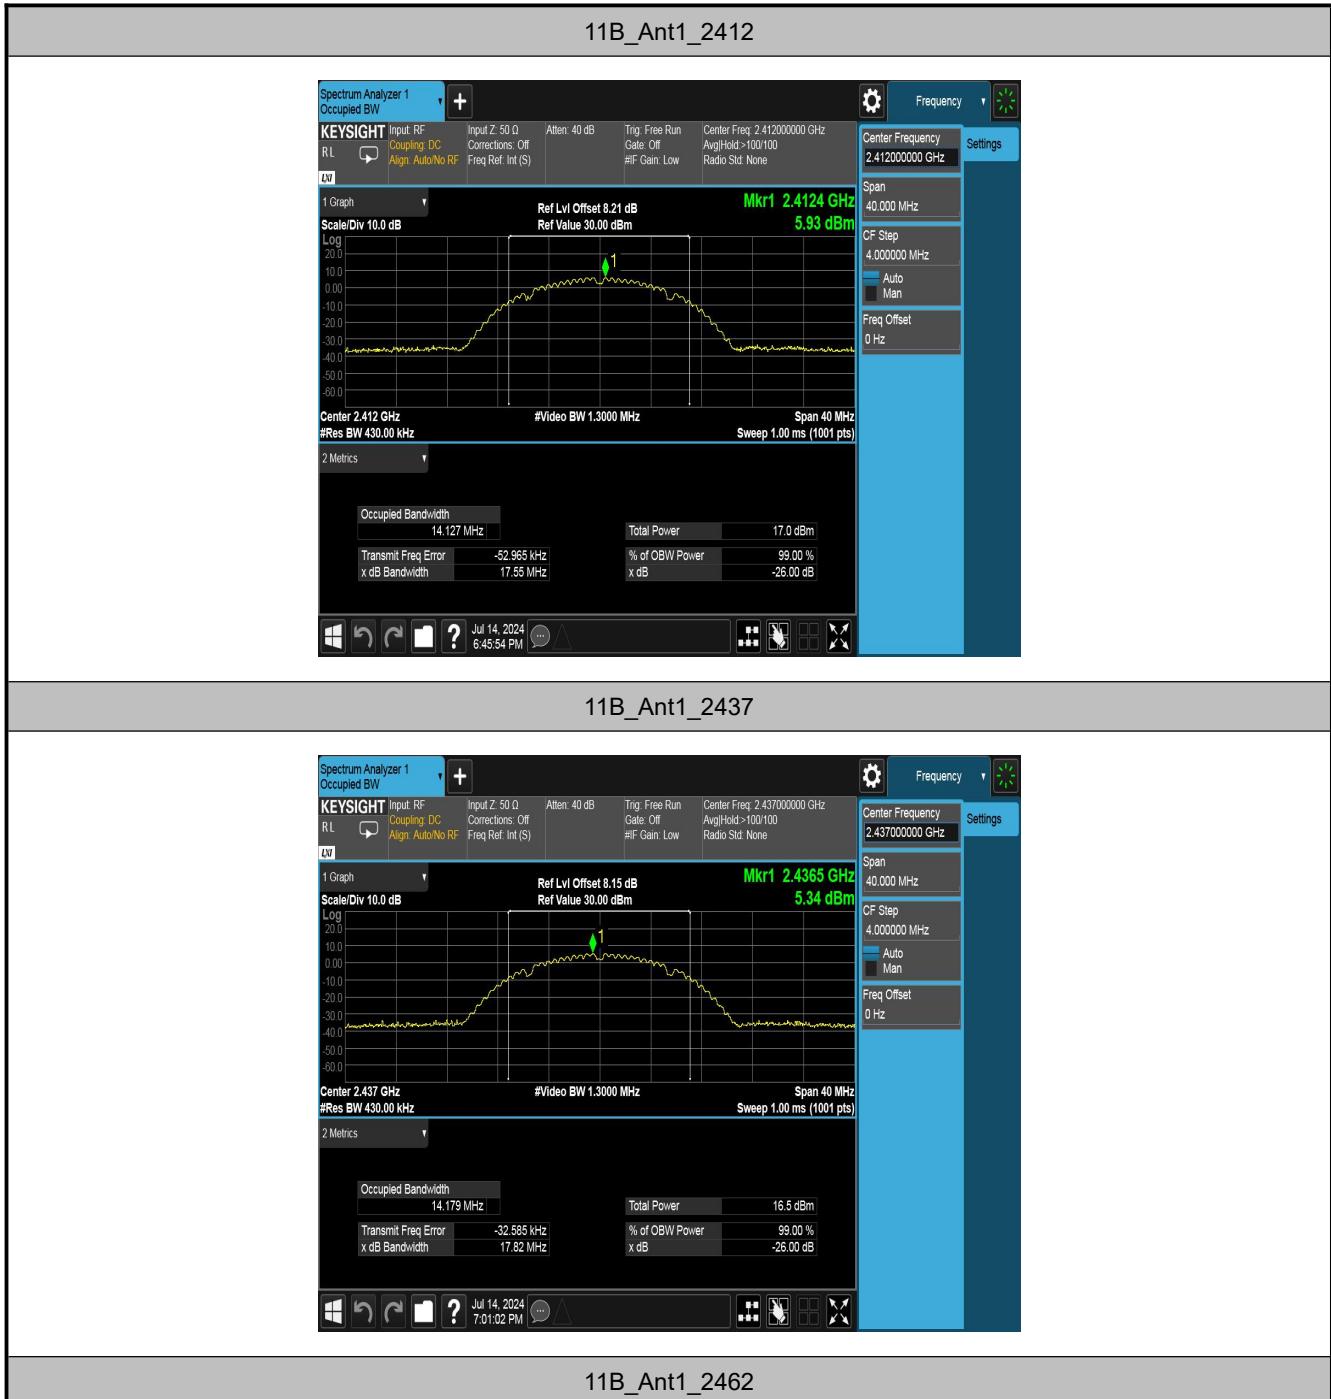





11G_Ant1_2412



11G_Ant1_2437

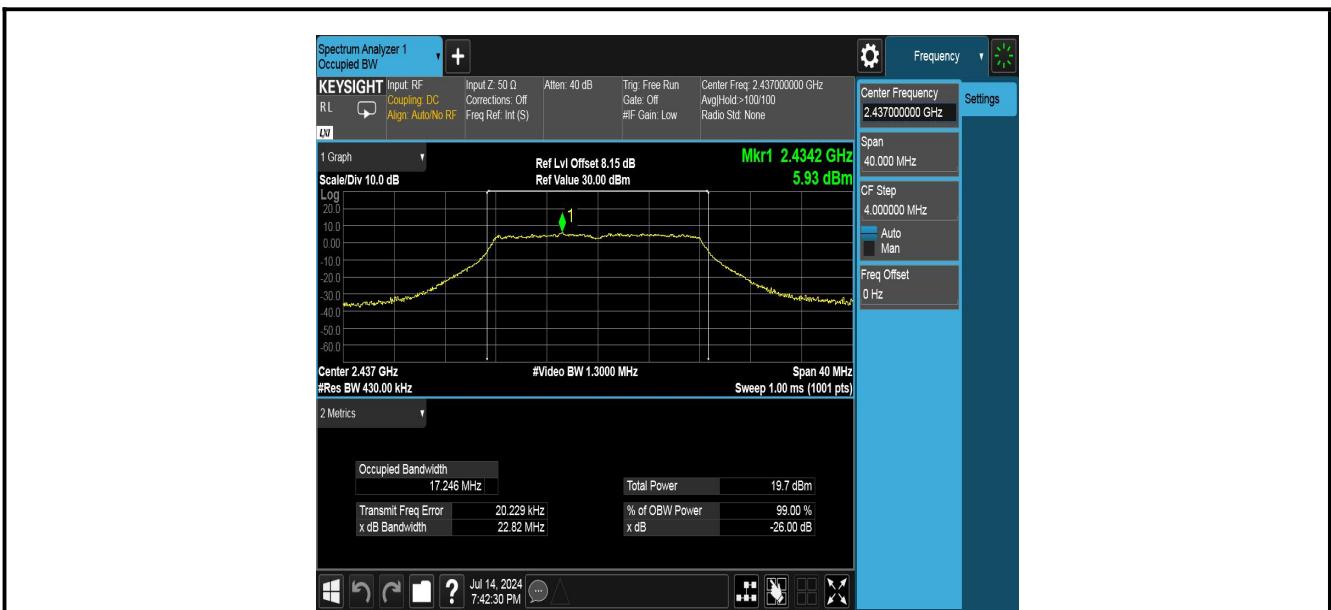


11G_Ant1_2462

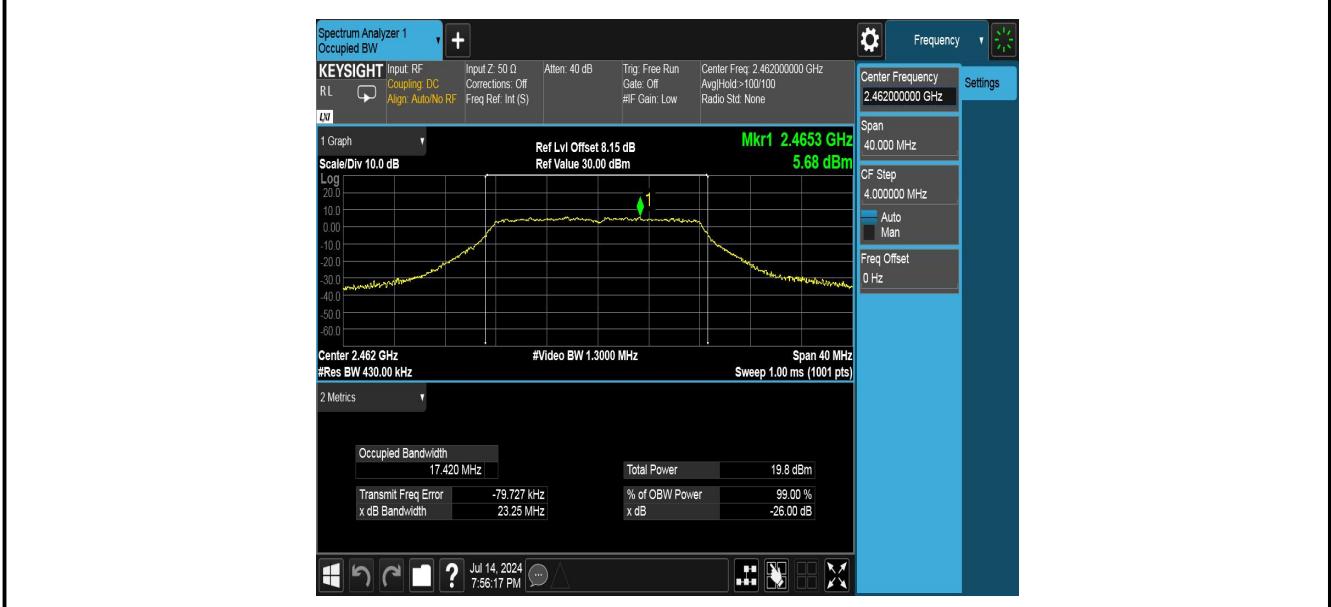

11N20SISO_Ant1_2412



11N20SISO_Ant1_2437

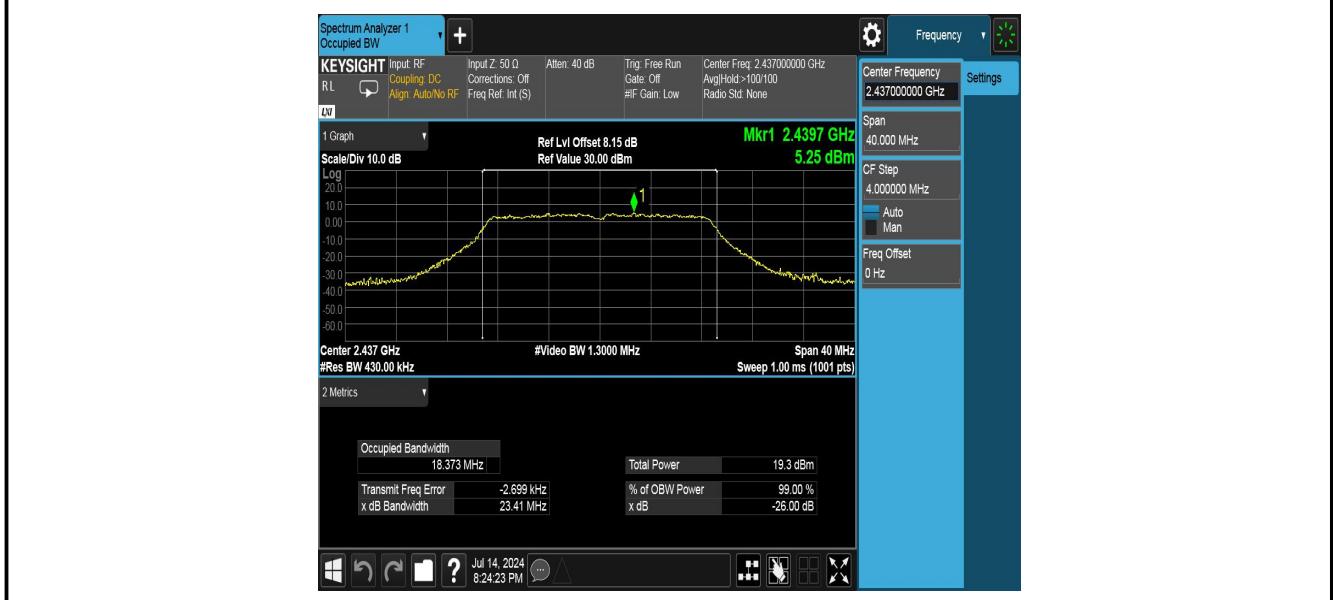

11N20SISO_Ant1_2462



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum conducted output power is 1 Watt. And for antenna gain greater than 6dBi the limit shall reduce by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used

ANSI C63.10-2013 – Section 11.9.2.2.4


KDB 558074 D01 v05r02 – Section 8.3.2.2

7.3.3. Test Setting

1. Set span to at least 1.5 times the OBW..
2. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq [3 \times \text{RBW}]$.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum. $10\text{Add} [10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both

the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

7.3.4. Test Setup

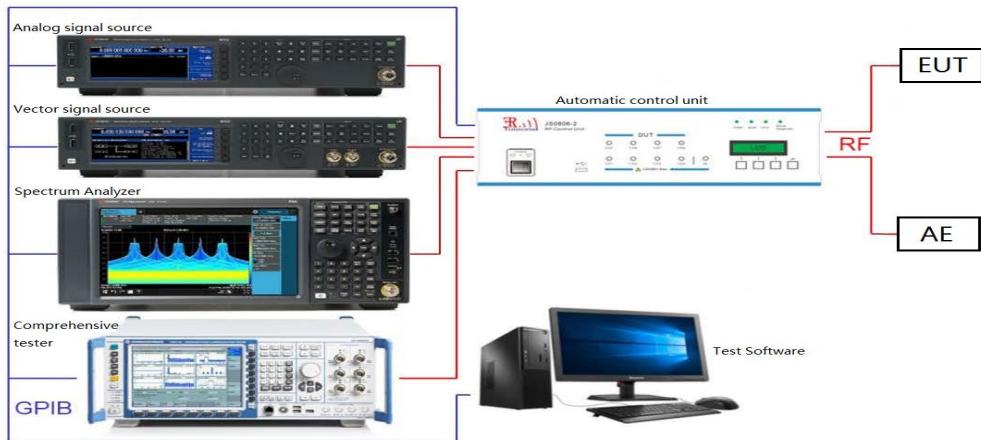

7.3.5. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (yellow marker) for final test of each channel.

N _{TX}	Data Rate (Mbps)	
	802.11b	802.11g
1	1	6
1	2	9
1	5.5	12
1	11	18
1	--	24
1	--	36
1	--	48
1	--	54

N _{Tx}	MCS Index for 802.11n	Data Rate (Mbps)			
		20MHz Bandwidth		40MHz Bandwidth	
		800ns GI	400ns GI	800ns GI	400ns GI
1	0	6.5	7.2	13.5	15.0
1	1	13.0	14.4	27.0	30.0
1	2	19.5	21.7	40.5	45.0
1	3	26.0	28.9	54.0	60.0
1	4	39.0	43.3	81.0	90.0
1	5	52.0	57.8	108.0	120.0
1	6	58.5	65.0	121.5	135.0
1	7	65.0	72.2	135.0	150.0


Note: Power output test was verified over all data rates of each mode shown as above, and then choose the maximum power output (yellow marker) for final test of each channel.

Test Result of Maximum conducted output power

Test Mode	Antenna	Frequency[MHz]	Average power [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.79	13.84	≤30.00	PASS
		2437	13.40	13.45	≤30.00	PASS
		2462	13.49	13.49	≤30.00	PASS
11G	Ant1	2412	12.14	12.41	≤30.00	PASS
		2437	12.47	12.73	≤30.00	PASS
		2462	12.53	12.80	≤30.00	PASS
11N20SISO	Ant1	2412	10.32	10.60	≤30.00	PASS
		2437	11.95	12.23	≤30.00	PASS
		2462	11.58	11.86	≤30.00	PASS


The Duty Cycle Factor is compensated in the Offset of graph.

Test Graphs

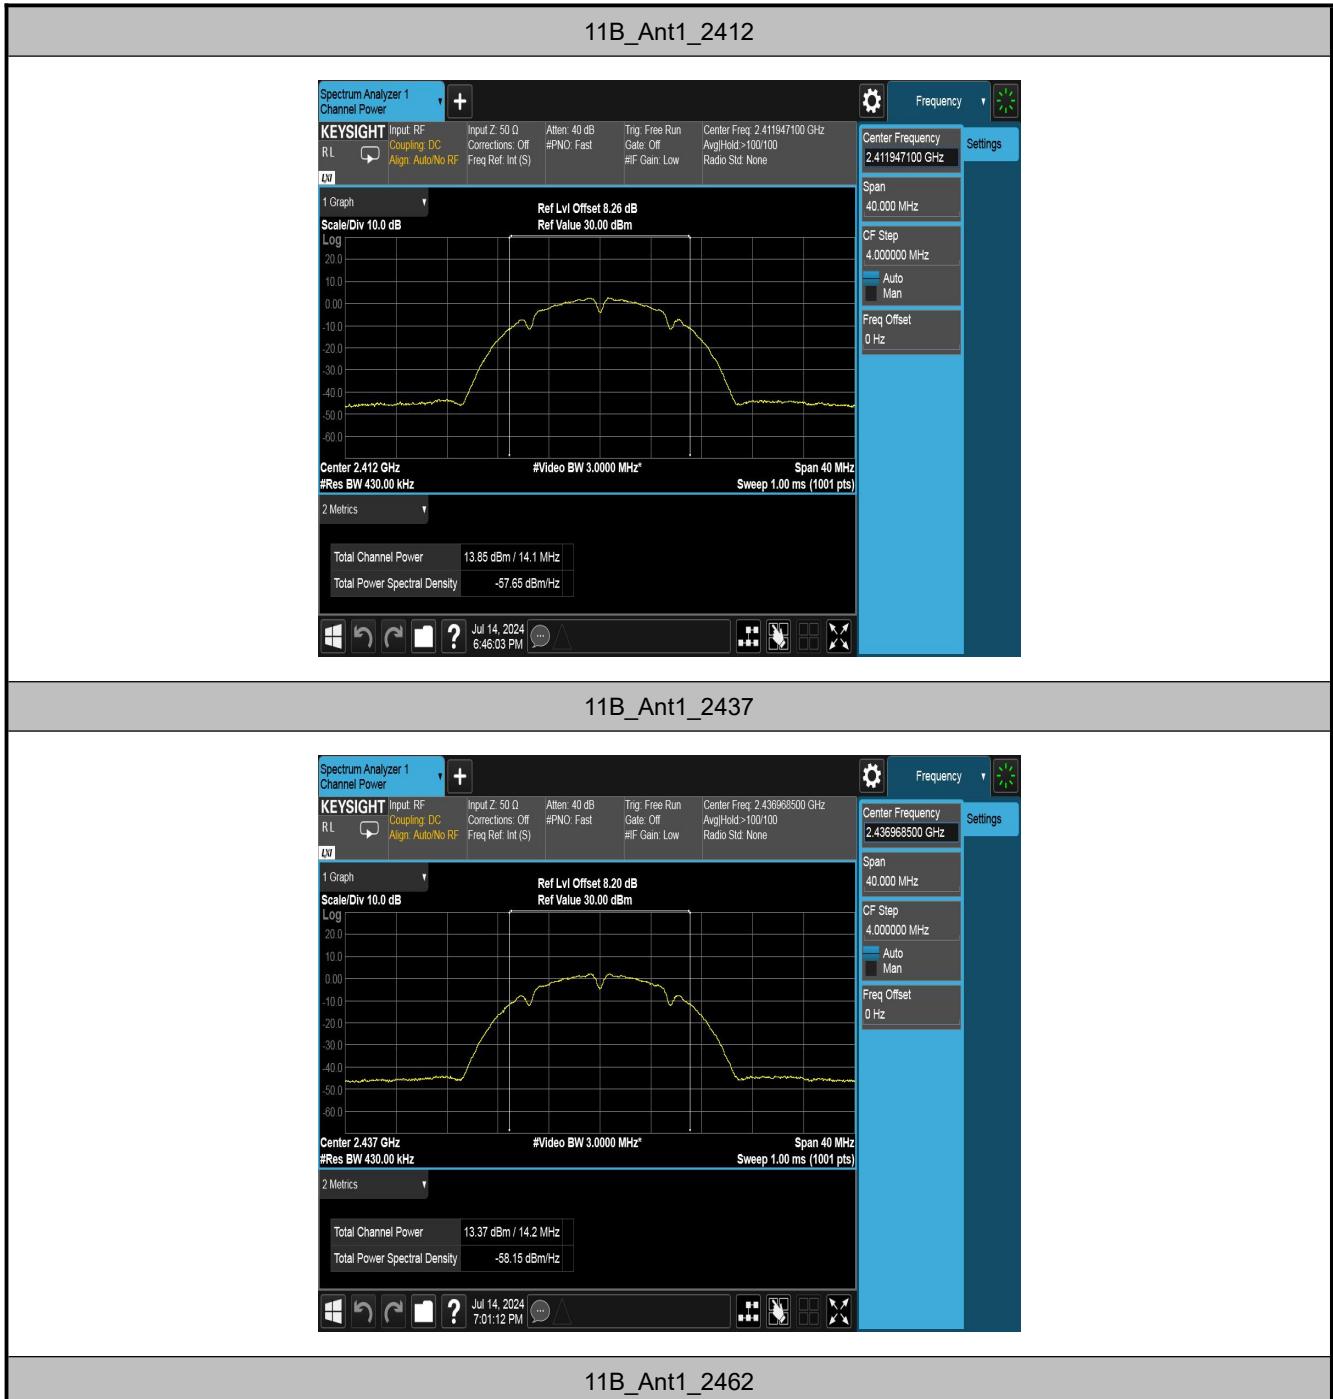



11G Ant1 2412

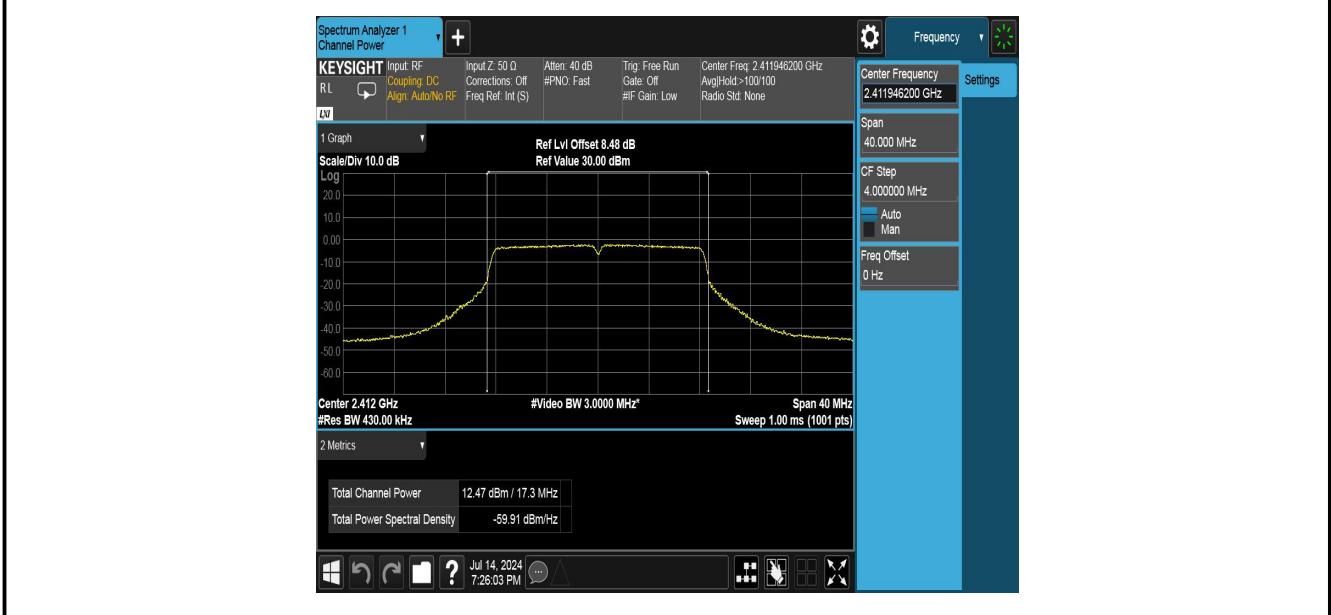

11G_Ant1_2437