




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 11:12:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	41.84
Relative Humidity:	50%	Conductivity:	0.898
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-30.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-137.00 mm
Antenna Configuration:	Integral	Max E Field:	26.70 V/m
Test Frequency:	836MHz	SAR 1g:	0.587 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.436 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.332 W/kg
Type of Modulation:		SAR End:	0.330 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

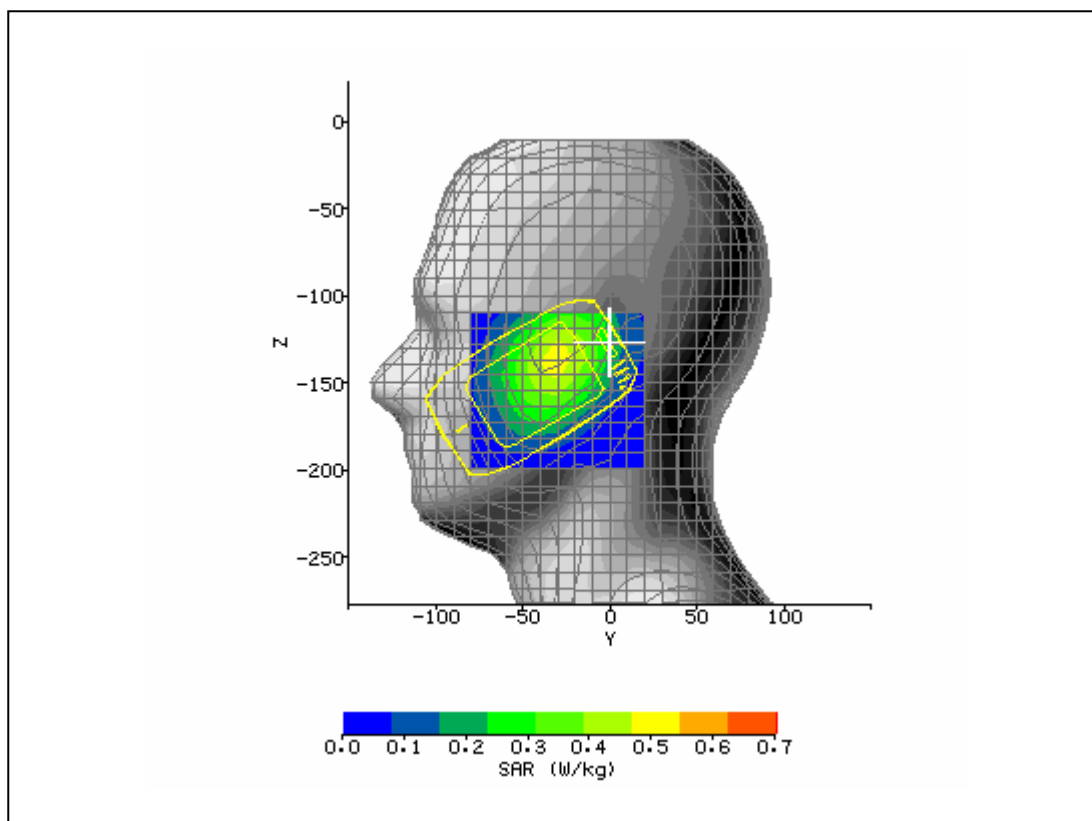


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 11:41:51 AM	DUT Battery Model/No:	
Filename:	lefttch190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	41.84
Relative Humidity:	50%	Conductivity:	0.898
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-27.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-137.90 mm
Antenna Configuration:	Integral	Max E Field:	20.01 V/m
Test Frequency:	836MHz	SAR 1g:	0.331 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.251 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.189 W/kg
Type of Modulation:		SAR End:	0.189 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

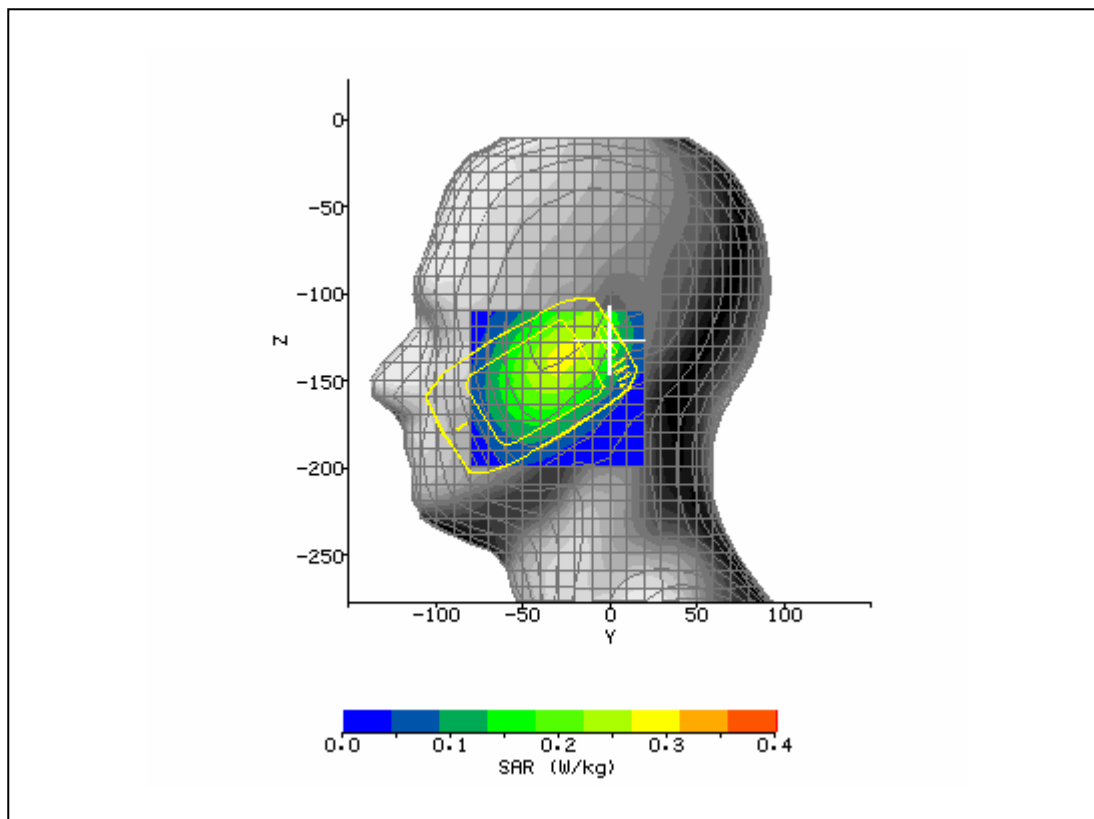


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 12:14:14 PM	DUT Battery Model/No:	
Filename:	lefttlt190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	41.84
Relative Humidity:	50%	Conductivity:	0.898
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	33.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-143.30 mm
Antenna Configuration:	Integral	Max E Field:	26.64 V/m
Test Frequency:	836MHz	SAR 1g:	0.587 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.441 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.348 W/kg
Type of Modulation:		SAR End:	0.348 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

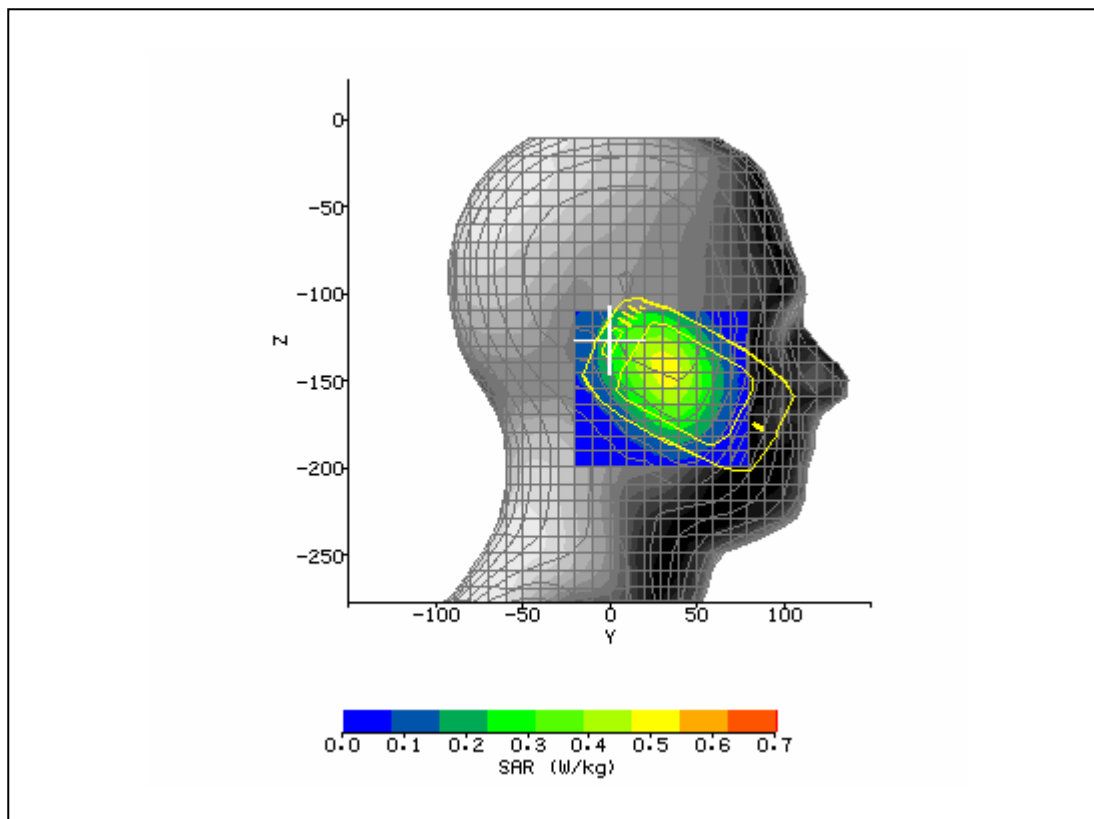


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 12:43:51 PM	DUT Battery Model/No:	
Filename:	righttch190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	41.84
Relative Humidity:	50%	Conductivity:	0.898
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	26.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-137.90 mm
Antenna Configuration:	Integral	Max E Field:	20.97 V/m
Test Frequency:	836MHz	SAR 1g:	0.350 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.268 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.210 W/kg
Type of Modulation:		SAR End:	0.210 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

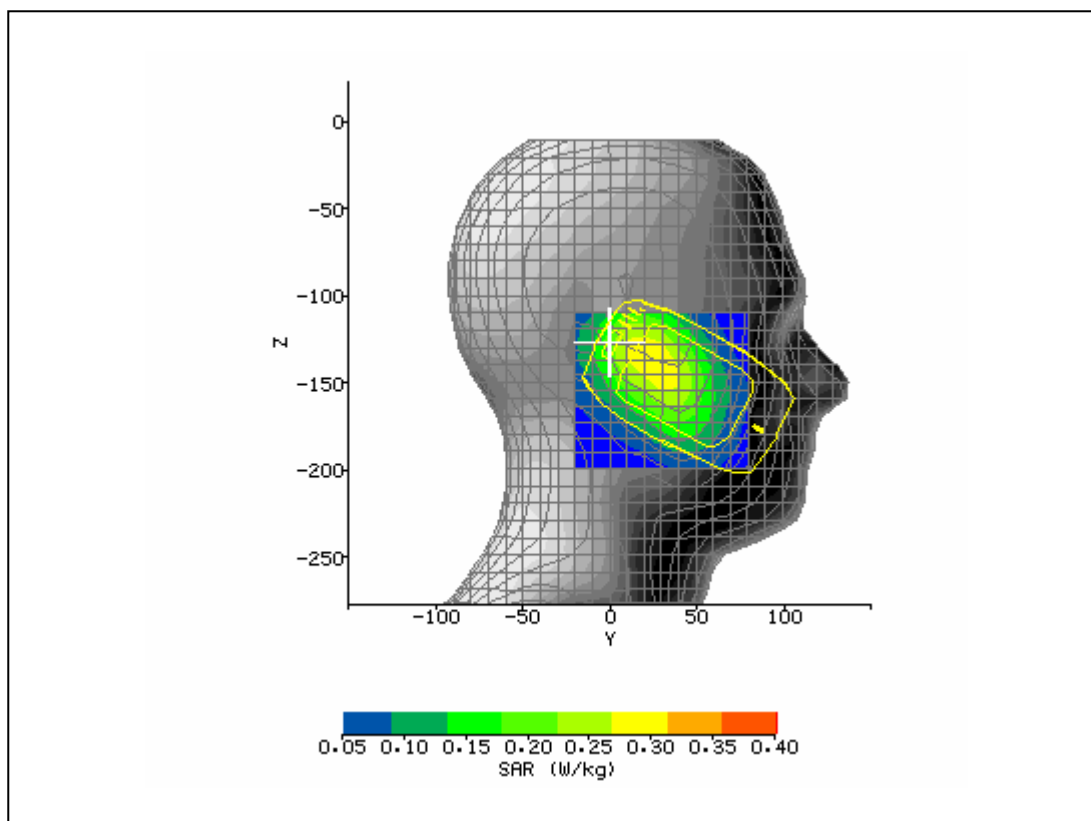


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 1:14:23 PM	DUT Battery Model/No:	
Filename:	righttlt190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	42.01
Relative Humidity:	50%	Conductivity:	0.888
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	29.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-138.80 mm
Antenna Configuration:	Integral	Max E Field:	21.10 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.355 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.268 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.213 W/kg
Type of Modulation:		SAR End:	0.213 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

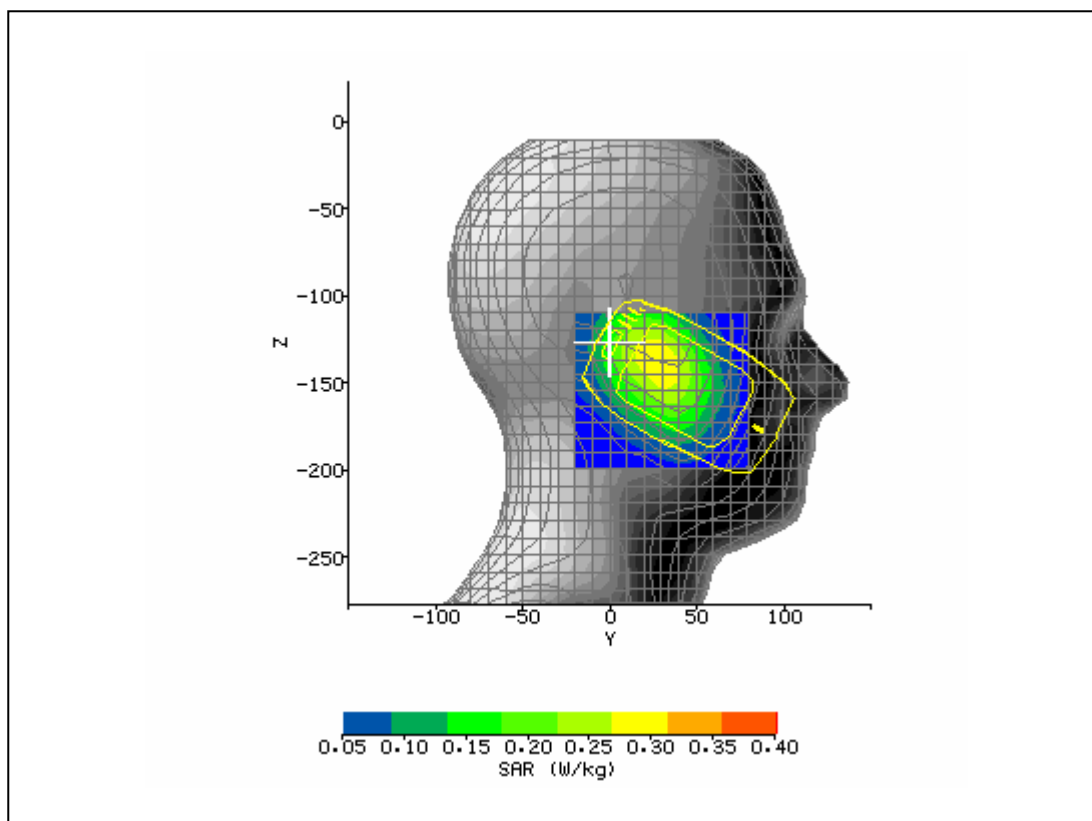


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/16/2004 1:55:39 PM	DUT Battery Model/No:	
Filename:	righttch128_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	41.64
Relative Humidity:	50%	Conductivity:	0.908
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	29.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-138.80 mm
Antenna Configuration:	Integral	Max E Field:	30.01 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.730 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.547 W/kg
Conversion Factors:	0.348 / 0.348 / 0.348	SAR Start:	0.433 W/kg
Type of Modulation:		SAR End:	0.432 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

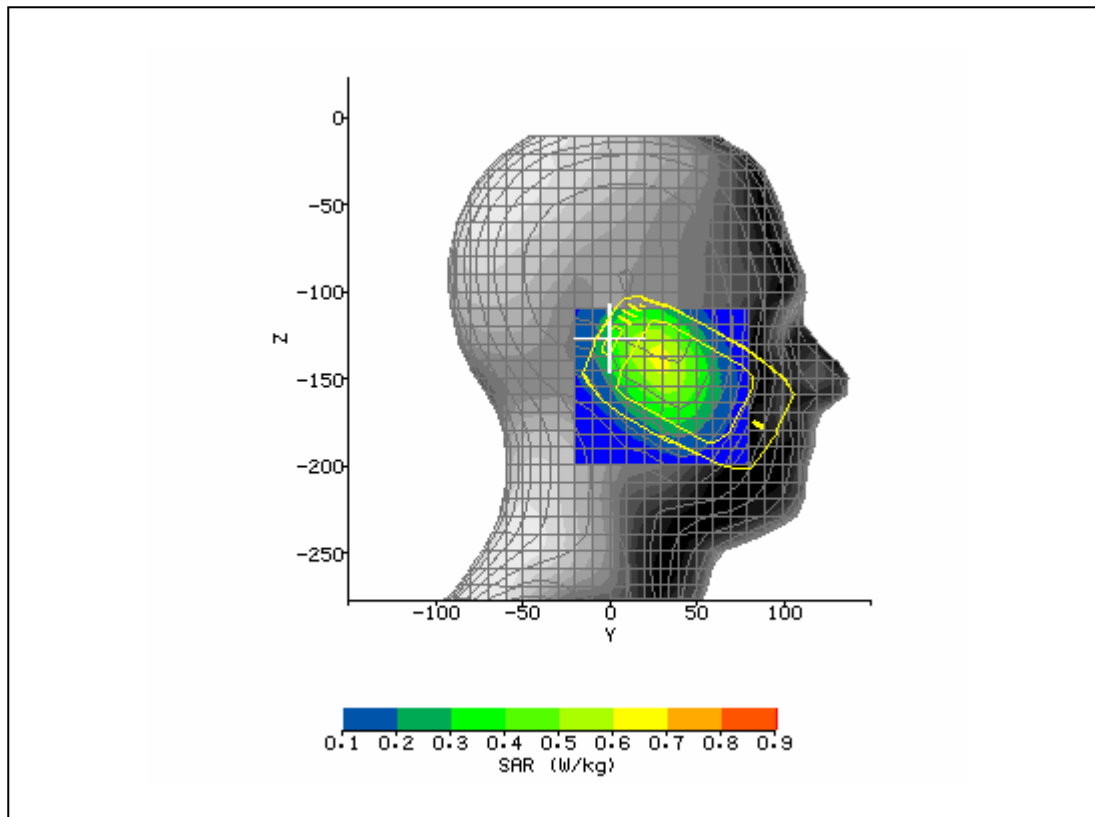


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/12/2004 1:29:25 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	56.12
Relative Humidity:	50%	Conductivity:	0.982
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-163.20 mm
Antenna Configuration:	Integral	Max E Field:	31.38 V/m
Test Frequency:	836MHz	SAR 1g:	0.805 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.511 W/kg
Conversion Factors:	0.357 / 0.357 / 0.357	SAR Start:	0.302 W/kg
Type of Modulation:		SAR End:	0.303 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

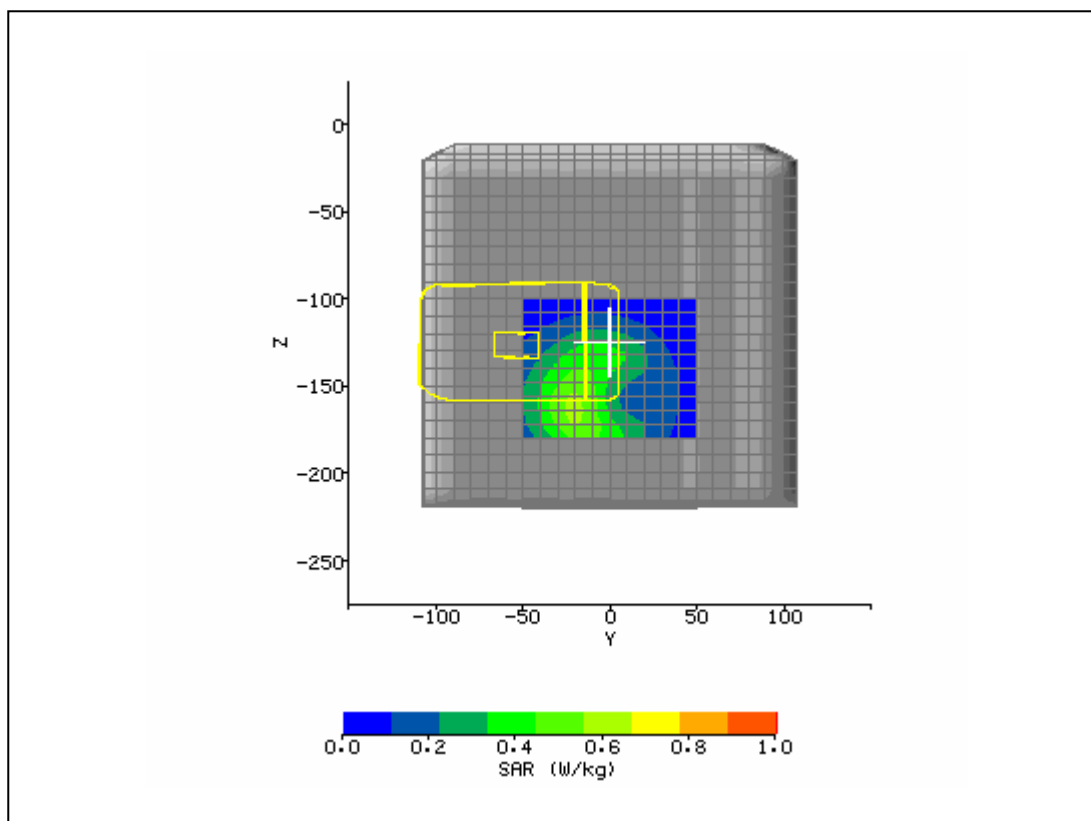


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/12/2004 2:16:50 PM	DUT Battery Model/No:	
Filename:	190pouch_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	56.55
Relative Humidity:	50%	Conductivity:	0.979
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-21.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-168.00 mm
Antenna Configuration:	Integral	Max E Field:	23.05 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.450 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.292 W/kg
Conversion Factors:	0.357 / 0.357 / 0.357	SAR Start:	0.177 W/kg
Type of Modulation:		SAR End:	0.179 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

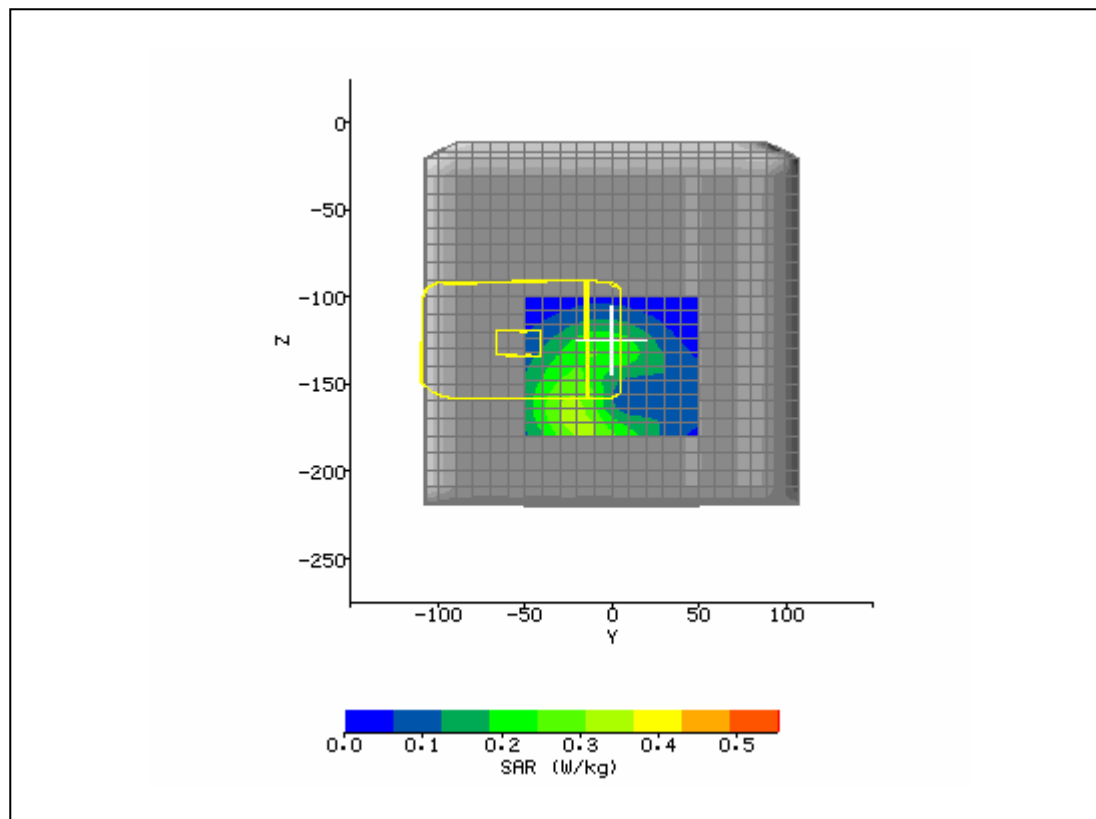


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/13/2004 11:03:34 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Danger M1	Relative Permittivity:	55.87
Relative Humidity:	50%	Conductivity:	0.987
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-21.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-163.20 mm
Antenna Configuration:	Integral	Max E Field:	38.05 V/m
Test Frequency:	848.8MHz	SAR 1g:	1.198 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.756 W/kg
Conversion Factors:	0.357 / 0.357 / 0.357	SAR Start:	0.449 W/kg
Type of Modulation:		SAR End:	0.449 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

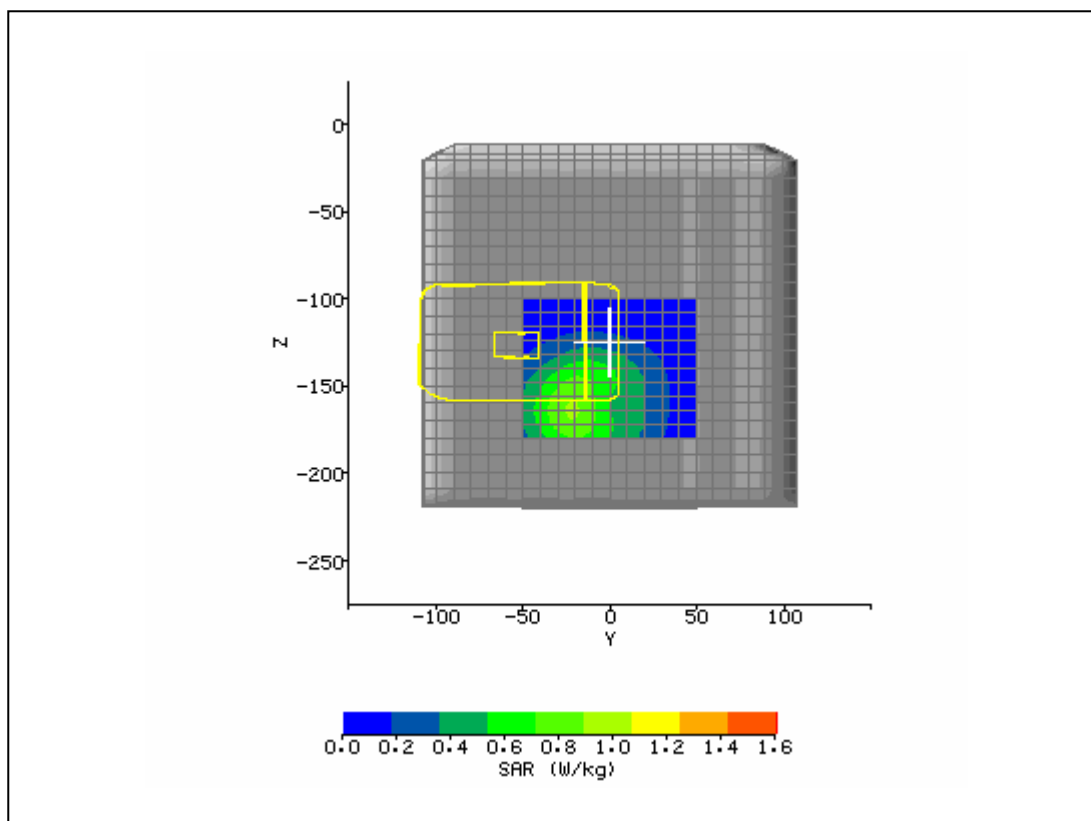


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 12:57:20 PM	DUT Battery Model/No:	
Filename:	righttlt661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.38
Relative Humidity:	50%	Conductivity:	1.424
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-128.00 mm
Antenna Configuration:	Integral	Max E Field:	19.04 V/m
Test Frequency:	1880MHz	SAR 1g:	0.457 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.276 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.119 W/kg
Type of Modulation:		SAR End:	0.119 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

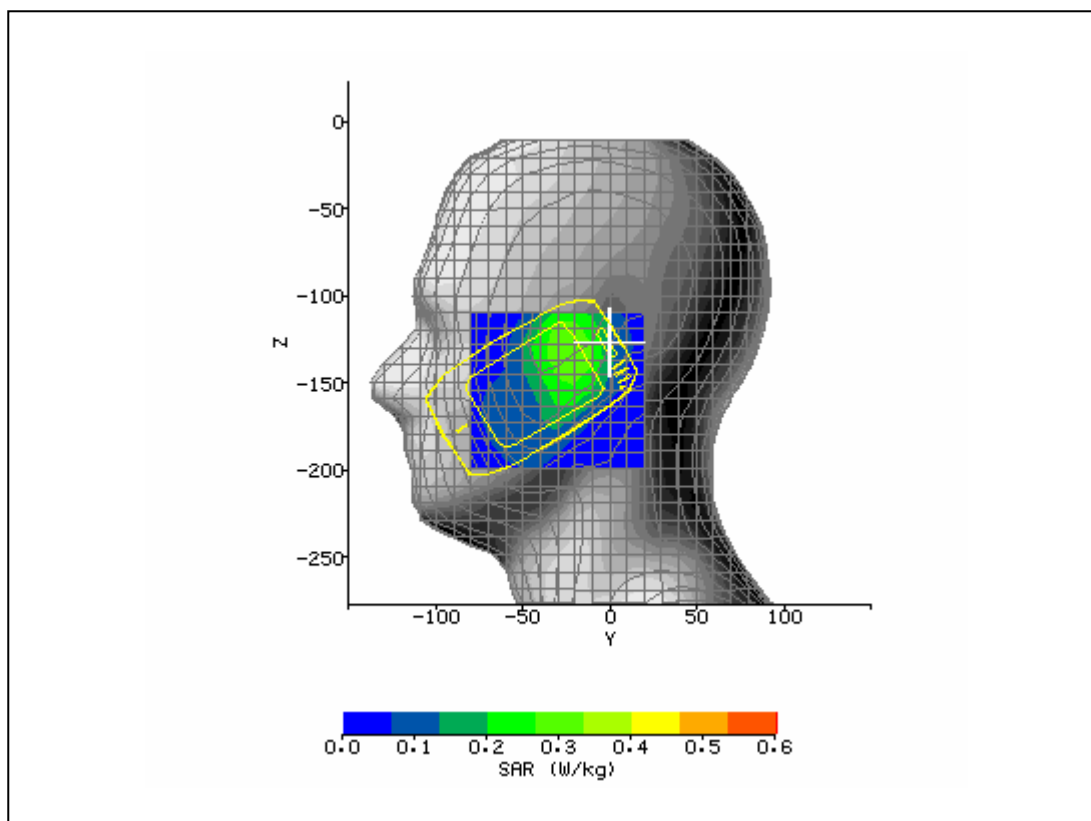


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 1:31:44 PM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.38
Relative Humidity:	50%	Conductivity:	1.424
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-128.90 mm
Antenna Configuration:	Integral	Max E Field:	19.66 V/m
Test Frequency:	1880MHz	SAR 1g:	0.474 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.284 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.132 W/kg
Type of Modulation:		SAR End:	0.135 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.08 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

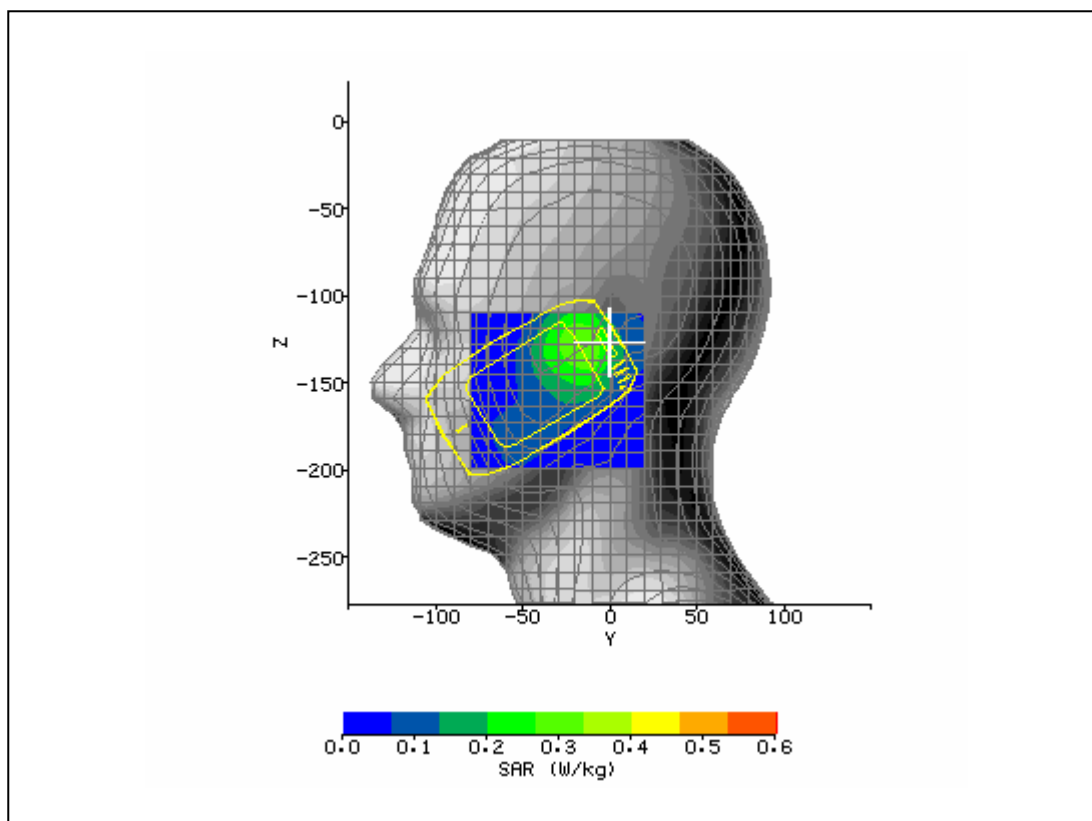


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 11:55:47 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.38
Relative Humidity:	50%	Conductivity:	1.424
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	27.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-124.40 mm
Antenna Configuration:	Integral	Max E Field:	18.82 V/m
Test Frequency:	1880MHz	SAR 1g:	0.432 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.261 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.131 W/kg
Type of Modulation:		SAR End:	0.131 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

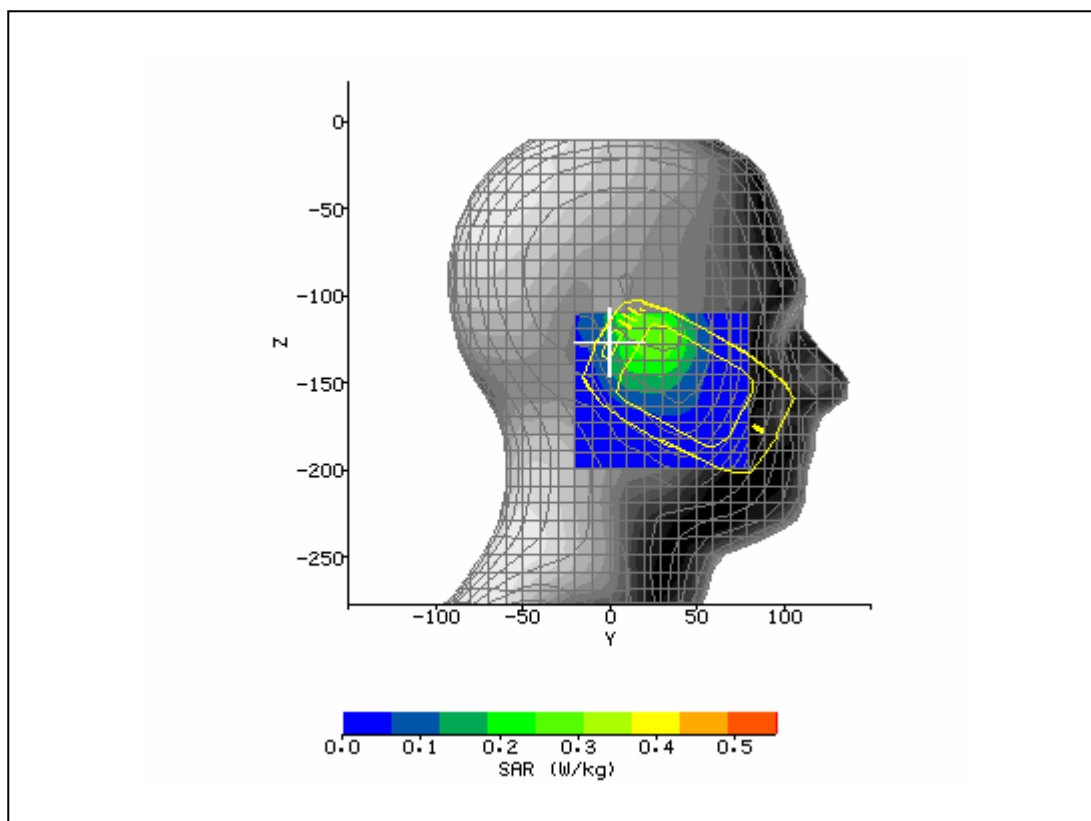


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 12:25:39 PM	DUT Battery Model/No:	
Filename:	righttch661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.38
Relative Humidity:	50%	Conductivity:	1.424
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	15.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-121.70 mm
Antenna Configuration:	Integral	Max E Field:	19.45 V/m
Test Frequency:	1880MHz	SAR 1g:	0.415 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.242 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.115 W/kg
Type of Modulation:		SAR End:	0.117 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

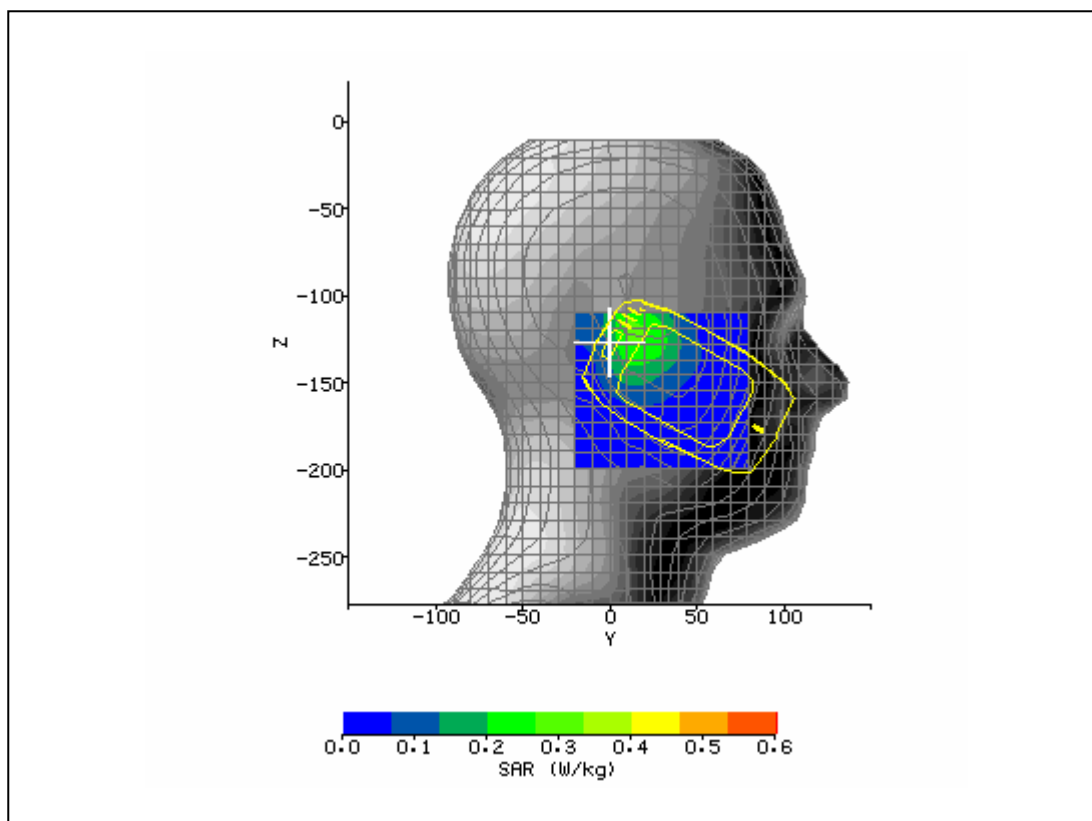


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 2:04:07 PM	DUT Battery Model/No:	
Filename:	lefttilt661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.66
Relative Humidity:	50%	Conductivity:	1.403
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-128.00 mm
Antenna Configuration:	Integral	Max E Field:	20.77 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.521 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.310 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.146 W/kg
Type of Modulation:		SAR End:	0.148 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.07 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

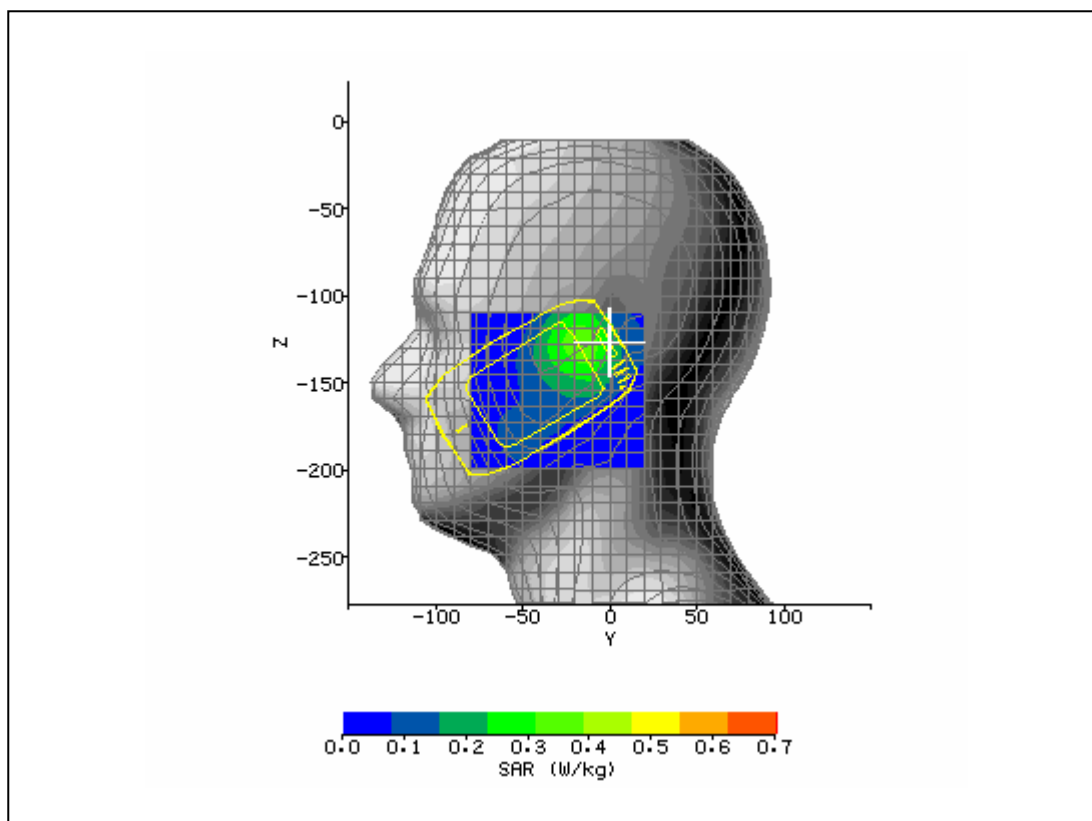


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/14/2004 3:05:09 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	39.12
Relative Humidity:	50%	Conductivity:	1.45
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-129.80 mm
Antenna Configuration:	Integral	Max E Field:	16.79 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.352 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.212 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.098 W/kg
Type of Modulation:		SAR End:	0.099 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.05 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

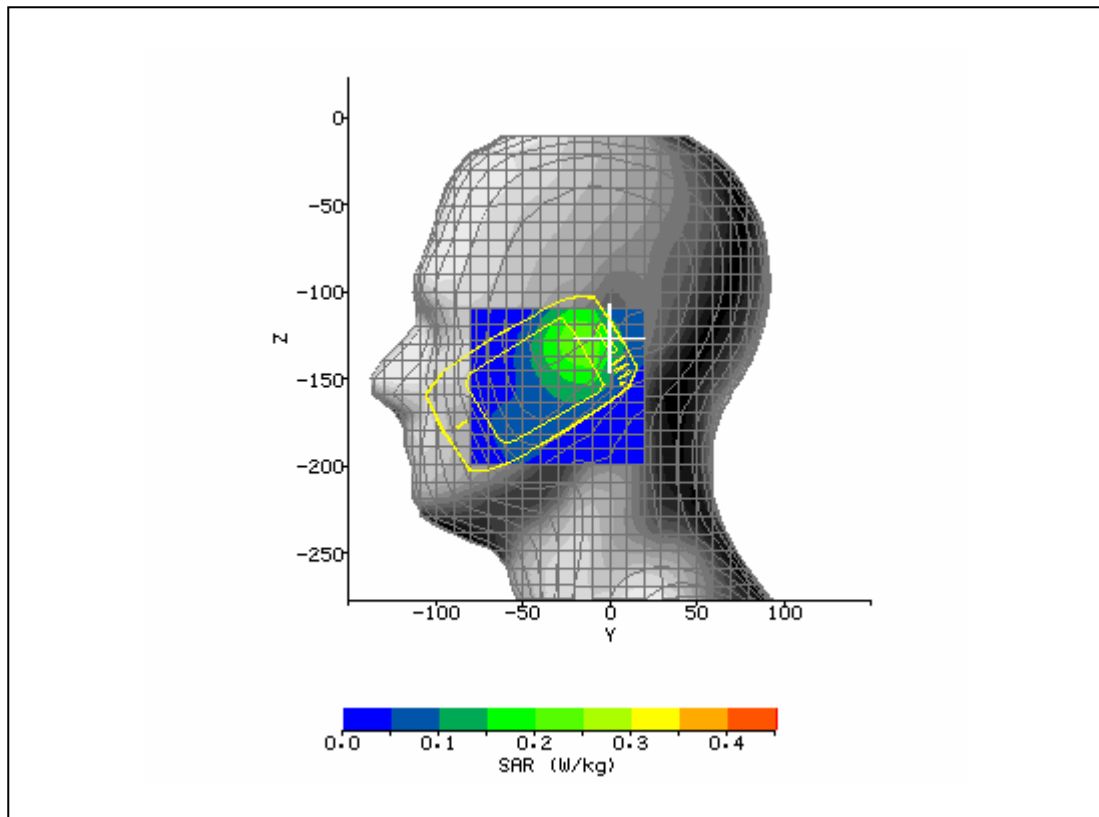

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/13/2004 12:01:52 PM	DUT Battery Model/No:	
Filename:	251pouch_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	53.17
Relative Humidity:	50%	Conductivity:	1.575
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-27.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-163.20 mm
Antenna Configuration:	Integral	Max E Field:	15.91 V/m
Test Frequency:	1880MHz	SAR 1g:	0.321 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.181 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.071 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

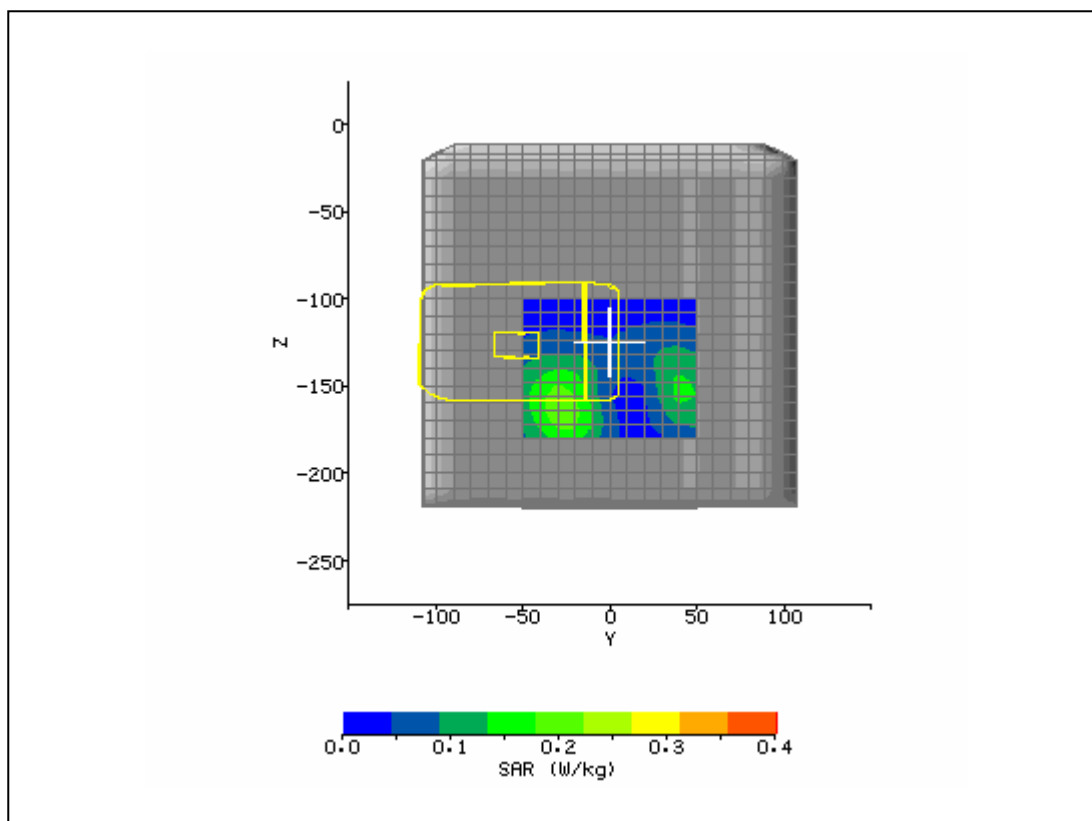

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/13/2004 12:33:23 PM	DUT Battery Model/No:	
Filename:	661pouch_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	53.32
Relative Humidity:	50%	Conductivity:	1.562
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-28.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-162.40 mm
Antenna Configuration:	Integral	Max E Field:	16.88 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.361 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.205 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.085 W/kg
Type of Modulation:		SAR End:	0.085 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

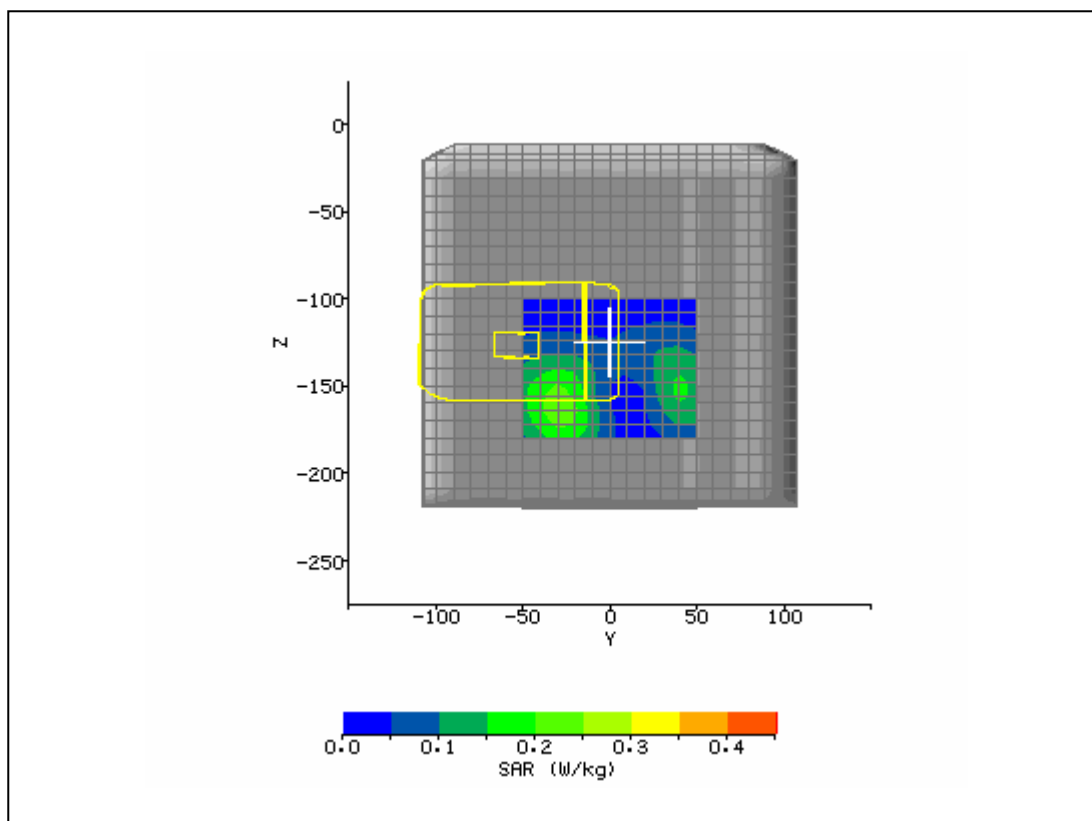

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	7/13/2004 1:03:59 PM	DUT Battery Model/No:	
Filename:	512pouch_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Danger M1	Relative Permittivity:	52.96
Relative Humidity:	50%	Conductivity:	1.579
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	Body in pouch	Max SAR Z-axis Location:	-163.20 mm
Antenna Configuration:	Integral	Max E Field:	14.19 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.254 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.142 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	06/03/2004
Input Power Level:	max	Extrapolation:	poly4

