Prepared (also subject responsible if other)				
EBC/FLEXSA (Titus Mavuso)		No. 151 86-KRC 161 084/0 Uen		
Approved	Checked	Date	Rev	Reference
EBC/FLEXSA (Bernd Kleyenstuber)		2006-07-26	D	

Type Label - KRC 161 084-089

Note 1

Note 2

Note 3

Note 4
Note 5
Note 6

Note 7

Note 8

Note 9

Note 10

ERICSSON ⦥

G3xy

CE 0889 c(UL)us Listed I.T.E. E226262

INPUT: 7.5V = 0.8A
TYPE: FWTG32 G H I J
FCC ID: P5L-FWTG32
IC: 2871-FWTG32

KRC xxx xxxx/x   Rzz

S/N: xxxxxxxxxx

IMEI: xxxxxx-xx-xxxxxx-x

Made in XXX   yyWww
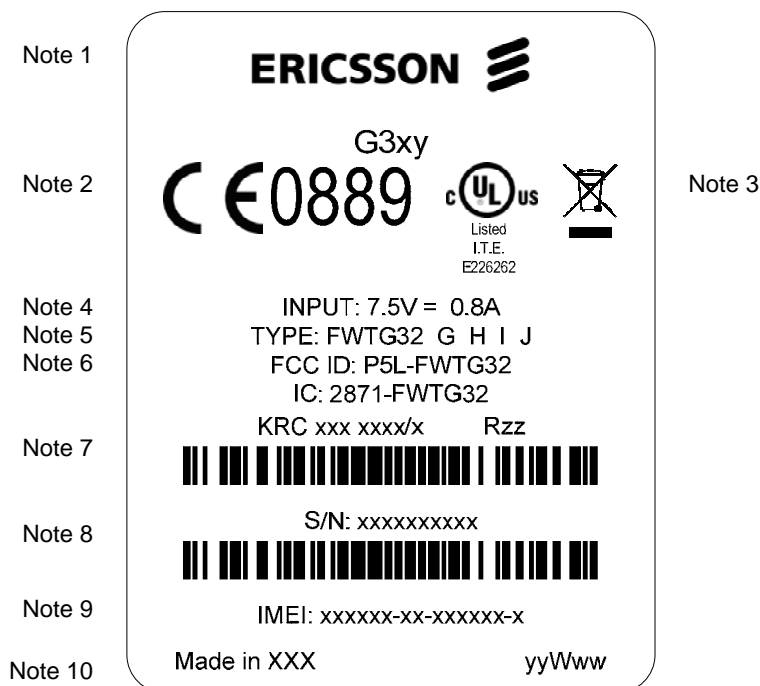
Notes:

1. Ericsson logotype according to 190 89-EN/LZT 108 901

2. CE 0889 logotype according to 1424-SVF 930 52

    Notified body number (0889), according to the TTE Annex III certificate for the production plant.

    UL Symbol according to UL1950. Overall diameter of the UL mark is 4mm. Registered trademark® letter: "Helvetica Condensed Medium". Rest of the lettering: "Helvetica Condensed Black"

3. The WEEE symbol of the crossed out wheeled bin according to EN 61429 Amd. Marking of electrical and electronic equipment in accordance with article 11(2) of Directive 202/96/EC (WEEE).

4. TYPE: FWTG32 G H I J

    G = R-state identification of the software (CXP) module

    H = R-state identification of the hardware

    I = PCBA structure identification (ROA)

    J = R-state identification of the PCBA (ROA)

    Note: G, H, I and J fields according to 1/151 86-KRC 161 084

Prepared (also subject responsible if other)		No.		
EBC/FLEXSA (Titus Mavuso)		151 86-KRC 161 084/0 Uen		
Approved	Checked	Date	Rev	Reference
EBC/FLEXSA (Bernd Kleyenstuber)		2006-07-26	D	

5. FCC certification: FCC ID: P5L-FWTG32

6. Industry Canada: IC: 2871-FWTG32

7. Product number with revision state: KRC xxx xxx Rzz

8. Serial number xxxxxxxxxx

9. IMEI number: xxxxxx-xx-xxxxxx-x

10. Country of manufacture: Made in xxxxx

Date of production: yyyy = year, ww = week

All printing will be readable and permanent.

Text should be centred.

Material used for label marking is defined in product specification 1301-SVF 904 04

Printing dimensions:

- Type size: min 1.1mm

- Line spacing: min 1.0mm

- Ericsson logo: min 2.25mm

- CE symbol: min 5.0mm

- Notified body (0889): same size as CE symbol