

Test of Alien Technology RFID Reader ALR9650

To: FCC 47 CFR Part15.247 & IC RSS-210

Test Report Serial No.: ALNT31-A2 Rev A



**TEST REPORT**  
FROM  
**MiCOMLabs**

Test of Alien Technology RFID Reader ALR9650

To FCC 47 CFR Part15.247 & IC RSS-210

Test Report Serial No.: ALNT31-A2 Rev A

This report supersedes: None

**Manufacturer:** Alien Technology  
18220 Butterfield Blvd  
Morgan Hill  
California 95037, USA

**Product Function:** 915 MHz RFID Reader

**Copy No:** pdf      **Issue Date:** 12th January '08

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 3 of 87

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>5</b>
<b>1. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
2.1. Normative References .....	9
2.2. Test and Uncertainty Procedures .....	9
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>10</b>
3.1. Technical Details .....	10
3.2. Scope of Test Program .....	11
3.3. Equipment Model(s) and Serial Number(s) .....	14
3.4. Antenna Details .....	14
3.5. Cabling and I/O Ports .....	14
3.6. Test Configurations .....	15
3.7. Equipment Modifications .....	15
3.8. Deviations from the Test Standard .....	15
3.9. Subcontracted Testing or Third Party Data .....	15
<b>4. TEST SUMMARY .....</b>	<b>16</b>
<b>5. TEST RESULTS .....</b>	<b>18</b>
5.1. Device Characteristics .....	18
5.1.1. 20 dB Bandwidth .....	18
5.1.2. Transmitter Channels - Channel Spacing .....	23
5.1.3. Transmitter Channels .....	26
5.1.4. Output Power .....	31
5.1.5. Maximum Permissible Exposure .....	34
5.1.6. Conducted Spurious Emissions Transmitter .....	35
5.1.7. Transmitter Radiated Spurious Emissions (above 1 GHz) .....	45
5.1.8. Receiver Radiated Spurious Emissions (Stand-By Mode) .....	66
5.1.9. Radiated Spurious Emissions (30M-1 GHz) .....	71
5.1.10. AC Wireline Conducted Emissions (150 kHz – 30 MHz) .....	78
<b>6. PHOTOGRAPHS .....</b>	<b>82</b>
6.1. Radiated Emissions >1 GHz .....	82
6.2. Radiated Emissions <1 GHz .....	84
6.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz) .....	85
<b>7. TEST EQUIPMENT DETAILS .....</b>	<b>86</b>

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 5 of 87

## **ACCREDITATION, LISTINGS & RECOGNITION**

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 6 of 87

## LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

### North America

#### **United States of America**

Federal Communications Commission (FCC) Listing #: 102167

#### **Canada**

Industry Canada (IC) Listing #: 4143A

## RECOGNITION

### **APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)**

#### **Conformity Assessment Body (CAB) – MiCOM Labs**

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT) Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 7 of 87

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	12 <sup>th</sup> January 2008	First issue.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 8 of 87

## **1. TEST RESULT CERTIFICATE**

Manufacturer:	Alien Technology 18220 Butterfield Blvd Morgan Hill California 95037, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	915 MHz RFID Reader	Telephone:	+1 925 462 0304
Model:	ALR9650	Fax:	+1 925 462 0306
S/N:	001		
Test Date(s):	29th Nov - 12th December '07	Website:	<a href="http://www.micomlabs.com">www.micomlabs.com</a>

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**

Graeme Grieve  
Quality Manager MiCOM Labs,

  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 2. REFERENCES AND MEASUREMENT UNCERTAINTY

### 2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.247	2007	Code of Federal Regulations
(ii)	Industry Canada RSS-210	Issue 7 June 2007	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands)
(iii)	Industry Canada RSS-Gen	Issue 2 June 2007	General Requirements and Information for the Certification of Radiocommunication Equipment.
(iv)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(v)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vi)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(vii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(viii)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(ix)	A2LA	14 <sup>th</sup> September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy

### 2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 10 of 87

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the Alien Technology RFID Reader ALR9650 to FCC Part 15.247 and Industry Canada RSS-210 regulations
Applicant:	As Manufacturer
Manufacturer:	Alien Technology 18220 Butterfield Blvd Morgan Hill California 95037, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ALNT31-A2 Rev A
Date EUT received:	13 <sup>th</sup> September 2007
Standard(s) applied:	FCC 47 CFR Part15.247 & IC RSS-210
Dates of test (from - to):	29th Nov - 12th December '07
No of Units Tested:	One
Type of Equipment:	915 MHz RFID Reader
Manufacturers Trade Name:	Alien Smartenna
Model:	ALR9650
Location for use:	Indoor
Antenna:	Internal and External
Declared Frequency Range(s):	902 - 928 MHz
Type of Modulation:	PR-ASK
Declared Nominal Output Power:	+30 dBm
EUT Modes of Operation:	FHSS
Transmit/Receive Operation:	Transceiver, Simplex
Rated Input Voltage and Current:	POE: 48Vdc, 0.4A ac/dc Converter: 100-240Vac 50/60 Hz/24 Vdc, 1.25A
Operating Temperature Range:	Client declared range : -20°C to +50°C (-4°F to 122°F)
ITU Emission Designator:	45K9L1D
Microprocessor(s) Model:	Atmel AT91SAM9, AT91SAM7
Clock/Oscillator(s):	24 MHz, 25 MHz, 18.430 MHz 32.768 kHz
Frequency Stability:	Client declared : ±10ppm
EUT Dimensions:	9" (22.9 cm) x 8.4" (21.3 cm) x 2.0" (5.1 cm)
EUT Weight :	2.9 lbs (1.3 kg)
Primary function of equipment:	Radio Frequency Identification (RFID) Reader

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3.2. Scope of Test Program

The scope of the test program was to test the Alien Technology RFID Reader ALR9650 in the frequency ranges 902 - 928 MHz against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications for radiated and conducted emissions for intentional radiators. The intentional radiator was tested in a simulated typical installation to demonstrate compliance with the stated standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of the EUT, orientation of the power and I/O cabling, antenna search height and antenna polarization.

Every effort was made to perform an impartial test using appropriate test equipment of known calibration.

The Alien Technology RFID Reader ALR9650 (EUT) reader is a Frequency Hopping Spread Spectrum (FHSS) transceiver. The EUT required modification to bring it into compliance, see Section 3.7 "Equipment Modifications".

#### **Alien Technology 915 MHz RFID Reader ALR9650**




---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 12 of 87

### Alien Technology 915 MHz RFID Reader ALR9650

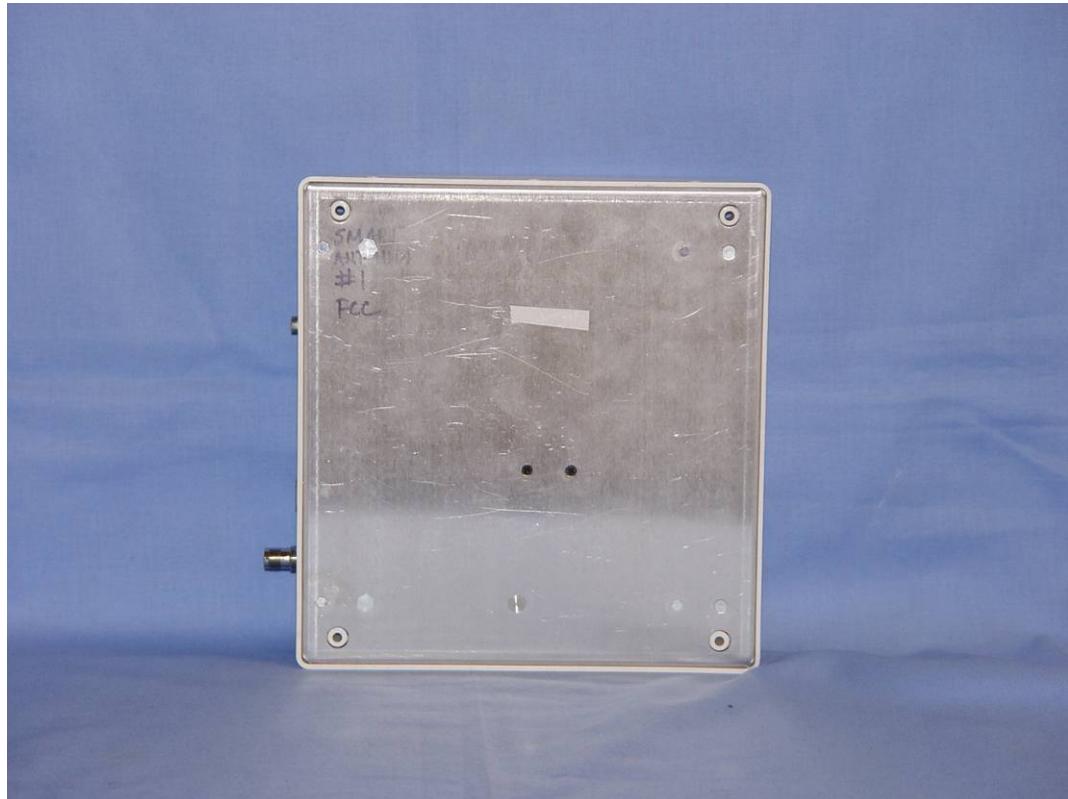

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### ITE 100-240Vac/+24Vdc 1.25A Converter



### POE +48Vdc 0.4A



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 14 of 87

### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/ Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	RFID Reader	Alien Technology	ALR9650	#1
EUT	100-240Vac/dc Power Supply +10 Vdc,2A +6 Vdc,2A -5Vdc/0.5A	I.T.E. Power Supply	SA-06-30S17R-V	R00065000 058
EUT	Power Over Ethernet (POE) 100-250Vac, 0.5A +48Vdc, 0.4A	I.T.E. Power Supply	PW180	KA4800F01
EUT	6 dBi Circular polarized antenna	--	ALR-9611-CR	None
EUT	6 dBi Linear polarized antenna	--	ALR-9610-AL	None
Support	Latitude Laptop	Dell	C600, PP01L	None

### 3.4. Antenna Details

1. Integral circular polarized antenna 6dBi
2. ALR-9611-CR circular polarized antenna 6dBi
3. ALR-9610-AL linear polarized antenna 6dBi

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. RF Port (915 MHz)
4. 10/100BT Ethernet + POE (if required)
5. +24Vdc Supply
6. Serial Port (9 pin) Local Maintenance Terminal
7. Control input/output

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3.6. Test Configurations

Test configurations

Operating Channel	Frequencies (MHz)
0	902.75
26	915.25
49	927.25

### 3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. Radiated Emissions 30M-1GHz (Section 5.1.9)

#### Problem

EUT (POE and ac/dc converter) failed Class A radiated emissions 30M-1GHz

#### Solution – POE Only

Client inserted;

- .. series inductors on the POE line - 10uH
- .. grounded digital earth to chassis
- .. additional capacitor added to internal switching PSU - 0.01uF

#### Solution – ac/dc Converter Only

Client inserted all the above fixes (a-c) and included;

- .. additional capacitor on dc supply input - 0.1uF
- .. Feritte added to dc supply cable, single turn 0446164951 Fair-rite

### 3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. None

### 3.9. Subcontracted Testing or Third Party Data

The following tests were performed by a MiCOM Labs approved test facility:-

1. None

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 16 of 87

#### **4. TEST SUMMARY**

##### **List of Measurements**

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(1) <b>A8.1</b>	20 dB BW	20 dB BW	Conducted	Complies	5.1.1
15.247(a)(1) <b>A8.1</b>	Transmitter Channels	Channel Spacing	Conducted	Complies	5.1.2
15.247(a)(1) <b>A8.1</b>	Transmitter Channels	Number of Channels	Conducted	Complies	5.1.3.1
		Channel Occupancy	Conducted	Complies	5.1.3.2
15.247(b)(2) <b>A8.4</b>	Output Power	Transmit Power	Conducted	Complies	5.1.4
15.247(i) <b>5.5</b>	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Conducted	Complies	5.1.5
15.247(d) <b>A8.5</b>	Conducted Spurious Emissions	Band Edge	Conducted	Complies	5.1.6
		Spurious Emissions Transmitter (1 to 10 GHz)	Conducted	Complies	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 17 of 87

## List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.247(d)</b> <b>15.205</b> <b>15.209</b> <b>A8.5</b> <b>2.2</b> <b>2.6</b> <b>4.9</b>	Transmitter Radiated Spurious Emissions (above 1GHz)	Transmitter	Radiated	Complies	5.1.7
<b>4.10</b> <b>§7.2.3</b>		Standby	Radiated	Complies	5.1.8
<b>15.247(d)</b> <b>15.205</b> <b>15.209</b> <b>A8.5</b> <b>2.2</b> <b>2.6</b>	Radiated Emissions below 1 GHz		Radiated	Complies (Class A)	5.1.9
<b>15.207</b> <b>7.2.2</b>	Conducted	AC Wireline Conducted Emissions	Conducted	Complies (Class A)	5.1.10

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** Section 3.7 - Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 5. TEST RESULTS

### 5.1. Device Characteristics


#### 5.1.1. 20 dB Bandwidth

**FCC, Part 15 Subpart C §15.247(a)(1)**  
**Industry Canada RSS-210 §A8.1**

##### Test Procedure

The 20 dB bandwidth is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

##### Test Measurement Set up

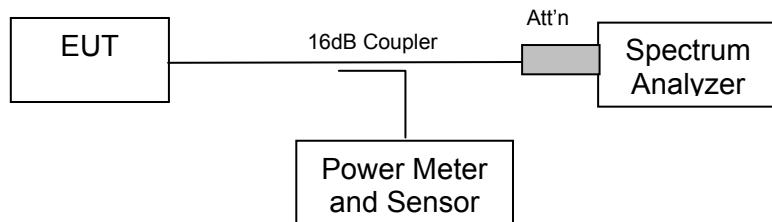

Measurement set up for 20 dB bandwidth test

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### Test Results for 20 dB Bandwidth

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar


### TABLE OF RESULTS

Channel #	Center Frequency (MHz)	20 dB Bandwidth (kHz)	Specification (kHz)
0	902.75	45.8918	<500
26	915.75	45.2906	
49	927.25	45.6914	

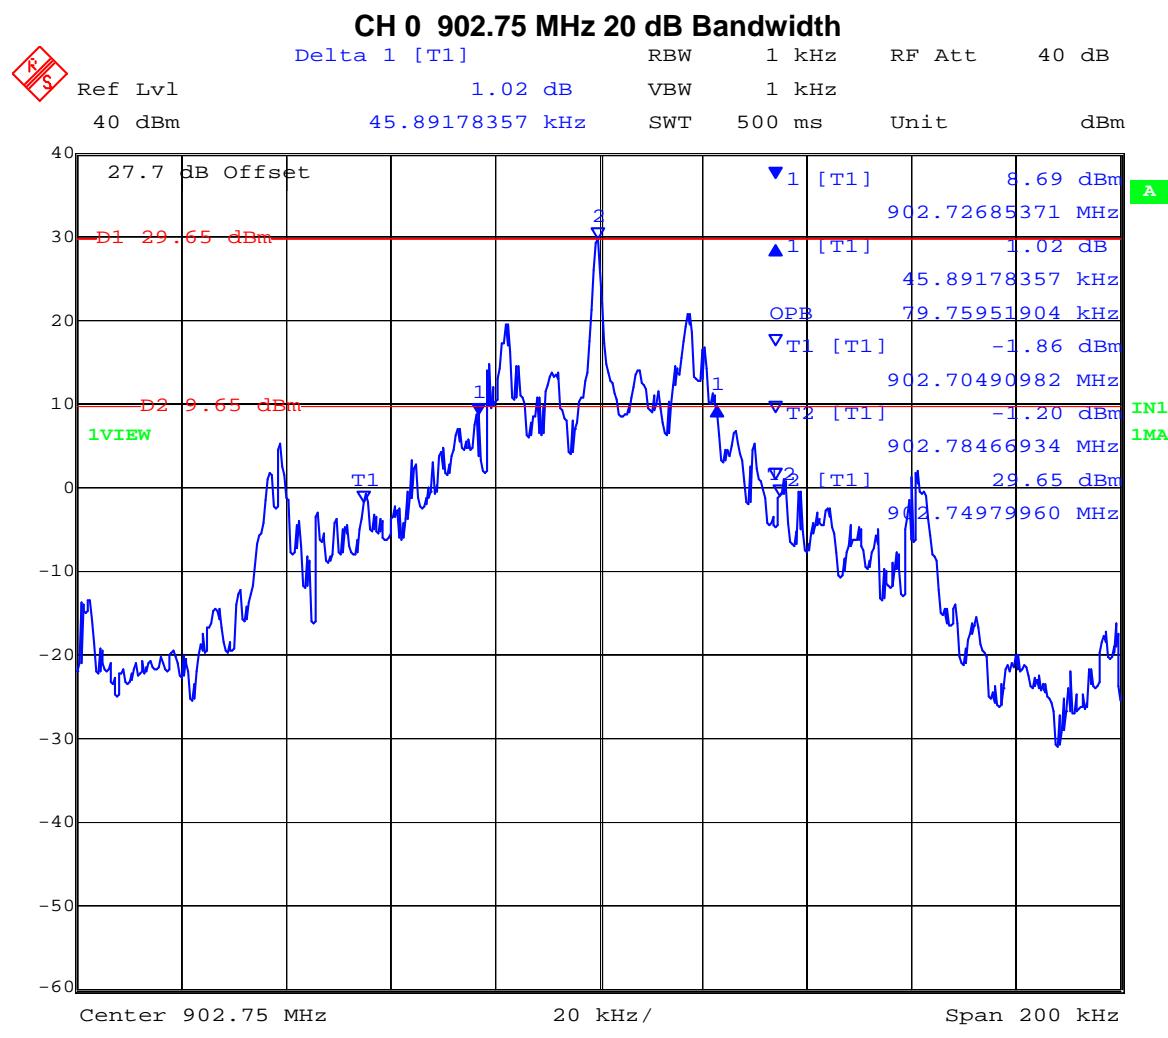

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**CH 26 915.75 MHz 20 dB Bandwidth**

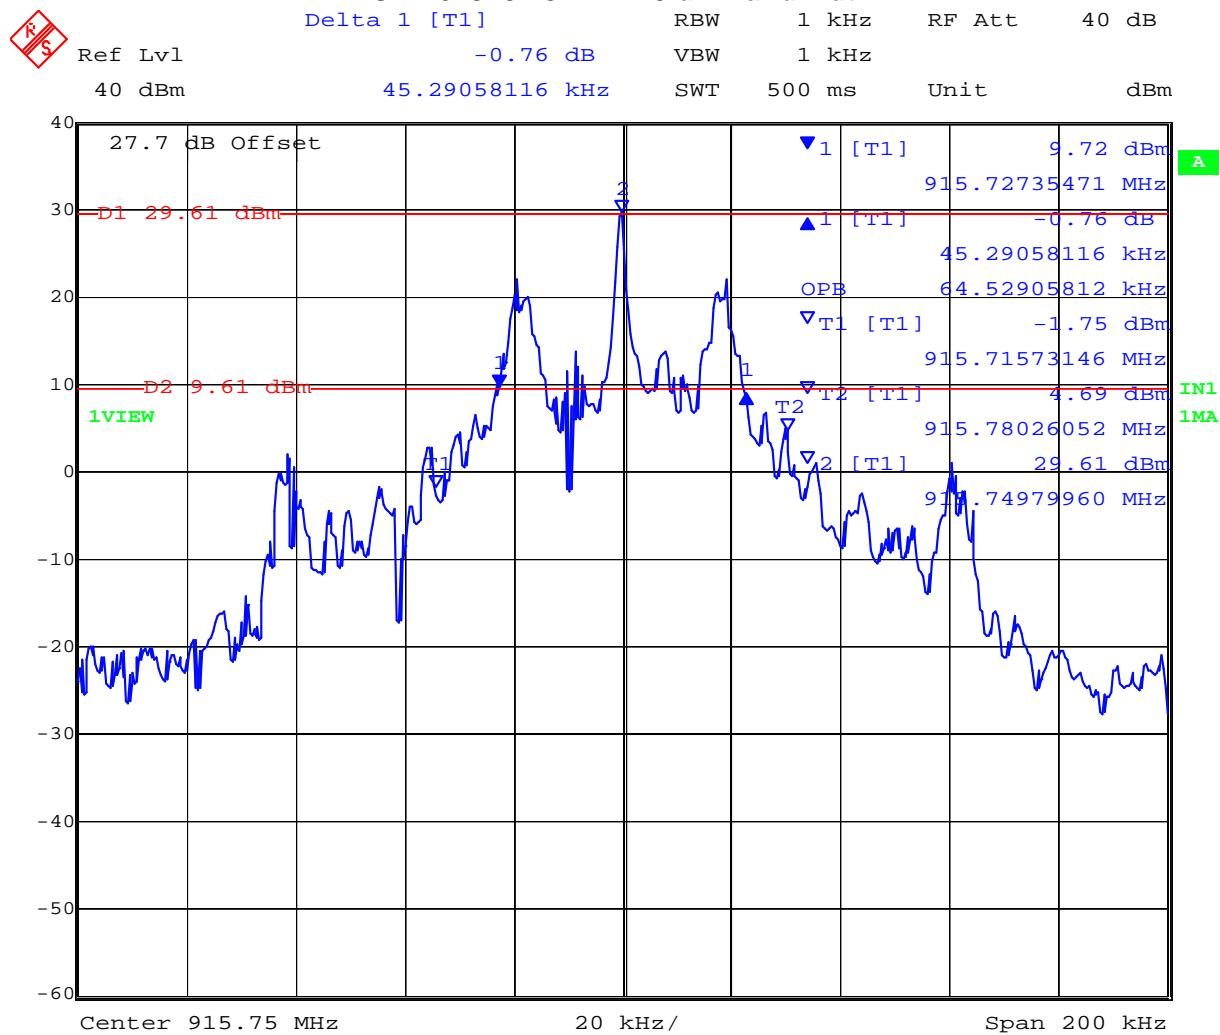

Date: 6.DEC.2007 12:22:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**CH 49 927.25 MHz 20 dB Bandwidth**

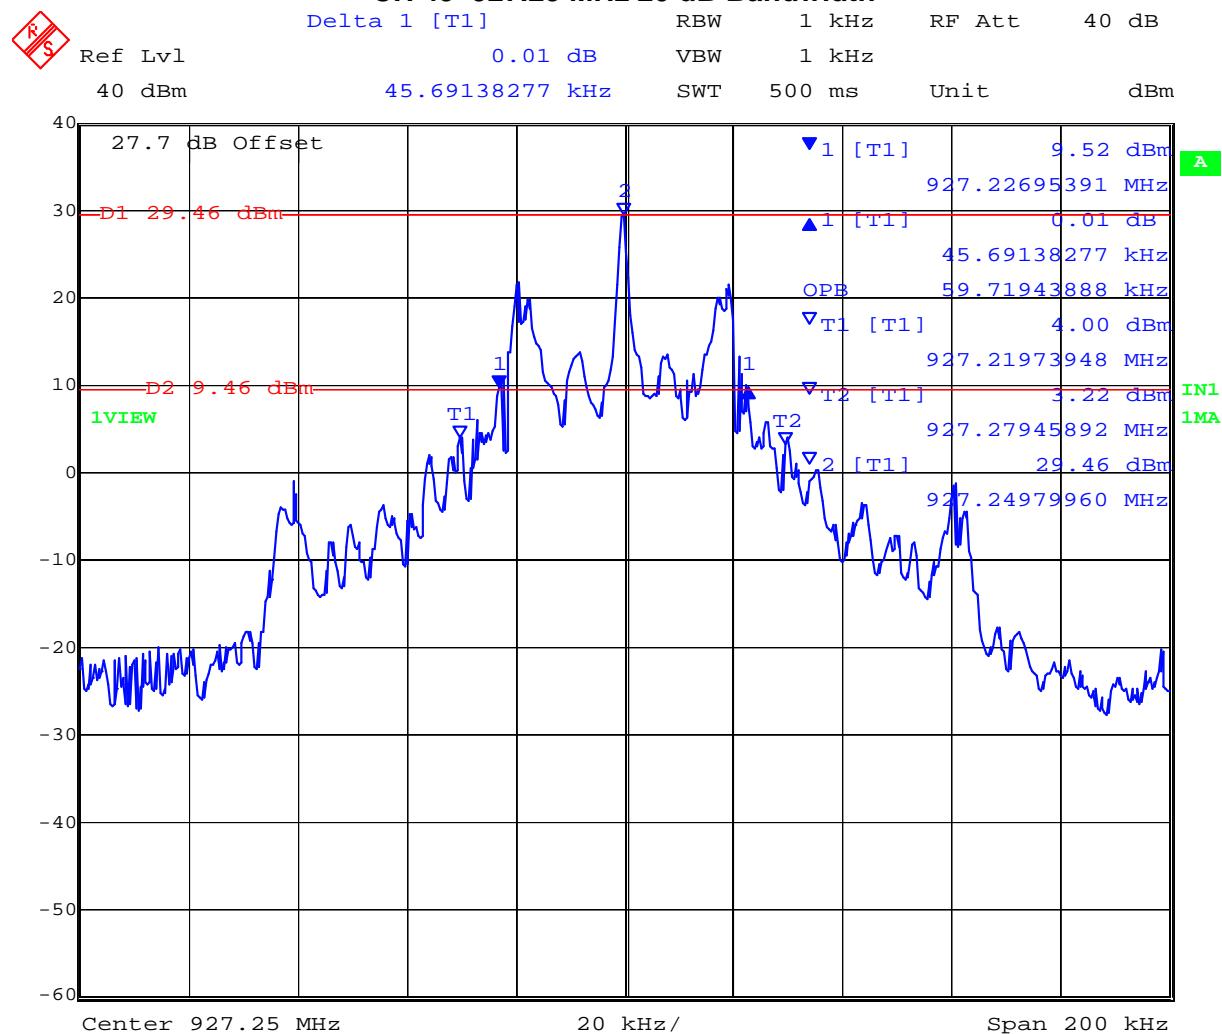

Date: 6.DEC.2007 12:26:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 22 of 87

## Specification

### Limits

**FCC §15.247 (a)(1)**  
**Industry Canada RSS-210 §8.1**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### **5.1.2. Transmitter Channels - Channel Spacing**

**FCC, Part 15 Subpart C §15.247(a)(1)**  
**Industry Canada RSS-210 §8.1(2)**

#### **Test Procedure**

The channel spacing is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

#### **Test Measurement Set up**

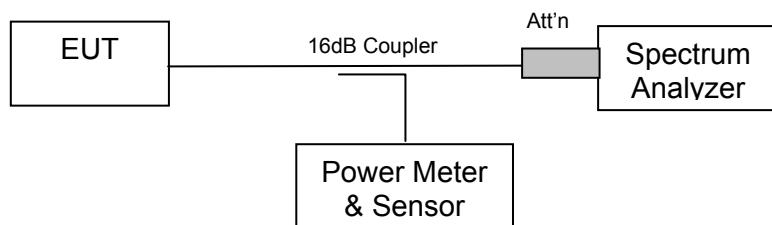

Measurement set up for Channel Spacing Test

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %


Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS

Channel(s)	Channel Spacing (KHz)	Specification
25-26, 26-27	501.002	Greater than maximum 20 dB Bandwidth

**Maximum 20 dB bandwidth = 52.6052 kHz**

#### Channel Spacing for CH 25 – CH 26

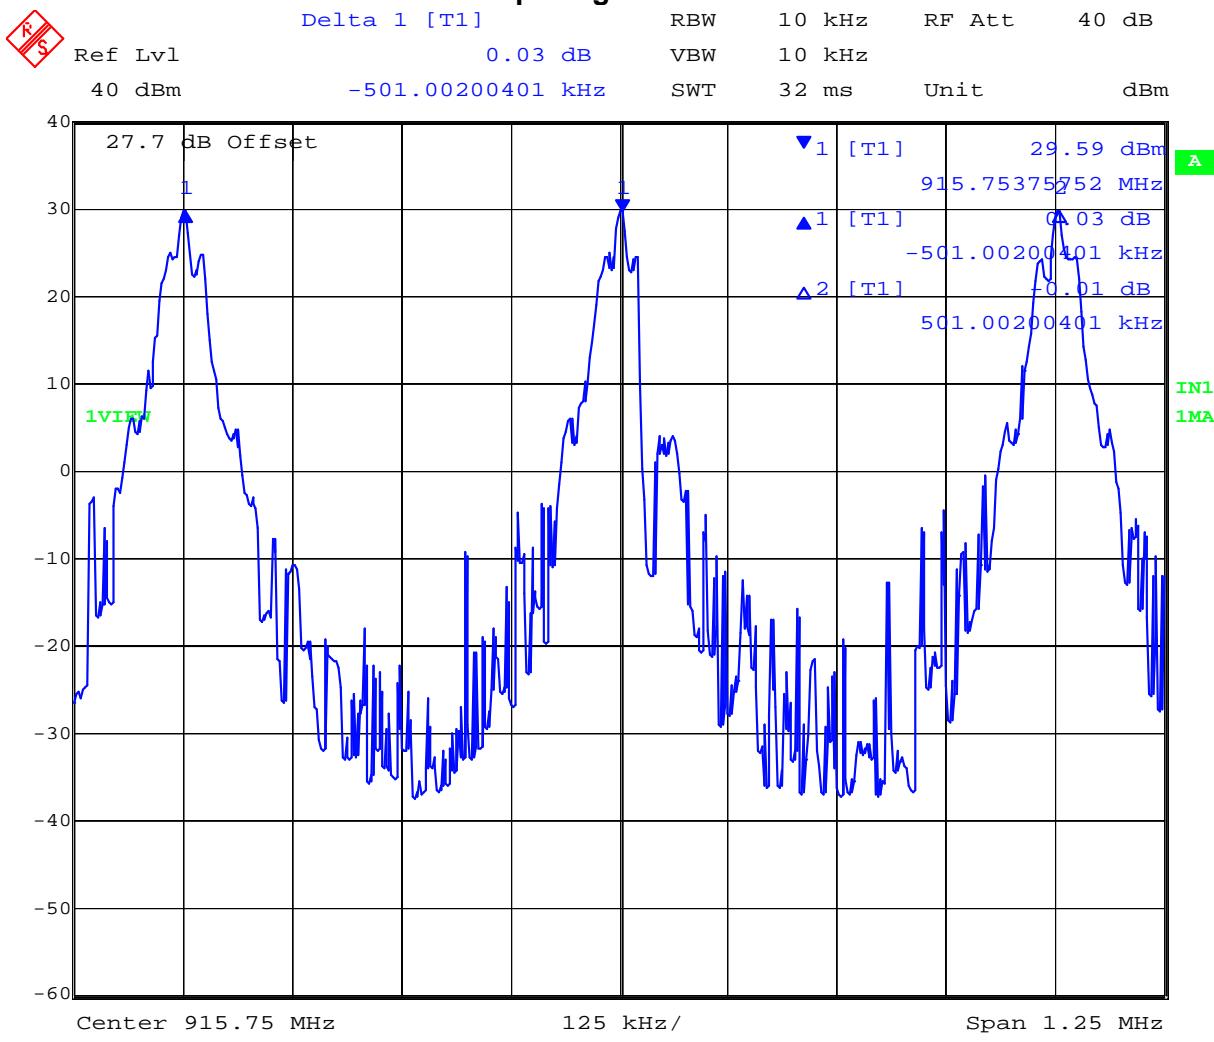

Date: 6.DEC.2007 12:42:13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 25 of 87

## Specification for Channel Spacing

### Limits

**FCC §15.247 (a)(1)**  
**Industry Canada RSS-210 §A8.1(2)**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

## Laboratory Uncertainty for Frequency Measurements

Measurement uncertainty	±0.86ppm
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement"	0078, 0134, 0158, 0184, 0193, 0250, 0252 0310, 0312.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.3. Transmitter Channels


#### 5.1.3.1. Number of Channels

FCC, Part 15 Subpart C §15.247(a)(1)  
Industry Canada RSS-210 §A8.1

##### Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

##### Test Measurement Set up

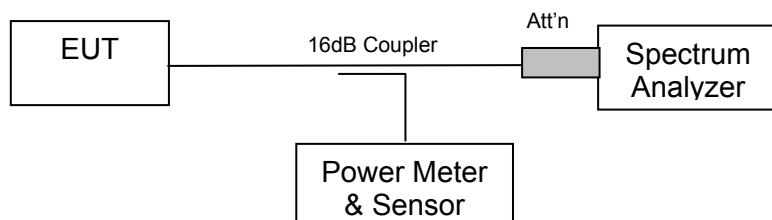


Test set up to measure the number of channels and channel occupancy

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS

Number of Channels	Specification
50	Minimum of 50 hopping channels

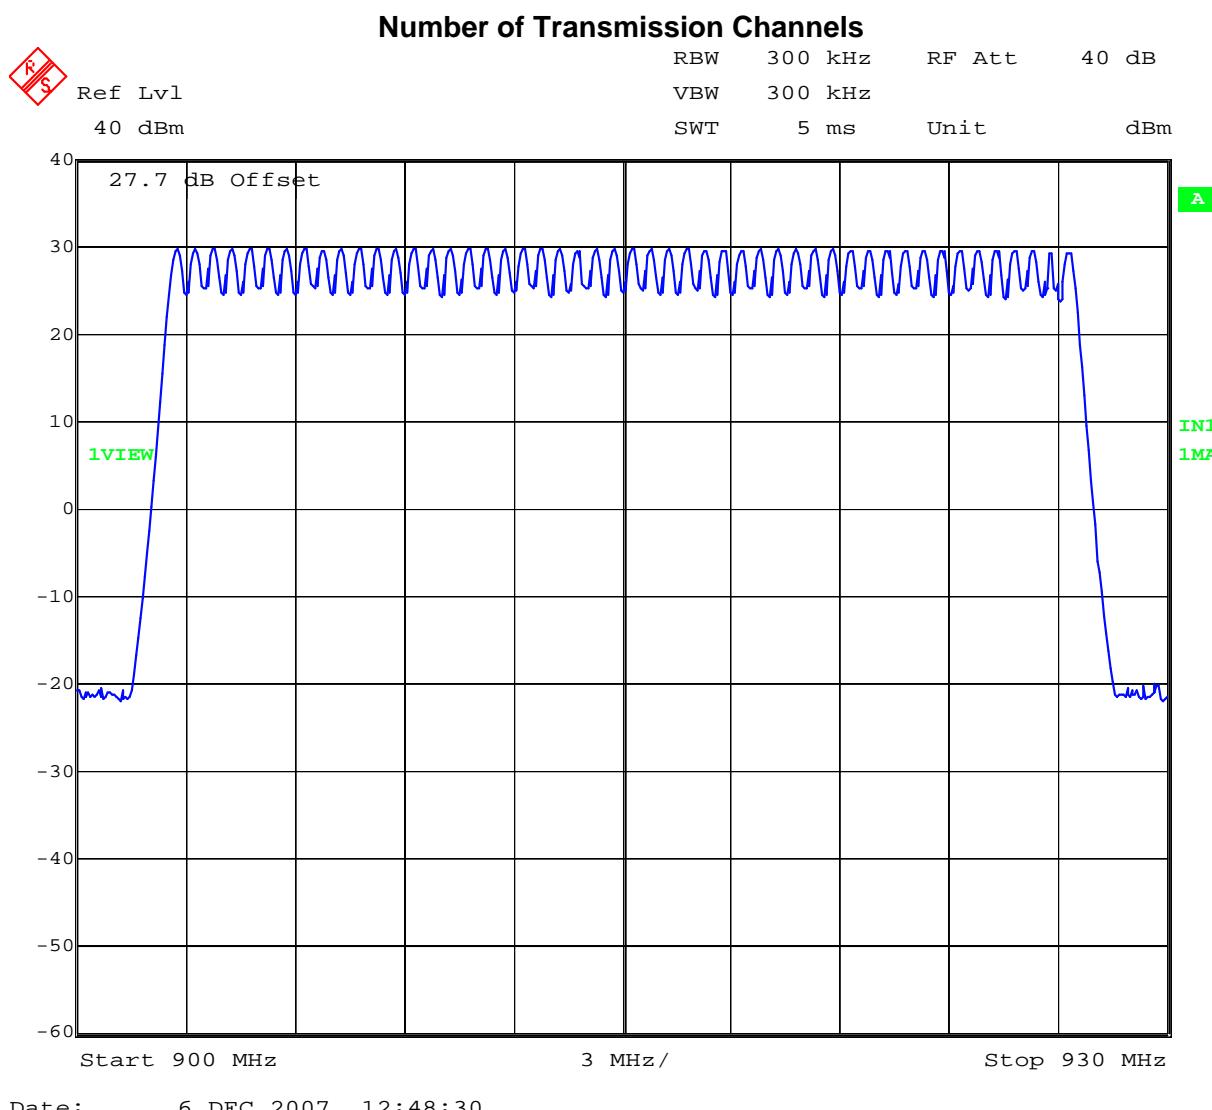

Date: 6.DEC.2007 12:48:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.3.2. Channel Occupancy

**FCC, Part 15 Subpart C §15.247(a)(1)  
Industry Canada RSS-210 §A8.1**


## Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

## Channel Dwell Time

## TABLE OF RESULTS

Channel #	Center Frequency (MHz)	Channel Dwell Time (single channel) (mSecs)
26	914.75	35.05

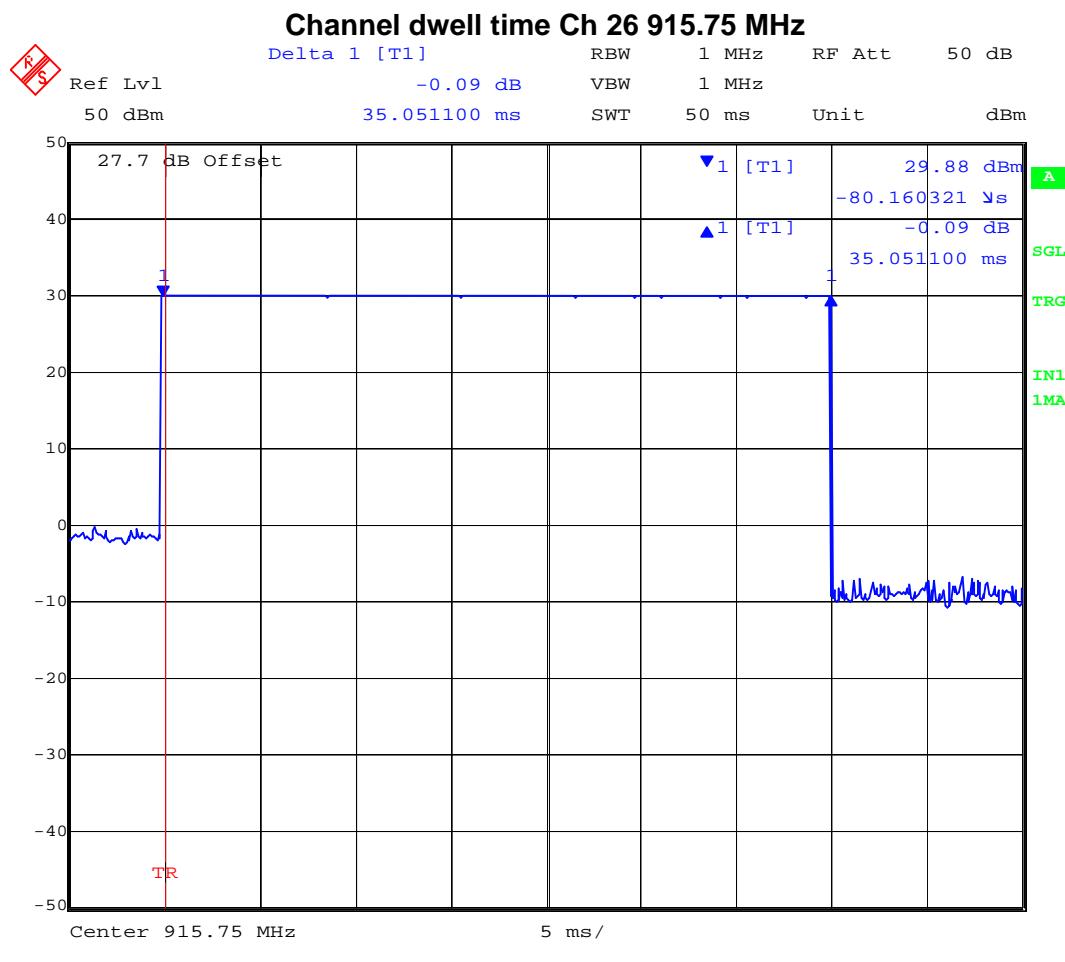


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Channel Occupancy

### TABLE OF RESULTS

Channel #	Center Frequency (MHz)	Channel Occupancy within 10 Second Period (mSeconds)
26	915.75	35.05

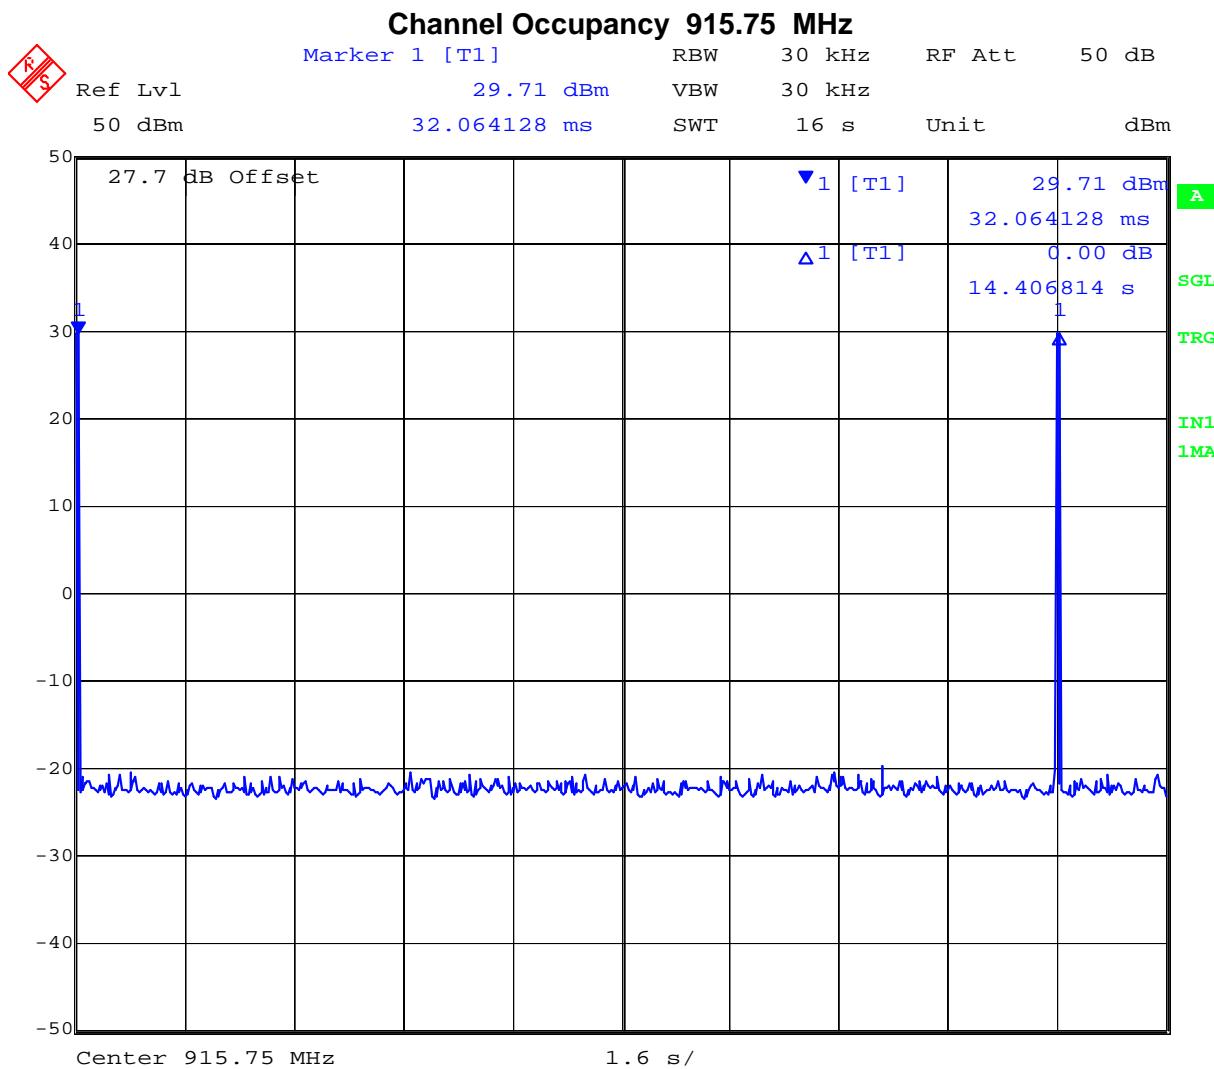

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 30 of 87

## Specification for Number of Channels and Channel Occupancy

### Limits

**FCC, Part 15 Subpart C §15.247(a)(1)**  
**Industry Canada RSS-210 §A8.1**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### Laboratory Uncertainty for Frequency Measurements

Measurement uncertainty	±0.86ppm
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement'	0078, 0134, 0158, 0184, 0193, 0250, 0252 0310, 0312.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


#### 5.1.4. Output Power

**FCC, Part 15 Subpart C §15.247(b)(2)**  
**Industry Canada RSS-210 §A8.4**

#### Test Procedure

The transmitter terminal of EUT was set for CW (continuous wave) operation and connected to the input of the power meter which was calibrated to measure power. The value of measured power including antenna cable loss was reported.

#### Test Measurement Set up

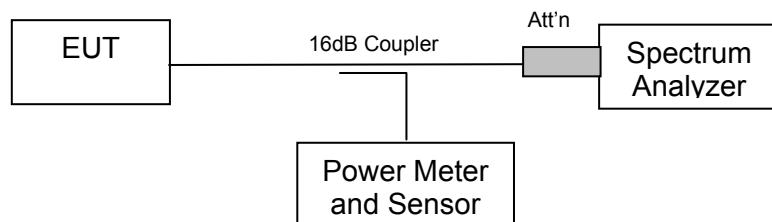

Measurement set up for Transmitter Output Power



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 32 of 87

---

### Measurement Results for Output Power

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS

Channel #	Center Frequency (MHz)	Power (dBm)
0	902.75	+29.60
26	915.75	+29.45
49	927.25	+29.10

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 33 of 87

## Specification

### Limits

**FCC, Part 15 Subpart C §15.247 (b)(2)** The maximum output power of the intentional radiator shall not exceed the following:

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

**Industry Canada RSS-210 §A8.4**

For frequency hopping systems operating in the 902 - 928 MHz band, the maximum peak conducted power output power is not to exceed 1.0 W if the hopset uses 50 or more hopping channels and 0.25 W if the hopset uses less than 50 hopping channels.

### Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 34 of 87

### **5.1.5. Maximum Permissible Exposure**

**FCC, Part 15 Subpart C §15.247(i)**

**Industry Canada RSS-Gen §5.5**

#### **Calculations for Maximum Permissible Exposure Levels**

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ (G \text{ (dBi)})/10$$

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm<sup>2</sup>

Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm <sup>2</sup> Limit(cm)	Minimum Separation Distance (cm)
6	4.0	+29.6	912.0	17.04	20*

**\*Note:** for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

#### **Specification**

##### **Maximum Permissible Exposure Limits**

**§15.247(i)** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines.

**FCC §1.1310** Limit = 1mW / cm<sup>2</sup> from 1.310 Table 1

**RSS-Gen §5.5** Before equipment certification is granted, the applicable requirements of RSS-102 shall be met.

#### **Laboratory Measurement Uncertainty for Power Measurements**

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.6. Conducted Spurious Emissions Transmitter

**FCC, Part 15 Subpart C §15.247(d)**  
**Industry Canada RSS-210 §A8.5**

#### Test Procedure

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

#### Test Measurement Set up



Band-edge measurement test configuration

#### Measurement Results of Conducted Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Conducted Band-Edge Results

TABLE OF RESULTS – 802.11b


Channel #	Center Frequency (MHz)	Band-edge Frequency (MHz)	Limit (dBm)	Amplitude @ Band-edge (dBm)	Margin (dB)
0	902.75	902.0	+9.59	-33.05	-42.62
49	927.25	928.0	+9.19	-33.49	-42.68

### Conducted Spurious Emissions at the 902 MHz Lower Band Edge

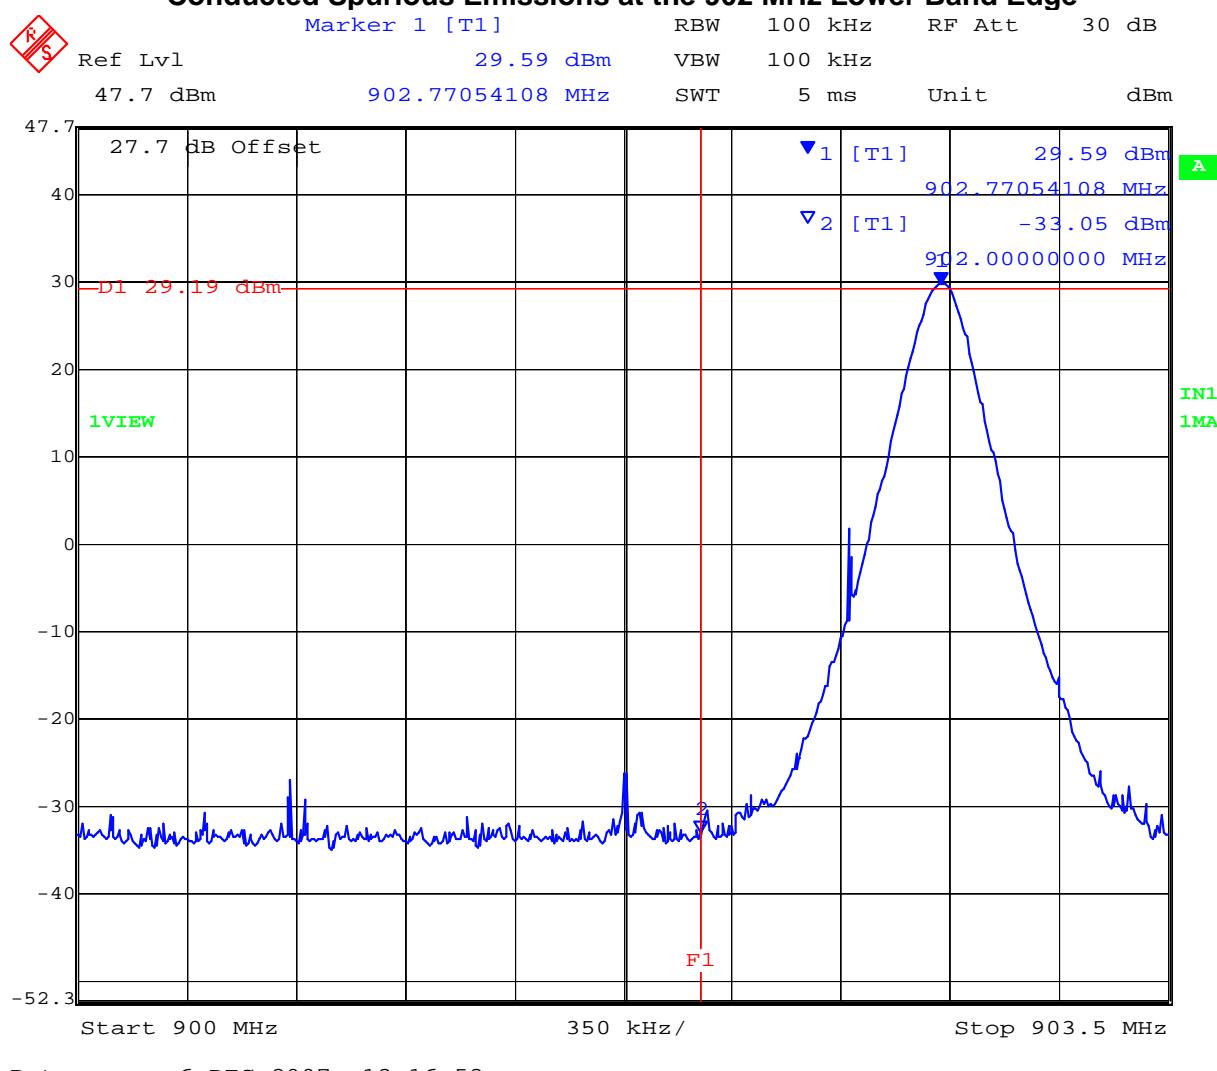

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Conducted Spurious Emissions at the 928 MHz Upper Band Edge

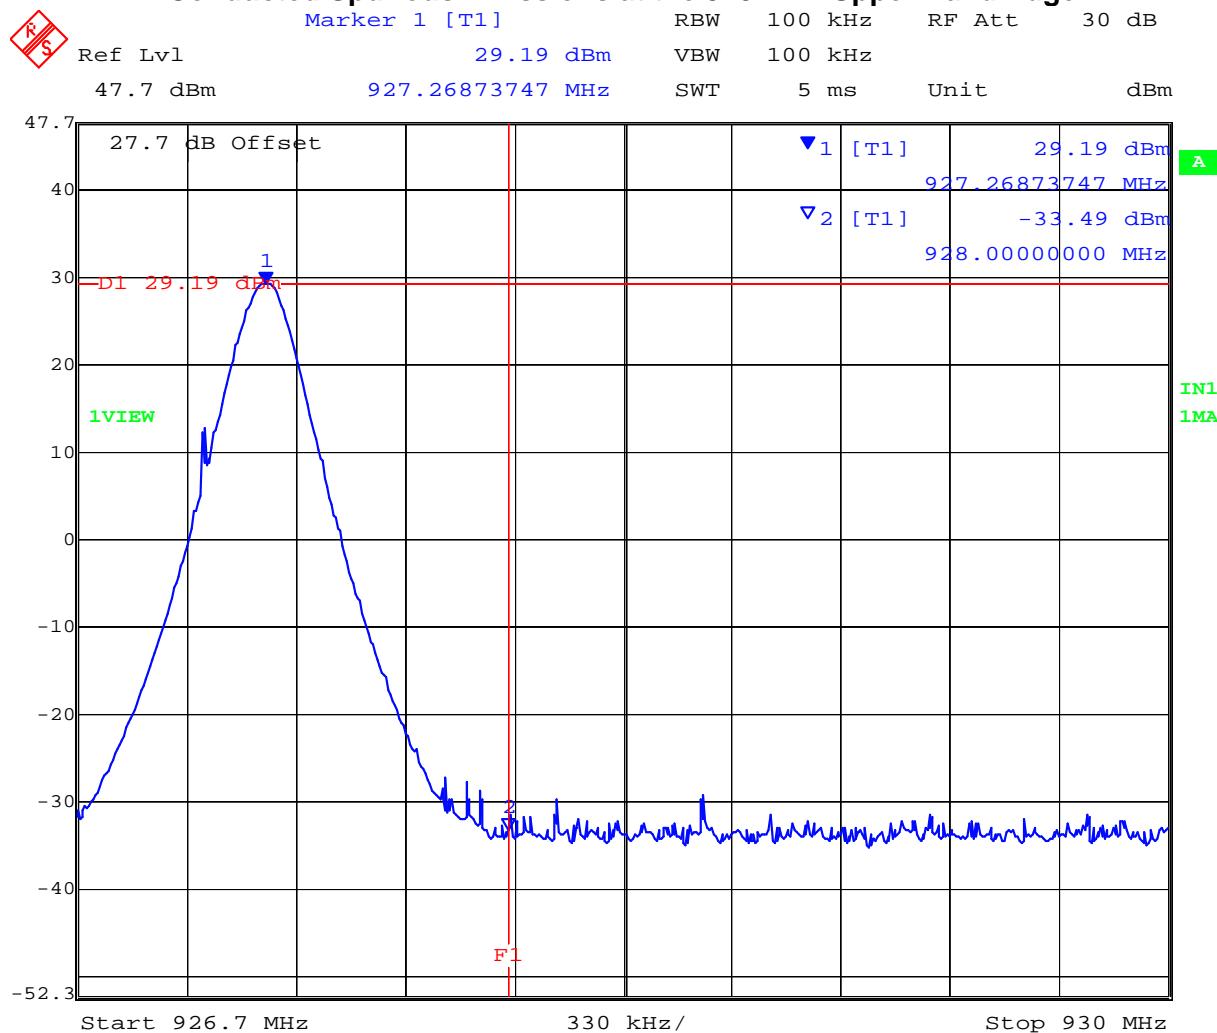

Date: 6.DEC.2007 13:14:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Spurious Emissions (1-10 GHz)


Conducted spurious emissions (1-10 GHz) are provided indicated by the following matrix. Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the band-edge measurements provided below are drawn on each plot.

TABLE OF RESULTS

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
902.75	30	7,000	-27.01	+9.18	-36.19
	7,000	10,000	-23.63		-32.81

The emission breaking the limit line is the carrier.


### Conducted Transmitter Spurious Emissions Channel 902.75 MHz - 30 MHz to 7,000 MHz

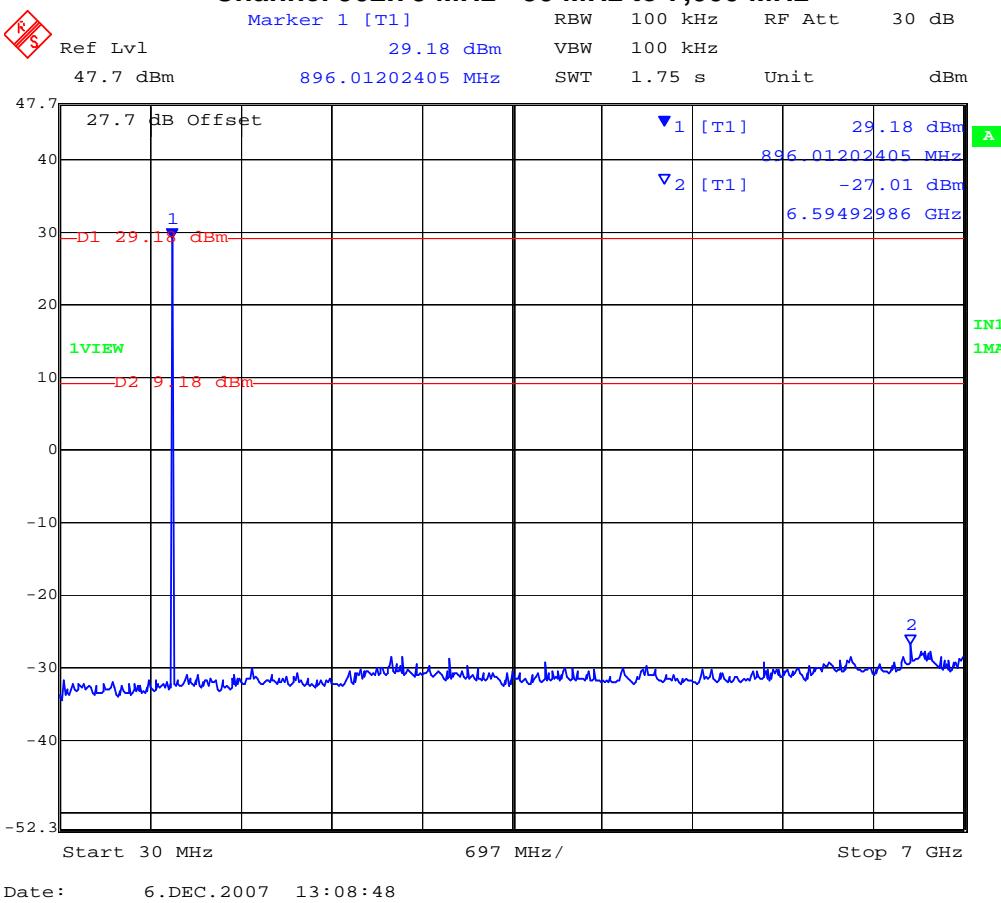

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Conducted Transmitter Spurious Emissions

#### Channel 902.75 MHz 7 to 10 GHz

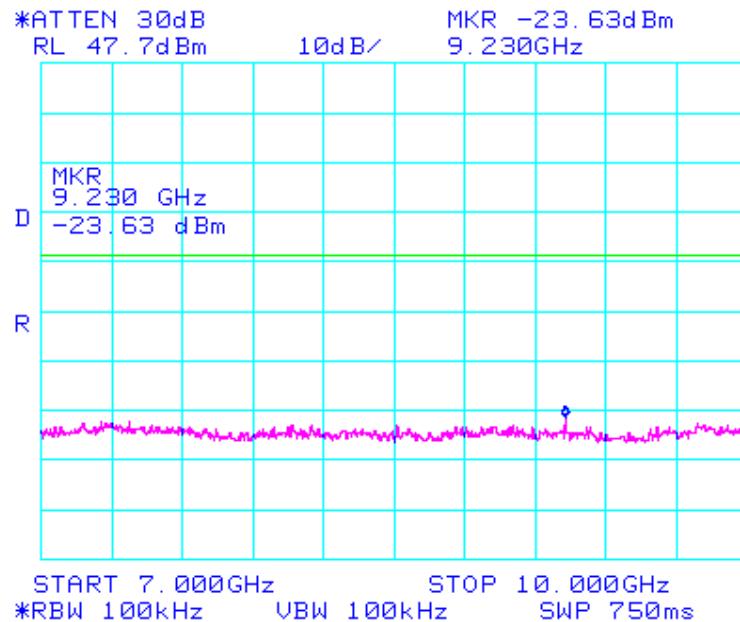


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
915.75	30	7,000	-27.24	+9.18	-36.42
	7,000	10,000	-23.97		-33.15

The emission breaking the limit line is the carrier.

### Conducted Transmitter Spurious Emissions

#### Channel 915.75 MHz - 30 MHz to 7,000 MHz

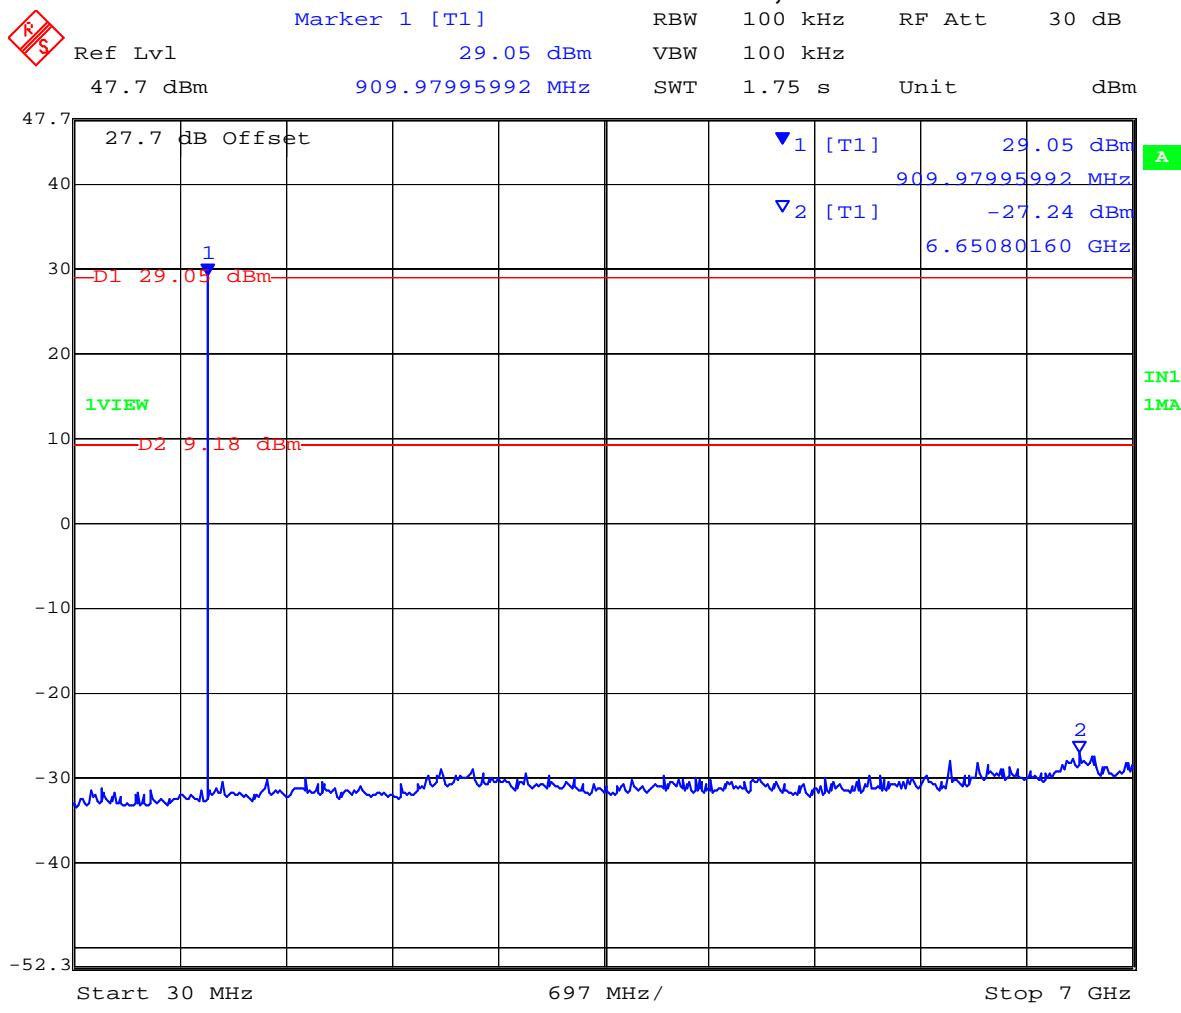


Date: 6.DEC.2007 13:10:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Conducted Transmitter Spurious Emissions

#### Channel 915.75 MHz - 7 to 10 GHz

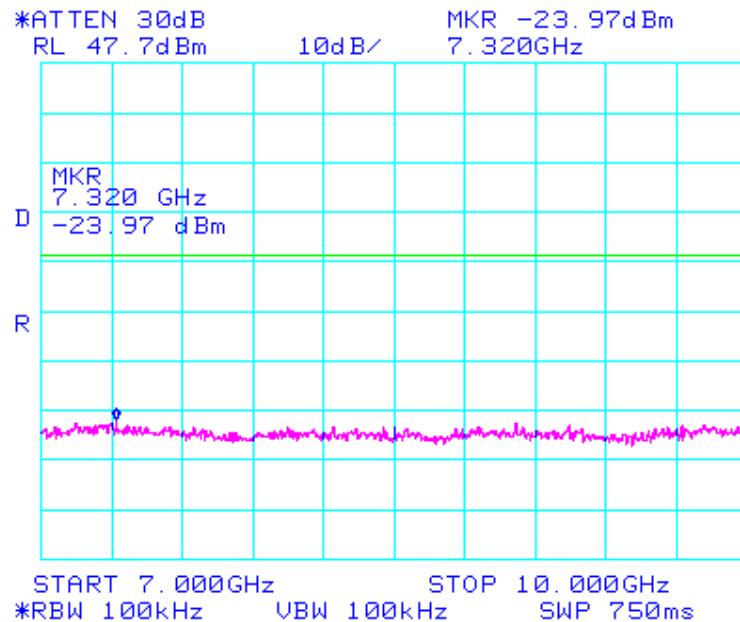


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
927.25	30	7,000	-27.72	+8.51	-36.23
	7,000	10,000	-24.30		-32.81

The emission breaking the limit line is the carrier.

### Conducted Transmitter Spurious Emissions

#### Channel 927.25 MHz - 30 MHz to 7,000 MHz

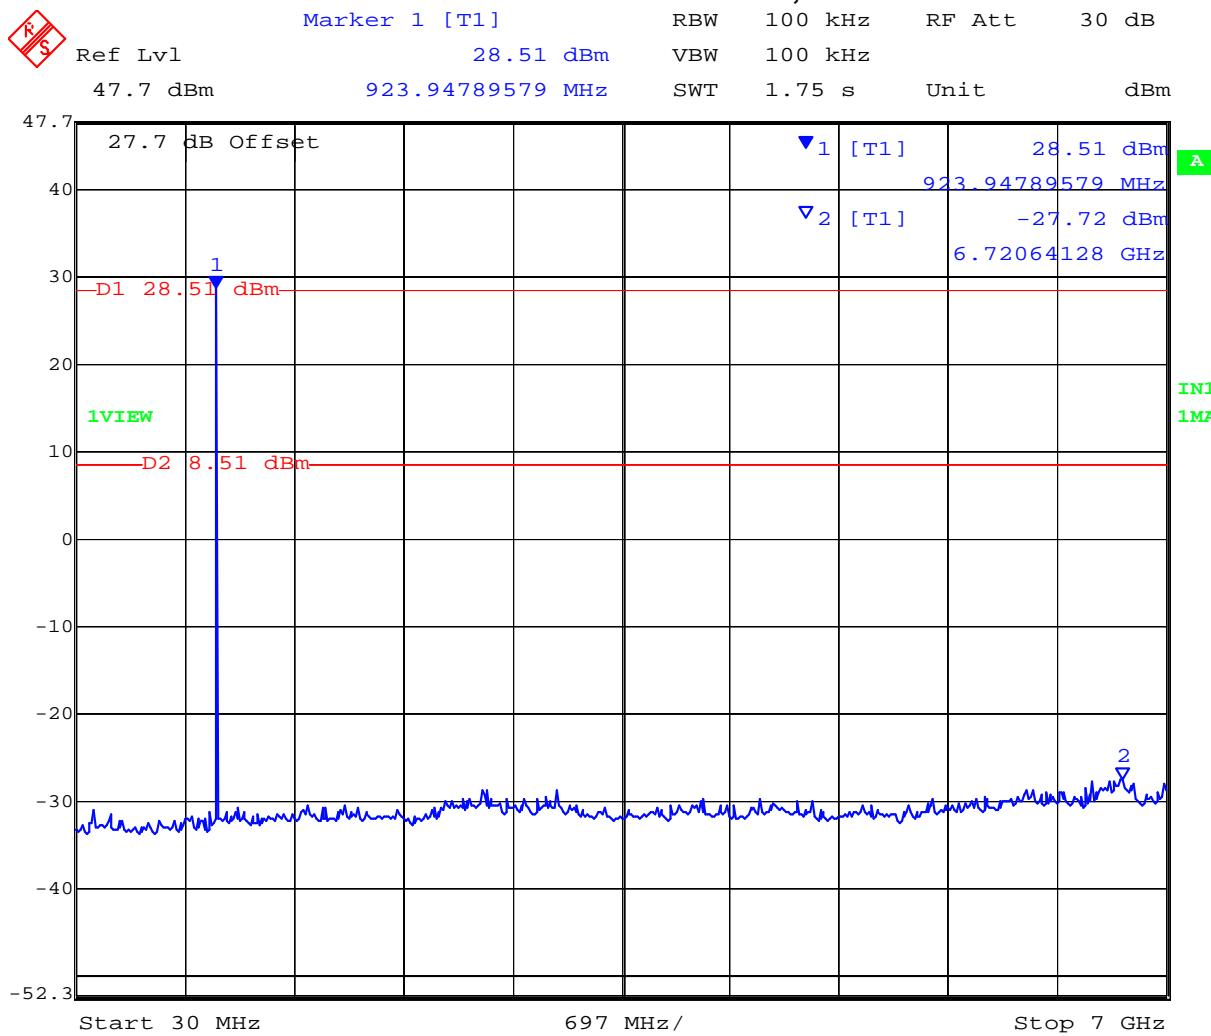


Date: 6.DEC.2007 13:12:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Conducted Transmitter Spurious Emissions

#### Channel 927.25 MHz - 7 to 10 GHz

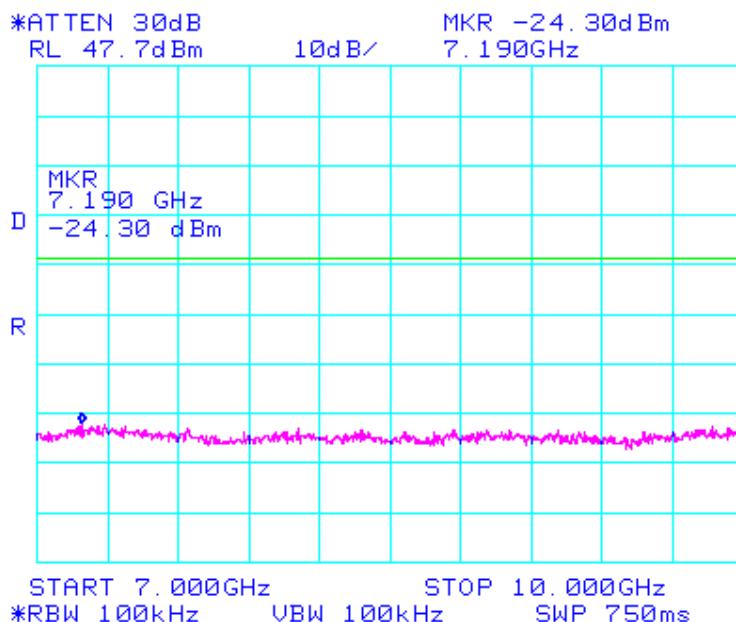

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 44 of 87

## Specification

### Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
902 MHz	928 MHz	≥ 20 dB

### FCC, Part 15 Subpart C §15.247(d)

### Industry Canada RSS-210 §A.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.7. Transmitter Radiated Spurious Emissions (above 1 GHz)


**FCC, Part 15 Subpart C §15.247(d)**  
**Industry Canada RSS-210 §A8.5**

#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### Test Measurement Set up

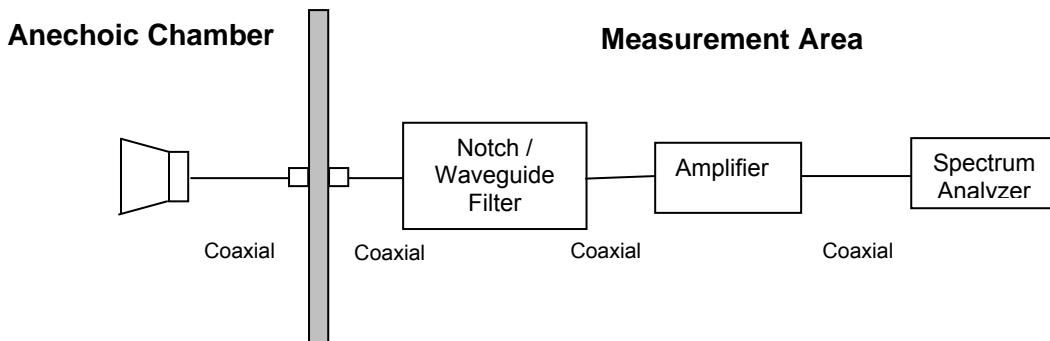

Measurement set up for Radiated Emission Test

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 46 of 87

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (\mu V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

#### Integral Antenna

Channel 0 – 902.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
902.753	48.06			134.65	Peak Emission	V					N/A	Peak
9027.482	50.61	6.21	-0.34	56.48	Peak Max	H	98	360	74	-17.52	Pass	
8124.664	48.98	5.67	-1.22	53.43	Peak Max	V	114	42	74	-20.57	Pass	
5416.488	58.47	4.62	-8.48	54.61	Peak Max	V	106	31	74	-19.39	Pass	
4513.818	56.9	4.18	-9.35	51.74	Peak Max	V	101	357	74	-22.26	Pass	
9027.482	45.55	6.21	-0.34	51.43	Average Max	H	98	360	54	-2.57	Pass	
8124.664	43.09	5.67	-1.22	47.54	Average Max	H	99	312	54	-6.46	Pass	
5416.488	55.34	4.62	-8.48	51.48	Average Max	V	106	31	54	-2.52	Pass	
4513.818	54.48	4.18	-9.35	49.31	Average Max	H	128	303	54	-4.69	Pass	
1967.936	41.58	10.11	0.04	51.73	Peak [Scan]	V	100	0	114.65	-62.92	Pass	NRB
1290.581	45.39	8.55	-3.08	50.86	Peak [Scan]	H	100	0	114.65	-63.79	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


### Ch 0 Integral Antenna Radiated Emissions Above 1 GHz (1 – 2 GHz)

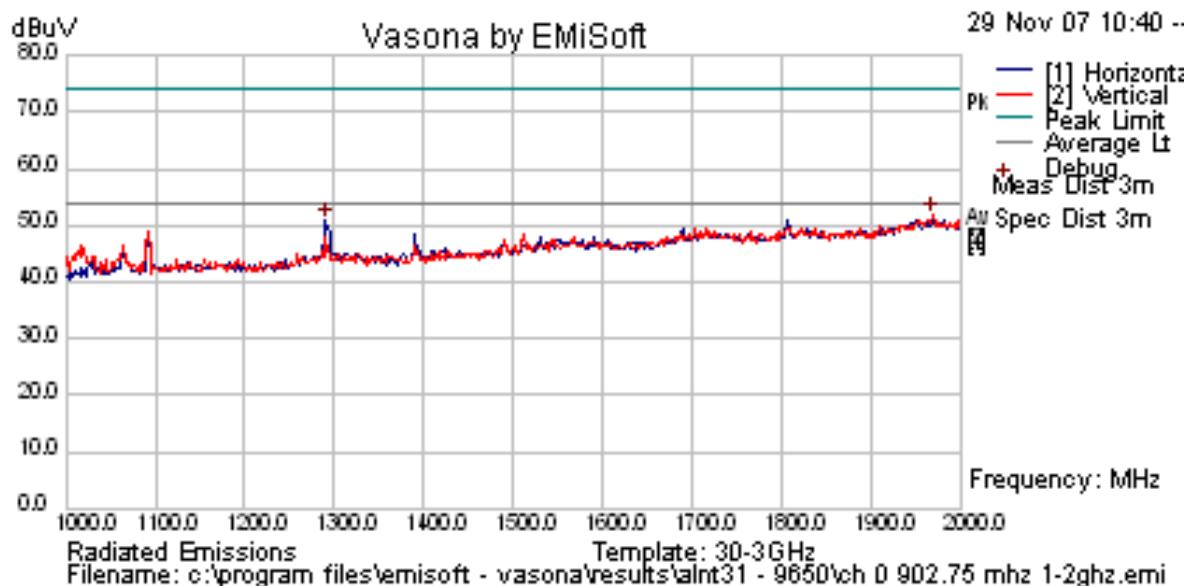

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Integral Antenna**

**Ch 0 Integral Antenna Radiated Emissions Above 1 GHz (2 – 10 GHz)**

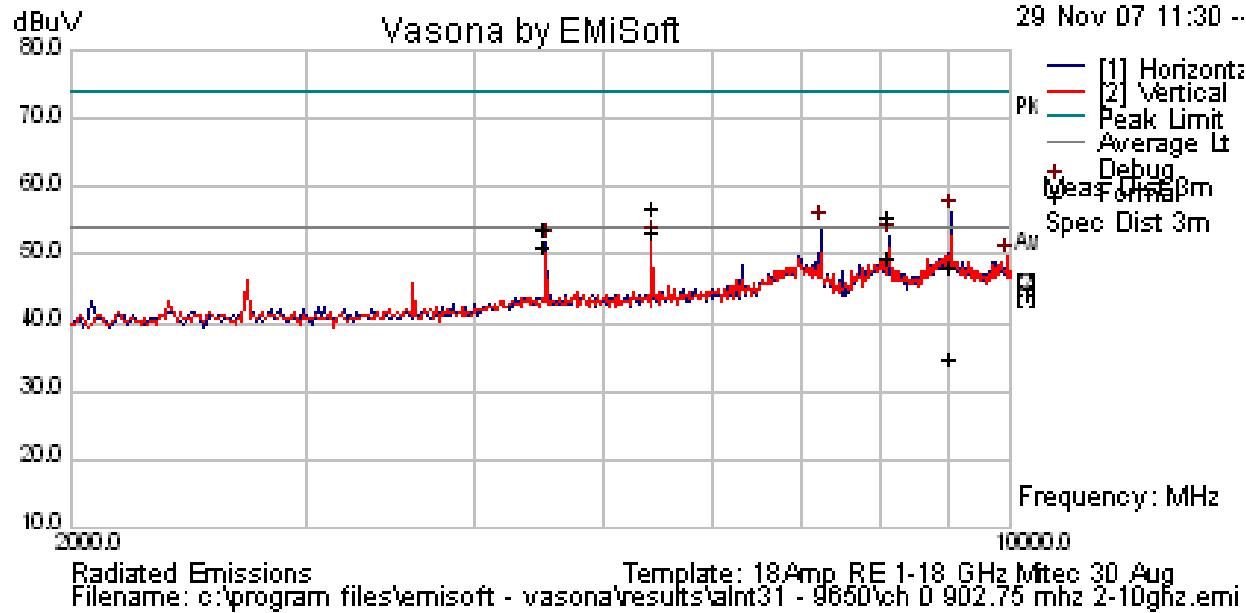

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Integral Antenna

Channel 26 – 915.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
915.758				134.23	Peak Emission						N/A	Peak
9157.511	51.38	6.22	-0.62	56.98	Peak Max	V	104	76	74	-17.02	Pass	
9157.511	46.73	6.22	-0.62	52.33	Average Max	V	104	76	54	-1.67	Pass	
1961.924	41.38	10.1	-0.06	51.42	Peak [Scan]	V	100	0	114.23	-62.81	Pass	NRB
1290.581	45.29	8.55	-3.08	50.76	Peak [Scan]	H	100	0	114.23	-63.47	Pass	NRB
1390.782	44.03	8.73	-3.34	49.41	Peak [Scan]	H	100	0	114.23	-64.82	Pass	NRB

Peak – Peak Emission


NRB – Non-restricted band emission

#### Ch 26 Integral Antenna Radiated Emissions Above 1 GHz (1 – 2GHz)

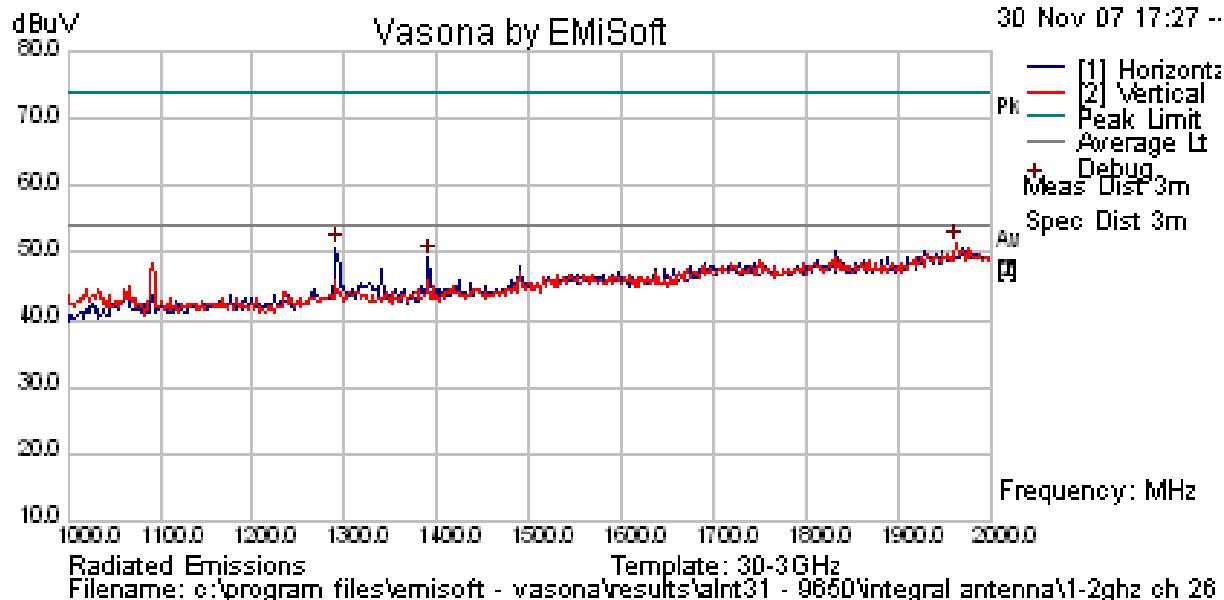

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Integral Antenna**

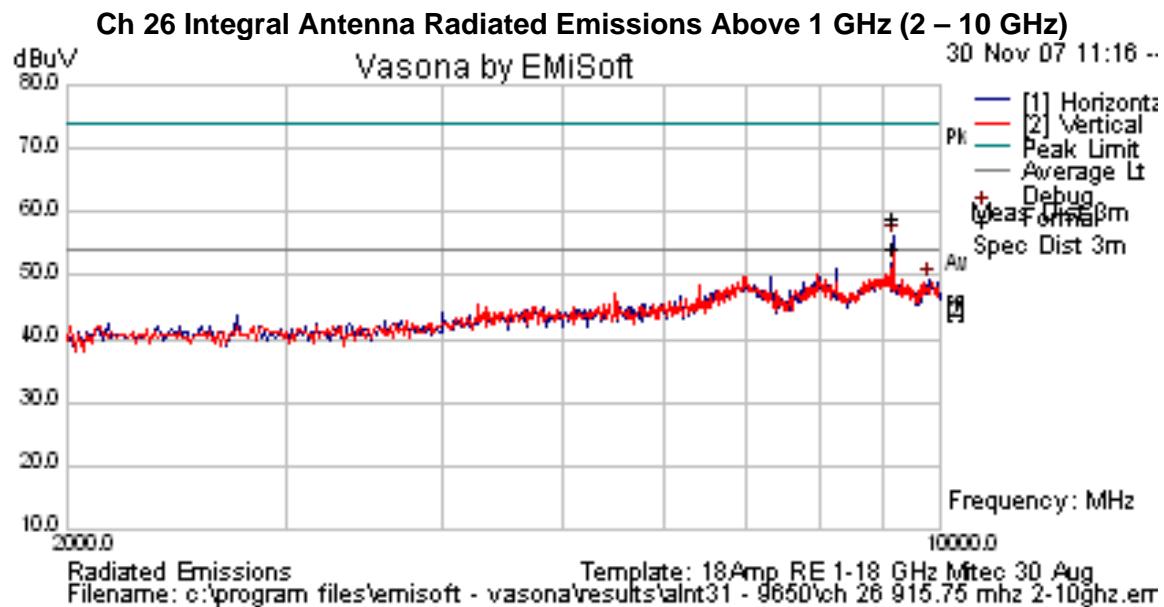

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Integral Antenna

Channel 49 – 915.75 MHz


### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
927.252				134.86	Peak Emission	V					N/A	Peak
9272.348	48.73	6.23	-0.83	54.13	Peak Max	H	110	350	74	-19.87	Pass	
9272.348	41.82	6.23	-0.83	47.22	Average Max	H	110	350	54	-6.78	Pass	
1290.581	45.18	8.55	-3.08	50.65	Peak [Scan]	H	100	0	114.86	-64.21	Pass	NRB
1985.972	40.4	10.13	0.05	50.58	Peak [Scan]	V	100	0	114.86	-64.28	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


### Ch 49 Integral Antenna Radiated Emissions Above 1 GHz (1 – 2GHz)

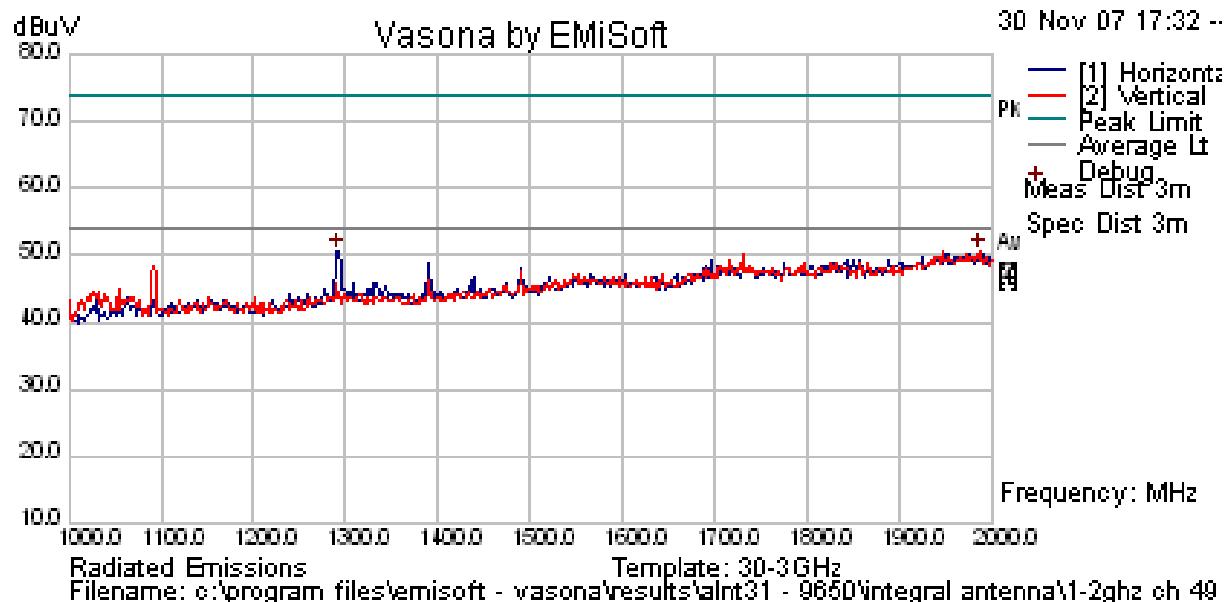

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Integral Antenna**

**Ch 49 Integral Antenna Radiated Emissions Above 1 GHz (2 – 10 GHz)**

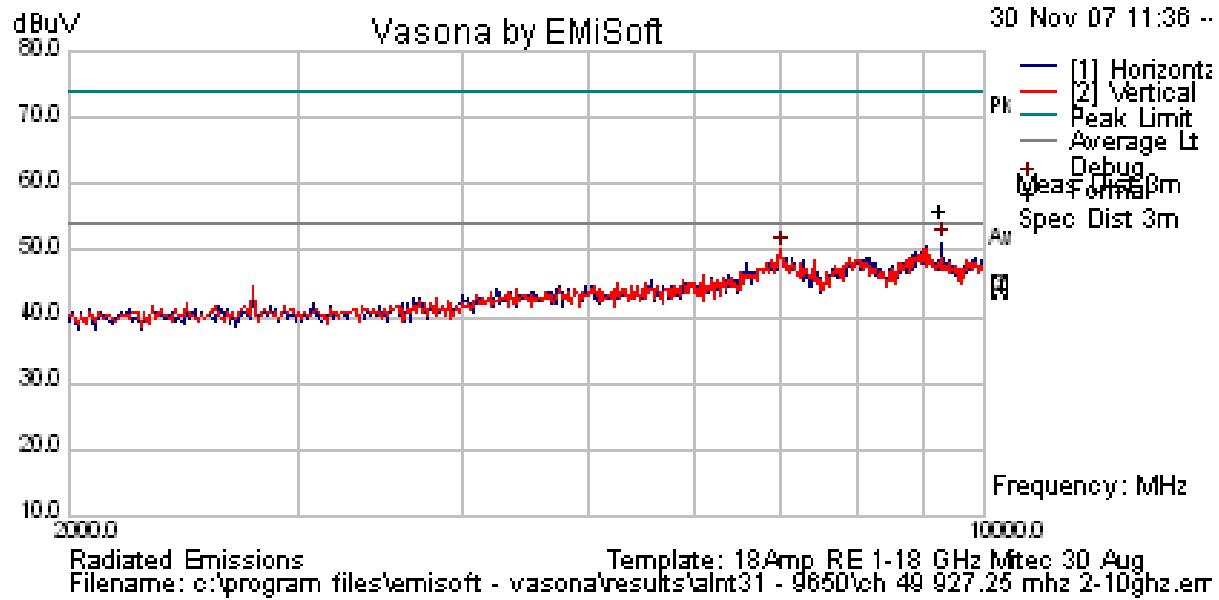

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9611CR

Channel 0 – 902.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
902.751				135.23	Peak Emission						N/A	Peak
7222.089	50.4	5.43	-2.93	52.9	Peak Max	H	100	42	74	-21.1	Pass	
9027.58	46.48	6.21	-0.34	52.35	Peak Max	H	100	42	74	-21.65	Pass	
8124.569	47.54	5.67	-1.22	51.99	Peak Max	H	100	245	74	-22.01	Pass	
7222.089	49.49	5.43	-2.93	51.99	Average Max	H	100	42	54	-2.01	Pass	
9027.58	45.96	6.21	-0.34	51.83	Average Max	H	100	42	54	-2.17	Pass	
8124.569	46.9	5.67	-1.22	51.35	Average Max	H	100	245	54	-2.65	Pass	
1092.619	47.71	7.89	-5	50.61	Peak Max	V	98	58	74	-23.39	Pass	
1092.619	42.5	7.89	-5	45.4	Average Max	V	98	58	54	-8.6	Pass	
1290.581	45.64	8.55	-3.08	51.1	Peak [Scan]	H	100	0	115.23	-64.13	Pass	NRB
1993.988	40.56	10.14	-0.13	50.57	Peak [Scan]	V	100	0	115.23	-64.66	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 0 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (1 – 2 GHz)

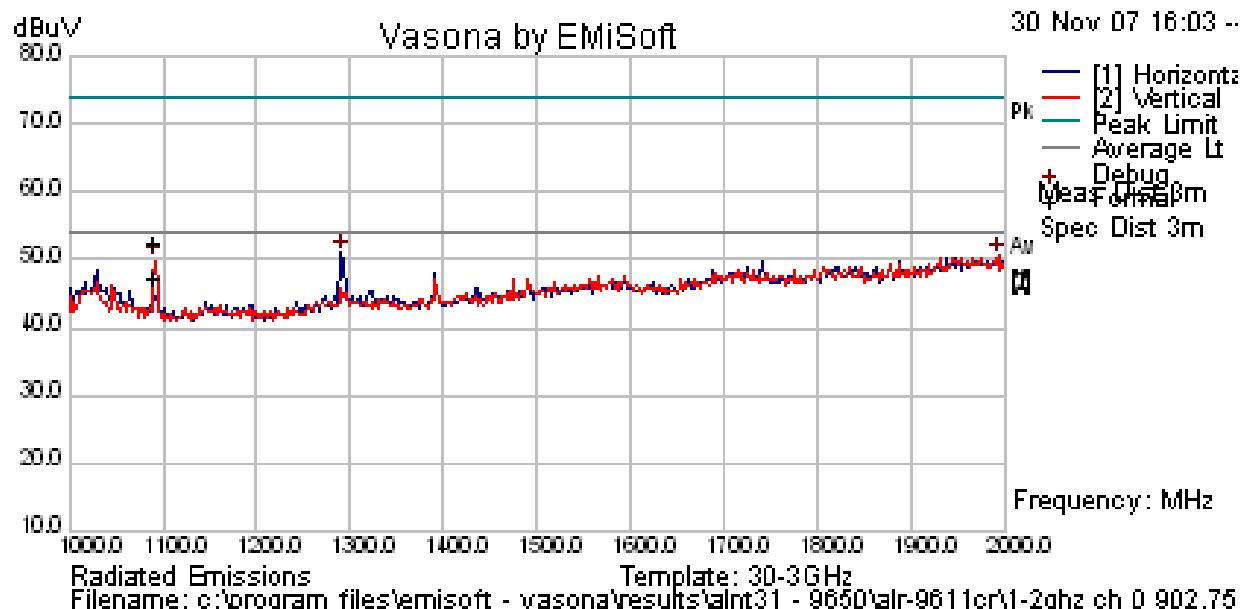

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ALR-9611CR

**Ch 0 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (2 – 10 GHz)**

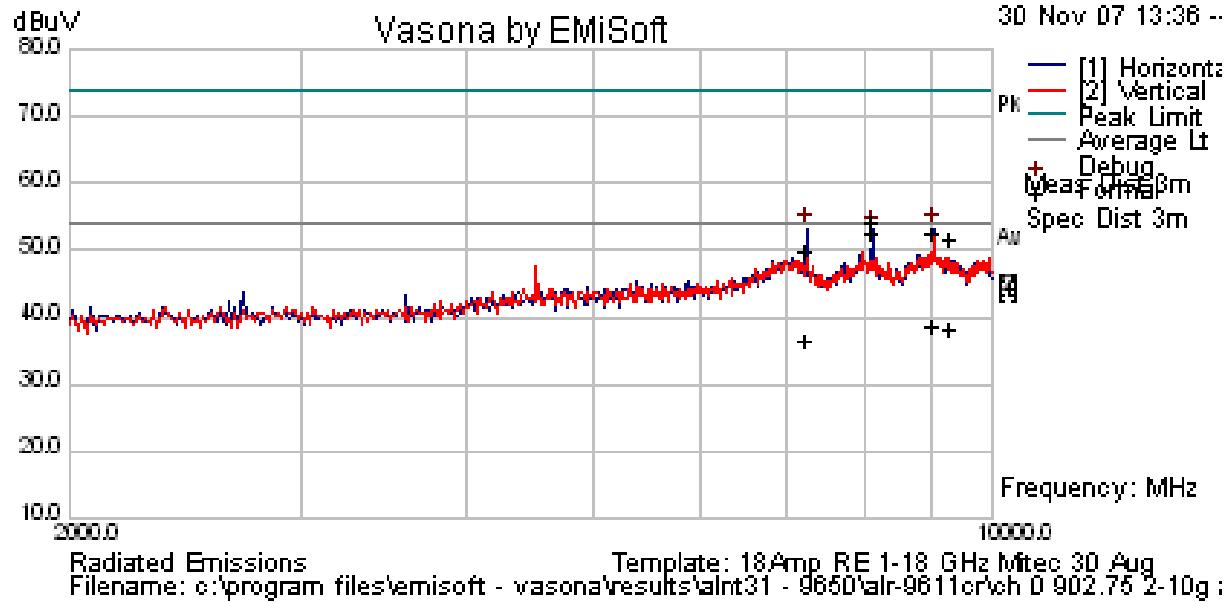

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9611CR

Channel 26 – 915.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
915.753				134.34	Peak Emission	V					N/A	Peak
9157.55	48.73	6.22	-0.62	54.33	Peak Max	V	98	42	74	-19.67	Pass	
7325.992	50.46	5.45	-3.56	52.35	Peak Max	V	137	244	74	-21.65	Pass	
1010.02	48.62	7.71	-5.99	50.34	Peak Max	H	100	0	74	-23.66	Pass	
1090.18	46.15	7.89	-5.02	49.02	Peak Max	V	100	0	74	-24.98	Pass	
9157.55	41.72	6.22	-0.62	47.32	Average Max	V	98	42	54	-6.68	Pass	
7325.992	46.86	5.45	-3.56	48.75	Average Max	V	98	244	54	-5.25	Pass	
1010.02	48.62	7.71	-5.99	50.34	Average Max	H	100	0	54	-3.66	Pass	
1090.18	46.15	7.89	-5.02	49.02	Average Max	V	100	0	54	-4.98	Pass	
1887.776	42.04	9.98	-0.42	51.59	Peak [Scan]	H	100	0	114.34	-62.75	Pass	NRB
1290.581	46.09	8.55	-3.08	51.56	Peak [Scan]	H	100	0	114.34	-62.78	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 26 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (1 – 2GHz)

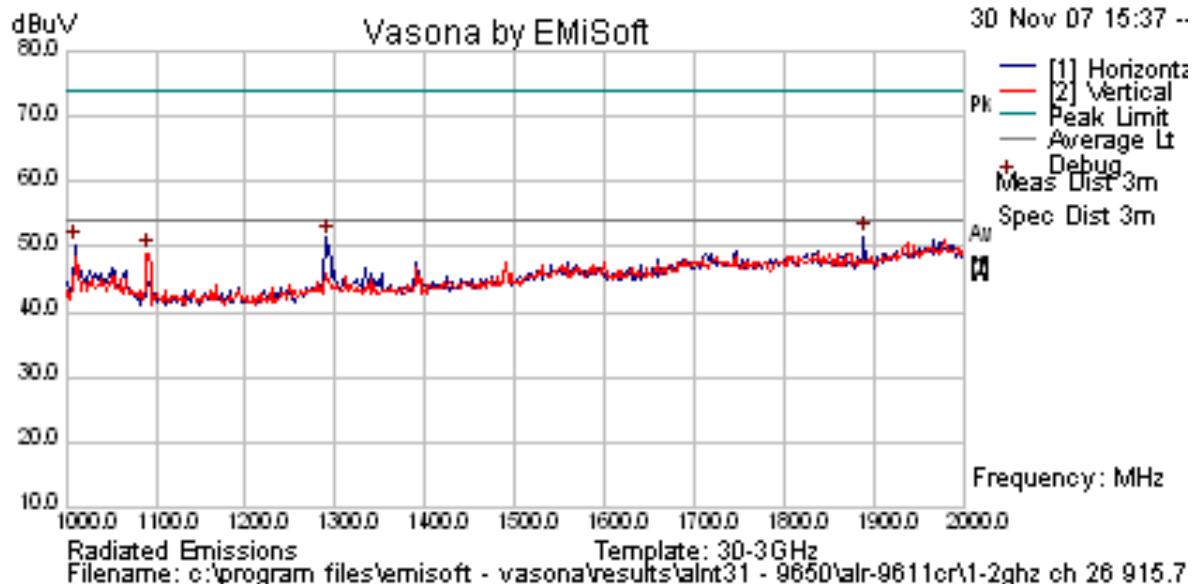

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ALR-9611CR

**Ch 26 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (2 – 10 GHz)**

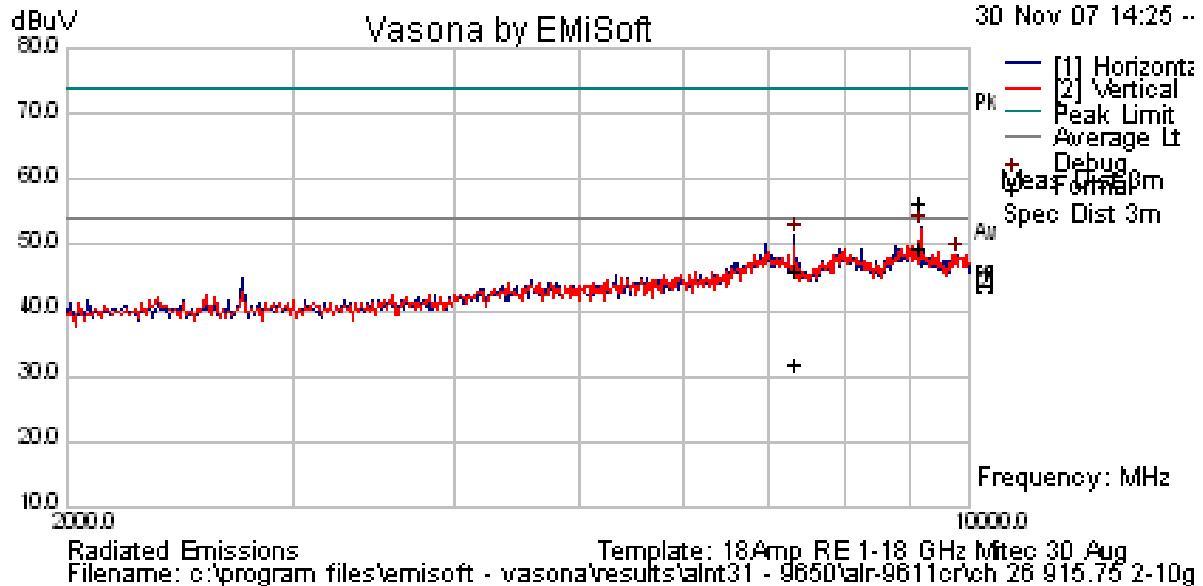

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9611CR

Channel 49 – 927.25 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
927.253				134.23	Peak Emission						N/A	Peak
1019.759	44.58	7.74	-5.85	46.46	Peak Max	V	98	9	74	-27.54	Pass	
1092.635	47.06	7.89	-5	49.96	Peak Max	V	153	49	74	-24.04	Pass	
1019.759	33.57	7.74	-5.85	35.45	Average Max	H	112	199	54	-18.55	Pass	
1092.635	41.85	7.89	-5	44.75	Average Max	V	153	49	54	-9.25	Pass	
8996.108	44.48	6.21	-0.45	50.24	Peak [Scan]	H	100	0	114.23	-63.99	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 49 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (1 – 2GHz)

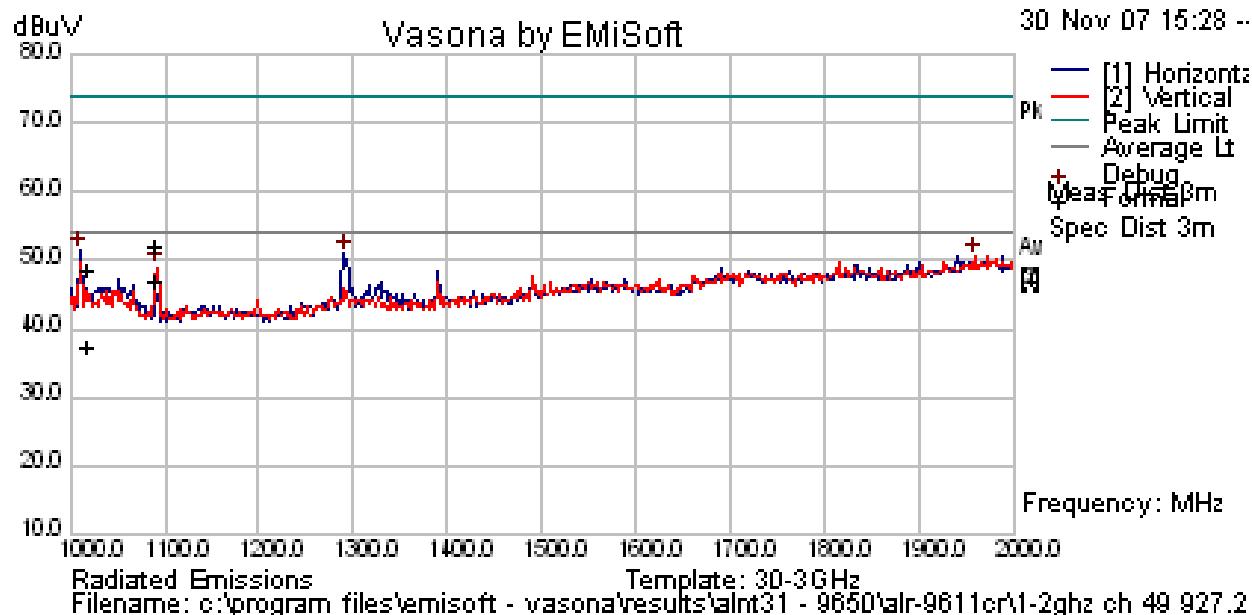

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ALR-9611CR

**Ch 49 Antenna ALR-9611CR Radiated Emissions Above 1 GHz (2 – 10 GHz)**

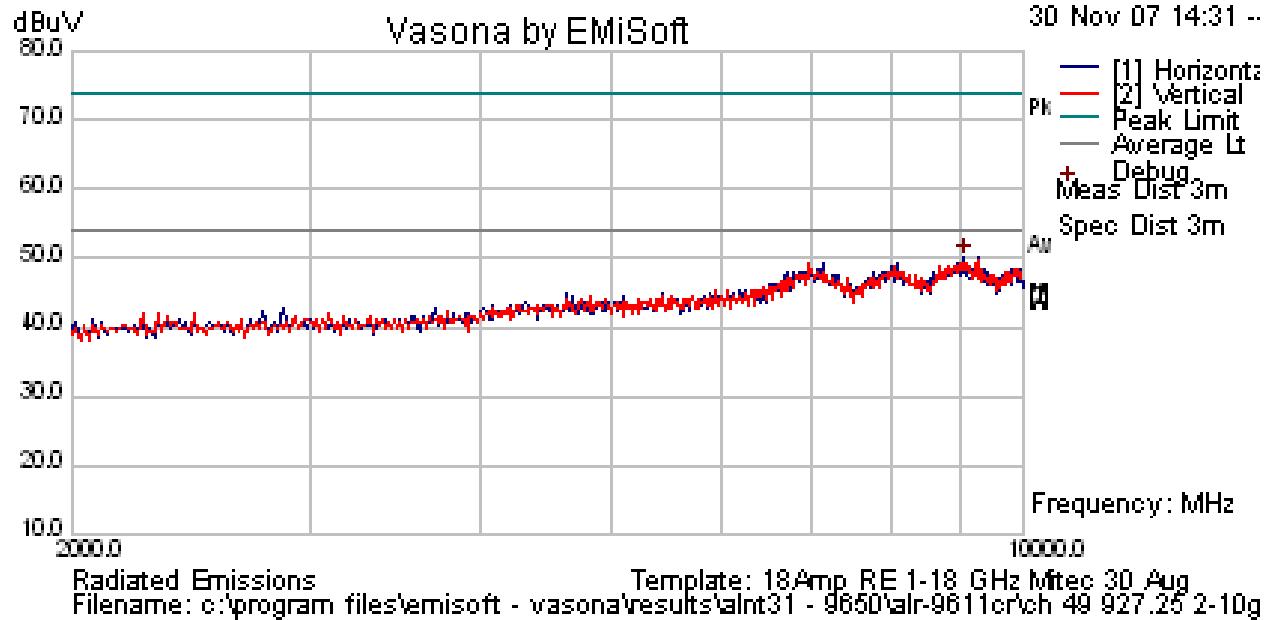

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9610AL

Channel 0 – 902.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
902.751				135.62	Peak Emission	V					N/A	Peak
9027.455	46.5	6.21	-0.34	52.37	Peak Max	V	127	149	74	-21.63	Pass	
8124.724	46.56	5.67	-1.22	51.01	Peak Max	V	135	98	74	-22.99	Pass	
7222.094	49.99	5.43	-2.93	52.49	Peak Max	V	134	360	74	-21.51	Pass	
1092.555	47.58	7.89	-5	50.48	Peak Max	V	106	58	74	-23.52	Pass	
1026.623	45.25	7.75	-5.73	47.26	Peak Max	V	123	176	74	-26.74	Pass	
9027.455	45.87	6.21	-0.34	51.74	Average Max	H	98	49	54	-2.26	Pass	
8124.724	47.38	5.67	-1.22	51.83	Average Max	H	98	47	54	-2.17	Pass	
7222.094	48.52	5.43	-2.93	51.02	Average Max	H	98	47	54	-2.98	Pass	
1092.555	41.95	7.89	-5	44.85	Average Max	V	106	58	54	-9.15	Pass	
1026.623	31.6	7.75	-5.73	33.62	Average Max	V	123	176	54	-20.38	Pass	
1949.9	40.54	10.08	-0.1	50.52	Peak [Scan]	V	100	0	54	-3.48	Pass	NRB
1290.581	45.9	8.55	-3.08	51.37	Peak [Scan]	H	100	0	54	-2.63	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 0 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (1 – 2 GHz)

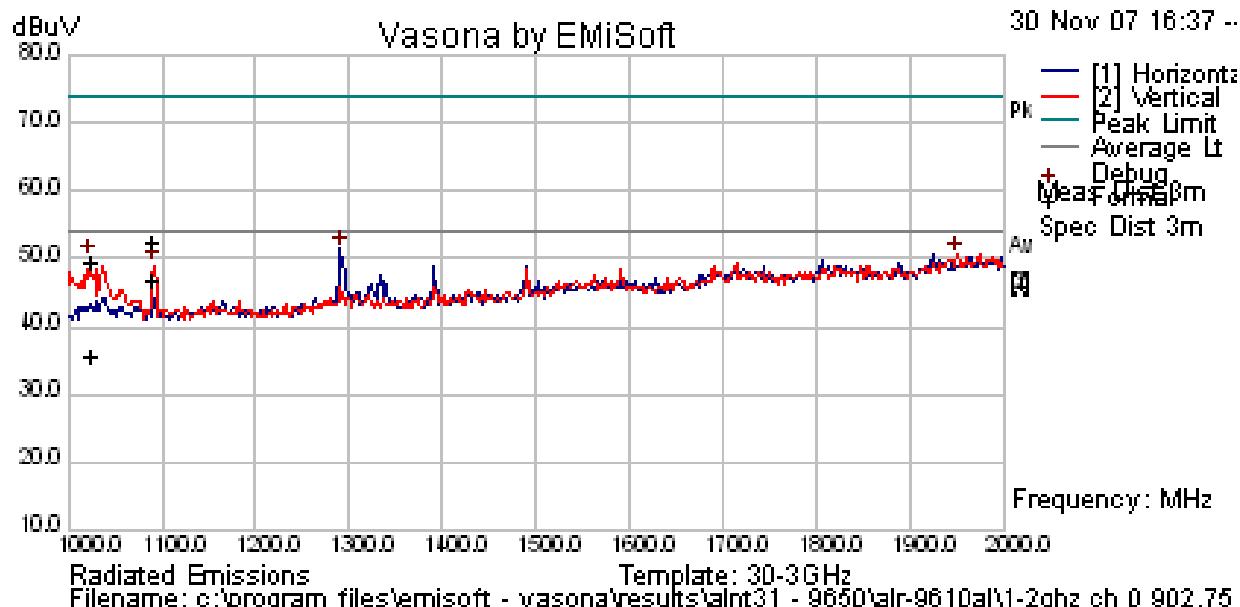

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ALR-9610AL

**Ch 0 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (2 – 10 GHz)**

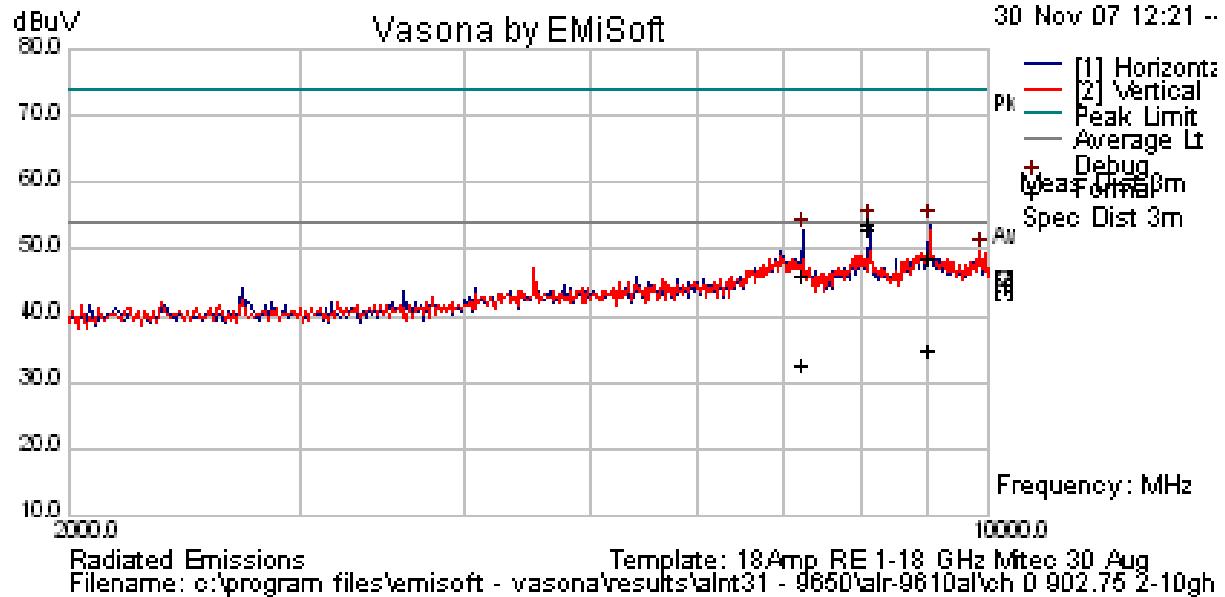

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9610AL

Channel 26 – 915.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
915.752				134.96	Peak Emission	V						Peak
1011.633	50.74	7.72	-5.97	52.49	Peak Max	V	98	199	74	-21.51	Pass	
1092.895	47.19	7.9	-5	50.09	Peak Max	V	98	56	74	-23.91	Pass	
1011.633	45.14	7.72	-5.97	46.89	Average Max	V	98	199	54	-7.11	Pass	
1092.895	40.06	7.9	-5	42.96	Average Max	V	98	56	54	-11.04	Pass	
9157.495	48.85	6.22	-0.62	54.45	Peak Max	V	98	86	74	-19.55	Pass	
9157.495	43.83	6.22	-0.62	49.43	Average Max	H	98	357	54	-4.57	Pass	
1961.924	41.46	10.1	-0.06	51.5	Peak [Scan]	H	100	0	54	-2.5	Pass	NRB
1290.581	45.93	8.55	-3.08	51.39	Peak [Scan]	H	100	0	54	-2.61	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 26 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (1 – 2GHz)

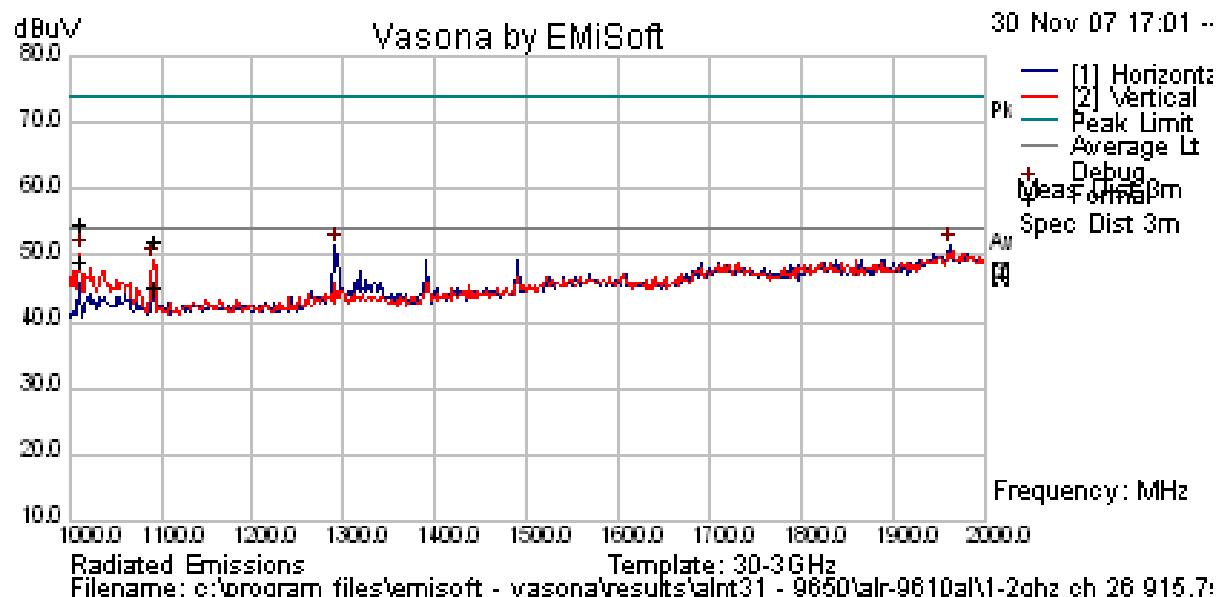

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Antenna ALR-9610AL**

**Ch 26 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (2 – 10 GHz)**

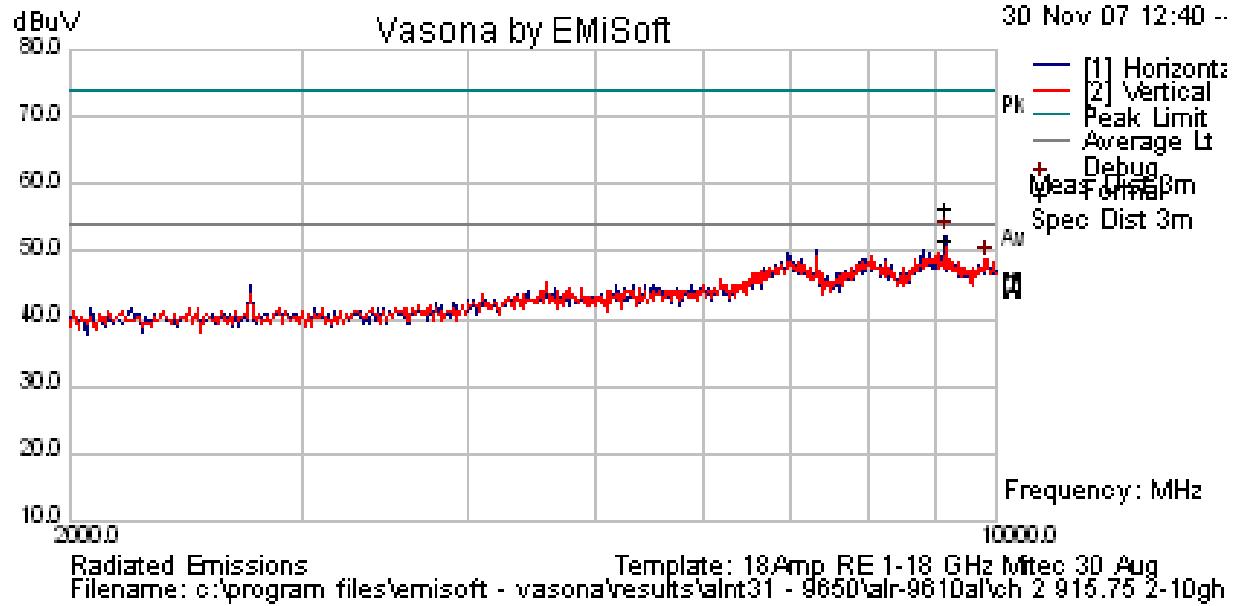

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Antenna ALR-9610AL

Channel 49 – 915.75 MHz


#### TABLE OF RESULTS

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
927.25				134.31	Peak Emission	V					N/A	Peak
1021.815	44.84	7.74	-5.82	46.76	Peak Max	V	119	200	74	-27.24	Pass	
1021.815	39.48	7.74	-5.82	41.4	Average Max	H	98	155	54	-12.6	Pass	
1290.581	45.75	8.55	-3.08	51.22	Peak [Scan]	H	100	0	114.31	-63.09	Pass	NRB
1961.924	40.88	10.1	-0.06	50.92	Peak [Scan]	H	100	0	114.31	-63.39	Pass	NRB

Peak – Peak Emission

NRB – Non-restricted band emission


#### Ch 49 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (1 – 2GHz)

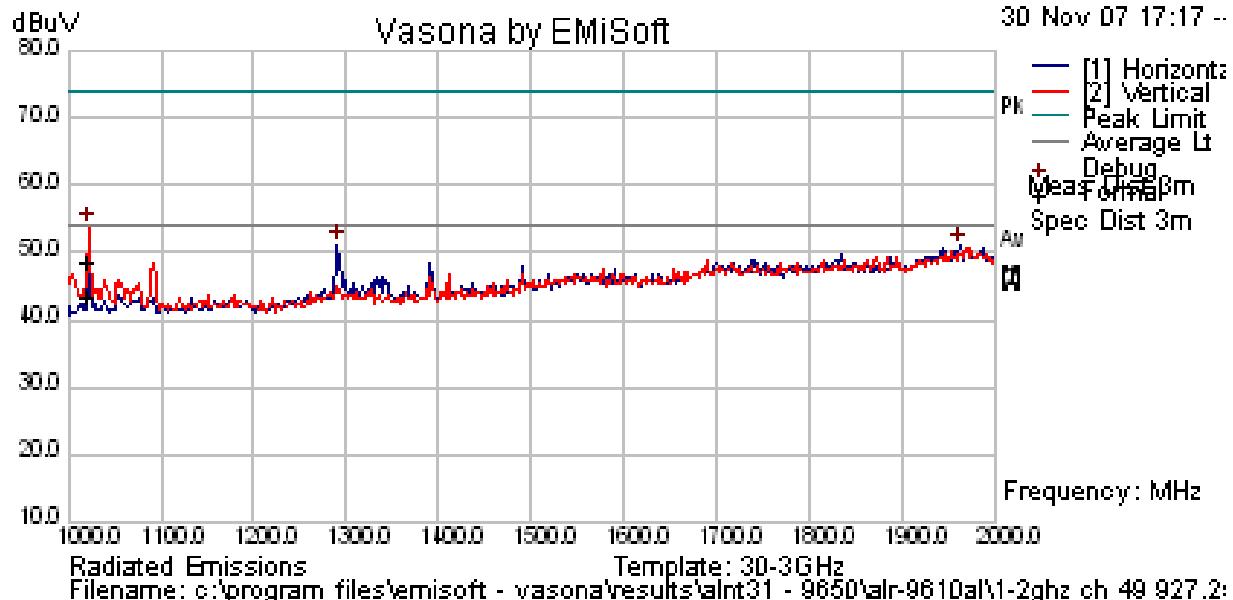

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ALR-9610AL

**Ch 49 Antenna ALR-9610AL Radiated Emissions Above 1 GHz (2 – 10 GHz)**

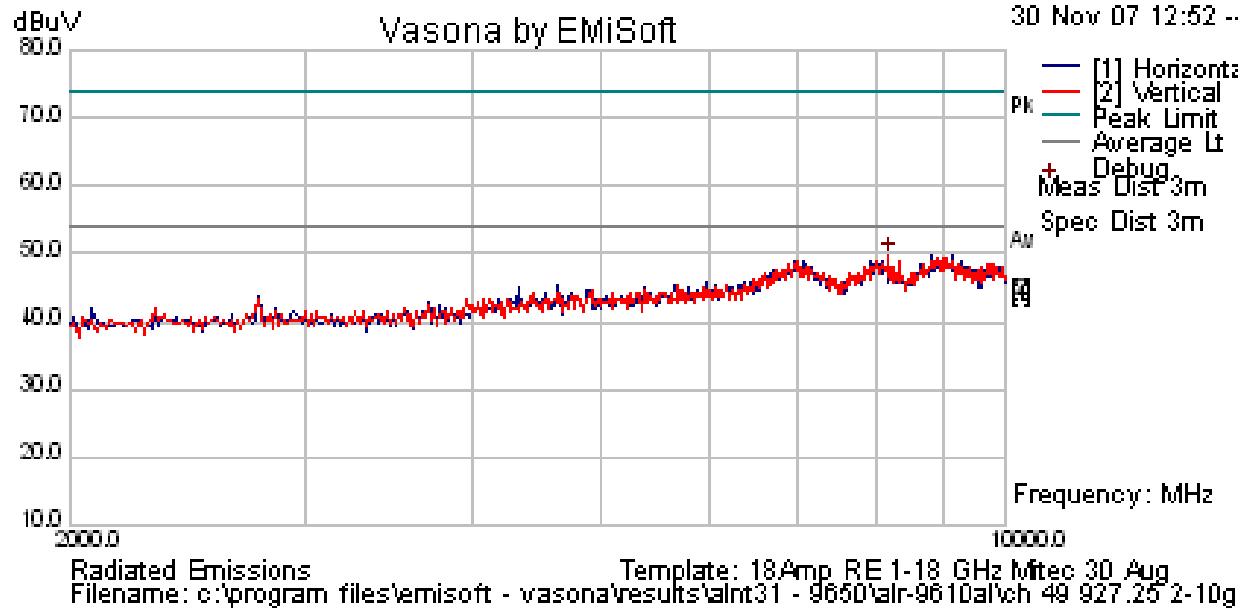

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 65 of 87

**FCC, Part 15 Subpart C §15.247(d)  
Industry Canada RSS-210 §A8.5**

**Specification**

**FCC Part 15 Subpart C §15.247(d)**

**Industry Canada §A8.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

**Laboratory Measurement Uncertainty for Radiated Emissions**

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.8. Receiver Radiated Spurious Emissions (Stand-By Mode)

#### Industry Canada RSS-Gen §7.2.3

##### Test Procedure

Conducted Stand-By emissions were measured on the device on the mid channel. The EUT was placed in Stand-By mode and emissions were measured 30 MHz – 10 GHz.

##### Test Measurement Set up

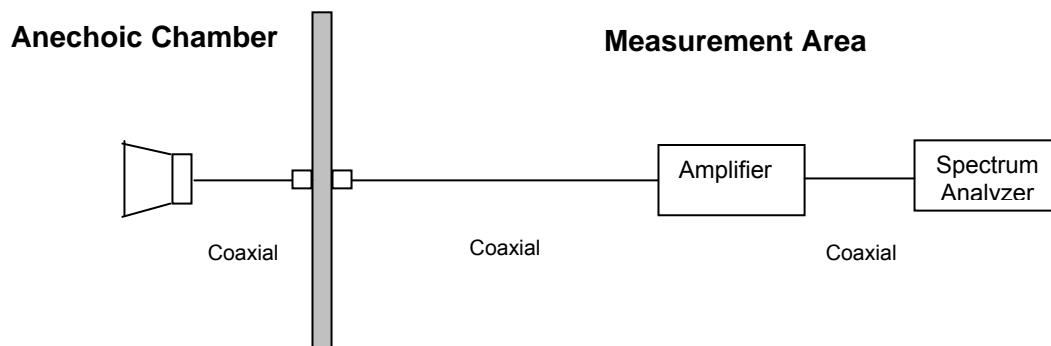

Stand-By spurious emissions test configuration

##### Measurement Results of Stand –By Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Stand-By Mode Spurious Emissions 1 - 10 GHz

#### Integral Antenna


##### Integral Antenna Spurious Emissions Stand-By Mode 1 – 10 GHz

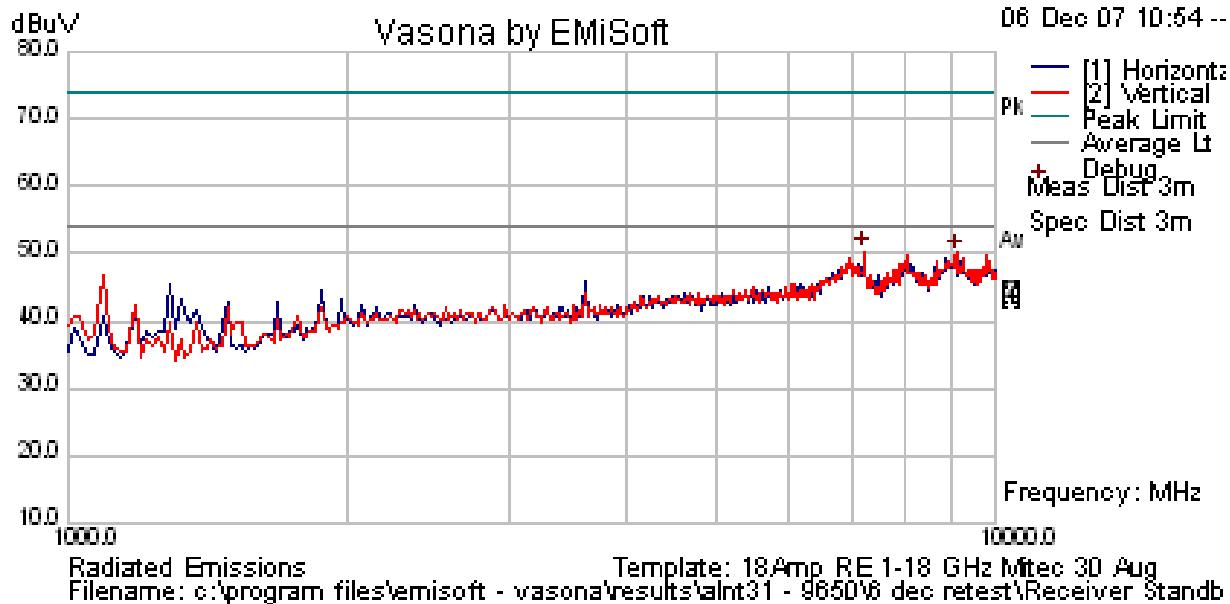

No emissions were observed breaking the limit.

**Antenna ALR-9611CR**


**Antenna ALR-9611CR Spurious Emissions Stand-By Mode 1 – 10 GHz**

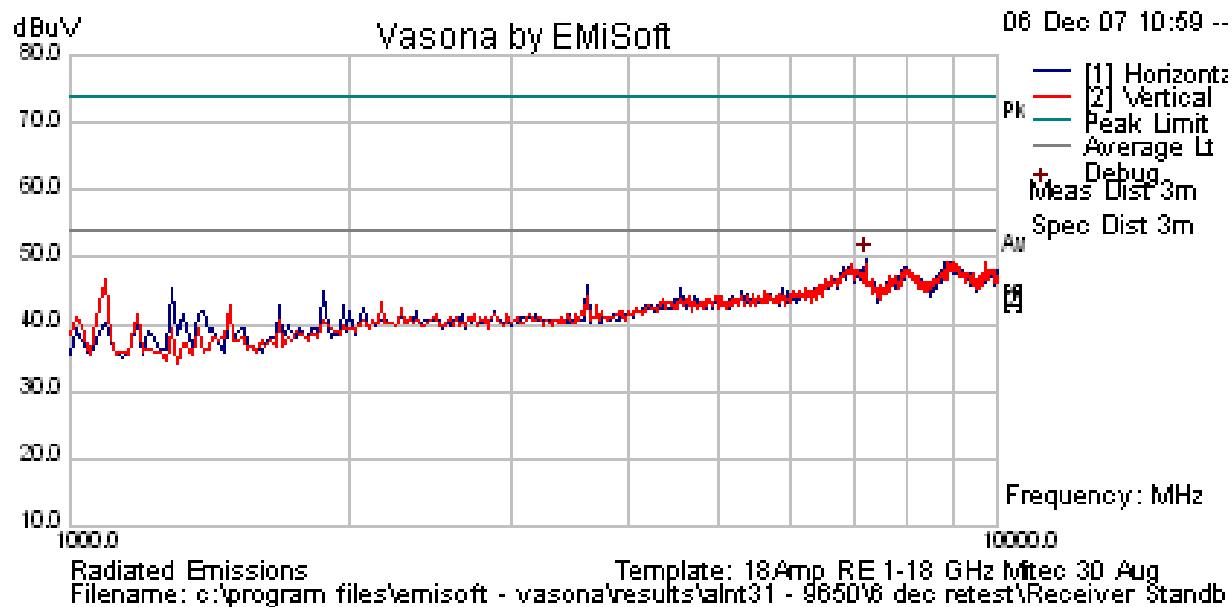

No emissions were observed breaking the limit.

## Antenna ALR-9610AL

### Antenna ALR-9610AL Spurious Emissions Stand-By Mode 1 – 10 GHz

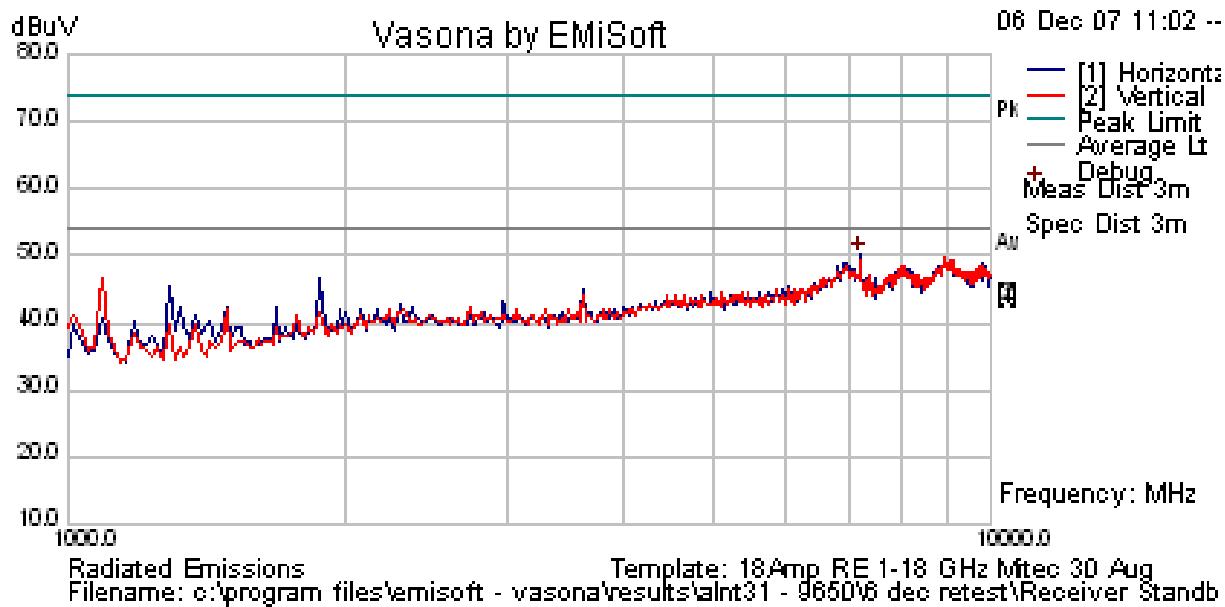

No emissions were observed breaking the limit.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 70 of 87

### Specification

Antenna Conducted Measurement

**Industry Canada RSS-Gen §7.2.3**

If the device has a detachable antenna of known antenna impedance, then the antenna conducted method is permitted in lieu of a radiated measurement.

Receiver spurious emissions at any discrete frequency shall not exceed 2 nanowatts (-57 dBm) in the band 30-1000 MHz, or 5 nanowatts (-53 dBm) above 1 GHz.

### Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.9. Radiated Spurious Emissions (30M-1 GHz)


**FCC, Part 15 Subpart C §15.247(d), §15.205, 15.209**  
**Industry Canada RSS-210 §A8.5, 2.2, 2.6.**

#### Test Procedure

Preliminary radiated emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a CISPR compliant spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. A photograph of the test set-up in the anechoic chamber in Section 6 Test Set-Up Photographs.

A notch filter with >70 dB of rejection was used to remove the fundamental frequency.

#### Test Measurement Set up

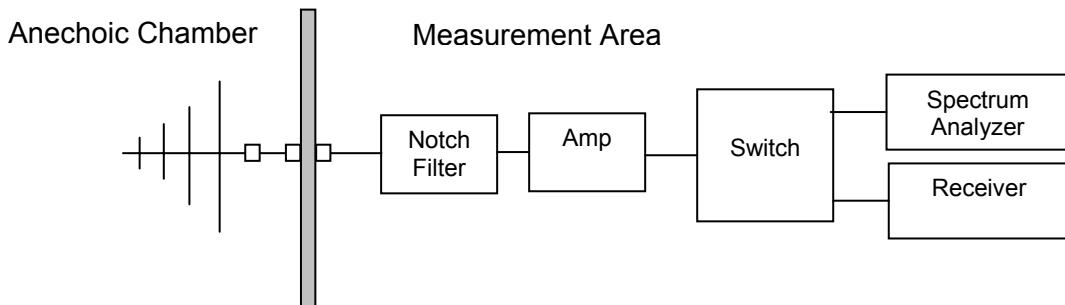

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 72 of 87

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Measurement Results for Radiated Emissions (30 MHz – 1 GHz)


Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

### Radiated Emissions Below 1 GHz (Class A)

#### TABLE OF RESULTS – POE DIGITAL EMISSIONS 30M – 1 GHz

EUT Transmitting Maximum Output Power

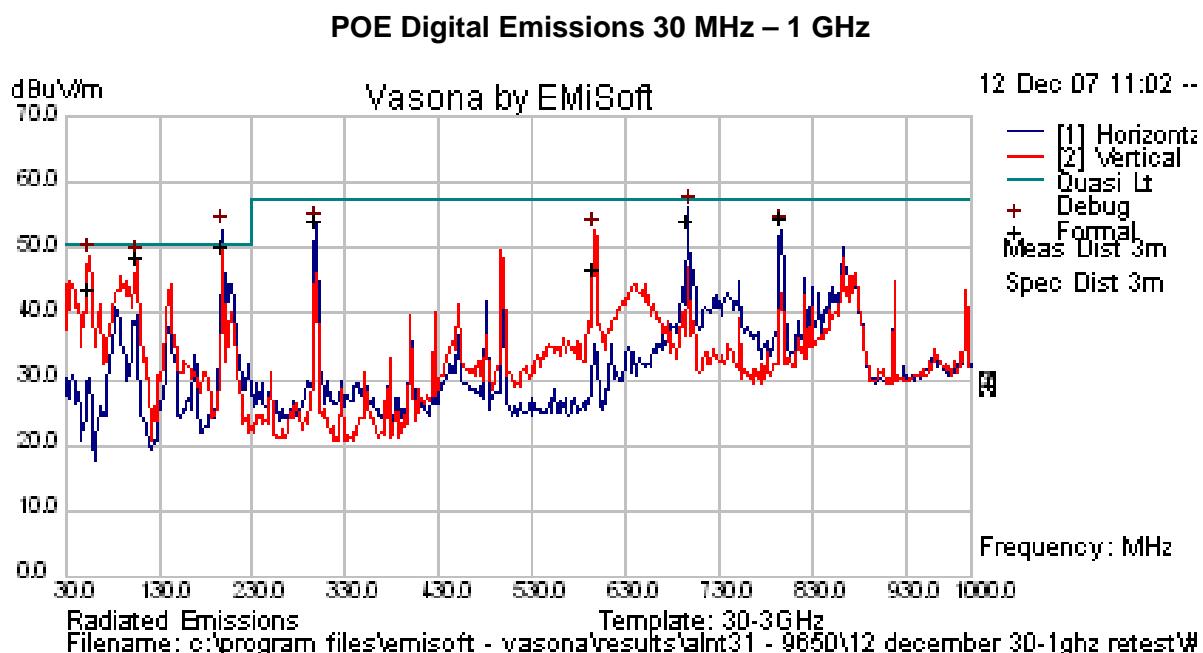


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
198.569	60.48	4.74	-17.09	48.13	Quasi Max	H	161	120	50.5	-2.37	Pass	
695.238	54.52	6.67	-8.93	52.25	Quasi Max	H	105	13	57.5	-5.25	Pass	
55.937	59.64	3.79	-21.59	41.84	Quasi Max	V	109	40	50.5	-8.66	Pass	
106.719	60.07	4.21	-17.82	46.46	Quasi Max	V	98	78	50.5	-4.04	Pass	
297.939	63.19	5.21	-16.38	52.02	Quasi Max	H	98	77	57.5	-5.48	Pass	
794.619	53.53	7.15	-8.03	52.64	Quasi Max	H	98	21	57.5	-4.86	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## TABLE OF RESULTS – ac/dc CONVERTER DIGITAL EMISSIONS 30M – 1 GHz

EUT Transmitting Maximum Output Power

### ac/dc Converter Digital Emissions 30 MHz – 1 GHz

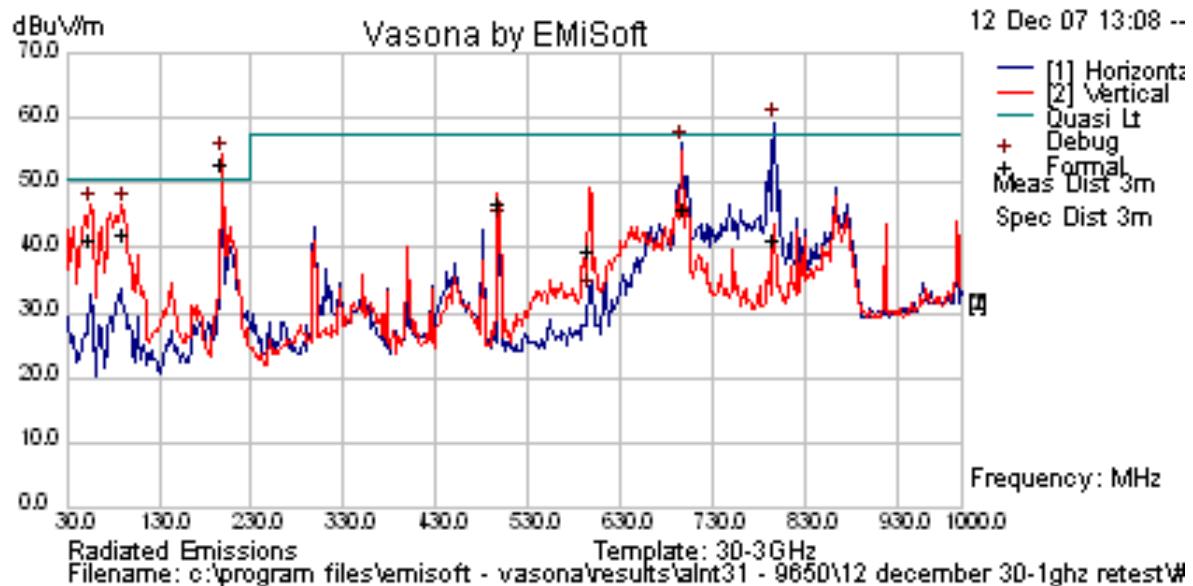

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
198.619	62.04	4.74	-17.08	49.7	Quasi Max	V	98	165	50.5	-0.8	Pass	
795.892	40.23	7.15	-8	39.38	Quasi Max	H	229	354	57.5	-18.12	Pass	
696.754	46.37	6.67	-8.92	44.12	Quasi Max	H	118	0	57.5	-13.38	Pass	
55.271	57.15	3.78	-21.59	39.35	Quasi Max	V	123	91	50.5	-11.15	Pass	
90.261	58.01	4.07	-21.91	40.18	Quasi Max	V	98	246	50.5	-10.32	Pass	
496.791	51.01	5.99	-12.03	44.97	Quasi Max	V	119	18	57.5	-12.53	Pass	


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Restricted Bands of Operation 608 – 614 MHz

TABLE OF RESULTS – CHANNEL 902.75 MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
612.786	46.04	6.43	-10.52	41.96	Quasi Max	V	100	0	46	-4.04	Pass	
613.387	45.16	6.44	-10.49	41.1	Quasi Max	V	100	0	46	-4.9	Pass	

### Restricted Bands of Operation - Channel 902.75 MHz

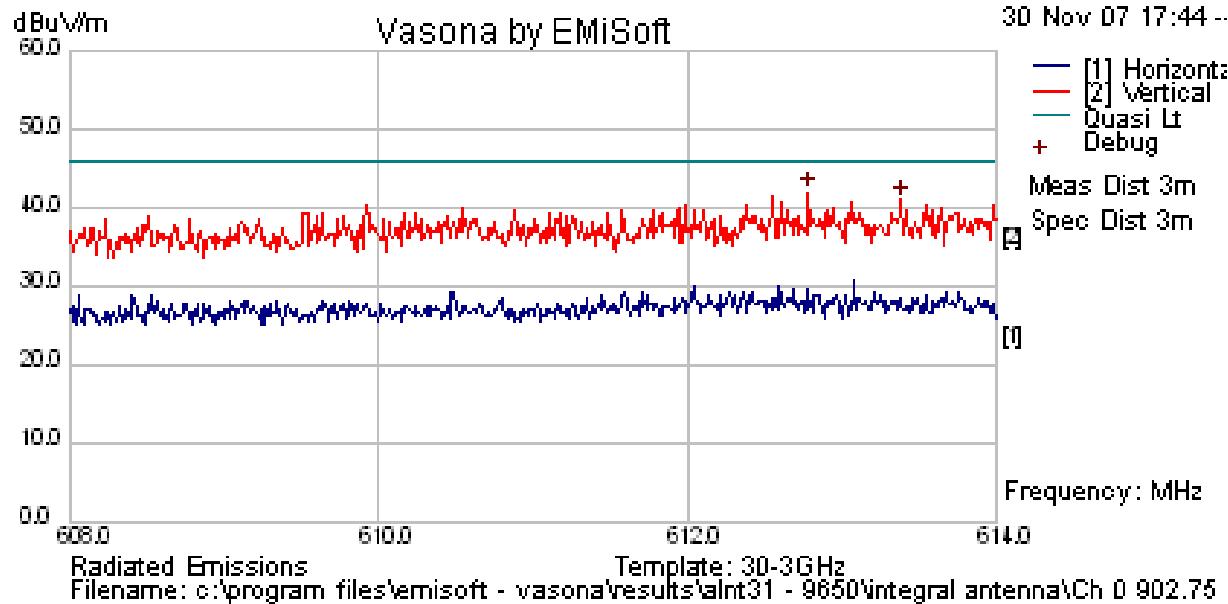


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Restricted Bands of Operation 960 – 1240 MHz

TABLE OF RESULTS – CHANNEL 927.25 MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
1001.878	43.62	7.69	-6.29	45.03	Peak Max	V	104	11	74	-28.97	Pass	
1001.878	29.91	7.69	-6.29	31.32	Average Max	V	104	11	54	-22.68	Pass	

### Restricted Bands of Operation - Channel 902.75 MHz

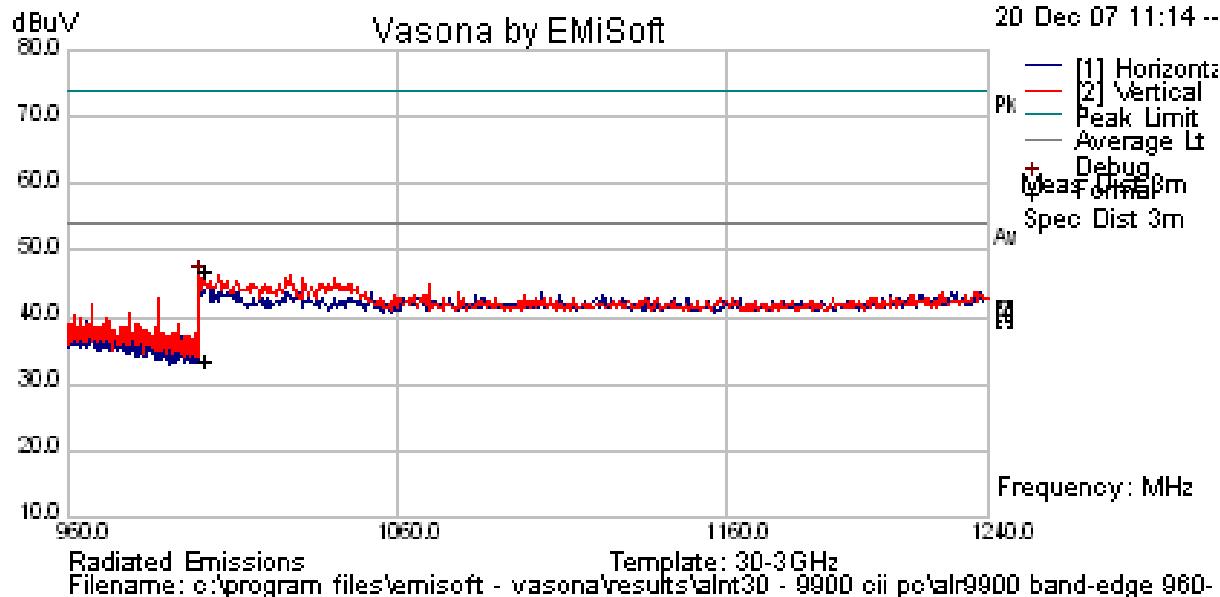

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 77 of 87

## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312, 0341

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### **5.1.10. AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

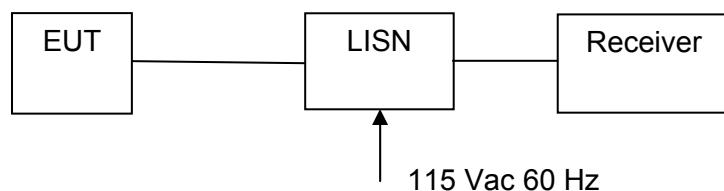

Measurement set up for AC Wireline Conducted Emissions Test

#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

##### **Ambient conditions.**

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

##### **Radio Parameters:**

Transmitting on Channel 26. 915.25 MHz

Transmit Power: Full Power

Active antenna port: Integral

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## TABLE OF RESULTS

### Ac/dc converter 115 Vac 60 Hz

Freq (MHz)	Line	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Margin (dB)	Ave. (dB $\mu$ V)	Ave. Limit (dB $\mu$ V)	Ave. Margin (dB)
0.197	Live	73.31	58.78	79	-20.22	42.85	66	-23.15
19.625	Live	58.4	55.3	73	-17.7	53.22	60	-6.78
0.209	Live	72.8	55.29	79	-23.71	32.27	66	-33.73
0.272	Live	68.21	52.79	79	-26.21	31.84	66	-34.16
20.78	Live	56.7	54.68	73	-18.32	52.95	60	-7.05
0.151	Neut.	72.68	57.84	79	-21.16	28.83	66	-37.17

### Ac/dc Converter Conducted Emissions (150 kHz – 30 MHz)

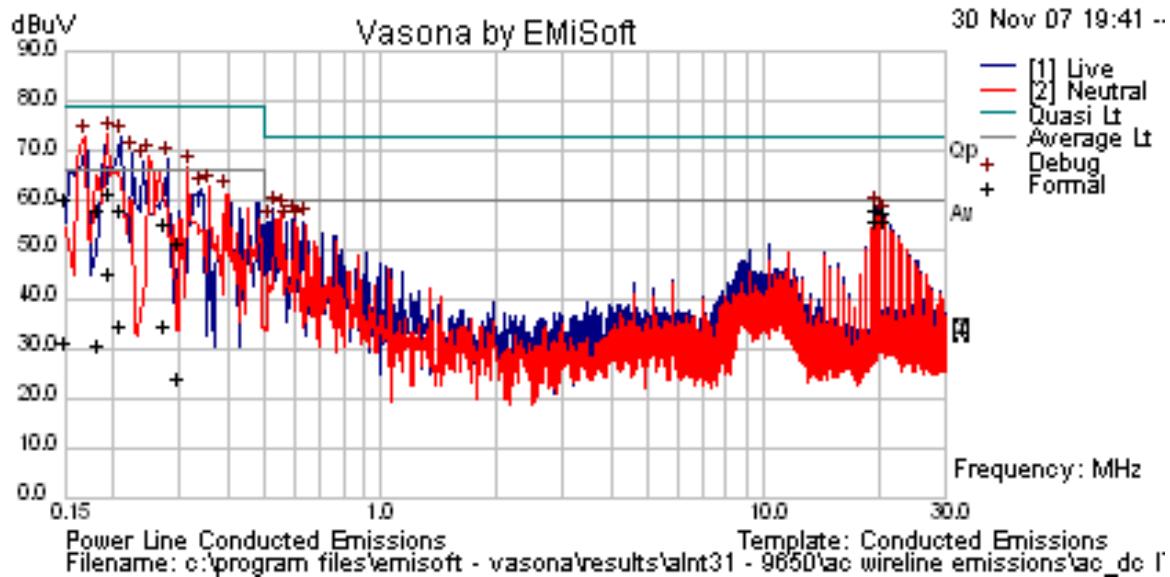


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

POE 115 Vac 60 Hz

Freq (MHz)	Line	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Margin (dB)	Ave. (dB $\mu$ V)	Ave. Limit (dB $\mu$ V)	Ave. Margin (dB)
20.772	Live	54.77	51.94	73	-21.06	50.7	60	-9.3
21.925	Live	54.64	52.02	73	-20.98	51.48	60	-8.52
20.195	Live	54.48	51.58	73	-21.42	50.6	60	-9.4
4.442	Neut.	46.28	41.8	73	-31.2	41.8	60	-18.2
22.504	Neut.	54.41	51.56	73	-21.44	50.52	60	-9.48
0.457	Neut.	46.44	44.17	79	-34.83	43.58	66	-22.42

POE Conducted Emissions (150 kHz – 30 MHz)

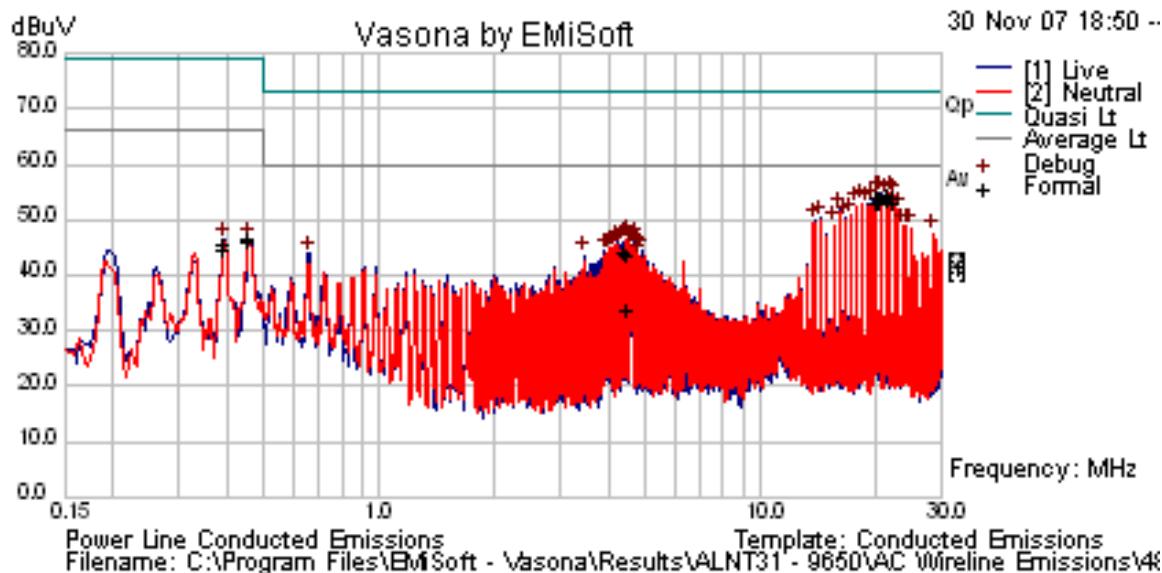

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 81 of 87

## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

#### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

#### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------


### Traceability

Method	Test Equipment Used
Measurements were made per Sanmina work instruction	0190, 0193

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 6. PHOTOGRAPHS

### 6.1. General Measurement Test Set-up

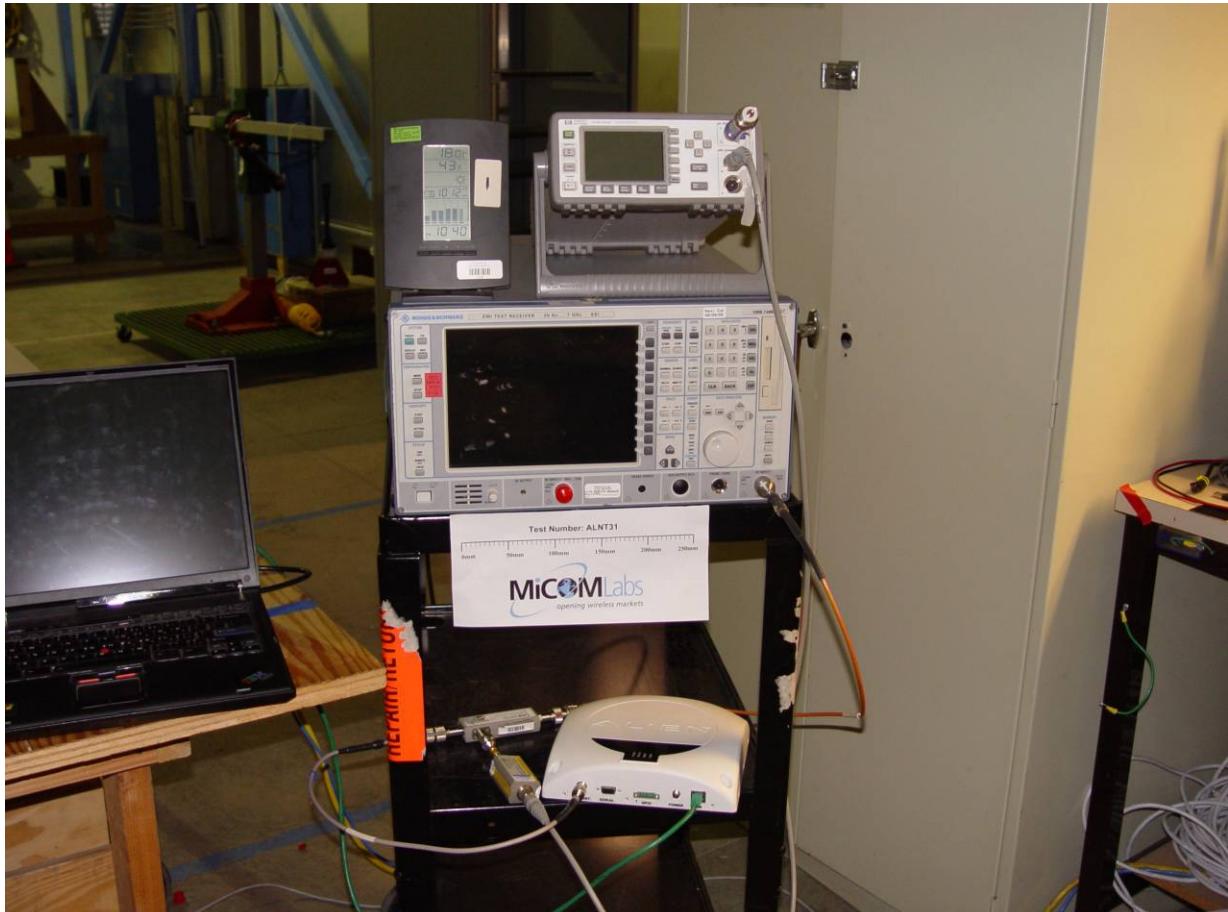

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


## 6.2. Radiated Emissions >1 GHz



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 6.3. Radiated Emissions <1 GHz

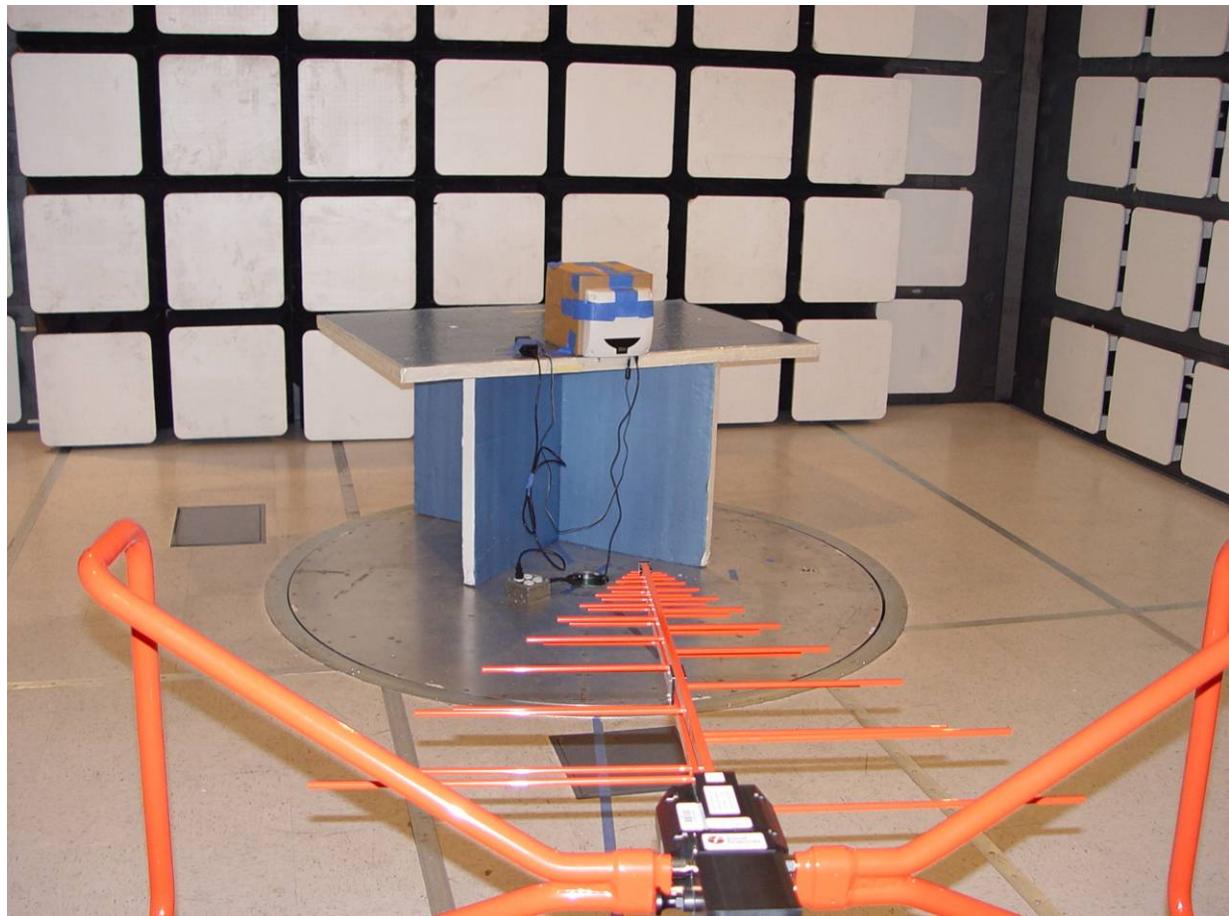

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 6.4. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

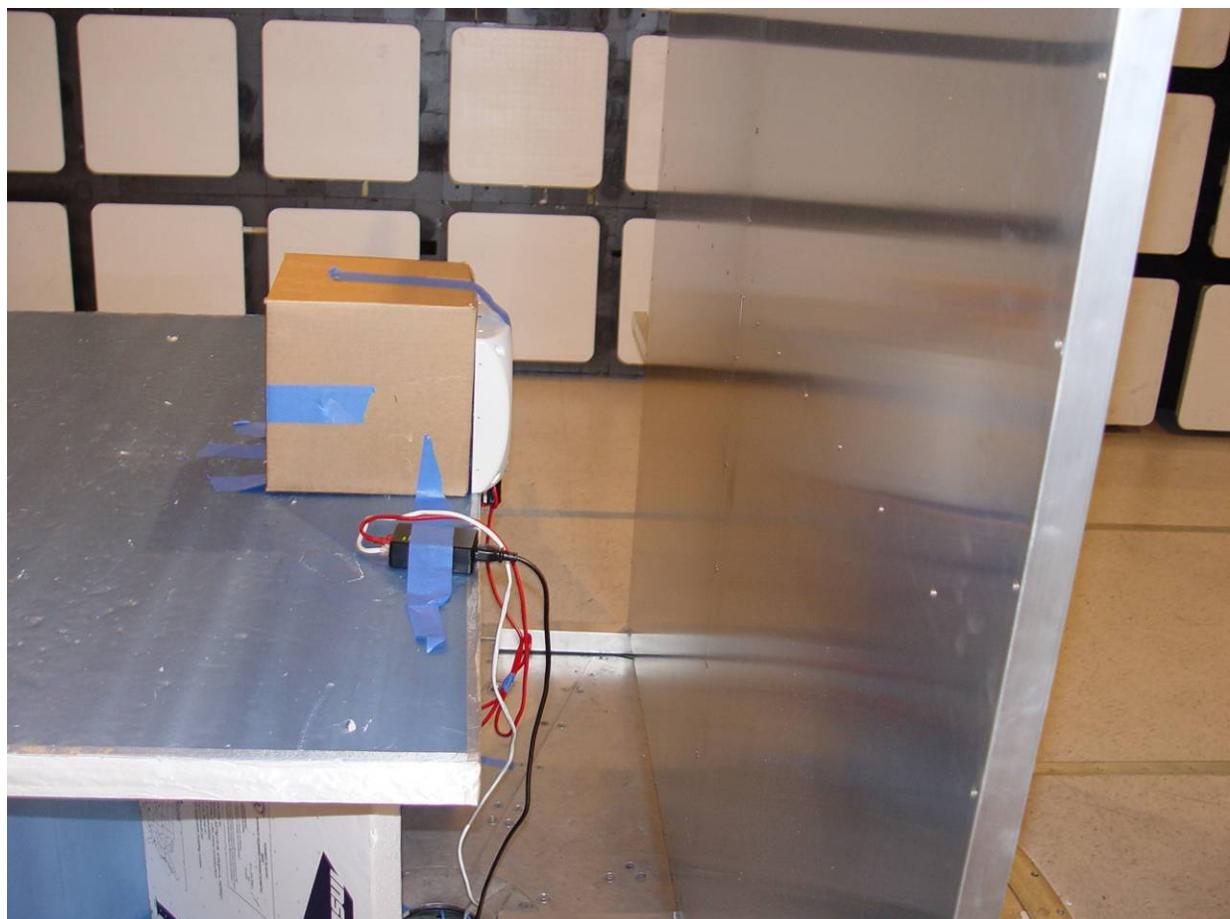

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Alien Technology RFID Reader ALR9650  
**To:** FCC 47 CFR Part15.247 & IC RSS-210  
**Serial #:** ALNT31-A2 Rev A  
**Issue Date:** 12th January '08  
**Page:** 86 of 87

## 7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0104	1-18GHz Horn Antenna	The Electro-Mechanics Company	3115	9205-3882
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0341	902-928 MHz Notch Filter	EWT	EWT-14-0199	H1

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)