

Company: Alien Technology

Test of: ALR-F800

To: FCC Part 15 Subpart C 15.247 (DTS) & IC RSS-247

Report No.: ALNT60-U2 Rev B



# CONDUCTED TEST REPORT



Test of: Alien Technology ALR-F800

to

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Test Report Serial No.: ALNT60-U2 Rev B

This report supersedes: NONE

Applicant: Alien Technology, LLC  
845 Embedded Way  
San Jose, California 95138  
USA

Product Function: RFID Reader

Issue Date: 18<sup>th</sup> August 2015

## **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 3 of 74

---

## Table of Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>  | <b>4</b>  |
| 1.1. TESTING ACCREDITATION.....                           | 4         |
| 1.2. RECOGNITION .....                                    | 5         |
| 1.3. PRODUCT CERTIFICATION .....                          | 6         |
| <b>2. DOCUMENT HISTORY .....</b>                          | <b>7</b>  |
| <b>3. TEST RESULT CERTIFICATE.....</b>                    | <b>8</b>  |
| <b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>    | <b>9</b>  |
| 4.1. Normative References .....                           | 9         |
| 4.2. Test and Uncertainty Procedure .....                 | 10        |
| <b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....</b>    | <b>11</b> |
| 5.1. Technical Details .....                              | 11        |
| 5.2. Scope Of Test Program .....                          | 12        |
| 5.3. Equipment Model(s) and Serial Number(s) .....        | 13        |
| 5.4. Antenna Details .....                                | 13        |
| 5.5. Cabling and I/O Ports .....                          | 13        |
| 5.6. Test Configurations.....                             | 13        |
| 5.7. Equipment Modifications .....                        | 14        |
| 5.8. Deviations from the Test Standard .....              | 14        |
| <b>6. TEST SUMMARY .....</b>                              | <b>15</b> |
| <b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>           | <b>16</b> |
| 7.1. Conducted .....                                      | 16        |
| 7.2. Radiated Emissions.....                              | 18        |
| 7.3. ac Wireline Emission.....                            | 20        |
| <b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b> | <b>21</b> |
| <b>9. TEST RESULTS .....</b>                              | <b>22</b> |
| 9.1. 20 dB & 99% Bandwidth .....                          | 22        |
| 9.2. Number Of Channels .....                             | 24        |
| 9.3. Channel Spacing .....                                | 26        |
| 9.4. Dwell Time & Channel Occupancy .....                 | 28        |
| 9.5. Conducted Output Power .....                         | 30        |
| 9.6. Conducted Spurious Emissions.....                    | 33        |
| 9.6.1. Conducted Emissions .....                          | 33        |
| 9.6.1.1. Spurious Emissions.....                          | 33        |
| 9.6.1.2. Band-Edge Emissions .....                        | 35        |
| 9.7. Radiated Testing.....                                | 37        |
| 9.7.1. Radiated Spurious Emissions .....                  | 37        |
| 9.7.2. Digital Emissions (0.03 – 1 GHz) .....             | 45        |
| 9.8. ac Wireline Emissions.....                           | 55        |
| <b>A. APPENDIX - GRAPHICAL IMAGES .....</b>               | <b>59</b> |
| A.1. 20 dB & 99% Bandwidth .....                          | 60        |
| A.2. Number Of Channels.....                              | 63        |
| A.3. Channel Spacing .....                                | 66        |
| A.4. Dwell Time & Channel Occupancy.....                  | 67        |
| A.5. Emissions .....                                      | 69        |
| A.5.1. Conducted Emissions .....                          | 69        |
| A.5.1.1. Conducted Spurious Emissions .....               | 69        |
| A.5.1.2. Conducted Band-Edge Emissions .....              | 72        |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 5 of 74

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country   | Recognition Body                                                                                 | Status | Phase      | Identification No.                      |
|-----------|--------------------------------------------------------------------------------------------------|--------|------------|-----------------------------------------|
| USA       | Federal Communications Commission (FCC)                                                          | TCB    | -          | US0159<br>Listing #: 102167             |
| Canada    | Industry Canada (IC)                                                                             | FCB    | APEC MRA 2 | US0159<br>Listing #: 4143A-2<br>4143A-3 |
| Japan     | MIC (Ministry of Internal Affairs and Communication)                                             | CAB    | APEC MRA 2 | RCB 210                                 |
|           | VCCI                                                                                             | --     | --         | A-0012                                  |
| Europe    | European Commission                                                                              | NB     | EU MRA     | NB 2280                                 |
| Australia | Australian Communications and Media Authority (ACMA)                                             | CAB    | APEC MRA 1 | US0159                                  |
| Hong Kong | Office of the Telecommunication Authority (OFTA)                                                 | CAB    | APEC MRA 1 |                                         |
| Korea     | Ministry of Information and Communication Radio Research Laboratory (RRL)                        | CAB    | APEC MRA 1 |                                         |
| Singapore | Infocomm Development Authority (IDA)                                                             | CAB    | APEC MRA 1 |                                         |
| Taiwan    | National Communications Commission (NCC)<br>Bureau of Standards, Metrology and Inspection (BSMI) | CAB    | APEC MRA 1 |                                         |
| Vietnam   | Ministry of Communication (MIC)                                                                  | CAB    | APEC MRA 1 |                                         |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 7 of 74

---

## 2. DOCUMENT HISTORY

| Document History |                              |                                                                                                                 |
|------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Revision         | Date                         | Comments                                                                                                        |
| Draft            | 13 <sup>th</sup> August 2015 |                                                                                                                 |
| Rev A            | 17 <sup>th</sup> August 2015 | Initial Release                                                                                                 |
| Rev B            | 18 <sup>th</sup> August 2015 | Included statement in Section 9.5 Conducted Output Power to limit system use to antenna's with a fix cable loss |
| .                |                              |                                                                                                                 |
| .                |                              |                                                                                                                 |
| .                |                              |                                                                                                                 |
| .                |                              |                                                                                                                 |
| .                |                              |                                                                                                                 |

In the above table the latest report revision will replace all earlier versions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 8 of 74

### 3. TEST RESULT CERTIFICATE

|                                                                                                    |                                                                                                |
|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>Manufacturer:</b> Alien Technology, LLC<br>845 Embedded Way<br>San Jose California 95138<br>USA | <b>Tested By:</b> MiCOM Labs, Inc.<br>575 Boulder Court,<br>Pleasanton California 94566<br>USA |
| <b>Model:</b> ALR-F800                                                                             | <b>Telephone:</b> +1 925 462 0304<br><b>Fax:</b> +1 925 462 0306                               |
| <b>Type Of Equipment:</b> RFID Reader                                                              |                                                                                                |
| <b>S/N's:</b> Engineering Sample                                                                   |                                                                                                |
| <b>Test Date(s):</b> 5 <sup>th</sup> – 12 <sup>th</sup> August 2015                                | <b>Website:</b> www.micomlabs.com                                                              |

| STANDARD(S)                               | TEST RESULTS       |
|-------------------------------------------|--------------------|
| FCC CFR 47 Part 15 Subpart C 15.247 (DTS) | EQUIPMENT COMPLIES |


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **4. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **4.1. Normative References**

| REF. | PUBLICATION            | YEAR                | TITLE                                                                                                                                                                                                 |
|------|------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I    | KDB 662911             | Oct 31 2013         | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II   | KDB 558074 D01 v03r03  | 9th June 2015       | Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.                                                                                 |
| III  | A2LA                   | June 2015           | R105 - Requirement's When Making Reference to A2LA Accreditation Status                                                                                                                               |
| IV   | ANSI C63.10            | 2013                | American National Standard for Testing Unlicensed Wireless Devices                                                                                                                                    |
| V    | ANSI C63.4             | 2014                | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz                                  |
| VI   | CISPR 22               | 2008                | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement                                                                                              |
| VII  | ETSI TR 100 028        | 2001-12             | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics                                              |
| VIII | FCC 47 CFR Part 15.247 | 2014                | Radio Frequency Devices; Subpart C – Intentional Radiators                                                                                                                                            |
| IX   | ICES-003               | Issue 5 2012        | Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.                                      |
| X    | M 3003                 | Edition 3 Nov. 2012 | Expression of Uncertainty and Confidence in Measurements                                                                                                                                              |
| XI   | RSS-247 Issue 1        | May 2015            | Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices                                                                           |
| XII  | RSS-Gen Issue 4        | November 2014       | General Requirements and Information for the Certification of Radiocommunication Equipment                                                                                                            |
| XIII | KDB 644545 D03 v01     | August 14th 2014    | Guidance for IEEE 802.11ac New Rules                                                                                                                                                                  |
| XIV  | FCC 47 CFR Part 2.1033 | 2014                | FCC requirements and rules regarding photographs and test setup diagrams.                                                                                                                             |



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 10 of 74

---

#### **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 11 of 74

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

| Details                              | Description                                                                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Purpose:                             | Test of the Alien Technology ALR-F800 to FCC CFR 47 Part 15 Subpart C 15.247 (DTS).<br>Radio Frequency Devices; Subpart C – Intentional Radiators |
| Applicant:                           | Alien Technology, LLC<br>845 Embedded Way<br>San Jose California 95138 USA                                                                        |
| Manufacturer:                        | As Applicant                                                                                                                                      |
| Laboratory performing the tests:     | MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton California 94566 USA                                                                          |
| Test report reference number:        | ALNT60 - ALR F800 FCC IC                                                                                                                          |
| Date EUT received:                   | 04 August 2015                                                                                                                                    |
| Standard(s) applied:                 | FCC CFR 47 Part 15 Subpart C 15.247 (DTS)                                                                                                         |
| Dates of test (from - to):           | 05 - 05 August 2015                                                                                                                               |
| No of Units Tested:                  | 2                                                                                                                                                 |
| Type of Equipment:                   | RFID Reader                                                                                                                                       |
| Product Family Name:                 | ALR-F800                                                                                                                                          |
| Model(s):                            | ALR-F800                                                                                                                                          |
| Location for use:                    | Indoor                                                                                                                                            |
| Declared Frequency Range(s):         | 902 - 928 MHz;                                                                                                                                    |
| Primary function of equipment:       | RFID Reader                                                                                                                                       |
| Secondary function of equipment:     | None Provided                                                                                                                                     |
| Type of Modulation:                  | PRSK                                                                                                                                              |
| Declared Nominal Output Power (Ave): | +30 dBm                                                                                                                                           |
| Transmit/Receive Operation:          | Transceiver                                                                                                                                       |
| Rated Input Voltage and Current:     | POE (POE adaptor sold with unit) 48Vdc                                                                                                            |
| Operating Temperature Range:         | Declared Range -20°C to 55°C                                                                                                                      |
| ITU Emission Designator:             | 67K0A1D                                                                                                                                           |
| Equipment Dimensions:                | 20.2cm (H) x 19.1cm (W) x 2.8cm (D)                                                                                                               |
| Weight:                              | 0.85kg                                                                                                                                            |
| Hardware Rev:                        | Rev. A                                                                                                                                            |
| Firmware Rev:                        | 15.07.23.00                                                                                                                                       |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **5.2. Scope Of Test Program**

### **Alien Technology ALR-F800**

The scope of the test program was to test the Alien Technology ALR-F800, DRM configurations in the frequency ranges 902 - 928 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart C 15.247 (DTS)**

Radio Frequency Devices; Subpart C – Intentional Radiators

### **Alien Technology ALR-F800**



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 13 of 74

### 5.3. Equipment Model(s) and Serial Number(s)

| Type | Description | Manufacturer     | Model    | Serial no.         | Delivery Date               |
|------|-------------|------------------|----------|--------------------|-----------------------------|
| EUT  | RFID Reader | Alien Technology | ALR-F800 | Engineering Sample | 5 <sup>th</sup> August 2015 |

### 5.4. Antenna Details

| Type     | Manufacturer     | Model    | Family     | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|----------|------------------|----------|------------|------------|---------|--------|-------|----------------------|
| external | Times-7          | A6590C   | Select One | 6.0        | -       | 80     | -     | 902 - 928            |
| external | Alien Technology | ALR-8696 | Select One | 5.5        | -       | 65     | -     | 902 - 928            |

BF Gain - Beamforming Gain  
Dir BW - Directional BeamWidth  
X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

| Port Type | Max Cable Length | # Of Ports | Screened | Conn Type | Data Type   |
|-----------|------------------|------------|----------|-----------|-------------|
| USB       | 15m              | 1          | Y        | Type A    | Digital     |
| USB       | 15m              | 1          | Y        | Type B    | Digital     |
| RS232     |                  | 1          | N        | DB-9      | Digital     |
| Ethernet  | 100m             | 1          | N        | RJ-45     | Packet Data |
| dc Jack   |                  | 1          | N        | Jack      | Vdc         |

### 5.6. Test Configurations

Results for the following configurations are provided in this report:

| Channel Frequency (MHz) |        |        |
|-------------------------|--------|--------|
| Low                     | Mid    | High   |
| 902.0 – 928.0 MHz       |        |        |
| 902.75                  | 915.25 | 927.25 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 14 of 74

---

### **5.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **5.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 15 of 74

---

## 6. TEST SUMMARY

### List of Measurements

| Test Header                                | Result   | Data Link                 |
|--------------------------------------------|----------|---------------------------|
| <b>Conducted Test Results</b>              |          |                           |
| 15.247(a)(2) 20 dB & 99% Bandwidth         | Complies | <a href="#">View Data</a> |
| 15.247(b), 15.31(e) Conducted Output Power | Complies | <a href="#">View Data</a> |
| 15.247(d) Emissions                        | -        | -                         |
| (1) Conducted Emissions                    | -        | -                         |
| (i) Conducted Spurious Emissions           | Complies | <a href="#">View Data</a> |
| (ii) Conducted Band-Edge Emissions         | Complies | <a href="#">View Data</a> |
| 15.247(e) Power Spectral Density           | Complies | <a href="#">View Data</a> |
|                                            |          |                           |
| <b>Radiated Test Results</b>               |          |                           |
| Radiated Spurious Emissions                | Complies | <a href="#">View Data</a> |
| Radiated Digital Emissions                 | Complies | <a href="#">View Data</a> |
|                                            |          |                           |
| <b>ac Wireline Emissions</b>               |          |                           |
| ac Wireline Emissions                      | Complies | <a href="#">View Data</a> |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


## **7. TEST EQUIPMENT CONFIGURATION(S)**

### **7.1. Conducted**

Conducted RF Emission Test Set-up(s)

The following tests were performed using the conducted test set-up shown in the diagram below

1. 20 dB & 99% Bandwidth
2. Conducted Output Power
3. Conducted Spurious Emissions
4. Conducted Spurious Band-Edge Emissions

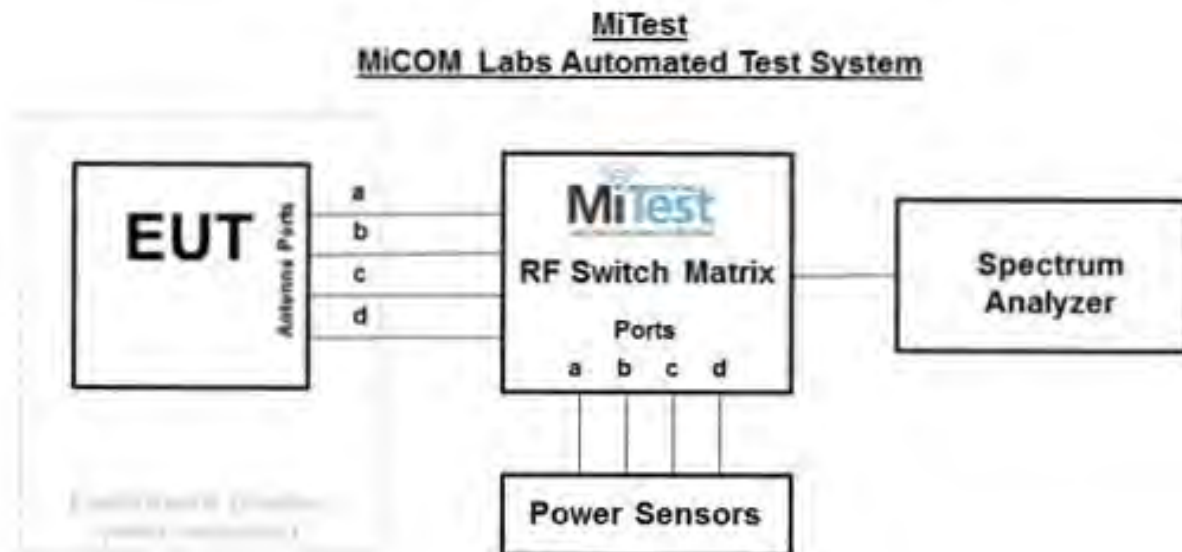

**Conducted Test Measurement Setup**

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 17 of 74


| Asset#      | Description                                           | Manufacturer         | Model#               | Serial#    | Calibration Due Date |
|-------------|-------------------------------------------------------|----------------------|----------------------|------------|----------------------|
| 158         | Barometer/Thermometer                                 | Control Company      | 4196                 | E2846      | 04 Dec 2015          |
| 248         | Resistance Thermometer                                | Thermotronics        | GR2105-02            | 9340 #1    | 30 Oct 2015          |
| 287         | Rohde & Schwarz 40 GHz Receiver                       | Rhode & Schwarz      | ESIB40               | 100201     | 31 Jul 2016          |
| 376         | USB 10MHz - 18GHz Average Power Sensor                | Agilent              | U2000A               | MY51440005 | 28 Oct 2015          |
| 381         | 4x4 RF Switch Box                                     | MiCOM Labs           | MiTest RF Switch Box | MIC002     | 20 Dec 2015          |
| 419         | Laptop with Labview Software                          | Lenova               | W520                 | TS02       | Not Required         |
| 420         | USB to GPIB Interface                                 | National Instruments | GPIB-USB HS          | 1346738    | Not Required         |
| 460         | Dell Computer with installation of MiTest executable. | Dell                 | Optiplex330          | BC944G1    | Not Required         |
| RF#2 GPIB#1 | GPIB cable to Power Supply                            | HP                   | GPIB                 | None       | Not Required         |
| RF#2 SMA#1  | EUT to Mitest box port 1                              | Flexco               | SMA Cable port1      | None       | 20 Dec 2015          |
| RF#2 USB#1  | USB Cable to Mitest Box                               | Dynex                | USB Cable            | None       | Not Required         |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 7.2. Radiated Emissions

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 9.4.1 Spurious Emissions
2. Section 9.4.2 Restricted Band-Edge Emissions
3. Section 9.5 Radiated Digital Emissions

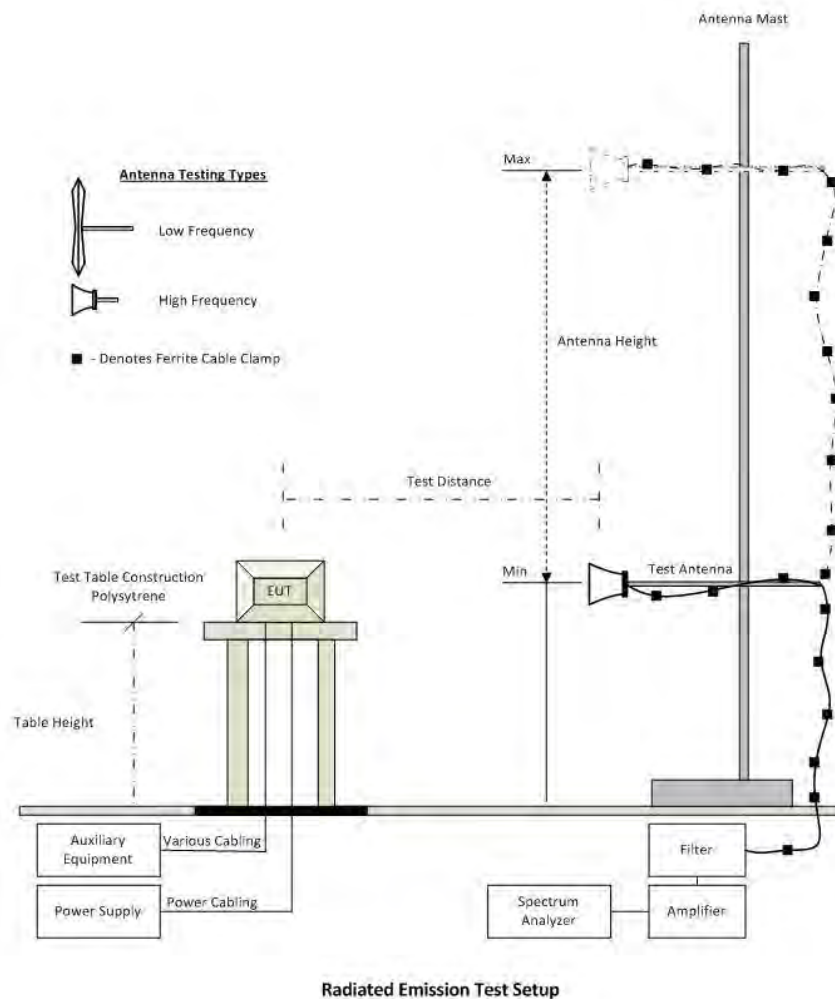

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 19 of 74

| Asset# | Description                                       | Manufacturer         | Model#                | Serial#     | Calibration Due Date |
|--------|---------------------------------------------------|----------------------|-----------------------|-------------|----------------------|
| 158    | Barometer/Thermometer                             | Control Company      | 4196                  | E2846       | 04 Dec 2015          |
| 170    | Video System Controller for Semi Anechoic Chamber | Panasonic            | WV-CY101              | 04R08507    | Not Required         |
| 287    | Rohde & Schwarz 40 GHz Receiver                   | Rhode & Schwarz      | ESIB40                | 100201      | 31 Jul 2016          |
| 310    | SMA Cable                                         | Micro-Coax           | UFA210A-0-0787-3G03G0 | 209089-001  | 30 Oct 2015          |
| 338    | Sunol 30 to 3000 MHz Antenna                      | Sunol                | JB3                   | A052907     | 14 Aug 2015          |
| 393    | DC - 1050 MHz Low Pass Filter                     | Microcircuits        | VLFX-1050             | N/A         | 08 Oct 2015          |
| 397    | Amp 10 - 2500MHz                                  | MiCOM Labs           | Amp 10 - 2500 MHz     | NA          | 23 Oct 2015          |
| 399    | ETS 1-18 GHz Horn Antenna                         | ETS                  | 3117                  | 00154575    | 10 Oct 2015          |
| 406    | Amplifier for Radiated Emissions                  | MiCOM Labs           | 40dB 1 to 18GHz Amp   | 0406        | 28 May 2016          |
| 410    | Desktop Computer                                  | Dell                 | Inspiron 620          | WS38        | Not Required         |
| 411    | Mast/Turntable Controller                         | Sunol Sciences       | SC98V                 | 060199-1D   | Not Required         |
| 412    | USB to GPIB Interface                             | National Instruments | GPIB-USB HS           | 11B8DC2     | Not Required         |
| 413    | Mast Controller                                   | Sunol Science        | TWR95-4               | 030801-3    | Not Required         |
| 415    | Turntable Controller                              | Sunol Sciences       | Turntable Controller  | None        | Not Required         |
| 416    | Gigabit ethernet filter                           | ETS-Lingren          | Gigafoil 260366       | None        | Not Required         |
| 462    | Schwarzbeck cable from Antenna to Amplifier.      | Schwarzbeck          | AK 9513               | 462         | 25 Aug 2015          |
| 463    | Schwarzbeck cable from Amplifier to Bulkhead.     | Schwarzbeck          | AK 9513               | 463         | 25 Aug 2015          |
| 464    | Schwarzbeck cable from Bulkhead to Receiver       | Schwarzbeck          | AK 9513               | 464         | 25 Aug 2015          |
| 465    | Low Pass Filter DC-1000 MHz                       | Mini-Circuits        | NLP-1200+             | VUU01901402 | 25 Aug 2015          |
| 468    | Low pass filter                                   | Mini Circuits        | SLP-550               | None        | 30 Sep 2015          |
| 469    | Low pass filter                                   | Mini Circuit         | SLP-1000              | None        | 30 Sep 2015          |
| 470    | High Pass filter                                  | Mini Circuits        | SHP-700               | None        | 30 Sep 2015          |
| CC05   | Confidence Check                                  | MiCOM                | CC05                  | None        | 1 Aug 2015           |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### 7.3. ac Wireline Emission

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 9.6 ac Wireline Conducted Emissions

#### Test Measurement Set up

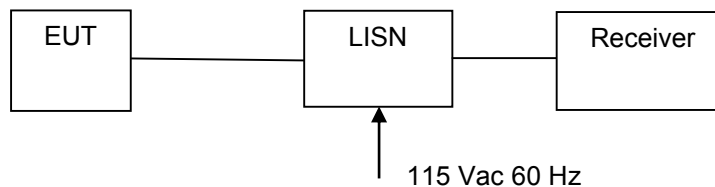

Measurement set up for AC Wireline Conducted Emissions Test

#### Traceability of Test Equipment Utilized for ac Wireline Emission Testing

| Asset# | Description                                   | Manufacturer    | Model#  | Serial#     | Calibration Due Date |
|--------|-----------------------------------------------|-----------------|---------|-------------|----------------------|
| 158    | Barometer/Thermometer                         | Control Company | 4196    | E2846       | 04 Dec 2015          |
| 184    | Pulse Limiter                                 | Rhode & Schwarz | ESH3Z2  | 357.8810.52 | Cal when used        |
| 190    | LISN (two-line V-network)                     | Rhode & Schwarz | ESH3Z5  | 836679/006  | 12 Sep 2015          |
| 287    | Rohde & Schwarz 40 GHz Receiver               | Rhode & Schwarz | ESIB40  | 100201      | 31 Jul 2016          |
| 316    | Dell desktop computer workstation with Vasona | Dell            | Desktop | WS04        | Not Required         |

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 22 of 74

## 9. TEST RESULTS

### 9.1. 20 dB & 99% Bandwidth

| Conducted Test Conditions for 20 dB and 99% Bandwidth |                          |                            |             |
|-------------------------------------------------------|--------------------------|----------------------------|-------------|
| <b>Standard:</b>                                      | FCC CFR 47:15.247        | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>                                  | 20 dB and 99 % Bandwidth | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>                           | 15.247 (a)(2)            | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>                         | See Normative References |                            |             |

#### Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 23 of 74

#### Equipment Configuration for 20 dB & 99% Bandwidth

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | 99.00          |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | 5.30           |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) |    |    |    | 20 dB Bandwidth (MHz) |        | Limit  | Lowest Margin |
|----------------|--------------------------------|----|----|----|-----------------------|--------|--------|---------------|
|                | Port(s)                        |    |    |    | Highest               | Lowest | KHz    | MHz           |
| MHz            | a                              | b  | c  | d  |                       |        |        |               |
| 902.8          | <a href="#">0.028</a>          | -- | -- | -- | 0.028                 | 0.028  | ≤500.0 | -0.472        |
| 915.3          | <a href="#">0.077</a>          | -- | -- | -- | 0.077                 | 0.077  | ≤500.0 | -0.423        |
| 927.3          | <a href="#">0.077</a>          | -- | -- | -- | 0.077                 | 0.077  | ≤500.0 | -0.423        |

| Test Frequency | Measured 99% Bandwidth (MHz) |    |    |    | Maximum 99% Bandwidth (MHz) |  |  |
|----------------|------------------------------|----|----|----|-----------------------------|--|--|
|                | Port(s)                      |    |    |    |                             |  |  |
| MHz            | a                            | b  | c  | d  |                             |  |  |
| 902.8          | <a href="#">0.025</a>        | -- | -- | -- | 0.025                       |  |  |
| 915.3          | <a href="#">0.066</a>        | -- | -- | -- | 0.066                       |  |  |
| 927.3          | <a href="#">0.067</a>        | -- | -- | -- | 0.067                       |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 24 of 74

## 9.2. Number Of Channels

| Conducted Test Conditions for Number Of Channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                          |                     |             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------|-------------|
| Standard:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | FCC CFR 47:15.247        | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Number of Channels       | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 15.247 (a)(2)            | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | See Normative References |                     |             |
| <p>Test Procedure</p> <p>The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.</p> <p>Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.</p> <p>Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.</p> <p><b>Limit</b></p> <p>For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.</p> |                          |                     |             |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 25 of 74

#### Equipment Configuration for Hopping Sequence

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | 99.00          |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | 5.30           |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| Modulation                            | Frequency Range (MHz) | Number of Hopping Channels | Limit                  | Total Number of Hops | Results |
|---------------------------------------|-----------------------|----------------------------|------------------------|----------------------|---------|
|                                       |                       |                            | No of Hopping Channels |                      |         |
| PRSK                                  | 900.00 – 912.00       | 19                         | ≥ 50                   | 19                   |         |
| PRSK                                  | 912.00 – 920.00       | 16                         | ≥ 50                   | 16                   |         |
| PRSK                                  | 920.00 – 928.00       | 15                         | ≥ 50                   | 15                   |         |
| <b>Total No. of Hopping Channels:</b> |                       |                            |                        | <b>50</b>            | Pass    |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 26 of 74

### 9.3. Channel Spacing

| Conducted Test Conditions for 6 dB and 99% Bandwidth |                          |                     |             |
|------------------------------------------------------|--------------------------|---------------------|-------------|
| Standard:                                            | FCC CFR 47:15.247        | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:                                        | Channel Spacing          | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):                                 | 15.247 (a)(2)            | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):                               | See Normative References |                     |             |

Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

**Limit**

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 27 of 74

#### Equipment Configuration for Channel Separation

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | Not Applicable |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| Center Frequency                                                                        | Packet Type | Chan Separation       | Limit<br>(20 dB Occ. BW) | Result |
|-----------------------------------------------------------------------------------------|-------------|-----------------------|--------------------------|--------|
| MHz                                                                                     |             | MHz                   | MHz                      |        |
| 902.75                                                                                  | PRSK        | <a href="#">0.507</a> | > 0.077                  | Pass   |
| <b>Traceability to Industry Recognized Test Methodologies</b>                           |             |                       |                          |        |
| Measurement Uncertainty: $\pm 2.81$ dB (Spectrum/Amplitude), $\pm 0.86$ ppm (Frequency) |             |                       |                          |        |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 28 of 74

#### 9.4. Dwell Time & Channel Occupancy

| Conducted Test Conditions for Channel Occupancy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                     |             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------|-------------|
| Standard:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | FCC CFR 47:15.247              | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Dwell Time & Channel Occupancy | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 15.247 (a)(2)                  | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | See Normative References       |                     |             |
| <p>Test Procedure</p> <p>The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.</p> <p>Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.</p> <p>Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.</p> <p><b>Limit</b></p> <p>(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.</p> |                                |                     |             |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 29 of 74

#### Equipment Configuration for Dwell Time & Channel Occupancy

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | Not Applicable |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| Center Frequency | Packet Type | Dwell Time (Single Channel) | Limit (Single Channel) | Channel Occupancy Limit | Result |
|------------------|-------------|-----------------------------|------------------------|-------------------------|--------|
| MHz              |             | mS                          | mS                     | S                       |        |
| 902.75           | PRSK        | <a href="#">395.00</a>      | 400                    | <a href="#">20</a>      | Pass   |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| Measurement Uncertainty: | ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency) |
|--------------------------|------------------------------------------------------|

Note: click the links in the above matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 30 of 74

## 9.5. Conducted Output Power

| Conducted Test Conditions for Fundamental Emission Output Power |                          |                     |             |
|-----------------------------------------------------------------|--------------------------|---------------------|-------------|
| Standard:                                                       | FCC CFR 47:15.247        | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:                                                   | Output Power             | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):                                            | 15.247 (b) & (c)         | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):                                          | See Normative References |                     |             |

Test Procedure for Fundamental Emission Output Power Measurement  
In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information  
Calculated Power =  $A + G + Y + 10 \log (1/x)$  dBm  
 $A$  = Total Power [ $10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]  
 $G$  = Antenna Gain  
 $Y$  = Beamforming Gain  
 $x$  = Duty Cycle (average power measurements only)

**Limits for Fundamental Emission Output Power**  
(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 31 of 74

---

instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 32 of 74

#### Equipment Configuration for Average Output Power

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | 99.00          |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | 5.30           |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| Test Frequency<br>MHz | Measured Output Power (dBm) |    |    |    | Calculated Total Power $\Sigma$<br>Port(s) + DCCF (+0.04 dB) | Limit<br>dBm | Margin<br>dB | EUT Power<br>Setting |
|-----------------------|-----------------------------|----|----|----|--------------------------------------------------------------|--------------|--------------|----------------------|
|                       | a                           | b  | c  | d  |                                                              |              |              |                      |
| 902.8                 | 29.70                       | -- | -- | -- | 29.74                                                        | 30.00        | -0.22        | 315.00               |
| 915.3                 | 29.53                       | -- | -- | -- | 29.57                                                        | 30.00        | -0.39        | 315.00               |
| 927.3                 | 29.47                       | -- | -- | -- | 29.51                                                        | 30.00        | -0.45        | 315.00               |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                 |
|--------------------------|---------------------------------|
| Work Instruction:        | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | $\pm 1.33$ dB                   |

DCCF - Duty Cycle Correction Factor

**NOTE: Professional installation required for this device. Power delivered to each antenna cannot be greater than the values shown above.**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 33 of 74

## **9.6. Conducted Spurious Emissions**

### **9.6.1. Conducted Emissions**

#### **9.6.1.1. Spurious Emissions**

| Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions |                              |                            |             |
|--------------------------------------------------------------------------------------|------------------------------|----------------------------|-------------|
| <b>Standard:</b>                                                                     | FCC CFR 47:15.247            | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>                                                                 | Max Unwanted Emission Levels | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>                                                          | 15.247 (d)                   | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>                                                        | See Normative References     |                            |             |

#### **Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement**

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### **Limits Transmitter Conducted Spurious and Band-Edge Emissions**

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 34 of 74

#### Equipment Configuration for Transmitter Conducted Spurious Emissions

|                                |                |                               |                |
|--------------------------------|----------------|-------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>        | 99.00          |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>    | Not Applicable |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>             | CC             |
| <b>Engineering Test Notes:</b> |                |                               |                |

#### Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) |        |        |       |        |       |        |       |
|----------------|-----------------|------------------------------------------------|--------|--------|-------|--------|-------|--------|-------|
|                |                 | Port a                                         |        | Port b |       | Port c |       | Port d |       |
| MHz            | MHz             | SE                                             | Limit  | SE     | Limit | SE     | Limit | SE     | Limit |
| 902.8          | 30.0 - 26000.0  | <a href="#">-52.300</a>                        | -26.33 | --     | --    | --     | --    | --     | --    |
| 915.3          | 30.0 - 26000.0  | <a href="#">-51.926</a>                        | -26.52 | --     | --    | --     | --    | --     | --    |
| 927.3          | 30.0 - 26000.0  | <a href="#">-51.863</a>                        | -27.13 | --     | --    | --     | --    | --     | --    |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Work Instruction:        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS       |
| Measurement Uncertainty: | <=40 GHz $\pm 2.37$ dB, > 40 GHz $\pm 4.6$ dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 35 of 74

### 9.6.1.2. Band-Edge Emissions

#### Equipment Configuration for Conducted Low Band-Edge Emissions - Average

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | 99.0           |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | 5.30           |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| <b>Channel Frequency:</b>    | 902.8 MHz                   |                  |                    |                 |                     |        |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------|
| <b>Band-Edge Frequency:</b>  | 902.0 MHz                   |                  |                    |                 |                     |        |
| <b>Test Frequency Range:</b> | 850.0 - 915.0 MHz           |                  |                    |                 |                     |        |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin |
|                              | M1 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz)  |
| a                            | <a href="#">-56.77</a>      | -1.83            | 902.50             | --              | --                  | -0.500 |

#### Traceability to Industry Recognized Test Methodologies

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS       |
| <b>Measurement Uncertainty:</b> | <=40 GHz $\pm 2.37$ dB, > 40 GHz $\pm 4.6$ dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 36 of 74

#### Equipment Configuration for Conducted High Band-Edge Emissions - Average

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | PRSK           | <b>Duty Cycle (%):</b>            | 99.00          |
| <b>Data Rate:</b>              | 25.00 Tari     | <b>Antenna Gain (dBi):</b>        | 5.30           |
| <b>Modulation:</b>             | PRSK           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | CC             |
| <b>Engineering Test Notes:</b> |                |                                   |                |

#### Test Measurement Results

| <b>Channel Frequency:</b>    | 927.3 MHz                   |                  |                    |                 |                     |        |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------|
| <b>Band-Edge Frequency:</b>  | 928.0 MHz                   |                  |                    |                 |                     |        |
| <b>Test Frequency Range:</b> | 915.0 - 978.0 MHz           |                  |                    |                 |                     |        |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin |
|                              | M3 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz)  |
| a                            | <a href="#">-56.75</a>      | -3.15            | 927.40             | --              | --                  | -0.600 |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Work Instruction:        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS       |
| Measurement Uncertainty: | <=40 GHz $\pm 2.37$ dB, > 40 GHz $\pm 4.6$ dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 37 of 74

---

## **9.7. Radiated Testing**

### **9.4.1. Radiated Spurious Emissions**

**FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209**

#### **Test Procedure**

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### **Operational Modes**

Operational mode(s) tested for spurious emissions were the modes which delivered maximum spectral density

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 38 of 74

---

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

**NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented**

### Traceability

| Test Methodology                                                                      | Measurement Uncertainty |
|---------------------------------------------------------------------------------------|-------------------------|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | +5.6/ -4.5 dB           |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 39 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                           |                        |            |
|---------------------------------|---------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technology ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                      | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable            | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 902.75                    | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275                       | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: FHSS, Test Freq: 902.75 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 275, Duty Cycle (%): 99

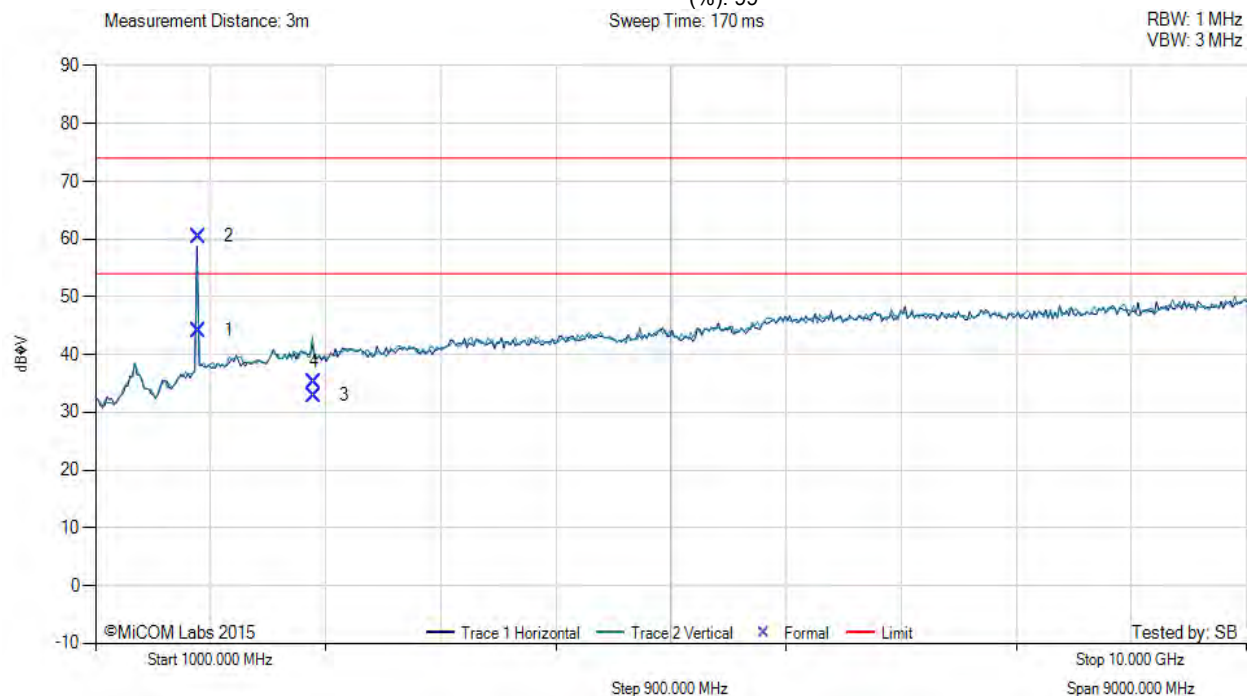

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1805.57       | 54.33    | 3.48       | -13.63 | 44.18        | Max Avg          | Horizontal | 101    | 328     | 54.0         | -9.8      | Pass       |
| 2   | 1805.57       | 70.66    | 3.48       | -13.63 | 60.51        | Max Peak         | Horizontal | 101    | 328     | 74.0         | -13.5     | Pass       |
| 3   | 2708.33       | 29.99    | 4.30       | -21.37 | 32.92        | Max Avg          | Vertical   | 100    | 64      | 54.0         | -21.1     | Pass       |
| 4   | 2708.33       | 32.32    | 4.30       | -21.37 | 35.25        | Max Peak         | Vertical   | 100    | 64      | 74.0         | -38.8     | Pass       |

**Test Notes:** w/o 50 ohm load on ant ports 1, 2, and 3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 40 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                           |                        |            |
|---------------------------------|---------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technology ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                      | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable            | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 914.25                    | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 60                        | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: FHSS, Test Freq: 914.25 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 60, Duty Cycle (%): 99

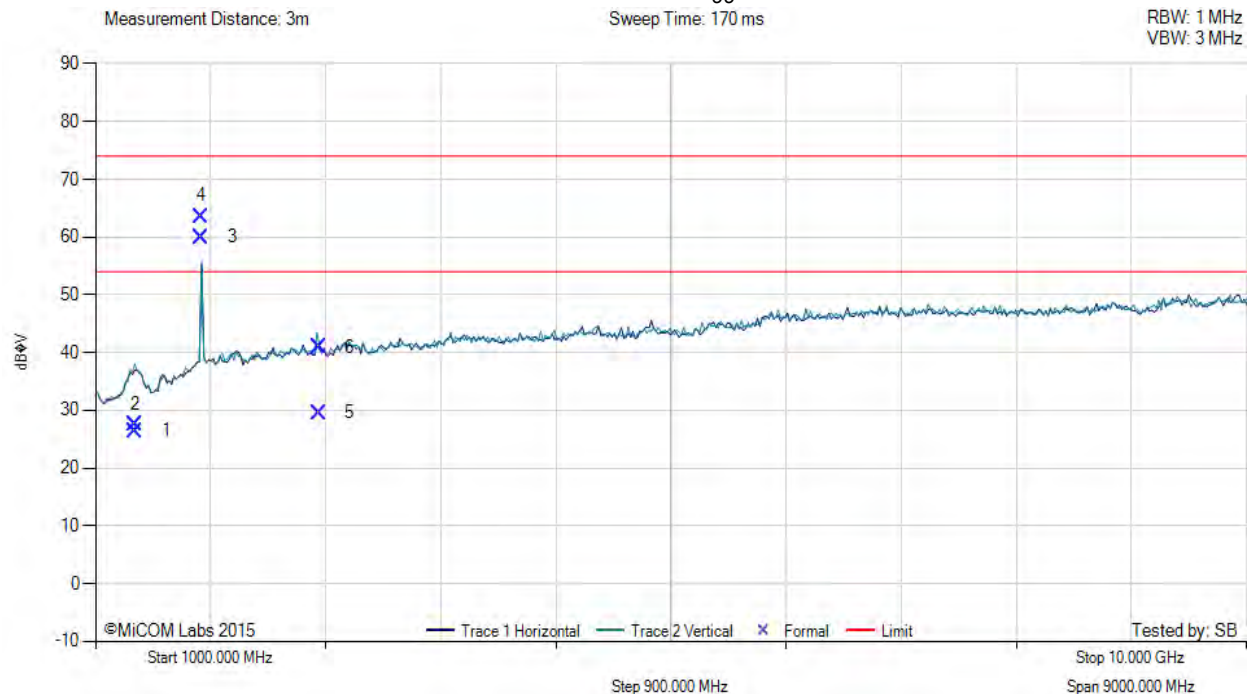

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1313.26       | 38.42    | 2.93       | -14.86 | 26.49        | Max Avg          | Vertical   | 165    | 55      | 54.0         | -27.5     | Pass       |
| 2   | 1313.26       | 49.51    | 2.93       | -14.86 | 27.58        | Max Peak         | Vertical   | 165    | 55      | 74.0         | -46.4     | Pass       |
| 3   | 1830.42       | 70.04    | 3.50       | -13.54 | 60.00        | Max Avg          | Horizontal | 100    | 356     | 54.0         | 6.0       | Pass       |
| 4   | 1830.42       | 73.60    | 3.50       | -13.54 | 63.56        | Max Peak         | Horizontal | 100    | 356     | 74.0         | 10.4      | Pass       |
| 5   | 2745.44       | 26.56    | 4.31       | -21.35 | 29.52        | Max Avg          | Vertical   | 100    | 92      | 54.0         | -24.5     | Pass       |
| 6   | 2745.44       | 38.00    | 4.31       | -21.35 | 40.96        | Max Peak         | Vertical   | 100    | 92      | 74.0         | -33.0     | Pass       |

**Test Notes:** no 50 ohm load

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 41 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                             |                        |            |
|---------------------------------|-----------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technologies ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                        | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable              | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 927.25                      | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275                         | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: FHSS, Test Freq: 927.25 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 275, Duty Cycle (%): 99

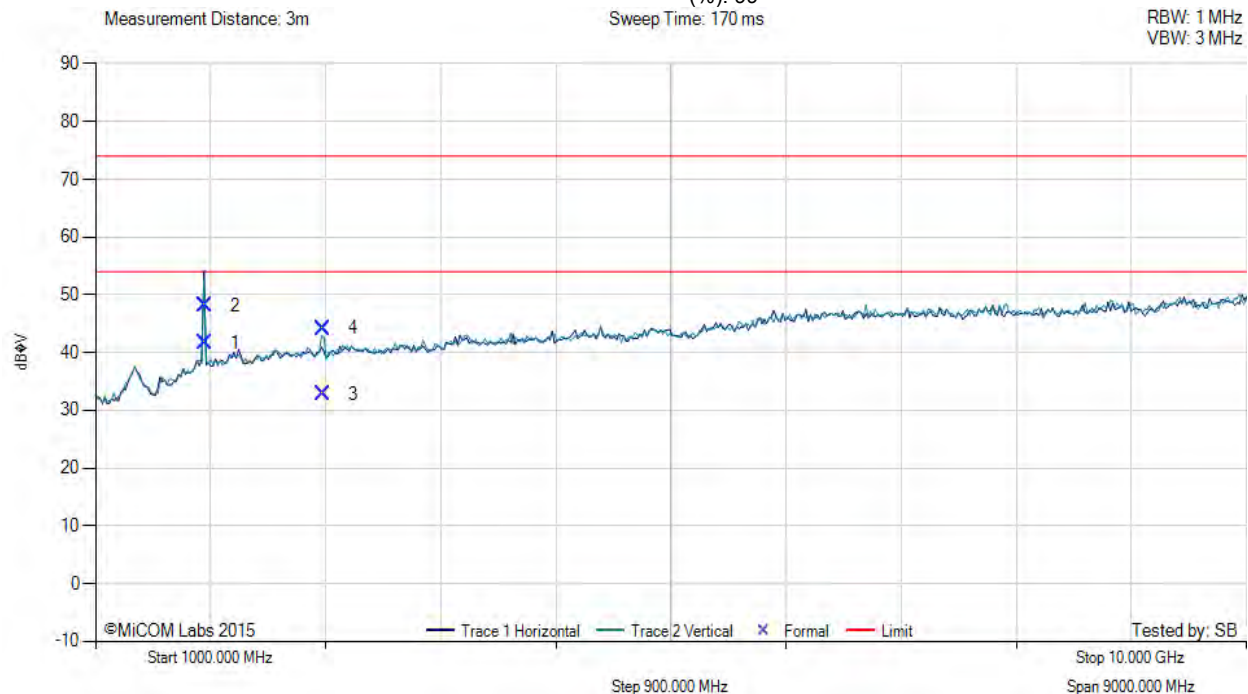

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1854.61       | 51.54    | 3.51       | -13.42 | 41.63        | Max Avg          | Horizontal | 142    | 126     | 54.0         | -12.4     | Pass       |
| 2   | 1854.61       | 58.04    | 3.51       | -13.42 | 48.13        | Max Peak         | Horizontal | 142    | 126     | 74.0         | -25.9     | Pass       |
| 3   | 2781.59       | 39.80    | 4.37       | -11.33 | 32.84        | Max Avg          | Vertical   | 117    | 94      | 54.0         | -21.2     | Pass       |
| 4   | 2781.59       | 51.18    | 4.37       | -11.33 | 44.22        | Max Peak         | Vertical   | 117    | 94      | 74.0         | -29.8     | Pass       |

**Test Notes:** w/o 50 ohm load on ant ports 1, 2, and 3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 42 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 902.75         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: FHSS, Test Freq: 902.75 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

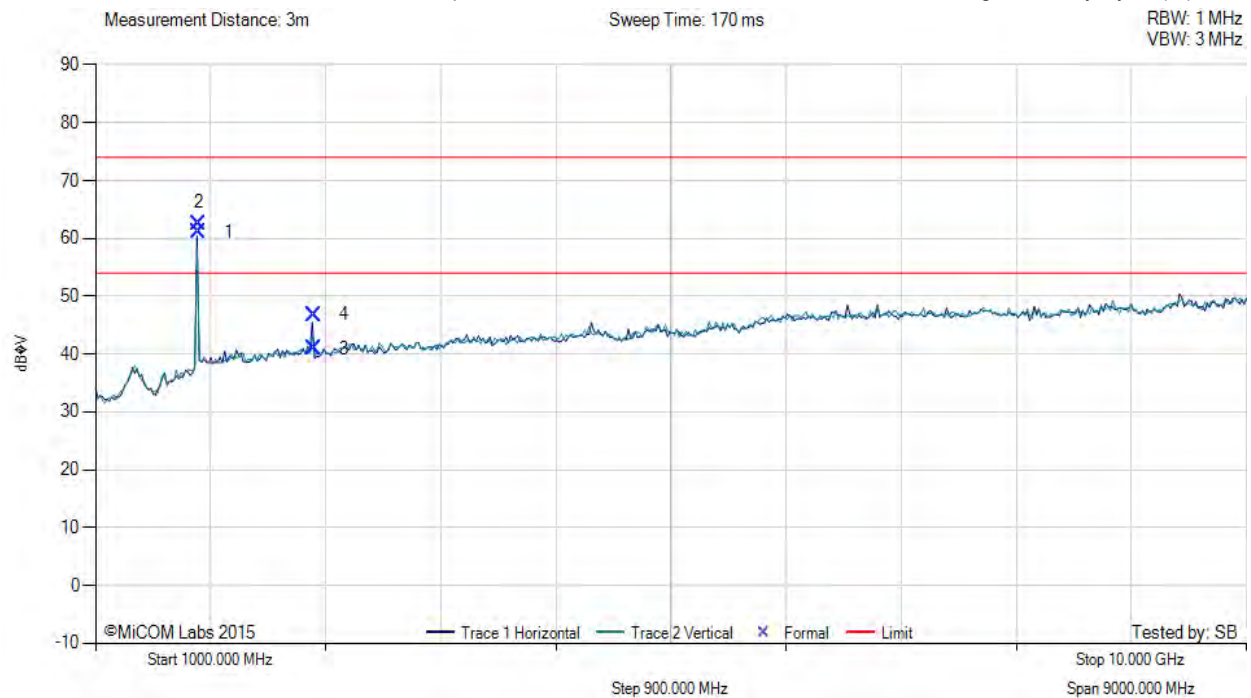

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1805.54       | 71.29    | 3.48       | -13.63 | 61.14        | Max Avg          | Horizontal | 103    | 43      | 54.0         | 7.1       | Pass       |
| 2   | 1805.54       | 72.75    | 3.48       | -13.63 | 62.60        | Max Peak         | Horizontal | 103    | 43      | 74.0         | -11.4     | Pass       |
| 3   | 2708.33       | 48.07    | 4.30       | -11.37 | 41.00        | Max Avg          | Horizontal | 100    | 47      | 54.0         | -13.0     | Pass       |
| 4   | 2708.33       | 53.87    | 4.30       | -11.37 | 46.80        | Max Peak         | Horizontal | 100    | 47      | 74.0         | -27.2     | Pass       |

**Test Notes:** w/o 50 ohm load on ant ports 1-3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 43 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 914.25         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: FHSS, Test Freq: 914.25 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

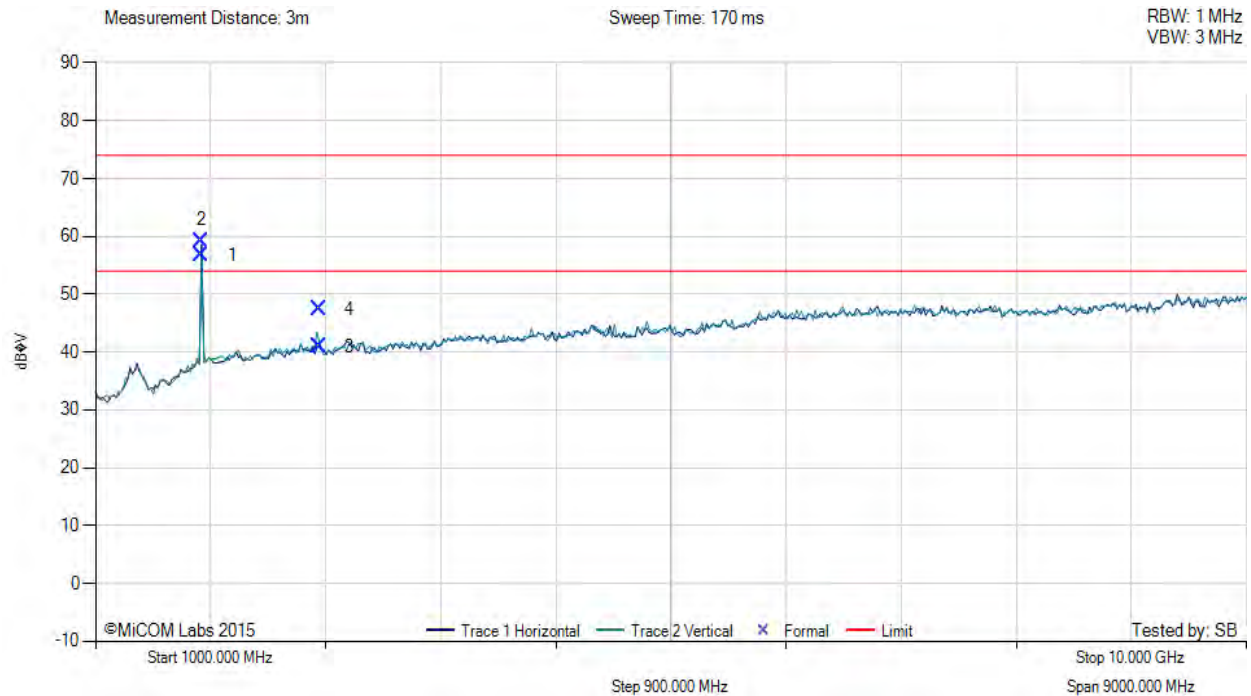

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1830.52       | 66.71    | 3.50       | -13.53 | 56.68        | Max Avg          | Horizontal | 100    | 40      | 54.0         | 2.7       | Pass       |
| 2   | 1830.52       | 69.31    | 3.50       | -13.53 | 59.28        | Max Peak         | Horizontal | 100    | 40      | 74.0         | -14.7     | Pass       |
| 3   | 2745.78       | 48.05    | 4.31       | -11.35 | 41.01        | Max Avg          | Vertical   | 100    | 340     | 54.0         | -13.0     | Pass       |
| 4   | 2745.78       | 54.41    | 4.31       | -11.35 | 47.37        | Max Peak         | Vertical   | 100    | 340     | 74.0         | -26.6     | Pass       |

**Test Notes:** w/o 50 ohm load on ant ports 1-3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 44 of 74

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 927.25         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: FHSS, Test Freq: 927.25 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

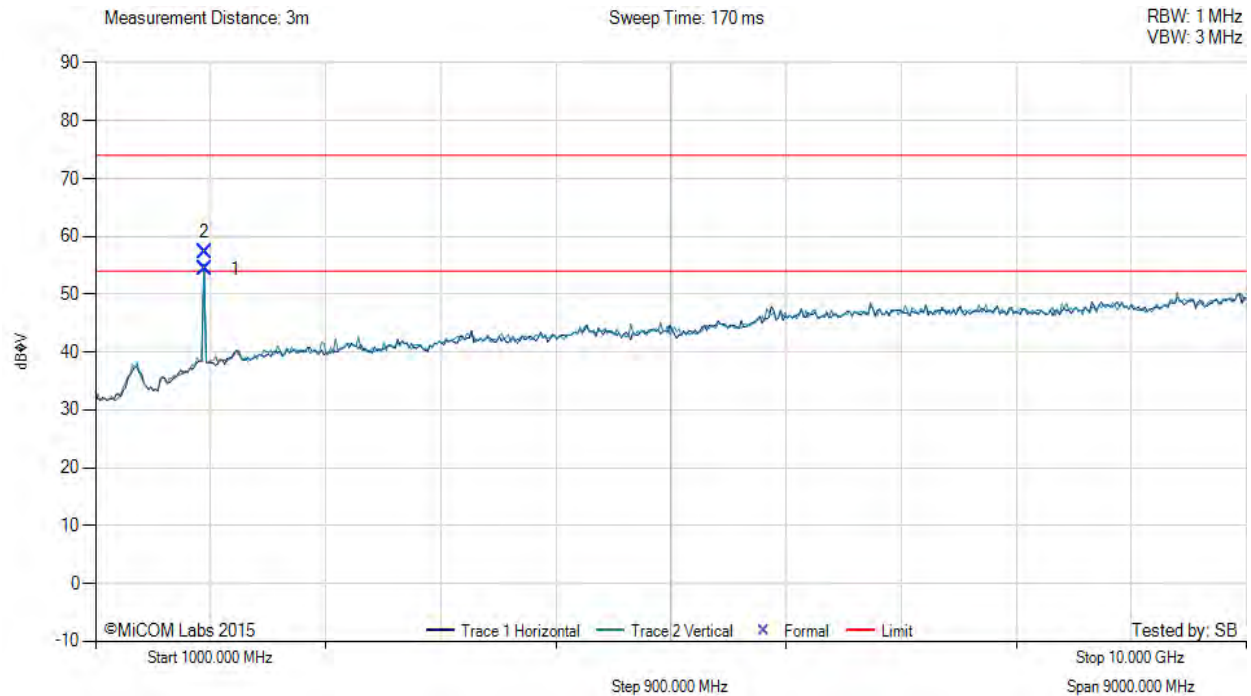

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 1854.55       | 64.33    | 3.51       | -13.42 | 54.42        | Max Avg          | Horizontal | 100    | 45      | 54.0         | 0.4       | Pass       |
| 2   | 1854.55       | 67.17    | 3.51       | -13.42 | 57.26        | Max Peak         | Horizontal | 100    | 45      | 74.0         | -16.7     | Pass       |

**Test Notes:** w/o 50 ohm load on ant ports 1-3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



#### **9.4.2. Digital Emissions (0.03 – 1 GHz)**

FCC, Part 15 Subpart C §15.205/ §15.209

##### **Test Procedure**

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

##### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

where:

$$FS = R + AF + CORR$$

FS = Field Strength  
R = Measured Receiver Input Amplitude  
AF = Antenna Factor  
CORR = Correction Factor = CL – AG + NFL  
CL = Cable Loss  
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 46 of 74

---

#### Traceability

| Test Methodology                                                                      | Laboratory Measurement Uncertainty |
|---------------------------------------------------------------------------------------|------------------------------------|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | +5.6/ -4.5 dB                      |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 47 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 902.75         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results



#### DIGITAL EMISSIONS (0.03 - 1 GHz)

Variant: FHSS, Test Freq: 902.75 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

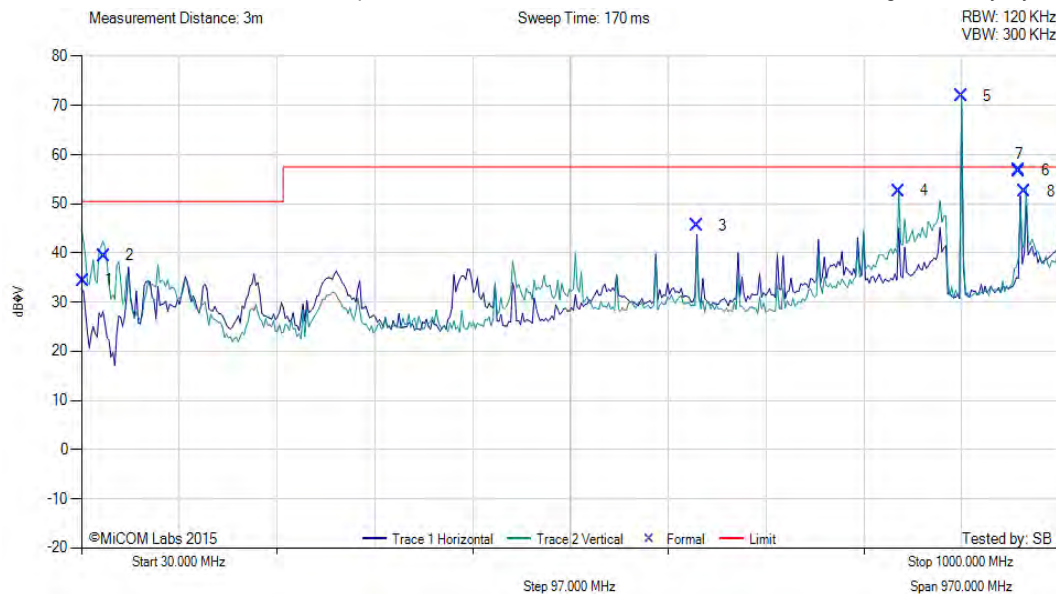

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 31.80         | 42.18    | 3.44       | -11.21 | 34.41        | MaxQP            | Vertical   | 128    | 46      | 50.5         | -16.0     | Pass       |
| 2   | 52.58         | 59.78    | 3.59       | -23.92 | 39.45        | MaxQP            | Vertical   | 100    | 0       | 50.5         | -11.1     | Pass       |
| 3   | 639.98        | 50.47    | 5.72       | -10.59 | 45.60        | MaxQP            | Horizontal | 109    | 138     | 57.0         | -11.4     | Pass       |
| 4   | 840.00        | 54.85    | 6.22       | -8.49  | 52.58        | MaxQP            | Vertical   | 107    | 1       | 57.0         | -4.4      | Pass       |
| 5   | 902.77        | 73.30    | 6.34       | -7.75  | 71.89        | Fundamental      | Vertical   |        |         |              |           |            |
| 6   | 959.96        | 57.41    | 6.49       | -7.15  | 56.75        | MaxQP            | Vertical   | 100    | 5       | 57.0         | -0.3      | Pass       |
| 7   | 959.96        | 57.25    | 6.49       | -7.15  | 56.59        | MaxQP            | Vertical   | 102    | 5       | 57.0         | -0.4      | Pass       |
| 8   | 965.49        | 53.10    | 6.49       | -7.05  | 52.54        | MaxQP            | Vertical   | 100    | 6       | 57.0         | -4.5      | Pass       |
| 9   | 1000.00       | 52.51    | 6.60       | -6.41  | 52.70        | MaxQP            | Horizontal | 114    | 337     | 57.0         | -4.3      | Pass       |

**Test Notes:** The ALR-F800 is a Class A device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 48 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 914.25         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### DIGITAL EMISSIONS (0.03 - 1 GHz)



Variant: FHSS, Test Freq: 902.75 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

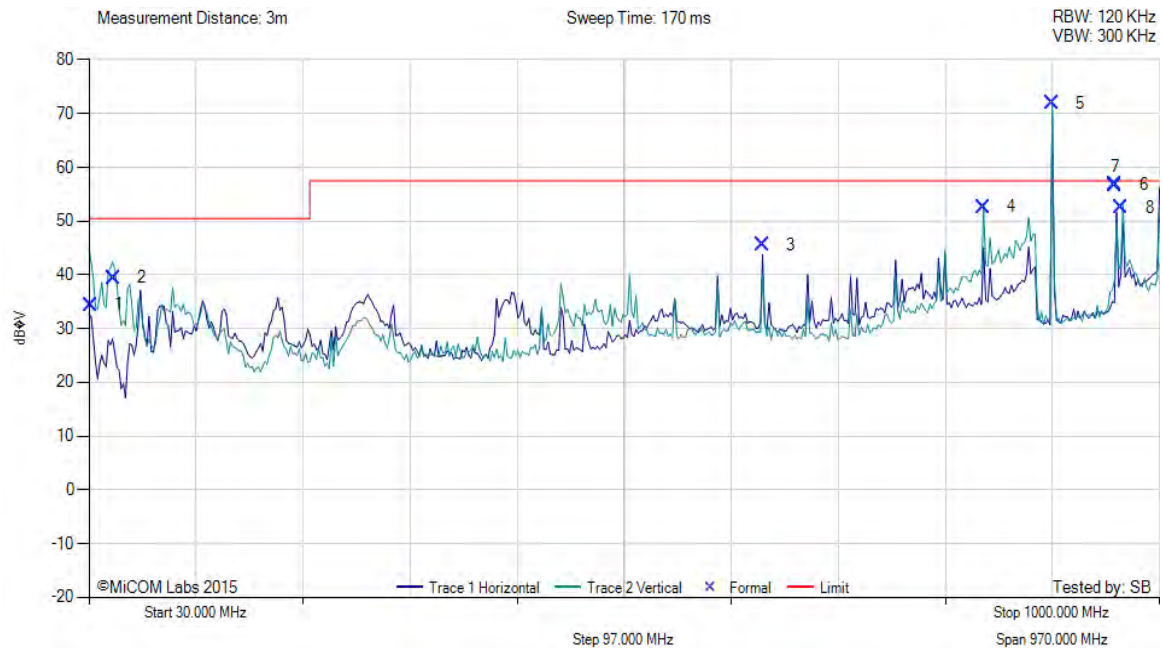

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 31.80         | 42.18    | 3.44       | -11.21 | 34.41        | MaxQP            | Vertical   | 128    | 46      | 50.5         | -16.0     | Pass       |
| 2   | 52.58         | 59.78    | 3.59       | -23.92 | 39.45        | MaxQP            | Vertical   | 100    | 0       | 50.5         | -11.1     | Pass       |
| 3   | 639.98        | 50.47    | 5.72       | -10.59 | 45.60        | MaxQP            | Horizontal | 109    | 138     | 57.0         | -11.4     | Pass       |
| 4   | 840.00        | 54.85    | 6.22       | -8.49  | 52.58        | MaxQP            | Vertical   | 107    | 1       | 57.0         | -4.4      | Pass       |
| 5   | 902.77        | 73.30    | 6.34       | -7.75  | 71.89        | Fundamental      | Vertical   |        |         |              |           |            |
| 6   | 959.96        | 57.41    | 6.49       | -7.15  | 56.75        | MaxQP            | Vertical   | 100    | 5       | 57.0         | -0.3      | Pass       |
| 7   | 959.96        | 57.25    | 6.49       | -7.15  | 56.59        | MaxQP            | Vertical   | 102    | 5       | 57.0         | -0.4      | Pass       |
| 8   | 965.49        | 53.10    | 6.49       | -7.05  | 52.54        | MaxQP            | Vertical   | 100    | 6       | 57.0         | -4.5      | Pass       |
| 9   | 1000.00       | 52.51    | 6.60       | -6.41  | 52.70        | MaxQP            | Horizontal | 114    | 337     | 57.0         | -4.3      | Pass       |

**Test Notes:** The ALR-F800 is a Class A device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 49 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                |                        |            |
|---------------------------------|----------------|------------------------|------------|
| <b>Antenna:</b>                 | Times-7 A6590C | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 6.00           | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 927.25         | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275            | <b>Tested By:</b>      | SB         |

#### Test Measurement Results



#### DIGITAL EMISSIONS (0.03 - 1 GHz)

Variant: FHSS, Test Freq: 914.25 MHz, Antenna: Times-7 A6590C, Power Setting: 275, Duty Cycle (%): 99

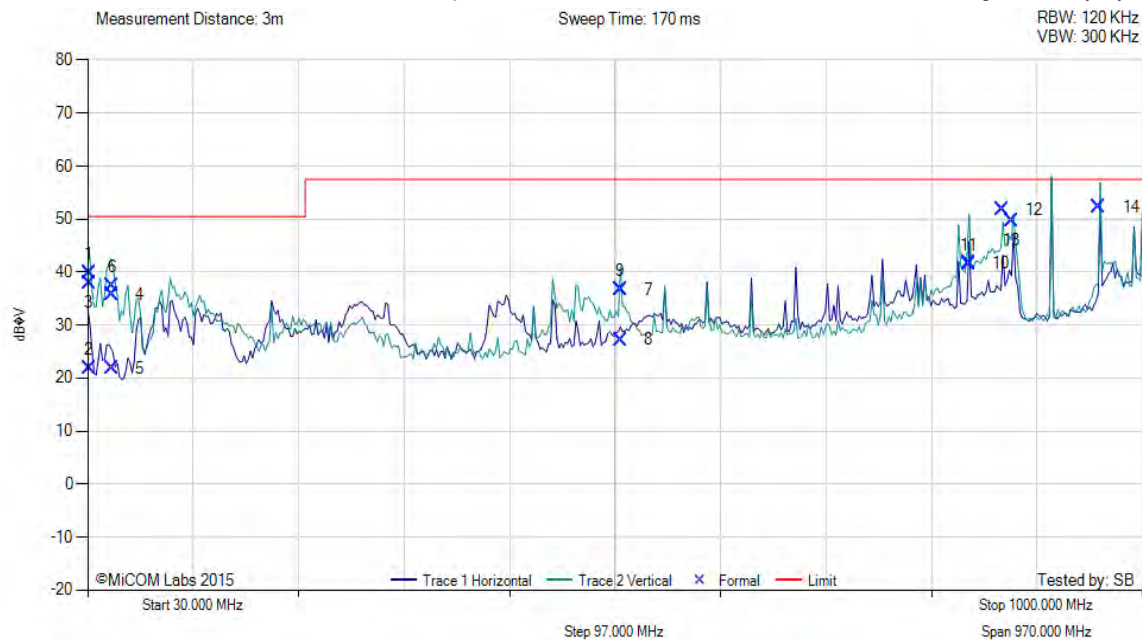

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 31.24         | 47.06    | 3.43       | -10.61 | 39.88        | MaxQP            | Vertical   | 110    | 167     | 50.5         | -10.6     | Pass       |
| 2   | 31.24         | 29.09    | 3.43       | -10.61 | 21.91        | MaxQP            | Horizontal | 107    | 88      | 50.5         | -28.6     | Pass       |
| 3   | 31.24         | 45.05    | 3.43       | -10.61 | 37.87        | MaxQP            | Vertical   | 100    | 118     | 50.5         | -12.6     | Pass       |
| 4   | 52.48         | 55.67    | 3.59       | -23.53 | 35.73        | MaxQP            | Vertical   | 112    | 84      | 50.5         | -14.8     | Pass       |
| 5   | 52.48         | 41.80    | 3.59       | -23.53 | 21.86        | MaxQP            | Horizontal | 108    | 1       | 50.5         | -28.6     | Pass       |
| 6   | 52.48         | 57.39    | 3.59       | -23.53 | 37.45        | MaxQP            | Vertical   | 105    | 101     | 50.5         | -13.1     | Pass       |
| 7   | 519.94        | 43.91    | 5.38       | -12.58 | 36.71        | MaxQP            | Vertical   | 100    | 4       | 57.0         | -20.3     | Pass       |
| 8   | 519.94        | 34.47    | 5.38       | -12.58 | 27.27        | MaxQP            | Horizontal | 104    | 313     | 57.0         | -29.7     | Pass       |
| 9   | 519.94        | 43.92    | 5.38       | -12.58 | 36.72        | MaxQP            | Vertical   | 100    | 0       | 57.0         | -20.3     | Pass       |
| 10  | 840.10        | 43.95    | 6.22       | -8.49  | 41.68        | MaxQP            | Vertical   | 103    | 0       | 57.0         | -15.3     | Pass       |
| 11  | 840.10        | 43.76    | 6.22       | -8.49  | 41.49        | MaxQP            | Vertical   | 100    | 3       | 57.0         | -15.5     | Pass       |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 50 of 74

---

|    |         |       |      |       |       |       |          |     |   |      |      |      |
|----|---------|-------|------|-------|-------|-------|----------|-----|---|------|------|------|
| 12 | 870.50  | 53.64 | 6.26 | -8.18 | 51.72 | MaxQP | Vertical | 100 | 3 | 57.0 | -5.3 | Pass |
| 13 | 880.02  | 51.56 | 6.28 | -8.20 | 49.64 | MaxQP | Vertical | 100 | 0 | 57.0 | -7.4 | Pass |
| 14 | 959.92  | 52.97 | 6.49 | -7.15 | 52.31 | MaxQP | Vertical | 100 | 6 | 57.0 | -4.7 | Pass |
| 15 | 1000.00 | 52.24 | 6.60 | -6.41 | 52.43 | MaxQP | Vertical | 100 | 9 | 57.0 | -4.6 | Pass |

**Test Notes:** The ALR-F800 is a Class A device

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 51 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                           |                        |            |
|---------------------------------|---------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technology ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                      | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable            | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 902.75                    | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275                       | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### DIGITAL EMISSIONS (0.03 - 1 GHz)



Variant: FHSS, Test Freq: 902.75 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 275, Duty Cycle (%): 99

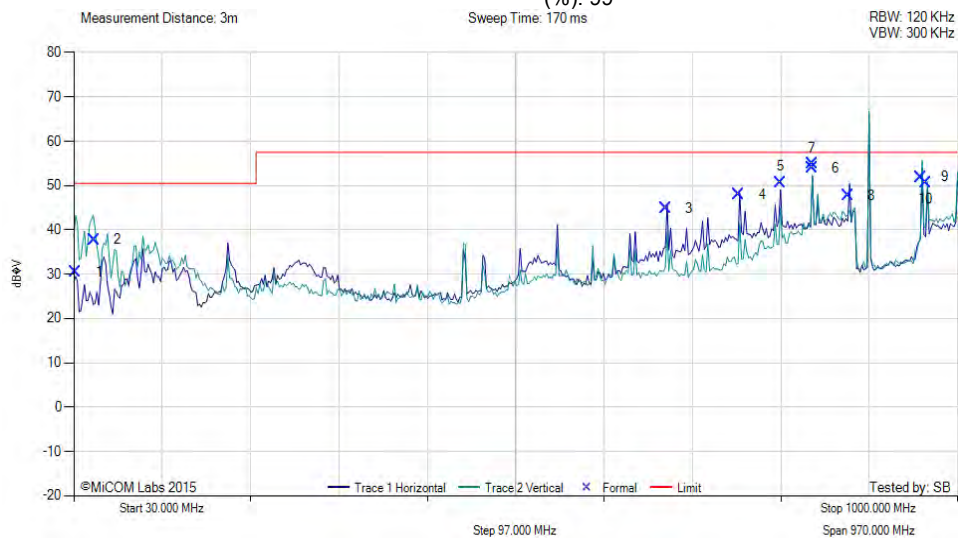

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 31.94         | 38.25    | 3.44       | -11.21 | 30.48        | MaxQP            | Vertical   | 100    | 127     | 50.5         | -20.0     | Pass       |
| 2   | 52.53         | 58.13    | 3.59       | -23.92 | 37.80        | MaxQP            | Vertical   | 117    | 302     | 50.5         | -12.7     | Pass       |
| 3   | 679.96        | 49.45    | 5.81       | -10.45 | 44.81        | MaxQP            | Horizontal | 108    | 2       | 57.0         | -12.2     | Pass       |
| 4   | 759.98        | 51.30    | 6.02       | -9.30  | 48.02        | MaxQP            | Horizontal | 100    | 8       | 57.0         | -9.0      | Pass       |
| 5   | 805.49        | 53.51    | 6.10       | -8.93  | 50.68        | MaxQP            | Horizontal | 145    | 354     | 57.0         | -6.3      | Pass       |
| 6   | 839.98        | 56.23    | 6.22       | -8.49  | 53.96        | MaxQP            | Vertical   | 113    | 14      | 57.0         | -3.0      | Pass       |
| 7   | 840.00        | 57.17    | 6.22       | -8.49  | 54.90        | MaxQP            | Horizontal | 150    | 346     | 57.0         | -2.1      | Pass       |
| 8   | 880.02        | 49.67    | 6.28       | -8.20  | 47.75        | MaxQP            | Horizontal | 100    | 21      | 57.0         | -9.8      | Pass       |
| 9   | 960.04        | 52.55    | 6.49       | -7.15  | 51.89        | MaxQP            | Vertical   | 100    | 5       | 57.0         | -5.1      | Pass       |
| 10  | 965.48        | 51.09    | 6.49       | -7.05  | 50.53        | MaxQP            | Vertical   | 101    | 19      | 57.0         | -6.5      | Pass       |
| 11  | 1000.00       | 52.48    | 6.60       | -6.41  | 52.67        | MaxQP            | Vertical   | 100    | 0       | 57.0         | -4.3      | Pass       |

**Test Notes:** The ALR-F800 is a Class A device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 52 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                           |                        |            |
|---------------------------------|---------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technology ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                      | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable            | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 914.25                    | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275                       | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### DIGITAL EMISSIONS (0.03 - 1 GHz)



Variant: FHSS, Test Freq: 914.25 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 275, Duty Cycle (%): 99

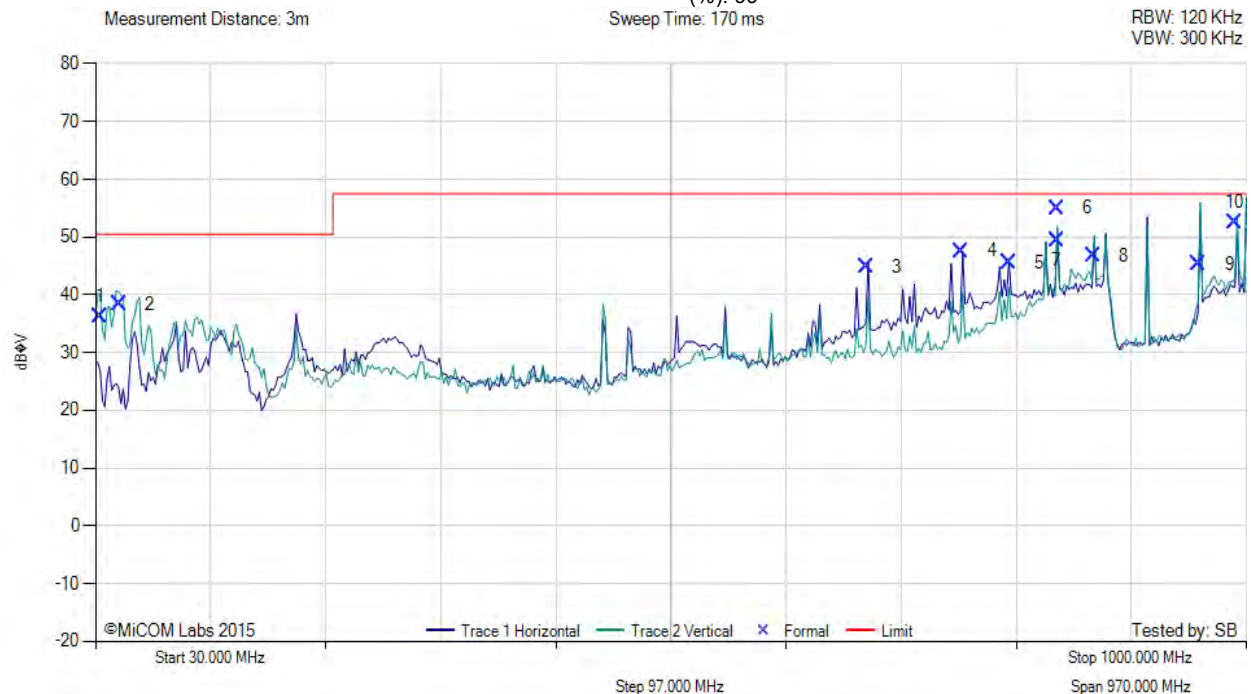

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 34.10         | 45.65    | 3.45       | -12.88 | 36.22        | MaxQP            | Vertical   | 100    | 104     | 50.5         | -14.3     | Pass       |
| 2   | 49.80         | 57.96    | 3.57       | -23.14 | 38.39        | MaxQP            | Vertical   | 112    | 333     | 50.5         | -12.1     | Pass       |
| 3   | 679.96        | 49.52    | 5.81       | -10.45 | 44.88        | MaxQP            | Horizontal | 105    | 353     | 57.0         | -12.1     | Pass       |
| 4   | 759.98        | 50.90    | 6.02       | -9.30  | 47.62        | MaxQP            | Horizontal | 100    | 12      | 57.0         | -9.4      | Pass       |
| 5   | 799.98        | 48.39    | 6.08       | -8.93  | 45.54        | MaxQP            | Horizontal | 100    | 356     | 57.0         | -11.5     | Pass       |
| 6   | 839.98        | 57.26    | 6.22       | -8.49  | 54.99        | MaxQP            | Horizontal | 150    | 350     | 57.0         | -2.0      | Pass       |
| 7   | 840.04        | 51.79    | 6.22       | -8.49  | 49.52        | MaxQP            | Vertical   | 111    | 14      | 57.0         | -7.5      | Pass       |
| 8   | 870.54        | 48.59    | 6.26       | -8.16  | 46.69        | MaxQP            | Vertical   | 112    | 6       | 57.0         | -10.4     | Pass       |
| 9   | 960.04        | 45.91    | 6.49       | -7.15  | 45.25        | MaxQP            | Vertical   | 100    | 2       | 57.0         | -11.8     | Pass       |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 53 of 74

---

|    |         |       |      |       |       |       |          |     |     |      |      |      |
|----|---------|-------|------|-------|-------|-------|----------|-----|-----|------|------|------|
| 10 | 990.49  | 52.63 | 6.55 | -6.61 | 52.57 | MaxQP | Vertical | 100 | 1   | 57.0 | -4.4 | Pass |
| 11 | 1000.00 | 53.62 | 6.60 | -6.41 | 53.81 | MaxQP | Vertical | 100 | 353 | 57.0 | -3.2 | Pass |

**Test Notes:** The ALR-F800 is a Class A device

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 54 of 74

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)


|                                 |                           |                        |            |
|---------------------------------|---------------------------|------------------------|------------|
| <b>Antenna:</b>                 | Alien Technology ALR-8696 | <b>Variant:</b>        | FHSS       |
| <b>Antenna Gain (dBi):</b>      | 5.50                      | <b>Modulation:</b>     | PRSK       |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable            | <b>Duty Cycle (%):</b> | 99         |
| <b>Channel Frequency (MHz):</b> | 927.25                    | <b>Data Rate:</b>      | 25.00 Tari |
| <b>Power Setting:</b>           | 275                       | <b>Tested By:</b>      | SB         |

#### Test Measurement Results

##### DIGITAL EMISSIONS (0.03 - 1 GHz)



Variant: FHSS, Test Freq: 927.25 MHz, Antenna: Alien Technologies ALR-8696, Power Setting: 275, Duty Cycle (%): 99

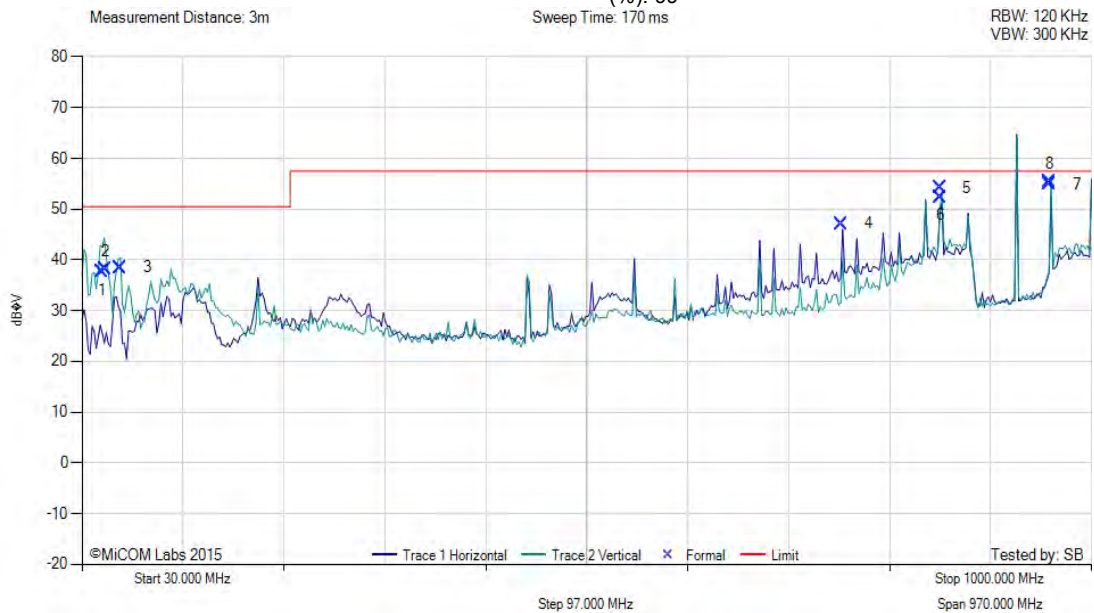

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB  | Level dBμV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1   | 48.89         | 56.95    | 3.56       | -22.83 | 37.68        | MaxQP            | Vertical   | 100    | 93      | 50.5         | -12.8     | Pass       |
| 2   | 52.78         | 58.53    | 3.59       | -23.92 | 38.20        | MaxQP            | Vertical   | 122    | 309     | 50.5         | -12.3     | Pass       |
| 3   | 66.93         | 58.13    | 3.69       | -23.30 | 38.52        | MaxQP            | Vertical   | 186    | 219     | 50.5         | -12.0     | Pass       |
| 4   | 759.98        | 50.41    | 6.02       | -9.30  | 47.13        | MaxQP            | Horizontal | 100    | 12      | 57.0         | -9.9      | Pass       |
| 5   | 854.51        | 56.25    | 6.24       | -8.29  | 54.20        | MaxQP            | Horizontal | 144    | 356     | 57.0         | -3.8      | Pass       |
| 6   | 854.51        | 54.40    | 6.24       | -8.29  | 52.35        | MaxQP            | Vertical   | 115    | 17      | 57.0         | -4.7      | Pass       |
| 7   | 959.96        | 55.58    | 6.49       | -7.15  | 54.92        | MaxQP            | Vertical   | 100    | 8       | 57.0         | -2.1      | Pass       |
| 8   | 959.98        | 55.10    | 6.49       | -7.15  | 55.44        | MaxQP            | Horizontal | 122    | 15      | 57.0         | -1.6      | Pass       |
| 9   | 1000.00       | 53.62    | 6.60       | -6.41  | 53.81        | MaxQP            | Vertical   | 100    | 353     | 57.0         | -3.2      | Pass       |

**Test Notes:** The ALR-F800 is a Class A device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 55 of 74

---

## **9.8. ac Wireline Emissions**

### **FCC, Part 15 Subpart C §15.207**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 56 of 74

### Measurement Results for ac Wireline Conducted Emissions (150 kHz – 30 MHz)


|                      |                                |                       |      |
|----------------------|--------------------------------|-----------------------|------|
| <b>Model Number</b>  | POE30U-560(G)                  | <b>Engineer</b>       | SB   |
| <b>Variant</b>       | AC Wireline 120Vac 60 Hz       | <b>Temp (°C)</b>      | 10   |
| <b>Freq. Range</b>   | 0.150 MHz - 30 MHz             | <b>Rel. Hum.(%)</b>   | 37   |
| <b>Power Setting</b> | N/A                            | <b>Press. (mBars)</b> | 1010 |
| <b>Antenna</b>       | 50 Ohm Termination             |                       |      |
| <b>Test Notes 1</b>  | 120VAC / 1.0A (56VDC / 0.55A); |                       |      |
| <b>Test Notes 2</b>  | Class B Limits                 |                       |      |

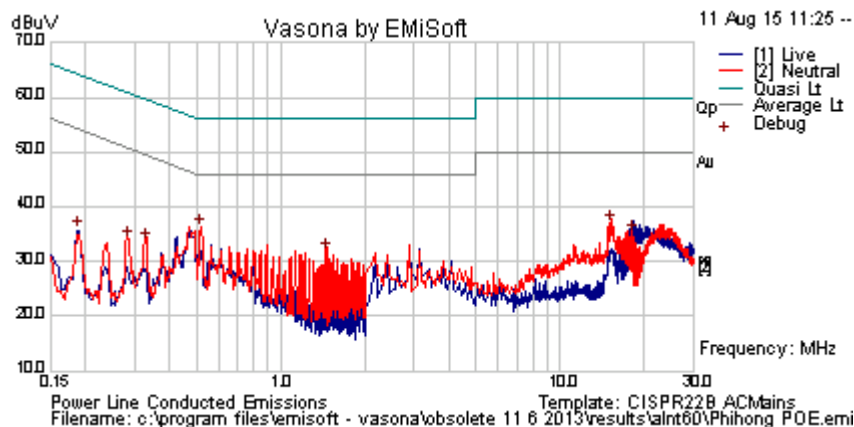

### Formally measured emission peaks

| Frequency MHz                                                                                  | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line    | Limit dBuV | Margin dB | Pass /Fail | Comments |
|------------------------------------------------------------------------------------------------|----------|------------|------------|------------|------------------|---------|------------|-----------|------------|----------|
| 0.520                                                                                          | 26.0     | 9.9        | 0.1        | 36.0       | Peak [Scan]      | Neutral | 46         | -10.0     | Pass       |          |
| 15.373                                                                                         | 26.0     | 10.4       | 0.6        | 37.0       | Peak [Scan]      | Neutral | 50         | -13.0     | Pass       |          |
| 1.455                                                                                          | 21.8     | 10.0       | 0.1        | 31.9       | Peak [Scan]      | Neutral | 46         | -14.1     | Pass       |          |
| 18.377                                                                                         | 23.9     | 10.5       | 0.7        | 35.1       | Peak [Scan]      | Live    | 50         | -14.9     | Pass       |          |
| 0.333                                                                                          | 23.5     | 9.9        | 0.1        | 33.4       | Peak [Scan]      | Neutral | 49.38      | -15.9     | Pass       |          |
| 0.287                                                                                          | 24.2     | 9.9        | 0.1        | 34.1       | Peak [Scan]      | Neutral | 50.61      | -16.5     | Pass       |          |
| 0.190                                                                                          | 25.7     | 9.9        | 0.1        | 35.6       | Peak [Scan]      | Live    | 54.04      | -18.4     | Pass       |          |
| Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency |          |            |            |            |                  |         |            |           |            |          |
| NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band              |          |            |            |            |                  |         |            |           |            |          |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

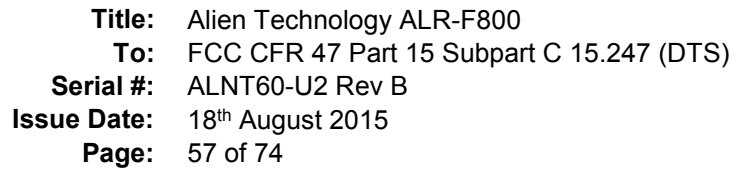



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 58 of 74

## Specification

### Limits

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### §15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\* Decreases with the logarithm of the frequency

### Traceability

| Test Methodology                                                                           | Laboratory Measurement Uncertainty |
|--------------------------------------------------------------------------------------------|------------------------------------|
| Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions' | $\pm 2.64$ dB                      |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 59 of 74

---

## **A. APPENDIX - GRAPHICAL IMAGES**

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.1. 20 dB & 99% Bandwidth



### 20 dB & 99% BANDWIDTH

Variant: PRSK, Channel: 902.75 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

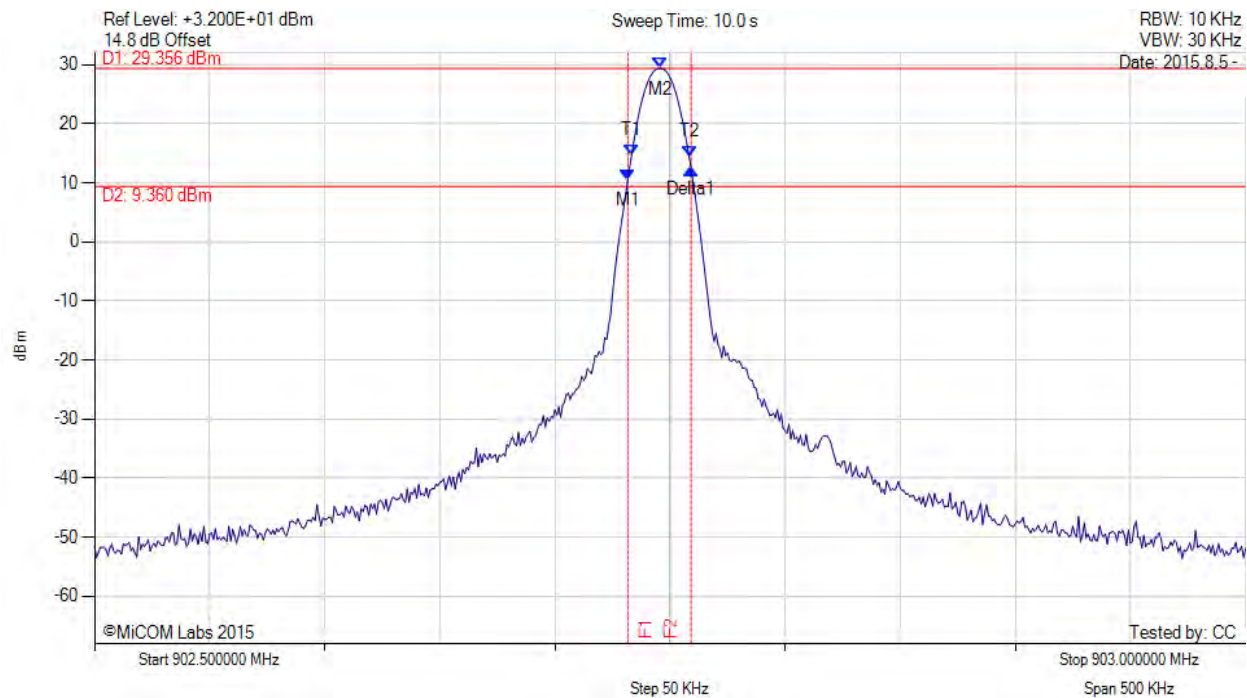

| Analyser Setup                                                               | Marker:Frequency:Amplitude                                                                                                                                                     | Test Results                                                                |
|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = MAXH | M1 : 902.732 MHz : 10.542 dBm<br>M2 : 902.746 MHz : 29.356 dBm<br>Delta1 : 28 KHz : 1.829 dB<br>T1 : 902.733 MHz : 14.707 dBm<br>T2 : 902.758 MHz : 14.392 dBm<br>OBW : 25 KHz | Measured 6 dB Bandwidth: 0.028 MHz<br>Limit: ≥500.0 kHz<br>Margin: 0.47 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 61 of 74



20 dB & 99% BANDWIDTH

Variant: PRSK, Channel: 915.25 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

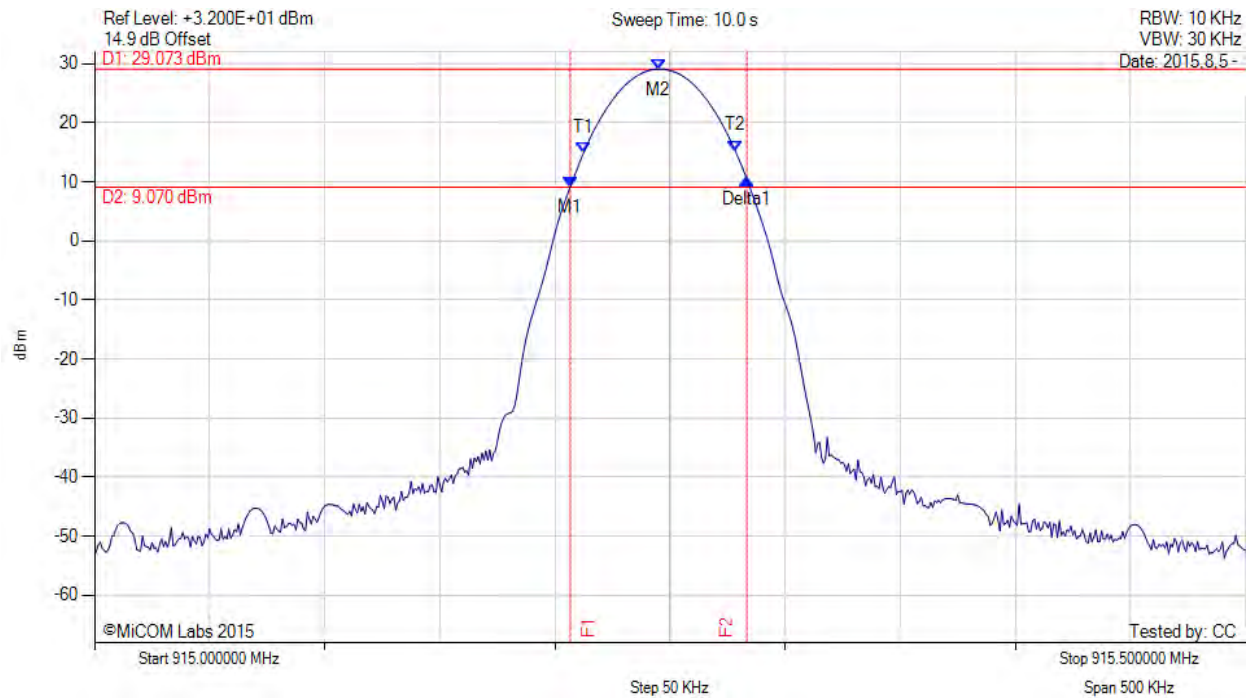

| Analyser Setup                                                               | Marker:Frequency:Amplitude                                                                                                                                                    | Test Results                                                                |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = MAXH | M1 : 915.207 MHz : 9.106 dBm<br>M2 : 915.245 MHz : 29.073 dBm<br>Delta1 : 77 KHz : 1.388 dB<br>T1 : 915.213 MHz : 14.936 dBm<br>T2 : 915.278 MHz : 15.252 dBm<br>OBW : 66 KHz | Measured 6 dB Bandwidth: 0.077 MHz<br>Limit: ≥250.0 kHz<br>Margin: 0.17 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 62 of 74



20 dB & 99% BANDWIDTH

Variant: PRSK, Channel: 927.25 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

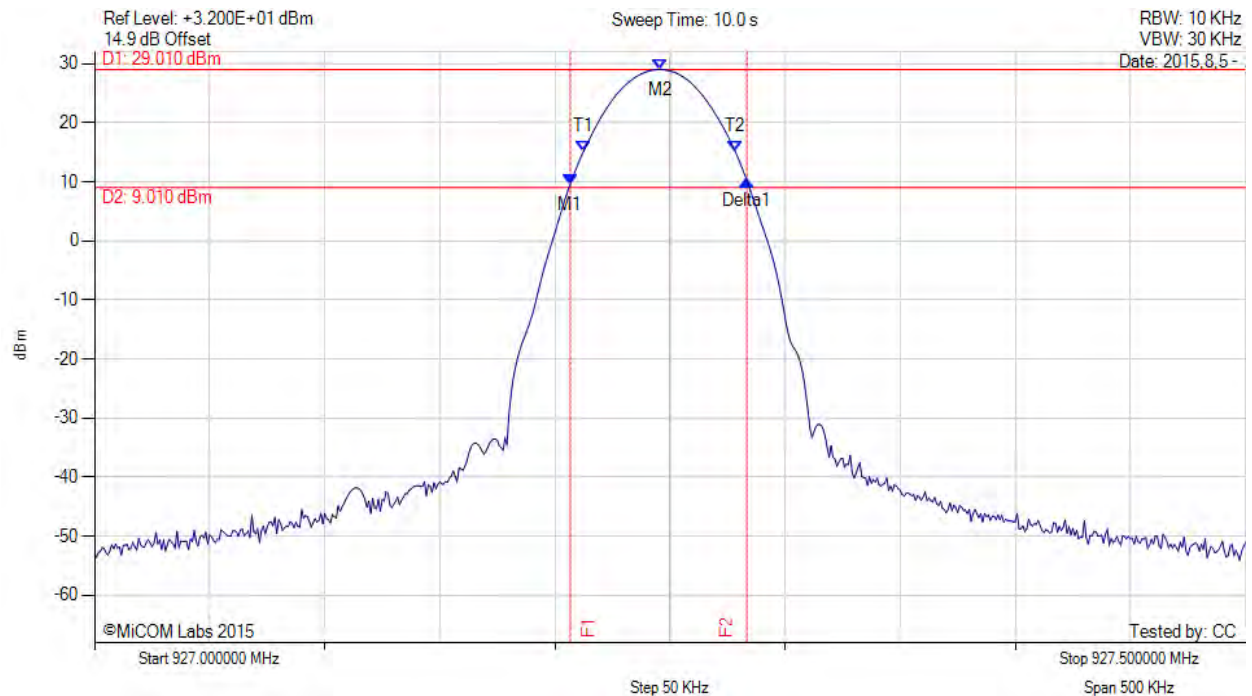

| Analyser Setup                                                               | Marker:Frequency:Amplitude                                                                                                                                                    | Test Results                                                                |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = MAXH | M1 : 927.207 MHz : 9.623 dBm<br>M2 : 927.246 MHz : 29.010 dBm<br>Delta1 : 77 KHz : 0.650 dB<br>T1 : 927.213 MHz : 15.197 dBm<br>T2 : 927.278 MHz : 15.114 dBm<br>OBW : 67 KHz | Measured 6 dB Bandwidth: 0.077 MHz<br>Limit: ≥250.0 kHz<br>Margin: 0.17 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 63 of 74

## A.2. Number Of Channels



Hopping Sequence 902-912

Variant: PRSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 12 Vdc

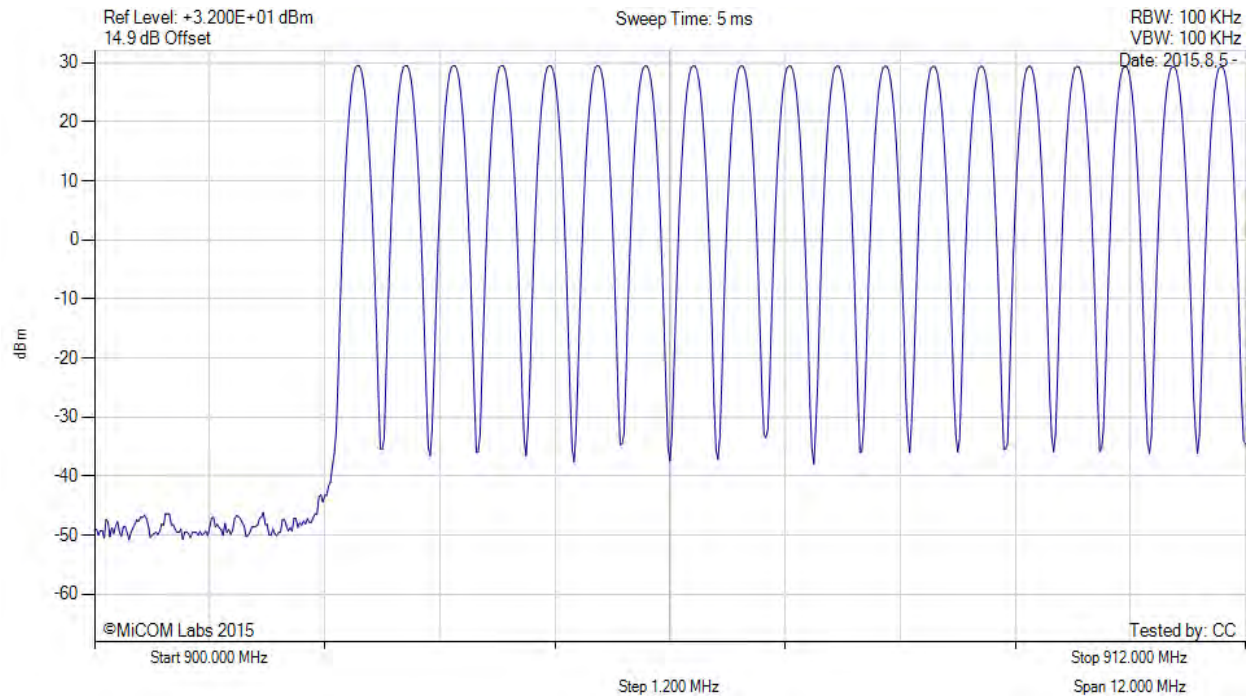

| Analyser Setup                                                               | Marker:Frequency:Amplitude | Test Results |
|------------------------------------------------------------------------------|----------------------------|--------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW |                            |              |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 64 of 74



### Hopping Sequence 912-920 MHz

Variant: PRSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 12 Vdc

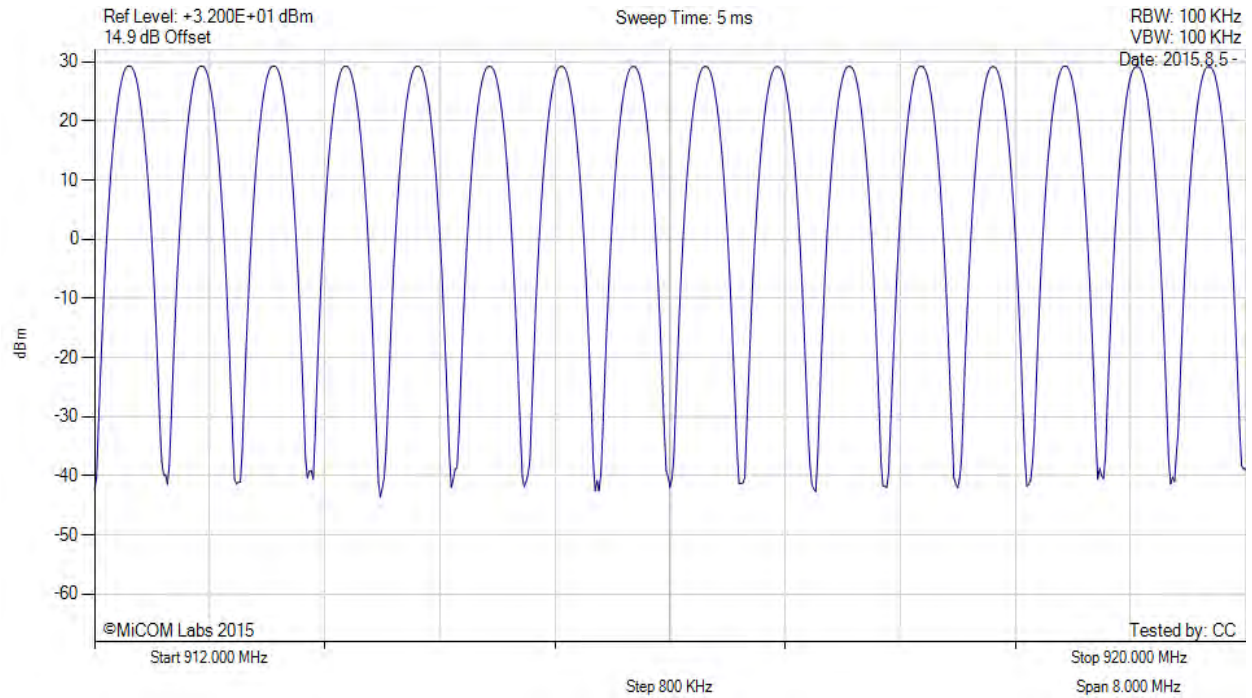

| Analyser Setup                                                               | Marker:Frequency:Amplitude | Test Results |
|------------------------------------------------------------------------------|----------------------------|--------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW |                            |              |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 65 of 74



#### Hopping Sequence 920-928 MHz

Variant: PRSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 12 Vdc

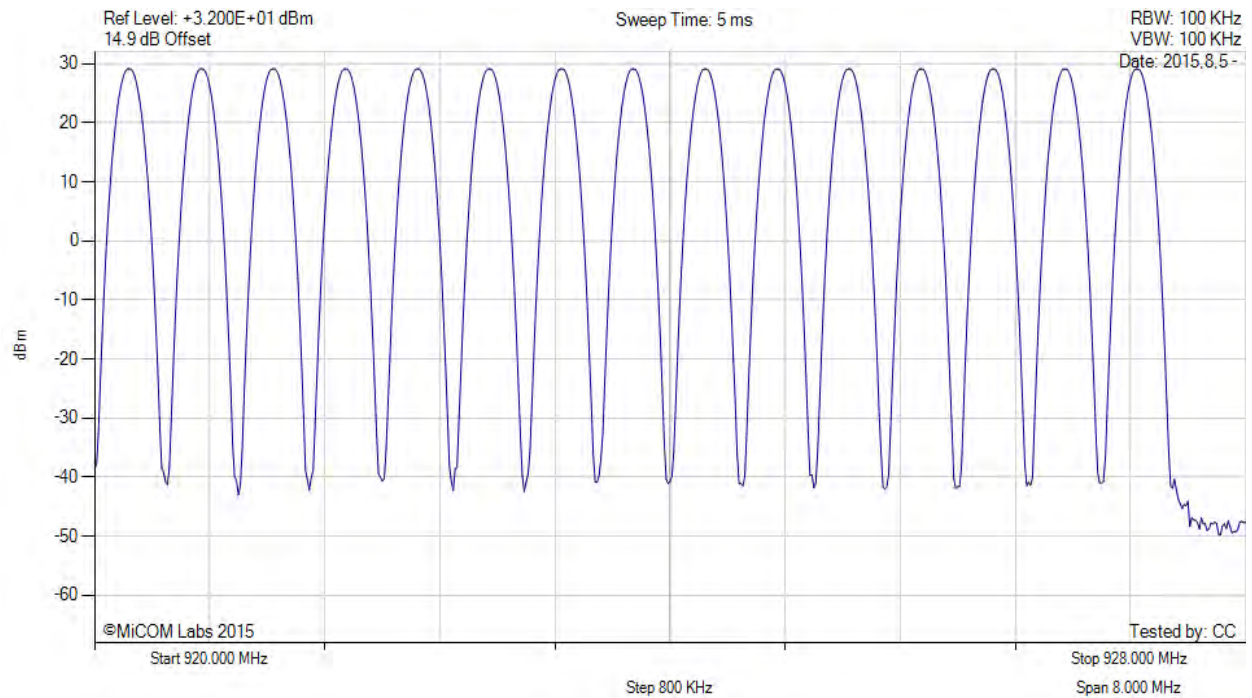

| Analyser Setup                                                               | Marker:Frequency:Amplitude | Test Results |
|------------------------------------------------------------------------------|----------------------------|--------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW |                            |              |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.3. Channel Spacing



#### Channel Spacing

Variant: PRSK, Channel: 902.75 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

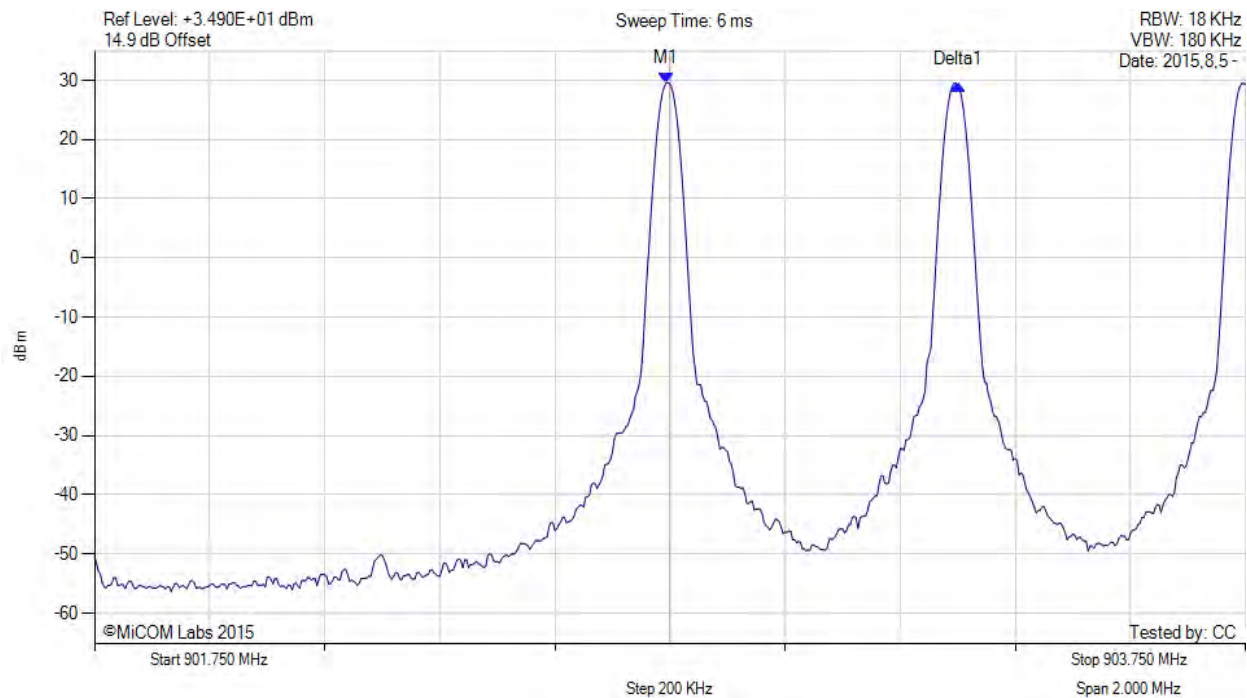

| Analyser Setup                                                               | Marker:Frequency:Amplitude                                    | Test Results                  |
|------------------------------------------------------------------------------|---------------------------------------------------------------|-------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = MAXH | M1 : 902.743 MHz : 29.470 dBm<br>Delta1 : 507 KHz : -0.115 dB | Channel Frequency: 902.75 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 67 of 74

#### A.4. Dwell Time & Channel Occupancy



#### Dwell Time

Variant: PRSK, Channel: 927.25 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

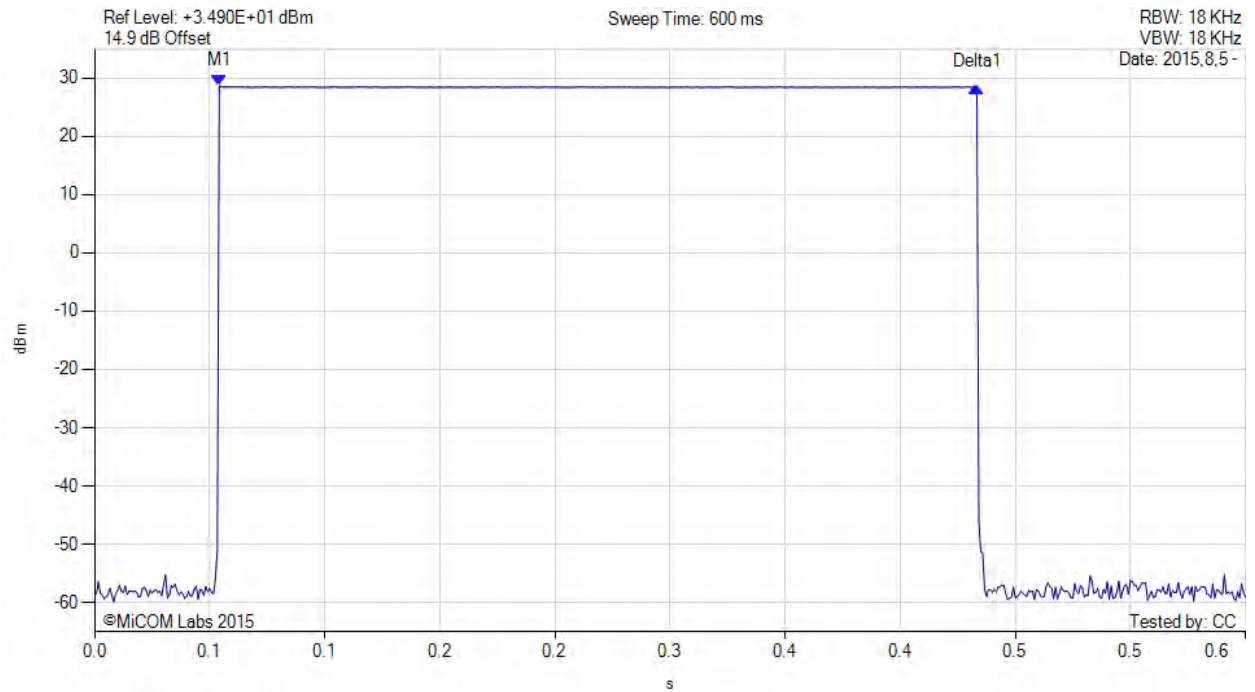

| Analyser Setup                                                               | Marker:Time:Amplitude                                                             | Test Results                  |
|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1(927.25 MHz) : 0.065 s : 28.640 dBm<br>Delta1(927.25 MHz) : 0.395 s : -0.241 dB | Channel Frequency: 927.25 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 68 of 74



#### Channel Occupancy

Variant: PRSK, Channel: 927.25 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

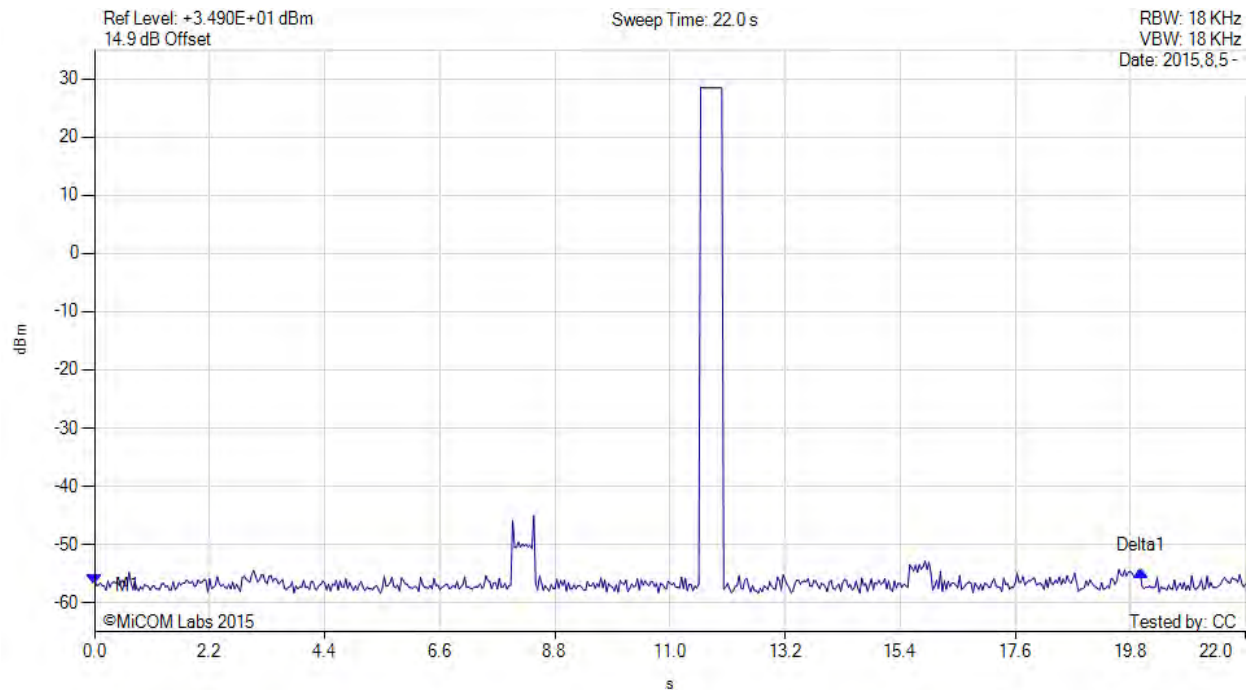

| Analyser Setup                                                               | Marker:Time:Amplitude                                                              | Test Results                  |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------|
| Detector = POS<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1(927.25 MHz) : 0.000 s : -56.920 dBm<br>Delta1(927.25 MHz) : 20.000 s : 2.409 dB | Channel Frequency: 927.25 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 69 of 74

## A.5. Emissions

### A.5.1. Conducted Emissions

#### A.5.1.1. Conducted Spurious Emissions

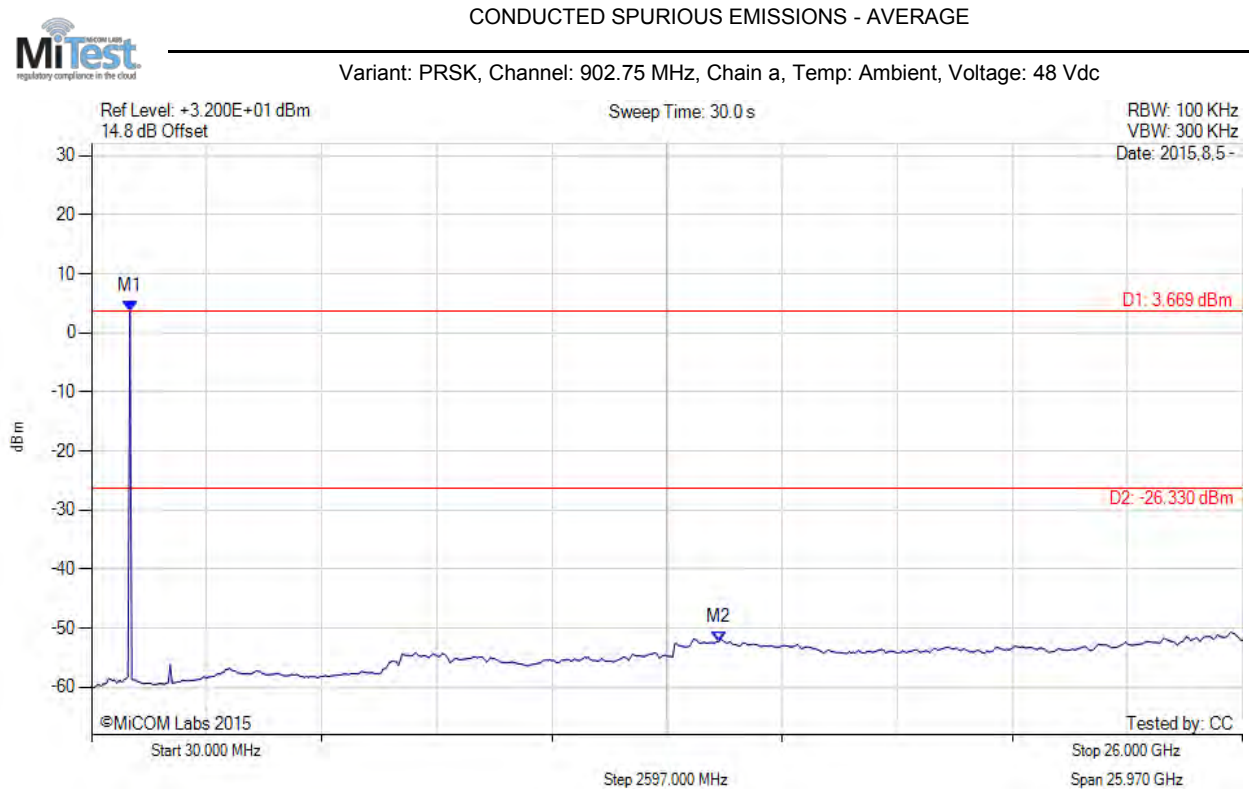

| Analyser Setup                                                                | Marker:Frequency:Amplitude                                    | Test Results                           |
|-------------------------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------|
| Detector = AVER<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1 : 900.000 MHz : 3.669 dBm<br>M2 : 14.180 GHz : -52.300 dBm | Limit: -26.33 dBm<br>Margin: -25.97 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 70 of 74



#### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: PRSK, Channel: 915.25 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

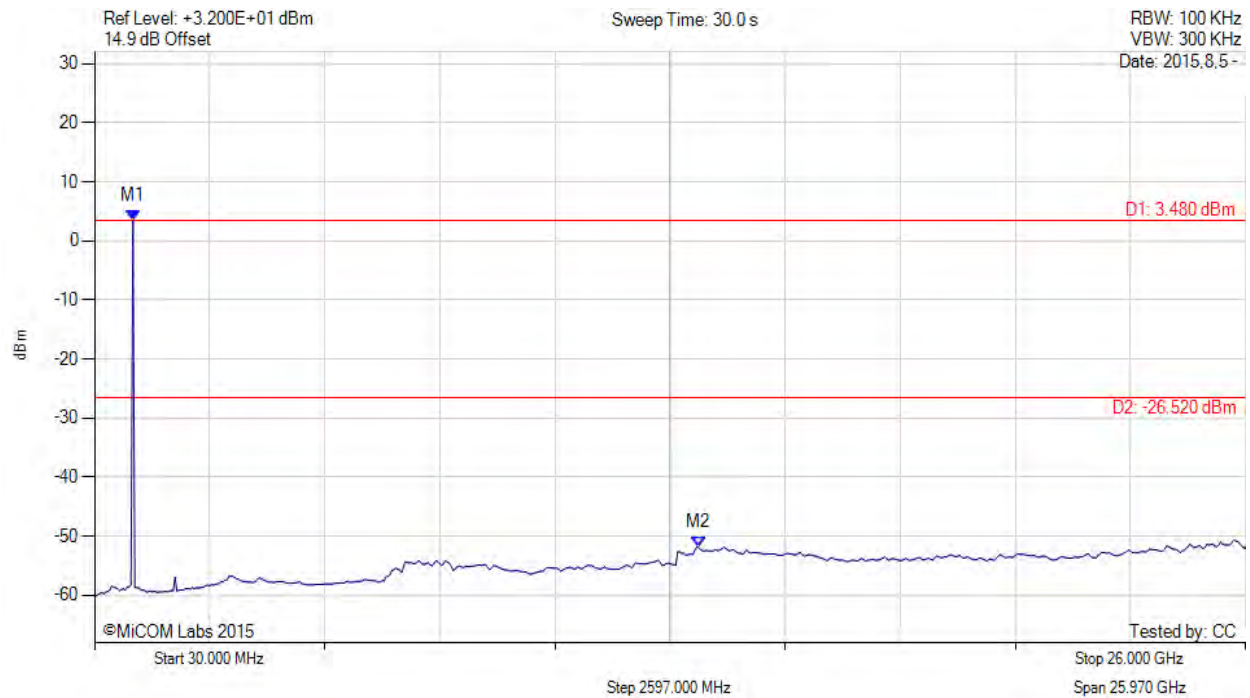

| Analyser Setup                                                                | Marker:Frequency:Amplitude                                    | Test Results                           |
|-------------------------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------|
| Detector = AVER<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1 : 900.000 MHz : 3.480 dBm<br>M2 : 13.660 GHz : -51.926 dBm | Limit: -26.52 dBm<br>Margin: -25.41 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 71 of 74



#### CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: PRSK, Channel: 927.25 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

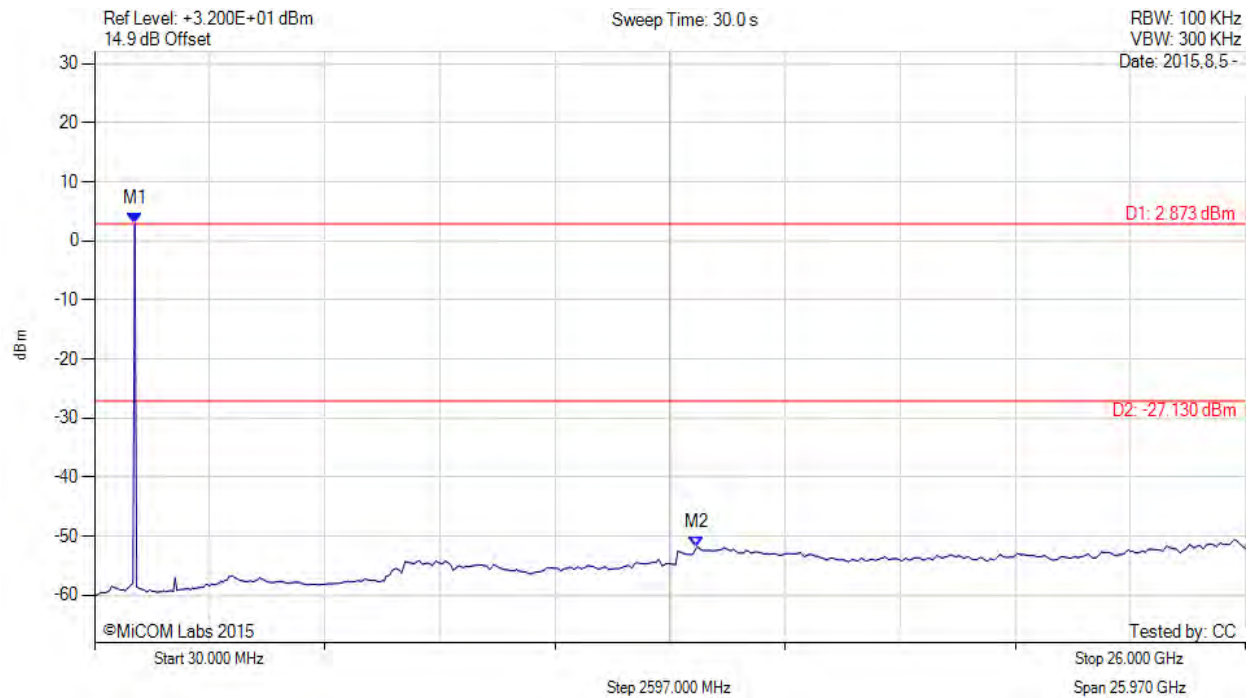

| Analyser Setup                                                                | Marker:Frequency:Amplitude                                    | Test Results                           |
|-------------------------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------|
| Detector = AVER<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1 : 940.000 MHz : 2.873 dBm<br>M2 : 13.620 GHz : -51.863 dBm | Limit: -27.13 dBm<br>Margin: -24.73 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 72 of 74

#### A.5.1.2. Conducted Band-Edge Emissions



#### CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: PRSK, Channel: 902.75 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

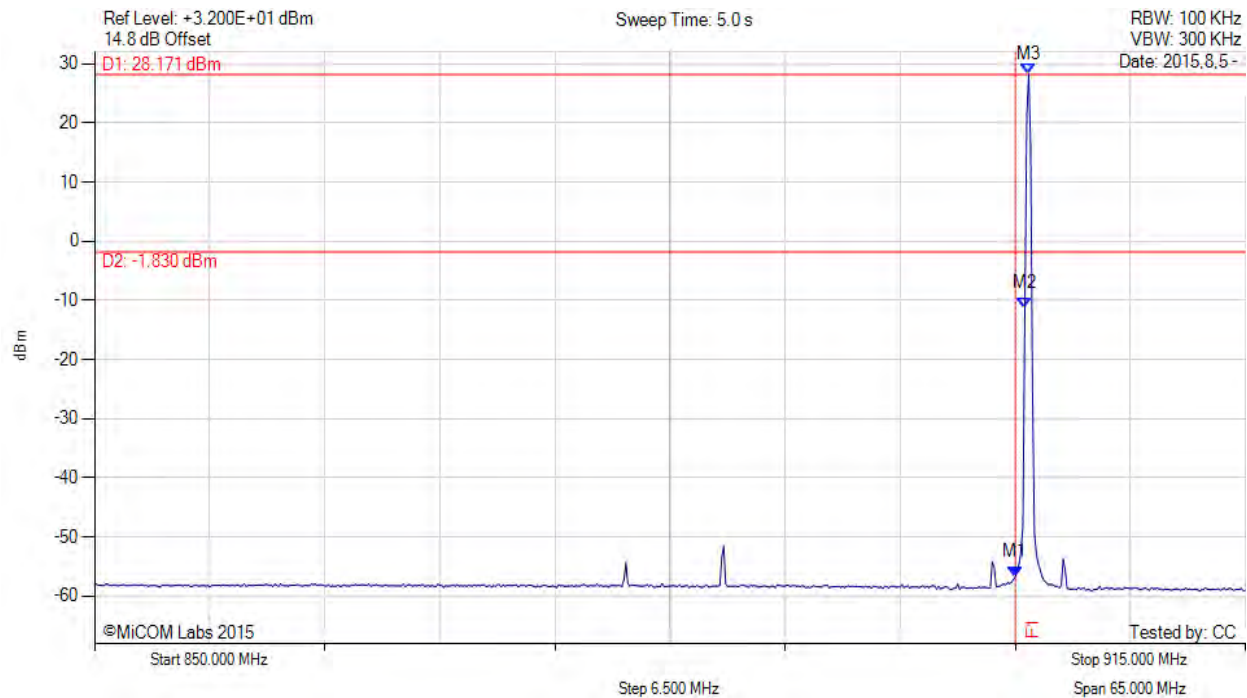

| Analyser Setup                                                                | Marker:Frequency:Amplitude                                                                        | Test Results                  |
|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------|
| Detector = AVER<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1 : 902.000 MHz : -56.769 dBm<br>M2 : 902.540 MHz : -11.456 dBm<br>M3 : 902.760 MHz : 28.171 dBm | Channel Frequency: 902.75 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Alien Technology ALR-F800  
**To:** FCC CFR 47 Part 15 Subpart C 15.247 (DTS)  
**Serial #:** ALNT60-U2 Rev B  
**Issue Date:** 18<sup>th</sup> August 2015  
**Page:** 73 of 74



#### CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: PRSK, Channel: 927.25 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

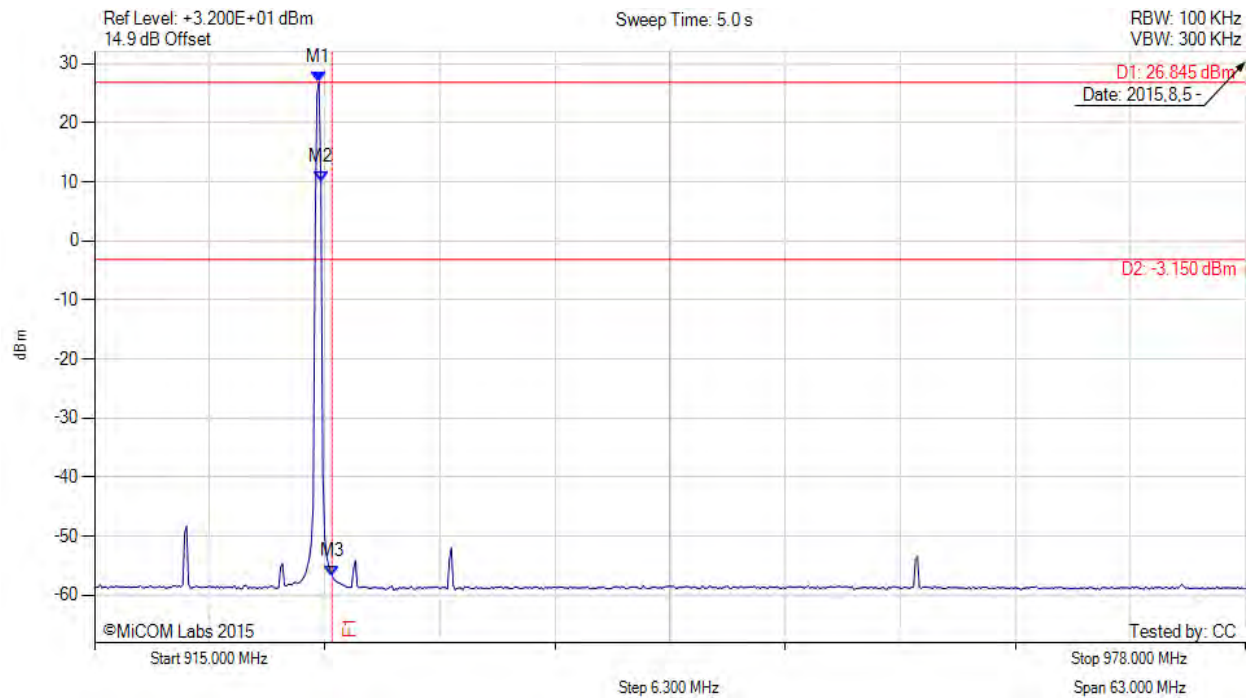

| Analyser Setup                                                                | Marker:Frequency:Amplitude                                                                       | Test Results                  |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------|
| Detector = AVER<br>Sweep Count = 0<br>RF Atten (dB) = 30<br>Trace Mode = VIEW | M1 : 927.280 MHz : 26.845 dBm<br>M2 : 927.390 MHz : 10.021 dBm<br>M3 : 928.000 MHz : -56.752 dBm | Channel Frequency: 927.25 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)