



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Audex Telecom Industrial Co., Ltd.

4/F., Chuangye Center, Kangle Road., Zhongshan Torch Hi-Tech Industrial Zone,
Zhongshan, Guangdong, China

FCC ID: P68MT7000

Report Type: Original Report	Product Type: Motor Trend Bluetooth Headset
Test Engineer:	Weir Zhong
Report Number:	RSZ10031101
Report Date:	2010-03-23
	Merry Zhao
Reviewed By:	EMC Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
CFR47 §15.247 (i), §1.1307 (b)(1) & §2.1093 - RF EXPOSURE	10
STANDARD APPLICABLE	10
CFR47 §15.203 – ANTENNA REQUIREMENT	11
STANDARD APPLICABLE	11
ANTENNA CONNECTOR CONSTRUCTION	11
CFR47 §15.207 (a) - CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP	13
TEST EQUIPMENT LIST AND DETAILS	13
TEST PROCEDURE	13
TEST RESULTS SUMMARY	13
TEST DATA	13
CFR47 §15.205, §15.109, §15.209, §15.247 (d) – RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST EQUIPMENT LIST AND DETAILS	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	18
TEST DATA	18
CFR47 §15.247(a)(1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST EQUIPMENT LIST AND DETAILS	24
TEST PROCEDURE	24
TEST DATA	24
CFR47 §15.247(a)(1) – 20 dB BANDWIDTH TESTING	27

APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27
TEST DATA	27
CFR47 §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30
TEST DATA	30
CFR47 §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME).....	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE	32
TEST DATA	32
CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT	38
APPLICABLE STANDARD	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST PROCEDURE	38
TEST DATA	38
CFR47 §15.247(d) - BAND EDGES TESTING	40
APPLICABLE STANDARD	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST PROCEDURE	40
TEST DATA	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Audex Telecom Industrial Co., Ltd.'s product, model number: MT-7000 (FCC ID: P68MT7000) or the "EUT" as referred to in this report is a *Motror Trend Bluetooth eadset*, which measures approximately: 18 cm L x 16 cm W x 5 cm H, rated input voltage: DC 12V car charger or DC 5.0V adapter and 3.7V V lithium battery.

Note: The EUT can not operate while it is charged.

Adapter information

Model: JG198,

Input: AC 100-240V 50/60Hz 150mA;

Output: DC 5.0V 550mA

All measurement and test data in this report was gathered from production sample serial number: 1003030 (Assigned by BACL, Shenzhen). The EUT was received on 2010-03-11.

Objective

This Type approval report is prepared on behalf of Audex Telecom Industrial Co., Ltd. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.109, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications

No modification was made to the unit tested.

EUT Exercise Software

Bluetest 3.0

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
STK	Car Charger	CKBTSP500	N/A	N/A

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Detachable USB Cable	1.1	EUT	Adapter

Configuration of Test Setup

For transmitting mode:




For charging mode:

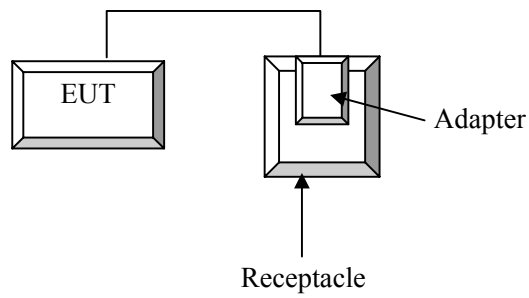


Block Diagram of Test Setup

For transmitting mode:

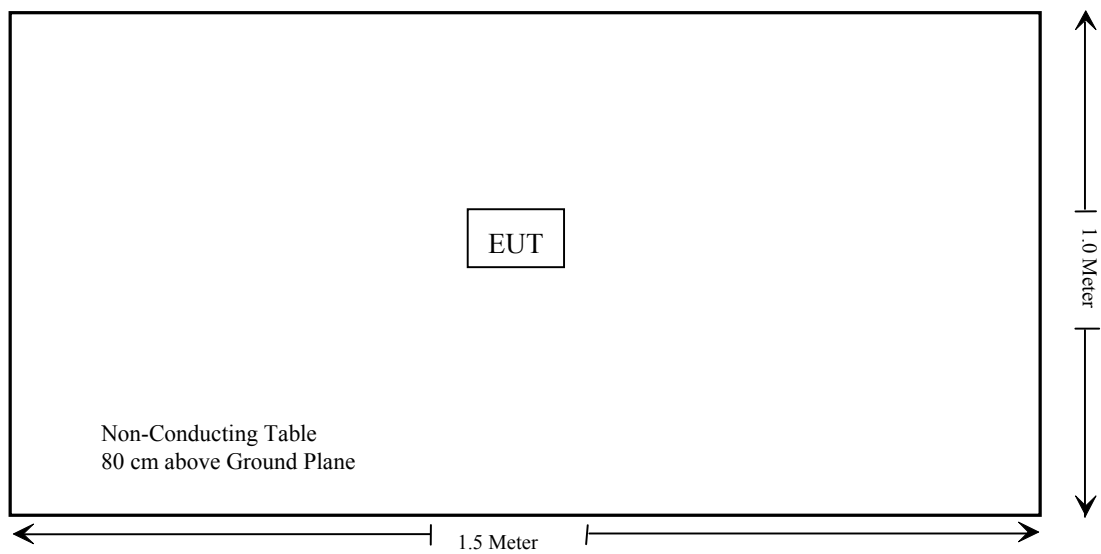

For charging mode:

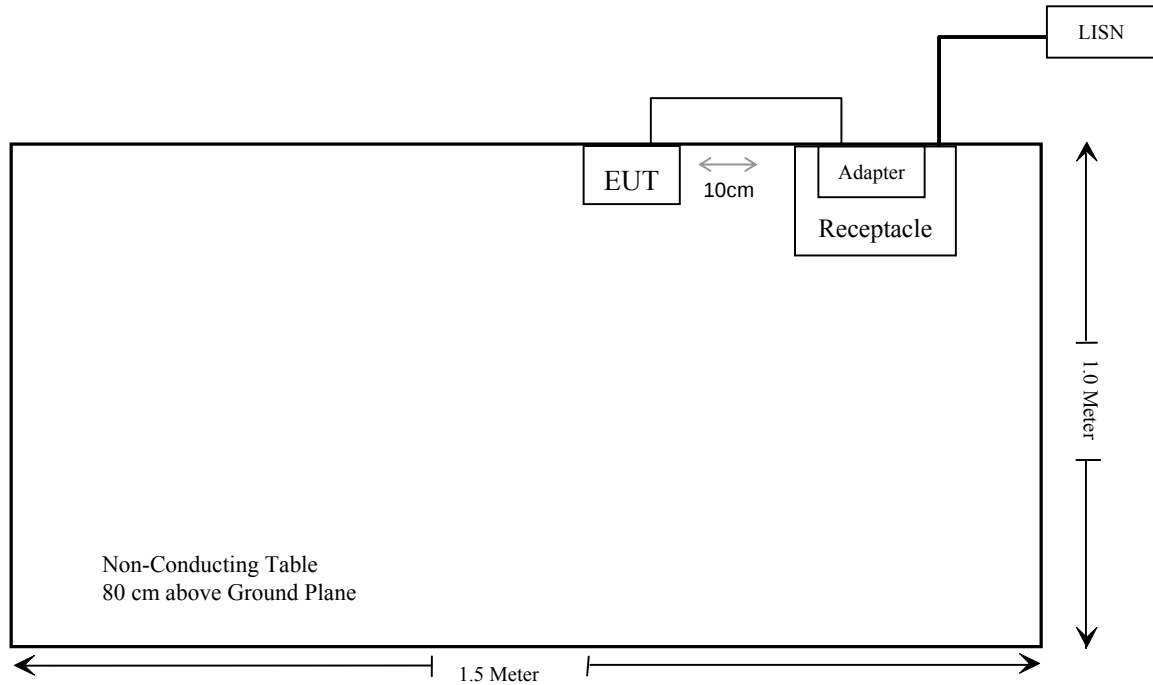

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247(i), §1.1307(b)(1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.109, §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

CFR47 §15.247 (i), §1.1307 (b)(1) & §2.1093 - RF EXPOSURE

Standard Applicable

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure v03r03, no SAR required if power is lower than the flowing threshold:

When routine evaluation is required for SAR and the output power is $\leq 60/f(\text{GHz})$ mW, the test reduction and test exclusion procedures given herein, or in KDB 616217 or KDB 648474, are applicable.

A device may be used in portable exposure conditions with no restrictions on host platforms when either the source-based time-averaged output power is $\leq 60/f(\text{GHz})$ mW or all measured 1-g SAR are < 0.4 W/kg. 10 When SAR evaluation is required, the most conservative exposure conditions for all expected operating configurations must be tested.

Measurement Result:

Max EIRP:

2441MHz: 0.54 dBm=1.13 mW

$60/f(\text{GHz}) = 60/2441 = 24.58$ mW

$\text{EIRP} < 60/f(\text{GHz})$

This is a portable device and the Max EIRP of EUT is less than 24.58 mW. SAR evaluation is not necessary.

CFR47 §15.203 – ANTENNA REQUIREMENT

Standard Applicable

According to CFR47 § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a ceramic antenna soldered on PCB, which in accordance to section 15.203, the maximum gain is 0 dBi; please refer to the internal photos.

Result: Compliant.

Applicable Standard

Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

The diagram illustrates a test setup for electromagnetic compatibility. On the left, a Vertical Reference Ground Plane is shown. A 40 cm distance is marked from this plane to the EUT. The EUT is placed on a table that is 80 cm high. Below the table, a LISN is connected to the EUT. The LISN is bonded to a Horizontal Reference Ground Plane. On the right, a Test Receiver is placed on another table, also connected to the Horizontal Reference Ground Plane. The ground plane is labeled 'N'.

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The adapter was connected to a 120V 60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

24.59 dB at 0.590 MHz in the **Line** conductor mode
20.65 dB at 27.120 MHz in the **Neutral** conductor mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa


* The testing was performed by Weir Zhong on 2010-03-18.

Test Mode: Charging (by AC adapter)

Line

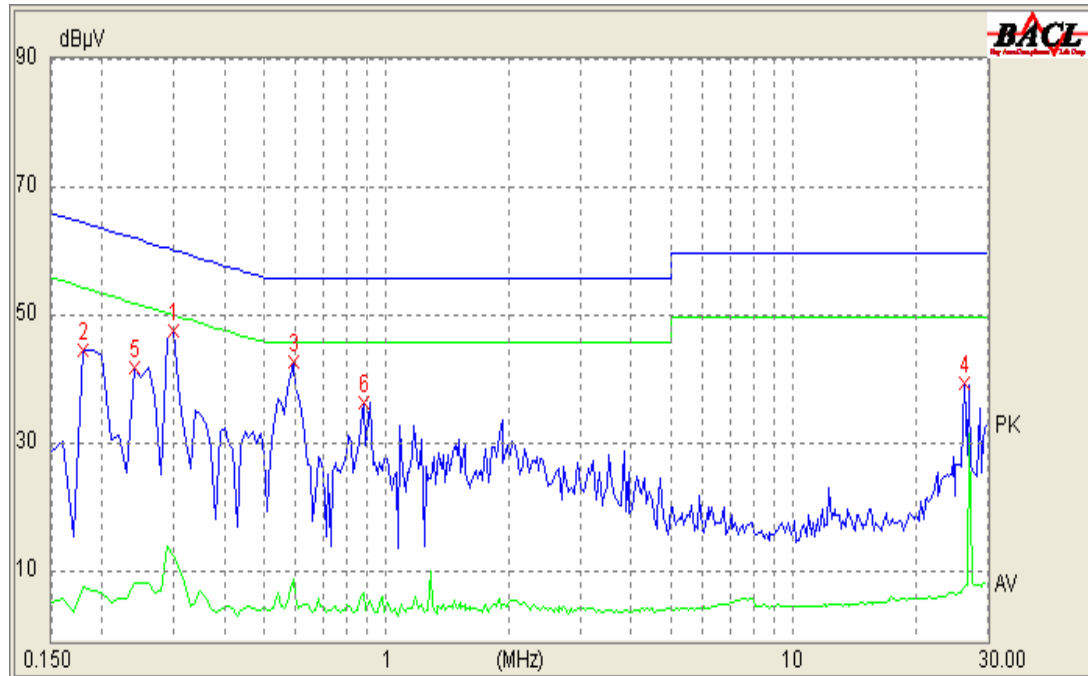

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.590	10.10	31.41	56.00	24.59	QP
0.300	10.10	33.36	60.28	26.92	QP
0.880	10.10	26.41	56.00	29.59	QP
0.180	10.10	29.27	64.57	35.30	QP
0.240	10.10	25.95	62.15	36.20	QP
0.590	10.10	9.56	46.00	36.44	AV
0.300	10.10	13.15	50.28	37.13	AV
0.880	10.10	7.31	46.00	38.69	AV
26.360	10.30	8.19	50.00	41.81	AV
0.240	10.10	8.78	52.15	43.37	AV
26.360	10.30	14.59	60.00	45.41	QP
0.180	10.10	8.23	54.57	46.34	AV

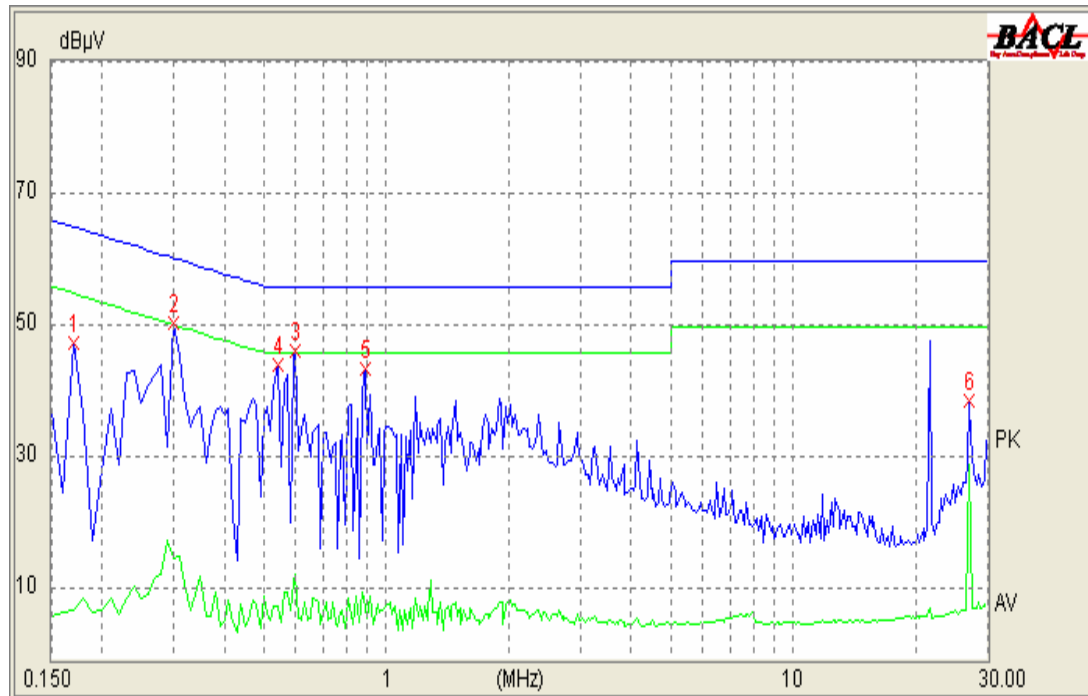Neutral:

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
27.120	10.30	29.35	50.00	20.65	AV
0.300	10.10	39.61	60.28	20.67	QP
0.600	10.10	33.86	56.00	22.14	QP
27.120	10.30	36.47	60.00	23.53	QP
0.540	10.10	32.26	56.00	23.74	QP
0.890	10.10	31.95	56.00	24.05	QP
0.600	10.10	12.86	46.00	33.14	AV
0.170	10.10	31.14	65.01	33.87	QP
0.300	10.10	15.18	50.28	35.10	AV
0.540	10.10	8.09	46.00	37.91	AV
0.890	10.10	7.81	46.00	38.19	AV
0.170	10.10	7.32	55.01	47.69	AV


CFR47 §15.205, §15.109, §15.209, §15.247 (d) – RADIATED EMISSIONS**Applicable Standard**

CFR47 §15.205; §15.109, §15.209; §15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

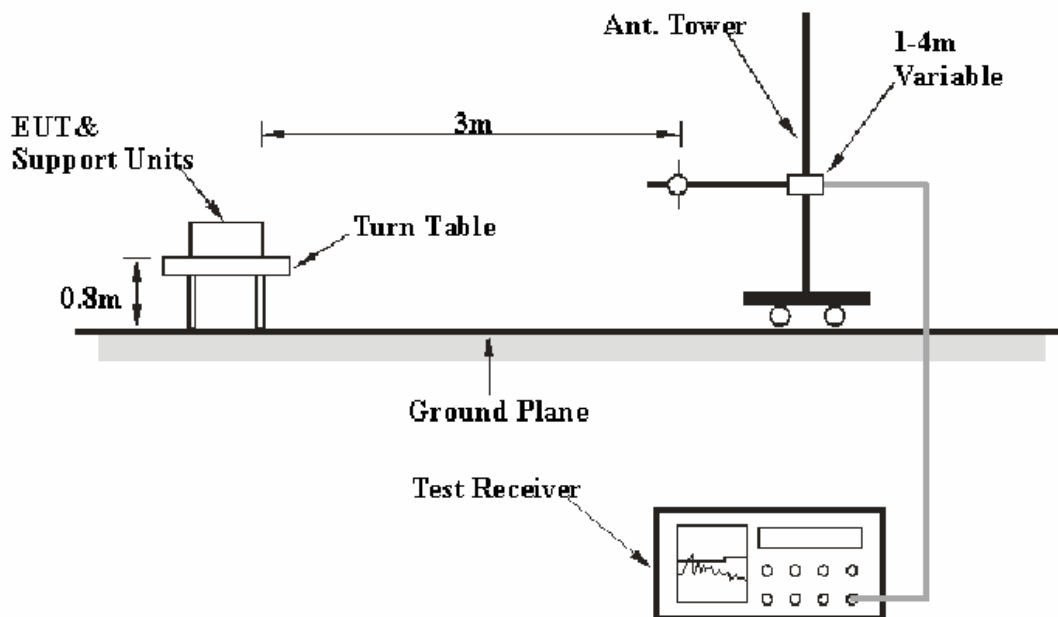EUT Setup

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	AV

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-09-25	2010-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.109, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz:

4.7 dB at 46.312750 MHz in the **Vertical** polarization for Charging (by AC adapter)
9.7 dB at 950.595750 MHz in the **Horizontal** Charging (by car charger)

Above 1 GHz:

14.03 dB at 4804.00 MHz in the **Horizontal** polarization (Low Channel)
14.91 dB at 4882.00 MHz in the **Vertical** polarization (Middle Channel)
6.23 dB at 2484.79 MHz in the **Horizontal** polarization (High Channel)

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.9 kPa

** The testing was performed by Weir Zhong on 2010-03-18.*


Below 1 GHz

Test Mode: Charging (by AC adapter)

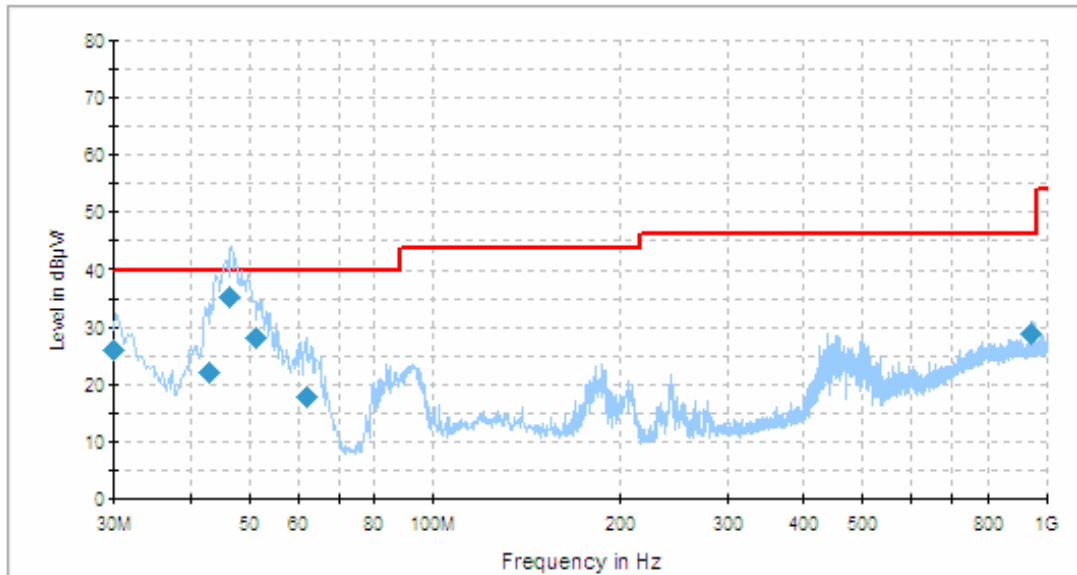


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
46.312750	35.3	101.0	V	76.0	-17.1	40.0	4.7
51.390500	28.1	101.0	V	77.0	-19.1	40.0	11.9
30.073322	26.0	101.0	V	217.0	-5.9	40.0	14.0
942.243500	29.1	119.0	H	0.0	-0.6	46.0	16.9
42.843000	22.3	101.0	V	114.0	-15.1	40.0	17.7
62.156250	17.8	102.0	V	8.0	-19.8	40.0	22.2

Test Mode: Charging (by car charger)

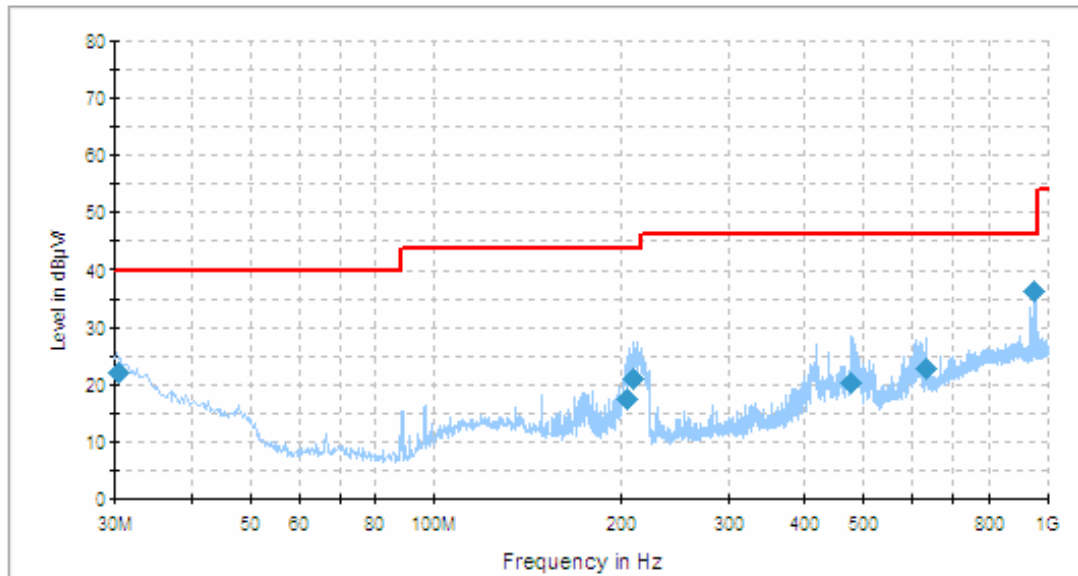

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
950.595750	36.3	102.0	H	223.0	-0.5	46.0	9.7
30.421554	22.2	102.0	V	11.0	-6.2	40.0	21.8
209.287250	21.1	152.0	H	304.0	-15.3	43.5	22.4
477.156250	20.3	218.0	H	203.0	-10.8	46.0	25.7
205.457500	17.5	152.0	H	71.0	-14.9	43.5	26.0
629.712250	22.8	101.0	V	0.0	-7.2	46.0	28.2

Test Mode: Transmitting

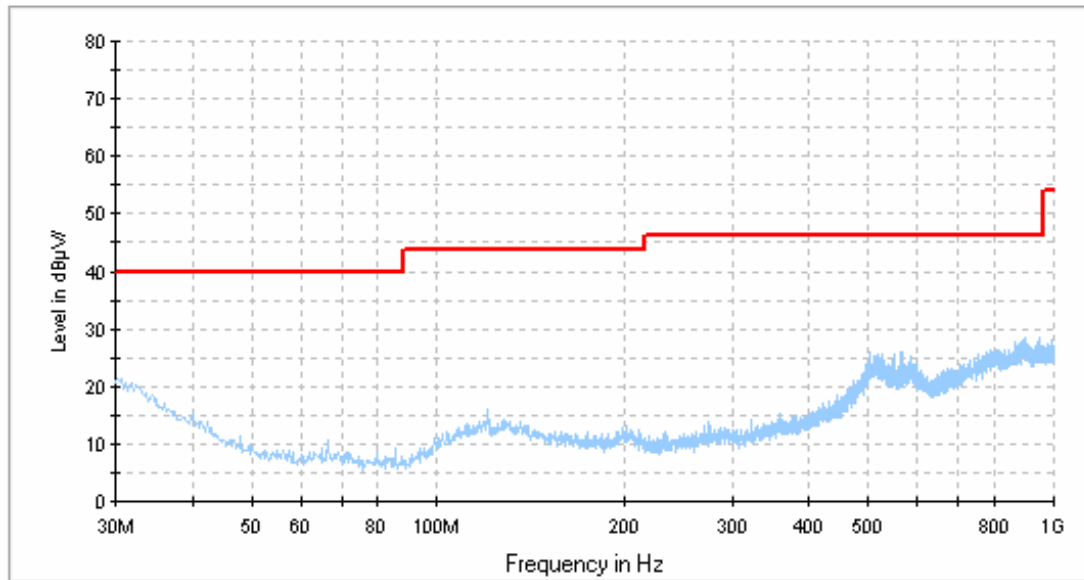

Note: The data which below the limit of 20 dB was not recorded.

Above 1 GHz

Test Mode: Transmitting

Frequency (MHz)	S.A. Reading (dBμV/m)	Detector (PK/QP/AV)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBμV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	Remarks
Low Channel												
2402.00	94.62	PK	25	1.8	H	30.6	3.61	34.0	94.83	/	/	Fund.
2402.00	84.65	AV	25	1.8	H	30.6	3.61	34.0	84.86	/	/	Fund.
2402.00	95.56	PK	355	1.7	V	30.6	3.61	34.0	95.77	/	/	Fund.
2402.00	85.14	AV	355	1.7	V	30.6	3.61	34.0	85.35	/	/	Fund.
4804.00	32.13	AV	240	1.0	H	36.6	4.64	33.4	39.97	54	14.03	harmonic
4804.00	31.36	AV	180	1.0	V	35.4	4.64	33.4	38.00	54	16.00	harmonic
2389.84	35.26	AV	352	1.5	V	30.6	3.61	34.0	35.47	54	18.53	spurious
4804.00	47.51	PK	240	1.0	H	36.6	4.64	33.4	55.35	74	18.65	harmonic
2337.04	35.14	AV	355	1.3	H	30.6	3.61	34.0	35.35	54	18.65	spurious
4804.00	46.34	PK	180	1.0	V	35.4	4.64	33.4	52.98	74	21.02	harmonic
1833.30	35.89	AV	155	1.5	V	25.8	5.37	34.6	32.46	54	21.54	spurious
1451.80	35.20	AV	225	1.0	H	25.8	5.37	34.6	31.77	54	22.23	spurious
2337.04	47.39	PK	355	1.3	H	30.6	3.61	34.0	47.60	74	26.40	spurious
2389.84	47.10	PK	352	1.5	V	30.6	3.61	34.0	47.31	74	26.69	spurious
1451.80	50.38	PK	225	1.0	H	25.8	5.37	34.6	46.95	74	27.05	spurious
1833.30	50.32	PK	155	1.5	V	25.8	5.37	34.6	46.89	74	27.11	spurious
Middle Channel												
2441.00	94.86	PK	25	1.0	H	30.6	3.61	34.0	95.07	/	/	Fund.
2441.00	84.72	AV	25	1.1	H	30.6	3.61	34.0	84.93	/	/	Fund.
2441.00	95.60	PK	0	1.6	V	30.6	3.61	34.0	95.81	/	/	Fund.
2441.00	85.20	AV	0	1.6	V	30.6	3.61	34.0	85.41	/	/	Fund.
4882.00	31.25	AV	178	1.0	V	36.6	4.64	33.4	39.09	54	14.91	harmonic
4882.00	31.70	AV	235	1.0	H	35.4	4.64	33.4	38.34	54	15.66	harmonic
4882.00	46.16	PK	178	1.0	V	36.6	4.64	33.4	54.00	74	20.00	harmonic
4882.00	46.42	PK	235	1.0	H	35.4	4.64	33.4	53.06	74	20.94	harmonic
1385.80	35.66	AV	130	1.0	V	25.8	5.37	34.6	32.23	54	21.77	spurious
1133.84	33.79	AV	175	1.3	H	24.3	4.88	34.9	28.07	54	25.93	spurious
1385.80	50.36	PK	130	1.0	V	25.8	5.37	34.6	46.93	74	27.07	spurious
1133.84	45.73	PK	175	1.3	H	24.3	4.88	34.9	40.01	74	33.99	spurious

Frequency (MHz)	S.A. Reading (dBμV/m)	Detector (PK/QP/AV)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBμV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	Remarks
High Channel												
2480.00	93.88	PK	35	1.6	H	30.6	3.61	34.0	94.09	/	/	Fund.
2480.00	83.90	AV	35	1.6	H	30.6	3.61	34.0	84.11	/	/	Fund.
2480.00	94.82	PK	355	1.6	V	30.6	3.61	34.0	95.03	/	/	Fund.
2480.00	83.95	AV	355	1.6	V	30.6	3.61	34.0	84.16	/	/	Fund.
2484.79	47.56	AV	275	1.3	H	30.6	3.61	34.0	47.77	54	6.23	spurious
2483.53	45.06	AV	225	1.5	V	30.6	3.61	34.0	45.27	54	8.73	spurious
2484.79	60.81	PK	275	1.3	H	30.6	3.61	34.0	61.02	74	12.98	spurious
4960.00	33.23	AV	355	1.1	V	35.4	4.55	33.4	39.78	54	14.22	harmonic
4960.00	31.80	AV	35	1.2	H	36.6	4.55	33.4	39.55	54	14.45	harmonic
2483.53	56.96	PK	225	1.5	V	30.6	3.61	34.0	57.17	74	16.83	spurious
4960.00	48.10	PK	355	1.1	V	35.4	4.55	33.4	54.65	74	19.35	harmonic
4960.00	46.88	PK	35	1.2	H	36.6	4.55	33.4	54.63	74	19.37	harmonic
1286.00	34.32	AV	150	1.1	H	26.0	4.88	34.5	30.70	54	23.30	spurious
1312.57	33.16	AV	280	1.0	V	24.3	4.88	34.9	27.44	54	26.56	spurious
1286.00	47.35	PK	150	1.1	H	26.0	4.88	34.5	43.73	74	30.27	spurious
1312.57	46.89	PK	280	1.0	V	24.3	4.88	34.9	41.17	74	32.83	spurious

CFR47 §15.247(a)(1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Weir Zhong on 2010-03-14.


Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.0	0.56	Pass
Adjacent Channel	2403			
Mid Channel	2440	1.0	0.56	Pass
Adjacent Channel	2441			
High Channel	2479	1.0	0.56	Pass
Adjacent Channel	2480			


Please refer to the following plots.

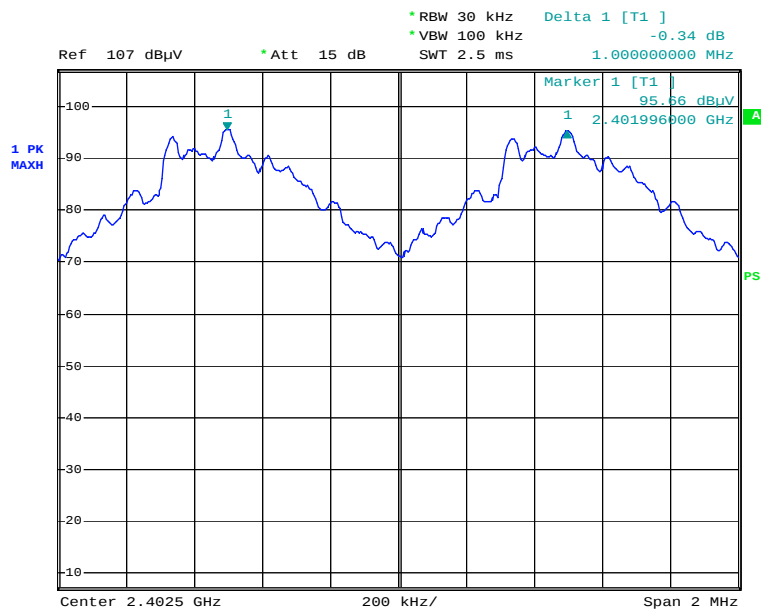Low Channel

Date: 14.MAR.2010 15:05:49

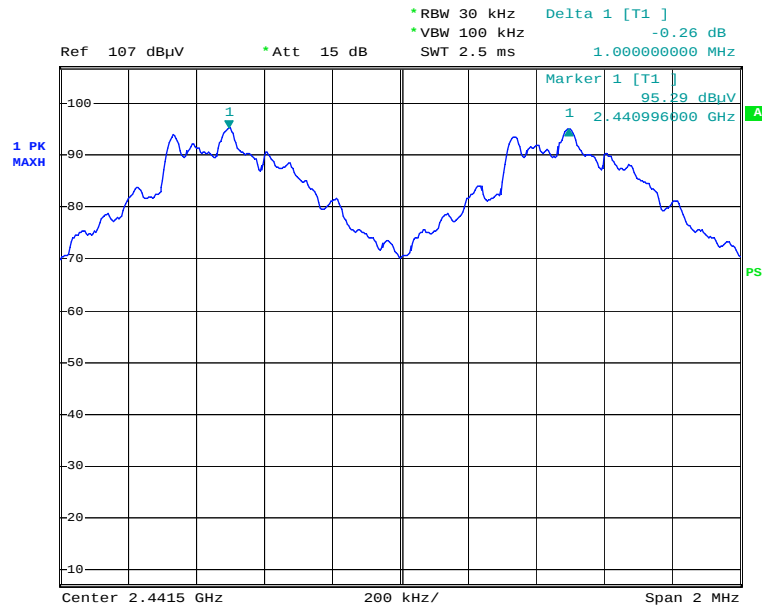Middle Channel

Date: 14.MAR.2010 14:55:55

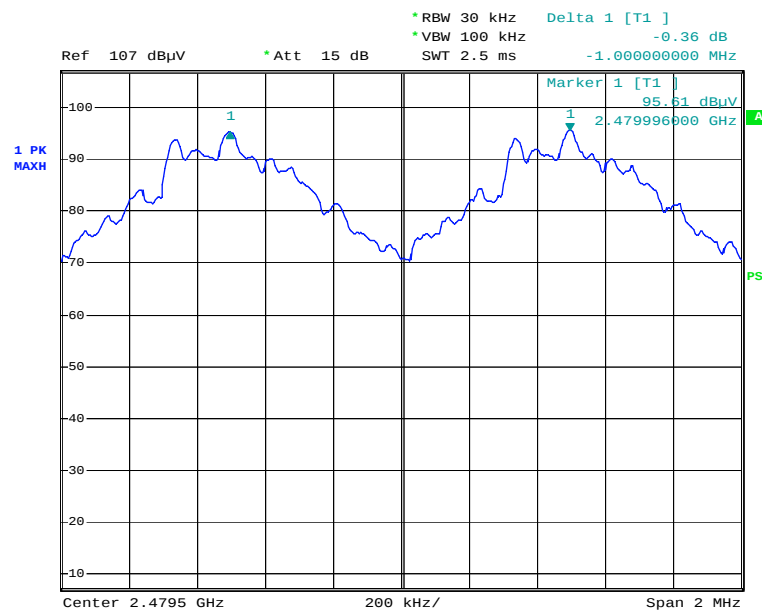High Channel

Date: 14.MAR.2010 14:59:32

CFR47 §15.247(a)(1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Weir Zhong on 2010-03-14.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.842
Middle	2441	0.840
High	2480	0.840


Please refer to the following plots.

Low Channel

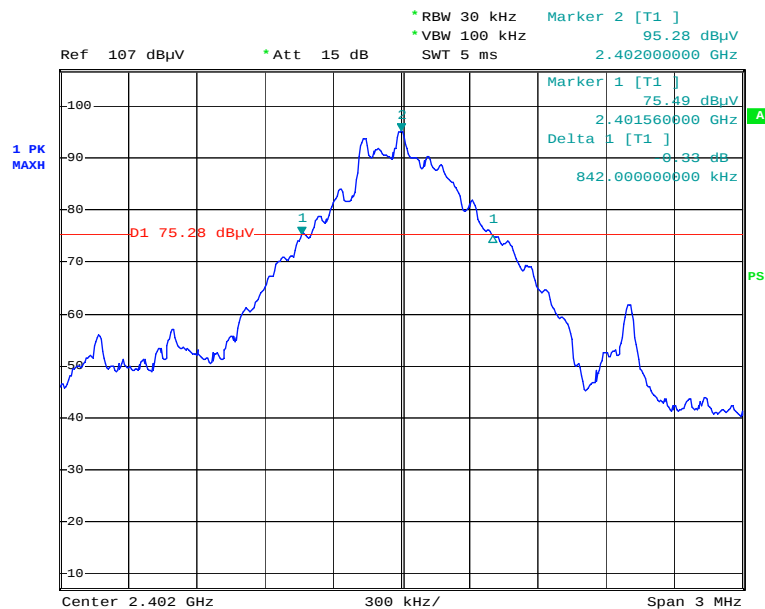


Date: 14.MAR.2010 14:44:18

Middle Channel

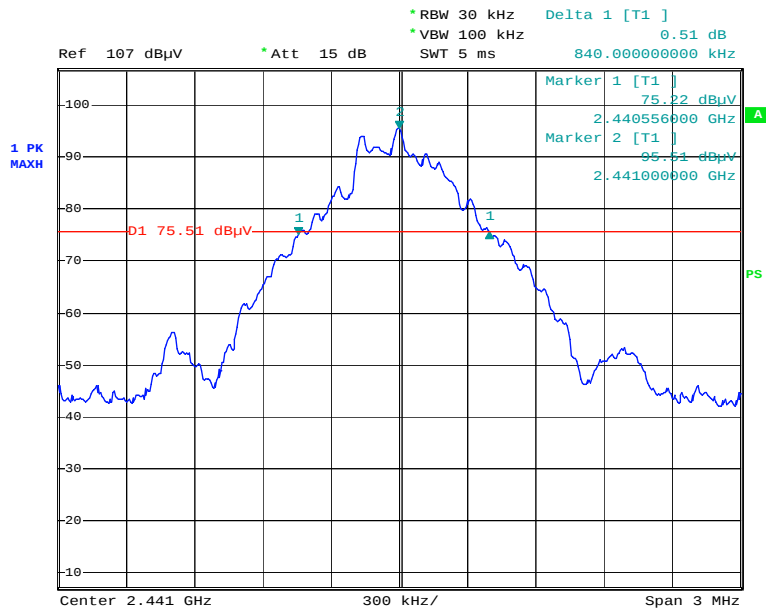

Date: 14.MAR.2010 14:45:54

High Channel

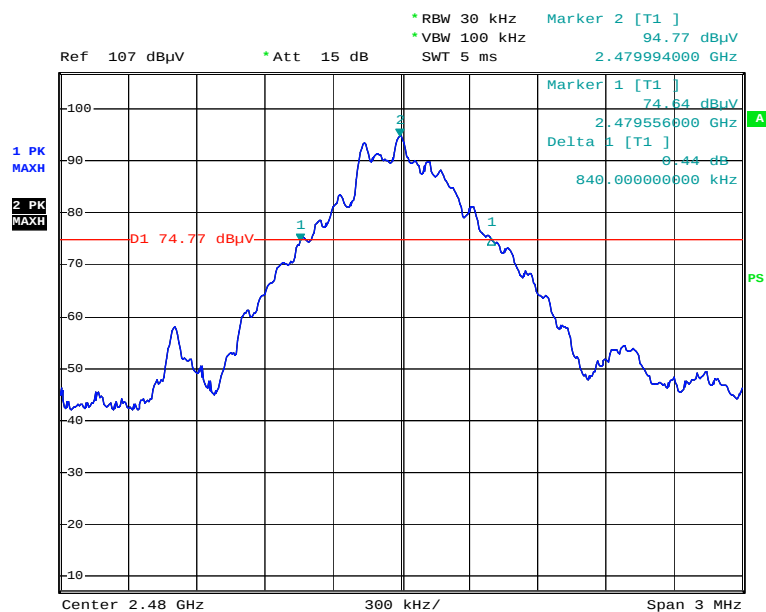

Date: 14.MAR.2010 14:48:48

CFR47 §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


The testing was performed by Weir Zhong on 2010-03-14.

Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400~2483.5	79	≥ 15

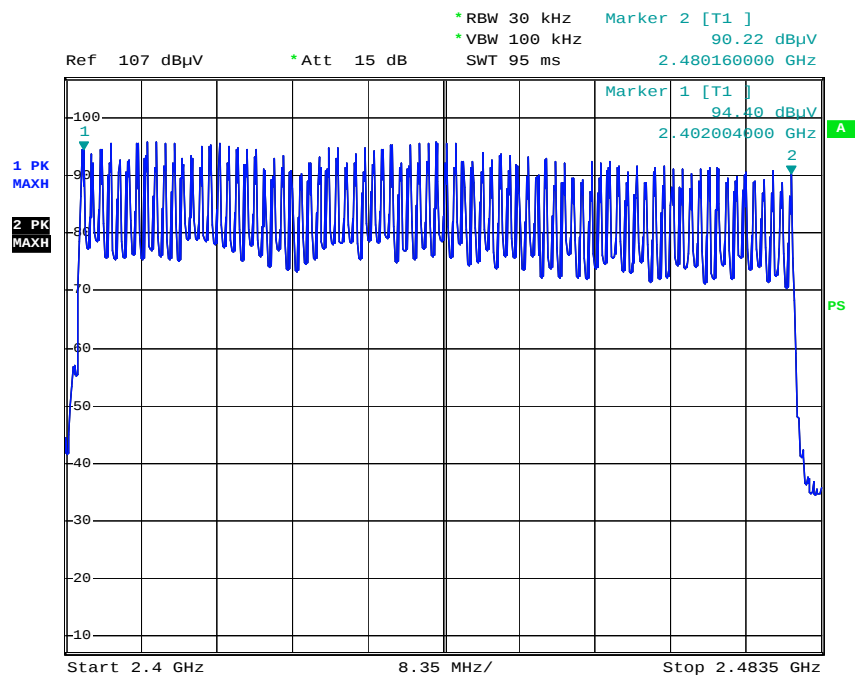Number of Hopping Channels

Date: 14.MAR.2010 14:40:39

CFR47 §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Weir Zhong on 2010-03-14.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
DH 1	Low	0.536	0.172	0.4	Pass
	Middle	0.534	0.171	0.4	Pass
	High	0.538	0.172	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second				
DH 3	Low	1.812	0.290	0.4	Pass
	Middle	1.812	0.290	0.4	Pass
	High	1.812	0.290	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second				
DH 5	Low	3.060	0.326	0.4	Pass
	Middle	3.060	0.326	0.4	Pass
	High	3.072	0.328	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second				


Please refer to the following plots.

Low Channel for DH1

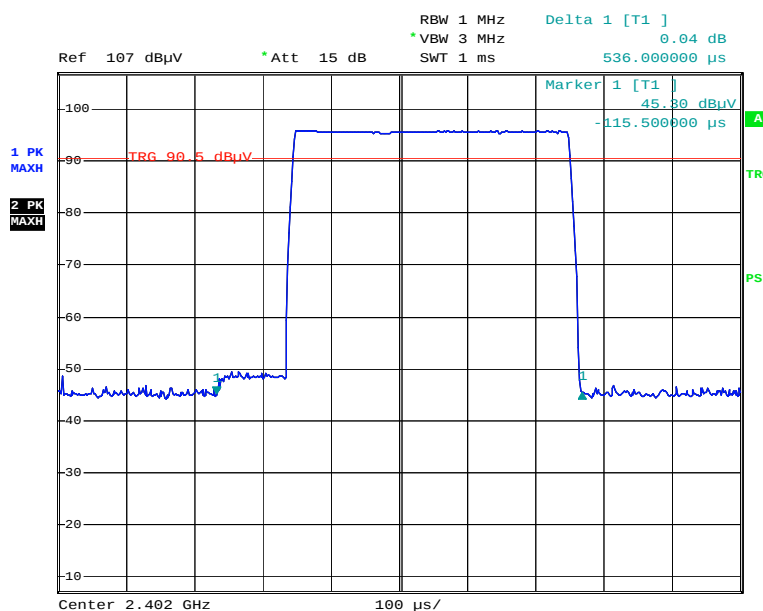


Date: 14.MAR.2010 15:33:54

Middle Channel for DH1

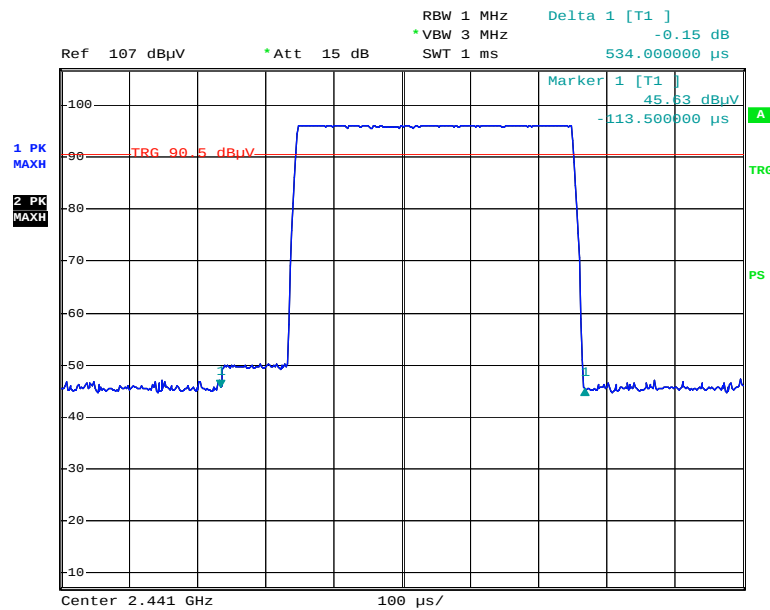


Date: 14.MAR.2010 15:36:37

High Channel for DH1

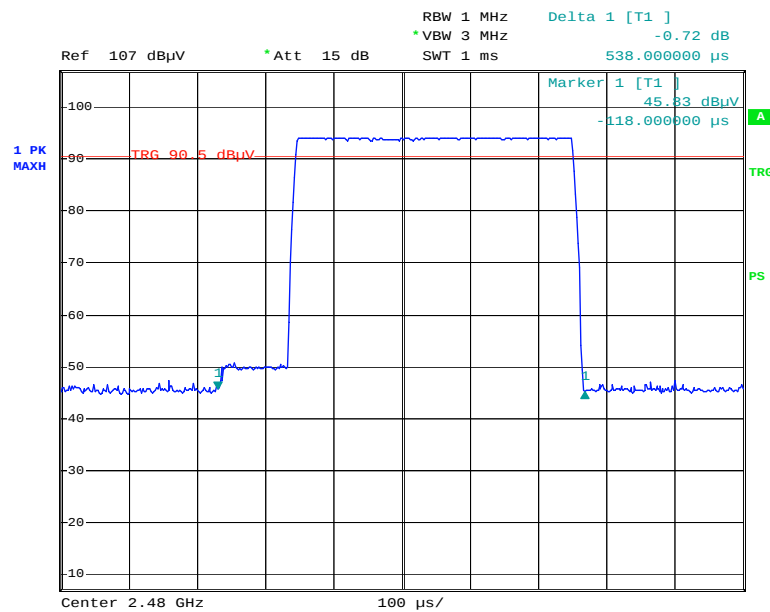


Date: 14.MAR.2010 15:29:08

Low Channel for DH3

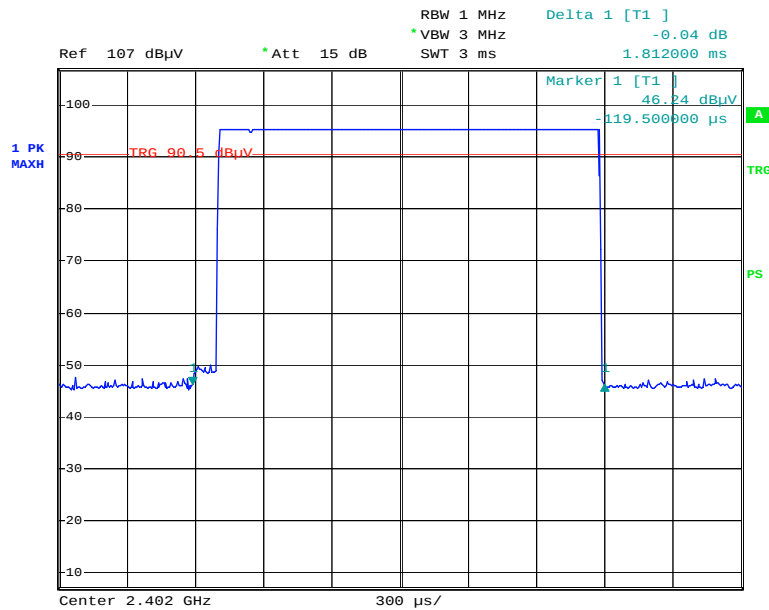


Date: 14.MAR.2010 15:43:14


Middle Channel for DH3

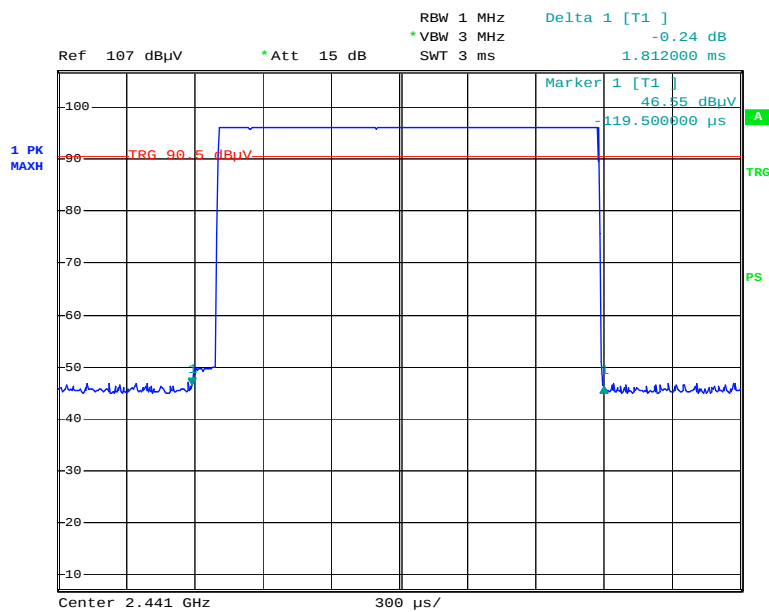

Date: 14.MAR.2010 15:41:11

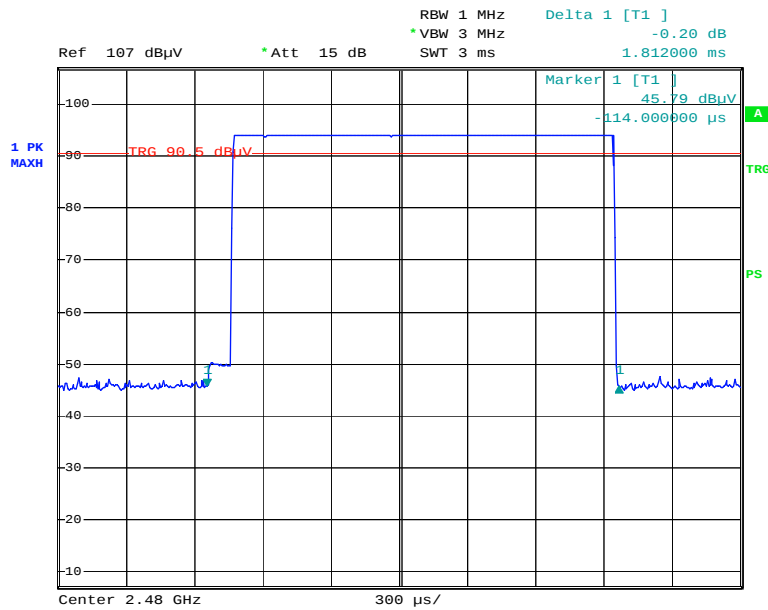
High Channel for DH3

Date: 14.MAR.2010 15:26:57

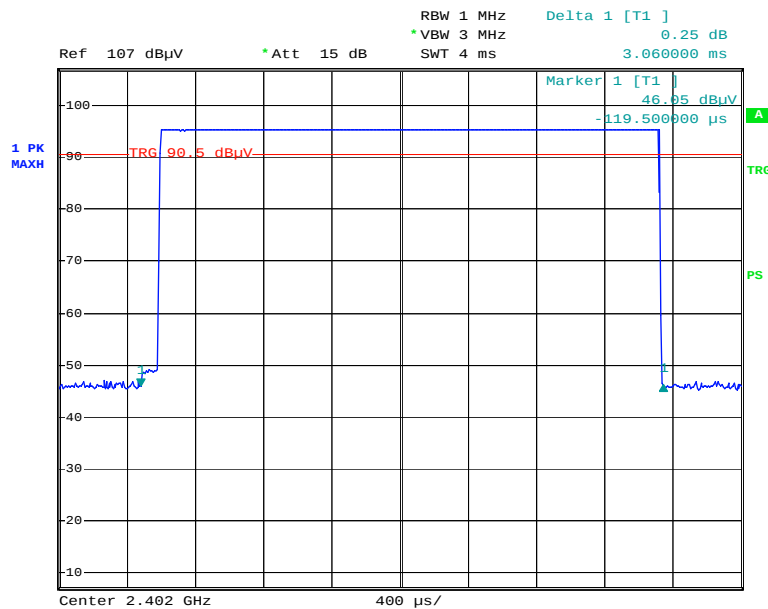Low Channel for DH5


Date: 14.MAR.2010 15:45:52

Middle Channel for DH5

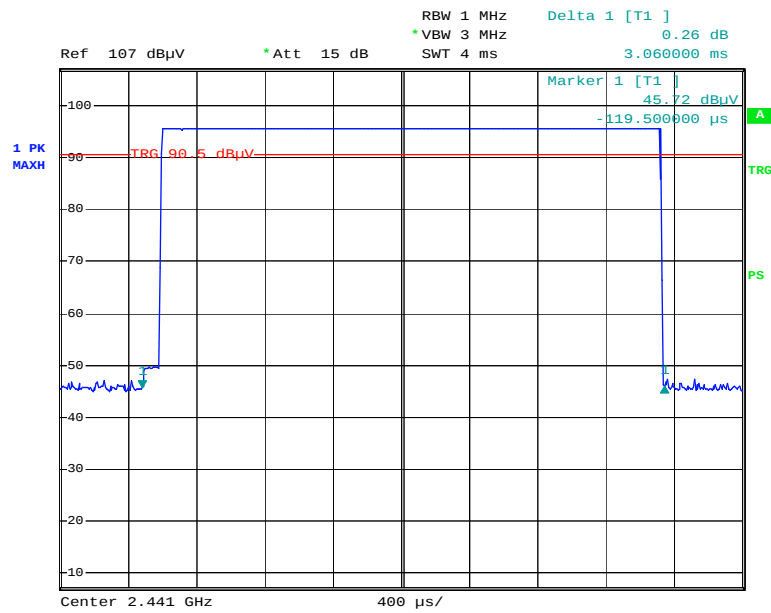

Date: 14.MAR.2010 15:48:05

High Channel for DH5

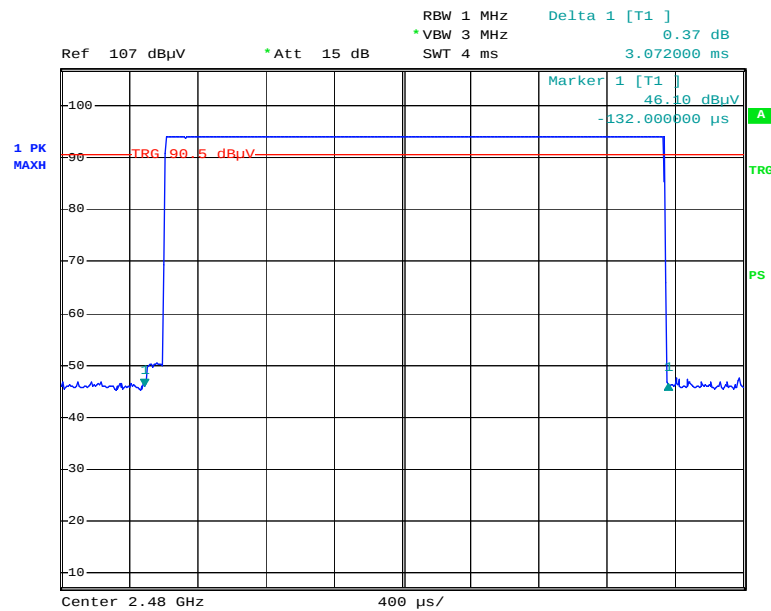

Date: 14.MAR.2010 15:24:12

CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-09-25	2010-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

FCC DA 00-705

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Weir Zhong on 2010-03-14.

Test Result: Compliant.

Test Mode: Transmitting

Peak output power (Radiated)—worse case

Freq. (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/AV)	Table Direction Degree	Test Antenna		Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	EIRP		Part 15.247 Limit (mW)
				Height (m)	Factor (dB/m)				(dBm)	(mW)	
2402	95.56	PK	355	1.7	30.6	3.61	34.0	95.77	0.50	1.12	1000
2441	95.60	PK	0	1.6	30.6	3.61	34.0	95.81	0.54	1.13	1000
2480	94.82	PK	355	1.6	30.6	3.61	34.0	95.03	-0.23	0.95	1000

Note: $P(\text{dBm}) = E(\text{dB}\mu\text{V/m}) - 95.27$

CFR47 §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

*The testing was performed by Weir Zhong on 2010-03-14


Test Result: Compliant

Please refer to the following table and plots.


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.54	52.17	20
2483.98	49.41	20

Please refer to follow plots:

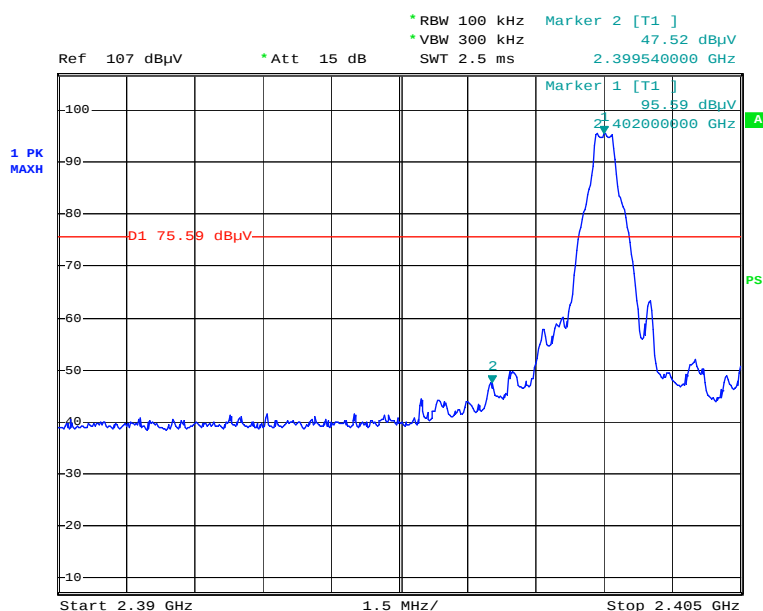Band Edge: Left Side

Date: 14.MAR.2010 17:46:23

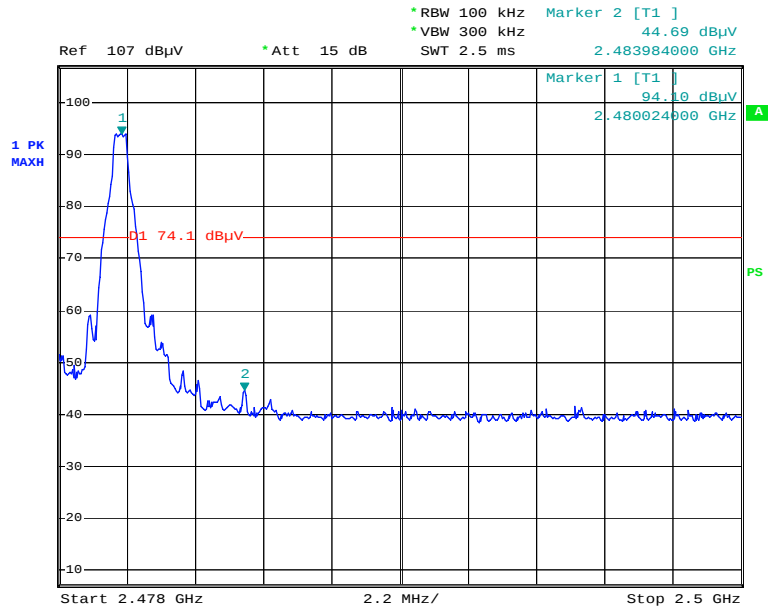Band Edge: Right Side

Date: 14.MAR.2010 16:24:25

******* END OF REPORT *******