

TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Sendo Ltd.
Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

Test Report Serial No:
RFI/SARB2/RP43987JD02C

Supersedes Test Report Serial No:
RFI/SARB1/RP43987JD02C

This Test Report Is Issued Under The Authority Of Richard Jacklin, Operations Director: 	Checked By: 
Tested By: 	Release Version No: PDF01
Issue Date: 29 January 2003	Test Dates: 30 September 2002

It should be noted that the standard, OET Bulletin 65 Supplement C: (2001-01) is not listed on RFI's current UKAS schedule and is therefore "not UKAS accredited".

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed:
Changing the document, Selecting text and graphics, Adding or changing notes and form fields.
Furthermore, the date of creation must match the issue date stated above.
This report may be copied in full. The results in this report apply only to the sample(s) tested.

Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192	Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ
---	---

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 2 of 45

Issue Date: 29 January 2003

This page has been left intentionally blank.

Table of Contents

1. Client Information.....	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods And Procedures	8
4. Deviations From The Test Specification	9
5. Operation Of The EUT During Testing	10
6. Summary Of Test Results.....	11
7. SAR Measurement System.....	14
8. SAR Safety Limits	15
9. Details of SAR Evaluation	16
10. Evaluation Procedures	17
11. System Validation	18
12. Simulated Tissues.....	19
13. Tissue Parameters	20
14. Robot Systems Specifications.....	21
15. Validation results – 1900 MHz	22
16. Measurement Uncertainty	23
Appendix 1. Test Equipment Used	25
Appendix 2. Conducted Power Measurements	26
Appendix 3. SAR Distribution Scans.....	27
Appendix 4. Test Configuration Photograph.....	28
Appendix 5. Calibration Data	30
Appendix 6. Photographs of EUT	31

1. Client Information

1.1. Client Details

Company Name:	Sendo Ltd.
Address:	Hatchford Brook Hatchford Way Sheldon Birmingham B26 3QA
Contact Name:	Mr M Roper

1.2. Test Laboratory

Company Name:	Radio Frequency Investigation Ltd.
Address:	Ewhurst Park Ramsdell Basingstoke Hampshire RG26 5RQ.
Contact Name:	Mr G Taylor

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Brand Name	Sendo
Model Name or Number	Z100
Unique Type Identification	SND 100
IMEI Number	00 44 000 420 504 8200
Battery Serial Number	46
Country Of Manufacture	UK
Date Of Receipt	26 September 2002

Brand Name	Sendo
Model Name or Number	PHF (Personal Hands Free kit)
Unique Type Identification	Not stated by client
IMEI Number	Not stated by client
Battery Serial Number	Not stated by client
Country Of Manufacture	UK
Date Of Receipt	26 September 2002

Brand Name	Sendo
Model Name or Number	Case
Unique Type Identification	Not stated by client
IMEI Number	Not stated by client
Battery Serial Number	Not stated by client
Country Of Manufacture	Not stated by client
Date Of Receipt	26 September 2002

2.2. Description Of EUT

The equipment under test is a Tri-Band Mobile Phone.

2.3. Modifications Incorporated In EUT

The client stated that the EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

2.4. Additional Information Related to the EUT

Equipment Class:	Handheld Mobile Telephone
FCC Rule Part(s):	OET Bulletin 65 Supplement C
Application Type:	Certification
Transmitter Frequency Range (MHz):	1850 - 1910
Receiver Frequency Range (MHz):	1930 - 1990
Transmit Frequency Allocation Of EUT When Under Test (Channels):	Bottom Channel – 512 Centre Channel – 660 Top Channel - 810
Modulation(s):	GSM 1900
Modulation Scheme (Crest Factor)	GSM (Crest Factor 8)
Maximum RF Output Power:	1900 MHz – 28.98 dBm
Battery Type(s):	Lithium Ion
Antenna Length and Type:	Fixed Integral (Internal)
Number Of Antenna Positions:	1 (Fixed Antenna)
Intended Operating Environment:	Mobile
Weight:	Approx. 115 g
Dimensions (without Antenna) mm:	Approx. 120 x 50 x 20 mm
Power Supply Requirement:	
DC Supply (Volts/Amps)	Not applicable
AC Supply (Volts/Amps)	Not applicable
Internal Battery (Volts/Amps)	3.6 V
Port(s):	Enclosure Accessory Connector

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)**2.5. Support Equipment**

Description:	Will'tek
Model Name or Number:	4202S
Unique Type Identification:	Not applicable
Serial Number:	0513018
Cable Length And Type:	N/A (Air Link)
Connected to Port:	Antenna

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

3. Test Specification, Methods And Procedures

3.1. Test Specification

Reference:	OET Bulletin 65 Supplement C (2001-01)
Title:	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields.
Comments:	None
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification.

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

EN 50361: 2001

Title: Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz).

ANSI/IEEE C95.1: 1999

IEEE standard for safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz.

Federal Communications Commission, "Evaluating compliance with FCC Guidelines for human exposure to radio frequency electromagnetic fields", OET Bulletin 65 Supplement C, FCC, Washington, D.C, 20554, 2001.

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements as detailed in OET Bulletin 65 Supplement C, Appendix D.

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 9 of 45

Issue Date: 29 January 2003

4. Deviations From The Test Specification

None.

5. Operation Of The EUT During Testing

The equipment under test is a standard production model.

5.1. Operating Modes

The EUT was tested in the following operating configurations:

1) Operating Mode (including maximum device rating):

The EUT was tested in GSM Allocated Mode. The EUT was tested at full transmit power, at the maximum duty factor (1/8). In GPRS mode the EUT can only operate one transmit (uplink) timeslot, therefore the maximum EUT duty cycle is 1/8. As a result of this the EUT was tested in normal GSM mode only.

2) Operating Frequency Range (including maximum device rating):

The EUT was tested at the Centre, Top and Bottom channels (refer to Section 2.3, Transmitter/Receiver Frequency Range).

3) Operating Tolerances:

Not applicable.

4) Antenna Type and Operating Position(s):

The EUT has a fixed internal antenna.

5) Applicable Body-Worn Configuration:

The EUT was tested in a case for body worn configuration and with a personal hands free kit. The case is the item specified in the user manual.

6) Battery Options that could affect the results:

The EUT was tested with a fully charged battery. This battery was the standard manufacturer supplied battery.

7) The EUT was exercised during the test with a Will'tek GSM test set. The maximum conducted power from the EUT was measured before and after each test case. It was found that at each test case the level was found to be constant as 28.30 dBm. (See Appendix 2). The GSM test set was then set to operate the EUT at power control level 0 (maximum power) at all times.

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 11 of 45

Issue Date: 29 January 2003

6. Summary Of Test Results

6.1. Summary Of Tests

Test Name	Specification Reference	Compliance Status
Specific Absorption Rate (SAR)	OET Bulletin 65 Supplement C	Complied

6.2. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd., Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ.

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

6.3. Test Results For Specific Absorption Rate - 1900 MHz**6.3.1. Specific Absorption Rate - 1900 MHz Band****Environmental Conditions:**

Temperature Variation in Lab (°C):	21.5 to 22.0
Temperature Variation in Liquid (°C):	20.1 to 21.0

Conducted Power before Test:	28.3 dBm
Conducted Power after Test:	28.3 dBm

Results:

Position	Side of Head	Frequency Channel No	Distance from antenna to phantom (mm)	SAR Level (W/kg) 1g	SAR Limit (W/kg) 1g	Margin (W/kg) 1g	Result
Cheek	Left	660	10	0.361	1.6	1.239	Complied
Tilted	Left	660	8	0.444	1.6	1.156	Complied
Cheek	Right	660	10	0.387	1.6	1.213	Complied
Tilted	Right	660	8	0.440	1.6	1.160	Complied
Tilted	Left	512	8	0.304	1.6	1.296	Complied
Tilted	Left	810	8	0.672	1.6	0.928	Complied

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

6.4. Test Results For Specific Absorption Rate - 1900 MHz**6.4.1. Specific Absorption Rate - 1900 MHz Band – Body Worn Position****Environmental Conditions:**

Temperature Variation in Lab (°C):	21.5 to 22.0
Temperature Variation in Liquid (°C):	19.6 to 20.0

Conducted Power before Test:	28.3 dBm
Conducted Power after Test:	28.3 dBm

Results:

Position	Side of Head	Frequency Channel No	Distance from antenna to phantom (mm)	SAR Level (W/kg) 1g	SAR Limit (W/kg) 1g	Margin (W/kg) 1g	Result
Body position with case	Flat	660	20	0.566	1.6	1.034	Complied
Body position with case and PHF	Flat	660	20	0.604	1.6	0.996	Complied

7. SAR Measurement System

7.1. Radio Frequency Investigation SAR measurement facility utilises the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY system is comprised of the robot controller, computer, near-field probe, probe alignment sensor, and the SAM phantom containing brain or muscle equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilises a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

8. SAR Safety Limits

Exposure Limits (General populations/Uncontrolled Exposure Environment)	SAR (W/Kg)
Spatial Peak (averaged over any 1 g of tissue)	1.60

Notes:

1. The FCC SAR safety limits specified in the table above apply to devices operated in the General Population / Uncontrolled Exposure Environment.
2. Uncontrolled environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

9. Details of SAR Evaluation

9.1. The equipment under test was found to be compliant for localised specific absorption rate (SAR) based on the following provisions and conditions:

- a) The handset was placed in a normal operating position with the centre of the ear-piece aligned with the ear canal on the phantom.
- b) With the ear-piece touching the phantom the centre line of the handset was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
- c) For the cheek position the handset was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
- d) For the tilted position the EUT was positioned as for the cheek position, then the horizontal angle was increased by fifteen degrees (the phone keypad was moved away from the cheek by fifteen degrees).
- e) The EUT was tested in a body-worn configuration with the handset placed in the belt holster which was placed on the device holder with the back of the phone facing parallel to, and the belt-clip touching, the outer surface of the phantom flat section. The belt holster provided a spacing between the back of the phone and the outer surface of the phantom flat section.
- f) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- g) The device was set to operate continuously in the transmit mode for the duration of the test.
- h) The location of the maximum spatial SAR distribution (Hot Spot) was determined relative to the handset and its antenna.
- i) The EUT was tested with a fully charged battery.

10. Evaluation Procedures

10.1. The Specific Absorption Rate (SAR) evaluation was performed in the following manner:

- a) (i) The evaluation was performed in an applicable area of the phantom depending on the type of device being tested. For devices worn about the ear during normal operation, both the left and right ear positions were evaluated at the centre frequency of the band at maximum power. The side, which produced the greatest SAR, determined which side of the phantom would be used for the entire evaluation. The positioning of the head worn device relative to the phantom was dictated by FCC OET bulletin 65 Supplement C.
(ii) For body worn devices or devices which can be operated within 20 cm of the body, the flat section of the phantom was used. The type of device being evaluated dictated the distance of the EUT to the outer surface of the phantom flat section.
- b) The SAR was determined by a pre-defined procedure within the DASY3 software. The exposed region of the phantom was scanned near the inner surface with a grid spacing of 20mm x 20mm.
- c) A 7x7x7 matrix was performed around the greatest spatial SAR distribution found during the area scan of the applicable exposed region. SAR values were then calculated using a 3-D spline interpolation algorithm and averaged over spatial volumes of 1 and 10 grams.
- d) If the EUT had any appreciable drift over the course of the evaluation, then the EUT was re-evaluated. Any unusual anomalies over the course of the test also warranted a re-evaluation.

11. System Validation

11.1. Prior to the assessment, the system was verified in the flat region of the phantom. A 1900 MHz dipole was used. A forward power of 250 mW was applied to the dipole and system was verified to a tolerance of $\pm 5\%$ for the 1900 MHz dipole. The applicable verification (normalised to 1 Watt) is as follows:

Dipole Validation Kit	Target SAR 1g (w/kg)	Measured SAR 1g (w/kg)
D1900V2	42.4	44.0

12. Simulated Tissues

12.1. The brain and muscle mixtures consist of water and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

Ingredient	Frequency	
	1900 MHz Brain	1900 MHz Muscle
Water	10.96 Litres	14.01 Litres
D.G.B.E. (Glycol)	8.97 Litres	6.0 Litres
Salt	0.064 grams	42 grams

Test Of: Sendo Ltd.**Z100 Tri-Band Mobile Phone****To: OET Bulletin 65 Supplement C (2001-01)**

13. Tissue Parameters

13.1. The dielectric parameters of the fluids were verified prior to the SAR evaluation using an 58070C Dielectric Probe Kit and an 8753E Network Analyser. The dielectric parameters of the fluid are as follows:

Frequency (MHz)	Equivalent Tissue	Dielectric Constant ϵ_r	Conductivity σ (mho/m)
1850-1910	Brain	$37.25 \pm 10\%$	$1.52 \pm 10\%$
1850-1910	Muscle	$54.15 \pm 10\%$	$1.60 \pm 10\%$

14. Robot Systems Specifications

Robot System

Positioner:	Stäubli Unimation Corp. Robot Model: RX90L
Repeatability:	0.025 mm
No. of axis:	6
Serial Number:	F00/SD89A1/A/01
Reach:	1185 mm
Payload:	3.5 kg
Control Unit:	CS7
Programming Language:	V+

Data Acquisition Electronic (DAE) System

Cell Controller

PC:	Dell Optiplex GX110
Operating System:	Windows NT
Data Card:	DASY3 PC-Board
Serial Number:	220

Data Converter

Features:	Signal Amplifier, multiplexer, A/D converter and control logic.
Software:	DASY3 Software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock.

PC Interface Card

Function:	24 bit (64 MHz) DSP for real time processing Link to DAE3 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.
------------------	--

E-Field Probe

Model:	ET3DV6
Serial No:	1529
Construction:	Triangular core fibre optic detection system
Frequency:	10 MHz to 3 GHz
Linearity:	± 0.2 dB (30 MHz to 3 GHz)
Probe Length (mm):	337
Probe Diameter (mm):	12
Tip Length (mm):	10
Tip Diameter (mm):	6.8
Sensor X Offset (mm):	2.7
Sensor Y Offset (mm):	2.7
Sensor Z Offset (mm):	2.7

Phantom

Phantom:	SAM Phantom
Shell Material:	Fibreglass
Thickness:	2.0 ± 0.1 mm

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

15. Validation results – 1900 MHz

15.1. System Validation

15.1.1. Validation of the system test configuration was carried out prior to testing.

Validation Dipole Type and Serial No.	Calibrated Value of SAR in 1g volume (W/kg) at 1900 MHz	Measured Value of SAR in 1g volume (W/kg) at 1900 MHz	Percentage Difference (<6%)
D1900V2 / 540	42.4	44.0	Yes

15.2. Liquid Properties - Brain

15.2.1. Properties of the tissue simulating liquid were measured prior to testing.

Property	Target Value (1900 MHz)	Measured/Calculated Value (1900 MHz)	Percentage Difference (<10%)
Relative Permittivity	40.0	37.25	Yes
Conductivity	1.4	1.52	Yes

15.3. Liquid Properties - Body

15.3.1. Properties of the tissue simulating liquid were measured prior to testing.

Property	Target Value (1900 MHz)	Measured/Calculated Value (1900 MHz)	Percentage Difference (<10%)
Relative Permittivity	53.30	54.15	Yes
Conductivity	1.52	1.60	Yes

15.4. Temperature Variation

15.4.1. The temperature of the laboratory and within the tissue simulating liquid for this test shall not exceed the range +15°C to +25°C.

15.4.2. The actual temperature measured at the beginning and end of each test was recorded and the maximum range is shown below:

Measurement	Maximum Temperature	Minimum Temperature
Laboratory	22.0	21.5
Tissue Simulating Liquid	21.0	19.6

16. Measurement Uncertainty

16.1. No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

16.2. The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

16.3. The uncertainty of the result may need to be taken into account when interpreting the measurement results.

16.4. The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level	Calculated Uncertainty
Specific Absorption Rate	1900MHz	95%	± 18.02 %

16.5. The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

16.6. Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environment. However, the estimated measurement uncertainties in SAR are less than 30%.

16.7. According to ANSI/IEEE C95.3, the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ±1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ±2 dB can be expected.

16.8. According to CENELEC, typical worst-case uncertainty of field measurements is ±5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ±3 dB.

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

Specific Absorption Rate Uncertainty at 1900 MHz, GSM Modulation Scheme calculated in accordance with IEEE 1528-200X

Type of Uncertainty	Source of uncertainty		Value ±%	Probability distribution	Divisor	C _i	U() ±	V _i or V _{eff}
B	Probe Calibration		9.5000	Normal	2.0000	1.0000	4.7500	∞
B	Axial Isotropy		2.3000	Rectangular	1.7321	0.7000	0.9295	∞
B	Hemispherical Isotropy		4.7000	Rectangular	1.7321	0.7000	1.8995	∞
B	Spatial Resolution		0.5000	Rectangular	1.7321	1.0000	0.2887	∞
B	Boundary Effect		0.7390	Rectangular	1.7321	1.0000	0.4267	∞
B	Linearity		2.3300	Rectangular	1.7321	1.0000	1.3452	∞
B	Detecton Limits		0.2000	Rectangular	1.7321	1.0000	0.1155	∞
B	Readout Electronics		0.6500	Normal	2.0000	1.0000	0.3250	∞
B	Response time		0.0000	Rectangular	1.7321	1.0000	0.0000	∞
B	Integration Time		0.0040	Rectangular	1.7321	1.0000	0.0023	∞
B	RF Ambient Conditions		3.0000	Rectangular	1.7321	1.0000	1.7321	∞
B	Probe Positioner Mech. Restrictions		6.6700	Rectangular	1.7321	1.0000	3.8509	∞
B	Probe Positioning with regard to Phantom Shell		2.8500	Rectangular	1.7321	1.0000	1.6454	∞
B	Extrapolation and Integration/Max SAR Evaluation		5.0800	Rectangular	1.7321	1.0000	2.9329	∞
A	Test Sample Positioning		0.5840	Normal	1.0000	1.0000	0.5840	10
A	Device Holder Uncertainty		0.1540	Rectangular	1.7321	1.0000	0.0889	10
B	Drift of output power		5.0000	Rectangular	1.7321	1.0000	2.8868	∞
B	Phantom Uncertainty		4.0000	Rectangular	1.7321	1.0000	2.3094	∞
B	Liquid conductivity (target value)		5.0000	Rectangular	1.7321	0.7000	2.0207	∞
B	Liquid conductivity (measured value)		2.4400	Rectangular	1.7321	0.7000	0.9861	∞
B	Liquid Permittivity (target value)		5.0000	Rectangular	1.7321	0.6000	1.7321	∞
B	Liquid Permittivity (measured value)		2.4400	Rectangular	1.7321	0.6000	0.8452	∞
	Combined standard uncertainty		normal				9.01	>500
	Expanded uncertainty		normal k=2				18.02	>500

Statement of Confidence:-

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with UKAS requirements.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
A1182	Handset Positioner	Schmid & Partners	V3.0	None
A1184	Data Acquisition Electronics	Schmid & Partners	DAE	394
A1186	Probe	Schmid & Partners	ET3 DV6	1529
A1237	1900MHz Validation Dipole	Schmid & Partners	D1900V2	540
A1238	SAM Phantom	Schmid & Partners	001	001
C1024	Rosenberger Cable	Rosenberger	FA210A-1-020m	FA00B 7565
C1052	Cable	Utiflex	FA210A0030M3030	001
C1053	Cable	Utiflex	FA210A0003M3030	001
C1054	Cable	Utiflex	FA210A0001M3050A	001
G046	Signal Generator	Gigatronics	7100/.01-20	749474
G0528	Robot Power Supply	Schmid & Partner	Dasy3	None
M1015	Network Analyser	Agilent Technologies	8753ES	US39172406
A1174	Dielectric Probe Kit	Agilent Technologies	85070C	Us99360072
M1047	Robot Arm	Staubli	RX908 L	F00/SD89A1/A/01
M1049	Power meter head	Rohde & Schwarz	URY Z2	891 647/80
M1069	Diode Power Sensor	Rohde & Schwarz	NRV-Z2	838824/010
S256	-	RFI	-	-

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 26 of 45

Issue Date: 29 January 2003

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

Appendix 2. Conducted Power Measurements

Frequency Channel No	Before (dBm)	After (dBm)
512	28.24	28.24
660	28.46	28.46
810	28.98	28.98

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: **Sendo Ltd.**

Z100 Tri-Band Mobile Phone

To: **OET Bulletin 65 Supplement C (2001-01)**

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 27 of 45

Issue Date: 29 January 2003

Appendix 3. SAR Distribution Scans

This appendix contains SAR Distribution Scans. These scans are not included in the total number of pages for this report.

Z100

Cheek Left Centre Channel (660)

SAM Phantom; Left Hand


Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);

Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.8%

09/30/02

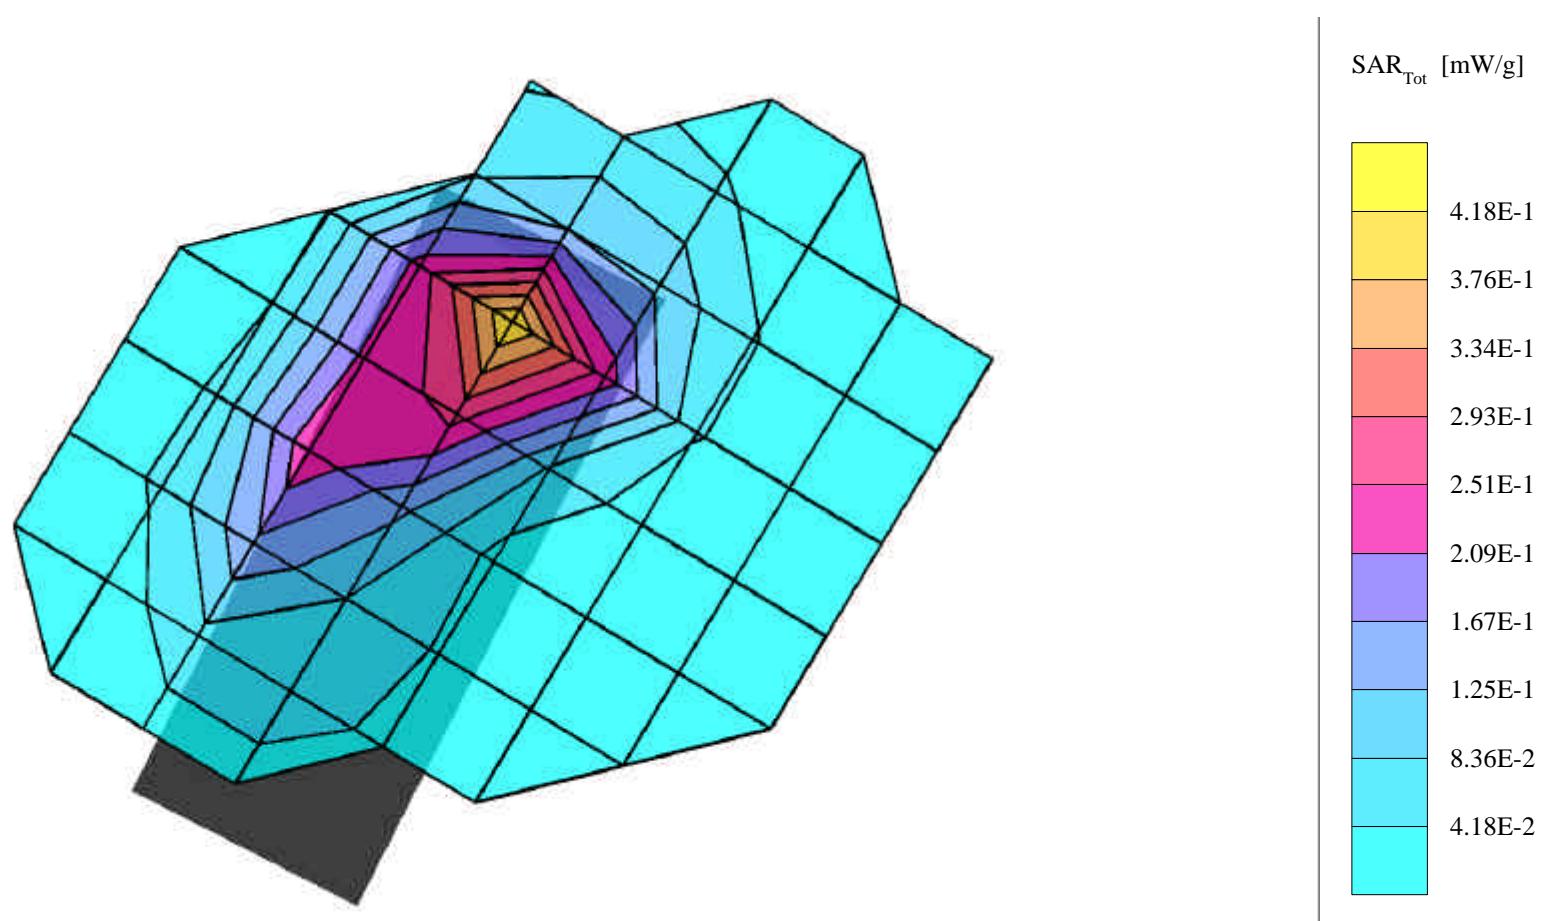

Z100

Cheek Left Centre Channel (660)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz; $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.654 mW/g, SAR (1g): 0.361 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.8%

09/30/02

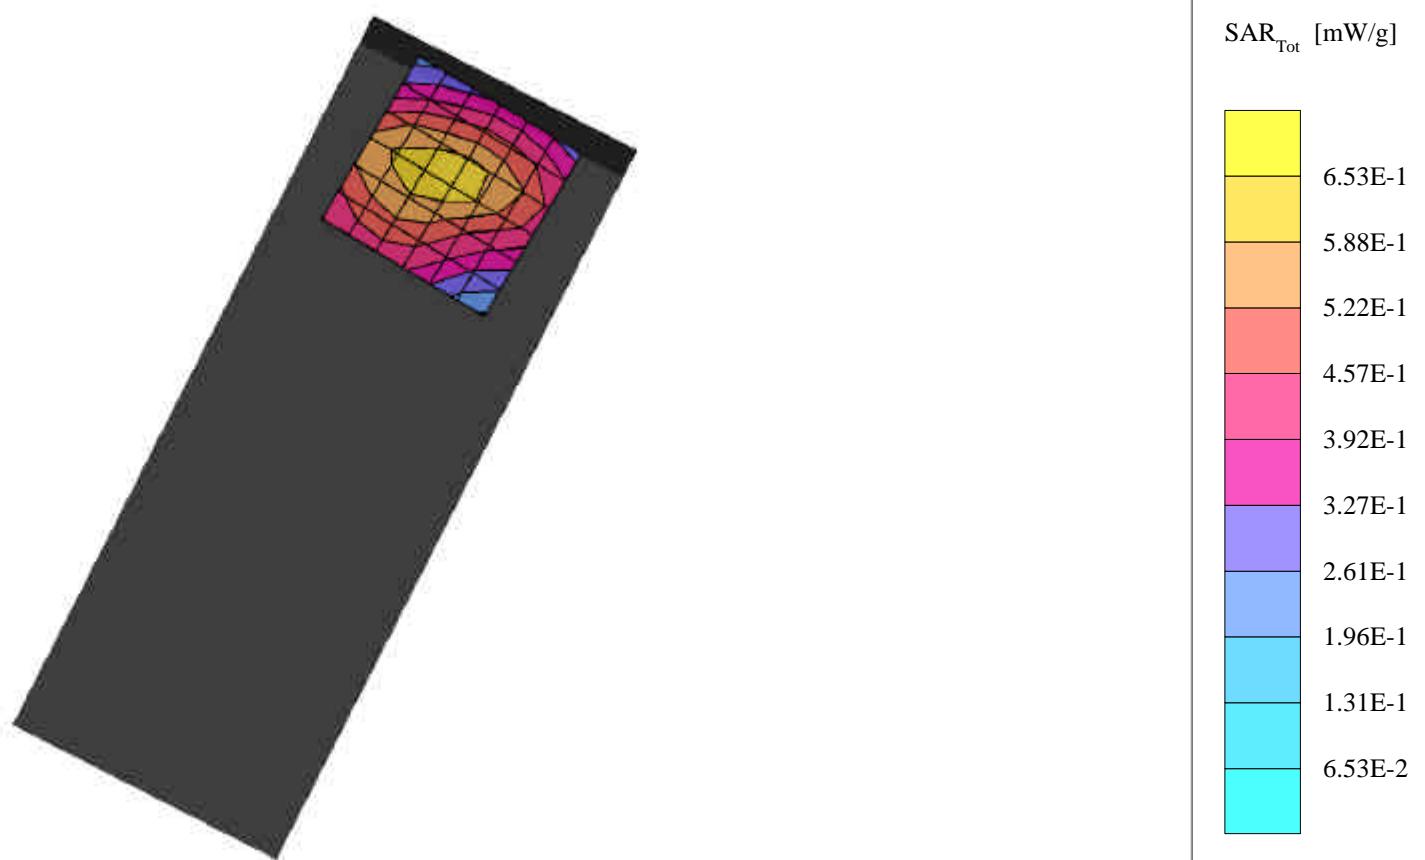

Z100

Tilted Left Centre Channel (660)

SAM Phantom; Left Hand


Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);

Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.3%

09/30/02

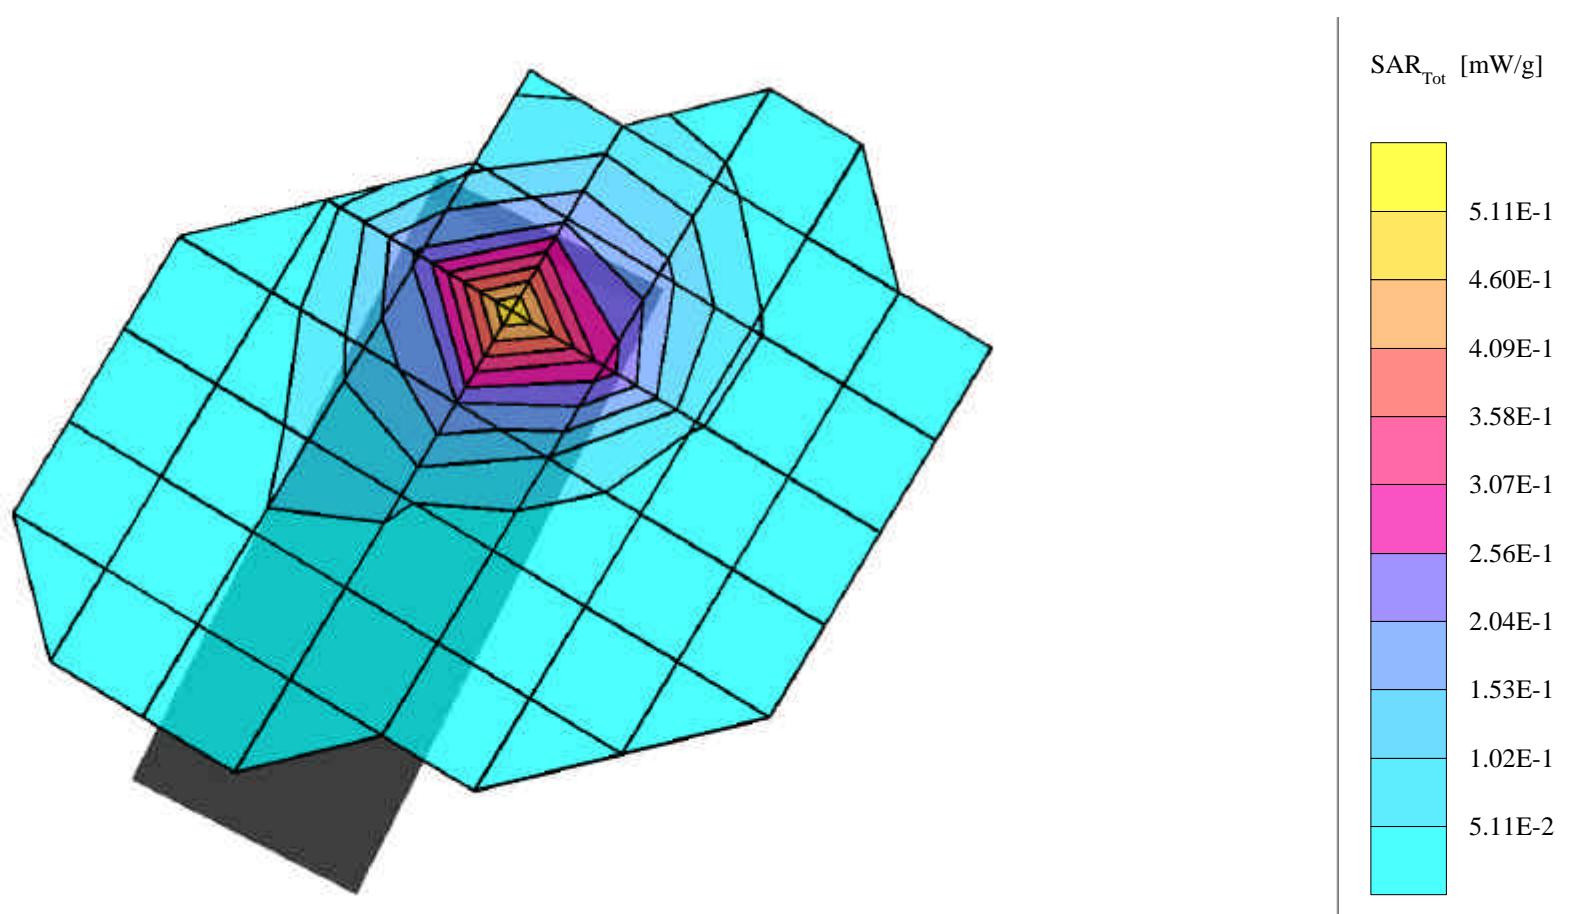

Z100

Tilted Left Centre Channel (660)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.795 mW/g, SAR (1g): 0.444 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.3%

09/30/02

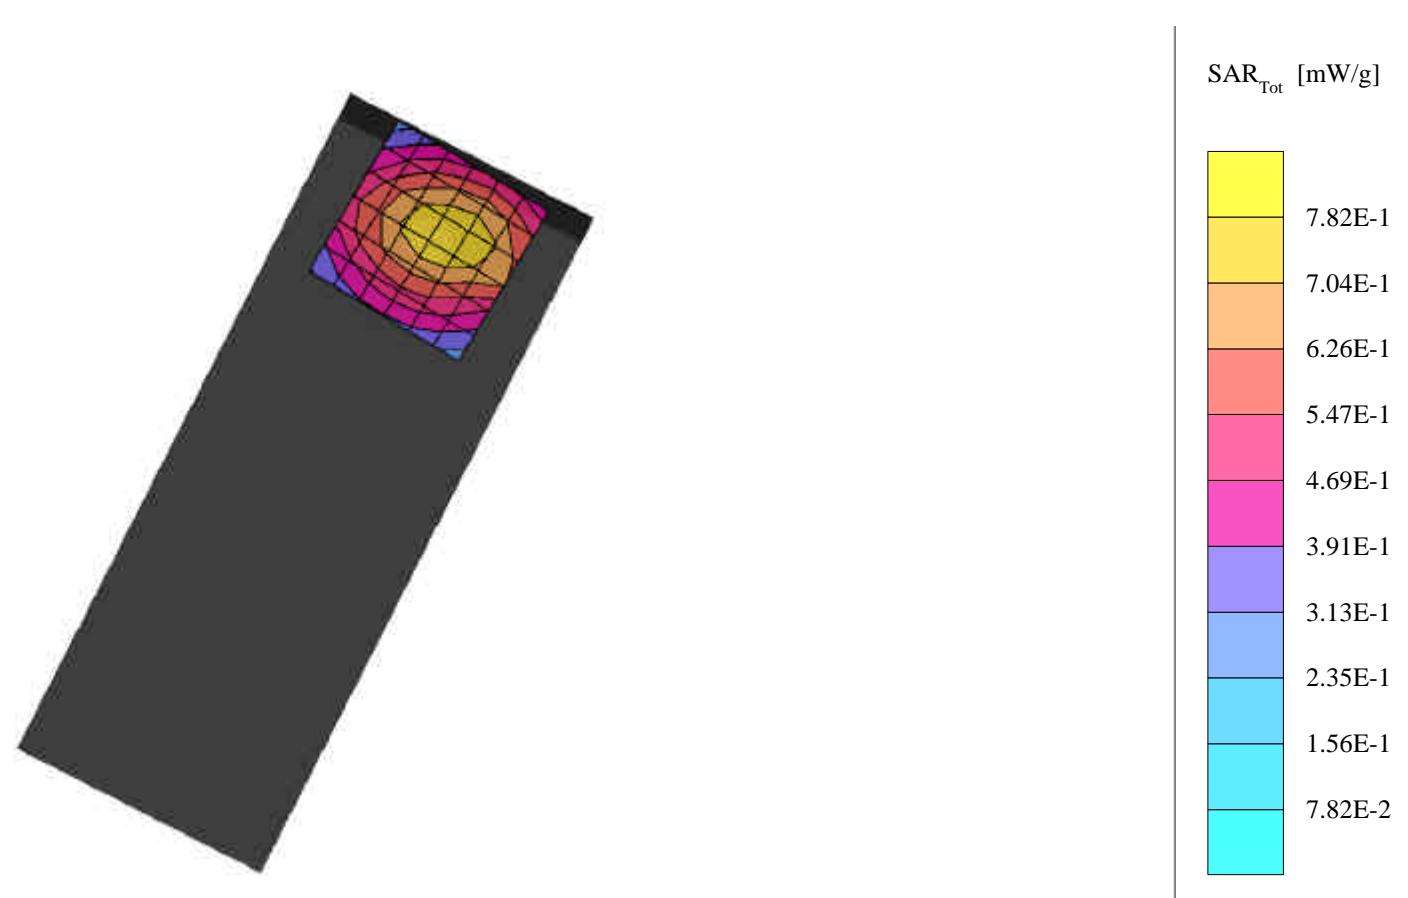

Z100

Cheek Right Channel (660)

SAM Phantom; Righ Hand


Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);

Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.1%

09/30/02

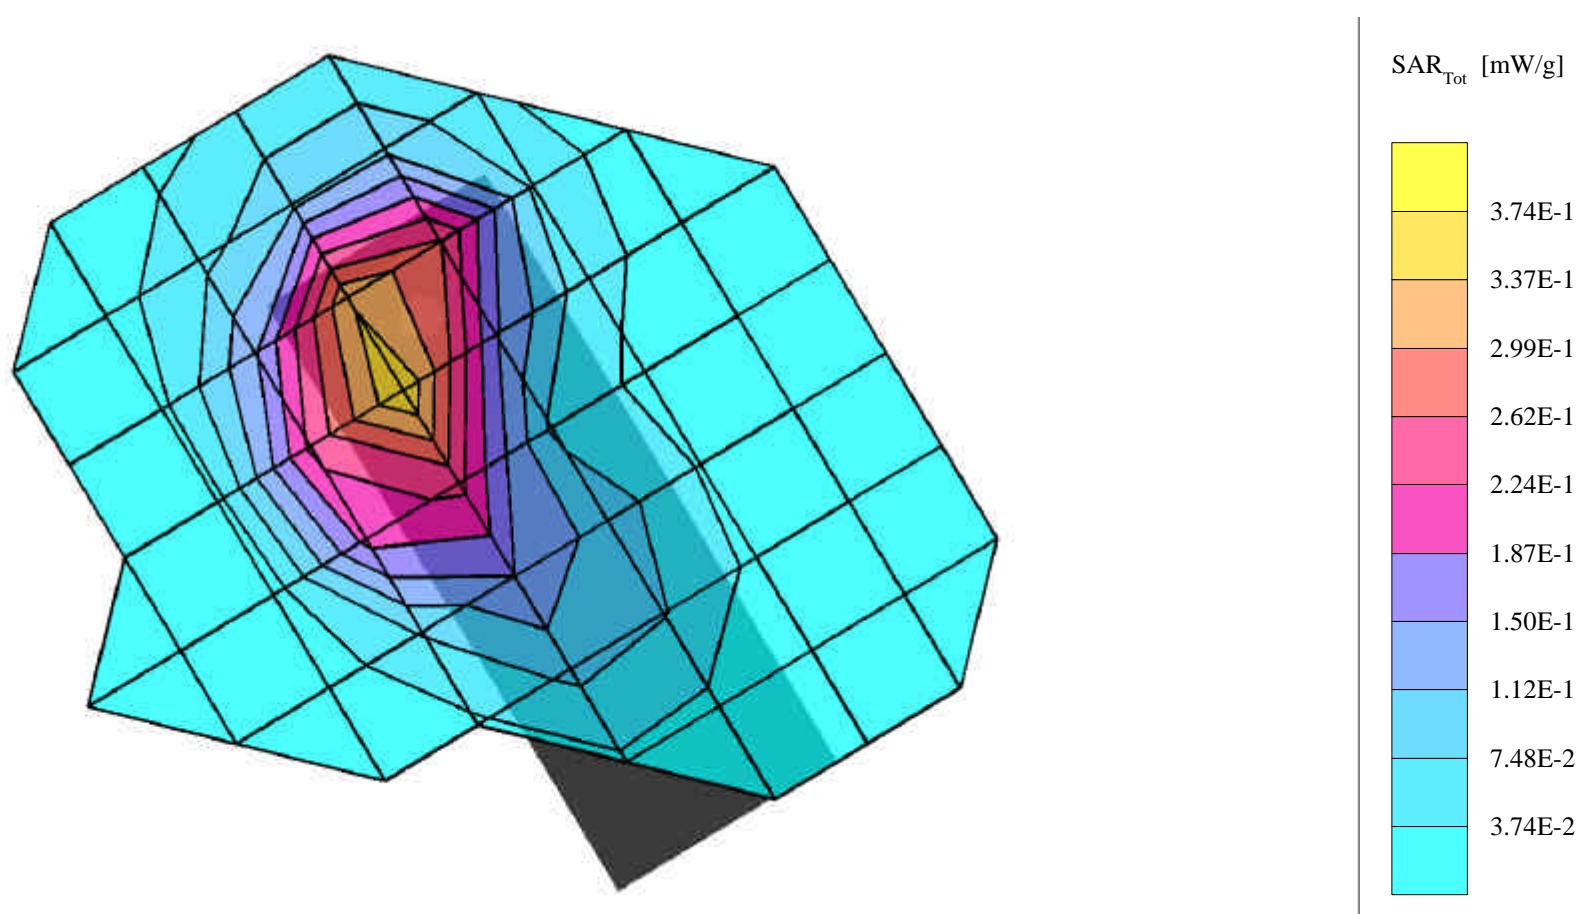

Z100

Cheek Right Centre Channel (660)

SAM Phantom; Righ Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz; $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.705 mW/g, SAR (1g): 0.387 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.1%

09/30/02

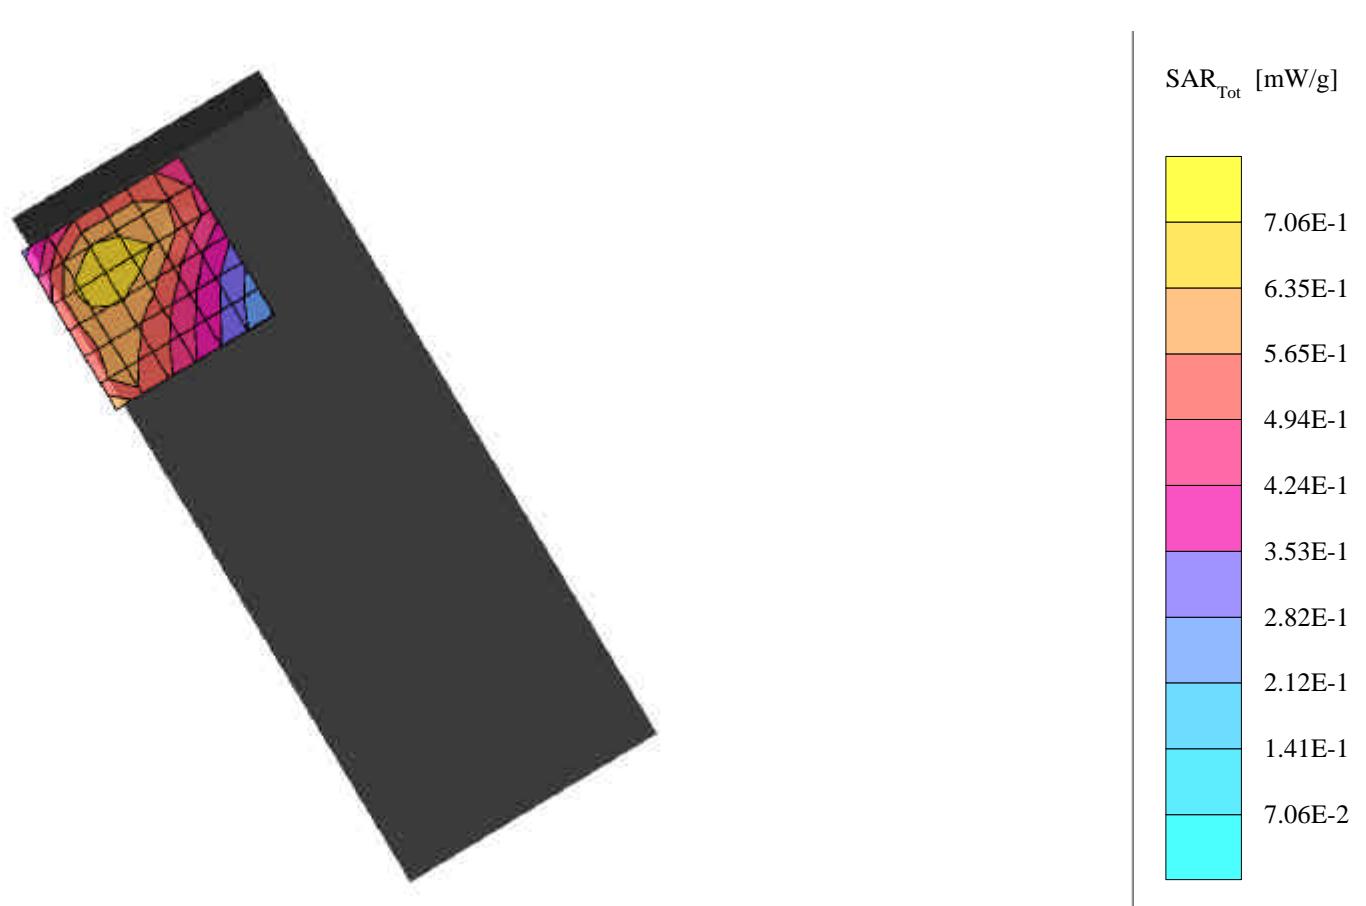

Z100

Tilted Right Channel (660)

SAM Phantom; Righ Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 1.2%

09/30/02

SAR_{Tot} [mW/g]

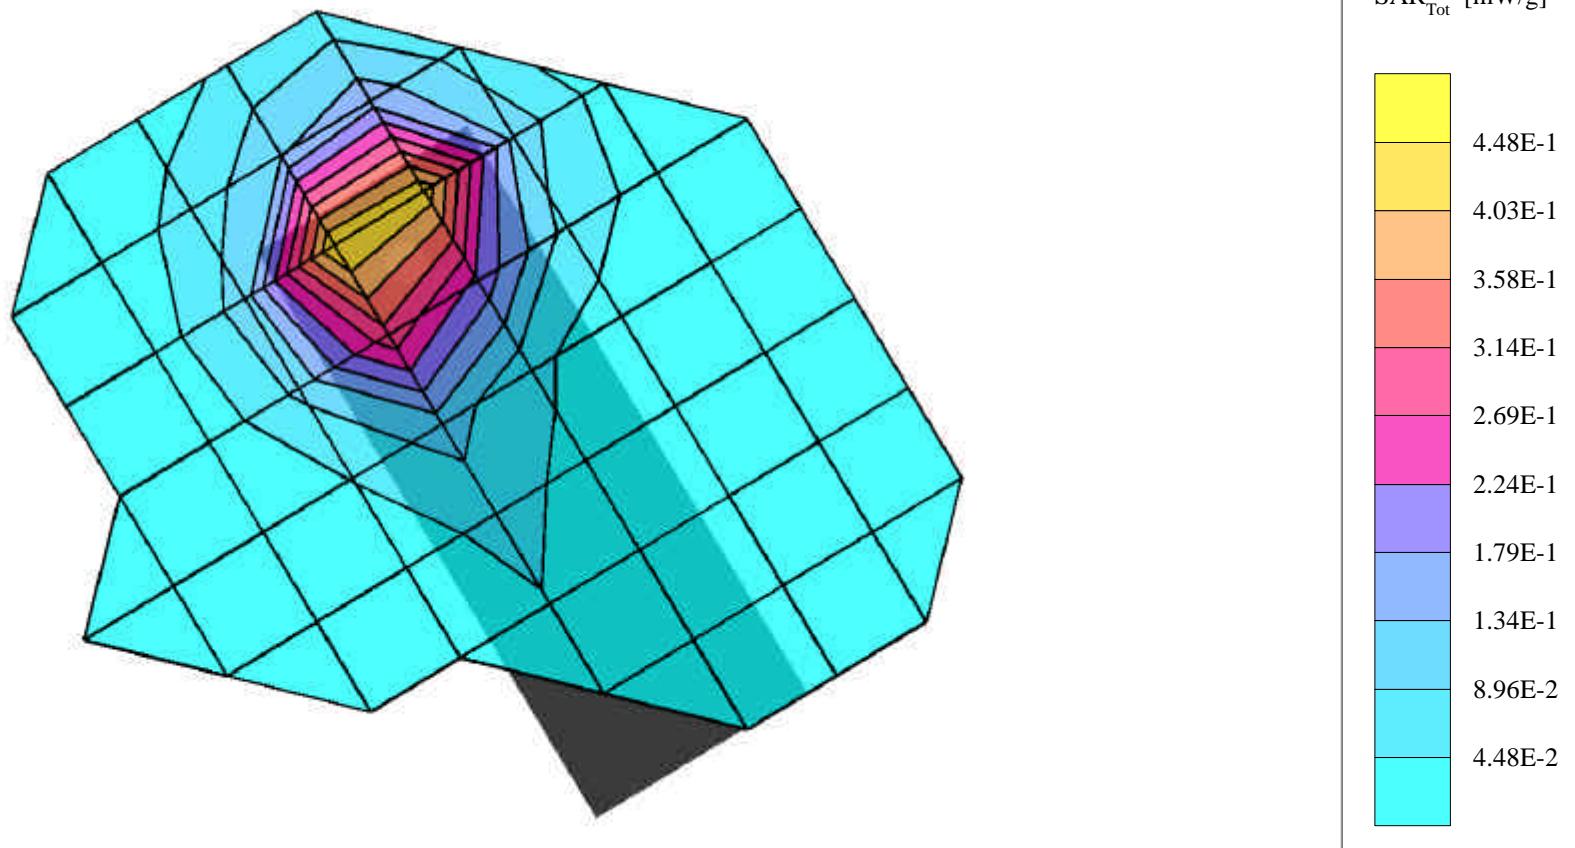

Z100

Tilted Right Centre Channel (660)

SAM Phantom; Righ Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.785 mW/g, SAR (1g): 0.440 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 1.2%

09/30/02

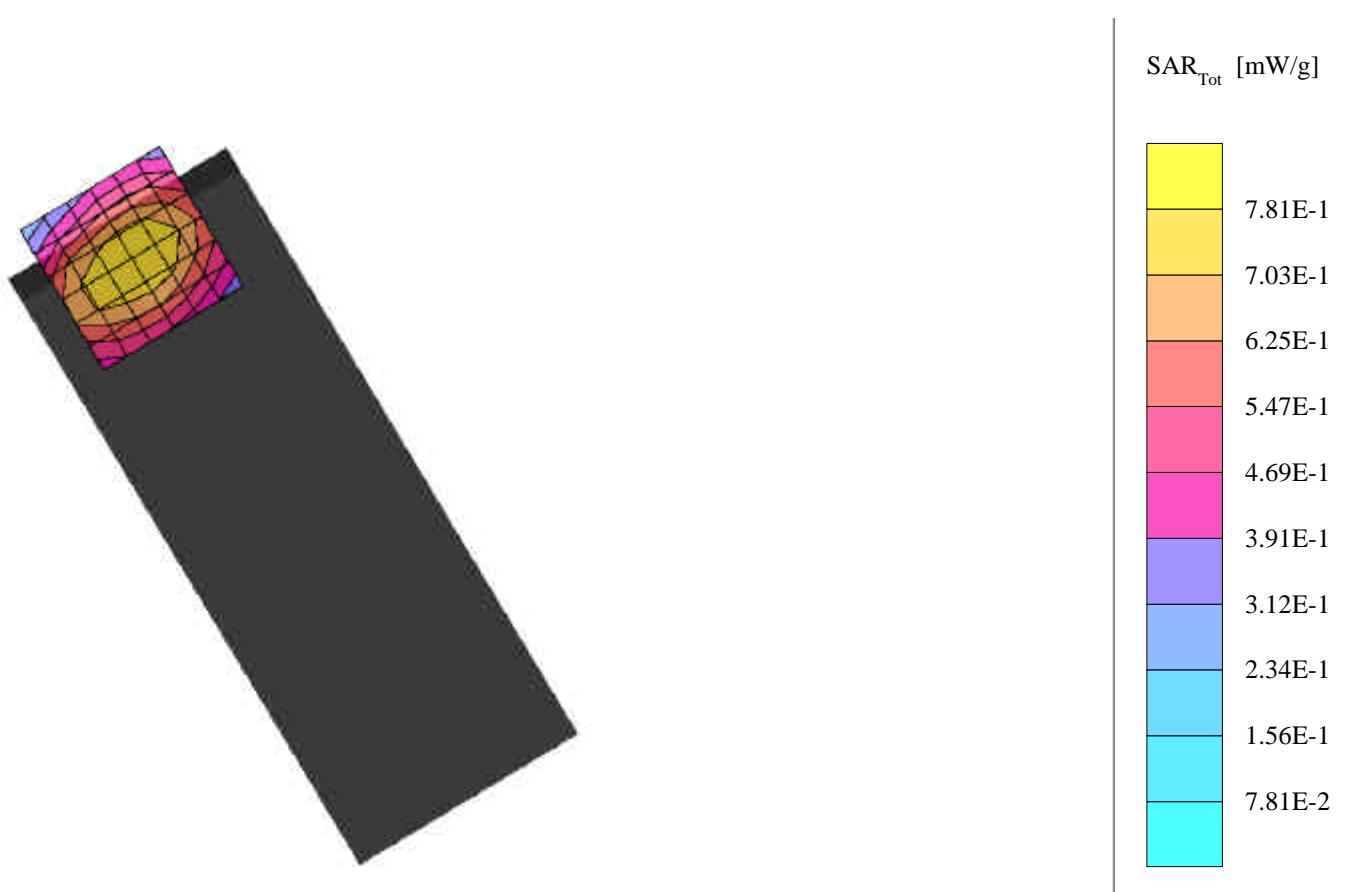

Z100

Tilted Left Bottom Channel (512)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.6%

09/30/02

SAR_{Tot} [mW/g]

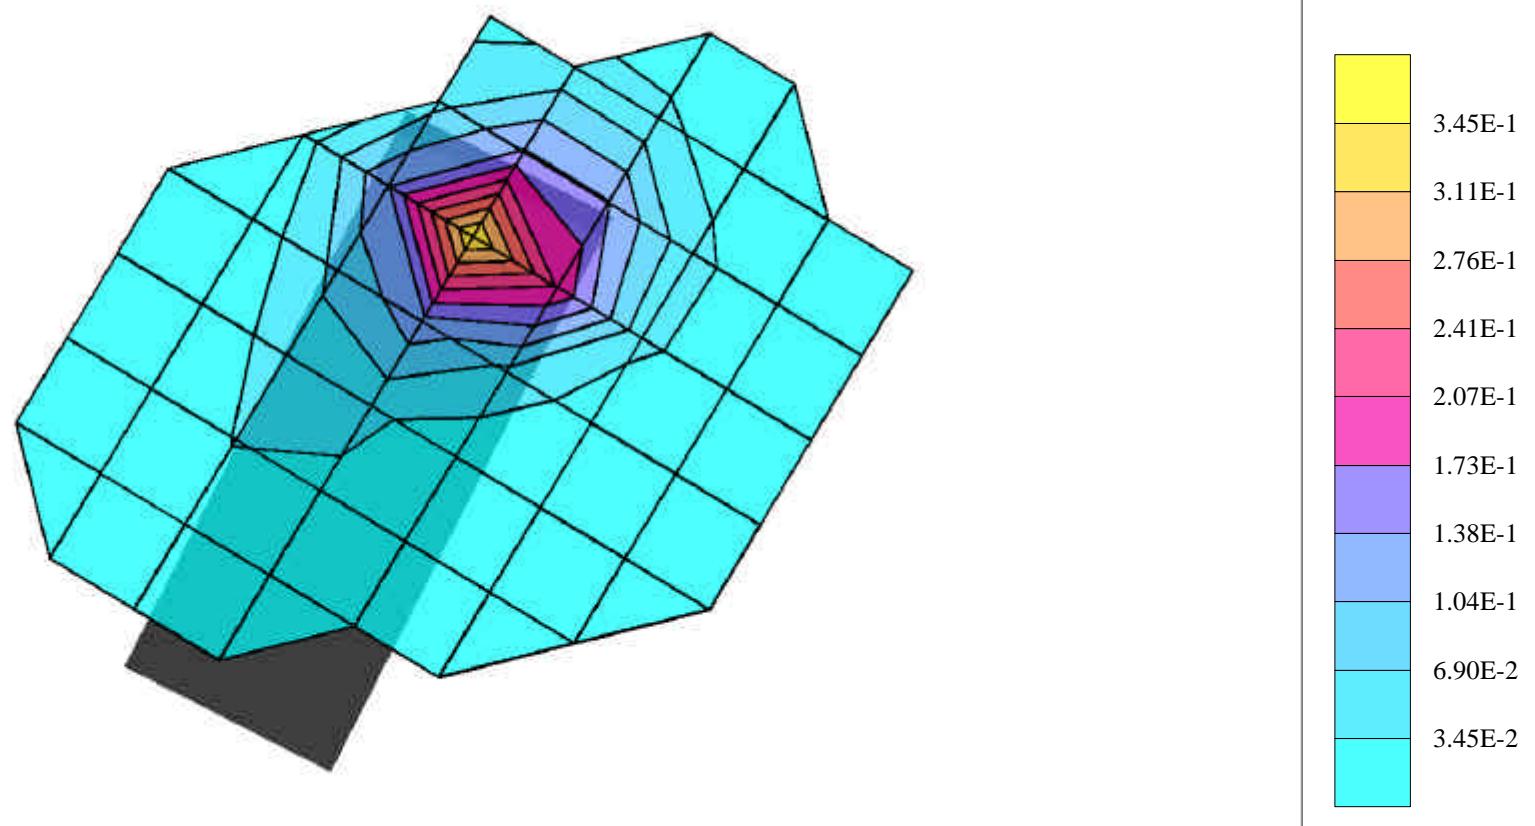

Z100

Tilted Left Bottom Channel (512)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz; $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.537 mW/g, SAR (1g): 0.304 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.6%

09/30/02

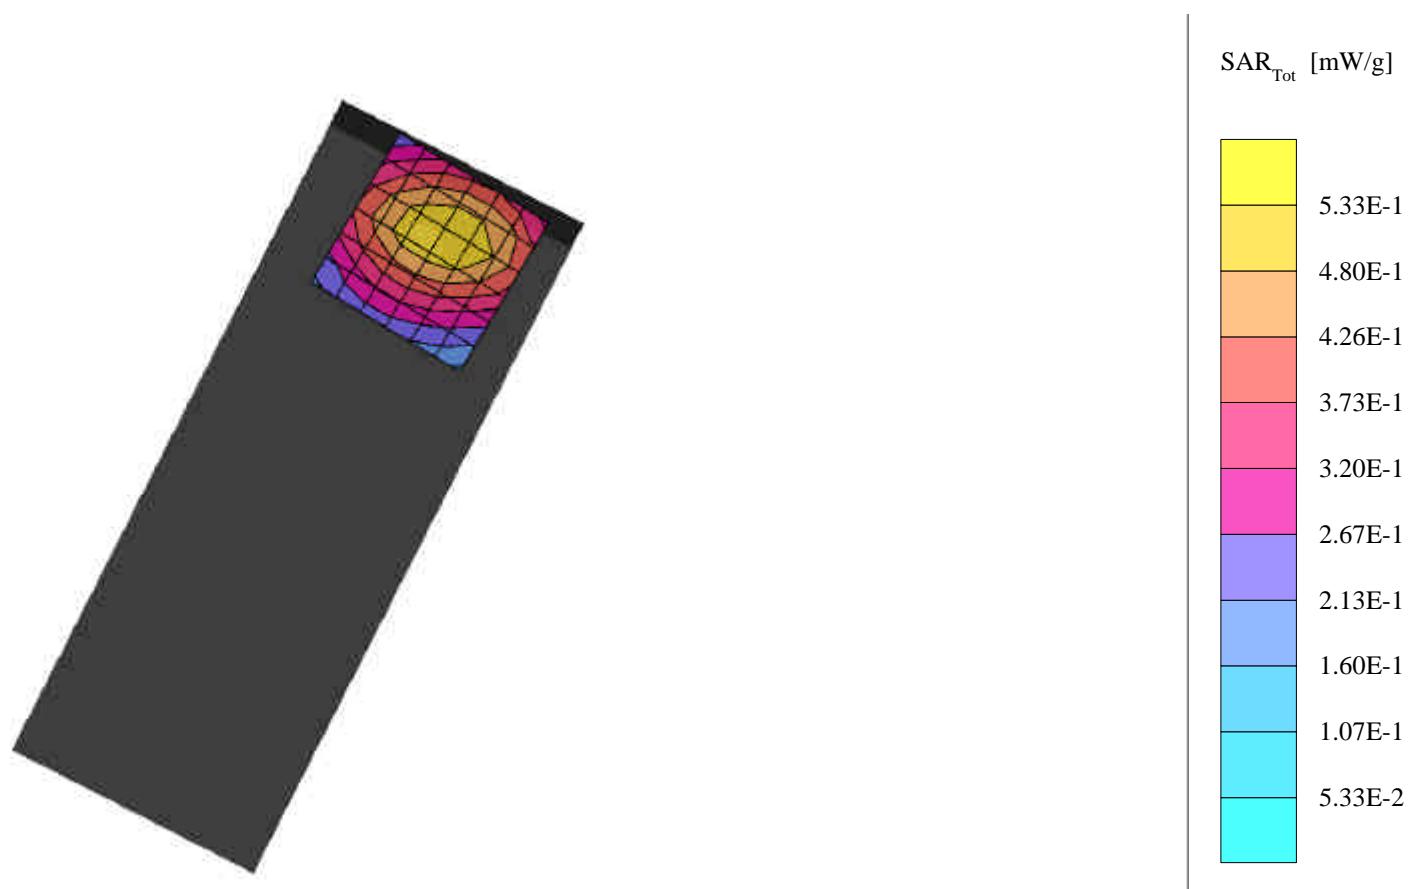

Z100

Tilted Left Top Channel (810)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.3%

09/30/02

SAR_{Tot} [mW/g]

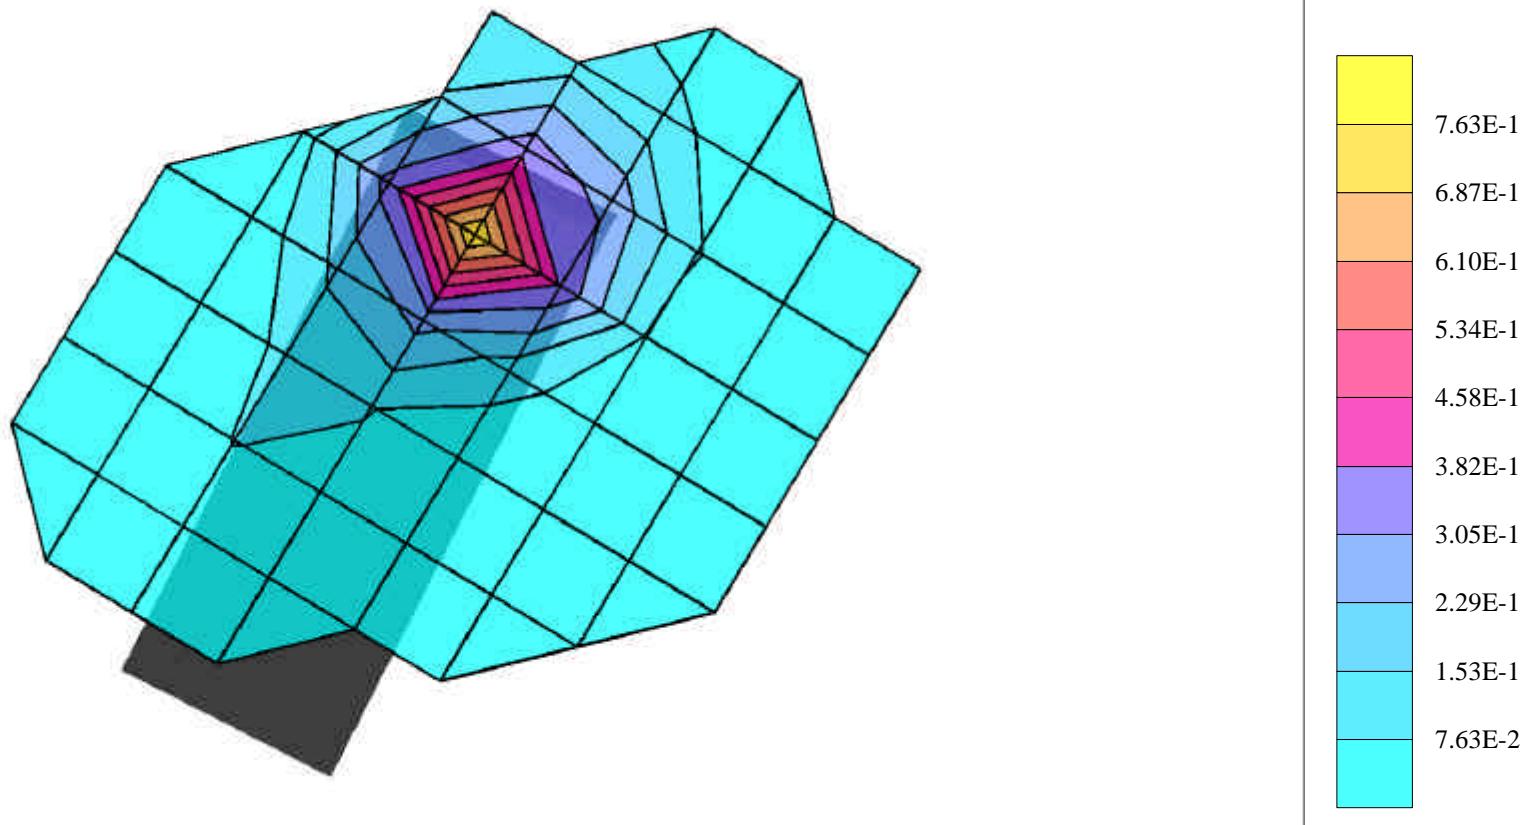

Z100

Tilted Left Top Channel (810)

SAM Phantom; Left Hand

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);

Crest factor: 8.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$



Peak: 1.22 mW/g, SAR (1g): 0.672 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -1.3%

09/30/02

SAR_{Tot} [mW/g]

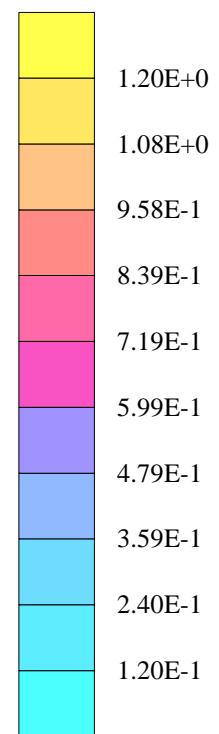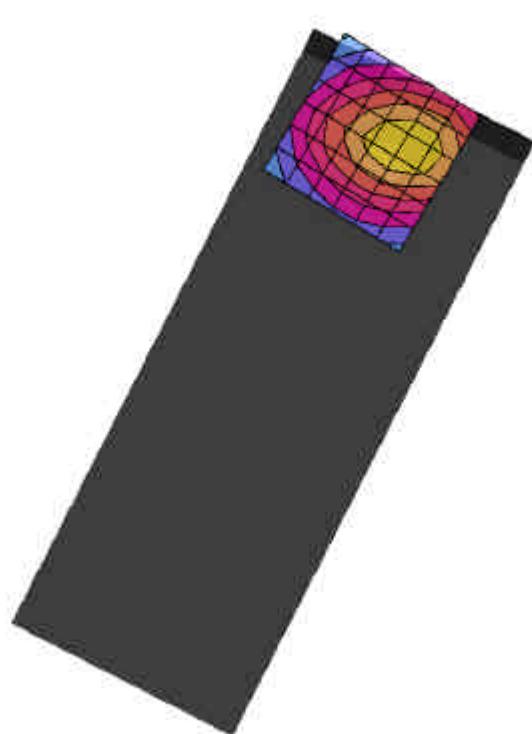

Z100

Body with Case Centre Channel (660)

SAM Phantom; Flat

Probe: ET3DV6 - SN1529; ConvF(4.70,4.70,4.70);



Crest factor: 8.0; Body 1900MHz FCC: $\sigma = 1.60 \text{ mho/m}$ $\epsilon_r = 54.1$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -2.1%

09/30/02

SAR_{Tot} [mW/g]

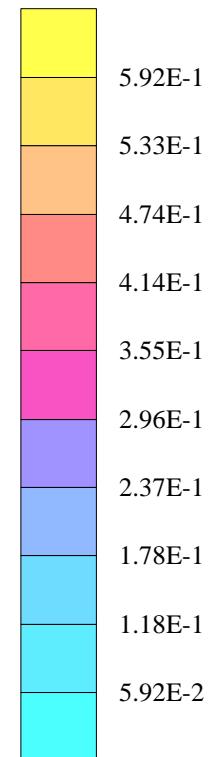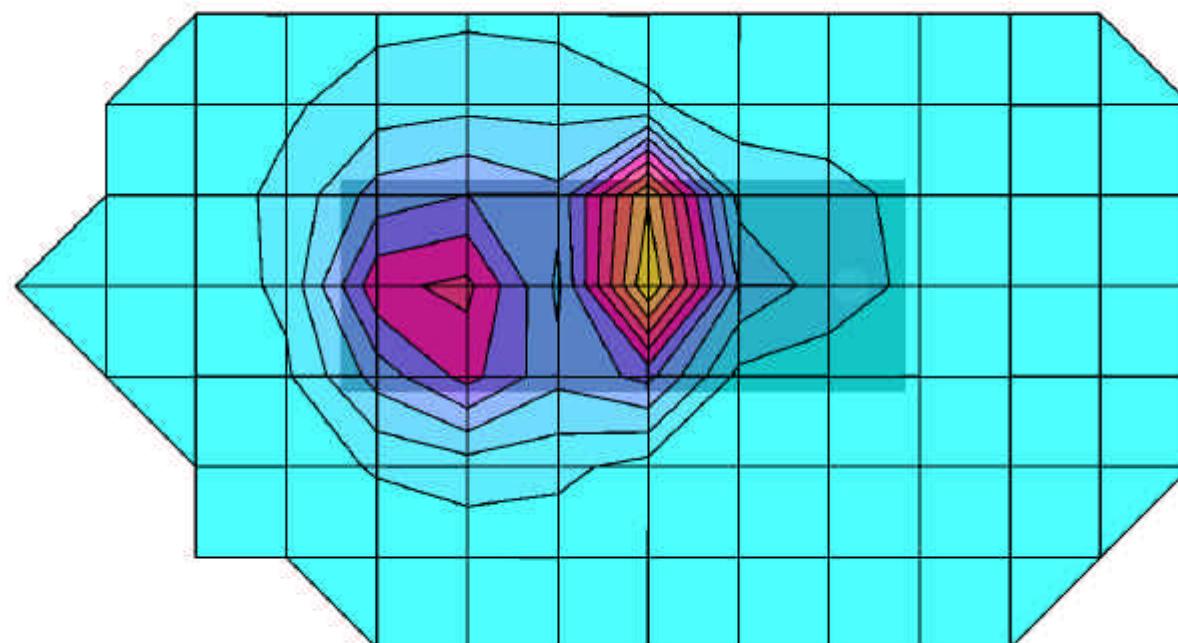

Z100

Body with Case Centre Channel (660)

SAM Phantom; Flat

Probe: ET3DV6 - SN1529; ConvF(4.70,4.70,4.70);


Crest factor: 8.0; Body 1900MHz FCC: $\sigma = 1.60 \text{ mho/m}$ $\epsilon_r = 54.1$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 0.963 mW/g, SAR (1g): 0.566 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift -2.1%

09/30/02

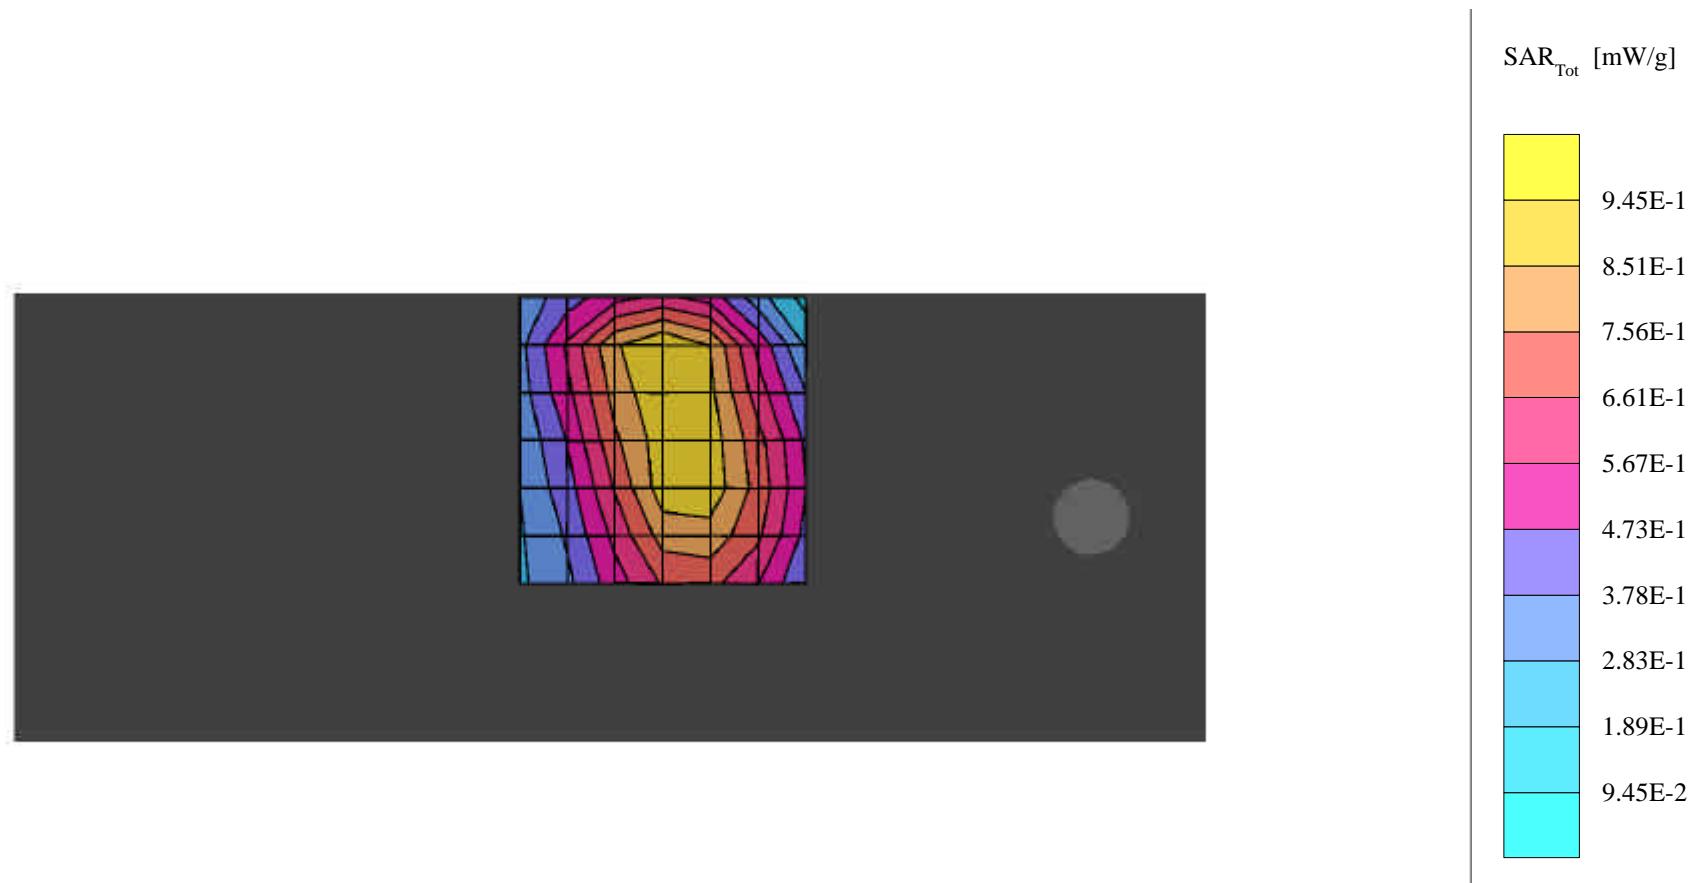

Z100

Body with Case and Personal Handsfree Channel (660)

SAM Phantom; Flat

Probe: ET3DV6 - SN1529; ConvF(4.70,4.70,4.70);


Crest factor: 8.0; Body 1900MHz FCC: $\sigma = 1.60 \text{ mho/m}$ $\epsilon_r = 54.1$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.1%

09/30/02

SAR_{Tot} [mW/g]

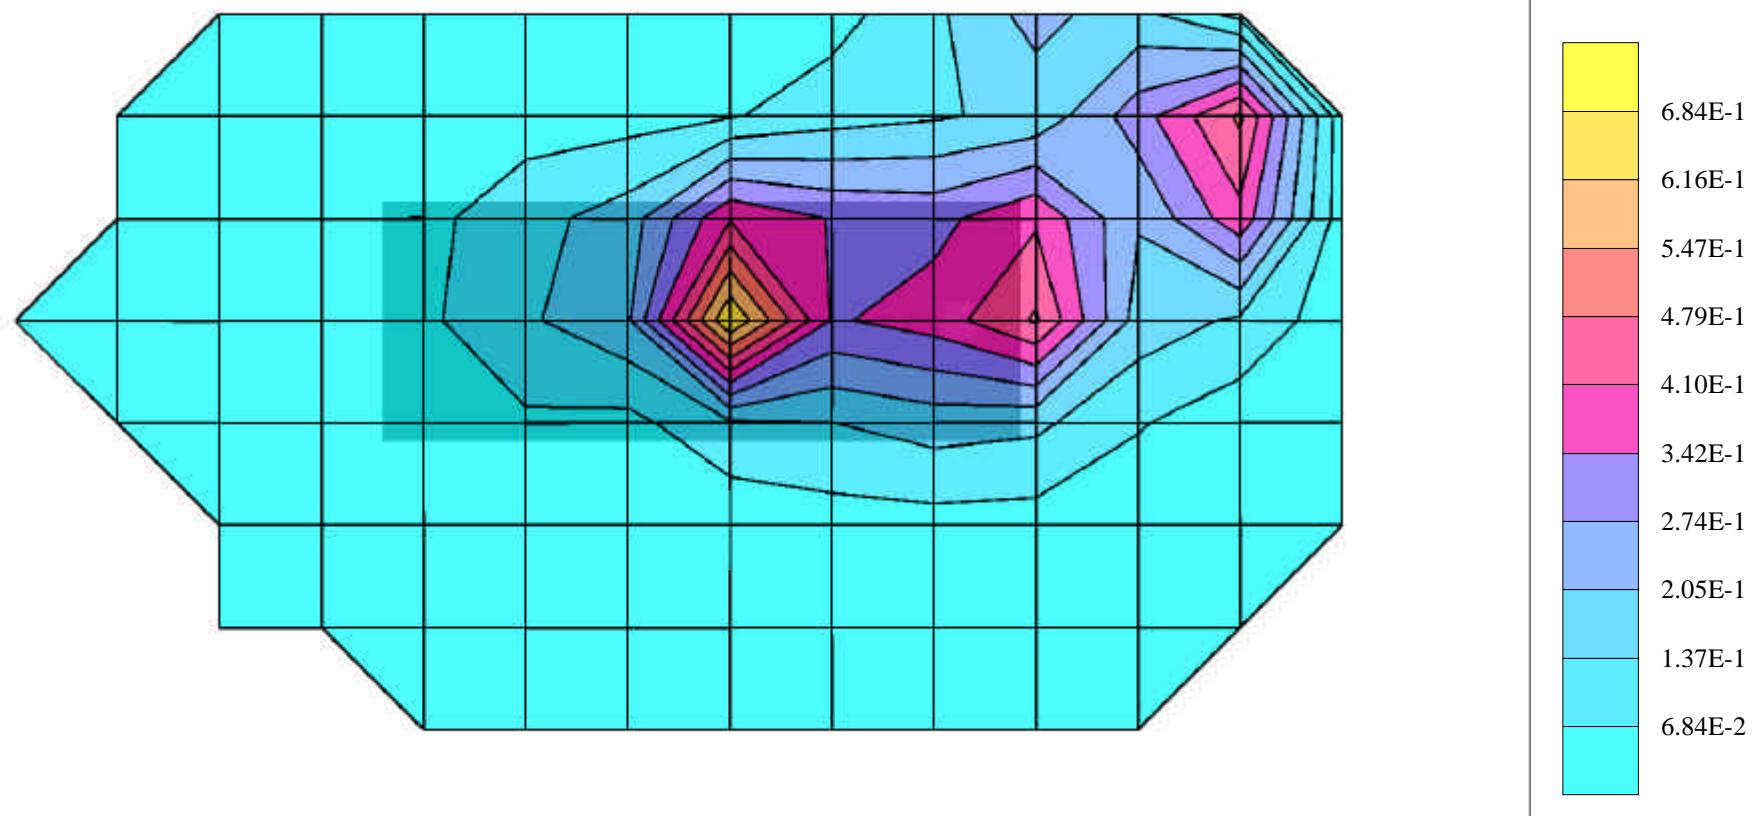

Z100

Body with Case and Personal Handsfree Centre Channel (660)

SAM Phantom; Flat

Probe: ET3DV6 - SN1529; ConvF(4.70,4.70,4.70);


Crest factor: 8.0; Body 1900MHz FCC: $\sigma = 1.60 \text{ mho/m}$ $\epsilon_r = 54.1$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 1.07 mW/g, SAR (1g): 0.604 mW/g

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

SAR Drift 0.1%

09/30/02

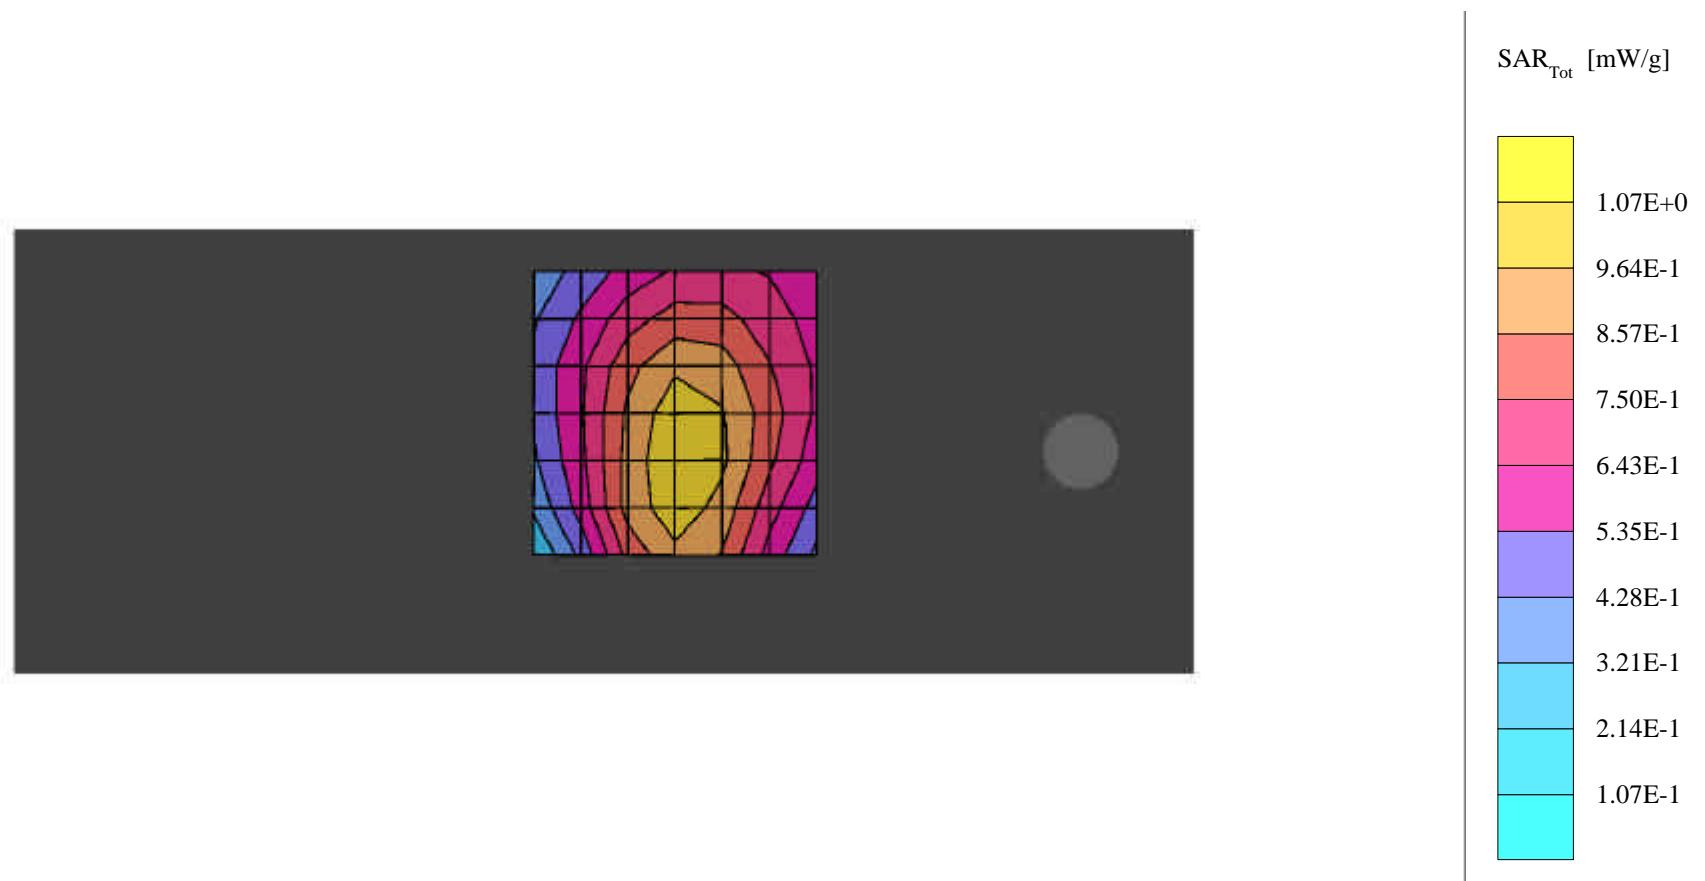

Dipole 1900 MHz

Validation

SAM Phantom; Flat


Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);

Crest factor: 1.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

09/30/02

SAR_{Tot} [mW/g]

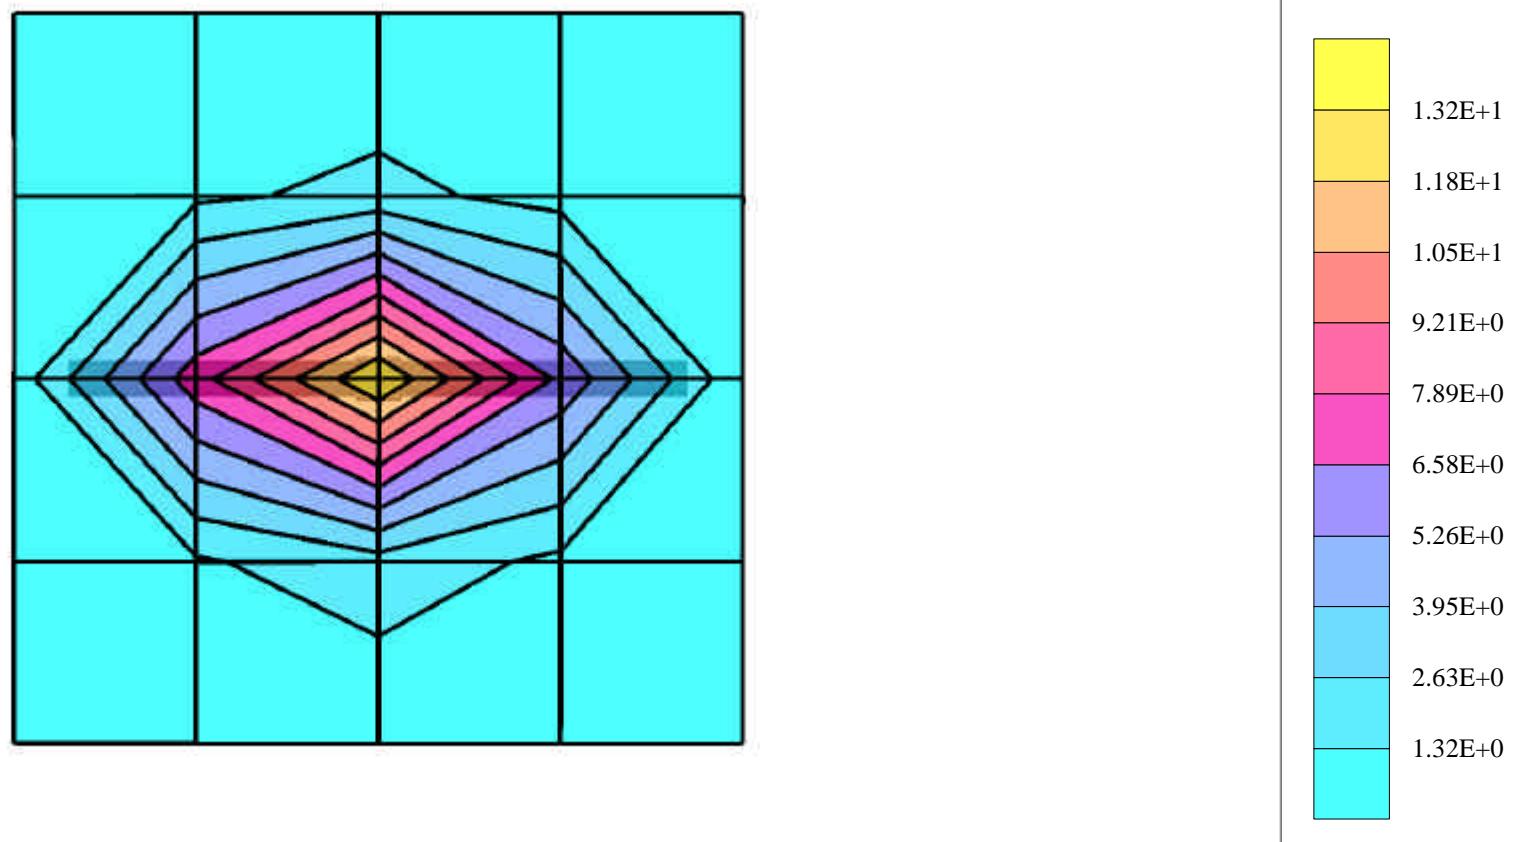

Dipole 1900 MHz

Validation

SAM Phantom; Flat

Probe: ET3DV6 - SN1529; ConvF(5.20,5.20,5.20);


Crest factor: 1.0; Brain 1900MHz: $\sigma = 1.52 \text{ mho/m}$ $\epsilon_r = 37.3$ $\rho = 1.00 \text{ g/cm}^3$

Peak: 21.9 mW/g $\pm 0.05 \text{ dB}$, SAR (1g): 11.0 mW/g $\pm 0.02 \text{ dB}$

Lab Temperature 22.0 deg C, Fluid Temperature 21.0 deg C

09/30/02

SAR_{Tot} [mW/g]

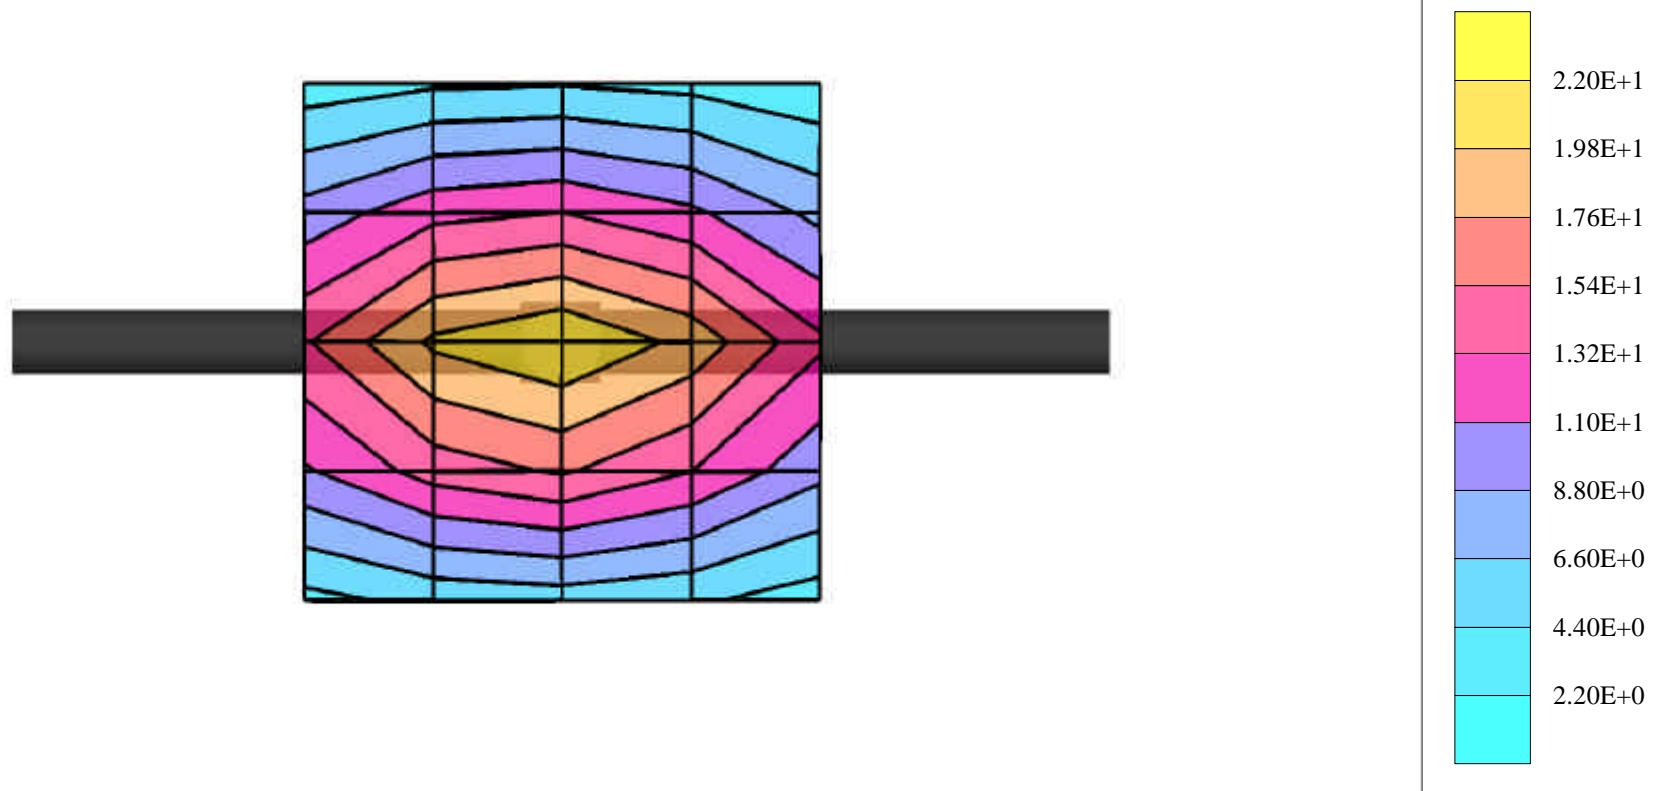



Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

Appendix 4. Test Configuration Photograph

This appendix contains photographs showing the test configuration for the measurement of Specific Absorption Rate (SAR)

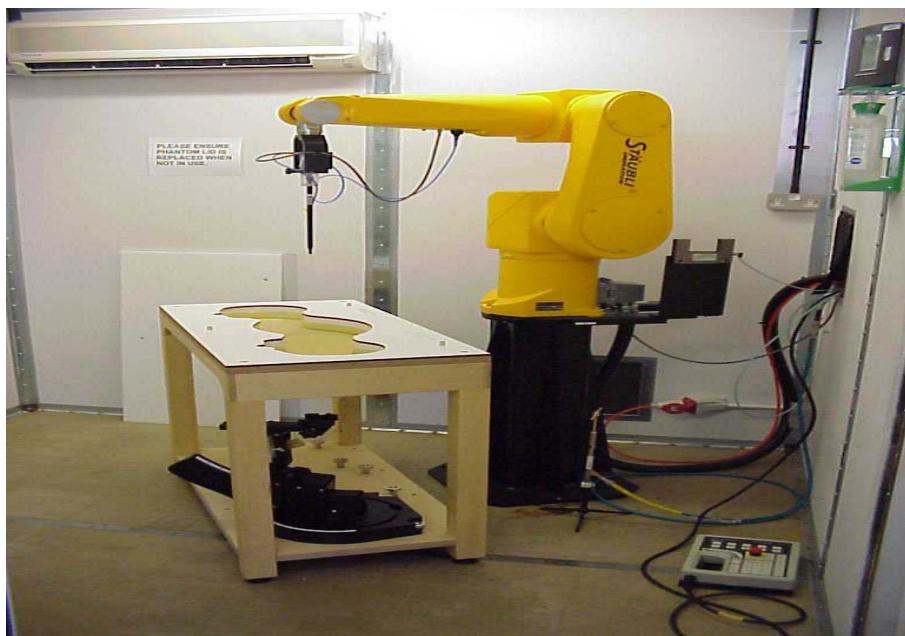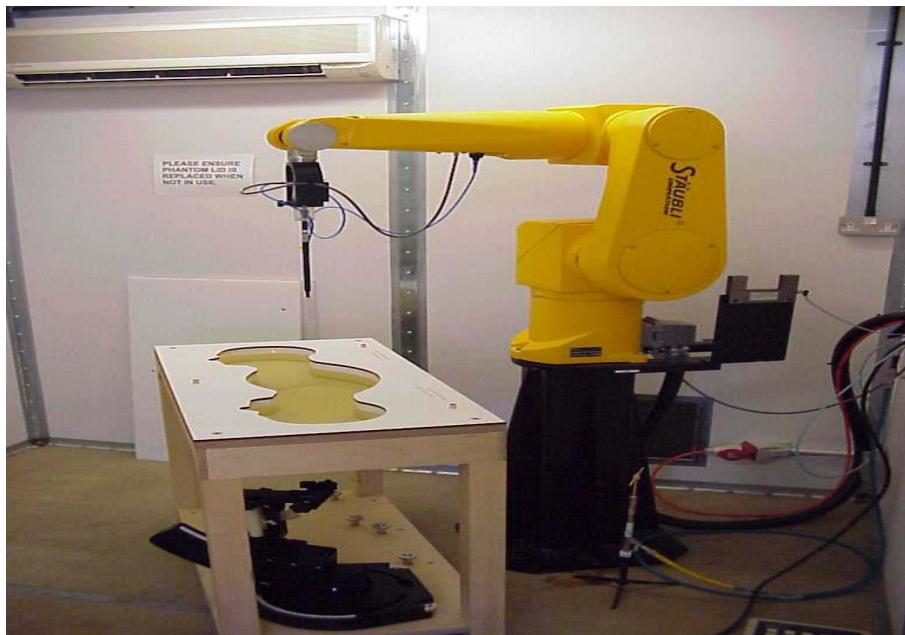

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: **Sendo Ltd.**

Z100 Tri-Band Mobile Phone

To: **OET Bulletin 65 Supplement C (2001-01)**

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 29 of 45

Issue Date: 29 January 2003



RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: **Sendo Ltd.**

Z100 Tri-Band Mobile Phone

To: **OET Bulletin 65 Supplement C (2001-01)**

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 30 of 45

Issue Date: 29 January 2003

Appendix 5. Calibration Data

Refer to the accompanying document for the calibration data and certificates.

Appendix 6. Photographs of EUT

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/43987JD02/001	Front view of EUT.
PHT/43987JD02/002	Rear view of EUT.
PHT/43987JD02/003	Front view of EUT in case.
PHT/43987JD02/004	Rear view of EUT in case.
PHT/43987JD02/005	View of EUT with case.
PHT/43987JD02/006	View of EUT with case.
PHT/43987JD02/007	View of EUT with case and PHF.
PHT/43987JD02/008	View of EUT with case and PHF.
PHT/43987JD02/009	Left view of cheek position.
PHT/43987JD02/010	Right view of cheek position.
PHT/43987JD02/011	Left view of tilted position.
PHT/43987JD02/012	Right view of tilted position.
PHT/43987JD02/013	Fluid level.

These pages are not included in the total number of pages for this report.

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

TEST REPORT

S.No. RFI/SARB2/RP43987JD02C

Page 32 of 45

Issue Date: 29 January 2003

This page has been left intentionally blank.

Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/001 Front view of EUT.



RADIO FREQUENCY INVESTIGATION LTD

Operations Department

TEST REPORT

Photograph Section

S.No. RFI/SARB2/RP43987JD02C

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/002 Rear view of EUT.



Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/003 Front view of EUT in case.



RADIO FREQUENCY INVESTIGATION LTD

Operations Department

TEST REPORT

Photograph Section

S.No. RFI/SARB2/RP43987JD02C

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/004 Rear view of EUT in case.



Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/005 View of EUT with case.



RADIO FREQUENCY INVESTIGATION LTD

Operations Department

TEST REPORT

Photograph Section

S.No. RFI/SARB2/RP43987JD02C

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)


PHT/43987JD02/006 View of EUT with case.



Operations Department

Test Of: Sendo Ltd.
Z100 Tri-Band Mobile Phone
To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/007 View of EUT with case and PHF.

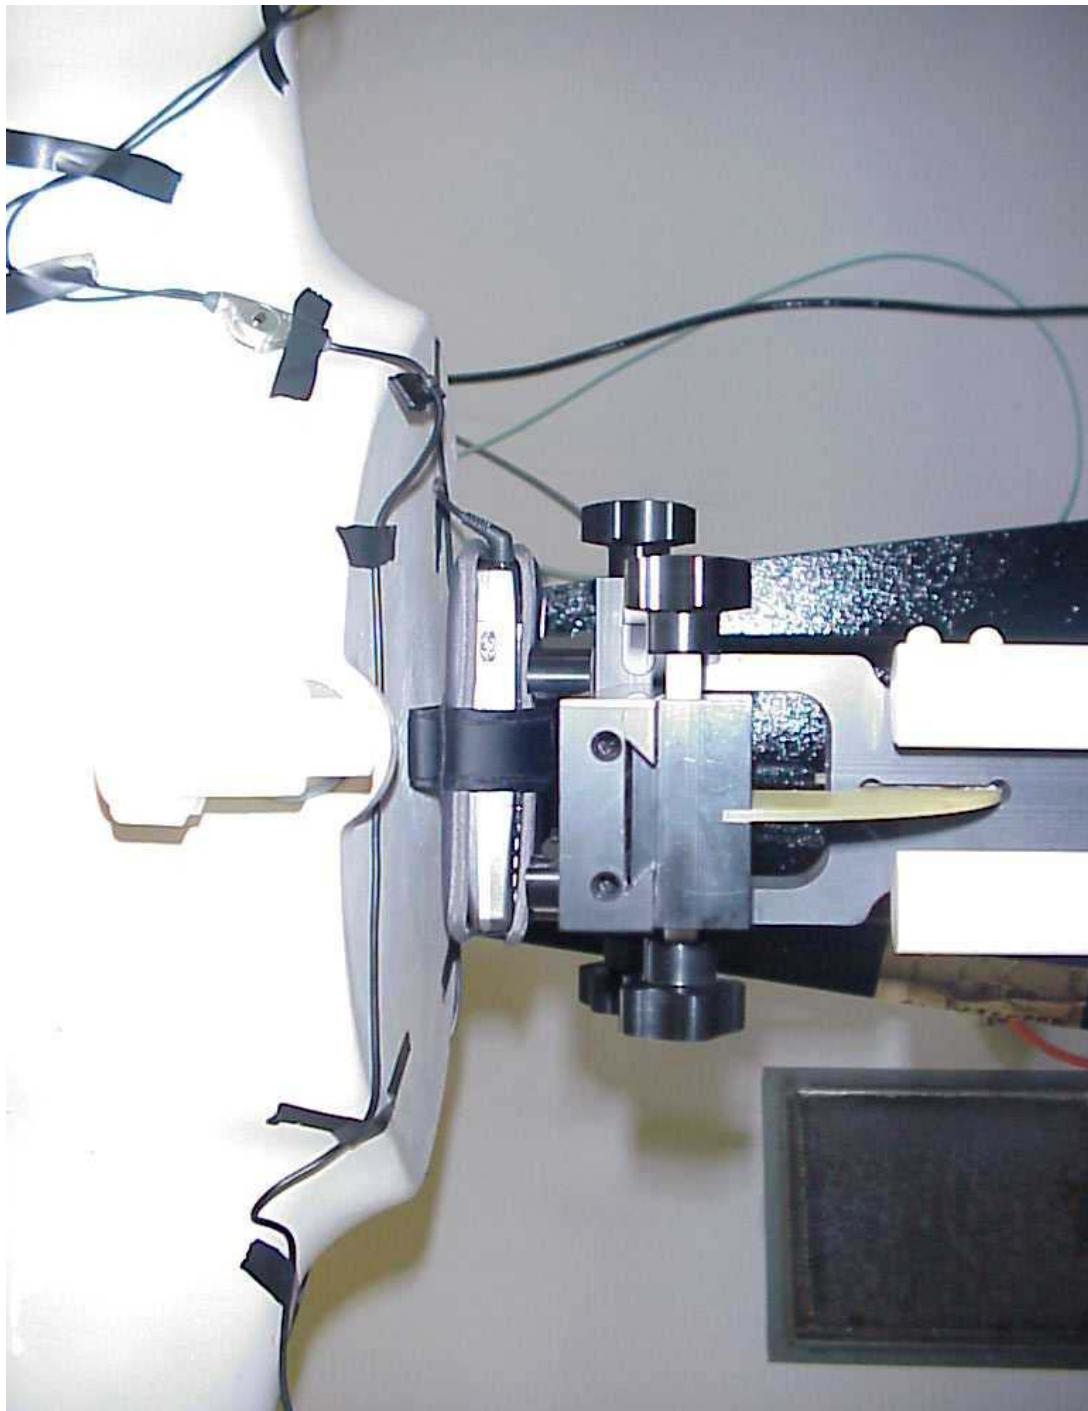

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/008 View of EUT with case and PHF.



Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/009 Left view of cheek position.




Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/010 Right view of cheek position.

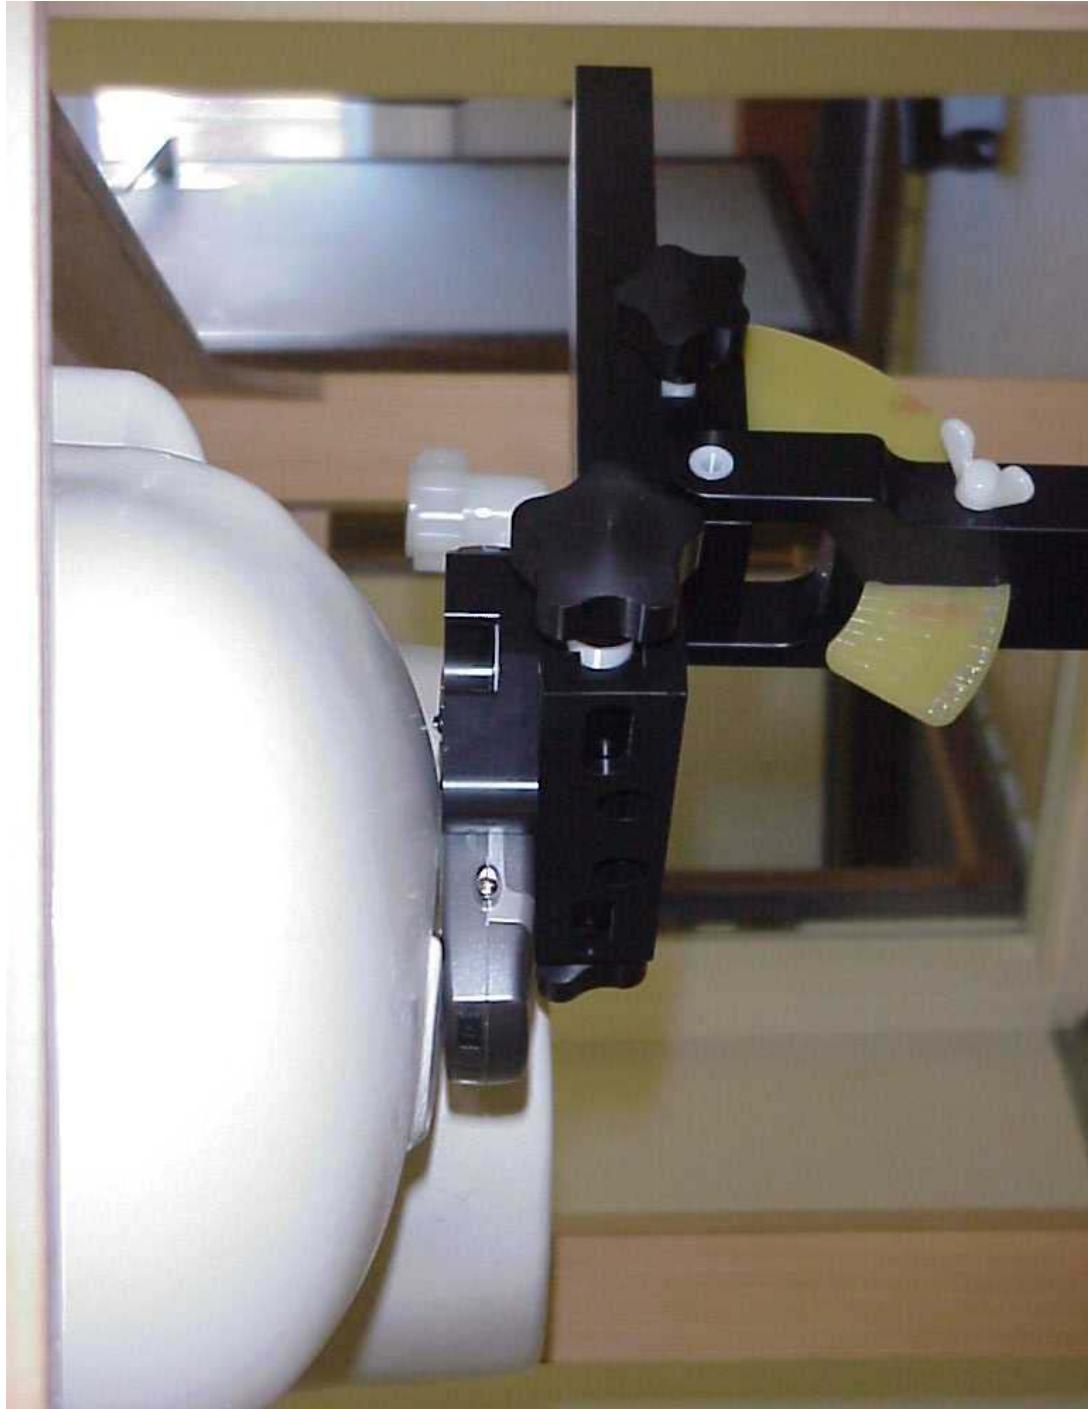


Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/011 Left view of tilted position.

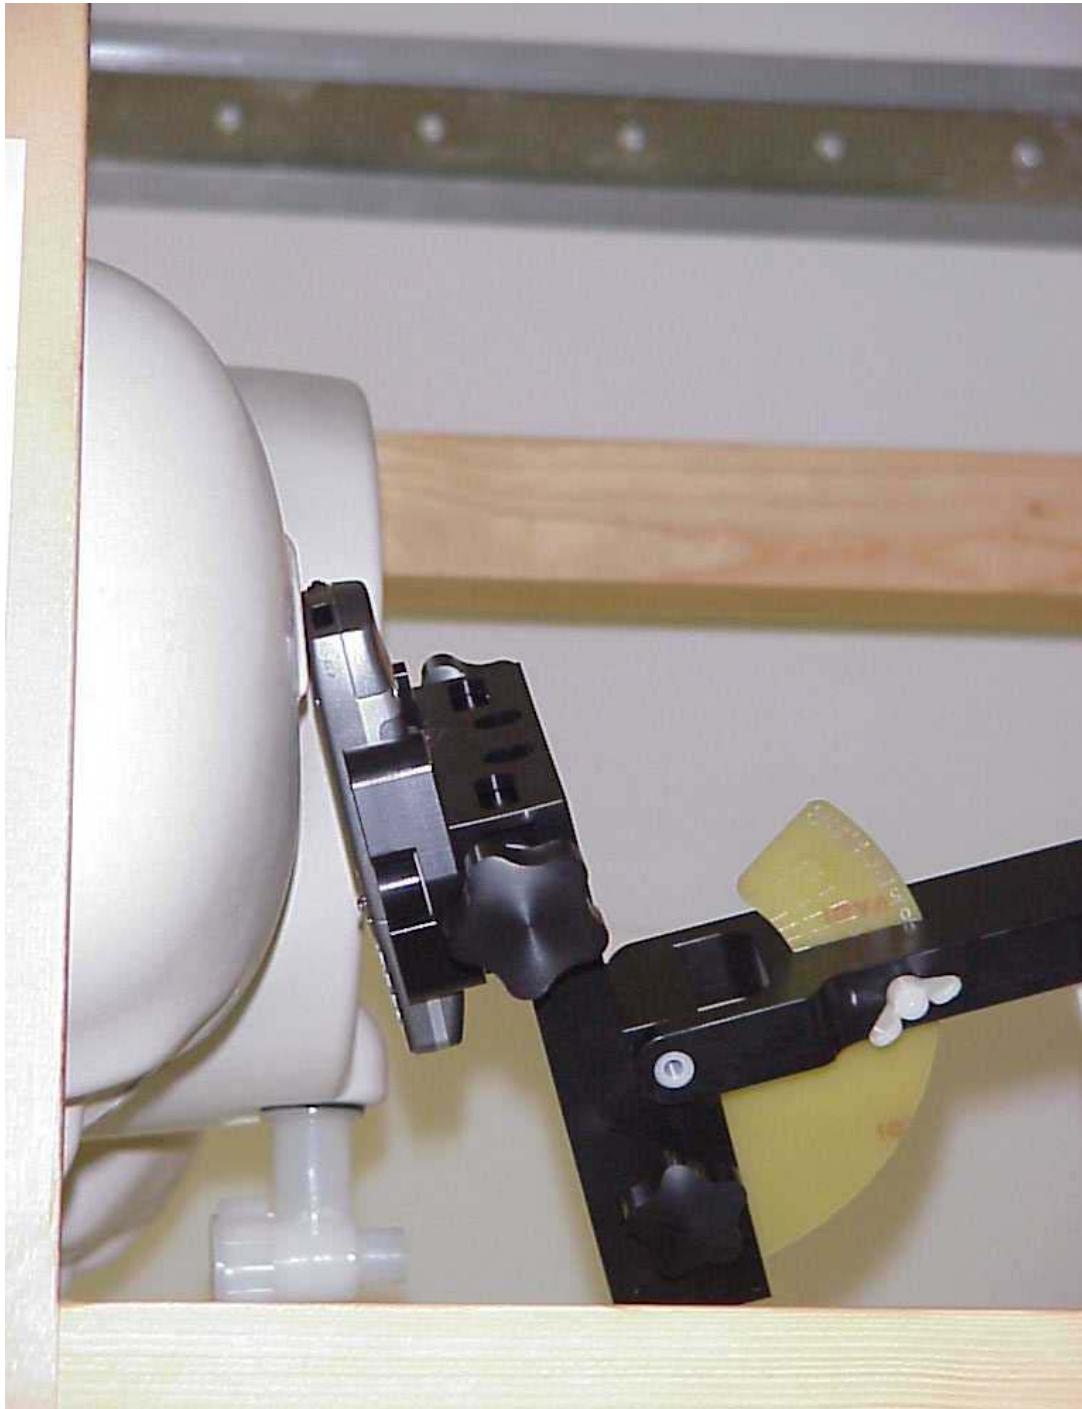

Operations Department

Test Of: Sendo Ltd.
Z100 Tri-Band Mobile Phone
To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/012 Right view of tilted position.



Operations Department

Test Of: Sendo Ltd.

Z100 Tri-Band Mobile Phone

To: OET Bulletin 65 Supplement C (2001-01)

PHT/43987JD02/013 Fluid Level.

