

MEASUREMENT/TECHNICAL REPORT

**Company: General Sensors, Incorporated
FRN: 0006564041**

**Model
WIAS2**

FCC ID: P72WIAS2

Description: This is a report to support a request for an original grant of equipment authorization.

Equipment Type: Low Power Communications Device Transmitter (DXX)

Report prepared for: General Sensors, Incorporated
20 Baldwin Drive
Branford, CT 06405 USA
Phone: 203-481-2395
Fax: 203-481-2456

Report prepared by: Mairaj Hussain
Curtis-Straus LLC
527 Great Road
Littleton, MA 01460 USA
Phone: 978-486-8880
FAX: 978-486-8828

Introduction

This report is an application for Certification of a Transmitter operating pursuant to 47 CFR 15.231. The model number covered by this report is WIAS2. This report is designed to demonstrate the compliance of these devices with the requirements outlined in 47 CFR Part 15 using the methods outlined in 47 CFR Part 2.

| EUT Configuration | | | | |
|----------------------------------|--|-----------|--------|----------|
| Work Order: | C0157 | | | |
| Company: | General Sensors | | | |
| Company Address: | 20 Baldwin Drive Branford, CT 06405 | | | |
| Contact: | Don Hudson | | | |
| Person(s) Present: | None | | | |
| MN | SN | | | |
| EUT: WIAS2 | - | | | |
| EUT Description: | Wireless water intrusion sensor. The WIAS2 is a wireless sensor is designed for early detection of water. It is for indoor use only. | | | |
| EUT Max Frequency: | 418 MHz | | | |
| Attenuator values for Tx: | R1 = 910 ohm, C1 = 62 ohm | | | |
| Support Equipment: | MN | SN | | |
| None | | | | |
| EUT Cables: | Qty | Shielded? | Length | Ferrites |
| None | | | | |
| Unpopulated EUT Ports: | Qty | Reason | | |
| None | | | | |

Statement of Conformity

The WIAS2 has been found to conform with the following parts of the 47 CFR as detailed below:

Applicable FCC part 15C section: **15.231 Periodic operation in the band 40.66 – 40.70 MHz and above 70 MHz.**

| Part 2 | Part 15 | Comments |
|--------|-------------------|---|
| | 15.15(b) | The product contains no user accessible controls that increase transmission power above allowable levels. |
| 2.925 | 15.19 | The label will be made from maylor and it will be attached with permanent adhesive. A sample label is shown in the label exhibit. |
| | 15.21 | Information to the user is shown in the instruction manual exhibit. |
| | 15.27 | No special accessories are required for compliance. |
| | 15.207 | The unit is DC powered without the capability of being operated from the AC mains. |
| | 15.231 a(1) | See WIAS2 Operation Under Section 15.231 |
| | 15.231 a(2) | See WIAS2 Operation Under Section 15.231 |
| | 15.231 a(3) | See WIAS2 Operation Under Section 15.231 |
| | 15.231 a(4) | Not employed for radio controlled purposes. See WIAS2 Operation Under Section 15.231 |
| | 15.231 b(1)(2)(3) | See attached data tables. |
| | 15. 231 c | See attached graphs of the bandwidth |
| | 15.231 d | NA. Transmitter operates at 418 MHz. |
| | 15.231 e | Satisfies paragraph b through d |

Test Methodology

Radiated emission testing was performed according to the procedures in ANSI C63.4 (1992). The testing was performed at an antenna to EUT distance of 3 or 1 meter(s) below 30MHz and a distance of 10m above 30MHz. The actual test distance used is noted in the test data sheets. The device's performance was investigated to 5 GHz. Since the device is installed in one orientation, the emissions were maximized around the vertical axis and the maximum reading was recorded. The integrated antenna cannot be maximized separately.

All other performance tests were made in accordance with the procedures outlined in Part 15 of CFR 47. The applicable sections provided under Part 15 are provided in the measurement section of this report.

Test Facility

Curtis-Straus LLC

All testing for the range 9kHz–5000MHz was performed at Curtis-Straus (A2LA Certificate Number 1627-01). The open area test site used to collect the radiated data is located at 527 Great Road, Littleton, MA 01460. Site "T" was used.

Test Equipment Used

| SPECTRUM ANALYZERS | | | | | |
|---------------------------|------------------------------|------------------|----------------|-------------------|------------------------|
| x | Analyzer | Model No. | Company | Serial No. | Calibration Due |
| x | GREEN 9kHz-26.5GHz | 8593E | HP | 3829A03618 | 04-OCT-2002 |

| OPEN AREA TEST SITES (OATS) | | | | | |
|------------------------------------|---------------------|-----------------|----------------|------------------|------------------------|
| x | Site | FCC Code | IC Code | VCCI Code | Calibration Due |
| x | “T” Texas | 93448 | IC 2762-T | R-905/ C-480 | 09-SEP-2002 |

| ANTENNAS | | | | | |
|-----------------|-----------------------------------|------------------|----------------|-------------------|------------------------|
| x | Antenna | Model No. | Company | Serial No. | Calibration Due |
| x | GREEN Bilog: 30MHz-2GHz | CBL6112B | Chase | 2742 | 26-JAN-2003 |
| x | ORANGE Horn: 1-18GHz | 3115 | EMCO | 0004-6123 | 27-MAY-2003 |

| PREAMPLIFIERS | | | | | |
|----------------------|--------------------------------|------------------|----------------------|-------------------|------------------------|
| x | Preamplifier | Model No. | Company | Serial No. | Calibration Due |
| x | GREEN 0.01-2000MHz | ZFL-1000-LN | MiniCircuits/ C-S | n/a | 22-MAR-2003 |
| x | ORANGE-BLACK 1-20GHz | SMC-12A | MITEQ | 690639 | 06-AUG-2002 |

Unless otherwise noted the calibration interval is one year. All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

WIAS2 Operation Under Section 15.231

- Manual operation of the unit occurs when the unit is initially installed and tested. Pushing the test button activates the transmission for 453ms and transmission is terminated automatically.
- Automatic transmission occurs every 9 hours when unit "checks-in" with its status. The duration of automatic transmissions is 453ms.
- Periodic Operation, the unit is part of a safety/security system and transmits supervisory signals to insure system integrity. Periodic rate of transmission does not exceed one second per hour for each transmissions.
- Transmissions during alarm conditions. The Tx time limits are waived as indicated in section 15.231. The duration of transmission is 1.4s and it is repeated once every 15 minutes until cleared.

Measurement Results

Operating Frequency

This device operates at 418MHz.

Electric Field Strength Radiation Measurements

Limit calculation at fundamental and spurious:

Limit at 418 MHz from table in 15.231 b = 80.1 dbuV/m

Averaging factor was calculated as:

| | |
|--|------------------------------|
| Max numbers of bits in 100 ms | = 23 |
| no of high in 100 ms | = 12 |
| Averaging factor | = $20 \log (23/12)$ |
| | = 5.6 db |
| Adjusted Limit at fundamental | = $5.6 + 80.1 = 85.7$ dbuV/m |
| Limit used for harmonics | = $60.1 + 5.6 = 65.7$ dbuV/m |
| Limit used for other spurious frequencies: | = 60.1 dbuV/m |

Radiated Emissions Table

Curtis-Straus LLC


| Date: 05-Mar-02 | | Company: General Sensors | | Table 1 | | | | | | | |
|---|--------------------|--------------------------|--------------------------|------------------------------|-------------------------|------------------------|---------------------------------------|----------------|--|--|-------------------------|
| Engineer: EG & MH | | EUT Desc: WIAS2 | | Work Order: C0157 | | | | | | | |
| Frequency Range: 30-2000MHz | | | | Measurement Distance: 3 m | | | | | | | |
| Notes: fundamental, harmonics, and spurious | | | | EUT Max Freq: 418MHz | | | | | | | |
| Antenna Polarization (H / V) | Frequency (MHz) | Reading (dB μ V) | Preamp Factor (dB) | Antenna Factor (dB/m) | Cable Factor (dB) | Avg. Factor (dB) | Adjusted reading (dB μ V/m) | | | | FCC Part 15 Sec. 231 |
| /pk (no preamp) | 418.0 | 57.6 | 0.0 | 16.8 | 2.4 | 5.6 | 71.2 | | | | Limit (dB μ V/m) |
| Vpk | 836.0 | 33.0 | 21.3 | 21.1 | 3.9 | 5.6 | 31.1 | | | | Margin (dB) |
| Vpk | 1254.0 | 19.3 | 21.3 | 23.0 | 5.1 | 5.6 | 20.5 | | | | Result (Pass/Fail) |
| Vpk | 1672.0 | 18.6 | 18.7 | 25.7 | 6.2 | 5.6 | 26.2 | | | | |
| Table Result: Pass by -8.9 dB | | | | Worst Freq: 418.0 MHz | | | | | | | |
| Test Site: "T" | | Pre-Amp: Green | | Cable: 65 ft RG8A/U | | Analyzer: Green | | Antenna: Green | | | |

Radiated Emissions Table

Curtis-Straus LLC

| Date: 05-Mar-02 | | Company: General Sensors | | Table 2 | | | | | | | | |
|---------------------------------------|--------------------|--------------------------|--------------------------|-------------------------------|-------------------------|------------------------|---------------------------------------|----------------------|-----------------------|-------------------------|----------------|-----------------------|
| Engineer: EG & MH | | EUT Desc: WIAS2 | | Work Order: C0157 | | | | | | | | |
| Frequency Range: 2-5GHz | | | | Measurement Distance: 3 m | | | | | | | | |
| Notes: harmonics, and spurious | | | | EUT Max Freq: 418MHz | | | | | | | | |
| Antenna Polarization (H / V) | Frequency (MHz) | Reading (dB μ V) | Preamp Factor (dB) | Antenna Factor (dB/m) | Cable Factor (dB) | Avg. Factor (dB) | Adjusted Reading (dB μ V/m) | Margin (dB) | Result (Pass/Fail) | Limit (dB μ V/m) | Margin (dB) | Result (Pass/Fail) |
| nf | 2090.0 | 26.8 | 24.5 | 29.4 | 2.1 | 5.6 | 28.2 | | | 60.1 | -31.9 | Pass |
| nf | 2508.0 | 26.9 | 24.4 | 30.6 | 2.4 | 5.6 | 29.9 | | | 60.1 | -30.2 | Pass |
| nf | 2926.0 | 27.6 | 24.4 | 31.2 | 2.6 | 5.6 | 31.4 | | | 60.1 | -28.7 | Pass |
| nf | 3344.0 | 27.3 | 24.3 | 32.3 | 3.0 | 5.6 | 32.7 | | | 60.1 | -27.4 | Pass |
| nf | 3762.0 | 28.1 | 24.2 | 33.6 | 3.4 | 5.6 | 35.3 | | | 60.1 | -24.8 | Pass |
| nf | 4180.0 | 27.5 | 24.2 | 34.2 | 3.6 | 5.6 | 35.5 | | | 60.1 | -24.6 | Pass |
| Table Result: Pass by -18.9 dB | | | | Worst Freq: 4180.0 MHz | | | | | | | | |
| Test Site: "T" | | Pre-Amp: Or-Blk | | Cable: 3m Microflex | | Analyzer: Green | | Antenna: Orange Horn | | | | |

Emissions Plots

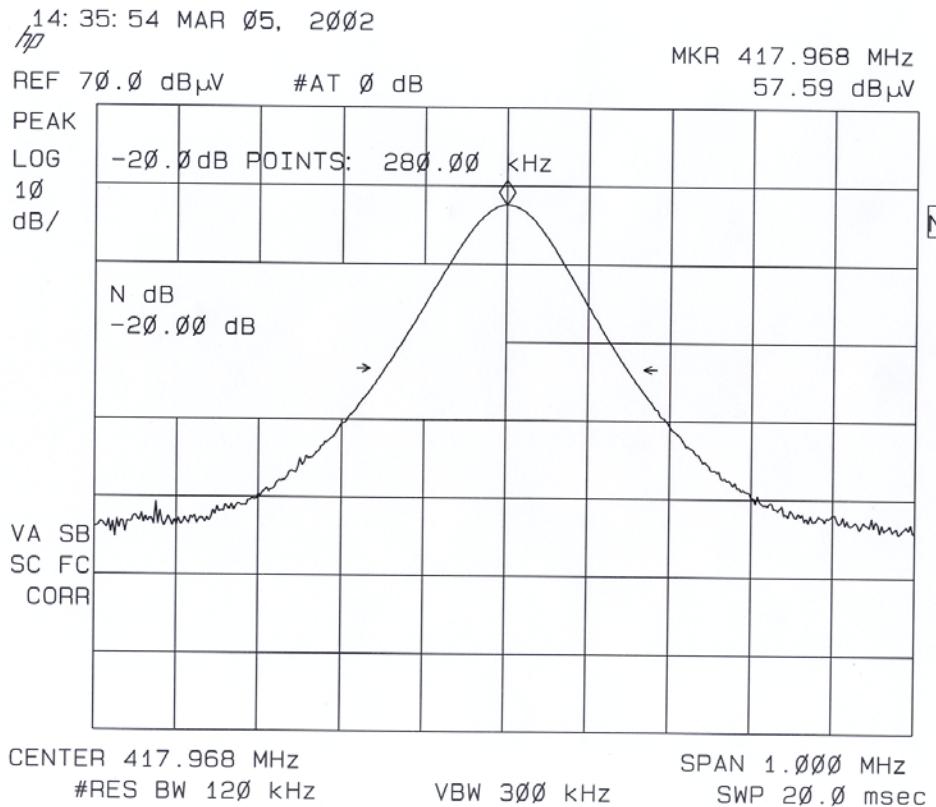

User
Menus

N dB PTS
ON OFF

% AM
ON OFF

TOI
ON OFF

Power
Menu

FFT
Menu

Fundamental

$$\begin{aligned} 20 \text{ db Bandwidth} &= 280.0 \text{ KHz} \\ \text{Limit} &= 418 \text{ MHz} * 0.0025 = 1,045 \text{ KHz} \end{aligned}$$