


General

The GM-200 is a GMRS, UHF transceiver which is held to the face for transmitting with output power less than 1 Watt. Per table 1 of 1.1307, paragraphs 1.1310 and 2.1093 of CFR 47, evaluation for this device is as follows. Due to the location of the antenna, normal operating conditions and use, the unit will satisfy the requirements for RF Exposure. Calculations are made here for completeness.

SPECIFIC ABSORPTION RATE CALCULATION

Calculations per 2.1093 of CFR 47.

These calculations are based upon a typical human figure as approximated below. The height is 5' 8" (173 cm.) and the weight is 160 lbs. (72.6kg).

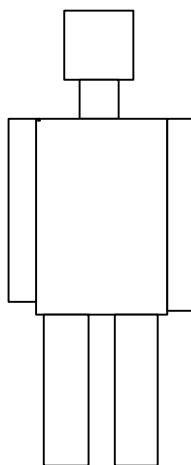

The calculated absorption cross section for this figure is 143 cm squared.

CALCULATED OCCUPATIONAL / CONTROLLED POPULATION SAR

$$S = PG/(4\pi R^2)$$

Where S = power density in mw/cm^2

P = input power to antenna in mw .

G = power gain of antenna

R = distance from antenna in cm .

For a minimum distance of 5 centimeters and 1.0 watts (1000 mW) operation with the supplied antenna, S is:

$$S = 1000/(4\pi(5)^2) = 3.1831 \text{ mw}/\text{cm}^2$$

For a body cross sectional area of 143 cm squared, $(3.1831)(143) = 455.18 \text{ mw}$ is absorbed.

For a body mass of 72.6 kg, this is $455.18/72.6 = 6.27 \text{ mw/kg} = 0.006 \text{ w/kg}$

This is well within the 0.4 w/kg limit prescribed for controlled exposure and below uncontrolled exposure limit of 80 mw/kg as prescribed by CFR 47 paragraph 2.1093.

ROGERS LABS, INC.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214

MAXTRYCOM Co. LTD
MODEL: GM-200
Test #: 020215 FCCID#: P79 GM-200
Test to: FCC Parts 2 and 95
Page 1 of 1
GM200RFExp.doc 3/13/2002