



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #192	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/07/31/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	09/20/34
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 1(802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

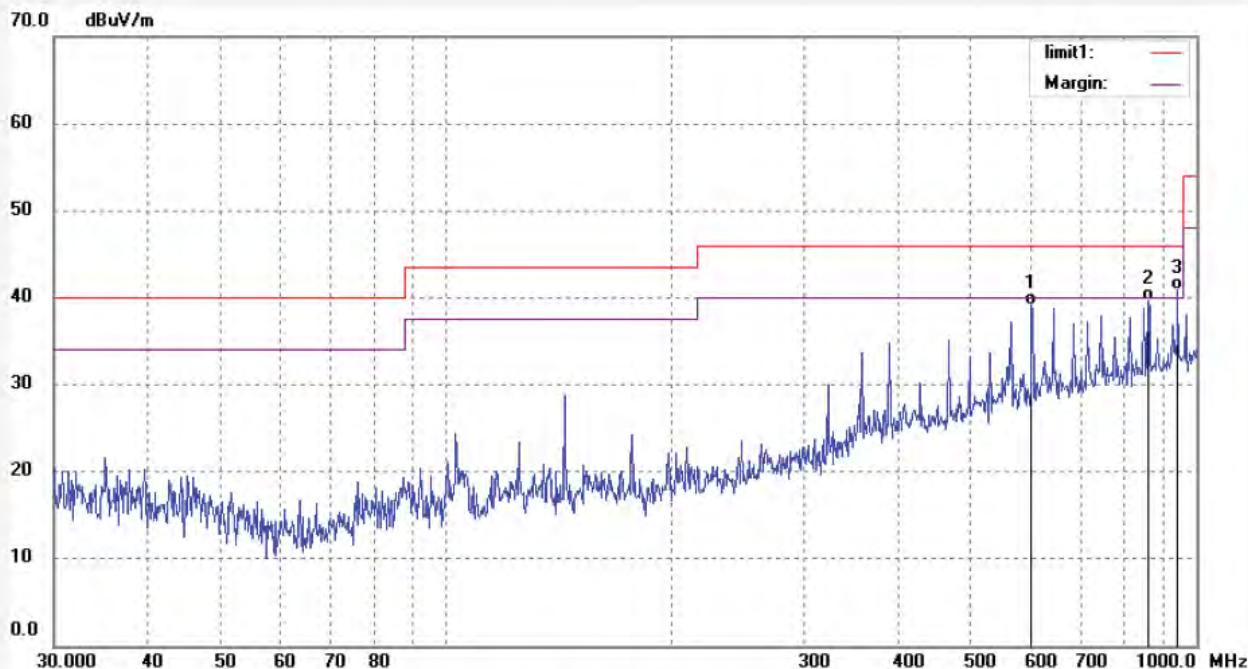

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	600.0000	13.14	25.59	38.73	46.00	-7.27	QP			
2	865.3254	10.32	28.64	38.96	46.00	-7.04	QP			
3	946.5423	11.24	29.46	40.70	46.00	-5.30	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #193

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 09/27/18

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11b)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

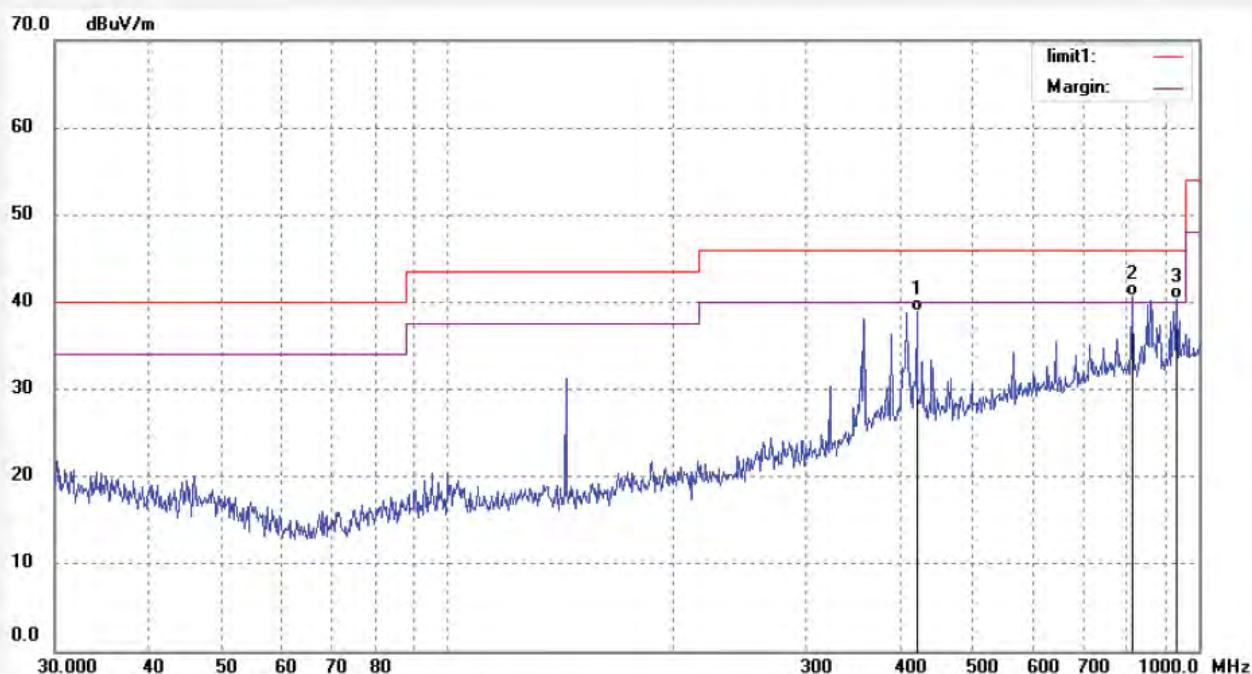

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	420.1425	14.78	23.16	37.94	46.00	-8.05	QP			
2	820.3345	11.25	28.02	39.27	46.00	-6.73	QP			
3	936.4587	10.82	29.26	40.27	46.00	-5.92	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #194

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 09/33/35

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUIT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

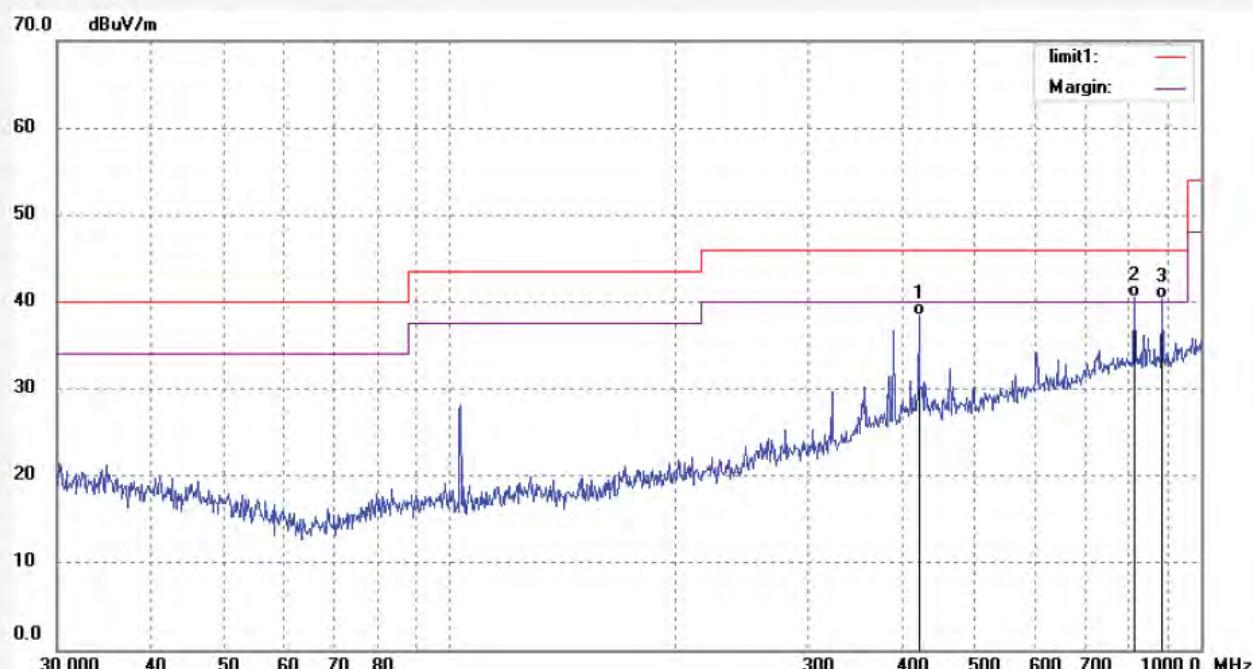

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	420.3245	15.21	23.16	38.37	46.00	-7.63	QP			
2	817.6782	12.32	28.02	40.34	46.00	-5.66	QP			
3	890.3286	1160	28.77	40.37	46.00	-5.63	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #195

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 09/42/18

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

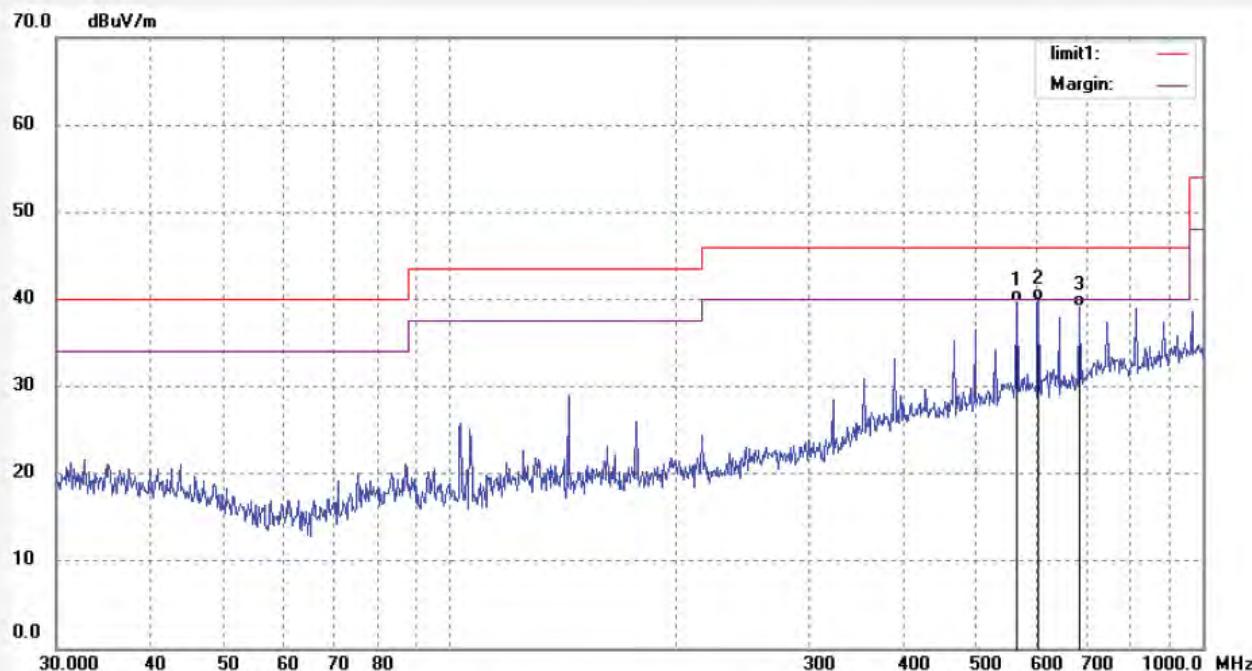


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	565.9776	13.29	25.27	38.56	46.00	-7.44	QP			
2	605.0509	12.25	25.64	38.89	46.00	-7.11	QP			
3	686.6342	10.79	26.37	37.16	46.00	-8.84	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T#196	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 09/51/24
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

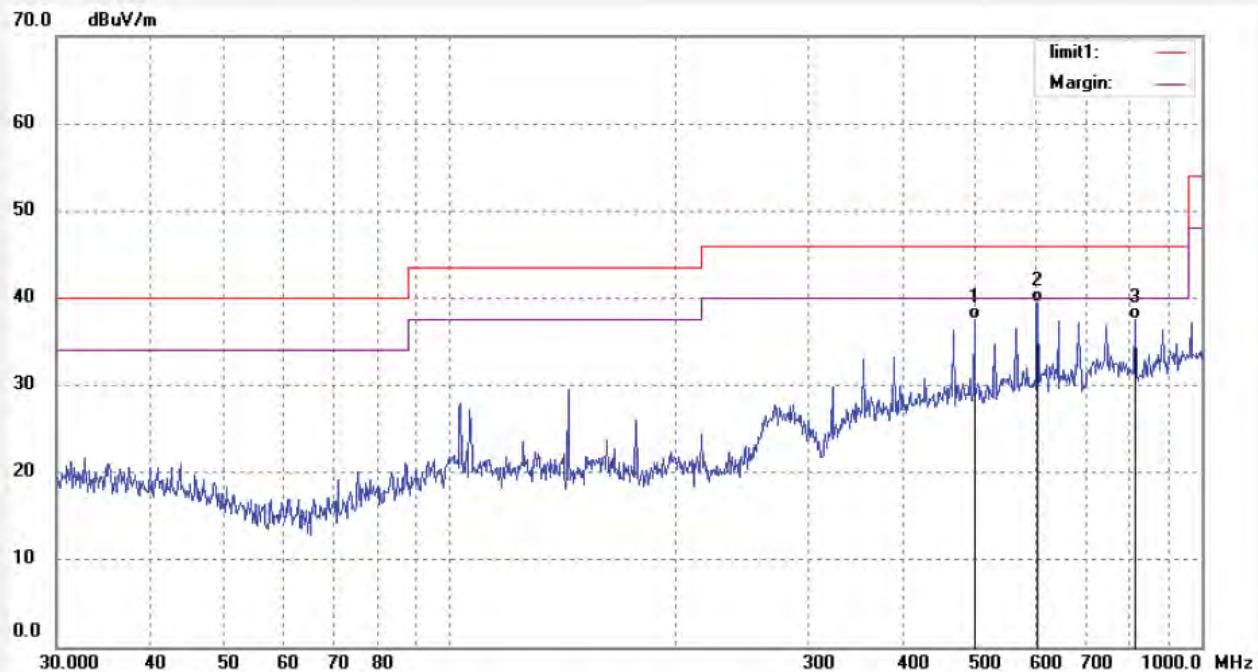


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	500.0021	13.56	23.98	37.54	46.00	-8.46	QP			
2	602.4562	13.75	25.64	39.39	46.00	-6.61	QP			
3	812.3562	9.46	28.02	37.48	46.00	-8.52	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #197	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 10/10/14
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

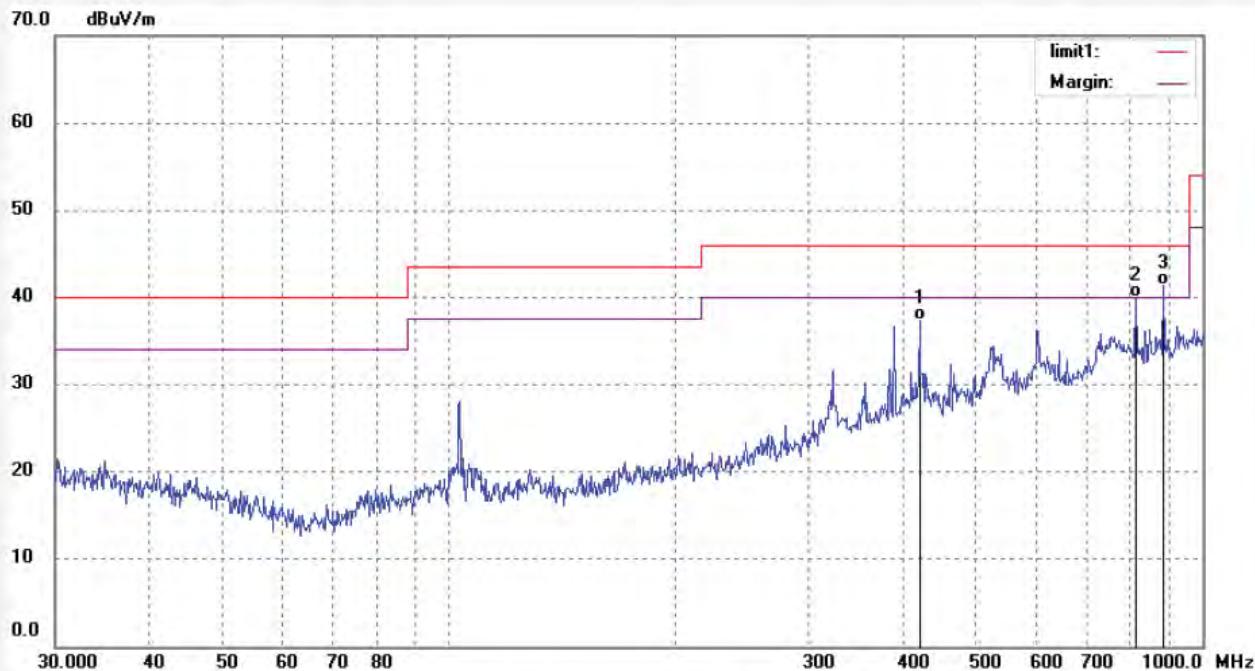

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	420.1425	13.45	23.16	36.61	46.00	-9.39	QP			
2	816.4532	11.75	28.02	39.77	46.00	-6.23	QP			
3	890.3675	12.31	28.77	41.08	46.00	-4.92	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #198

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 10/21/33

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 6(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

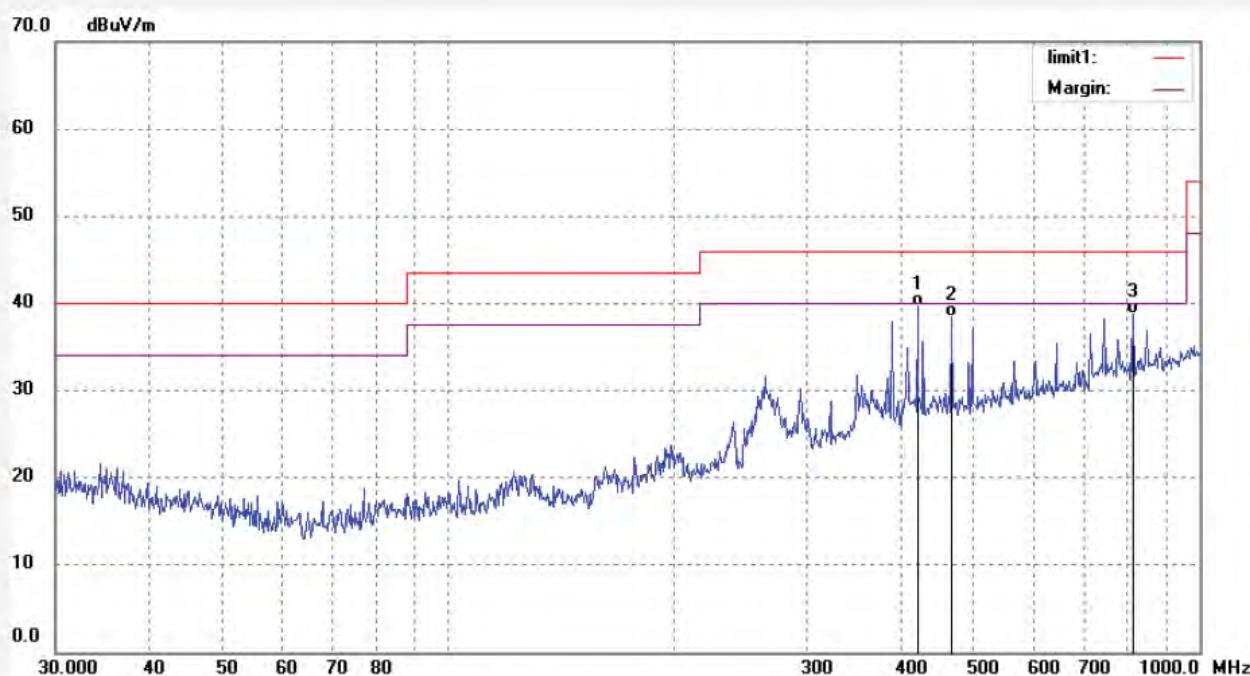


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	420.3245	14.98	23.16	38.14	46.00	-7.86	QP			
2	470.8526	14.07	23.55	37.62	46.00	-8.38	QP			
3	810.4578	10.45	28.02	38.47	46.00	-7.53	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #199	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 10/28/39
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

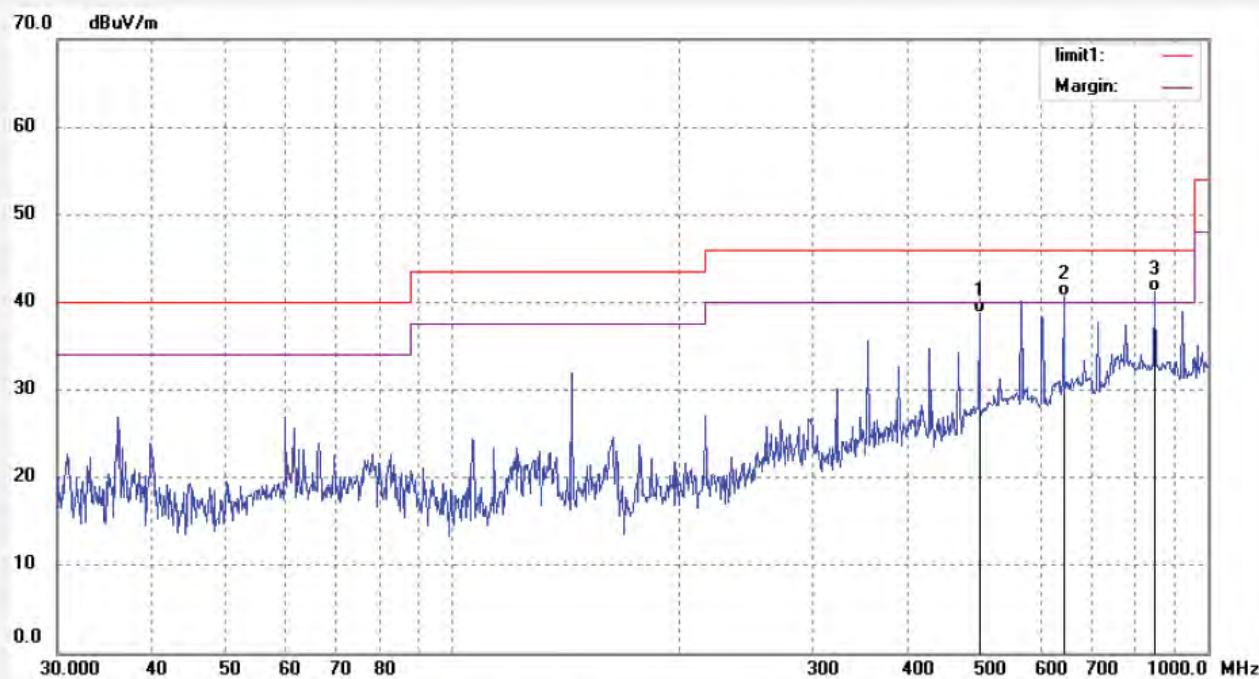

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	500.2345	14.56	23.98	38.54	46.00	-7.46	QP			
2	645.7860	14.32	26.08	40.40	46.00	-5.60	QP			
3	850.3265	12.12	28.36	40.48	46.00	-5.52	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #200

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 10/37/02

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 6(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

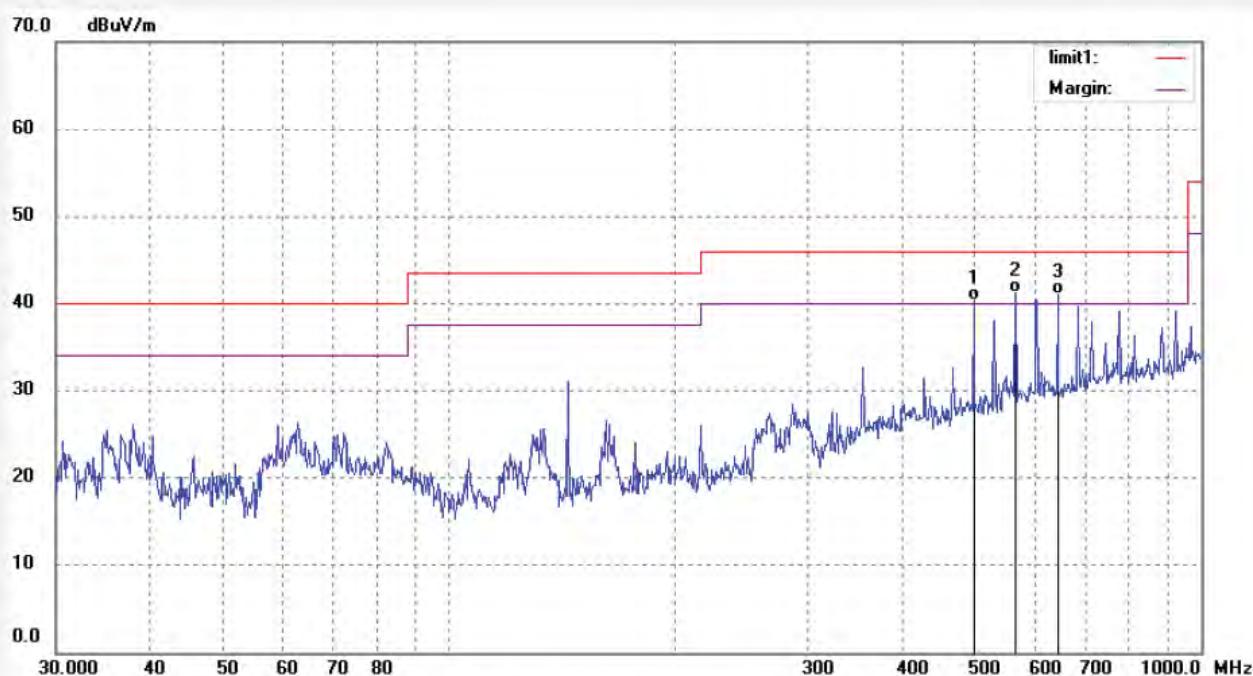

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	500.2375	15.87	23.98	39.85	46.00	-6.15	QP			
2	562.3574	15.04	25.27	40.31	46.00	-5.69	QP			
3	645.3857	14.38	26.08	40.46	46.00	-5.54	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #201

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 10/46/20

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 6(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUIT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

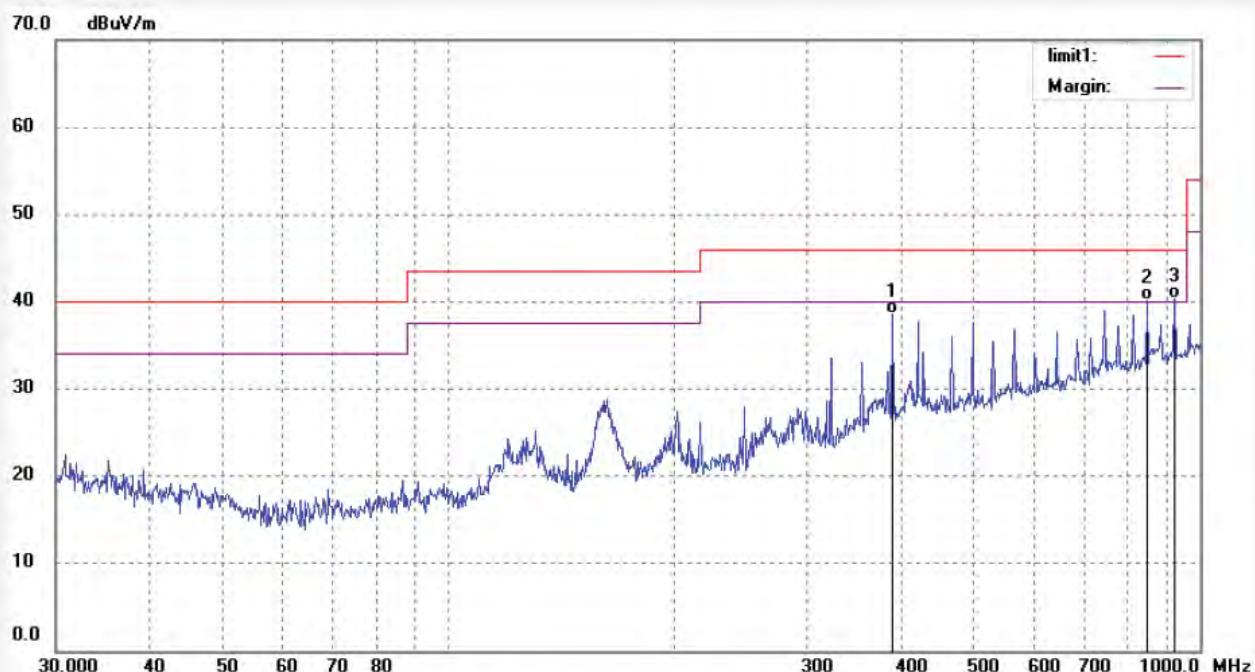

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	390.6354	16.35	21.88	38.23	46.00	-7.77	QP			
2	850.0625	11.47	28.36	39.83	46.00	-6.17	QP			
3	925.4432	11.01	29.16	40.17	46.00	-5.83	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bdg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T#202	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 10/53/08
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

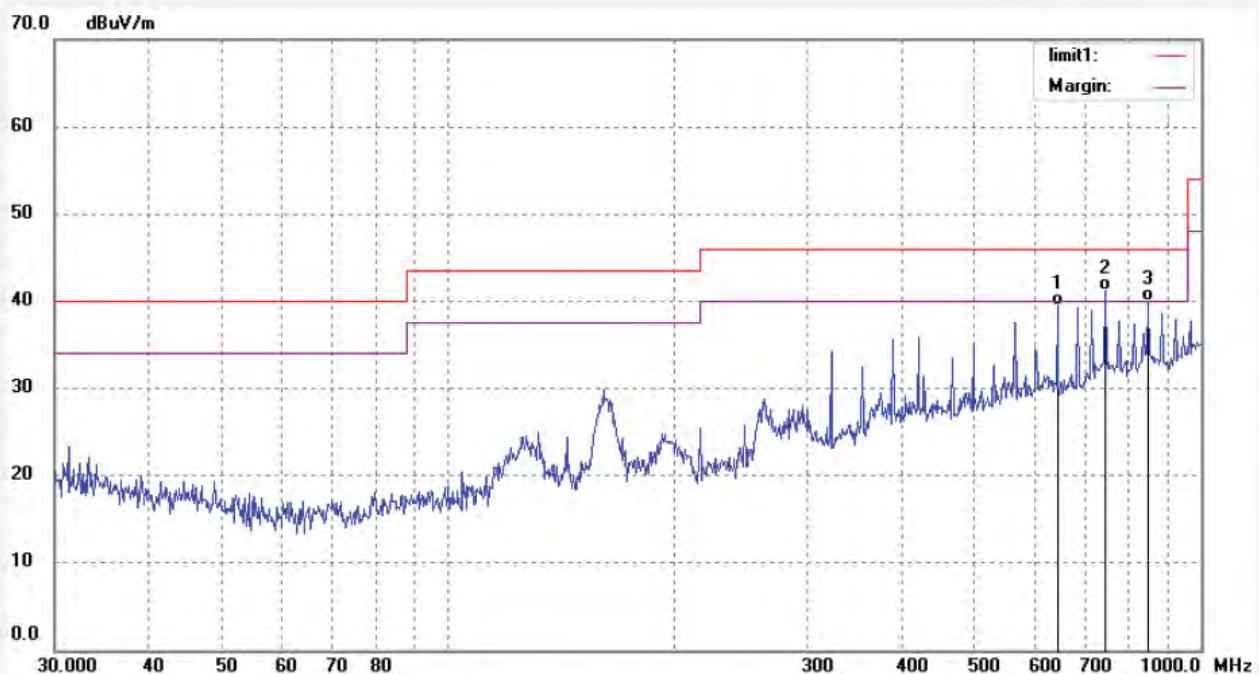


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	645.6357	13.43	26.08	39.51	46.00	-6.49	QP			
2	745.8750	13.62	27.57	41.19	46.00	-4.81	QP			
3	850.2360	11.67	28.36	40.03	46.00	-5.97	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #203	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp. (C)/Hum.(%) 25 C / 51 %	Time: 11/05/04
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

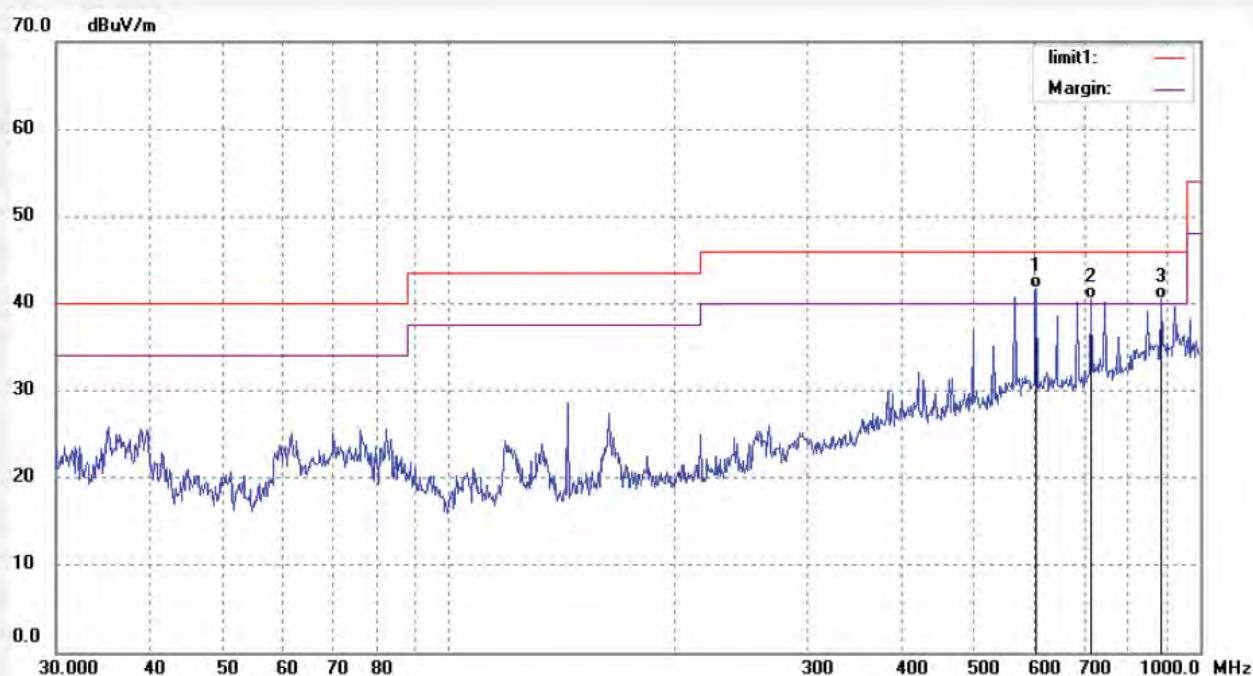

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	607.3658	16.00	25.64	41.64	46.00	-4.36	QP			
2	718.956	13.20	27.05	40.25	46.00	-5.75	QP			
3	885.6325	11.42	28.77	40.19	46.00	-5.81	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #204	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 11/12/46
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

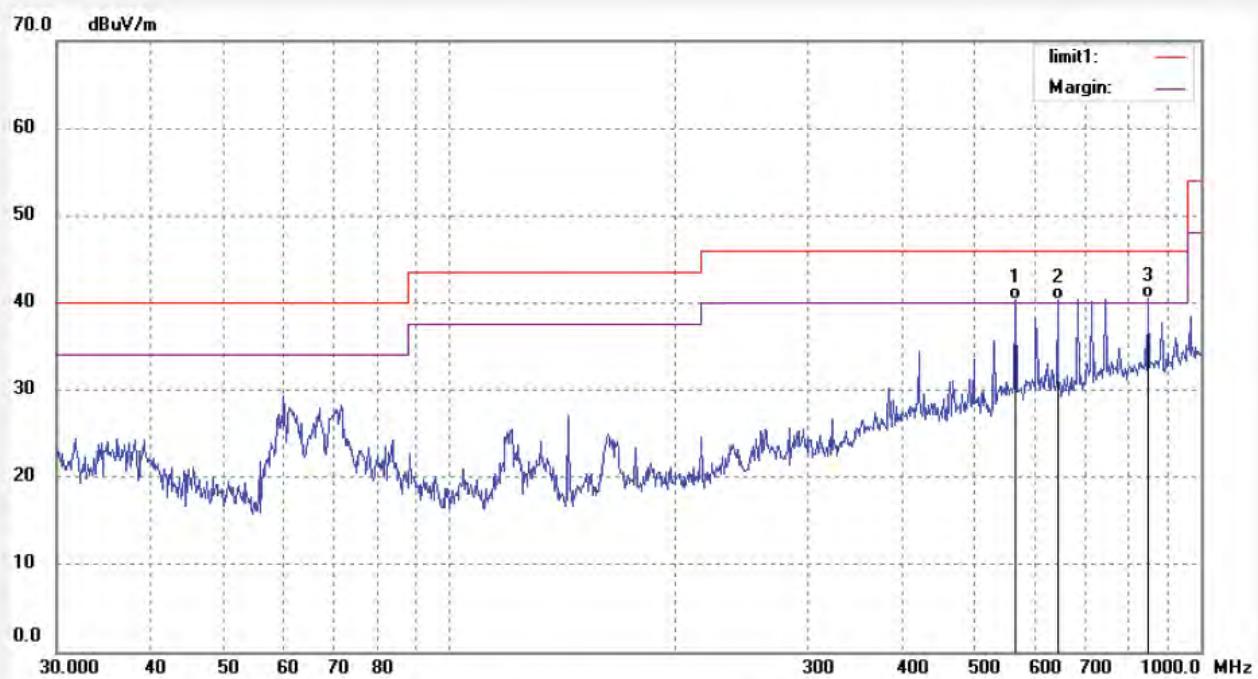


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	564.3587	15.21	25.27	40.48	46.00	-5.52	QP			
2	645.3526	14.32	26.08	40.40	46.00	-5.60	QP			
3	850.0054	12.20	28.36	40.56	46.00	-5.44	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #205	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 11/20/19
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

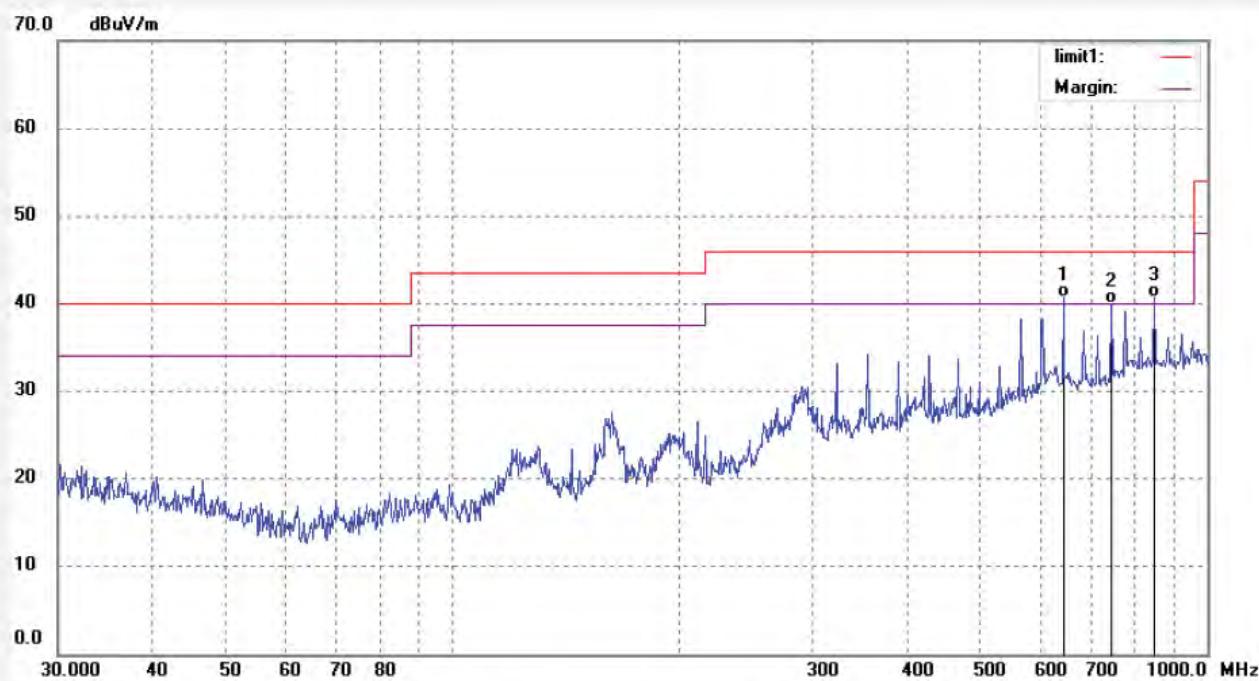

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	645.3214	13.21	26.08	39.29	46.00	-6.71	QP			
2	746.3254	12.30	27.57	39.87	46.00	-6.13	QP			
3	850.0032	12.14	28.36	40.50	46.00	-5.50	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #206

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 11/28/32

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 11(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUIT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

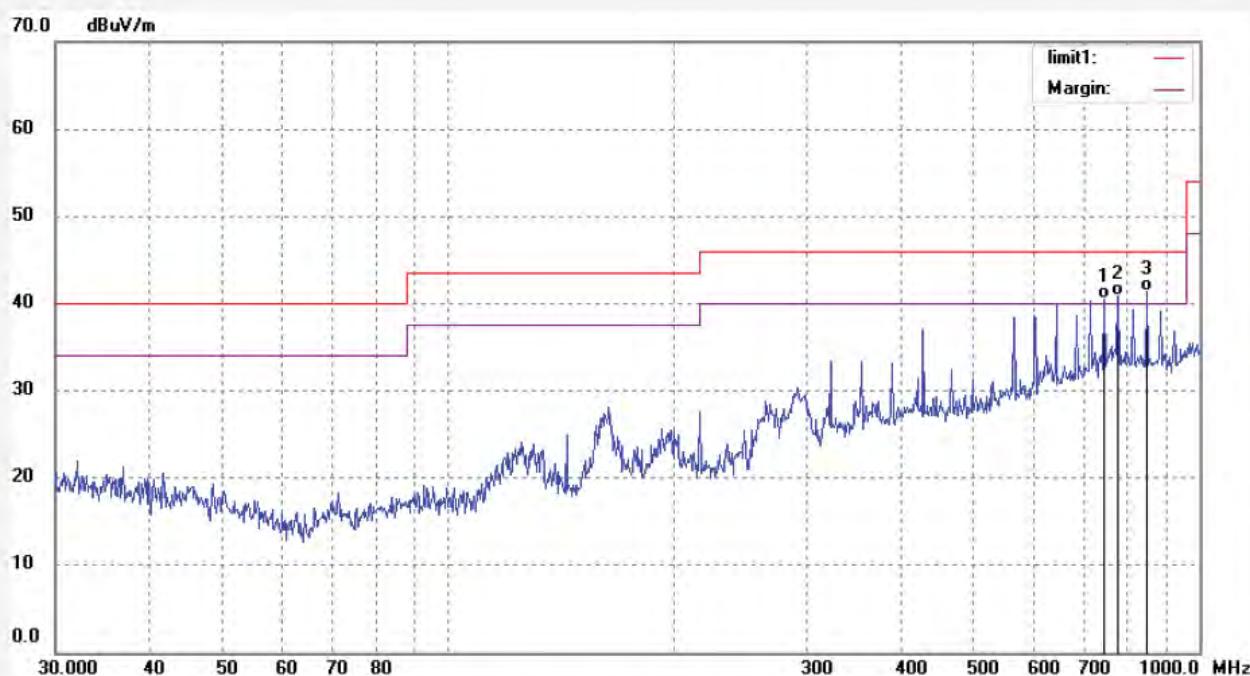


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	745.2470	13.02	27.57	40.59	46.00	-5.41	QP			
2	780.1429	13.15	27.83	40.98	46.00	-5.02	QP			
3	850.0254	13.21	28.36	41.57	46.00	-4.43	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #207	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/07/31/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	11/37/25
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 11(802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

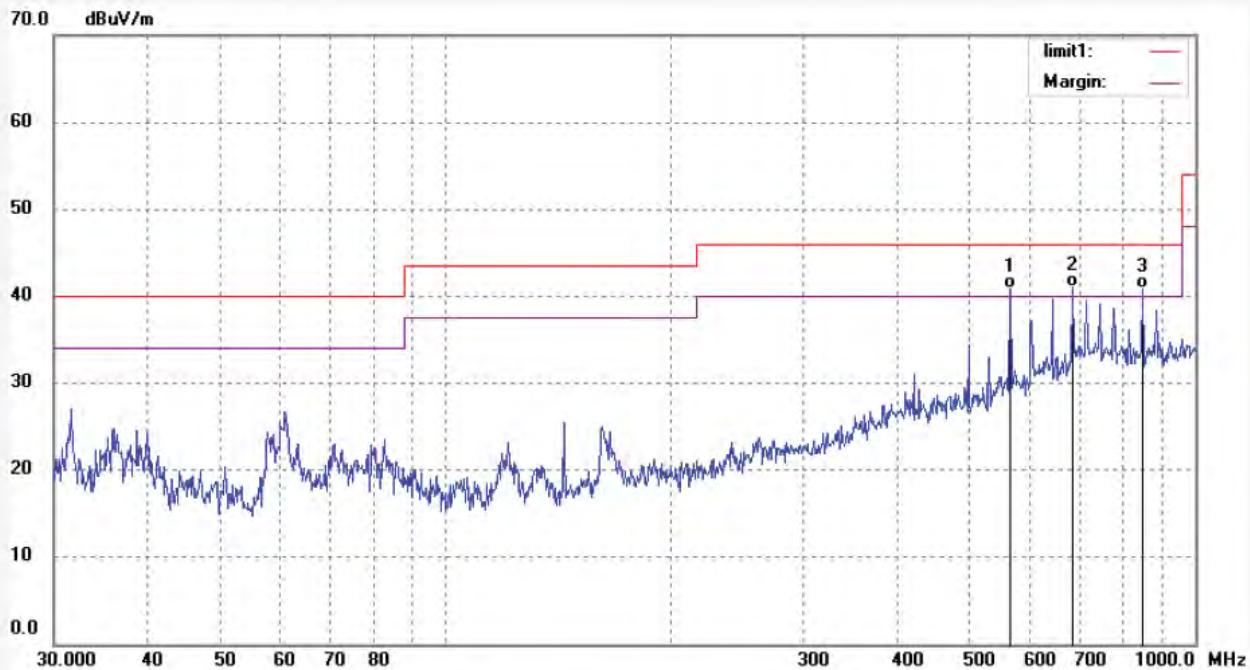

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	565.9478	15.34	25.27	40.61	46.00	-5.39	QP			
2	686.3324	14.28	26.37	40.65	46.00	-5.35	QP			
3	850.7520	12.46	28.36	40.82	46.00	-5.18	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #208

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 11/46/11

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 11(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

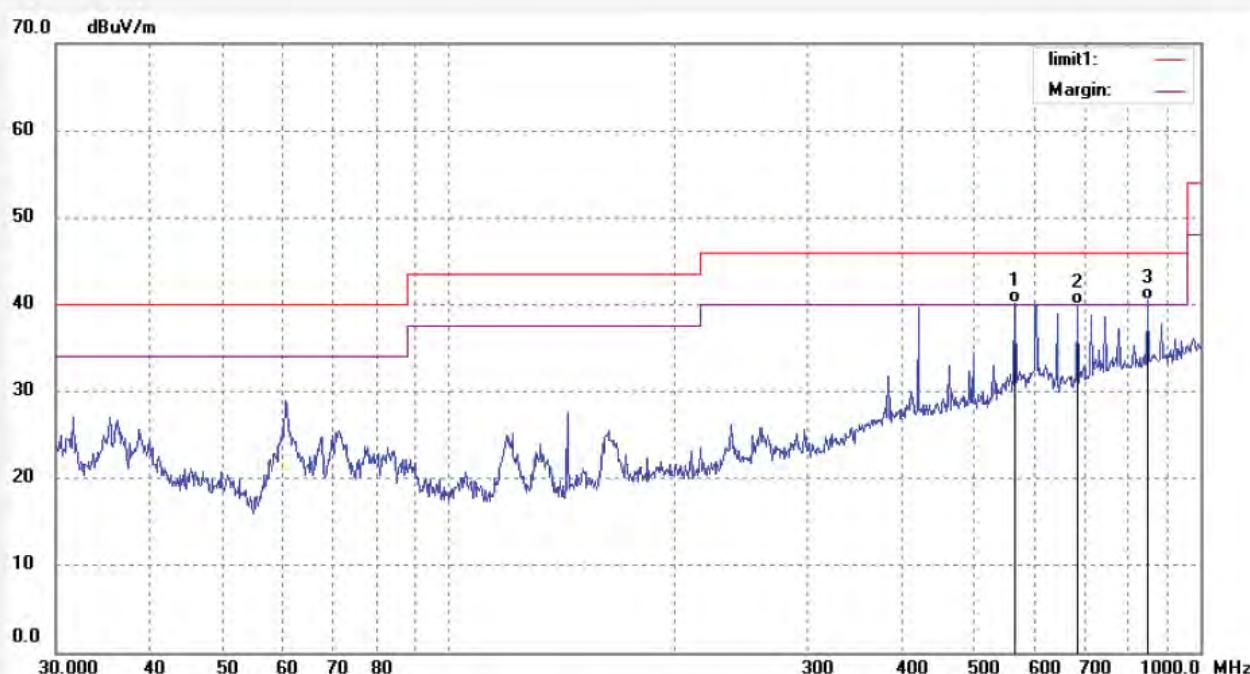


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	568.3652	13.75	25.27	39.02	46.00	-6.98	QP			
2	685.3752	13.24	26.37	39.61	46.00	-6.39	QP			
3	850.0425	12.01	28.36	40.37	46.00	-5.63	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #209	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 11/54/26
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

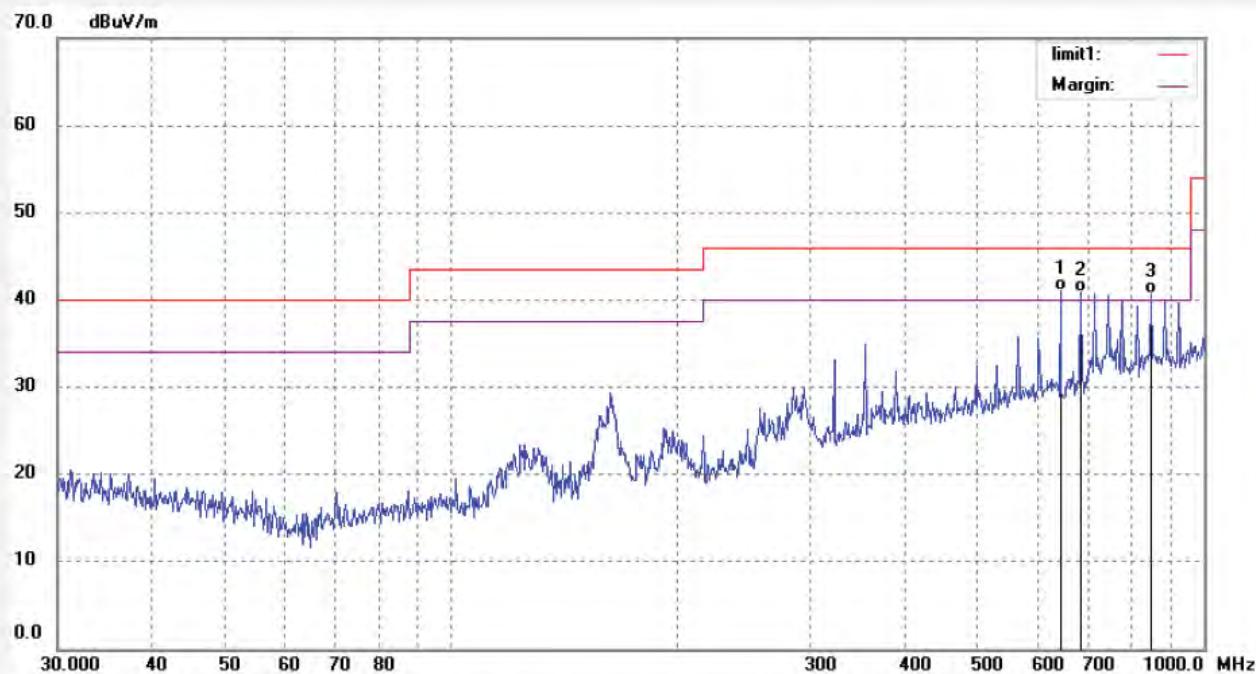


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	645.6258	14.76	26.08	40.84	46.00	-5.16	QP			
2	685.6258	14.32	26.37	40.69	46.00	-5.31	QP			
3	850.0475	12.20	28.36	40.56	46.00	-5.44	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #210	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 12/07/25
EUT: 10 inch Tablet PC	Engineer Signature:Rikcy
Mode: TX Channel 3(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

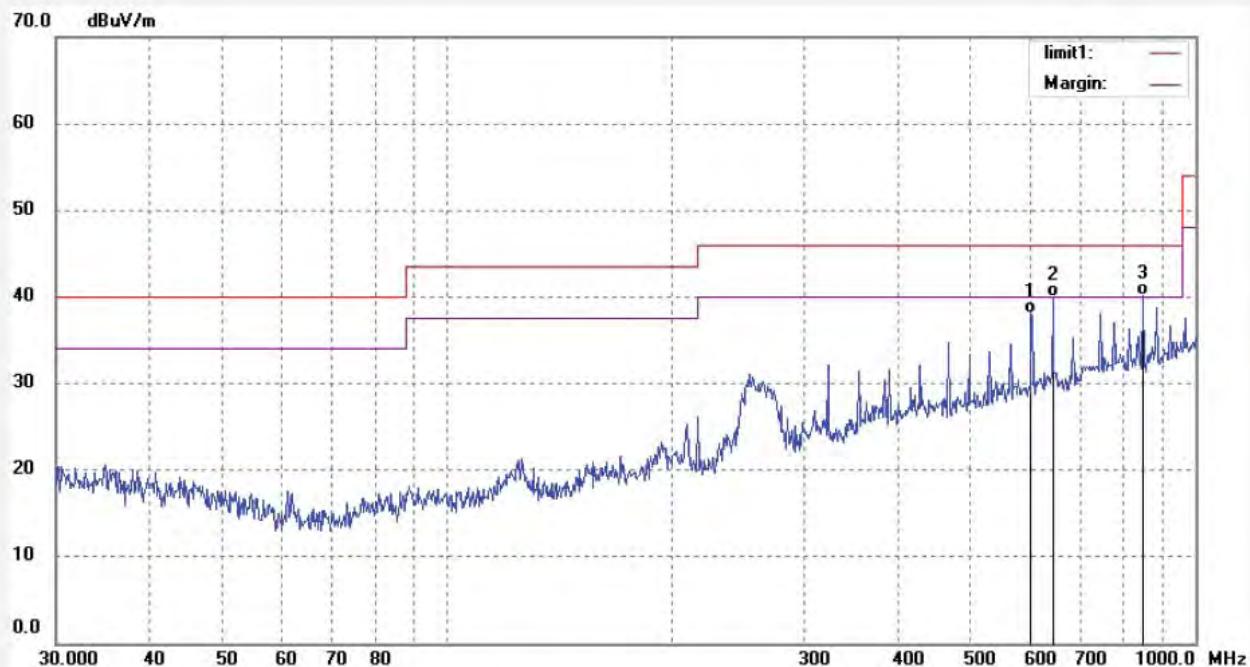


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	600.3257	11.75	25.59	37.34	46.00	-8.66	QP			
2	645.6325	14.02	26.08	40.10	46.00	-5.90	QP			
3	850.0254	11.63	28.36	39.99	46.00	-6.01	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T#211	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/07/31/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	12:17:05
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 3(802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

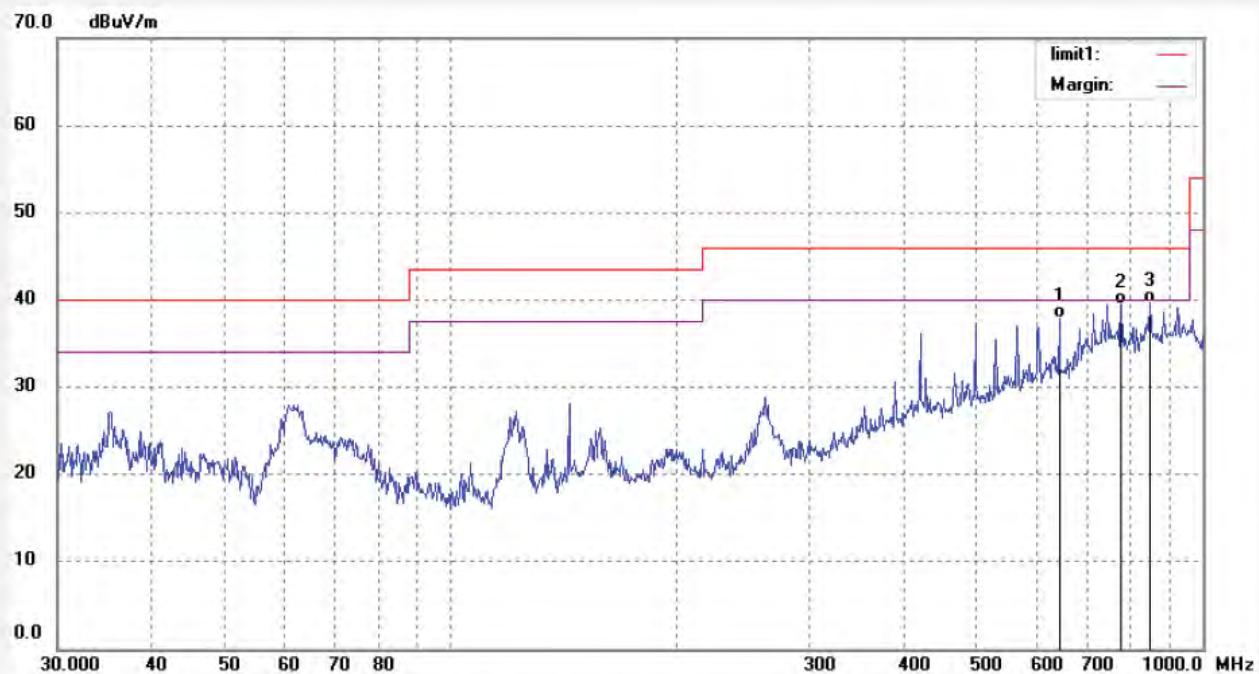


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	645.6325	11.32	26.08	37.40	46.00	-8.60	QP			
2	780.5236	11.01	27.83	38.84	46.00	-7.16	QP			
3	850.0425	10.54	28.36	38.90	46.00	-7.10	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #212	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 12:25:32
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

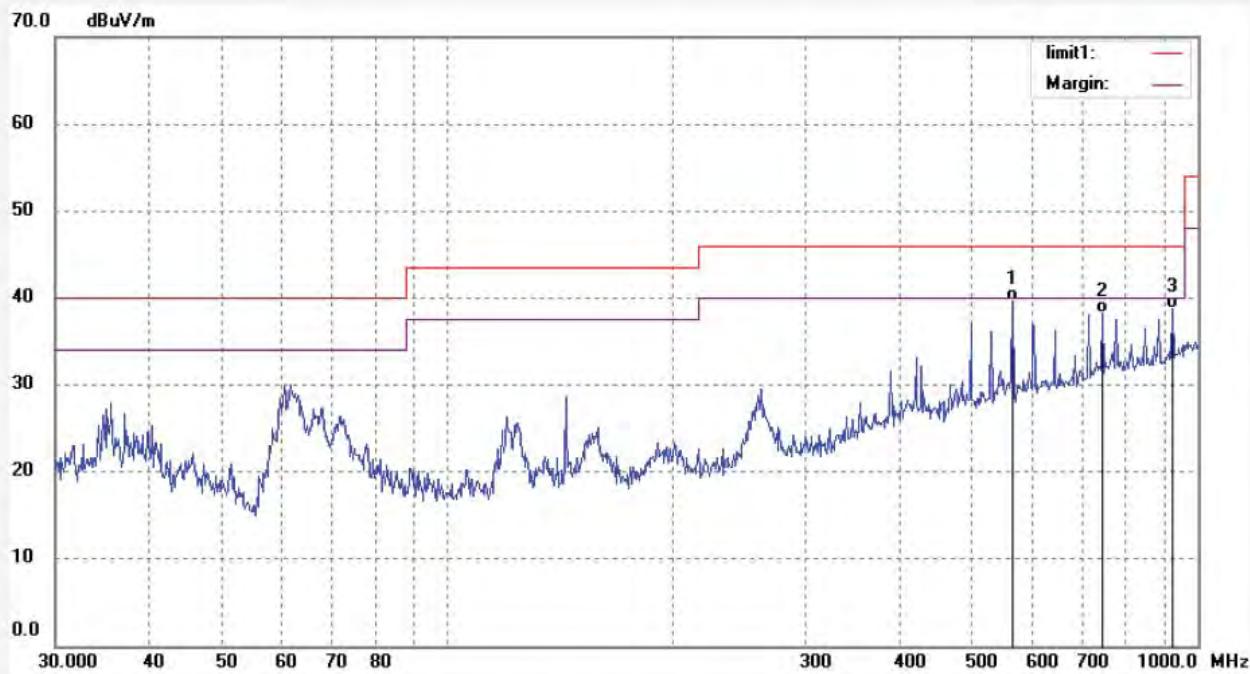


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	565.3475	14.43	25.27	39.70	46.00	-6.30	QP			
2	750.1458	10.72	27.57	38.29	46.00	-7.71	QP			
3	925.0547	9.53	29.16	38.69	46.00	-7.31	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bdg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #213	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/07/31/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 12:33:12
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

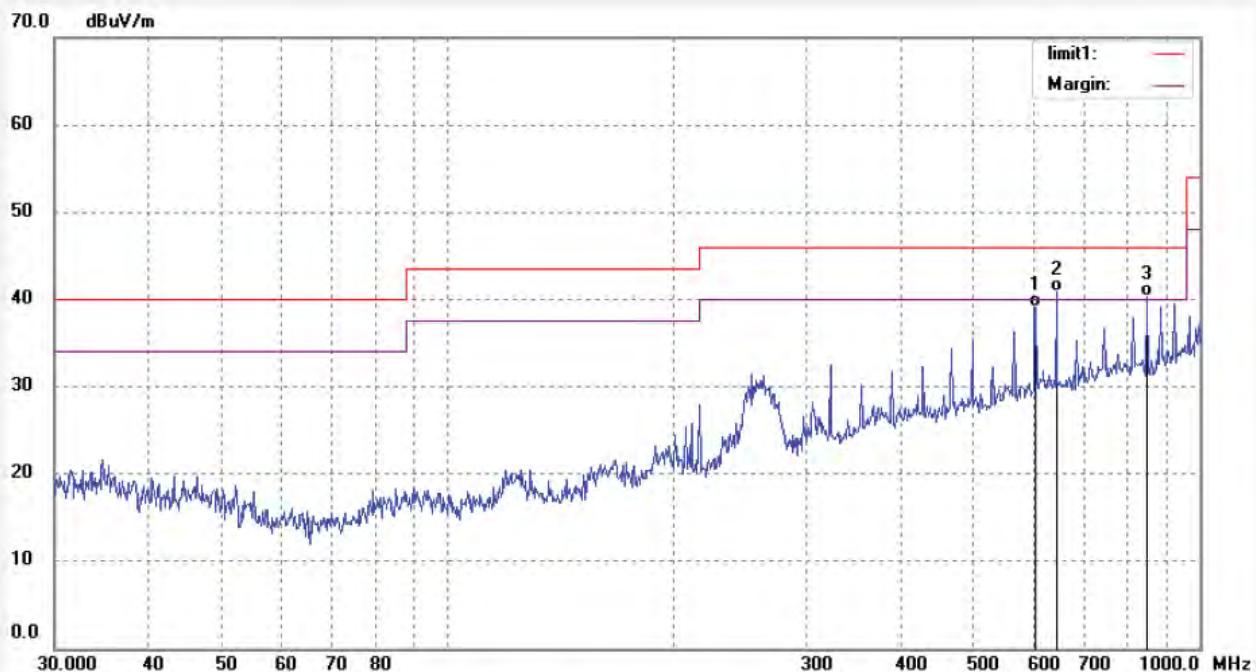

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	604.3289	13.12	25.64	38.76	46.00	-7.24	QP			
2	645.3214	14.01	26.08	40.09	46.00	-5.91	QP			
3	850.0475	11.56	28.36	39.92	46.00	-6.08	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #214

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/07/31/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 12:46:24

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 9(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

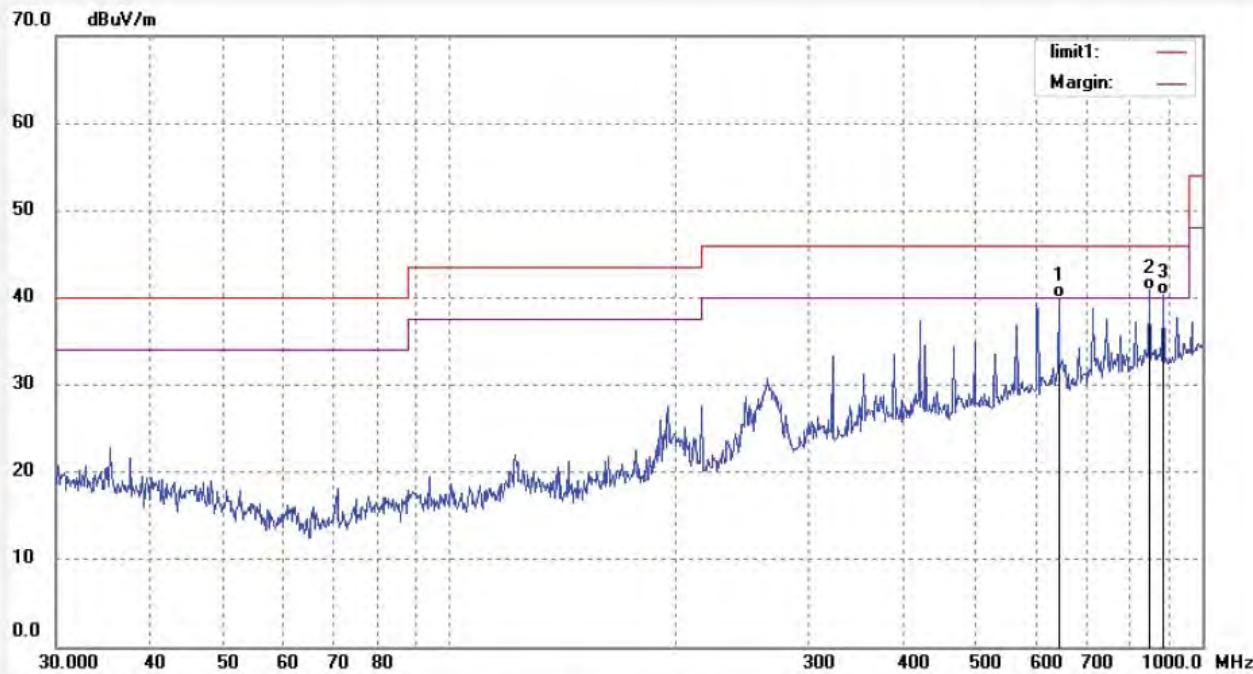


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	645.3689	13.56	26.08	39.64	46.00	-6.36	QP			
2	850.0475	12.33	28.36	40.69	46.00	-5.31	QP			
3	885.3678	11.20	28.77	39.97	46.00	-6.03	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bdg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #215	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/07/31/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	12:56:28
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 9(802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

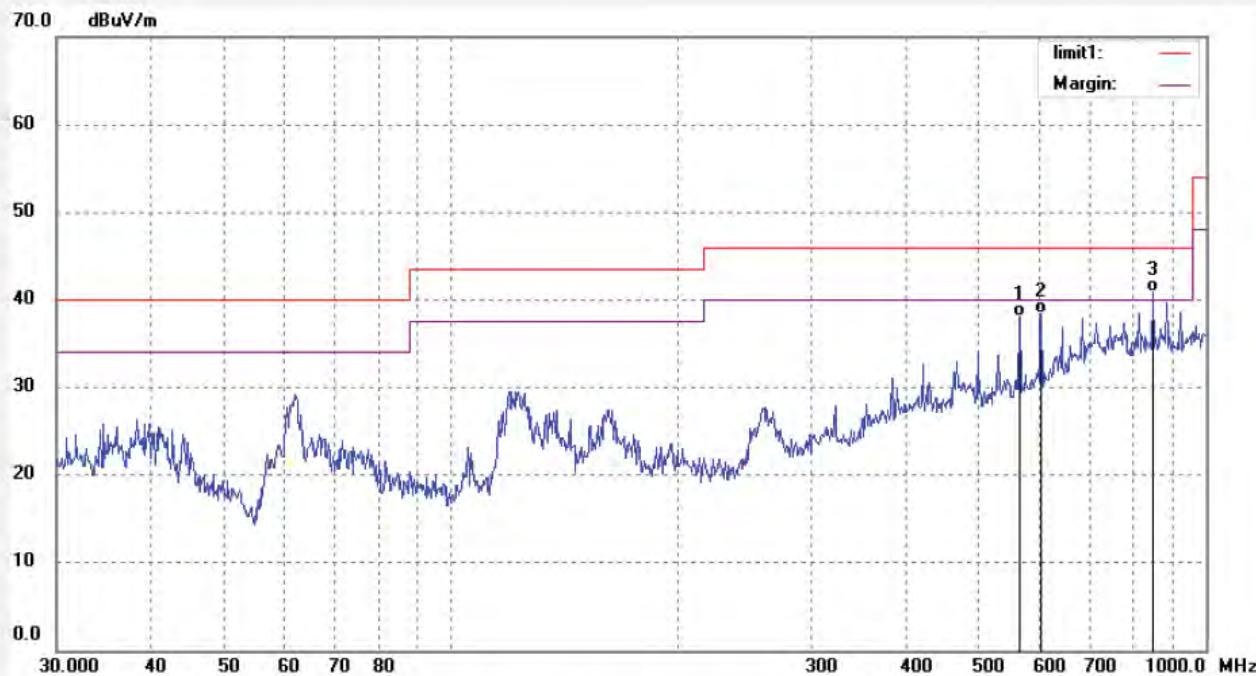


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	565.0563	12.33	25.27	37.60	46.00	-8.40	QP			
2	605.3214	12.24	25.64	37.88	46.00	-8.12	QP			
3	850.0475	12.01	28.36	40.37	46.00	-5.63	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #234	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/08/02/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 8/55/31
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

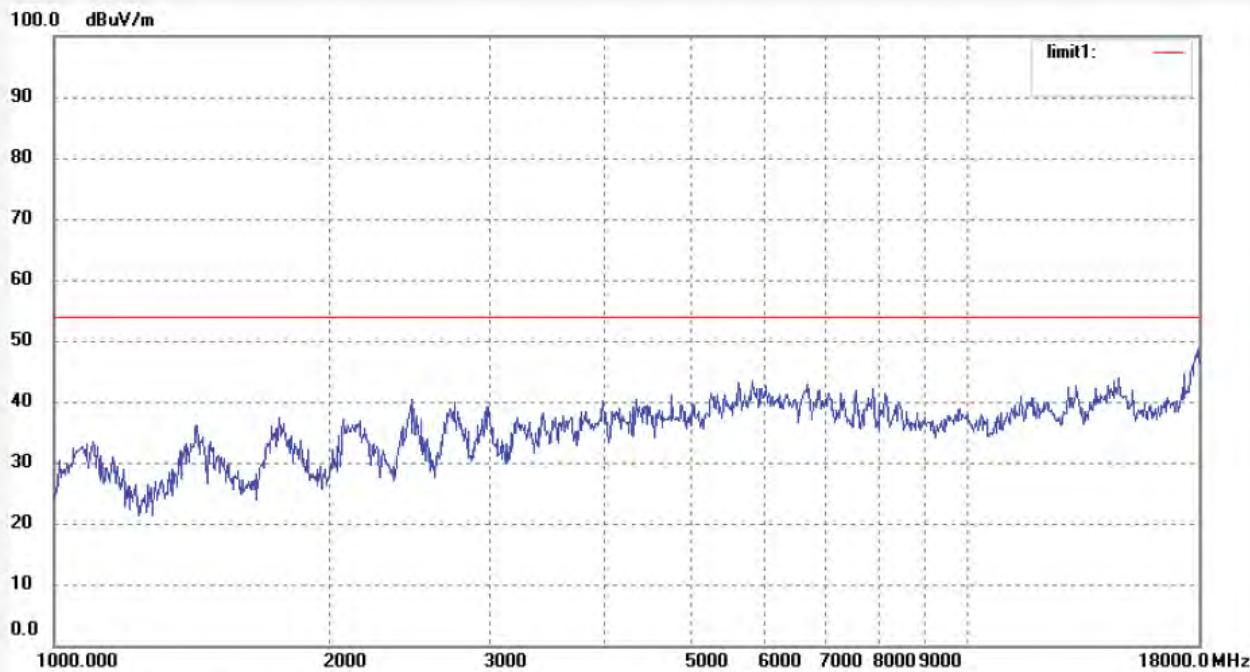

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #235

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 8/58/18

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11b)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

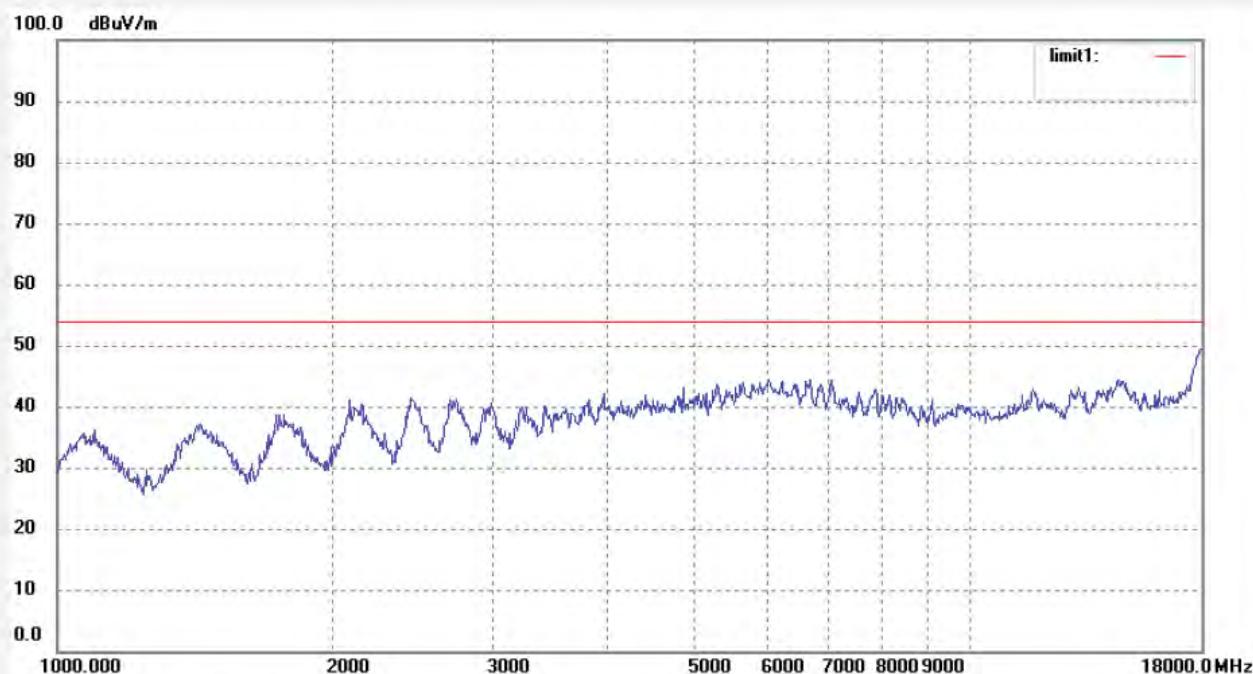

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #236

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/02/30

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

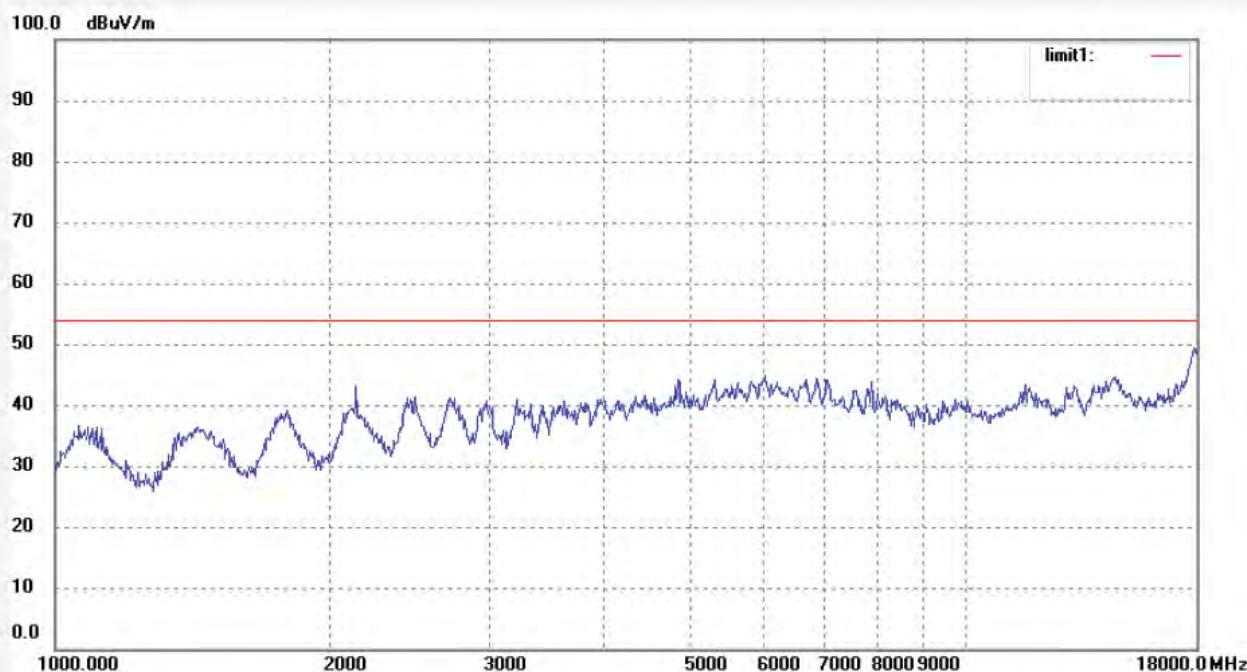

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #237

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/05/37

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

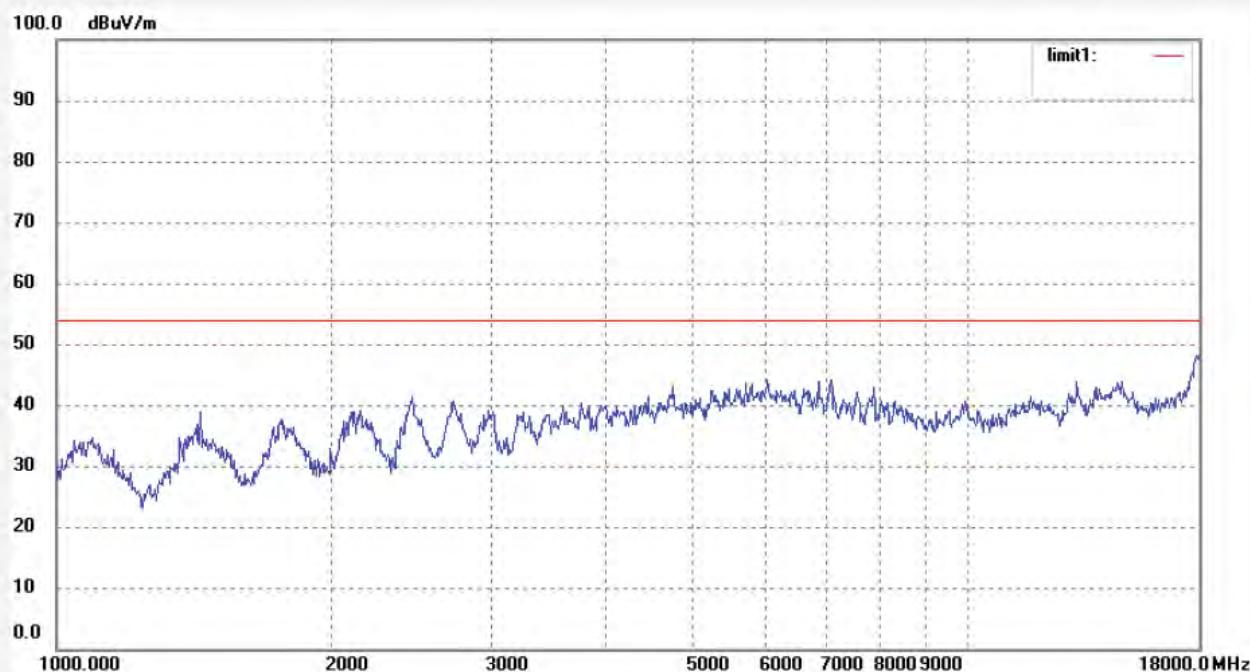


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #238	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V//60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/09/29
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 1(802.11n)	Distance:	3m
Model:	ME12-701		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

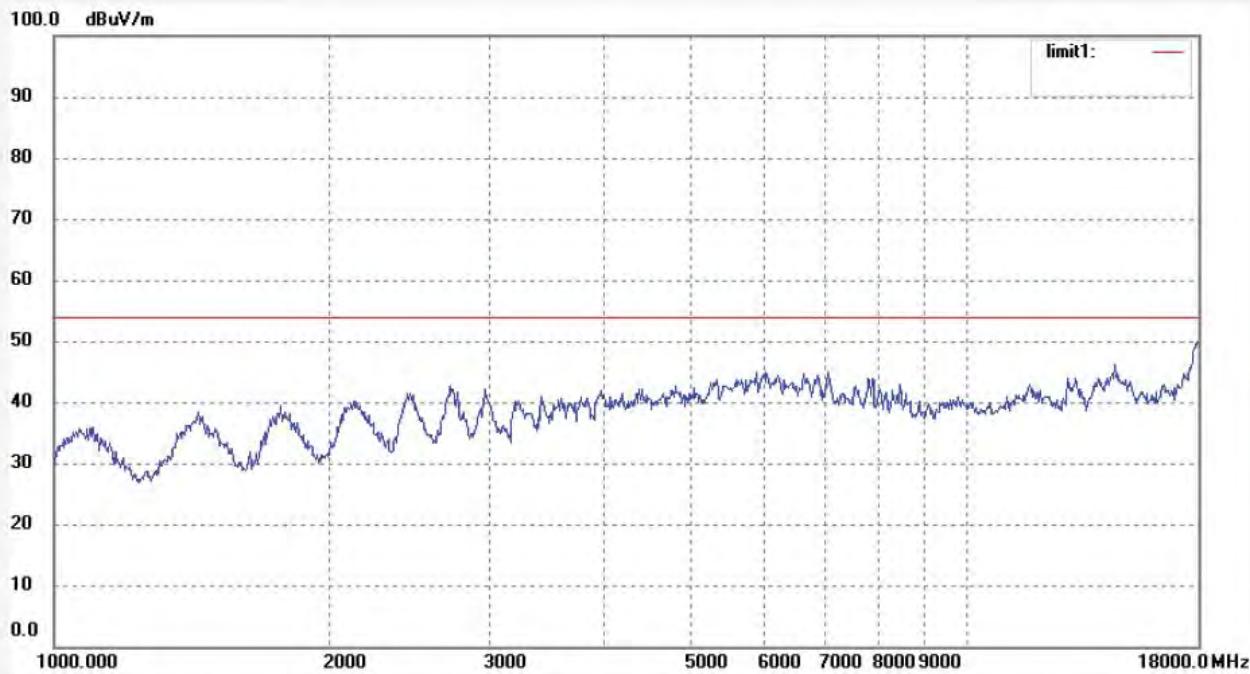

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #239

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/12/15

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 1(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

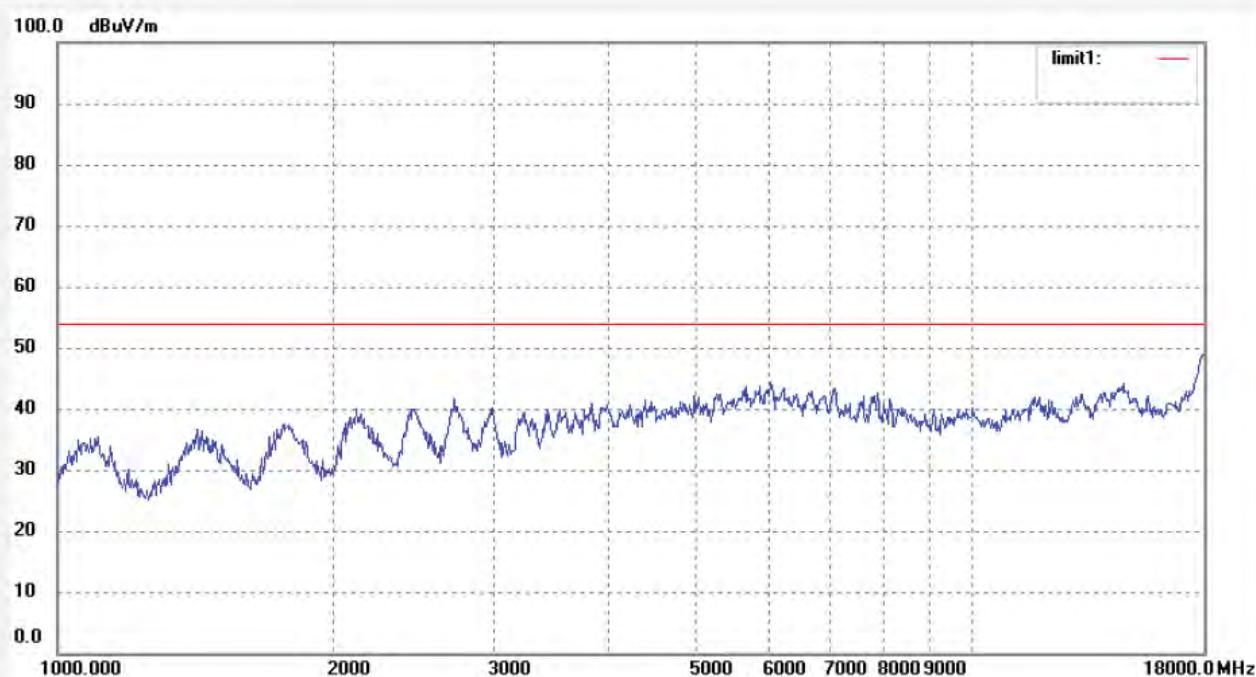


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #240	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/15/37
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6(802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

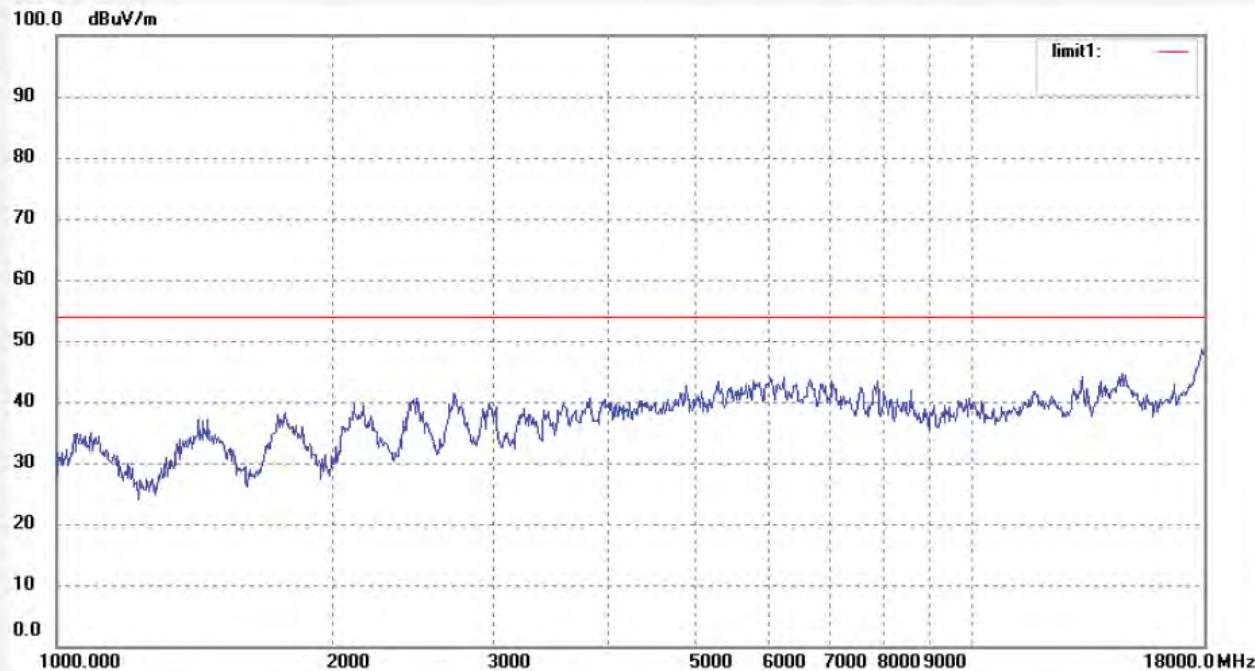


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #241	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/18/19
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6(802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

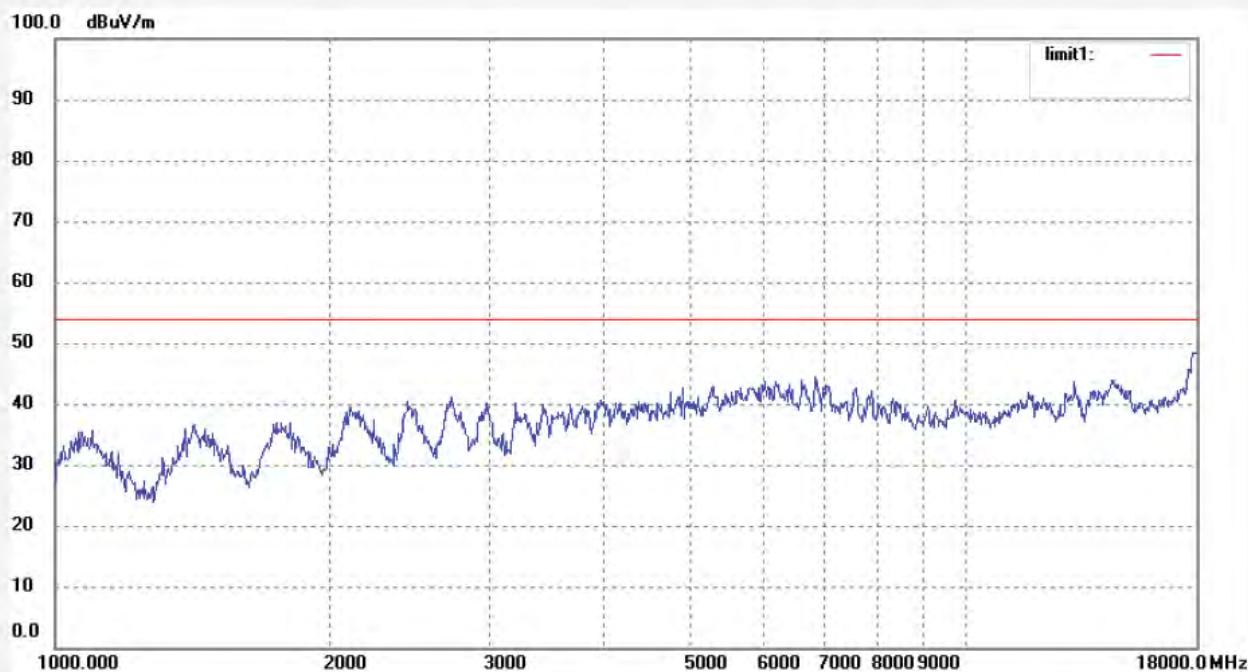

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #242

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/22/38

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 6(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

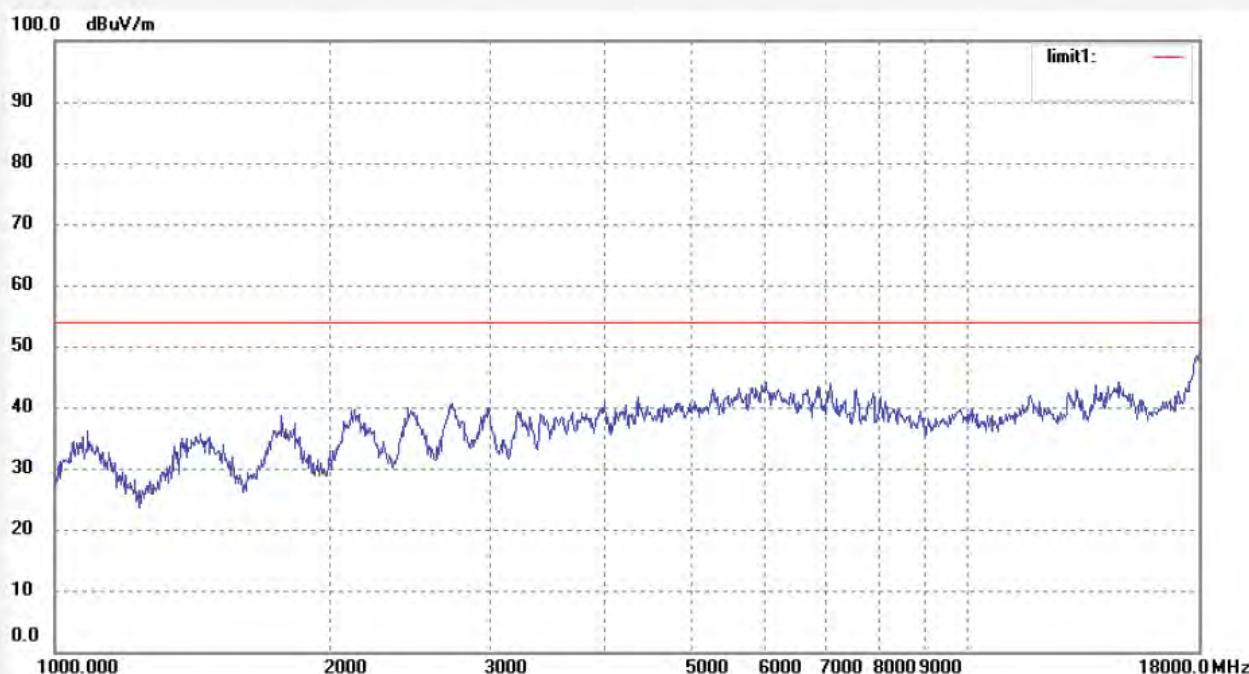


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #243	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/25/22
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6(802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

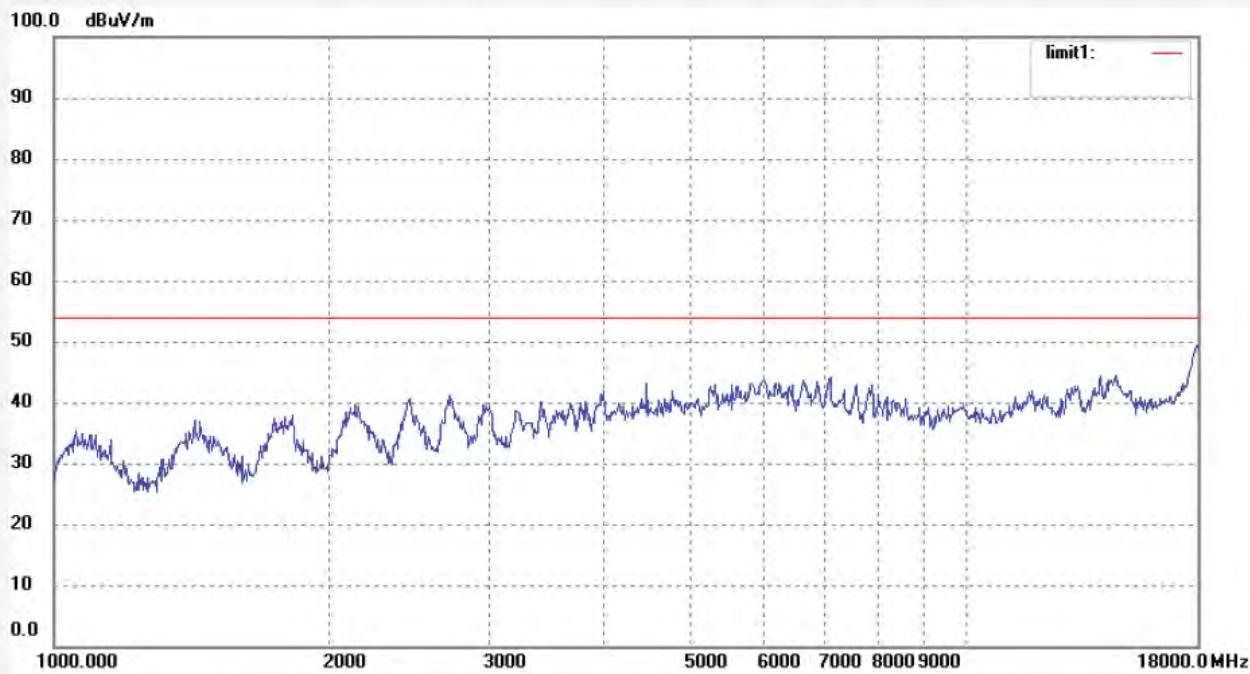

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #244
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 51 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 6(802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/08/02/
 Time: 9/28/51
 Engineer Signature:Ricky
 Distance: 3m

Note: Report NO.:ATE20121579

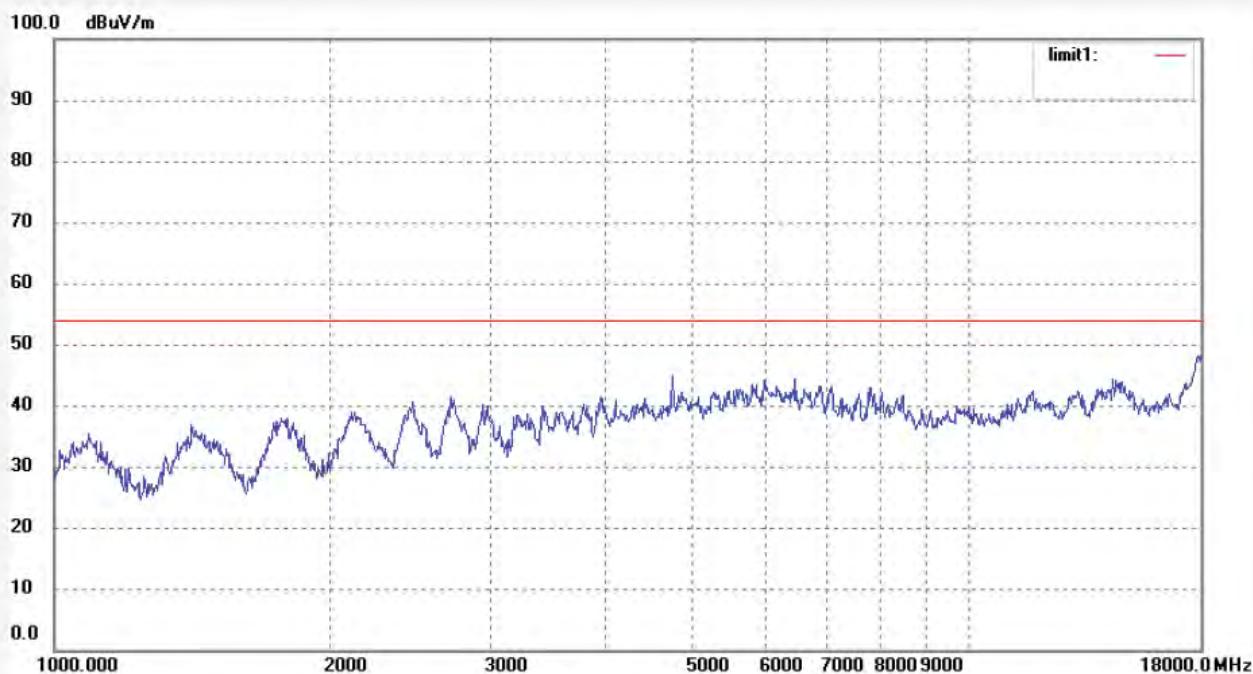

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #245

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/32/54

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 6(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

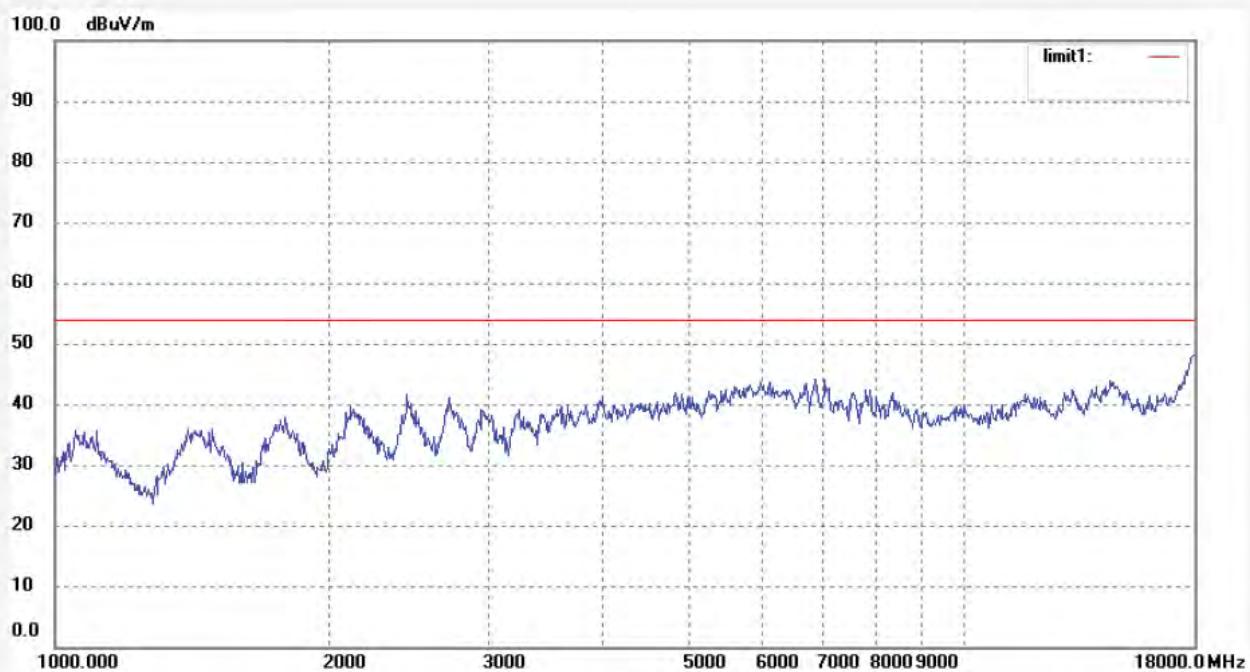

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #246

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/35/16

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 11(802.11b)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

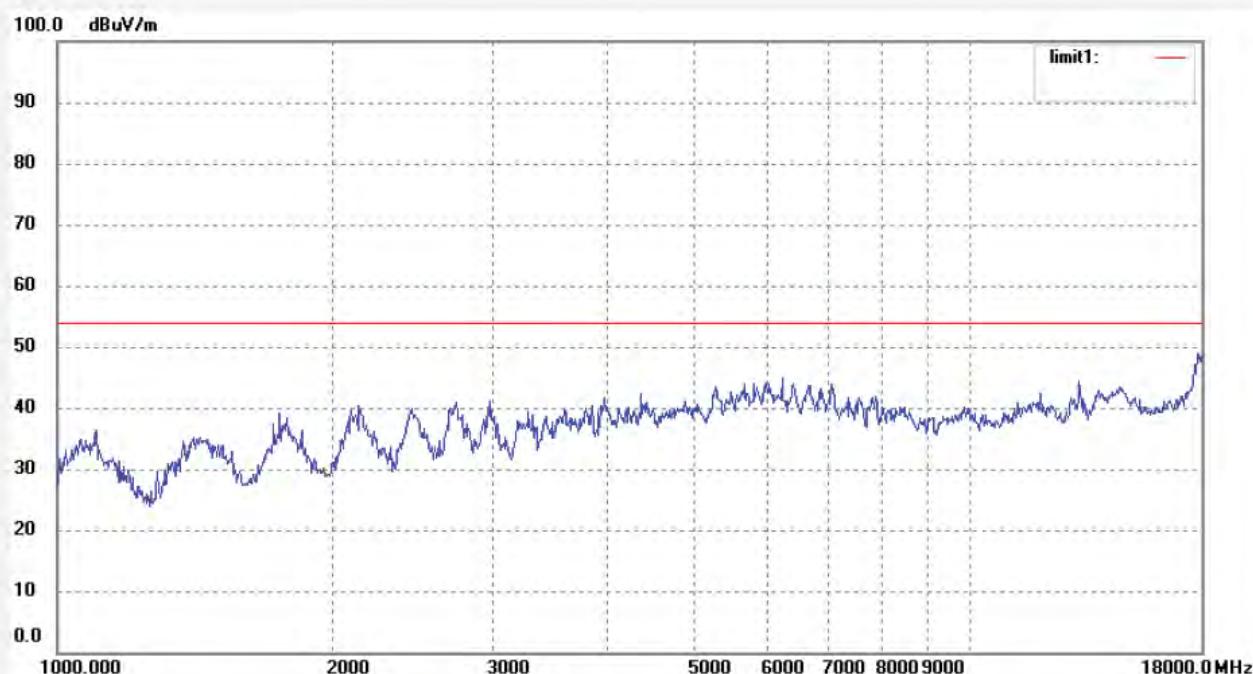


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #247	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/38/57
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 11(802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

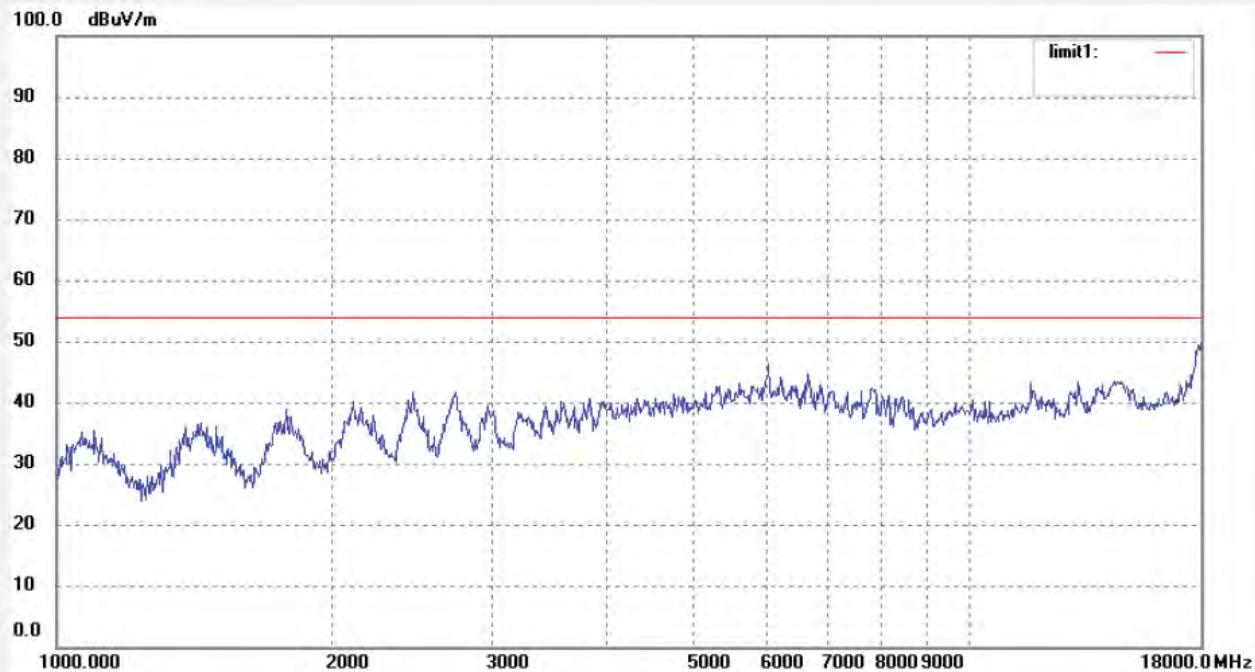

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #248

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/41/20

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 11(802.11g)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

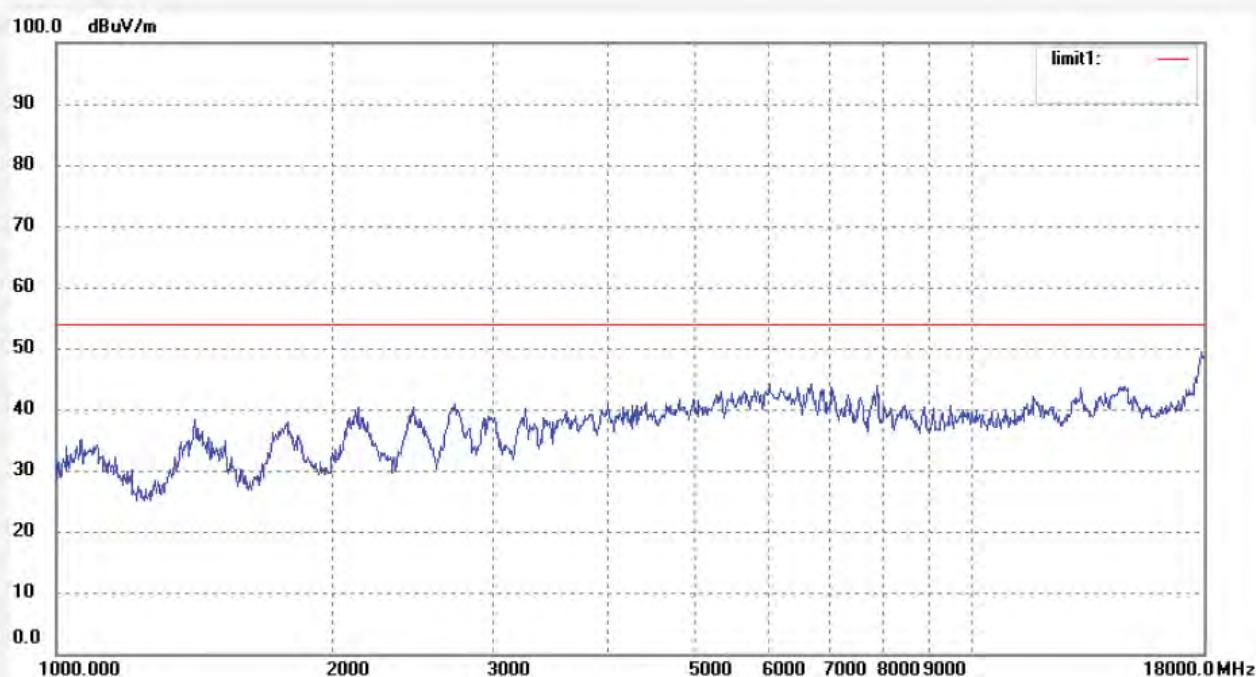


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #249	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/08/02/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 9/44/11
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUIT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

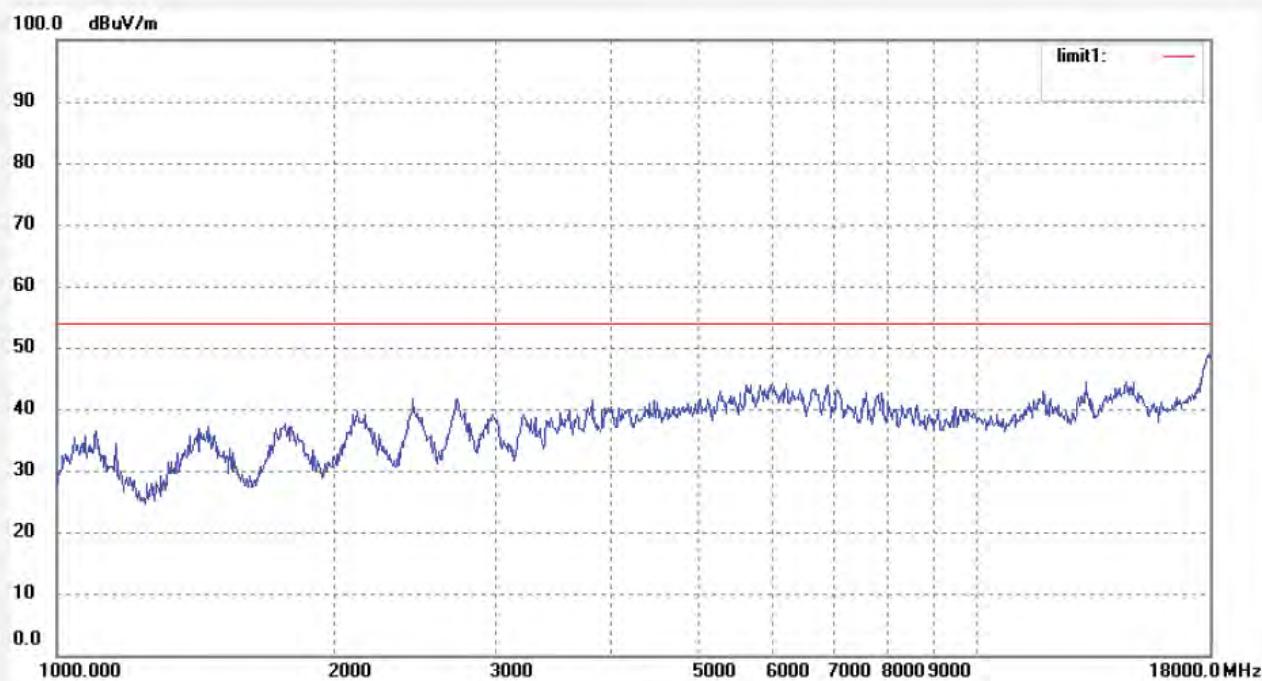


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #250	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/08/02/
Temp.(C)/Hum.(%) 25 C / 51 %	Time: 9/47/34
EUT: 10 inch Tablet PC	Engineer Signature:Ricky
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report NO.:ATE20121579	

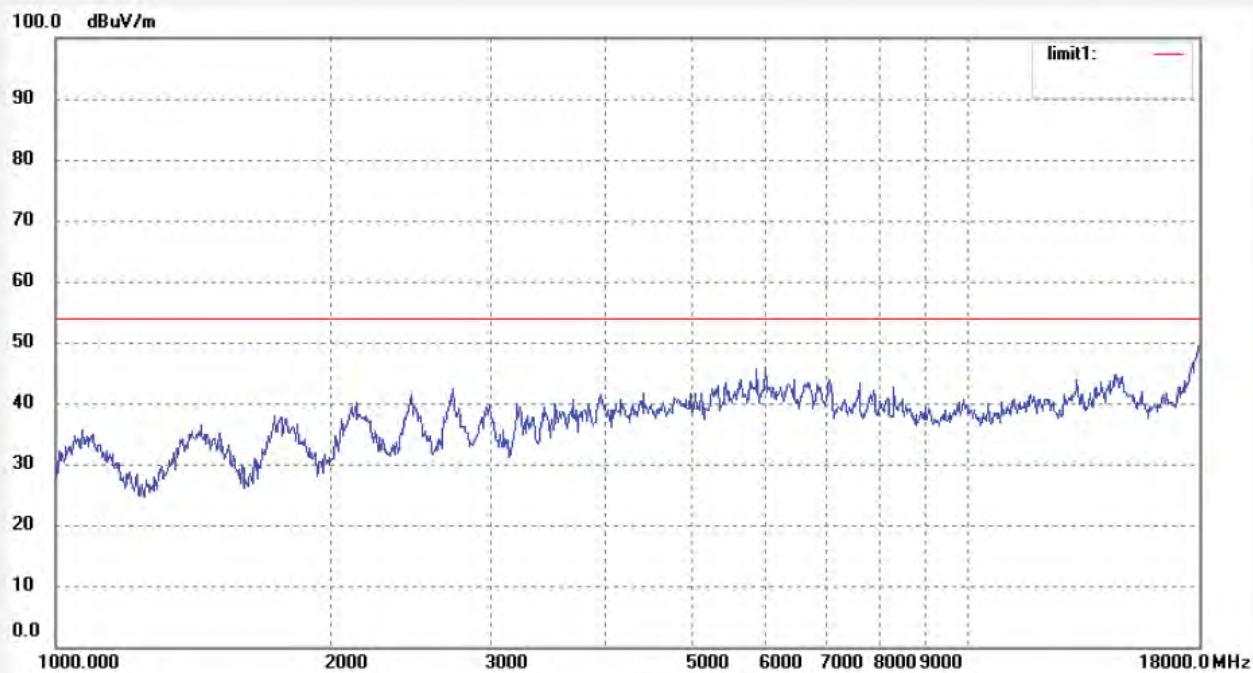

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #251
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 51 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 11(802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/08/02/
 Time: 9/50/48
 Engineer Signature:Ricky
 Distance: 3m

Note: Report NO.:ATE20121579

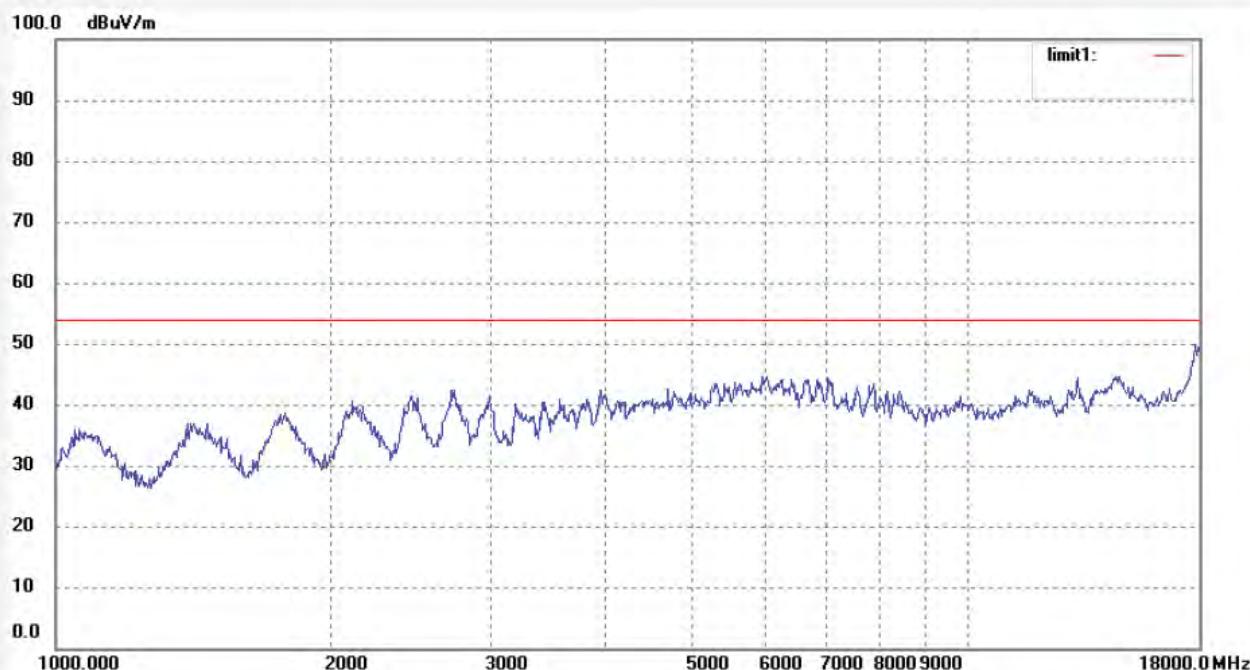


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #252	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	9/53/21
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 3(802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

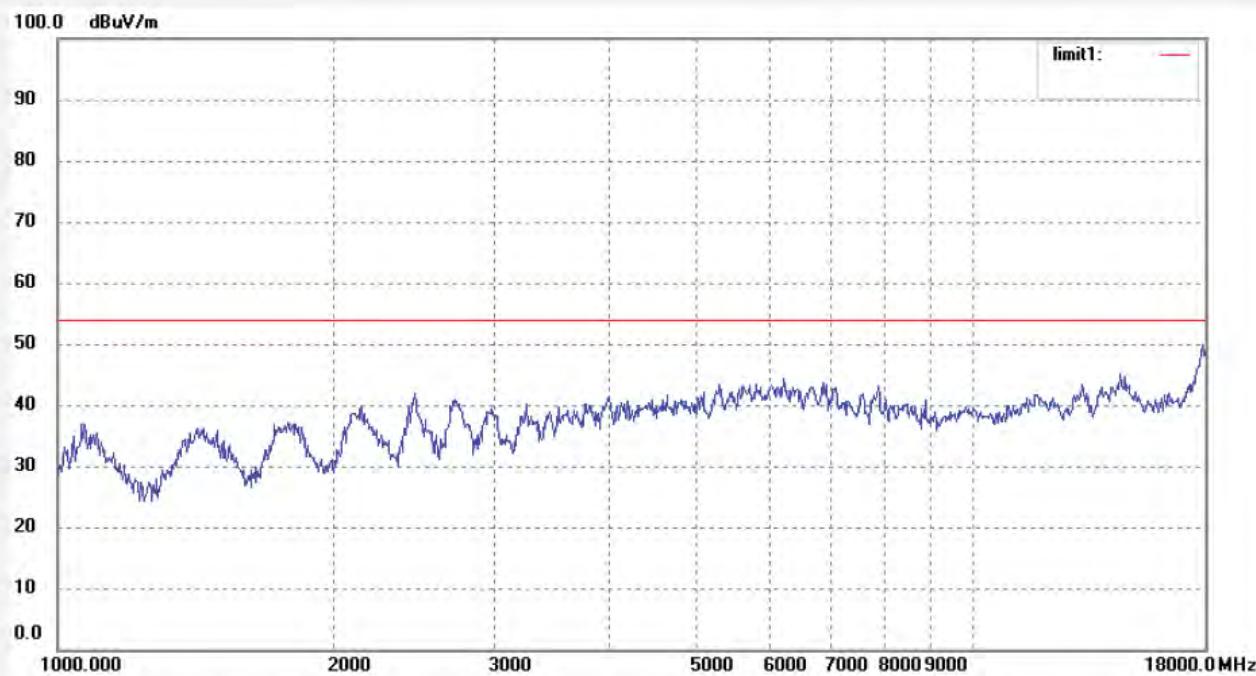

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #253

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/02/

Temp.(C)/Hum.(%) 25 C / 51 %

Time: 9/56/18

EUT: 10 inch Tablet PC

Engineer Signature:Ricky


Mode: TX Channel 3(802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report NO.:ATE20121579

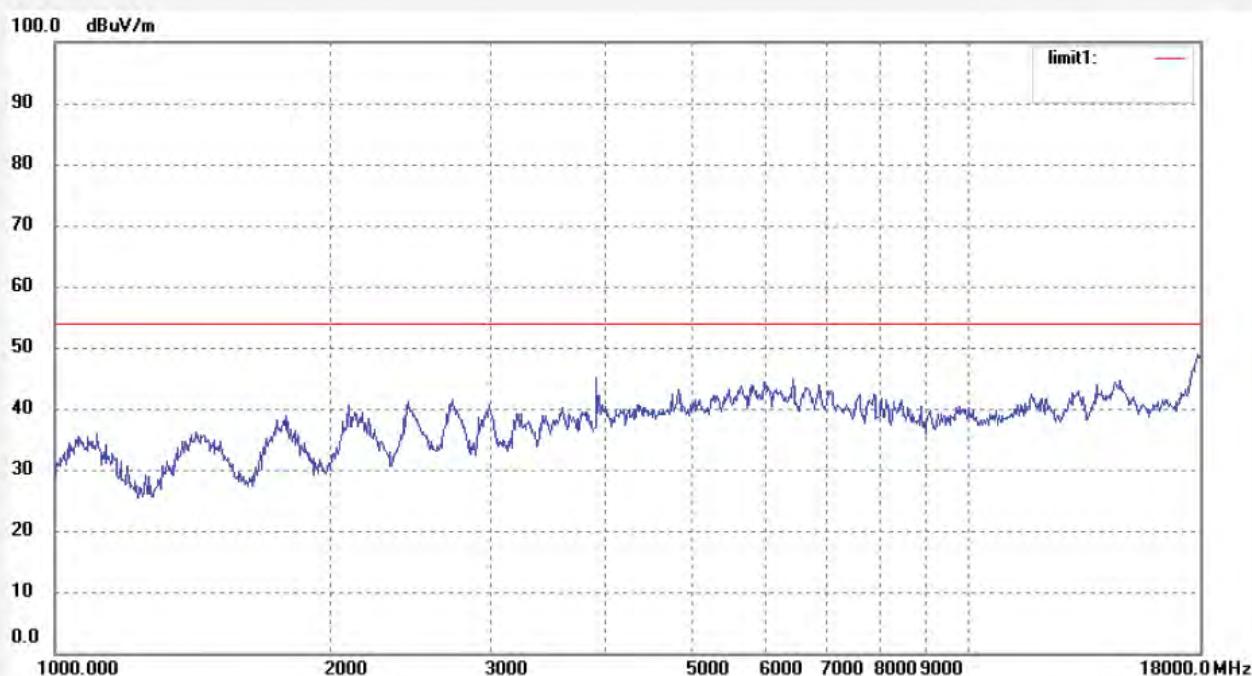

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #254
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 51 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 6(802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/08/02/
 Time: 10/00/41
 Engineer Signature:Ricky
 Distance: 3m

Note: Report NO.:ATE20121579

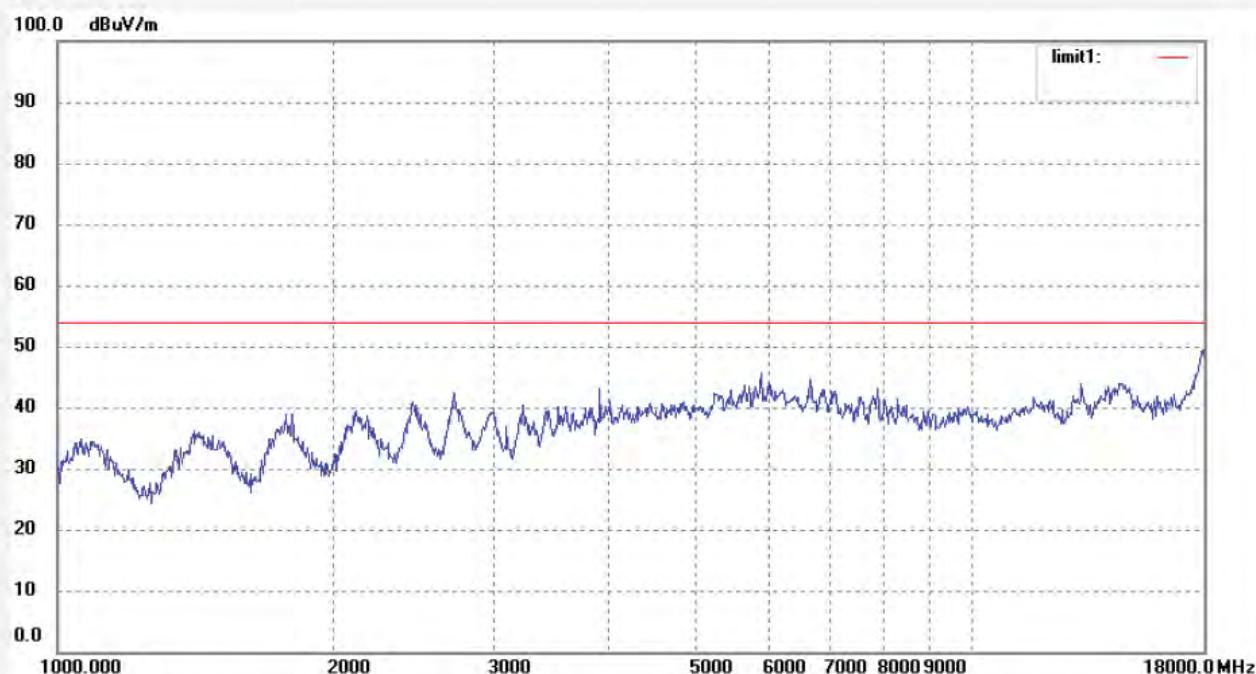

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #255
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 51 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 6(802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD
 Note: Report NO.:ATE20121579

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/08/02/
 Time: 10/03/50
 Engineer Signature: Ricky
 Distance: 3m

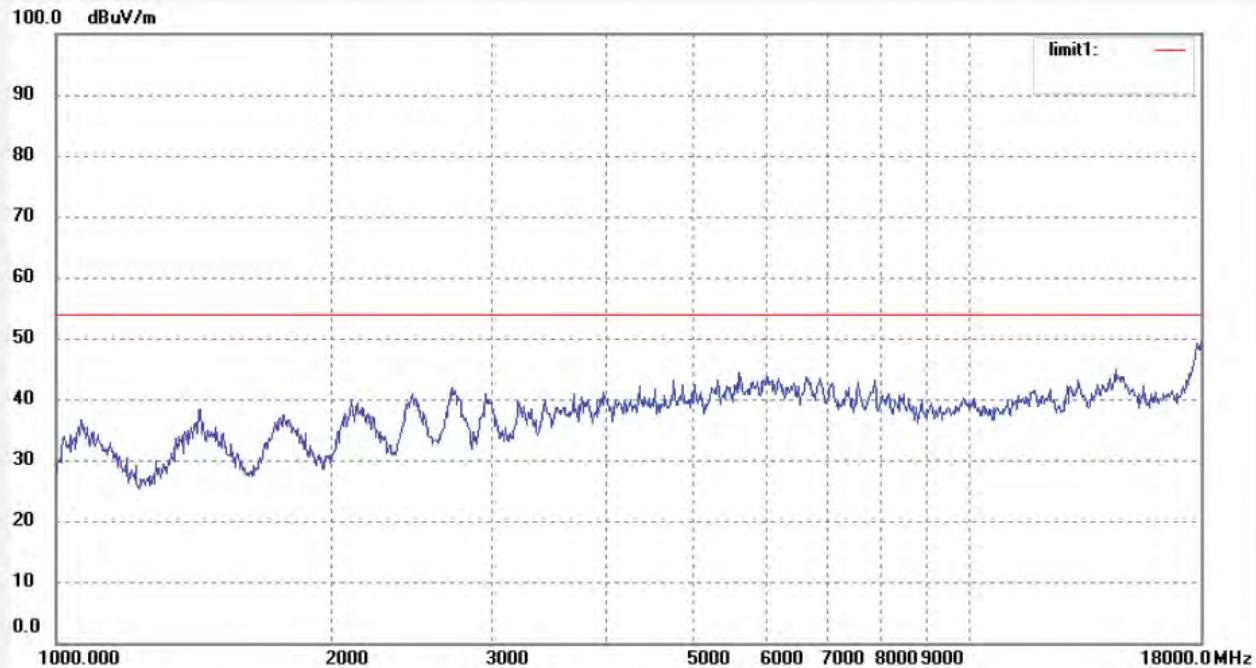

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #256
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 51 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 9(802.11n)
 Model: TB1082B1
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/08/02/
 Time: 10/06/21
 Engineer Signature:Ricky
 Distance: 3m

Note: Report NO.:ATE20121579

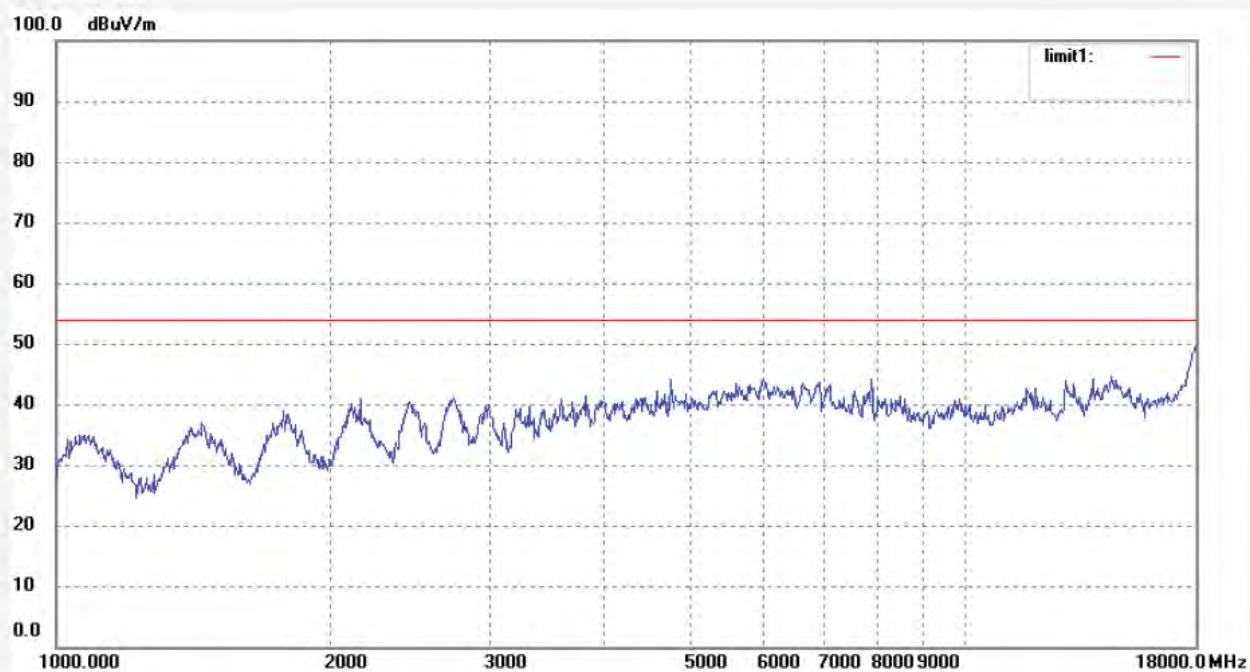


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #257	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/02/
Temp.(C)/Hum.(%)	25 C / 51 %	Time:	10/09/22
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 9(802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report NO.:ATE20121579		

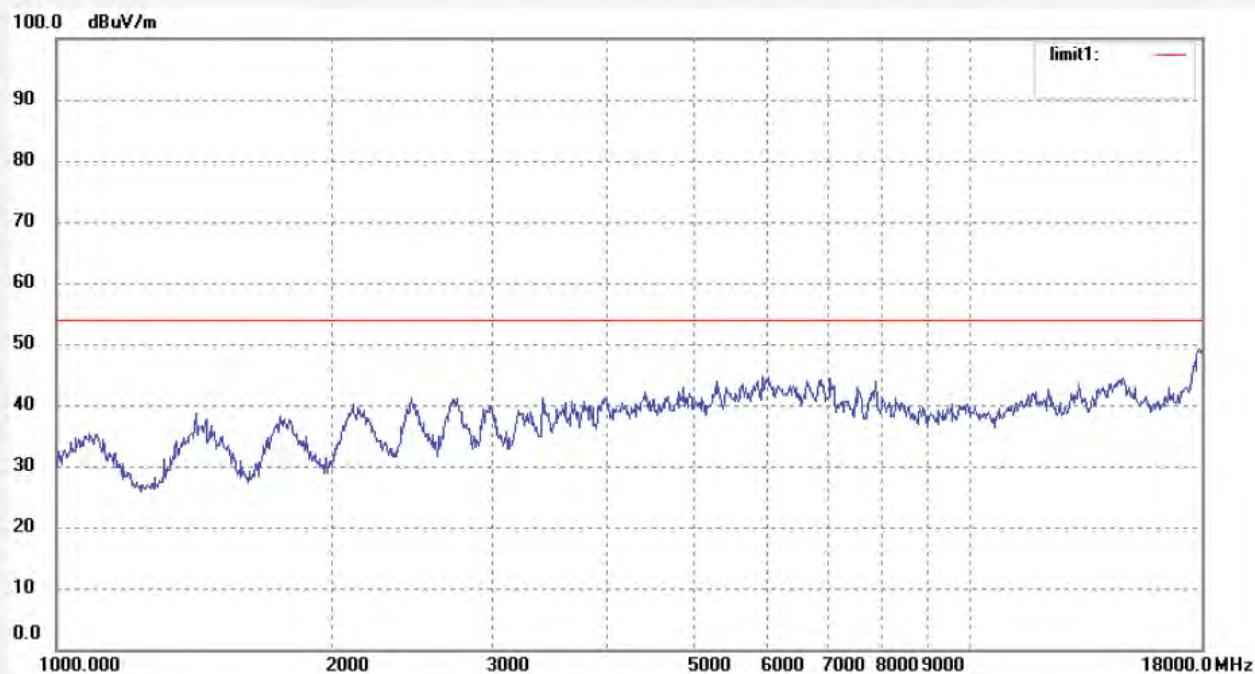

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #258

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/03

Temp.(C)/Hum.(%) 25 C / 50 %

Time: 08:05:15

EUT: 10 inch Tablet PC

Engineer Signature: Ricky


Mode: TX Channel 1 (802.11b)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report No.:ATE20121579

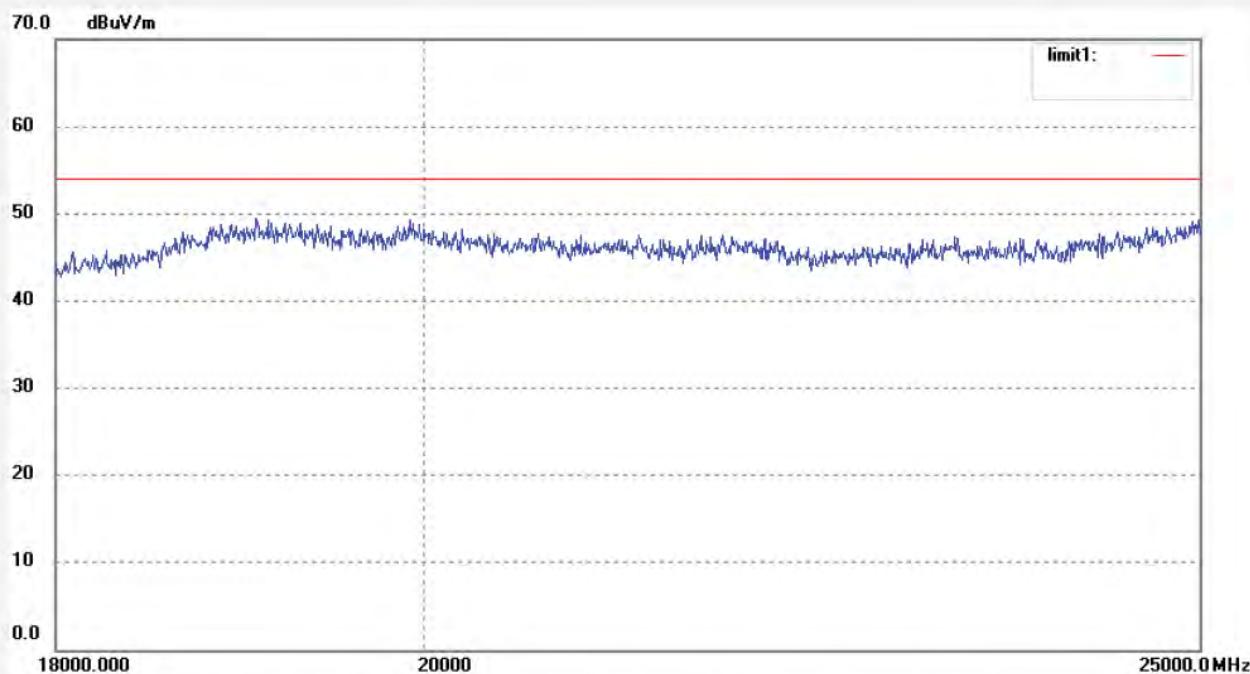


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T#259	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:09:22
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 1 (802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

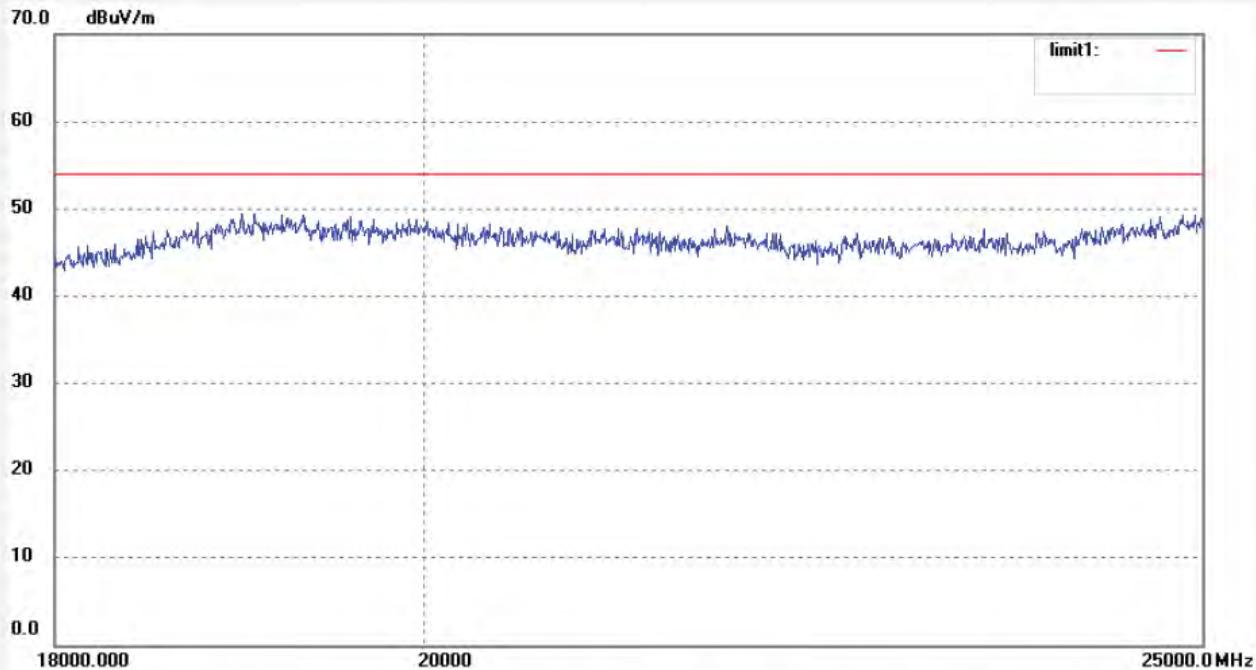

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #260

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/03

Temp.(C)/Hum.(%) 25 C / 50 %

Time: 08:14:45

EUT: 10 inch Tablet PC

Engineer Signature: Ricky


Mode: TX Channel 6 (802.11b)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report No.:ATE20121579

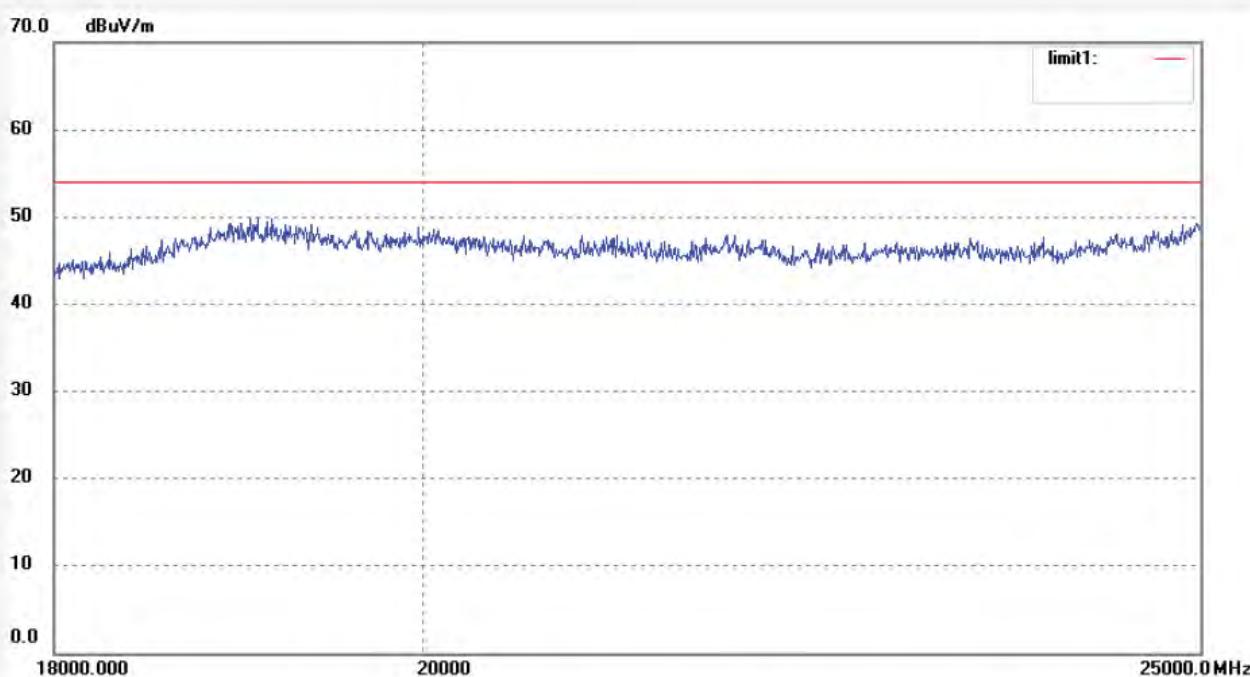


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #264	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/05/4
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	10:18:36
EUT:	10 inch Tablet PC	Engineer Signature:	Bob
Mode:	TX Channel 6 (802.11b)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUIT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

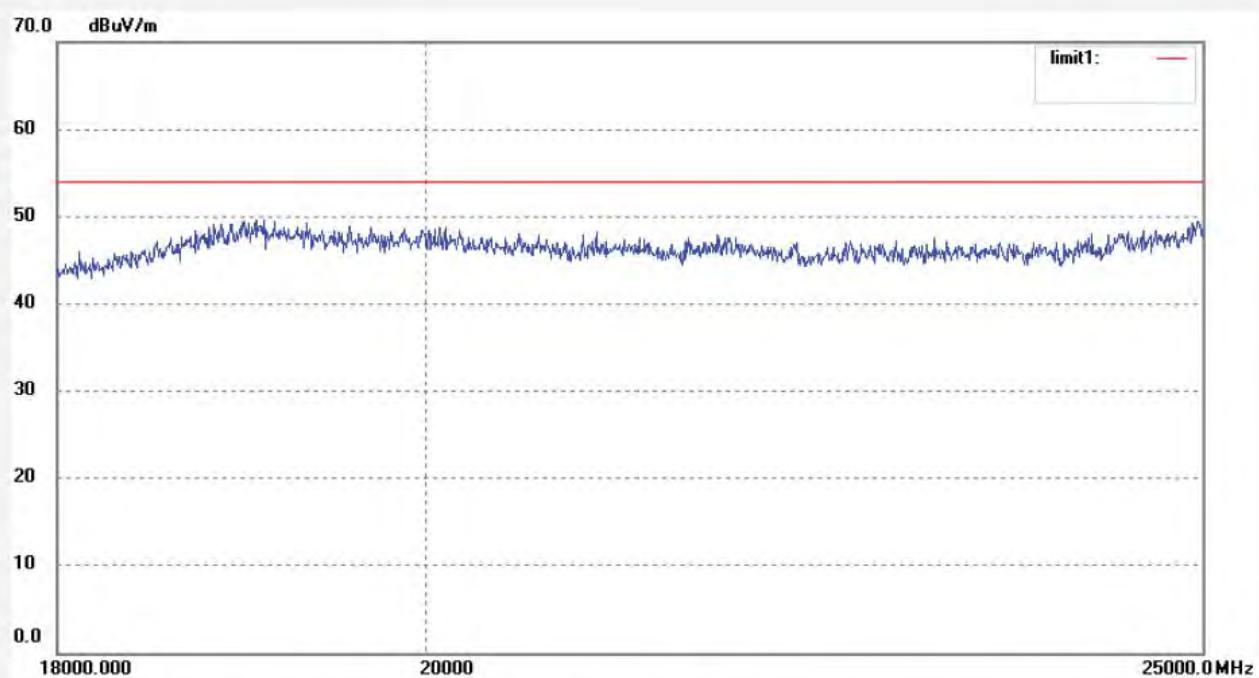

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T#265
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 11 (802.11b)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/08/03
 Time: 08:23:55
 Engineer Signature: Ricky
 Distance: 3m

Note: Report No.ATE20121579

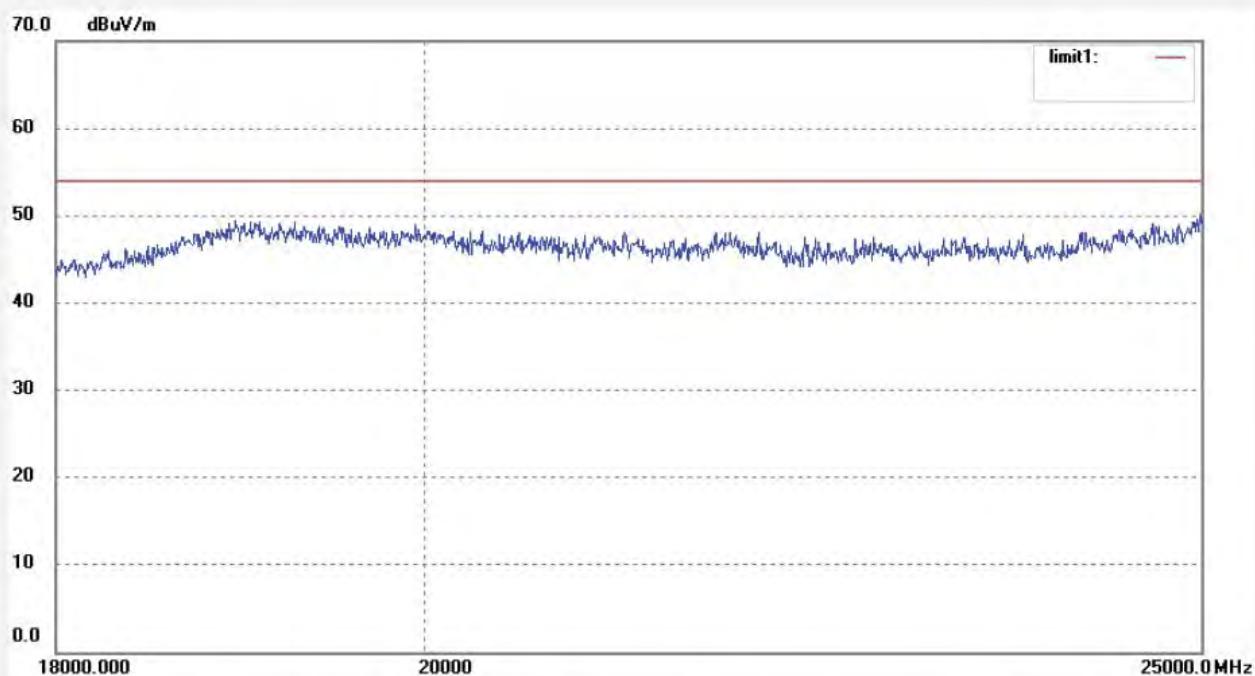

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #266	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/08/03
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 08:27:11
EUT: 10 inch Tablet PC	Engineer Signature: Ricky
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: TB1082B	
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD	
Note: Report No.:ATE20121579	

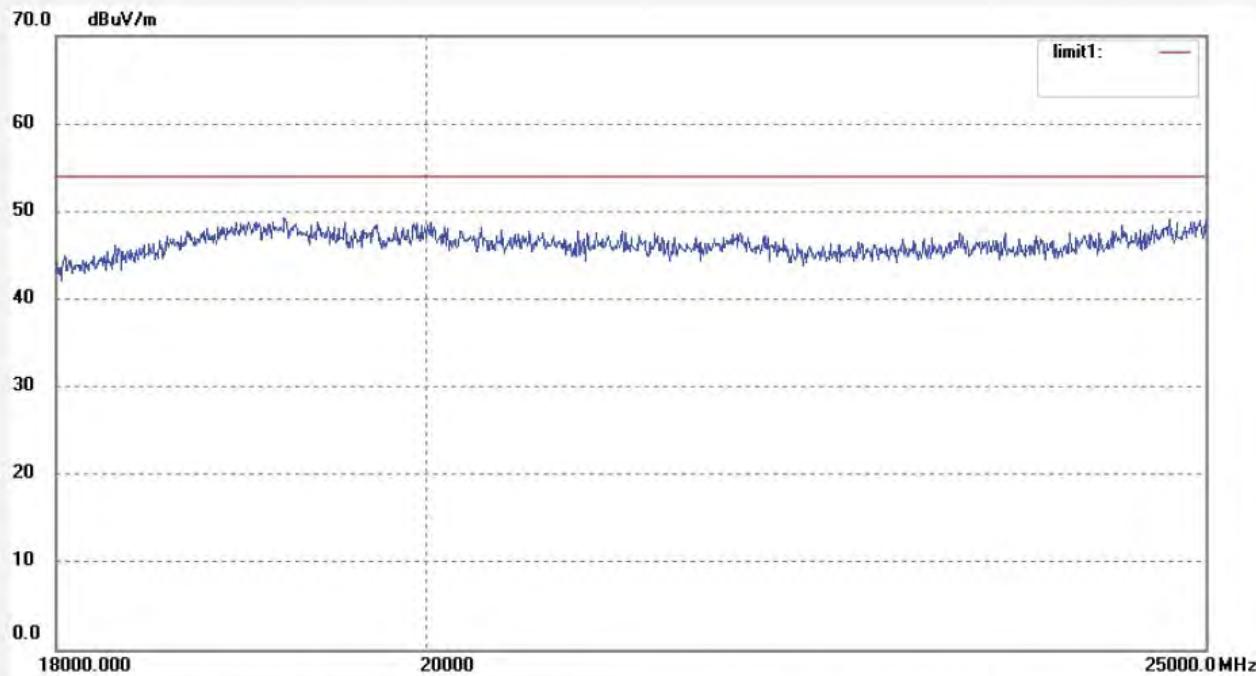

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T#267	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:32:05
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 1 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD			

Note: Report No.:ATE20121579

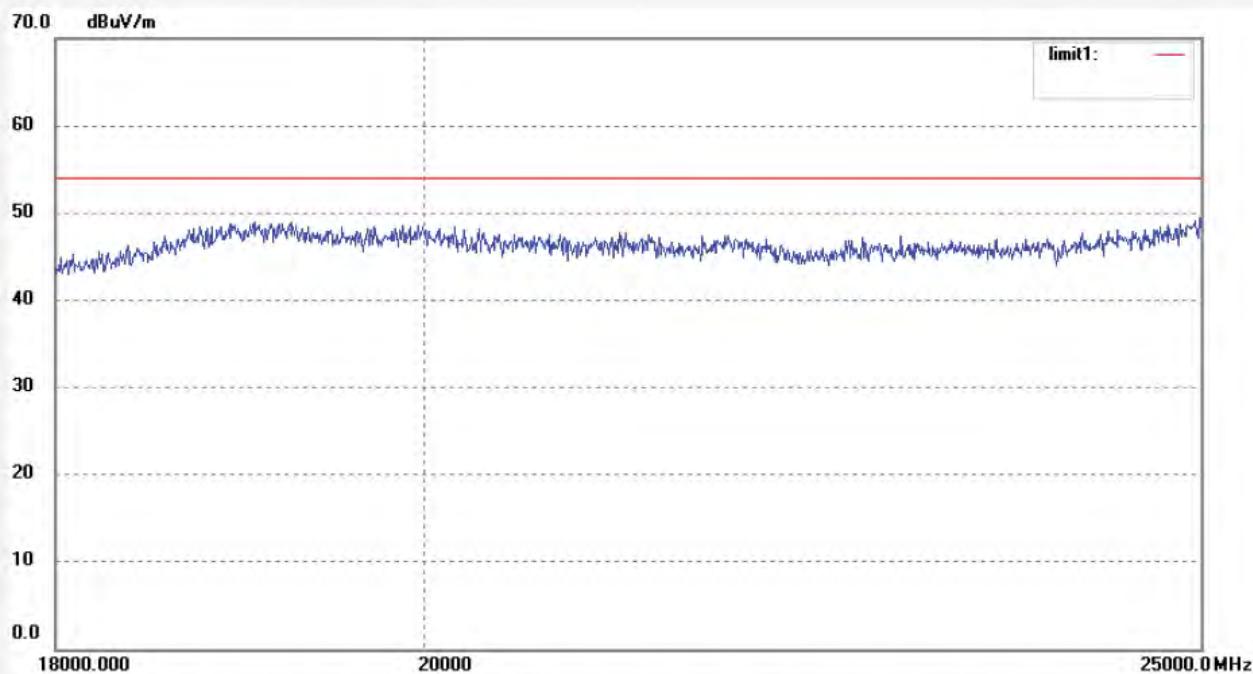


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #268	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:35:56
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 1 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

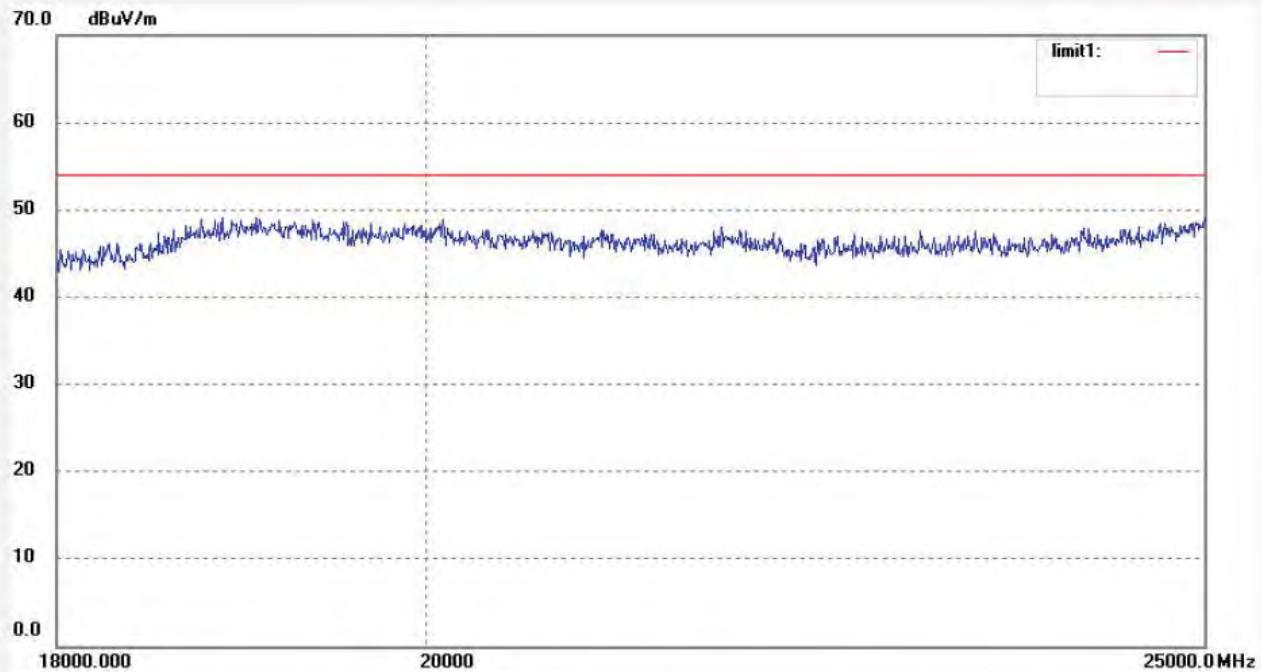


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #269	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:38:38
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

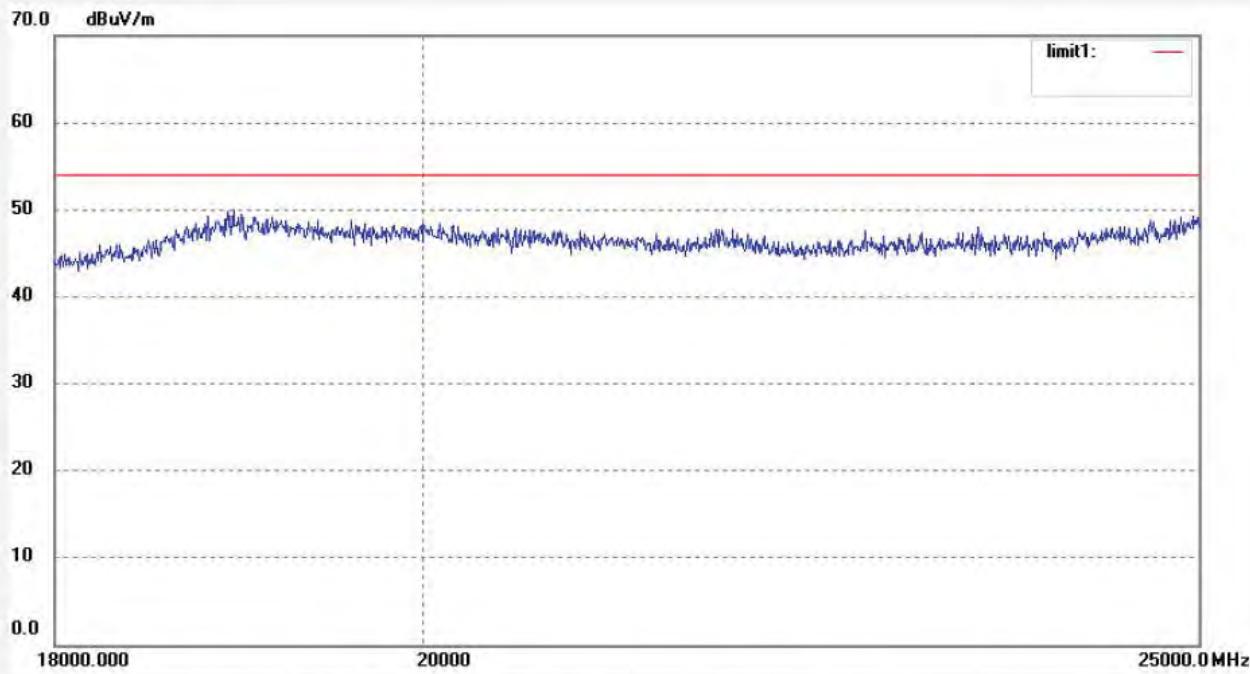


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #270	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:43:17
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

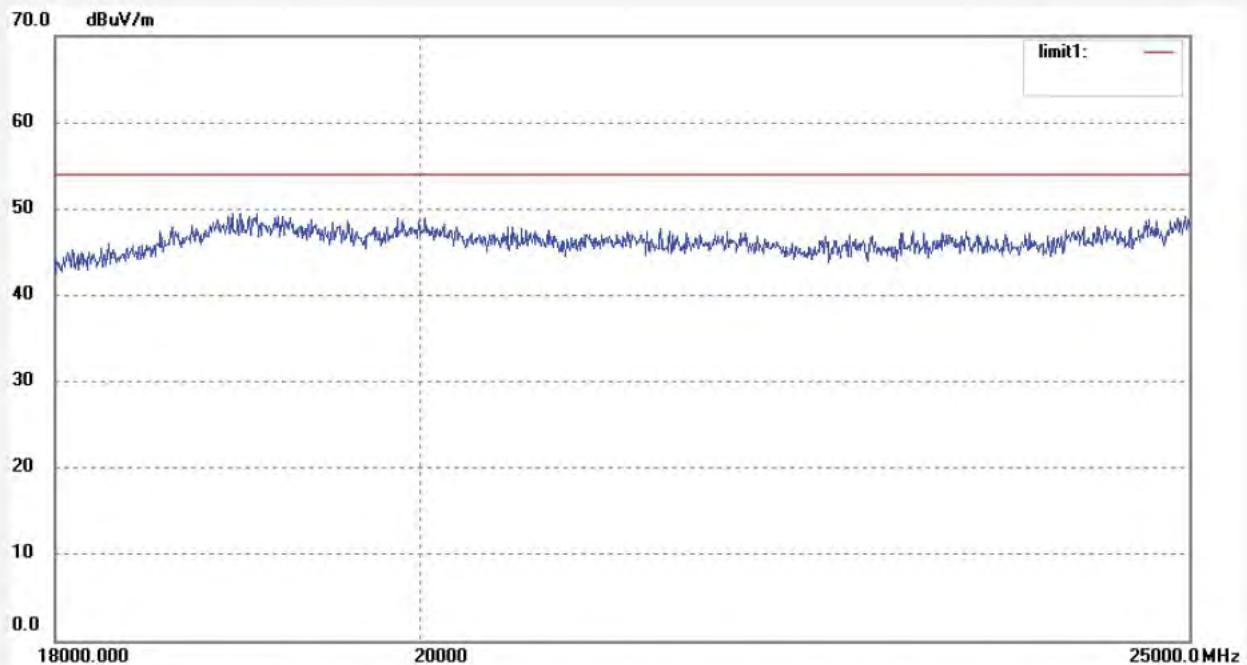

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	T #271	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:47:55
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 11 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

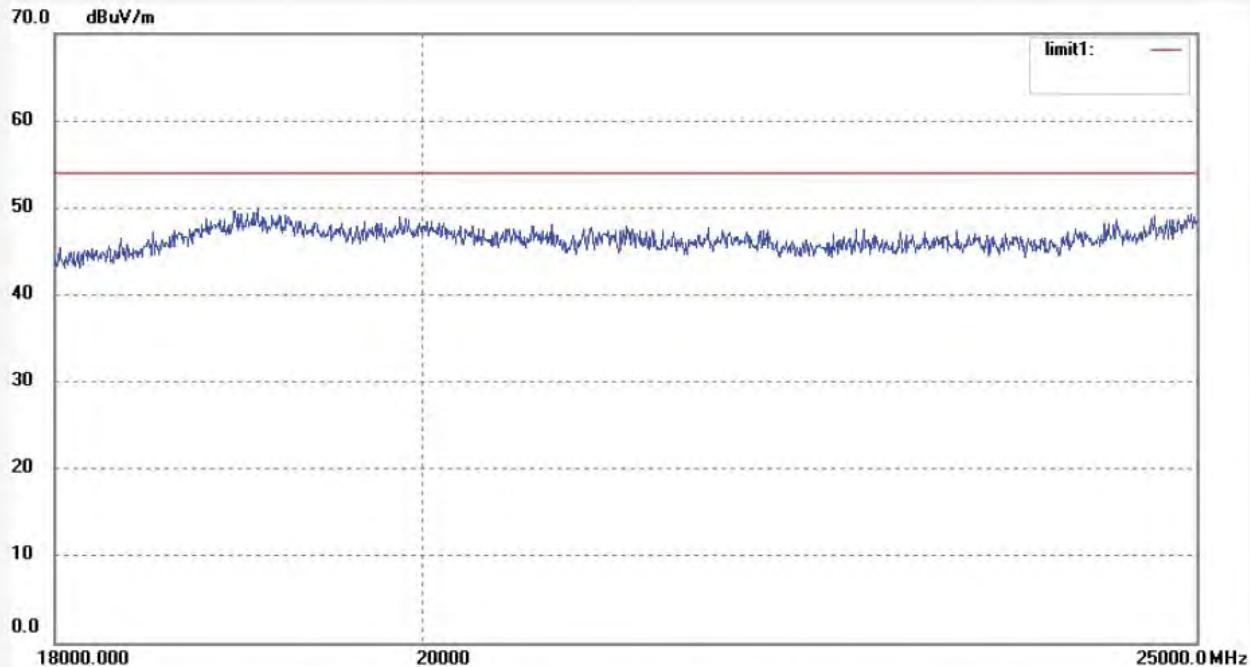


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #272	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	08:50:47
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 11 (802.11g)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

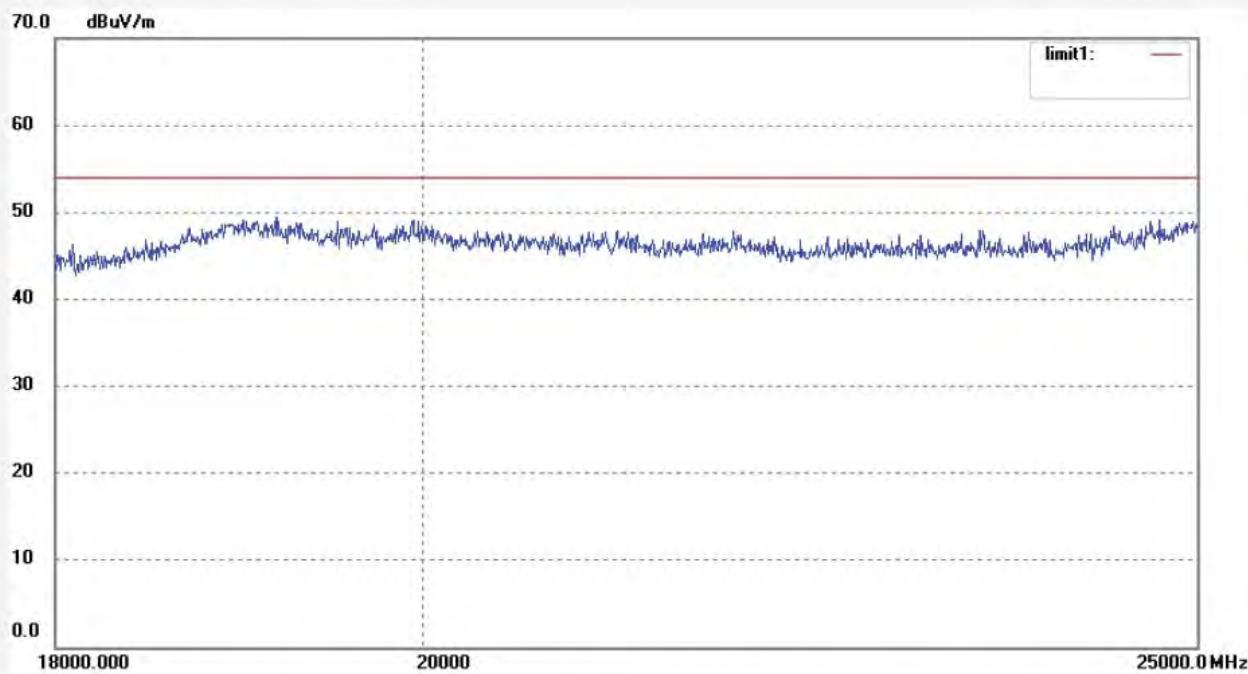

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #273
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 11 (802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD
 Note: Report No.:ATE20121579

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/08/03
 Time: 08:53:17
 Engineer Signature: Ricky
 Distance:

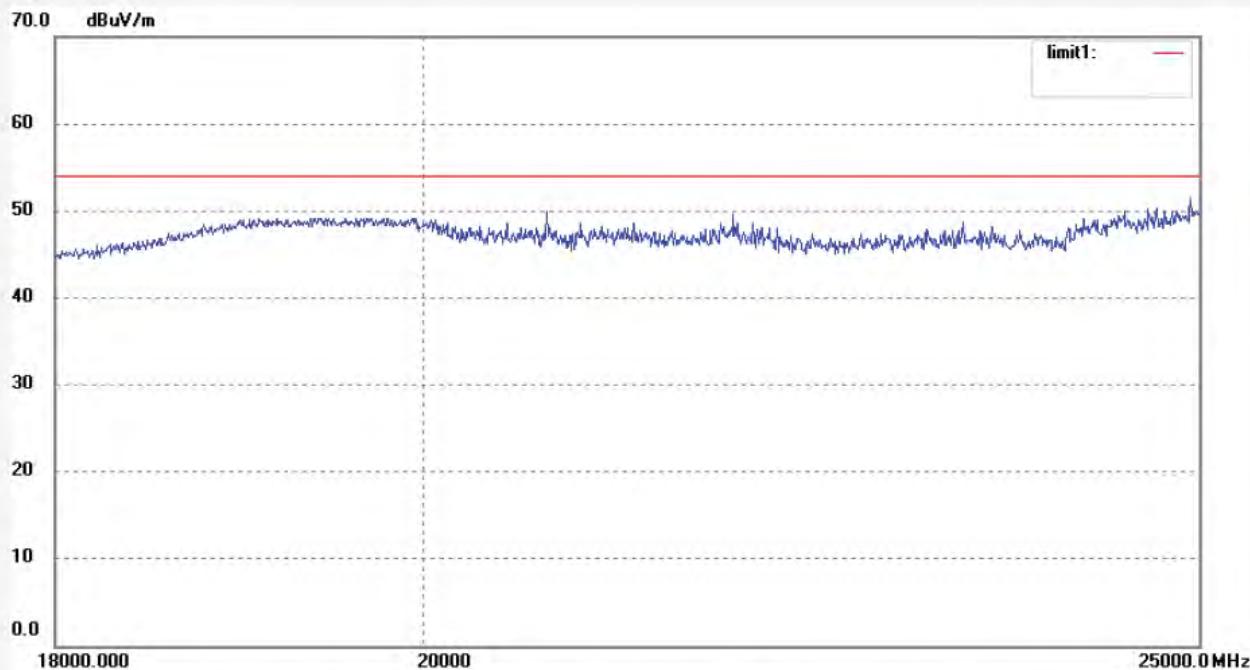


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #274	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	08:57:05
EUT:	10 inch Tablet PC	Engineer Signature:	Bob
Mode:	TX Channel 11 (802.11n)	Distance:	
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

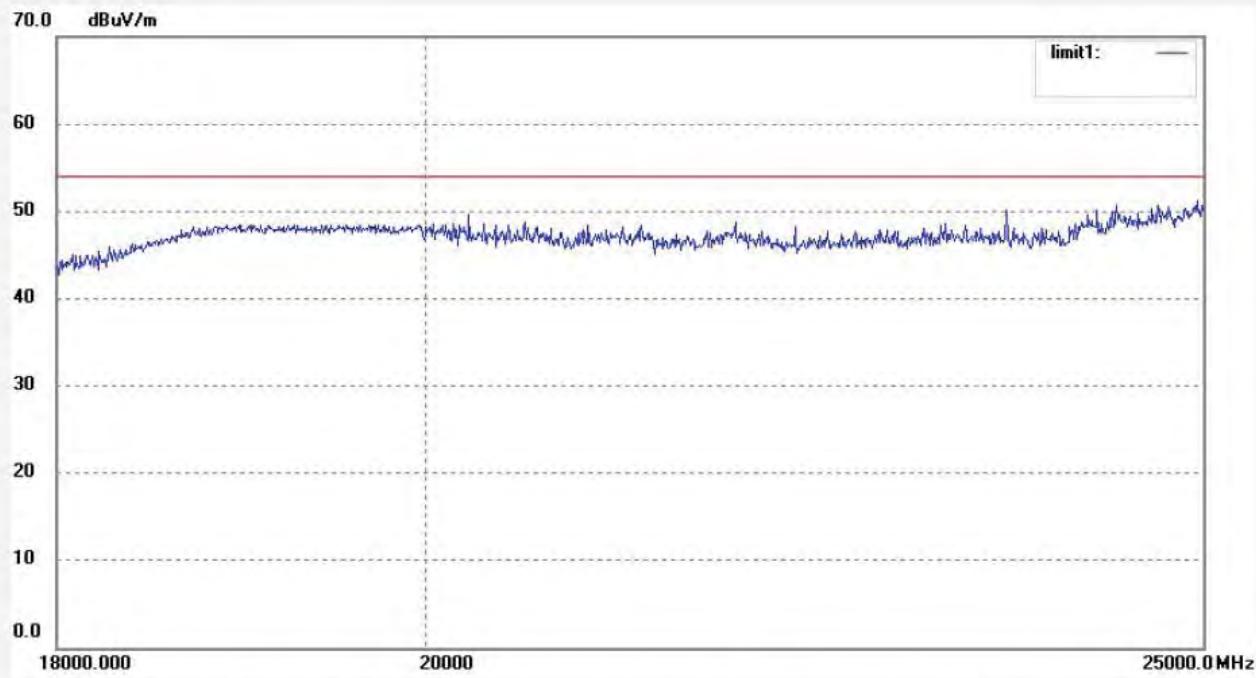

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #275
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: 10 inch Tablet PC
Mode: TX Channel 6 (802.11n)
Model: TB1082B
Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD
Note: Report No.:ATE20121579

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/08/03
Time: 09:02:36
Engineer Signature: Ricky
Distance:3m

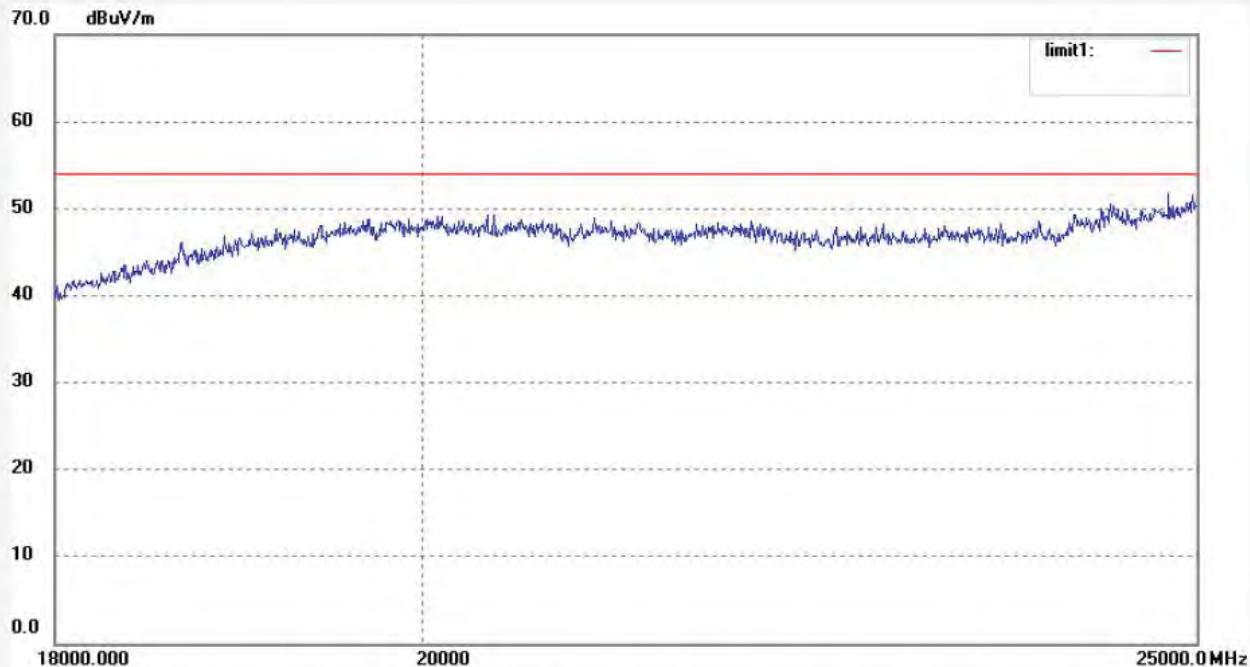


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #276	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	09:05:58
EUT:	10 inch Tablet PC	Engineer Signature:	Bob
Mode:	TX Channel 6 (802.11n)	Distance:	
Model:	TB1082B		
Manufacturer:	HannStar Display Corp		
Note:	Report No.:ATE20121579		

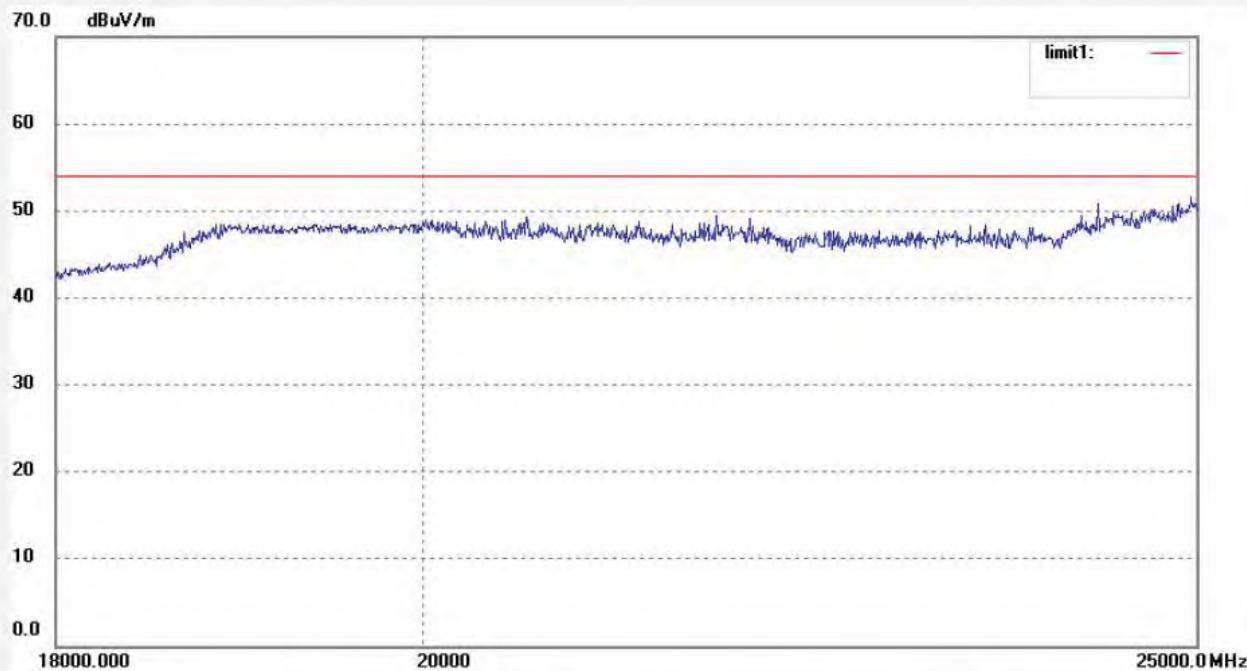

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T#277

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/08/03

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 09:09:37

EUT: 10 inch Tablet PC

Engineer Signature: Ricky


Mode: TX Channel 1 (802.11n)

Distance: 3m

Model: TB1082B

Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Note: Report No.:ATE20121579

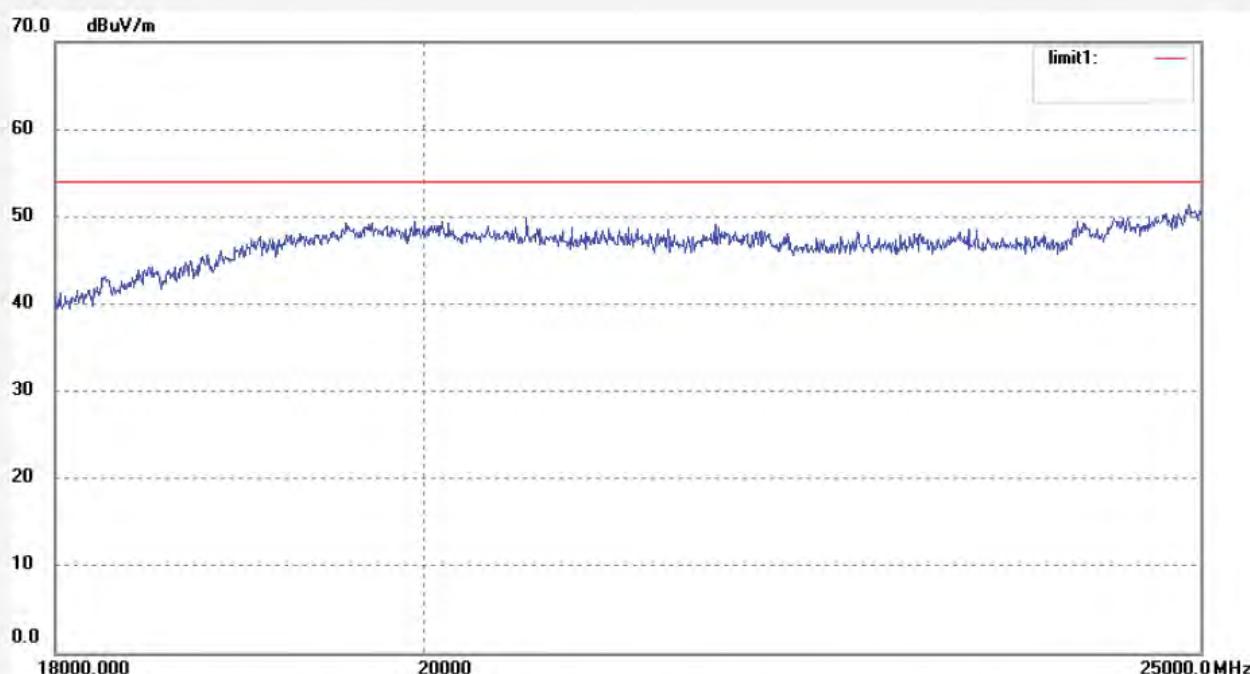

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bdg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #278
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 1 (802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD
 Note: Report No.:ATE20121579

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/08/03
 Time: 09:14:41
 Engineer Signature: Ricky
 Distance: 3m

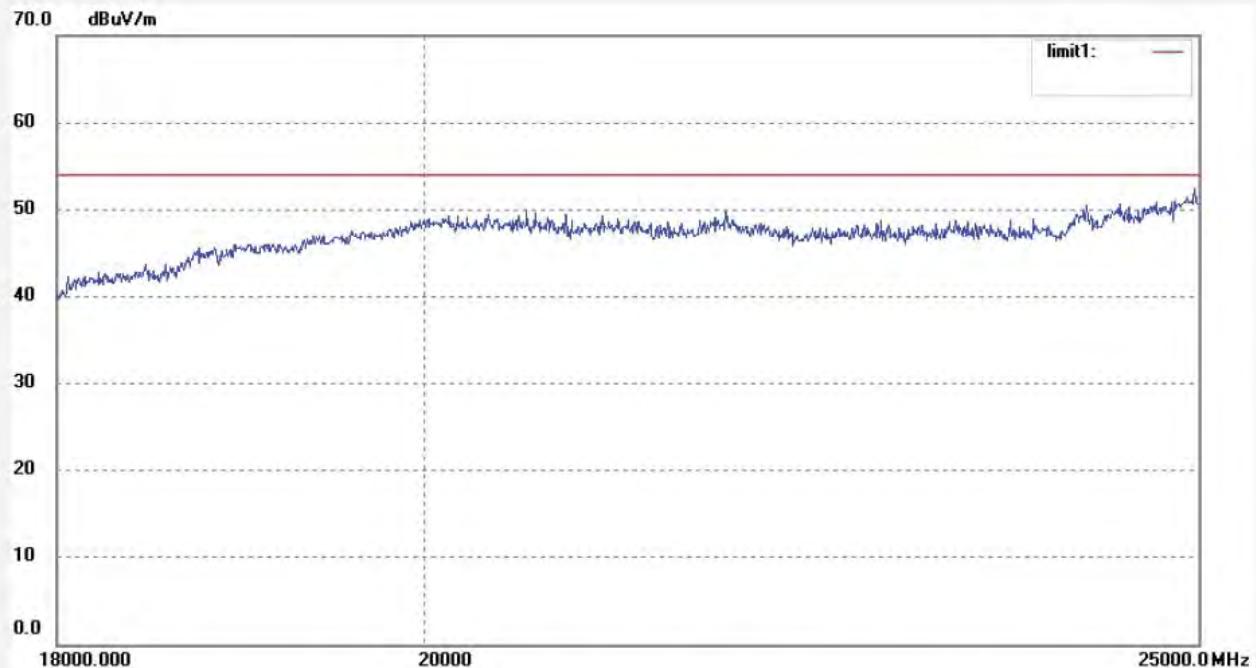

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T#279
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 3 (802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/08/03
 Time: 09:52:09
 Engineer Signature: Ricky
 Distance: 3m

Note: Report No.:ATE20121579

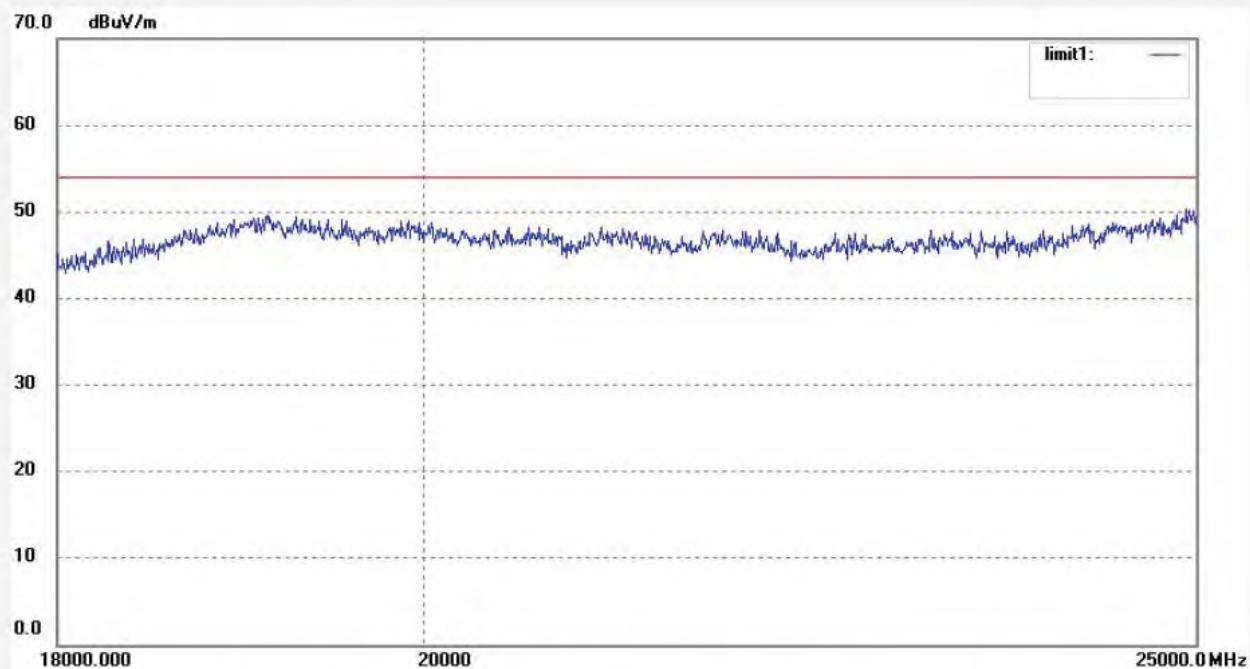


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #280	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	09:56:43
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 3 (802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

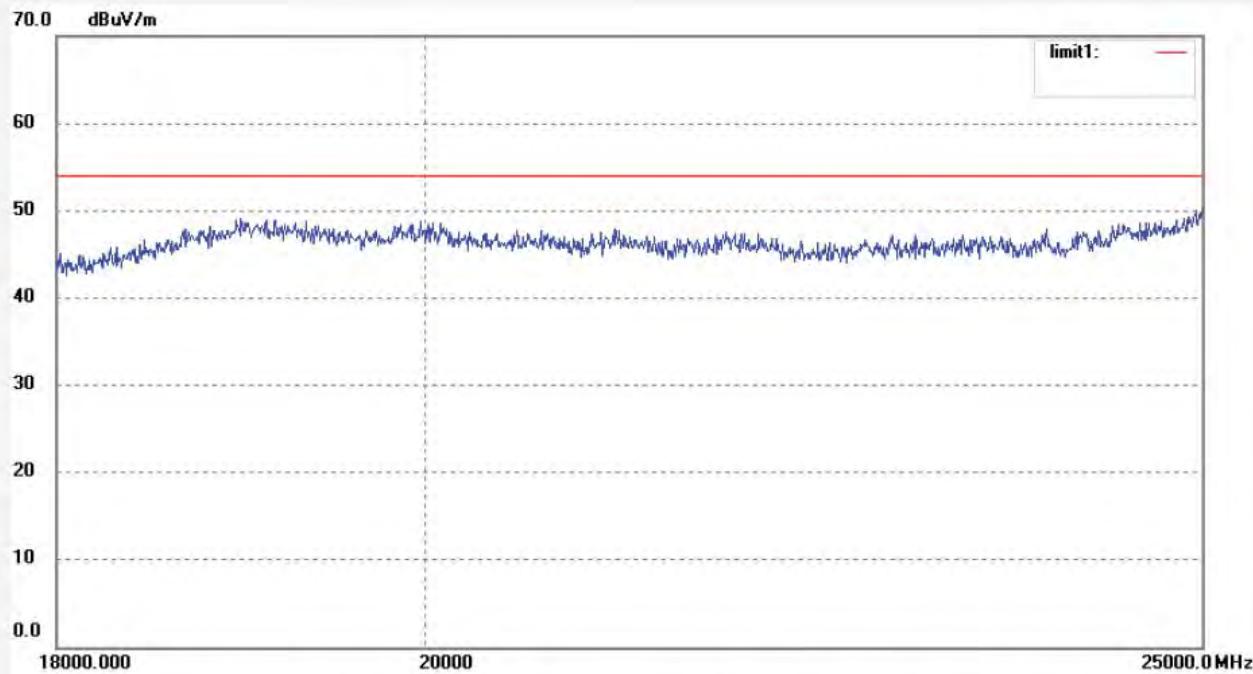


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #281	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	10:01:19
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 6 (802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

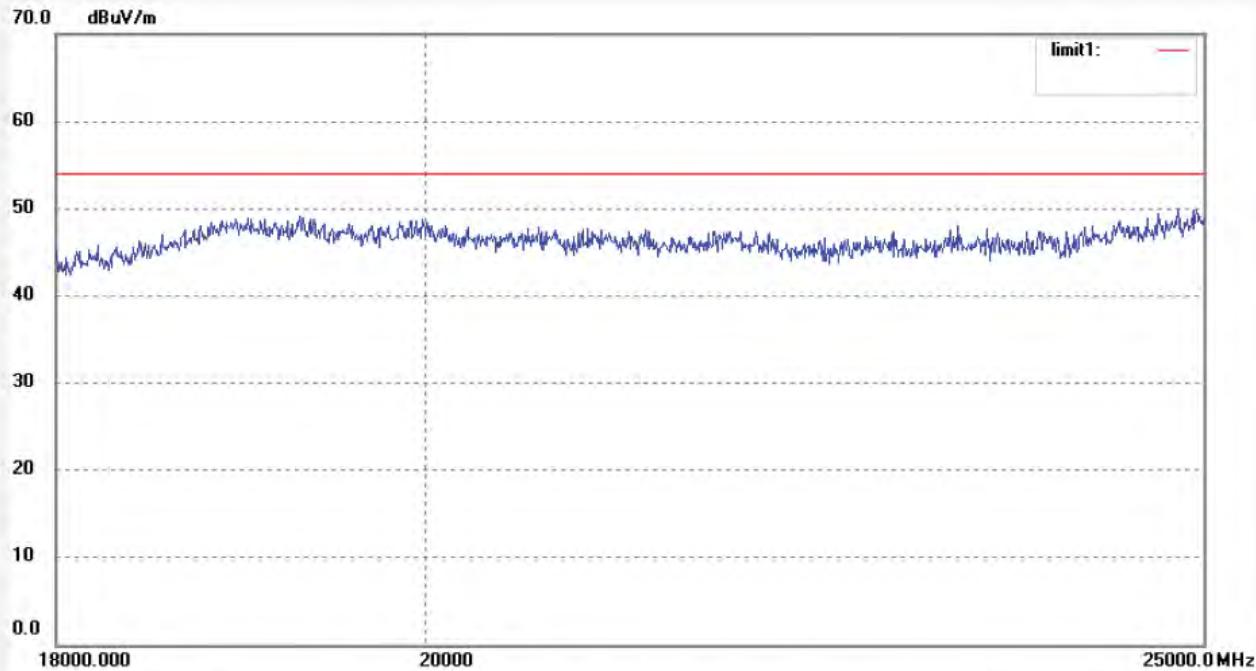


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	T #282	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	10:05:30
EUT:	HANNSpad	Engineer Signature:	Ricky
Mode:	TX Channel 6 (802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

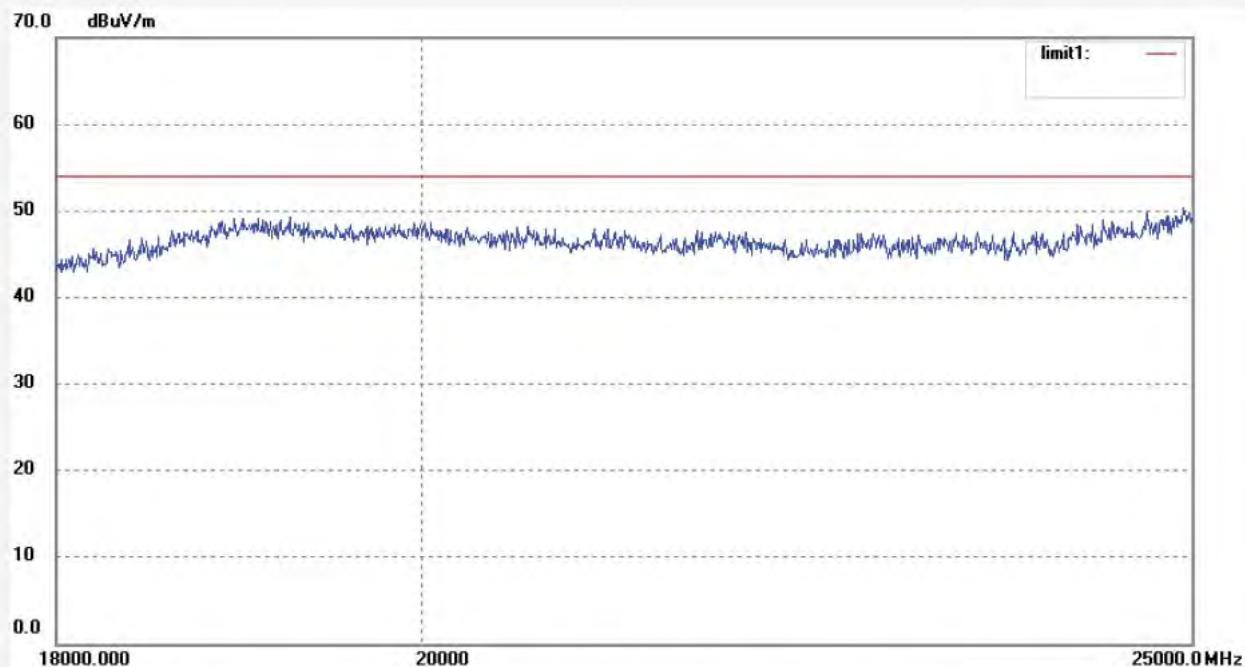

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #283
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: 10 inch Tablet PC
 Mode: TX Channel 9 (802.11n)
 Model: TB1082B
 Manufacturer: GLOBAL CIRCUT(SHENZHEN)CO.,LTD

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/08/03
 Time: 10:10:41
 Engineer Signature: Ricky
 Distance: 3m

Note: Report No.:ATE20121579

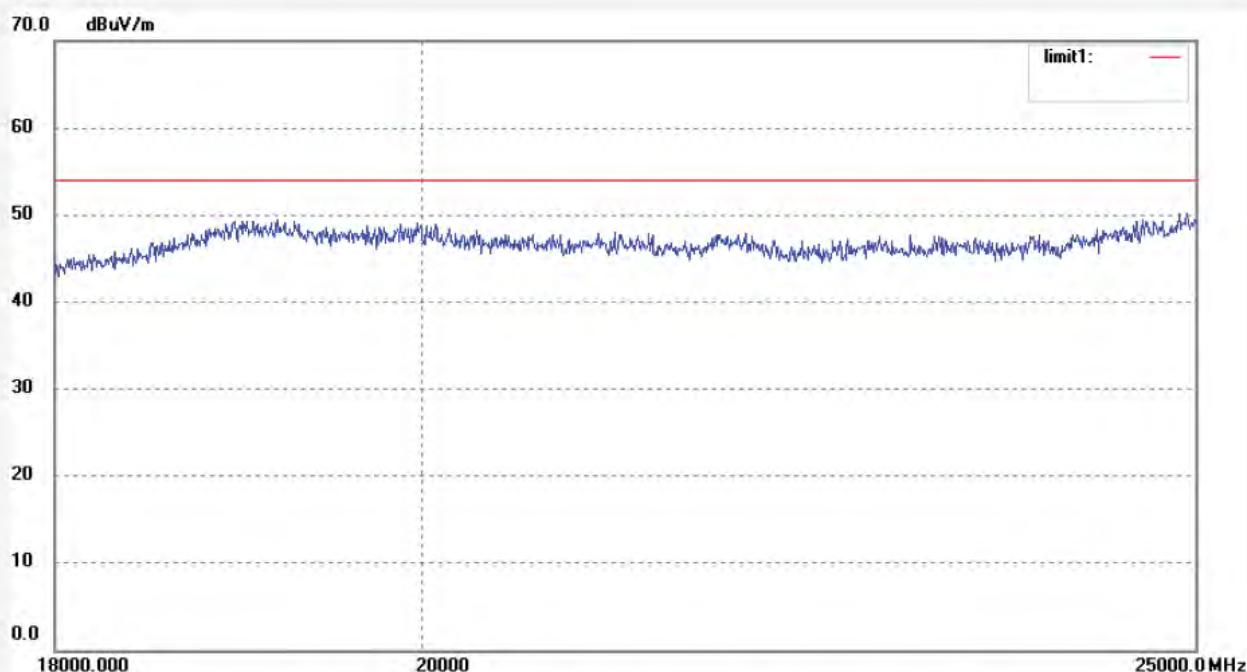


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396


Job No.:	T #284	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/08/03
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	10:15:08
EUT:	10 inch Tablet PC	Engineer Signature:	Ricky
Mode:	TX Channel 9 (802.11n)	Distance:	3m
Model:	TB1082B		
Manufacturer:	GLOBAL CIRCUT(SHENZHEN)CO.,LTD		
Note:	Report No.:ATE20121579		

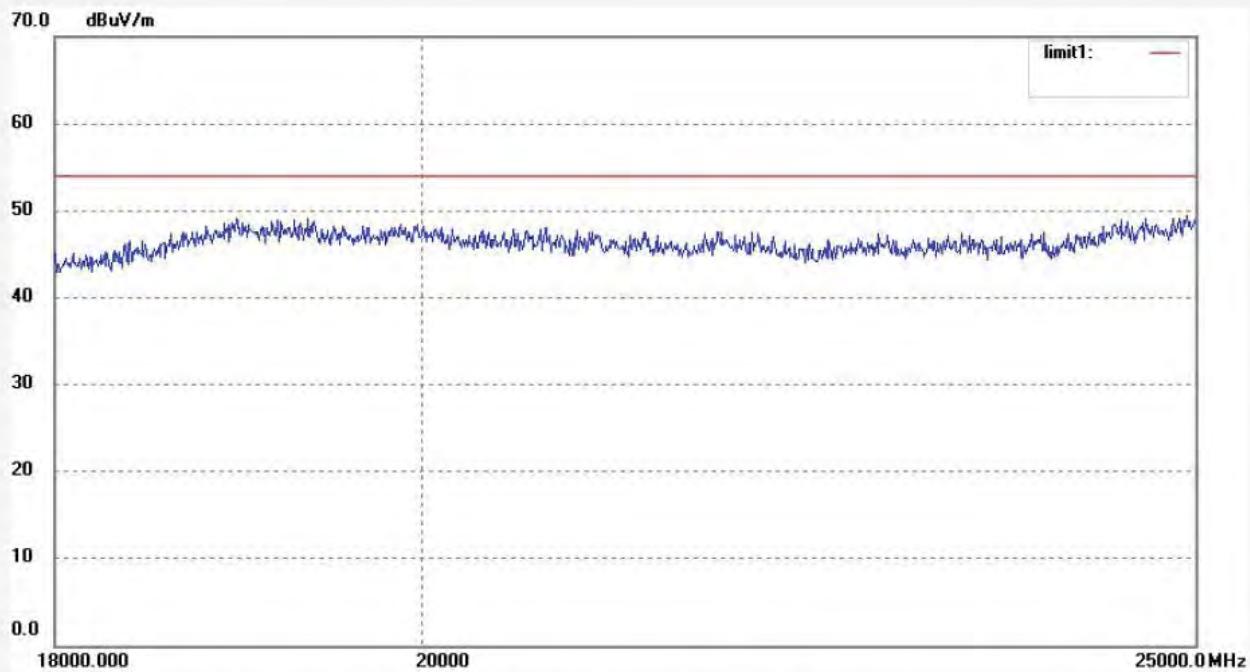

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup

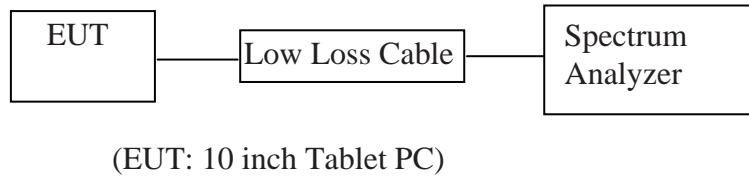

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. 10 inch Tablet PC (EUT)

Model Number	:	TB1082B
Serial Number	:	N/A
Manufacturer	:	GLOBAL CIRCUIT(SHENZHEN),LTD

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.



10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result



Pass.

The spectrum analyzer plots are attached as below.



TX 802.11b Channel Low 2412MHz

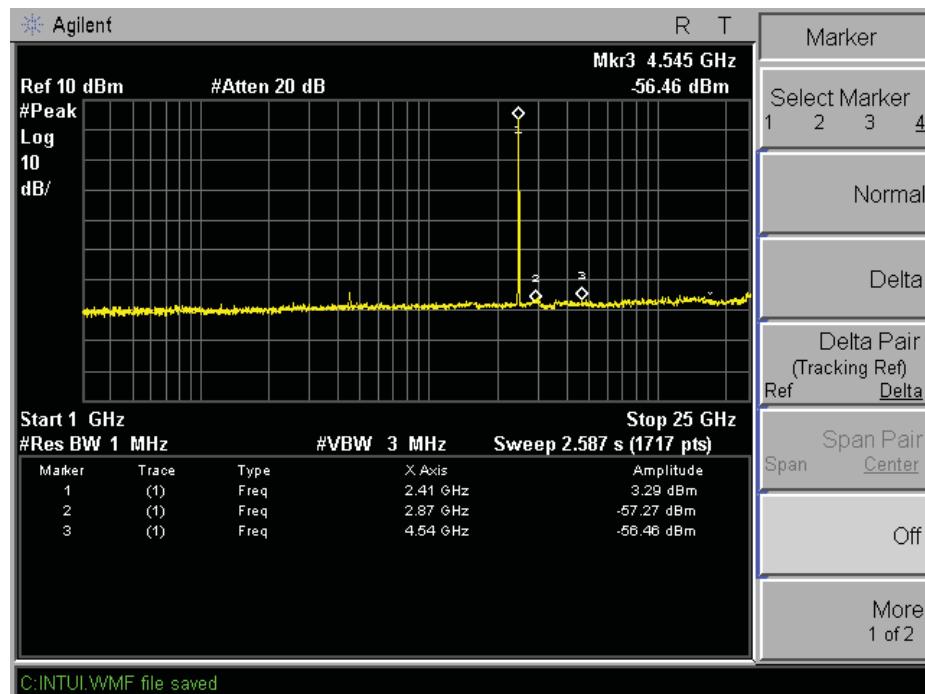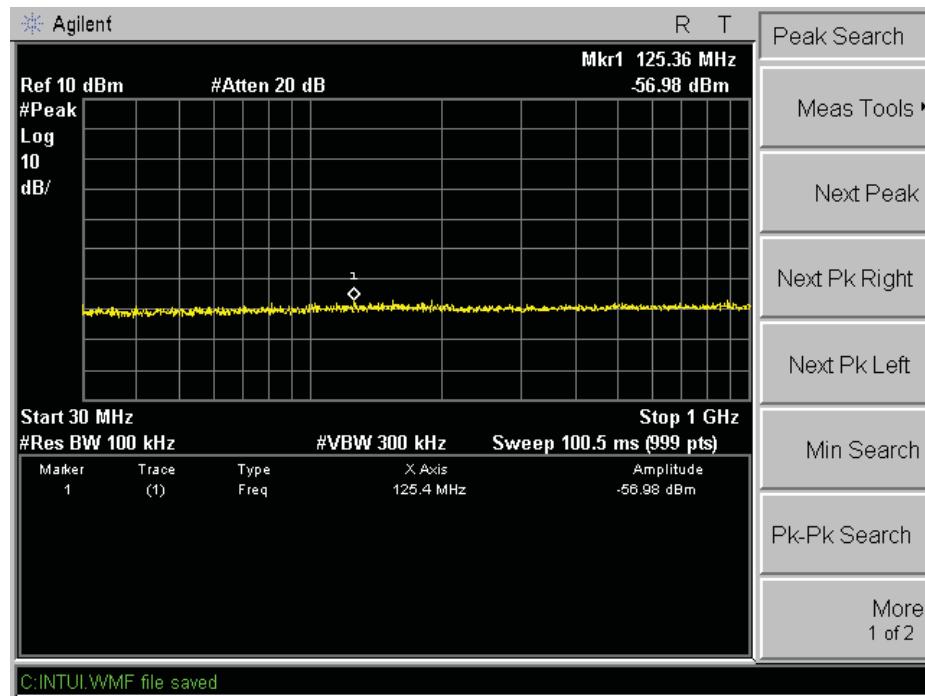



TX 802.11b Channel Middle 2437MHz

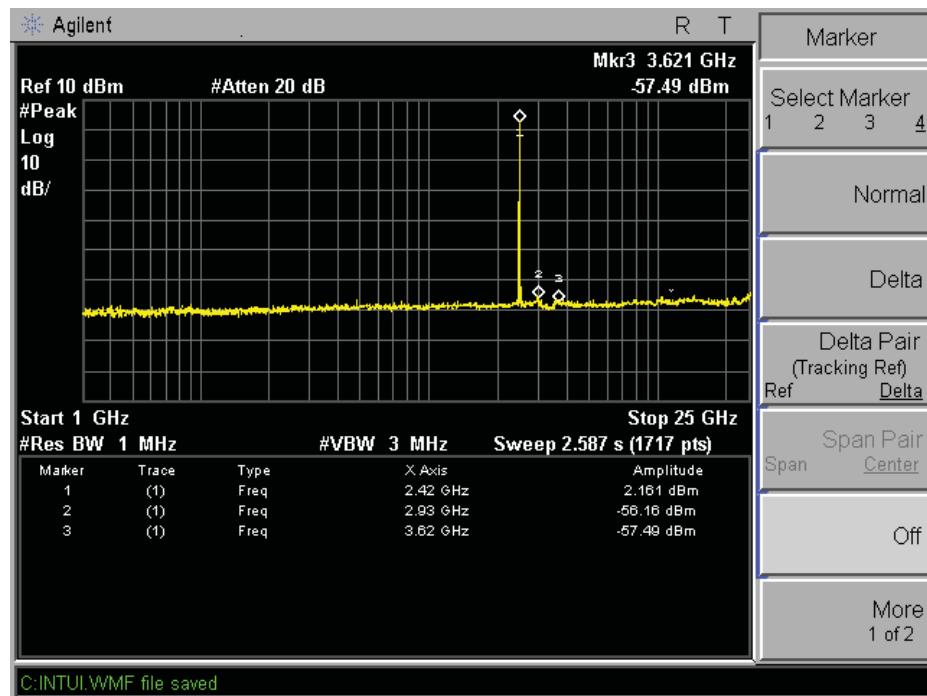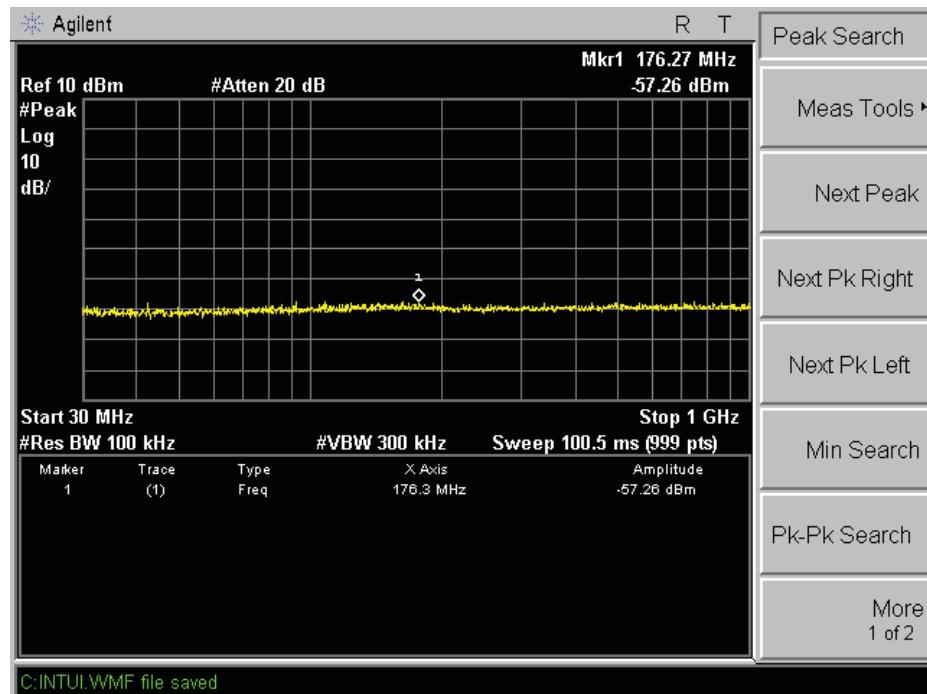



TX 802.11b Channel High 2462MHz

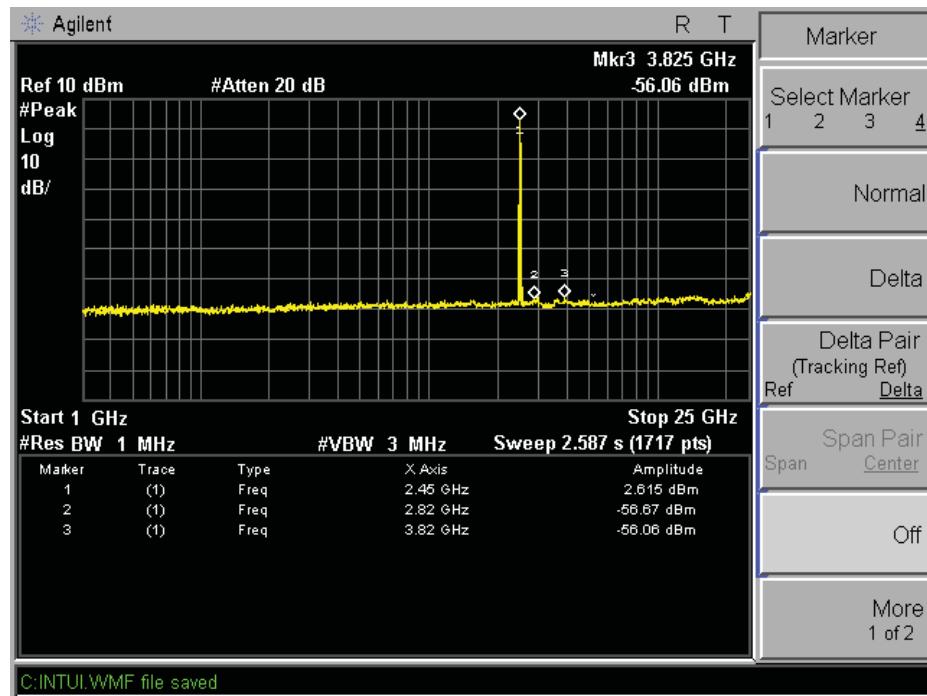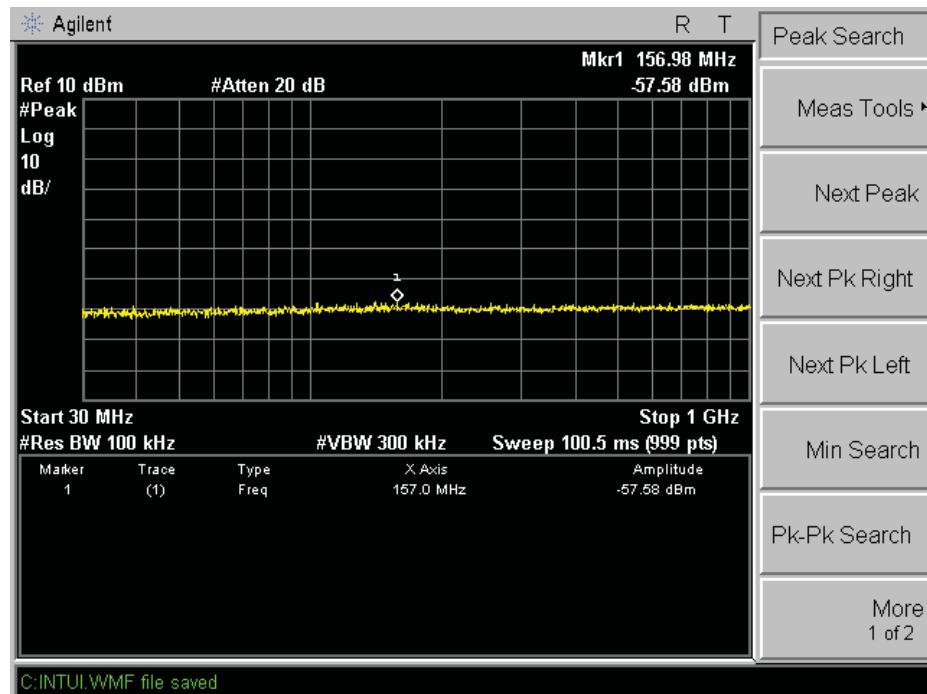



TX 802.11g Channel Low 2412MHz

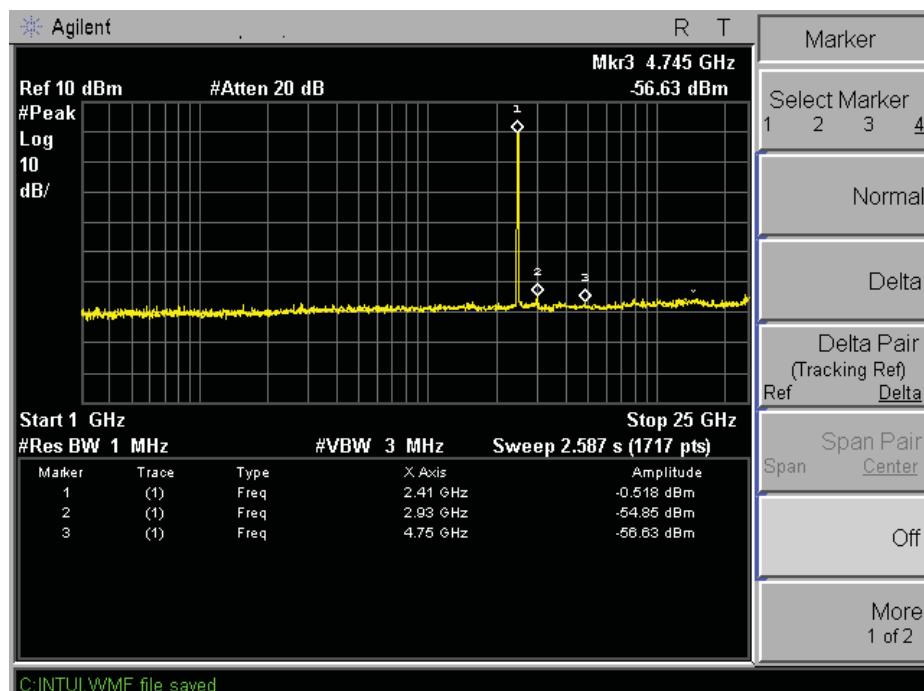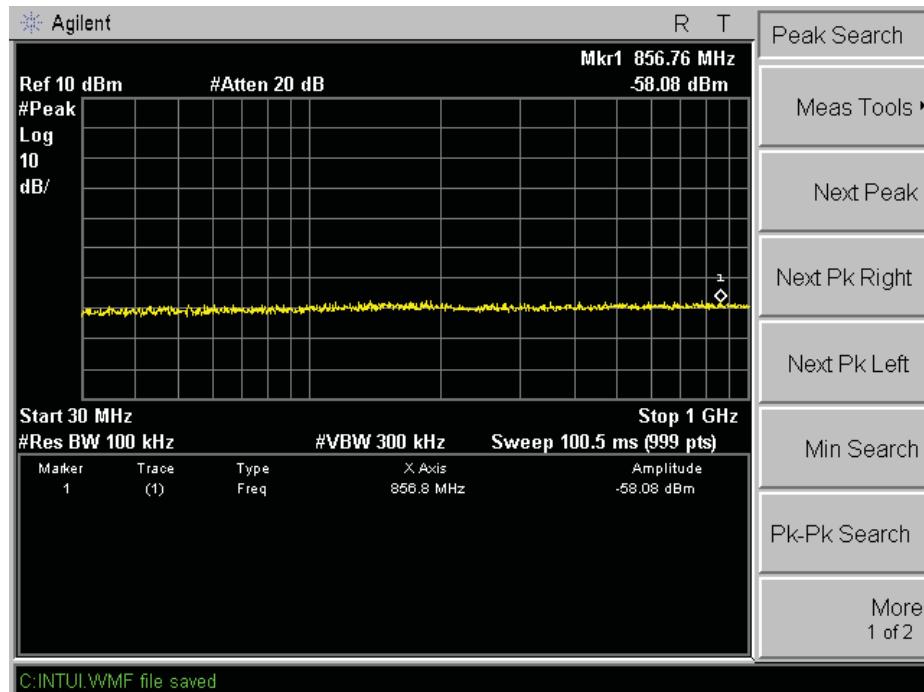



TX 802.11g Channel Middle 2437MHz

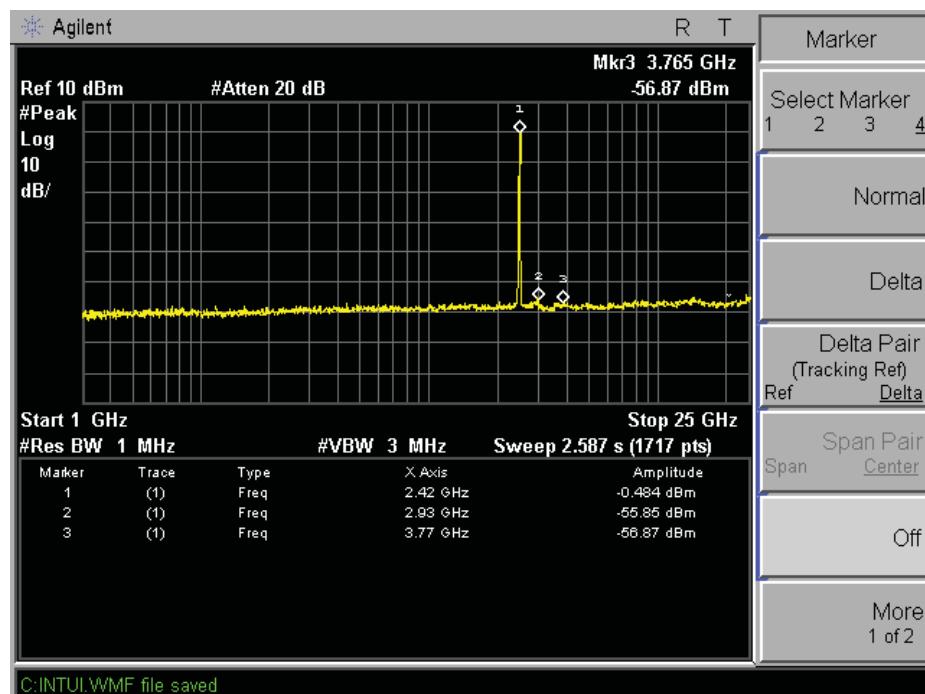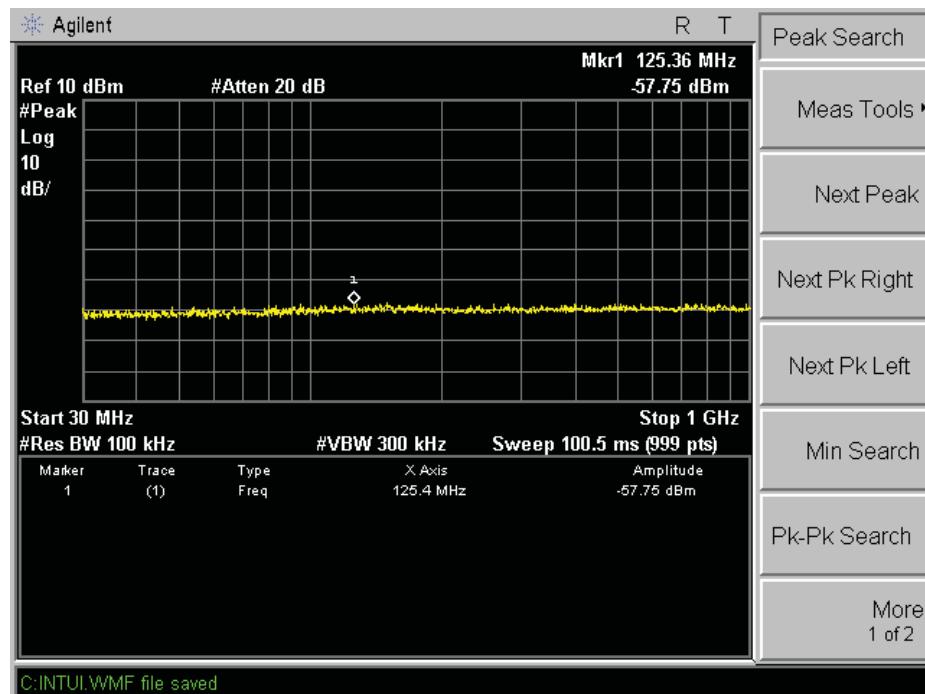



TX 802.11g Channel High 2462MHz

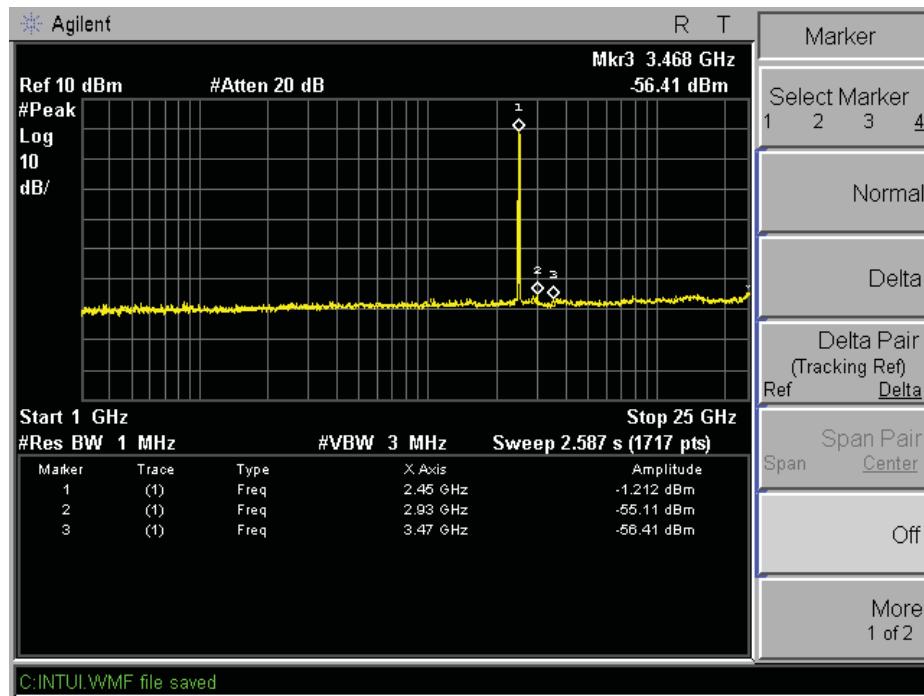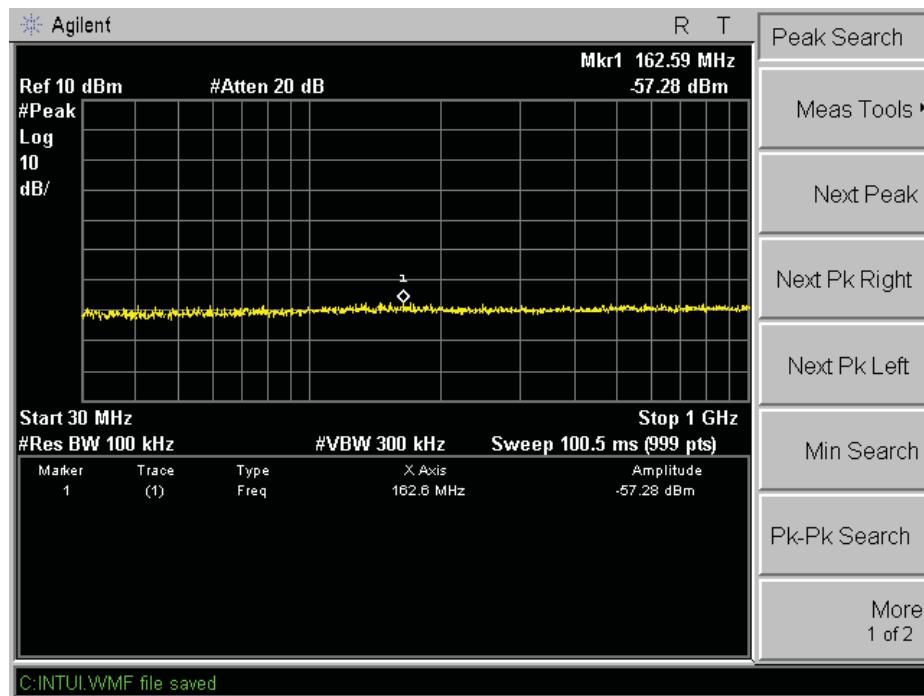



TX 802.11n Channel Low 2412MHz (20MHz)

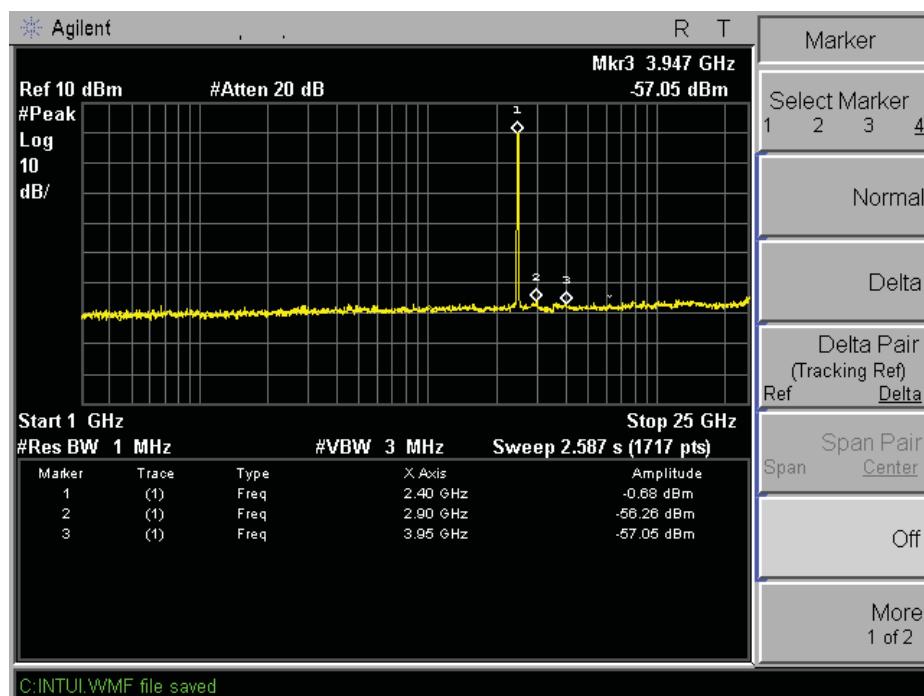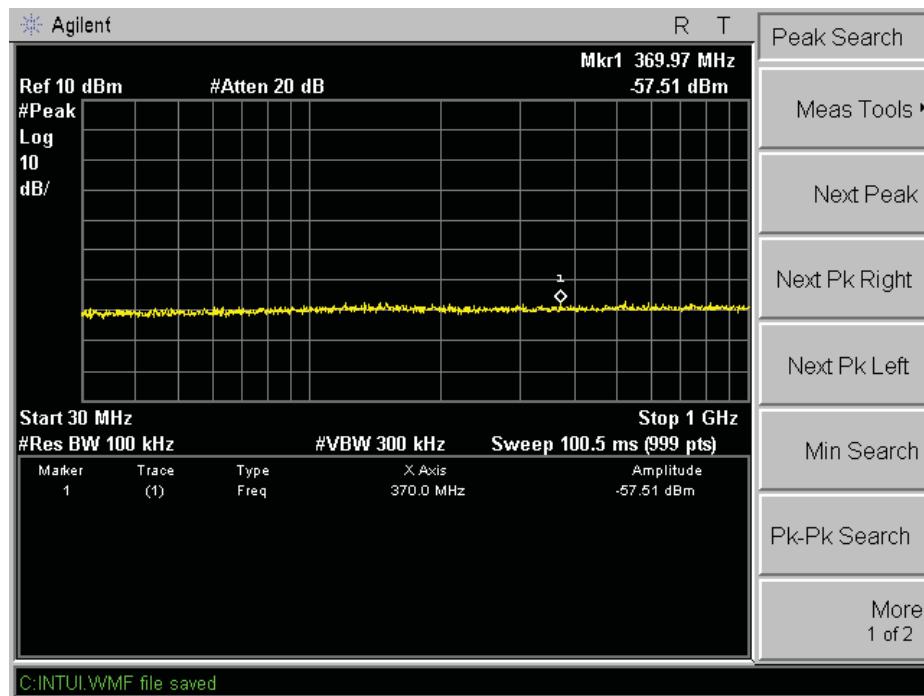



TX 802.11n Channel Middle 2437MHz (20MHz)

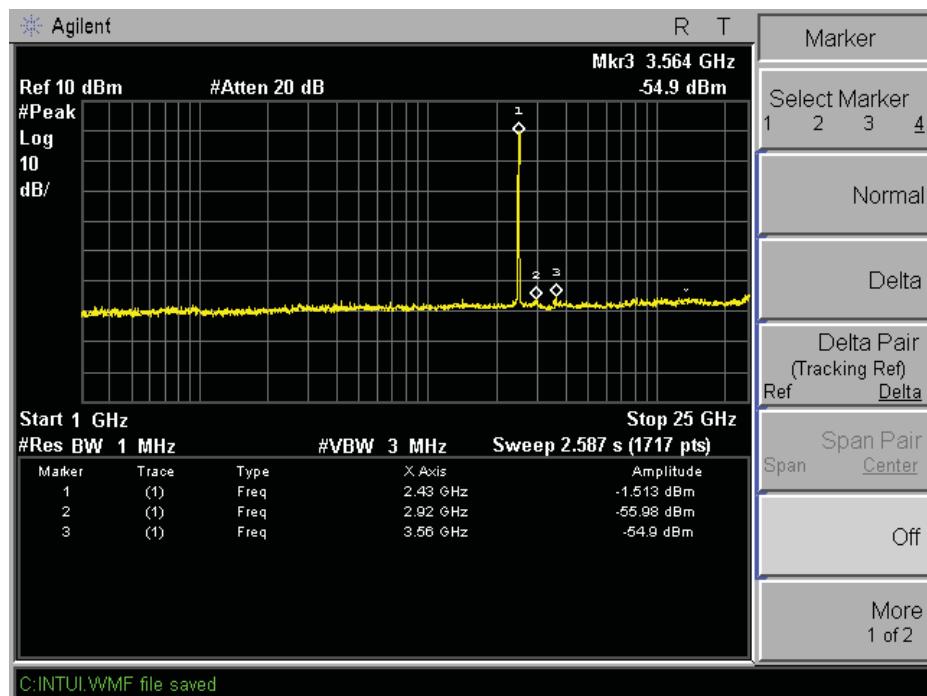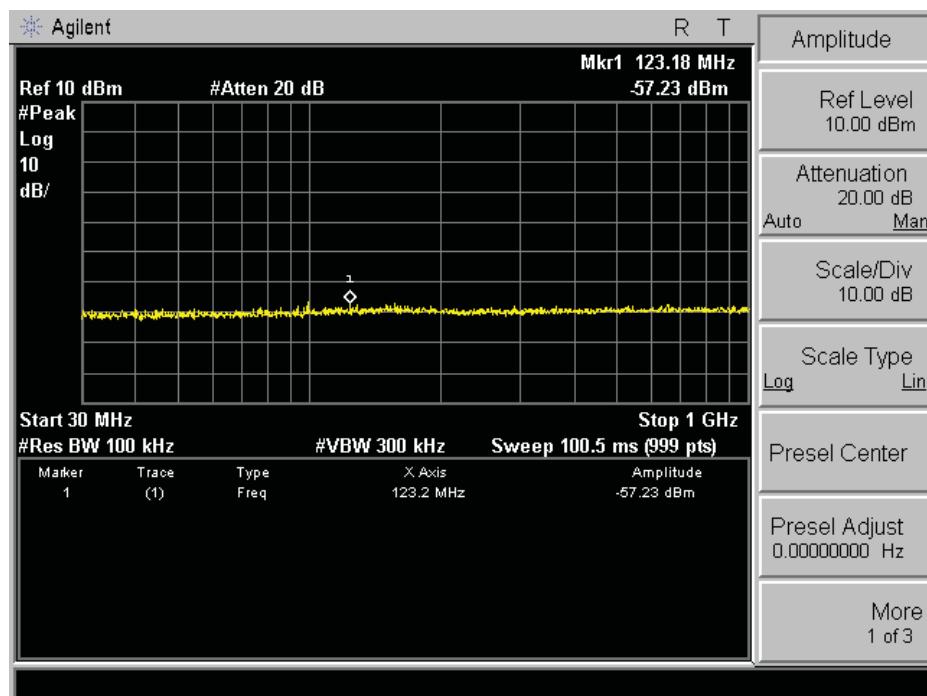



TX 802.11n Channel High 2462MHz (20MHz)

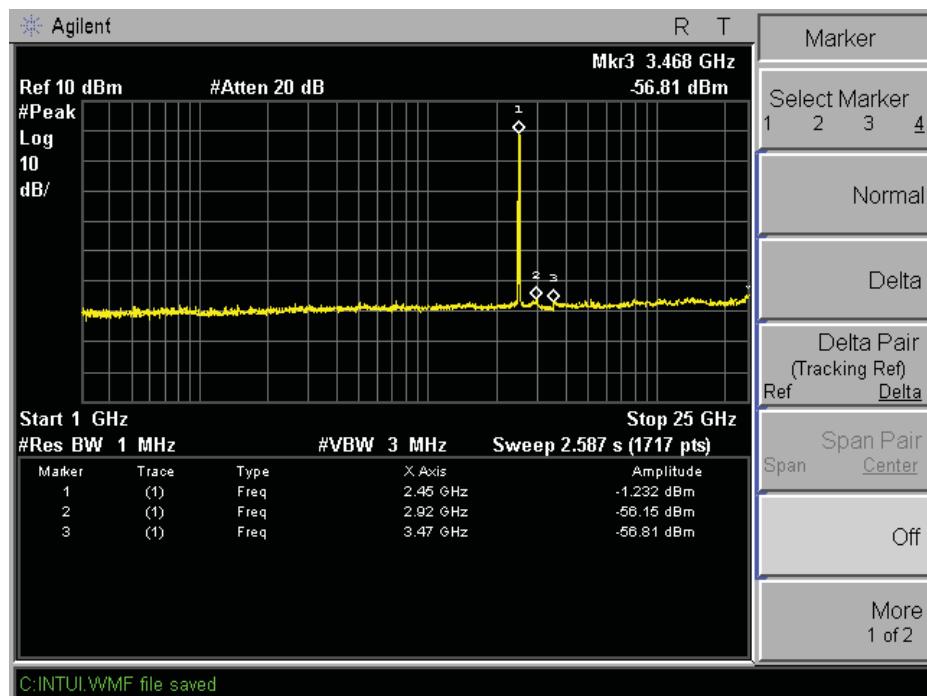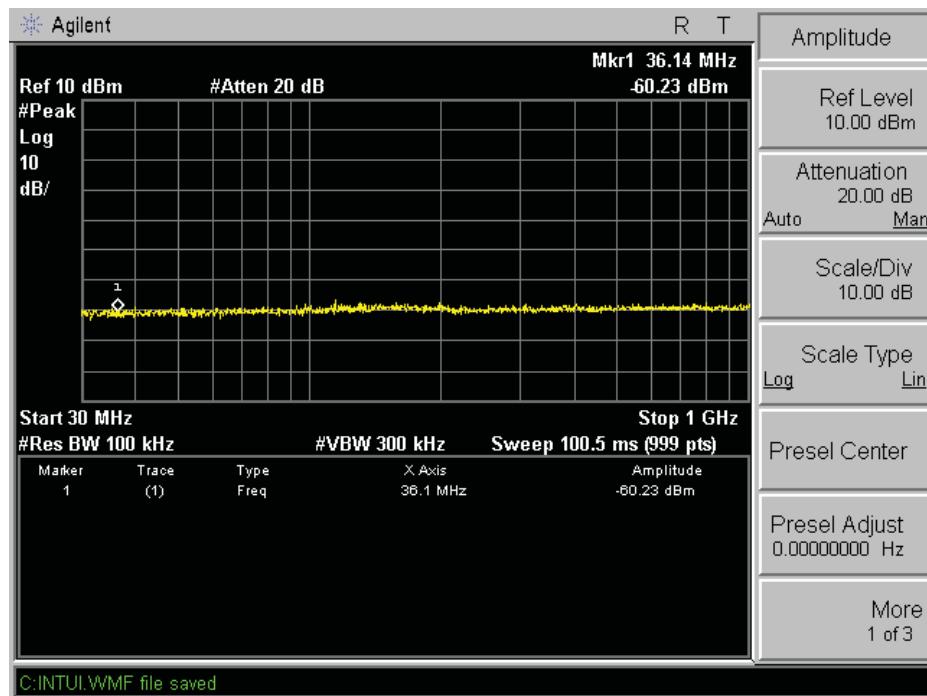



TX 802.11n Channel Low 2422MHz (40MHz)

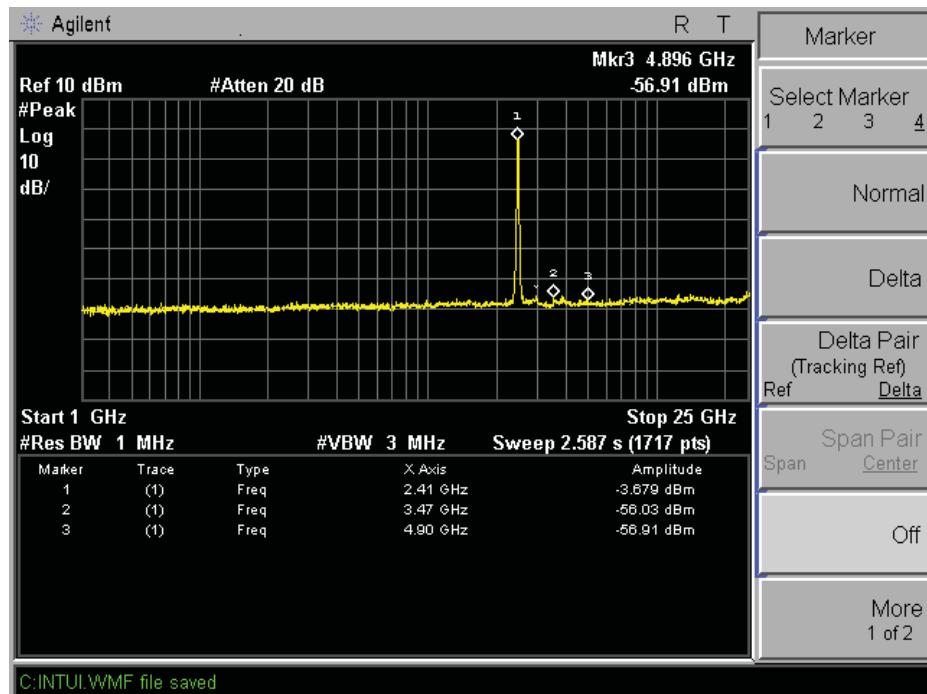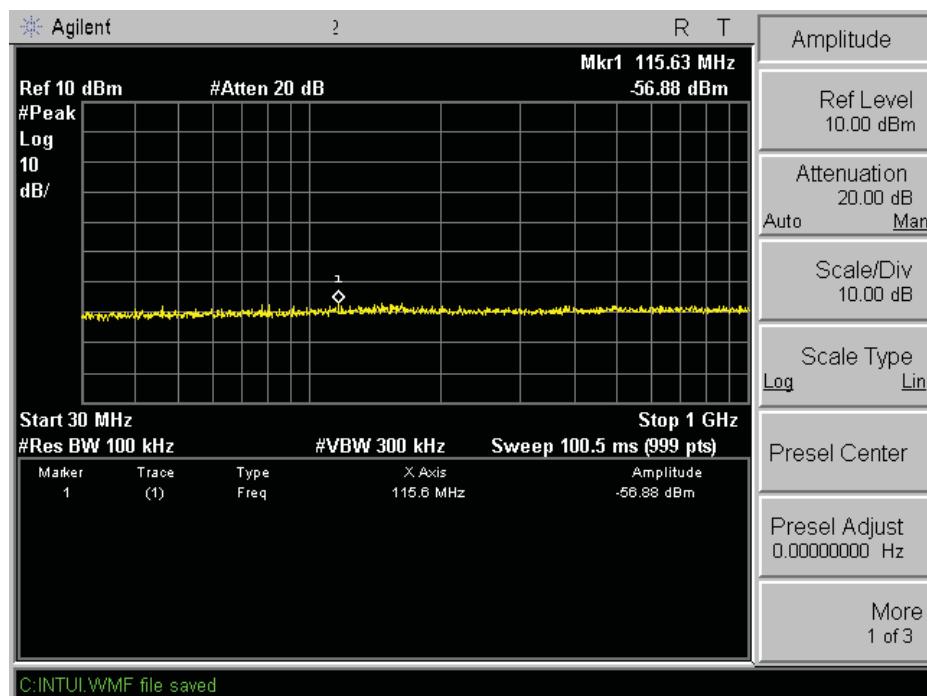

TX 802.11n Channel Middle 2437MHz (40MHz)

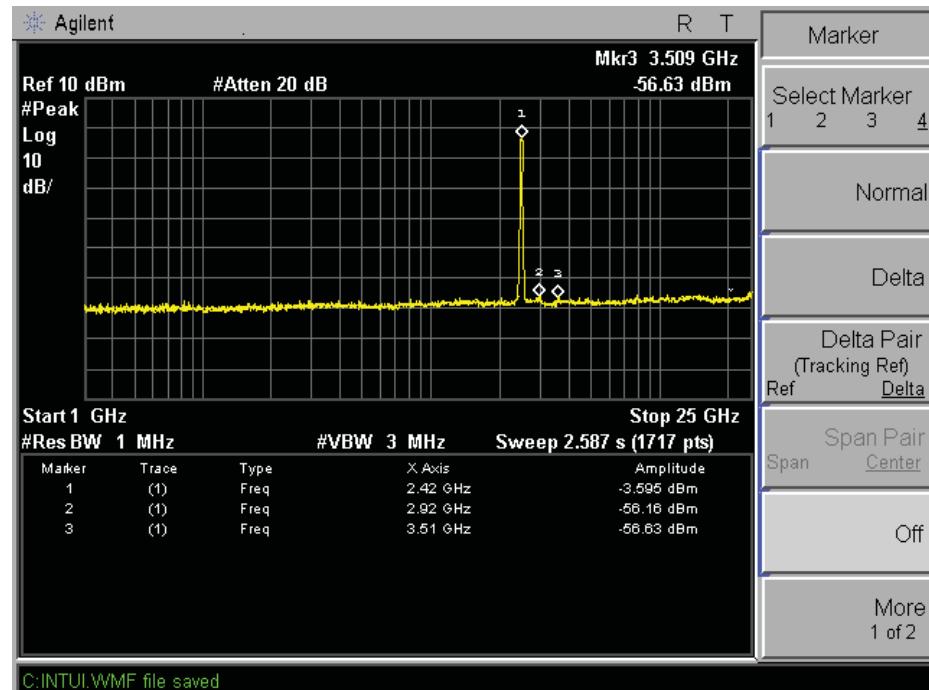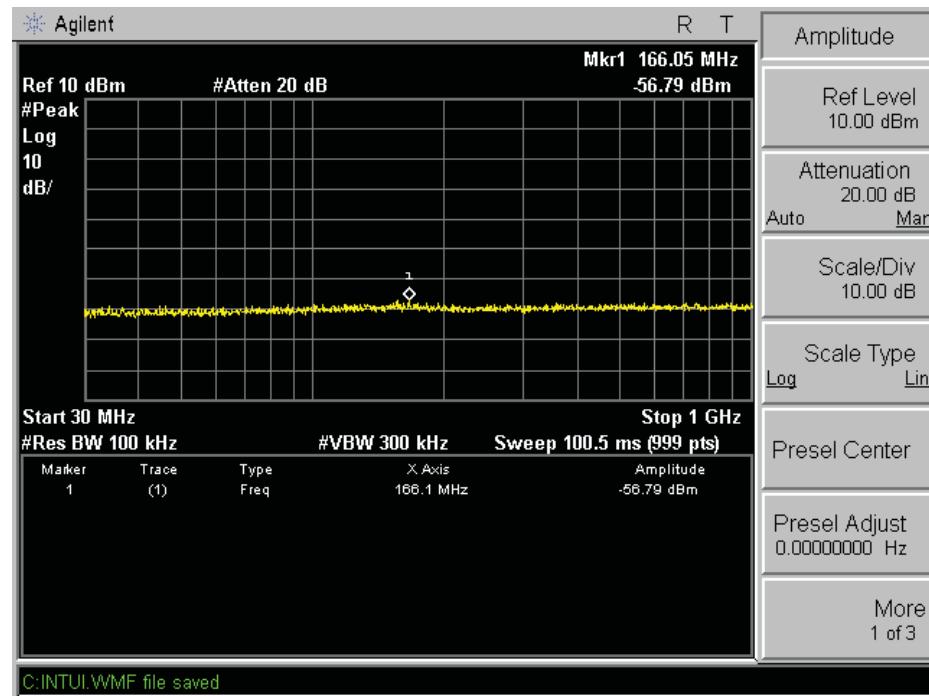

TX 802.11n Channel High 2452MHz (40MHz)

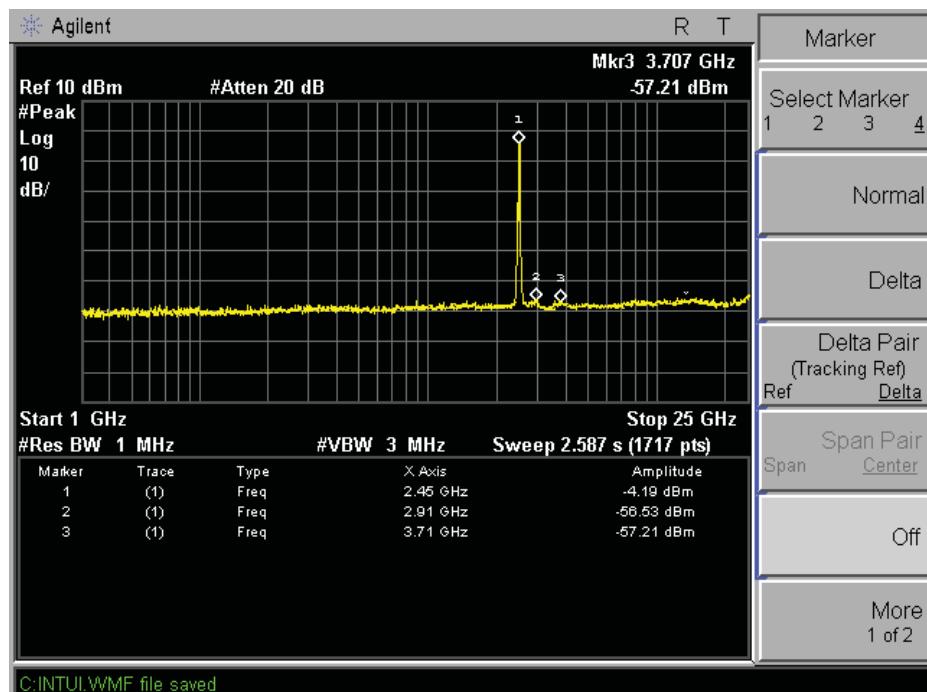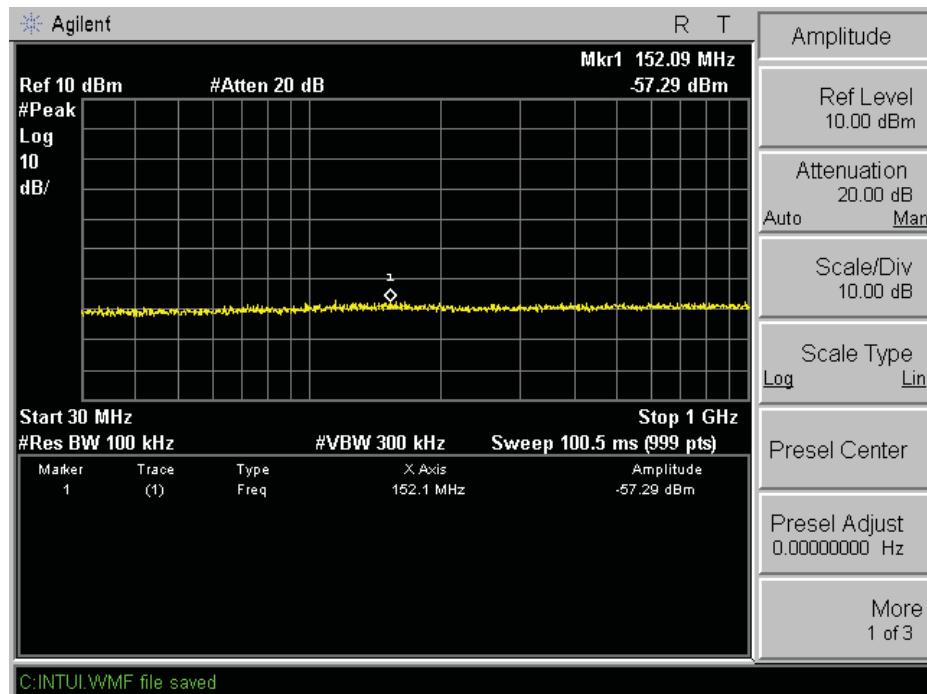


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

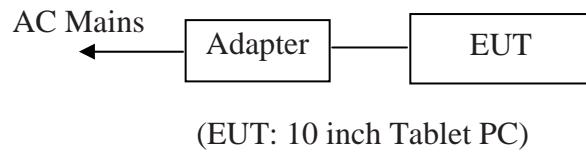

11.1.2.Shielding Room Test Setup Diagram

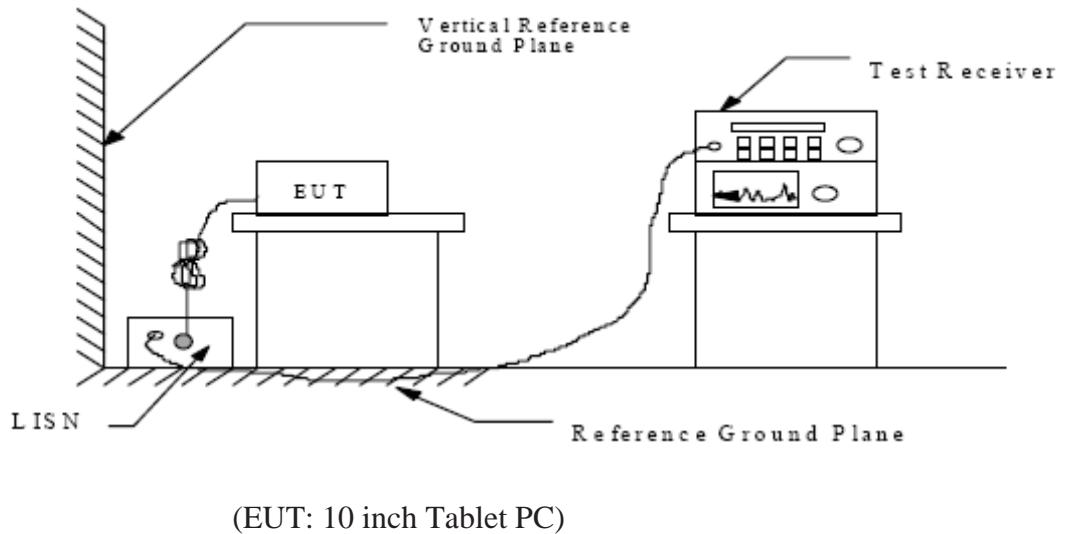

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1. 10 inch Tablet PC (EUT)

Model Number	:	TB1082B
Serial Number	:	N/A
Manufacturer	:	GLOBAL CIRCUIT(SHENZHEN).,LTD

11.4.Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in TX (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150 kHz to 30MHz is checked.

Date of Test:	Jul 29, 2012	Temperature:	25°C
EUT:	10 inch Tablet PC	Humidity:	50%
Model No.:	TB1082B	Power Supply:	AC 120V/60Hz
Test Mode:	operation	Test Engineer:	Ricky

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Line
0.205368	55.70	63	7.3	QP	Neutral
0.306247	46.90	60	13.1	QP	
1.094562	41.30	56	14.7	QP	
0.212563	43.80	53	9.2	AV	
0.524573	31.90	46	14.1	AV	
2.541236	30.50	46	15.5	AV	
0.205368	53.80	63	9.2	QP	Live
0.859356	44.90	56	11.1	QP	
1.142519	46.30	56	9.7	QP	
0.208253	42.90	53	10.1	AV	
0.534356	35.70	46	10.3	AV	
1.153247	34.20	46	11.8	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC Part 15.207

EUT: 10 inch Tablet PC EUT:TB1082B
 Manufacturer: GLOBAL CIRCUIT(SHENZHEN)CO.,LTD
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 7/29/2012 / 3:15:31PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description:			SUB STD VTERM2 1.70		
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.
150.0 kHz	30.0 MHz	0.8 %	QuasiPeak	1.0 s	9 kHz
			Transducer NSLK8126 2008		
			Average		

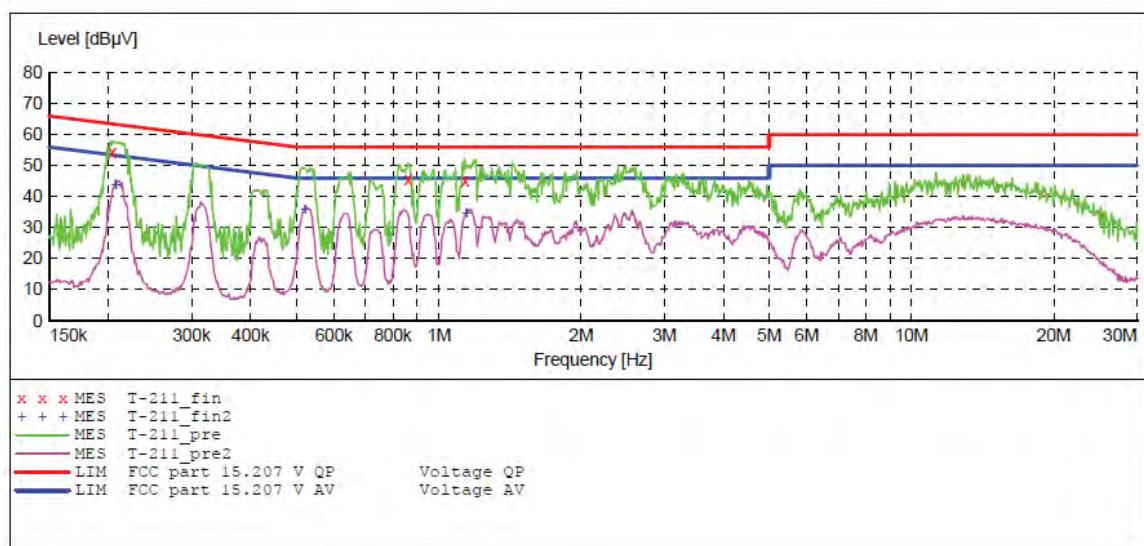

MEASUREMENT RESULT: "T-211_fin"

7/29/2012 3:19PM

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dBμV	dB	dBμV	dB			
0.203784	53.80	11.3	63	9.2	QP	L1	GND
0.859356	44.90	11.9	56	11.1	QP	L1	GND
1.142519	46.30	11.8	56	9.7	QP	L1	GND

MEASUREMENT RESULT: "T-211_fin2"

7/29/2012 3:19PM

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dBμV	dB	dBμV	dB			
0.208253	42.90	11.3	53	10.1	AV	L1	GND
0.534356	35.70	12.0	46	10.3	AV	L1	GND
1.153247	34.20	11.8	46	11.8	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC Part 15.207

EUT: 10 inch Tablet PC EUT:TB1082B
 Manufacturer: GLOBAL CIRCUIT(SHENZHEN) CO., LTD
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 7/29/2012 / 3:30:35PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

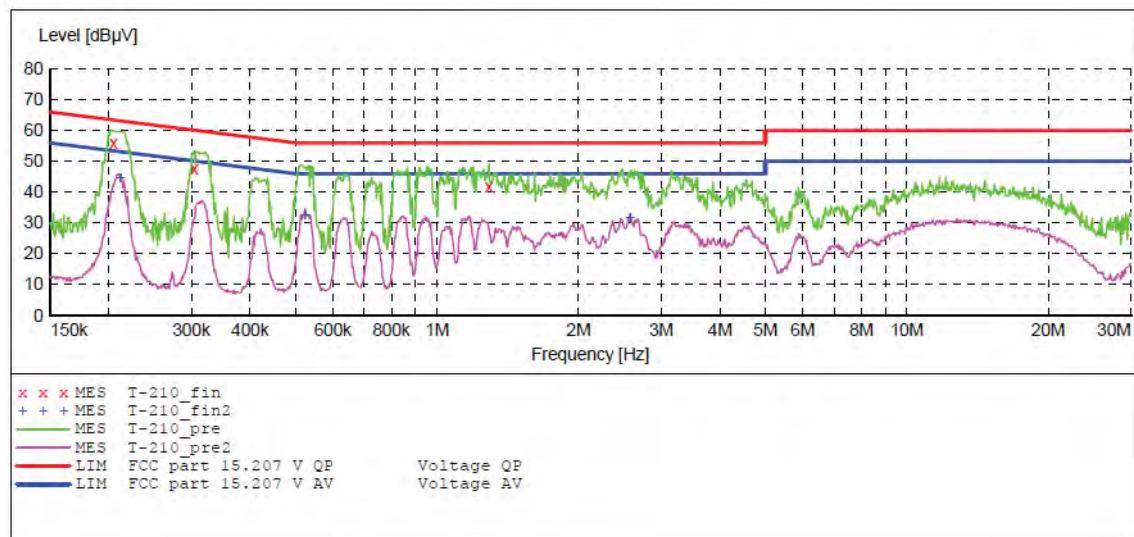

MEASUREMENT RESULT: "T-210_fin"

7/29/2012 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.205368	55.70	11.3	63	7.3	QP	N	GND
0.306247	46.90	11.6	60	13.1	QP	N	GND
1.294562	41.30	11.8	56	14.7	QP	N	GND

MEASUREMENT RESULT: "T-210_fin2"

7/29/2012 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.212563	43.80	11.3	53	9.2	AV	N	GND
0.524573	31.90	12.0	46	14.1	AV	N	GND
2.541236	30.50	11.6	46	15.5	AV	N	GND

12. ANTENNA REQUIREMENT

12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

