


Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N:DAM-A3-H-N0-000-04-36	INPAQ	PIFA	Cable : 212 mm Connector:SMA/IPEX	2400-2483.5	2.24	0.46	2.0	2.0 Max
				5150-5350	1.99	-0.71	2.5	2.5 Max
				5470-5725	1.58	-1.23	2.5	2.5 Max
				5725-5850	1.79	-1.16	2.0	2.0 Max


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.24

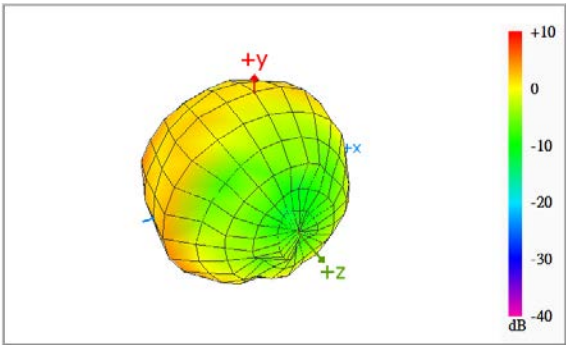


Max Antenna 3D Radiation Pattern 5150-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.99

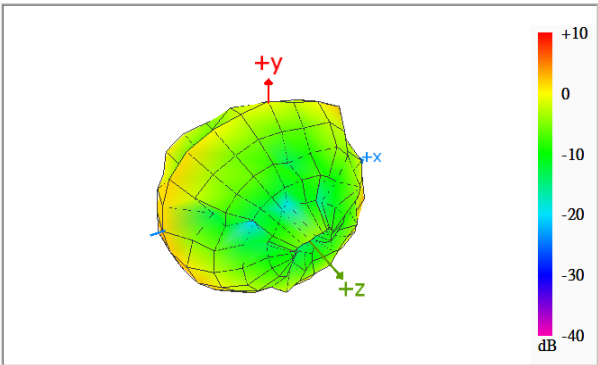


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.58

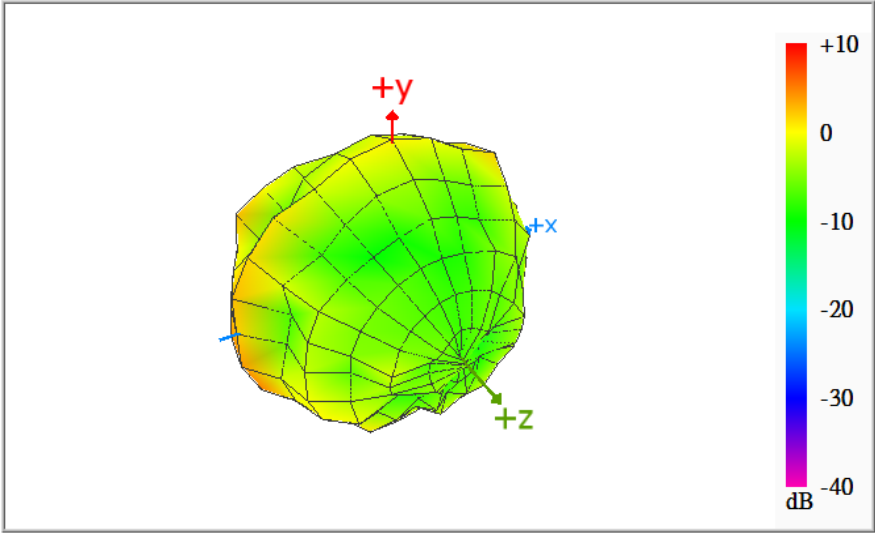

Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.79

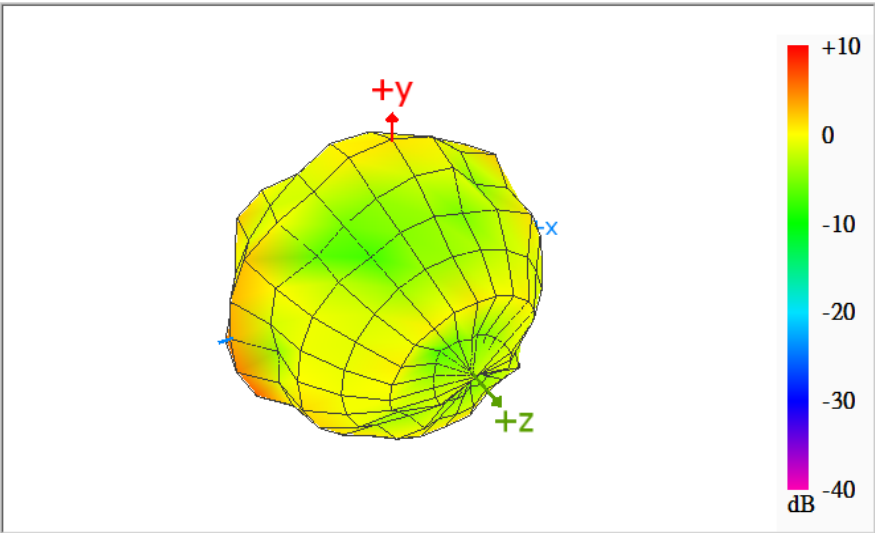



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

■ 350 苗栗縣竹南鎮公義里 11 鄰科義街 11 號 □ 408 台中市南屯區工業二十路 17 號

電話：037-585-555

電話：04-8359-9871

傳真：037-585-511

傳真：04-2359-7548

No. 11, Ke-Yi St., Chunan, Miaoli 350,
Taiwan, R.O.C.

No. 17, 20th Road, Taichung Industrial
Park, Taichung Taiwan 408, R.O.C

Tel. : +886-37-585-555

Tel. : +886-4-23599871

Fax : +886-37-585-511

Fax : +886-4-23597548