

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 101 von 199
Page 101 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB) μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB) μ V/m)	Polarity
1440.000000	47.3	-14.7	26.7	74.0	V
1559.000000	46.3	-14.1	27.7	74.0	V
3359.000000	42.5	-8.0	31.5	74.0	V
4874.000000	53.9	-5.6	20.1	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dB) μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB) μ V/m)	Polarity
1440.000000	36.5	-14.7	17.5	54.0	V
1559.000000	35.2	-14.1	18.8	54.0	V
3359.000000	33.2	-8.0	20.8	54.0	V
4874.000000	47.5	-5.6	6.5	54.0	V

Date: 9/28/2009 - Time: 10:07:39 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 102 von 199
Page 102 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.a, mid channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	1GHz - 18GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

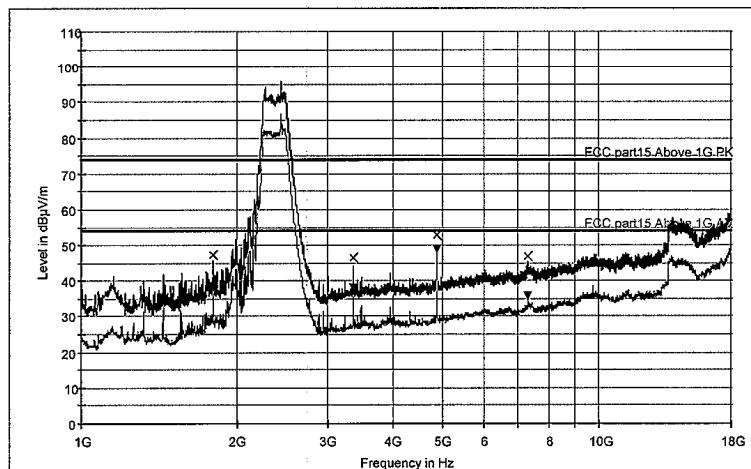

Date: 9/28/2009 - Time: 10:15:18 AM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 103 von 199
Page 103 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1799.000000	47.3	-13.1	26.7	74.0	H
3359.000000	46.5	-8.0	27.5	74.0	H
4874.000000	52.8	-5.6	21.2	74.0	H
7311.000000	46.9	0.4	27.1	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1799.000000	38.4	-13.1	15.6	54.0	H
3359.000000	38.1	-8.0	15.9	54.0	H
4874.000000	48.8	-5.6	5.2	54.0	H
7311.000000	35.6	0.4	18.4	54.0	H

Date: 9/28/2009 - Time: 10:15:18 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 104 von 199
Page 104 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, mid channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq. : 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No. 17013660 001
 Result: Pass
 Comment: Horizontal

Subrange 1

Frequency Range: 18GHz - 26GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

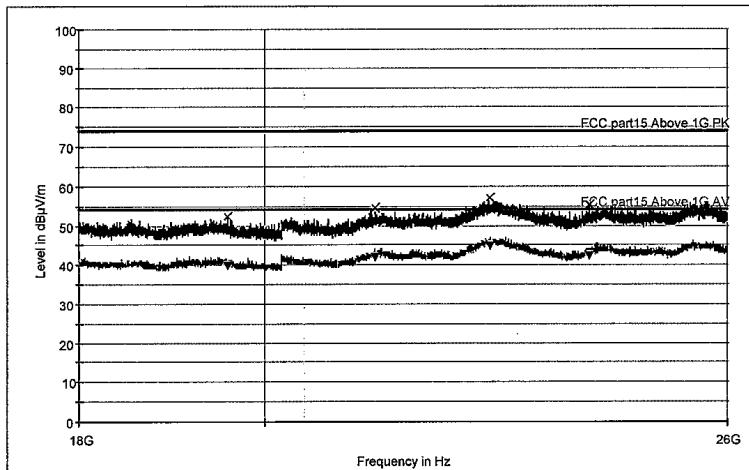

Date: 9/28/2009 - Time: 1:44:38 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 105 von 199
Page 105 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19581.000000	52.3	6.2	21.7	74.0	H
21299.000000	54.6	7.5	19.4	74.0	H
22735.000000	57.1	10.4	16.9	74.0	H
24050.000000	55.1	7.5	18.9	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19581.000000	39.7	6.2	14.3	54.0	H
21299.000000	41.8	7.5	12.2	54.0	H
22735.000000	44.8	10.4	9.2	54.0	H
24050.000000	42.4	7.5	11.6	54.0	H

Date: 9/28/2009 - Time: 1:44:38 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 106 von 199
Page 106 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.a, mid channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Vertical
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

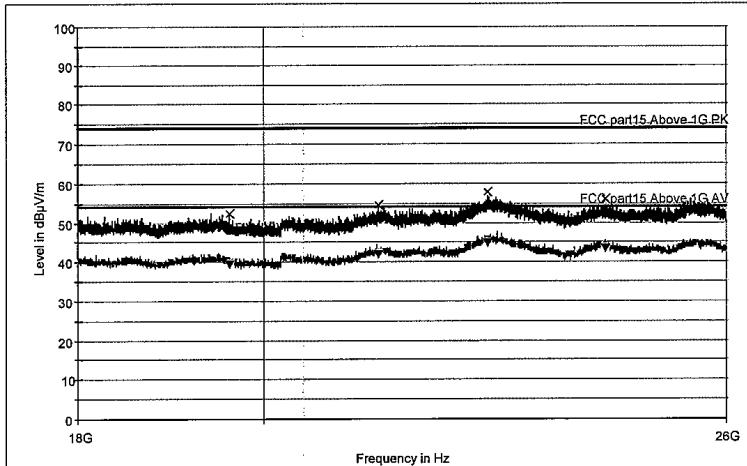

Date: 9/28/2009 - Time: 1:47:58 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 107 von 199
Page 107 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
19625.000000	52.5	6.2	21.5	74.0	V
21353.000000	54.4	7.5	19.6	74.0	V
22706.000000	57.7	10.5	16.3	74.0	V
24275.000000	55.9	7.6	18.1	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
19625.000000	39.4	6.2	14.6	54.0	V
21353.000000	42.0	7.5	12.0	54.0	V
22706.000000	44.7	10.5	9.3	54.0	V
24275.000000	43.2	7.6	10.8	54.0	V

Date: 9/28/2009 - Time: 1:47:58 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 108 von 199
Page 108 of 199

Test Plot of Radiated emissions, Mode A.1.a, High Channel,high rate

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, high channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Horizontal

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

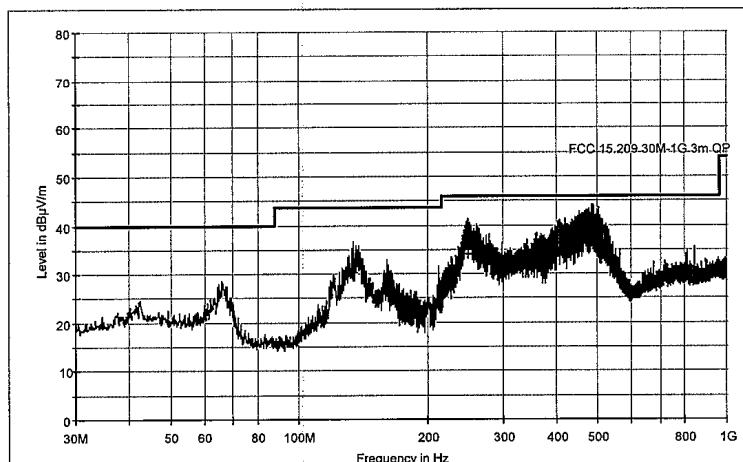

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB µV/m)	Corr. (dB)	Margin (dB)	Limit (dB µV/m)	Polarity
134.000000	30.2	14.5	13.3	43.5	H
248.900000	34.2	13.5	11.8	46.0	H
419.100000	33.2	17.9	12.8	46.0	H
482.800000	37.1	19.1	8.9	46.0	H

Date: 9/28/2009 - Time: 2:42:01 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 109 von 199
Page 109 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, high channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

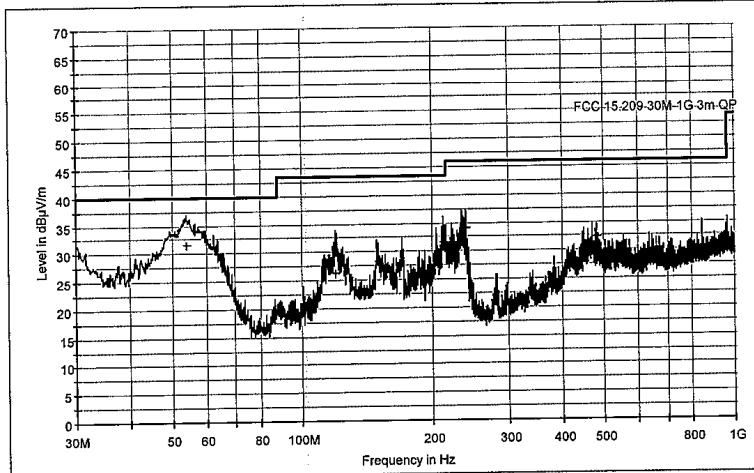

Date: 9/23/2009 - Time: 6:03:56 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.Seite 110 von 199
Page 110 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
54.200000	31.5	14.1	8.5	40.0	V
119.600000	26.3	13.5	17.2	43.5	V
150.400000	28.3	15.7	15.2	43.5	V
212.900000	31.7	12.0	11.8	43.5	V
240.000000	34.1	13.4	11.9	46.0	V
479.100000	32.3	19.1	13.7	46.0	V

Date: 9/23/2009 - Time: 6:03:56 PM

Tested by: _____



Reviewed by: _____

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 111 von 199
Page 111 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, high channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 1701360 001
 Result: Pass
 Comment: Horizontal

Subrange 1
 Frequency Range: 1GHz - 18GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

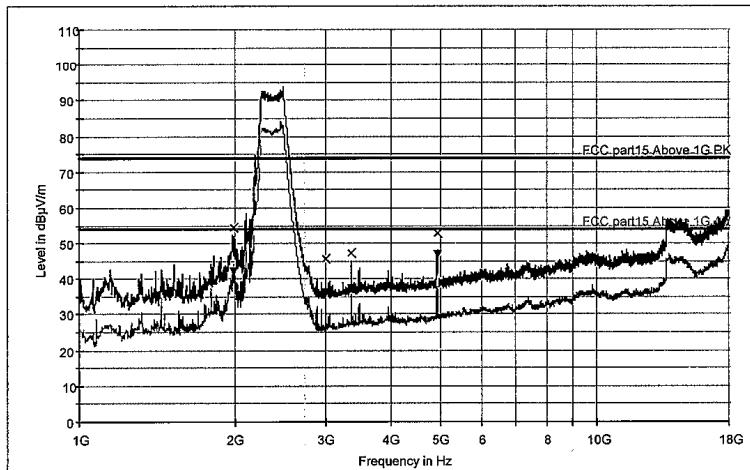

Date: 9/27/2009 - Time: 5:19:33 PM

Tested by: WLC

Reviewed by: 2009.10.12



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 112 von 199
Page 112 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB) (V/m)	Corr. (dB)	Margin (dB)	Limit (dB) (V/m)	Polarity
1986.000000	54.6	-10.8	19.4	74.0	H
3001.000000	45.6	-9.3	28.4	74.0	H
3361.000000	47.3	-8.0	26.7	74.0	H
4924.000000	52.9	-5.7	21.1	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB) (V/m)	Corr. (dB)	Margin (dB)	Limit (dB) (V/m)	Polarity
1986.000000	41.9	-10.8	12.1	54.0	H
3001.000000	36.1	-9.3	17.9	54.0	H
3361.000000	37.2	-8.0	16.8	54.0	H
4924.000000	47.0	-5.7	7.0	54.0	H

Date: 9/27/2009 - Time: 5:19:33 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 113 von 199
Page 113 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, high channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1

Frequency Range: 1GHz - 18GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

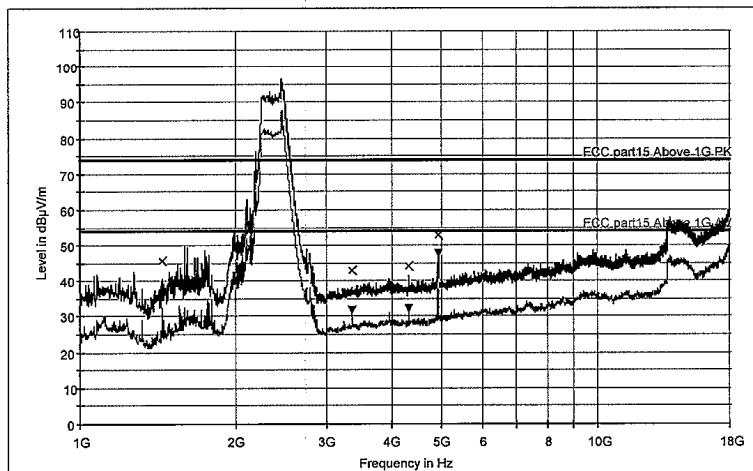

Date: 9/27/2009 - Time: 5:50:12 PM

Tested by: _____ Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 114 von 199
Page 114 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1440.000000	45.7	-14.7	28.3	74.0	V
3359.000000	43.0	-8.0	31.0	74.0	V
4321.000000	43.9	-6.9	30.1	74.0	V
4924.000000	52.8	-5.7	21.2	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1440.000000	36.1	-14.7	17.9	54.0	V
3359.000000	31.7	-8.0	22.3	54.0	V
4321.000000	32.0	-6.9	22.0	54.0	V
4924.000000	47.6	-5.7	6.4	54.0	V

Date: 9/27/2009 - Time: 5:50:12 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 115 von 199
Page 115 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.a, high channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013360 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

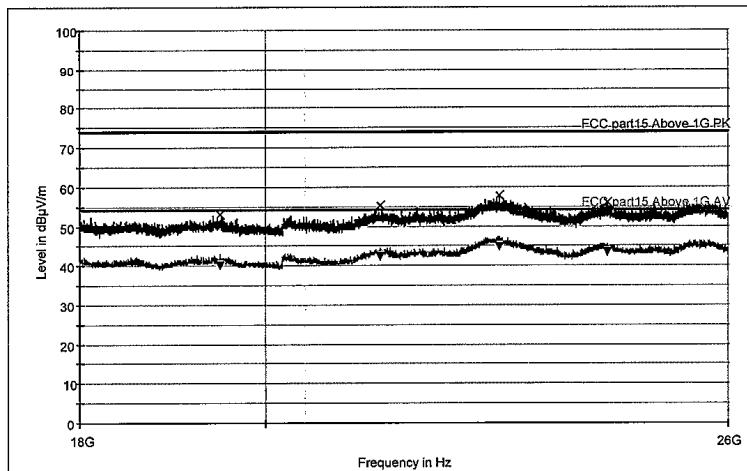

Date: 9/25/2009 - Time: 9:22:35 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 116 von 199
Page 116 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB) µV/m)	Corr. (dB)	Margin (dB)	Limit (dB) µV/m)	Polarity
19489.000000	53.1	6.4	20.9	74.0	H
21341.000000	55.2	7.5	18.8	74.0	H
22838.000000	57.6	10.1	16.4	74.0	H
24288.000000	56.1	7.6	17.9	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB) µV/m)	Corr. (dB)	Margin (dB)	Limit (dB) µV/m)	Polarity
19489.000000	40.2	6.4	13.8	54.0	H
21341.000000	42.2	7.5	11.8	54.0	H
22838.000000	44.9	10.1	9.1	54.0	H
24288.000000	43.3	7.6	10.7	54.0	H

Date: 9/25/2009 - Time: 9:22:35 AM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 117 von 199
Page 117 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.a, high channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq. : 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1
 Frequency Range: 18GHz - 26GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

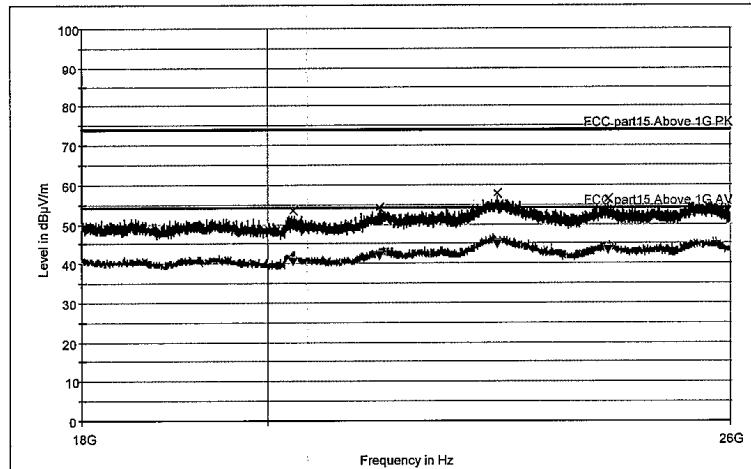

Date: 9/25/2009 - Time: 9:25:53 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 118 von 199
Page 118 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
20290.000000	53.3	6.2	20.7	74.0	V
21313.000000	54.3	7.5	19.7	74.0	V
22779.000000	57.8	10.3	16.2	74.0	V
24259.000000	56.4	7.6	17.6	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
20290.000000	40.6	6.2	13.4	54.0	V
21313.000000	42.0	7.5	12.0	54.0	V
22779.000000	44.9	10.3	9.1	54.0	V
24259.000000	43.3	7.6	10.7	54.0	V

Date: 9/25/2009 - Time: 9:25:53 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 119 von 199
Page 119 of 199

Test Plot of Radiated emissions, Mode A.1.b, Low Channel,Low rate

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 2008&300
 Report No.: 17013360 001
 Result: Pass
 Comment: Horizontal

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

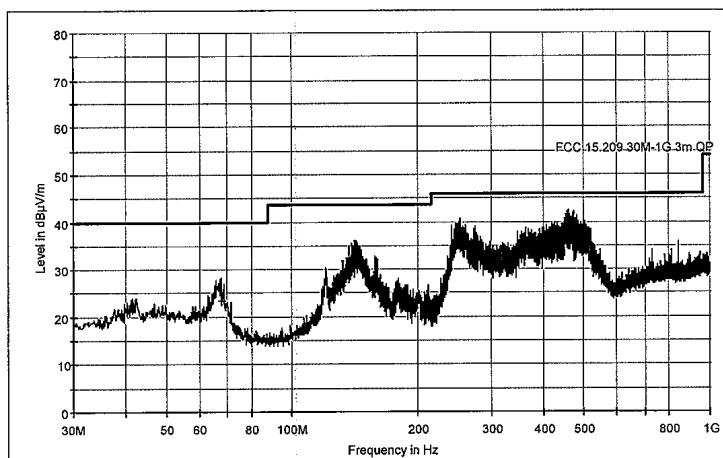

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
67.700000	23.4	12.2	16.6	40.0	H
141.500000	30.2	15.1	13.3	43.5	H
252.800000	38.6	13.6	7.4	46.0	H
457.500000	40.9	18.9	5.1	46.0	H

Date: 9/28/2009 - Time: 6:47:50 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 120 von 199
Page 120 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

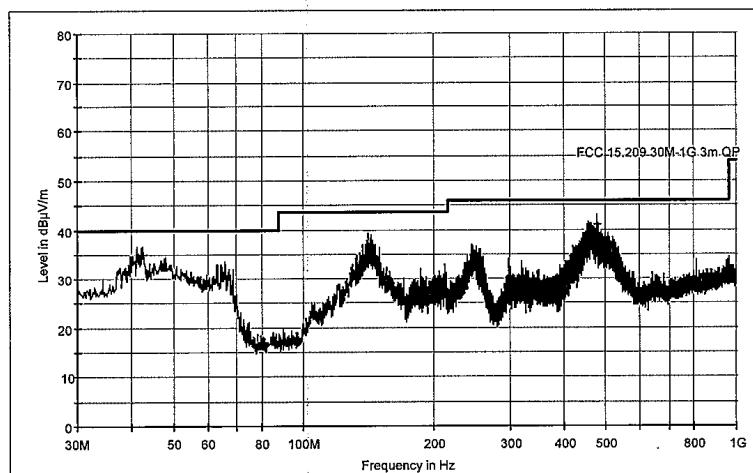

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
42.400000	35.1	14.6	4.9	40.0	V
141.500000	33.1	15.1	10.4	43.5	V
244.600000	33.4	13.5	12.6	46.0	V
478.200000	41.1	19.1	4.9	46.0	V

Date: 9/28/2009 - Time: 6:52:16 PM

Tested by



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 121 von 199
Page 121 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq. : 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No. 17013660 001
 Result: Pass
 Comment: Horizontal

Subrange 1

Frequency Range: 1GHz - 18GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

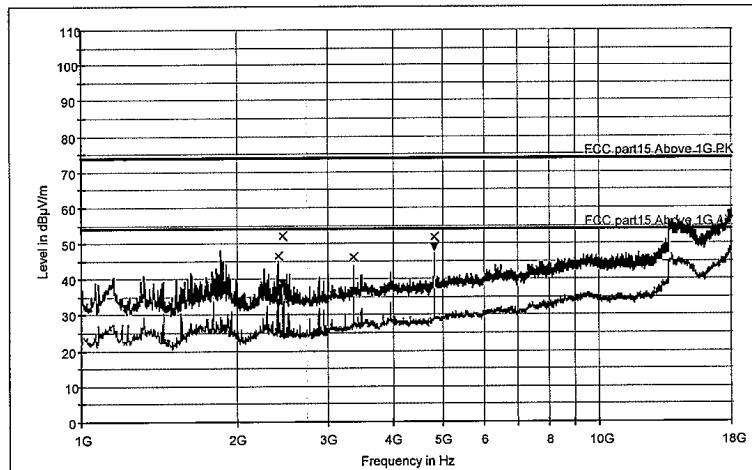

Date: 9/28/2009 - Time: 12:01:33 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 122 von 199
Page 122 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
2400.000000	46.5	-11.6	27.5	74.0	H
2451.000000	52.0	-12.1	22.0	74.0	H
3361.000000	45.9	-8.6	28.1	74.0	H
4824.000000	51.6	-5.9	22.4	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
2400.000000	33.2	-11.6	20.8	54.0	H
2451.000000	39.0	-12.1	15.0	54.0	H
3361.000000	36.4	-8.6	17.6	54.0	H
4824.000000	48.8	-5.9	5.2	54.0	H

Date: 9/28/2009 - Time: 12:01:33 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 123 von 199
Page 123 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1

Frequency Range: 1GHz - 18GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

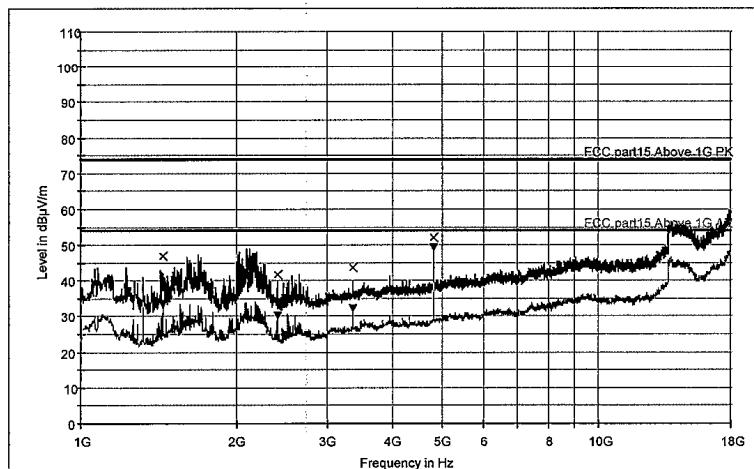

Date: 9/28/2009 - Time: 11:45:56 AM

Tested by:



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 124 von 199
Page 124 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Polarity	Corr. (dB)
1440.000000	46.7	27.3	74.0	V	-15.4
2398.000000	41.6	32.4	74.0	V	-11.6
3359.000000	43.6	30.4	74.0	V	-8.6
4824.000000	52.0	22.0	74.0	V	-5.9

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Polarity	Corr. (dB)
1440.000000	33.5	20.5	54.0	V	-15.4
2398.000000	30.2	23.8	54.0	V	-11.6
3359.000000	32.3	21.7	54.0	V	-8.6
4824.000000	49.3	4.7	54.0	V	-5.9

Date: 9/28/2009 - Time: 11:45:56 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 125 von 199
Page 125 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, low rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

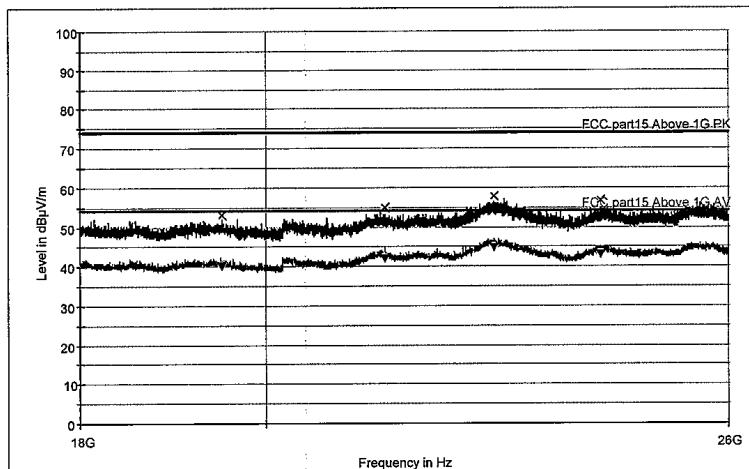

Date: 9/28/2009 - Time: 1:24:22 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 126 von 199
Page 126 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
19509.000000	52.9	6.4	21.1	74.0	H
21400.000000	54.8	7.6	19.2	74.0	H
22768.000000	57.7	10.4	16.3	74.0	H
24179.000000	56.6	7.6	17.4	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
19509.000000	39.9	6.4	14.1	54.0	H
21400.000000	42.0	7.6	12.0	54.0	H
22768.000000	44.9	10.4	9.1	54.0	H
24179.000000	43.1	7.6	10.9	54.0	H

Date: 9/28/2009 - Time: 1:24:22 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 127 von 199
Page 127 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, low rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Vertical

Subrange 1

Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

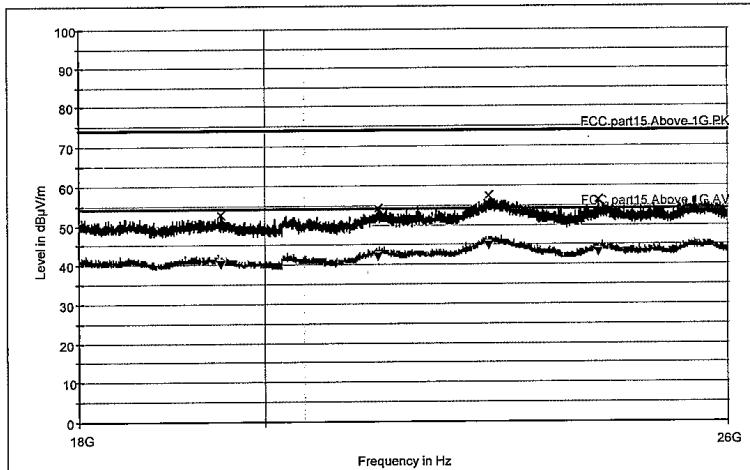

Date: 9/28/2009 - Time: 1:28:49 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 128 von 199
Page 128 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB) V/m)	Corr. (dB)	Margin (dB)	Limit (dB) V/m)	Polarity
19516.000000	52.8	6.4	21.2	74.0	V
21334.000000	54.1	7.5	19.9	74.0	V
22717.000000	57.2	10.5	16.8	74.0	V
24173.000000	56.2	7.6	17.8	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dB) V/m)	Corr. (dB)	Margin (dB)	Limit (dB) V/m)	Polarity
19516.000000	40.1	6.4	13.9	54.0	V
21334.000000	41.9	7.5	12.1	54.0	V
22717.000000	44.7	10.5	9.3	54.0	V
24173.000000	43.0	7.6	11.0	54.0	V

Date: 9/28/2009 - Time: 1:28:49 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 129 von 199
Page 129 of 199

Test Plot of Radiated emissions, Mode A.1.b, Low Channel, High rate

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V; 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013360 001
 Result: Pass
 Comment: Horizontal

Subrange 1

Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

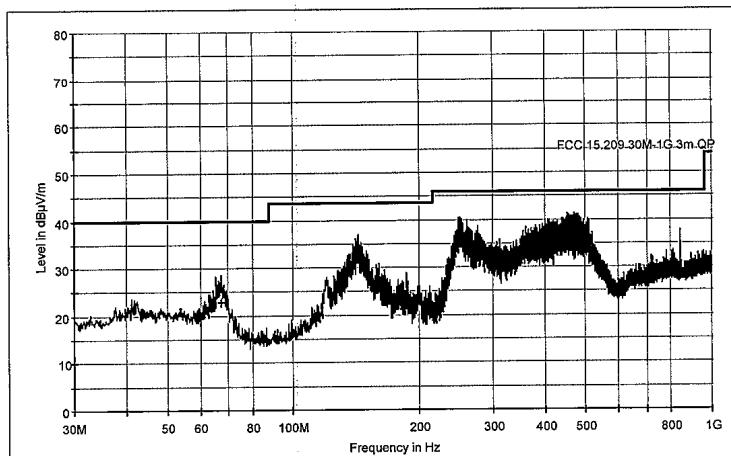

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
67.200000	22.7	12.3	17.3	40.0	H
142.900000	32.6	15.2	10.9	43.5	H
248.600000	37.1	13.5	8.9	46.0	H
469.700000	39.3	19.0	6.7	46.0	H

Date: 9/28/2009 - Time: 6:41:55 PM

Tested by:



Reviewed by:

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 130 von 199
Page 130 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, low channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013360 001
 Result: Pass
 Comment: Vertical

Subrange 1

Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

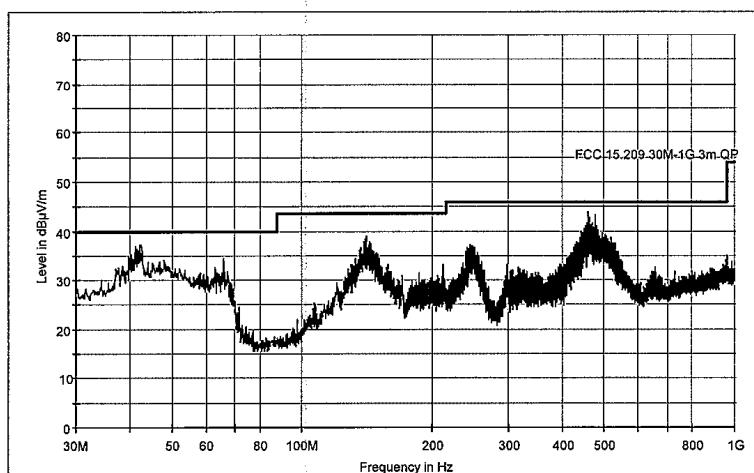

Limit and Margin QP

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
42.400000	35.1	14.6	4.9	40.0	V
141.600000	33.2	15.1	10.3	43.5	V
245.600000	35.6	13.5	10.4	46.0	V
459.000000	40.1	18.9	5.9	46.0	V

Date: 9/28/2009 - Time: 6:59:52 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 131 von 199
Page 131 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Vertical
Subrange 1	
Frequency Range:	1GHz - 18GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

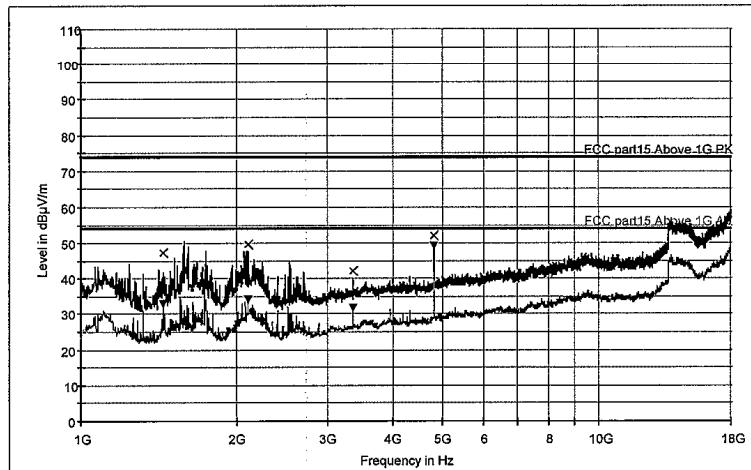

Date: 9/28/2009 - Time: 11:38:18 AM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 132 von 199
Page 132 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
1440.000000	47.3	-15.4	26.7	74.0	V
2105.000000	49.5	-12.6	24.5	74.0	V
3359.000000	42.2	-8.6	31.8	74.0	V
4824.000000	52.0	-5.9	22.0	74.0	V

Limit and Margin AV


Frequency (MHz)	Average (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
1440.000000	33.1	-15.4	20.9	54.0	V
2105.000000	34.2	-12.6	19.8	54.0	V
3359.000000	31.6	-8.6	22.4	54.0	V
4824.000000	49.3	-5.9	4.7	54.0	V

Date: 9/28/2009 - Time: 11:38:18 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 133 von 199
Page 133 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	1GHz - 18GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

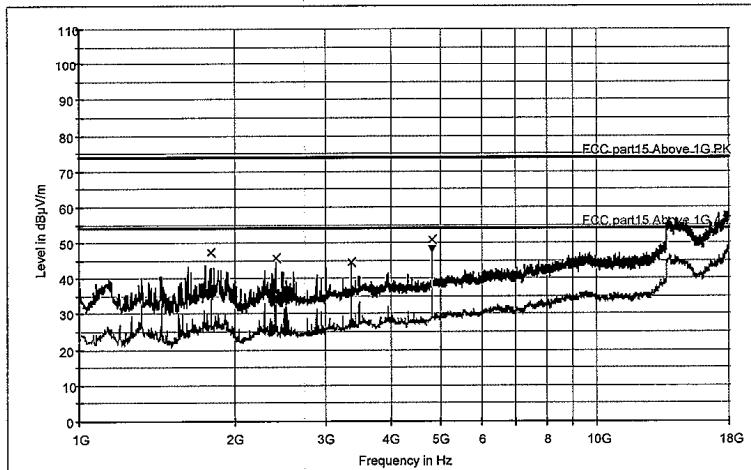

Date: 9/28/2009 - Time: 11:29:58 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 134 von 199
Page 134 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
1799.000000	47.1	-13.8	26.9	74.0	H
2400.000000	45.8	-11.6	28.2	74.0	H
3359.000000	44.3	-8.6	29.7	74.0	H
4824.000000	51.0	-5.9	23.0	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
1799.000000	35.7	-13.8	18.3	54.0	H
2400.000000	34.2	-11.6	19.8	54.0	H
3359.000000	35.6	-8.6	18.4	54.0	H
4824.000000	48.1	-5.9	5.9	54.0	H

Date: 9/28/2009 - Time: 11:29:58 AM

Tested by: WLC 2009.10.12
Checked

Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 135 von 199
Page 135 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

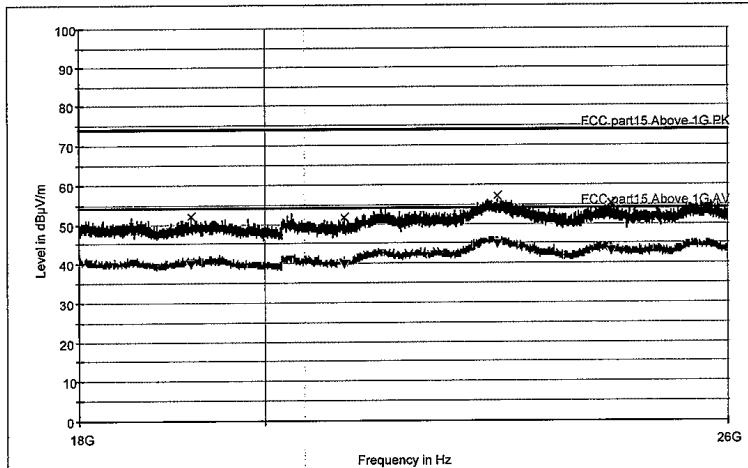

Date: 9/28/2009 - Time: 1:19:53 PM

Tested by: WLC
2009 10 12
Checked

Reviewed by: DW
2009 10 12
Checked

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 136 von 199
Page 136 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
19179.000000	52.0	6.4	22.0	74.0	H
20921.000000	51.8	6.8	22.2	74.0	H
22828.000000	57.2	10.2	16.8	74.0	H
24332.000000	65.2	7.6	18.8	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
19179.000000	39.7	6.4	14.3	54.0	H
20921.000000	39.6	6.8	14.4	54.0	H
22828.000000	44.7	10.2	9.3	54.0	H
24332.000000	42.9	7.6	11.1	54.0	H

Date: 9/28/2009 - Time: 1:19:53 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 137 von 199
Page 137 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, low channel, high rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Vertical
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

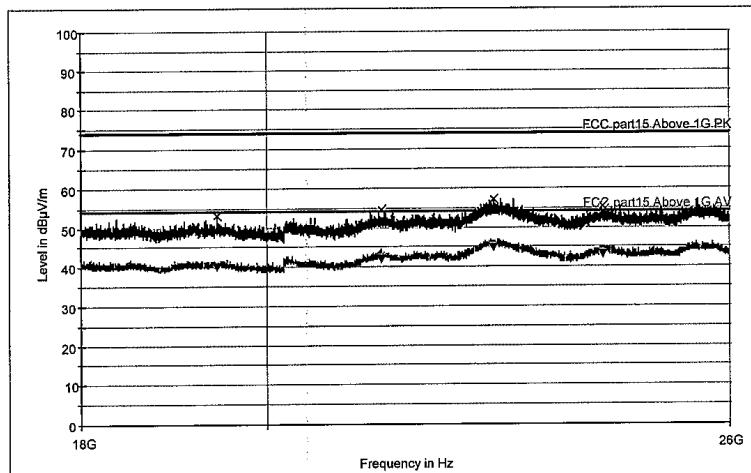

Date: 9/28/2009 - Time: 1:15:43 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 138 von 199
Page 138 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	Max Peak (dB) uV/m)	Corr. (dB)	Margin (dB)	Limit (dB) uV/m)	Polarity
19441.000000	53.1	6.4	20.9	74.0	V
21346.000000	54.6	7.5	19.4	74.0	V
22741.000000	57.0	10.4	17.0	74.0	V
24196.000000	55.1	7.6	18.9	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dB) uV/m)	Corr. (dB)	Margin (dB)	Limit (dB) uV/m)	Polarity
19441.000000	39.9	6.4	14.1	54.0	V
21346.000000	42.0	7.5	12.0	54.0	V
22741.000000	44.9	10.4	9.1	54.0	V
24196.000000	43.1	7.6	10.9	54.0	V

Date: 9/28/2009 - Time: 1:15:43 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 139 von 199
Page 139 of 199

Test Plot of Radiated emissions, Mode A.1.b, Middle Channel, Low rate

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 2008300
 Report No.: 17013360 001
 Result: Pass
 Comment: Horizontal

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

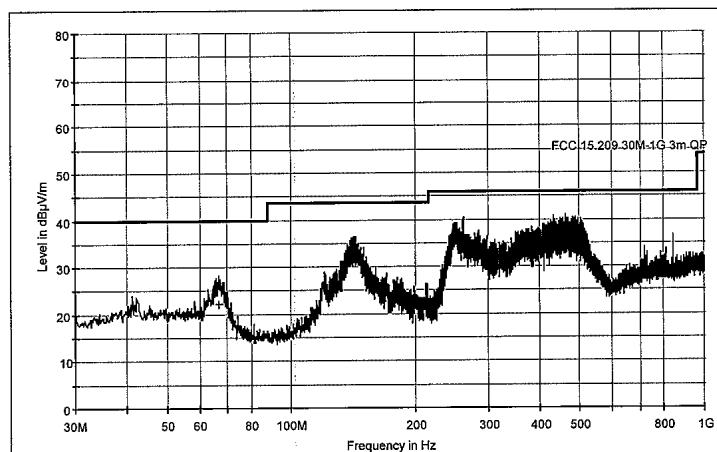

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB) µV/m	Corr. (dB)	Margin (dB)	Limit (dB) µV/m	Polarity
66.700000	22.3	12.4	17.7	40.0	H
141.800000	32.7	15.1	10.8	43.5	H
261.600000	36.1	13.8	9.9	46.0	H
462.600000	38.3	18.9	7.7	46.0	H

Date: 9/28/2009 - Time: 5:57:41 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 140 von 199
Page 140 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 2008&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

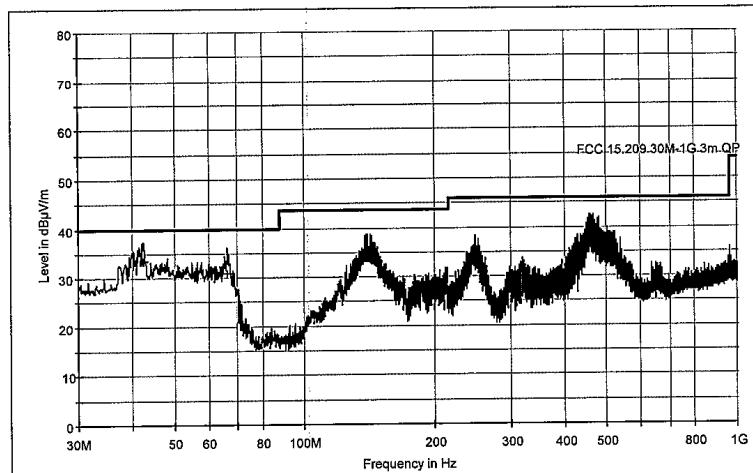

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V/m)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Polarity
42.400000	33.5	14.6	6.5	40.0	V
66.200000	30.8	12.5	9.2	40.0	V
141.900000	33.7	15.1	9.8	43.5	V
249.400000	34.1	13.5	11.9	46.0	V
460.200000	40.7	18.9	5.3	46.0	V

Date: 9/28/2009 - Time: 5:49:21 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 141 von 199
Page 141 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1

Frequency Range: 1GHz - 18GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

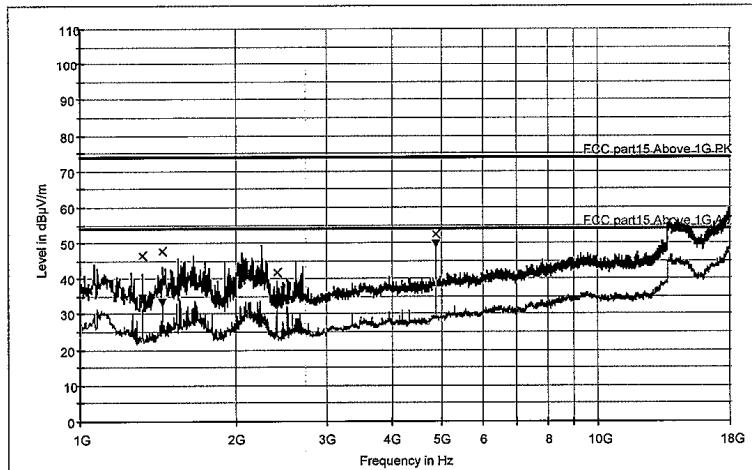

Date: 9/28/2009 - Time: 11:12:24 AM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 142 von 199
Page 142 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1318.000000	46.5	-15.9	27.5	74.0	V
1440.000000	47.8	-15.4	26.2	74.0	V
2400.000000	41.5	-11.6	32.5	74.0	V
4874.000000	52.3	-5.9	21.7	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
1318.000000	34.7	-15.9	19.3	54.0	V
1440.000000	33.5	-15.4	20.5	54.0	V
2400.000000	32.4	-11.6	21.6	54.0	V
4874.000000	49.6	-5.9	4.4	54.0	V

Date: 9/28/2009 - Time: 11:12:24 AM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 143 von 199
Page 143 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, mid channel, low rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	1GHz - 18GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

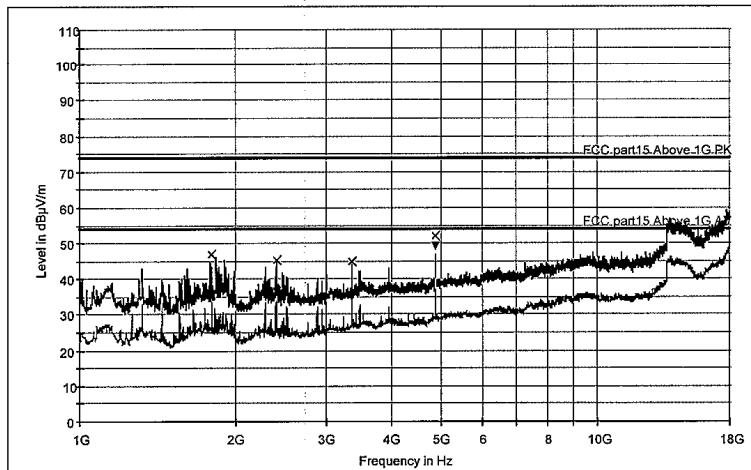

Date: 9/28/2009 - Time: 11:19:51 AM

Tested by: _____

Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 144 von 199
Page 144 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB _r V/m)	Corr. (dB)	Margin (dB)	Limit (dB _r V/m)	Polarity
1799.000000	46.7	-13.8	27.3	74.0	H
2400.000000	45.2	-11.6	28.8	74.0	H
3359.000000	44.9	-8.6	29.1	74.0	H
4874.000000	52.1	-5.9	21.9	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dB _r V/m)	Corr. (dB)	Margin (dB)	Limit (dB _r V/m)	Polarity
1799.000000	35.6	-13.8	18.4	54.0	H
2400.000000	36.4	-11.6	17.6	54.0	H
3359.000000	35.1	-8.6	18.9	54.0	H
4874.000000	49.4	-5.9	4.6	54.0	H

Date: 9/28/2009 - Time: 11:19:51 AM

Tested by: WLC
2009.10.12
checked

Reviewed by: DW
2009.10.12
checked

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 145 von 199
Page 145 of 199

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)

Test Information

Manufacturer:	KODAK
Test Item:	Digital Frame
Identification:	W730
Test Standard:	FCC Part 15.247
Test Detail:	Radiated Emission
Operation Mode:	A.1.b, mid channel, low rate
Climate Condition:	23 °C; 53 %RH; 101 kPa.
Test Voltage / Freq. :	110 V/ 60Hz
Receipt No.:	163054443 200&300
Report No.	17013660 001
Result:	Pass
Comment:	Horizontal
Subrange 1	
Frequency Range:	18GHz - 26GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

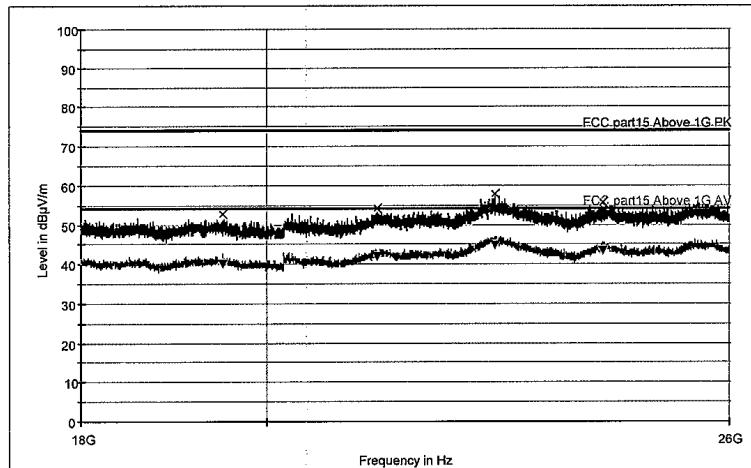

Date: 9/28/2009 - Time: 1:02:33 PM

Tested by: _____



Reviewed by: _____



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 146 von 199
Page 146 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19504.000000	52.8	6.4	21.2	74.0	H
21299.000000	54.3	7.5	19.7	74.0	H
22762.000000	57.7	10.4	16.3	74.0	H
24203.000000	55.5	7.6	18.5	74.0	H

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19504.000000	40.1	6.4	13.9	54.0	H
21299.000000	42.0	7.5	12.0	54.0	H
22762.000000	44.9	10.4	9.1	54.0	H
24203.000000	43.2	7.6	10.8	54.0	H

Date: 9/28/2009 - Time: 1:02:33 PM

Tested by



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 147 von 199
Page 147 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, low rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq. : 110 V/ 60Hz
 Receipt No.: 163054443 2008300
 Report No. 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1

Frequency Range: 18GHz - 26GHz
 Receiver: TUV FSP 30
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26 3160-09

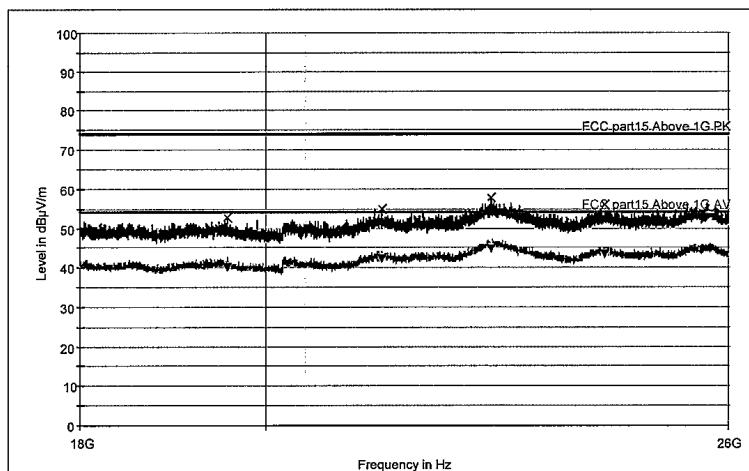

Date: 9/28/2009 - Time: 12:54:17 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 148 von 199
Page 148 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19569.000000	52.6	6.2	21.4	74.0	V
21370.000000	54.9	7.6	19.1	74.0	V
22738.000000	57.8	10.4	16.2	74.0	V
24243.000000	56.0	7.6	18.0	74.0	V

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
19569.000000	40.0	6.2	14.0	54.0	V
21370.000000	42.2	7.6	11.8	54.0	V
22738.000000	44.9	10.4	9.1	54.0	V
24243.000000	43.4	7.6	10.6	54.0	V

Date: 9/28/2009 - Time: 12:54:17 PM

Tested by: WLC



Reviewed by: DW



Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 149 von 199
Page 149 of 199

Test Plot of Radiated emissions, Mode A.1.b, Low Channel, High rate

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 2008&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Horizontal

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

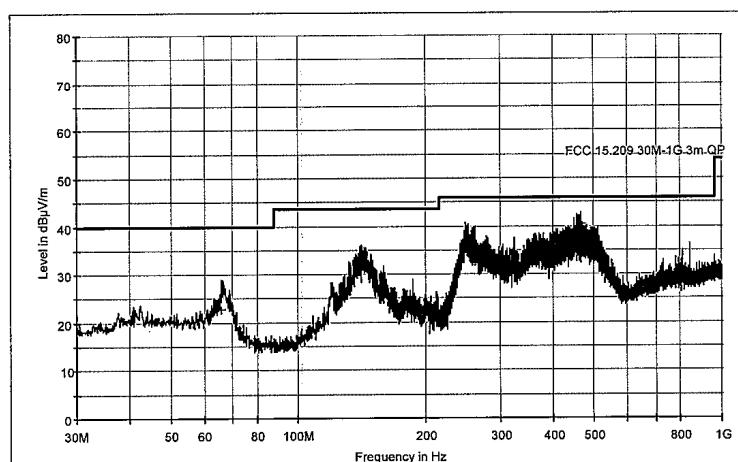

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)	Polarity
66.00000	22.9	12.5	17.1	40.0	H
141.70000	31.2	15.1	12.3	43.5	H
249.00000	36.7	13.5	9.3	46.0	H
467.60000	40.5	18.9	5.5	46.0	H

Date: 9/28/2009 - Time: 6:02:36 PM

Tested by:  2009.10.12 Reviewed by:  2009.10.12 Checked

Prüfbericht - Nr.: 17013660 001
Test Report No.

Seite 150 von 199
Page 150 of 199

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer: KODAK
 Test Item: Digital Frame
 Identification: W730
 Test Standard: FCC Part 15.247
 Test Detail: Radiated Emission
 Operation Mode: A.1.b, mid channel, high rate
 Climate Condition: 23 °C; 53 %RH; 101 kPa.
 Test Voltage / Freq.: 110 V/ 60Hz
 Receipt No.: 163054443 200&300
 Report No.: 17013660 001
 Result: Pass
 Comment: Vertical

Subrange 1
 Frequency Range: 30MHz - 1GHz
 Receiver: TUV ESCI 3
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

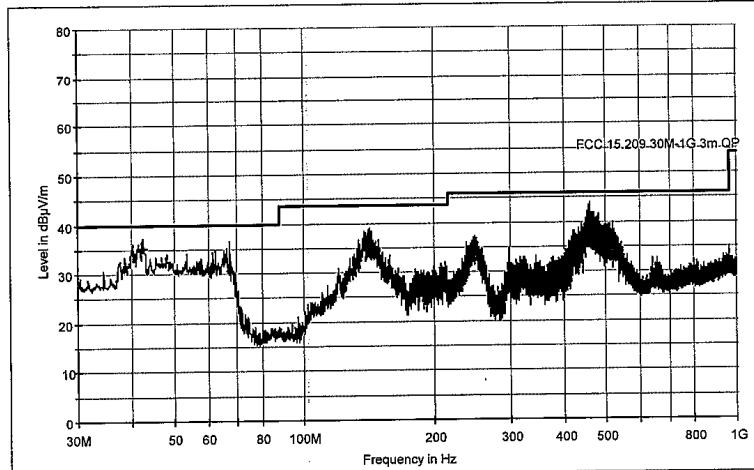

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarity
42.400000	35.3	14.6	4.7	40.0	V
67.300000	30.7	12.3	9.3	40.0	V
142.100000	34.1	15.1	9.4	43.5	V
248.500000	32.3	13.5	13.7	46.0	V
458.400000	38.3	18.9	7.7	46.0	V

Date: 9/28/2009 - Time: 5:43:56 PM

Tested by:



Reviewed by:

