

Project No: TM-2406000277P
Report No.: TMWK2407002364KR

FCC ID: PANBA550T

Page: 1 / 76
Rev.: 03

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Product name	Triple source to BT5.3 LE Audio Transmitter
Brand Name	CC&C
Model No.	BA-550T
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)

Approved by:

sehni, Hu

Sehni Hu
Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMWK2407002364KR

Page: 2 / 76
Rev.: 03

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 8, 2024	Initial Issue	ALL	Peggy Tsai
01	August 23, 2024	See the following Note Rev. (01)	P.4, 6, 10, 11	Peggy Tsai
02	September 10, 2024	See the following Note Rev. (02)	P.4	Peggy Tsai
03	September 25, 2024	See the following Note Rev. (03)	P.6	Peggy Tsai

Note:

Rev. (01)

1. Modify power operation in section 1.1.
2. Modify antenna information in section 1.4.
3. Modify support and EUT accessories equipment in section 1.8.
4. Modify test set up diagram in section 1.9.

Rev. (02)

1. Added EUT Serial # in section 1.1.

Rev. (03)

1. Modify Antenna Type in section 1.4.

Table of contents

1. GENERAL INFORMATION	4
1.1 EUT INFORMATION	4
1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS.....	5
1.3 EUT CHANNEL INFORMATION	6
1.4 ANTENNA INFORMATION	6
1.5 MEASUREMENT UNCERTAINTY	7
1.6 FACILITIES AND TEST LOCATION	7
1.7 INSTRUMENT CALIBRATION.....	8
1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT.....	10
1.9 TEST SET UP DIAGRAM	11
1.10 TEST PROGRAM.....	11
1.11 TEST METHODOLOGY AND APPLIED STANDARDS	11
2. TEST SUMMERY	12
3. DESCRIPTION OF TEST MODES	13
3.1 THE WORST MODE OF OPERATING CONDITION.....	13
3.2 THE WORST MODE OF MEASUREMENT	14
3.3 EUT DUTY CYCLE	15
4. TEST RESULT	18
4.1 AC POWER LINE CONDUCTED EMISSION	18
4.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)	21
4.3 OUTPUT POWER MEASUREMENT.....	28
4.4 FREQUENCY SEPARATION.....	30
4.5 NUMBER OF HOPPING	34
4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION	36
4.7 TIME OF OCCUPANCY (DWELL TIME).....	41
4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION	47
APPENDIX A - PHOTOGRAPHS OF EUT	



Report No.: TMWK2407002364KR

Page: 4 / 76
Rev.: 03

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	CC&C Technologies, Inc. 8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan
Manufacturer	CC&C Technologies, Inc. 8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan
Equipment	Triple source to BT5.3 LE Audio Transmitter
Model No.	BA-550T
Model Discrepancy	N/A
Trade Name	CC&C
Received Date	June 28, 2024
Date of Test	July 16 ~ 26, 2024
Power Operation	1. Powered from Host System: DC 5V 2. Powered from Battery: DC 3.7V, 250mAh, 0.93Wh (Model No.: 502030)
EUT Serial #	Radiated: 000272F14FD1 BA-550T Conducted: 000272F14FD2 BA-550T
HW Version	0A
FW Version	01

Remark:

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS

1.2.1 Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

1.2.2 Equal Hopping Frequency Use

The channels of this system will be used equally over the long-term distribution of the hopsets.

1.2.3 Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

1.2.4 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.2.5 Equipment Description

The Rx input bandwidths shift frequencies in synchronization with the transmitted signals.

In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in standard when the transmitter is presented with a continuous data (or information) system.

In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

1.3 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BDR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.4 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☐ Dipole ☒ embedded antenna
Antenna Gain	Gain: 3.2 dBi
Antenna Trade / Model	LYNwave / ALA120-051026-00
Antenna Connector	IPEX

Notes:

1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.

1.5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	± 2.213 dB
Channel Bandwidth	± 2.7 %
RF output power (Power Meter + Power sensor)	± 0.243 dB
Power Spectral density	± 2.739 dB
Conducted Bandedge	± 2.739 dB
Conducted Spurious Emission	± 2.742 dB
Radiated Emission_9kHz-30MHz	± 3.761 dB
Radiated Emission_30MHz-200MHz	± 3.473 dB
Radiated Emission_200MHz-1GHz	± 3.946 dB
Radiated Emission_1GHz-6GHz	± 4.797 dB
Radiated Emission_6GHz-18GHz	± 4.803 dB
Radiated Emission_18GHz-26GHz	± 3.459 dB
Radiated Emission_26GHz-40GHz	± 3.297 dB

Remark:

- 1.This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.6 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Ben Yang	-
Radiation	Tony Chao 、 Ray Li	-
RF Conducted	Marco Chan	-

Remark: The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

1.7 INSTRUMENT CALIBRATION

Conducted FCC/NCC/IC(All)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Sensor	Anritsu	MA2411B	1726104	2024-04-16	2025-04-15
Power Sensor	Anritsu	MA2412B	1726107	2024-04-16	2025-04-15
Power Meter	Anritsu	ML2496A	1804001	2024-04-16	2025-04-15
EXA Signal Analyzer	Keysight	N9010B	MY55460167	2024-01-03	2025-01-02
Software	Radio Test Software Ver. 21				

966A_Radiated					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Analyzer	KEYSIGHT	N9010A	MY52220817	2024-03-15	2025-03-14
Thermo-Hygro Meter	WISEWIND	1206	D07	2023-12-08	2024-12-07
Active Loop Antenna	SCHWARZBECK	FMZB 1513-60	1513-60-028	2023-12-13	2024-12-12
Bi-Log Antenna	Sunol Sciences	JB3	A030105	2024-07-12	2025-07-11
Preamplifier	EMEC	EM330	060609	2024-02-21	2025-02-20
Cable	Huber+Suhner	104PEA	20995+21000+182330	2024-02-21	2025-02-20
Horn Antenna	ETC	MCTD 1209	DRH13M02003	2023-12-28	2024-12-27
Preamplifier	HP	8449B	3008A00965	2023-12-22	2024-12-21
Cable	EMCI	EMC101G	221213+221011+221012	2023-10-17	2024-10-16
Attenuator	Mini-Circuits	BW-S9W5	BWS9W5-09-966A-01	2024-02-07	2025-02-06
High Pass Filters	Titan Microwave	T04H30001800070S01	22011402-4	2024-06-12	2025-06-13
Horn Antenna	SCHWARZBECK	BBHA9170	1047	2023-12-13	2024-12-12
Pre-Amplifier	EMCI	EMC184045SE	980860	2023-12-12	2024-12-11
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Software	e3 V9-210616c				

Remark:

- Each piece of equipment is scheduled for calibration once a year.
- N.C.R. = No Calibration Required.



Report No.: TMWK2407002364KR

Page: 9 / 76
Rev.: 03

AC Mains Conduction					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESCI	100064	2024-06-14	2025-06-13
LISN	TESEQ	LN2-16N	22012	2024-02-29	2025-02-27
Cable	Woken	SFL402	185A	2024-07-08	2025-07-07
Software	e3 V6-110812				

Remark:

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.

1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT


EUT Accessories Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
	N/A					

Support Equipment (Conducted)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(B)	Lenovo	T470	N/A	N/A
A	Type-C Cable	Dong Guan YCD Electronic Co., Ltd	37G1E6300-00	N/A	N/A
B	4 PIN Test Kit	CC&C	BA-550T TEST BOARD	N/A	N/A

Support Equipment (Conduction)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(D)	Lenovo	ThinkPad X260	N/A	N/A
2	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A
A	Type-C Cable	Dong Guan YCD Electronic Co., Ltd	37G1E6300-00	N/A	N/A
B	4 PIN Test Kit	CC&C	BA-550T TEST BOARD	N/A	N/A

Support Equipment (RSE)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(D)	Lenovo	ThinkPad X260	N/A	N/A
2	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A
3	USB Cable	DTAudio	8024025	N/A	N/A
A	Type-C Cable	Dong Guan YCD Electronic Co., Ltd	37G1E6300-00	N/A	N/A
B	4 PIN Test Kit	CC&C	BA-550T TEST BOARD	N/A	N/A

1.9 TEST SET UP DIAGRAM

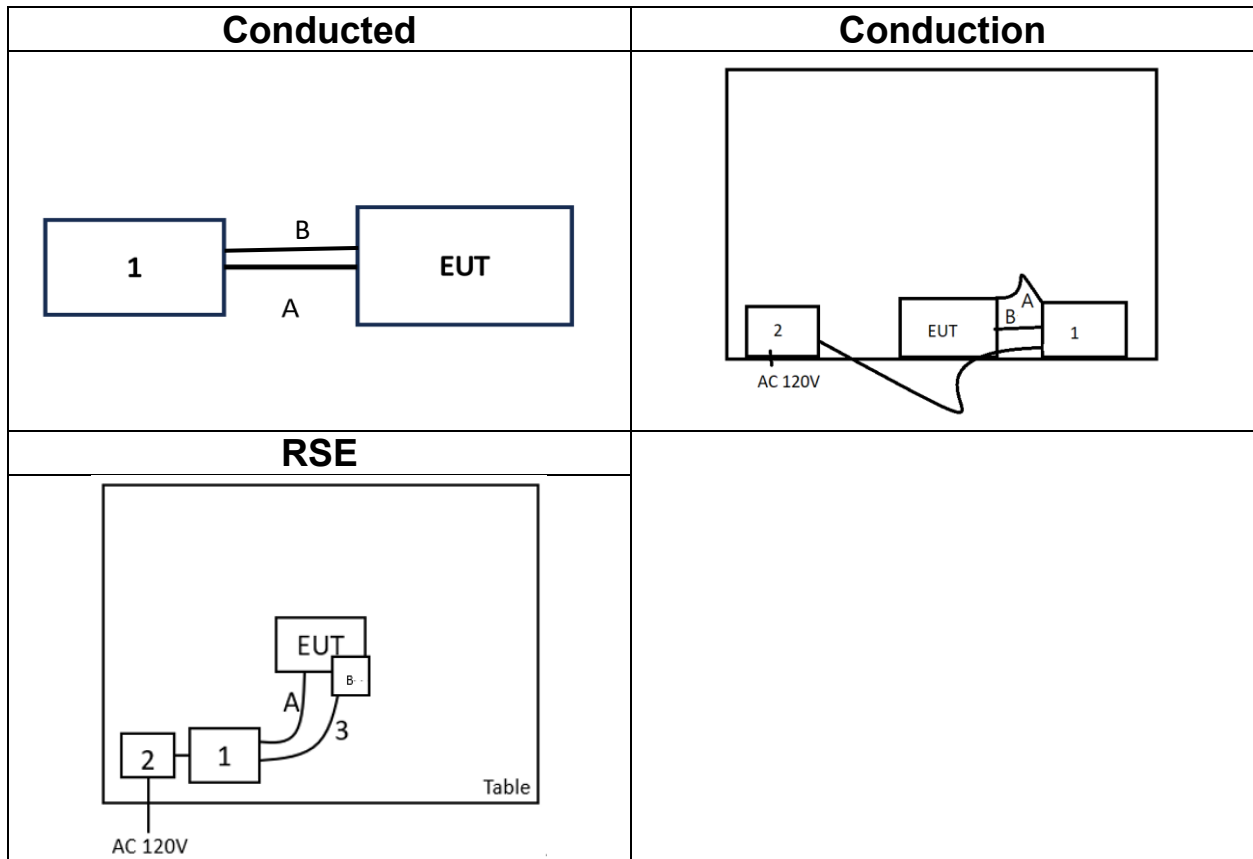

1.10 TEST PROGRAM

The EUT connection corresponds to the surrounding fixture control board. This EUT uses "BlueTest3" software to set the frequency, modulation, and power to allow the sample to continuously transmit (including frequency hopping mode).

1.11 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074.

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(1)	4.2	20 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(1)	4.3	Output Power Measurement	Pass
15.247(a)(1)	4.4	Frequency Separation	Pass
15.247(a)(1)(iii)	4.5	Number of Hopping	Pass
15.247(d)	4.6	Conducted Band Edge	Pass
15.247(d)	4.6	Conducted Spurious Emission	Pass
15.247(a)(1)(iii)	4.7	Time of Occupancy	Pass
15.247(d) 15.205, 15.209	4.8	Radiation Band Edge	Pass
15.247(d) 15.205, 15.209	4.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BDR-1Mbps (DH5) $\pi/4$ -DQPSK for 2Mbps (2DH5) 8DPSK for EDR-3Mbps (3DH5)
Test Channel Frequencies	GFSK for BDR-1Mbps: 1.Lowest Channel: 2402MHz 2.Middle Channel: 2441MHz 3.Highest Channel: 2480MHz $\pi/4$-DQPSK for 2Mbps: 1.Lowest Channel: 2402MHz 2.Middle Channel: 2441MHz 3.Highest Channel: 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel: 2402MHz 2.Middle Channel: 2441MHz 3.Highest Channel: 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.
2. The system support GFSK, $\pi/4$ DQPSK, 8DPSK, the $\pi/4$ DQPSK were reduced since the identical parameters with 8dpsk. In the following test items, number of hopping, conducted bandedge, radiated band edge and spurious emissions.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT Power by Host System
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Host System
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Host System
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. AC power line conducted emission were performed the EUT transmit at the highest output power channel as worse case.
3. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report.



Report No.: TMWK2407002364KR

Page: 15 / 76
Rev.: 03

3.3 EUT DUTY CYCLE





Temperature: 23.1°C

Test date: July 16, 2024

Humidity: 55% RH

Tested by: Marco Chan


	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
DH1	30.80	5.11	2.60	3.00
DH3	65.60	1.83	0.61	1.00
DH5	77.20	1.12	0.35	1.00
2DH1	31.20	5.06	2.56	3.00
2DH3	65.60	1.83	0.61	1.00
2DH5	76.80	1.15	0.35	1.00
3DH1	30.80	5.11	2.60	3.00
3DH3	65.60	1.83	0.61	1.00
3DH5	77.20	1.12	0.35	1.00

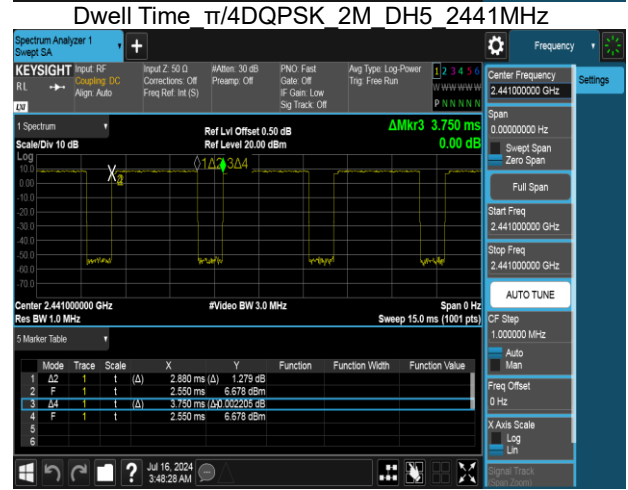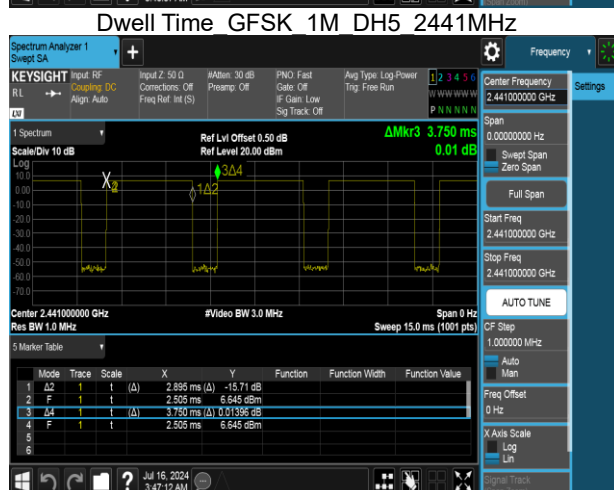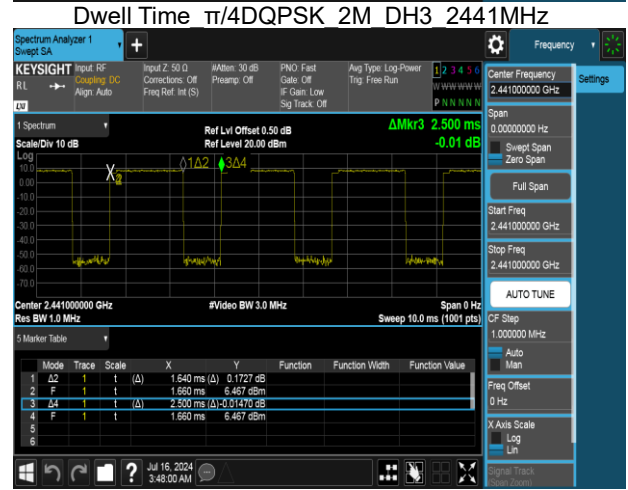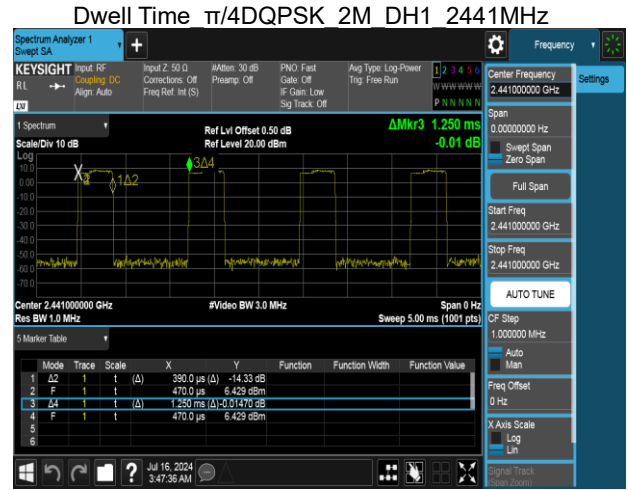



Report No.: TMWK2407002364KR


Dwell Time 8DPSK 3M DH1 2441MHz

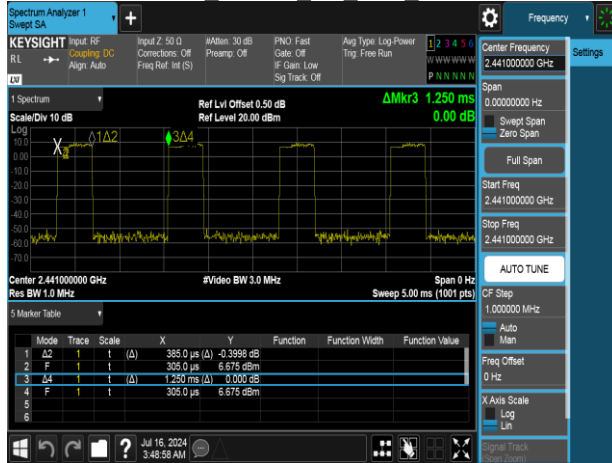

Dwell Time 8DPSK 3M DH3 2441MHz



Dwell Time 8DPSK 3M DH5 2441MHz

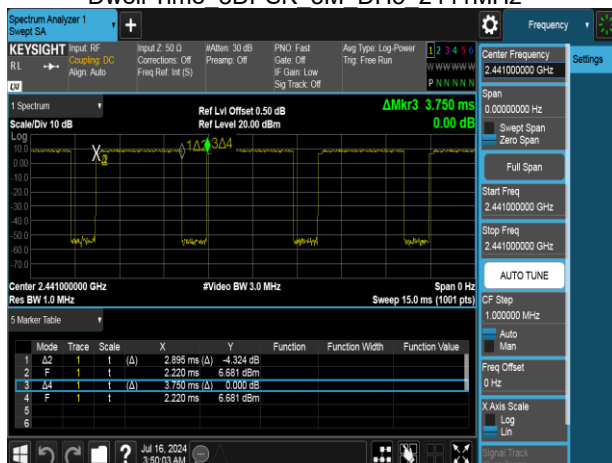

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.


4.1.3 Test Setup

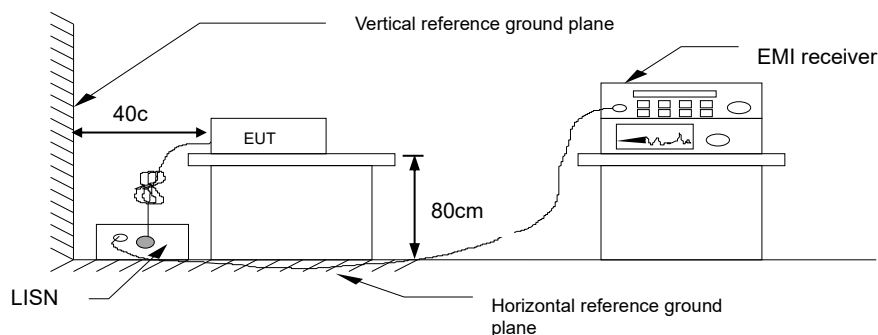

4.1.4 Test Result

Project No : TM-2406000277P
Operation Mode : BT
Test Chamber : Conduction
Probe : LINE
Note :

Test Date : 2024-07-23
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 120V/60Hz

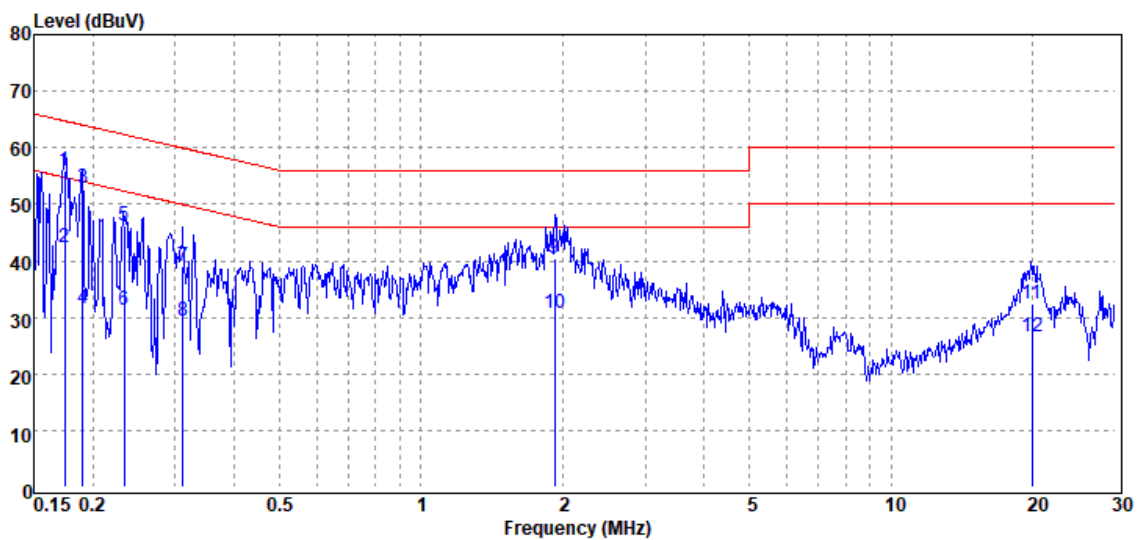

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.174	QP	55.76	0.25	56.01	64.75	-8.74
0.174	Average	42.11	0.25	42.36	54.75	-12.39
0.191	QP	52.54	0.34	52.88	64.00	-11.12
0.191	Average	31.34	0.34	31.68	54.00	-22.32
0.234	QP	45.86	0.39	46.25	62.32	-16.07
0.234	Average	30.84	0.39	31.23	52.32	-21.09
0.312	QP	38.56	0.38	38.94	59.92	-20.98
0.312	Average	28.86	0.38	29.24	49.92	-20.68
1.921	QP	40.34	0.18	40.52	56.00	-15.48
1.921	Average	30.56	0.18	30.74	46.00	-15.26
19.929	QP	31.90	0.48	32.38	60.00	-27.62
19.929	Average	26.08	0.48	26.56	50.00	-23.44

Note: 1. Actual FS= Spectrum Read Level + Factor


Note: 2. Margin= Actual FS - Limit

Report No.: TMWK2407002364KR

Page: 20 / 76
Rev.: 03

Project No : TM-2406000277P
Operation Mode : BT
Test Chamber : Conduction
Probe : NEUTRAL
Note :

Test Date : 2024-07-23
Temp./Humi. : 23.4°C / 54%
Engineer : Ben Yang
Test Voltage : AC 120V/60Hz

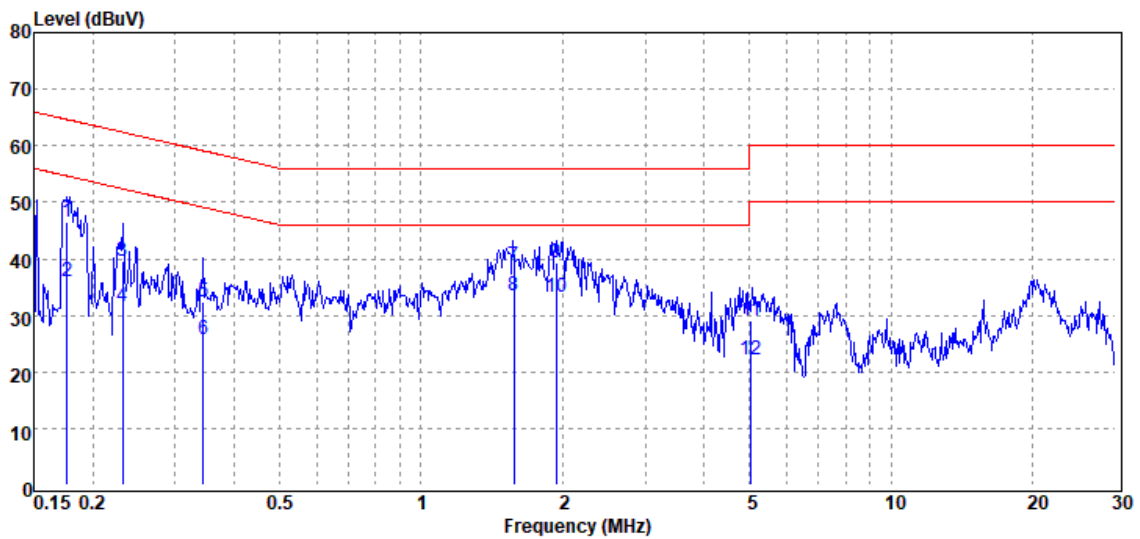

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV	Limit dBμV	Margin dB
0.176	QP	46.18	0.25	46.43	64.65	-18.22
0.176	Average	35.64	0.25	35.89	54.65	-18.76
0.232	QP	39.29	0.36	39.65	62.39	-22.74
0.232	Average	31.24	0.36	31.60	52.39	-20.79
0.344	QP	32.12	0.35	32.47	59.11	-26.64
0.344	Average	25.32	0.35	25.67	49.11	-23.44
1.576	QP	38.64	0.15	38.79	56.00	-17.21
1.576	Average	33.47	0.15	33.62	46.00	-12.38
1.936	QP	39.07	0.16	39.23	56.00	-16.77
1.936	Average	33.01	0.16	33.17	46.00	-12.83
5.040	QP	28.83	0.24	29.07	60.00	-30.93
5.040	Average	21.83	0.24	22.07	50.00	-27.93

Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS - Limit

4.2 20dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

4.2.1 Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.

Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 20 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

Refer to section 1.9.



Report No.: TMWK2407002364KR

Page: 22 / 76
Rev.: 03

4.2.4 Test Result

Temperature: 23.1°C
Humidity: 55% RH

Test date: July 16, 2024
Tested by: Marco Chan

20dB BANDWIDTH

GFSK

CH	20 dB BW (MHz)	2/3 BW (MHz)
Low	0.9617	0.64
Mid	0.9650	0.64
High	0.9632	0.64

$\pi/4$ -DQPSK

CH	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.337	0.89
Mid	1.333	0.89
High	1.336	0.89

8-DPSK

CH	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.314	0.88
Mid	1.313	0.88
High	1.314	0.88



Report No.: TMWK2407002364KR

Page: 23 / 76
Rev.: 03

BANDWIDTH 99%

GFSK

CH	99% BW (MHz)
Low	0.87593
Mid	0.87637
High	0.87792

$\pi/4$ -DQPSK

CH	99% BW (MHz)
Low	1.1875
Mid	1.1872
High	1.1879

8-DPSK

CH	99% BW (MHz)
Low	1.1894
Mid	1.1908
High	1.1903



Report No.: TMWK2407002364KR

Page: 24 / 76
Rev.: 03

Test Data

20dB BANDWIDTH


OBW 20dB GFSK 1M DH5 2402MHz




OBW 20dB $\pi/4$ DQPSK 2M DH5 2402MHz




OBW 20dB GFSK 1M DH5 2441MHz

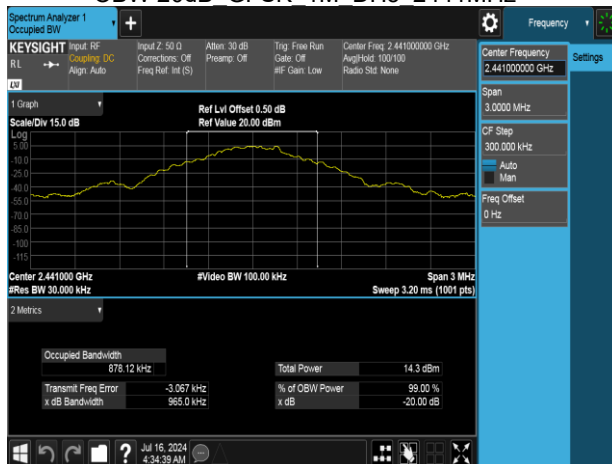


OBW 20dB $\pi/4$ DQPSK 2M DH5 2441MHz

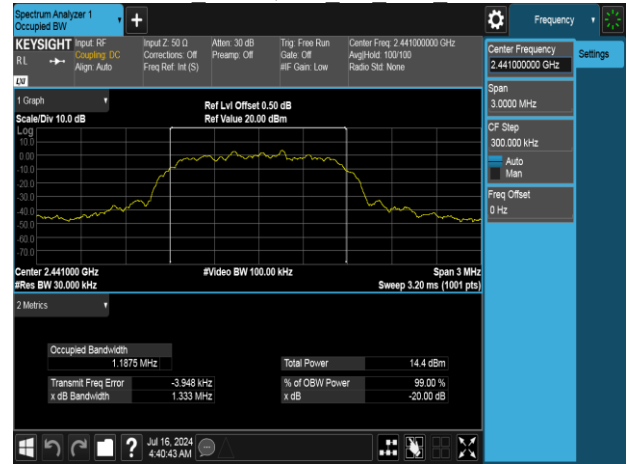

OBW 20dB GFSK 1M DH5 2480MHz

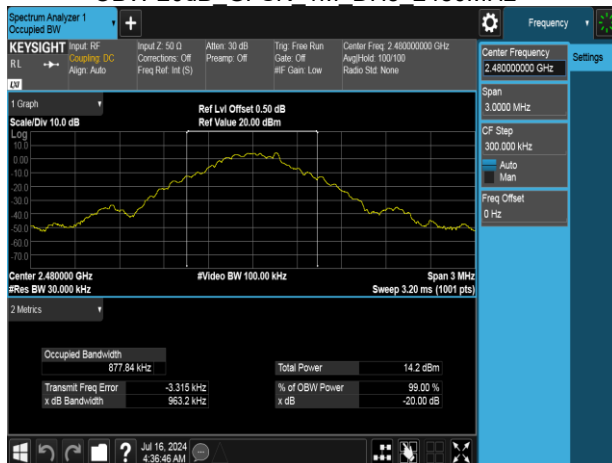

OBW 20dB $\pi/4$ DQPSK 2M DH5 2480MHz

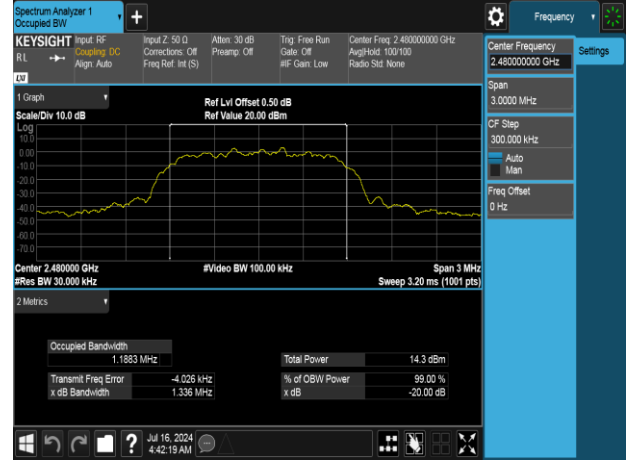




Report No.: TMWK2407002364KR

Page: 25 / 76
Rev.: 03

OBW 20dB 8DPSK 3M DH5 2402MHz

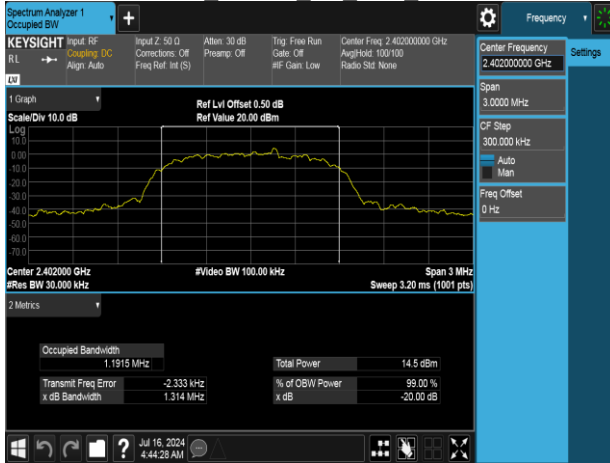

OBW 20dB 8DPSK 3M DH5 2441MHz




OBW 20dB 8DPSK 3M DH5 2480MHz




BANDWIDTH 99%


IC OBW 99% GFSK 1M DH5 2402MHz

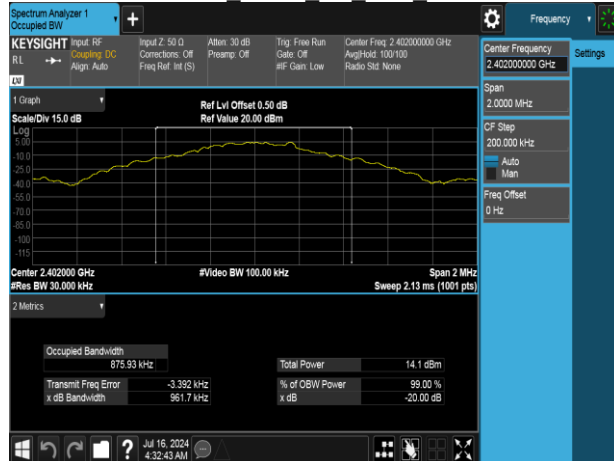


IC OBW 99% π /4DQPSK 2M DH5 2402MHz

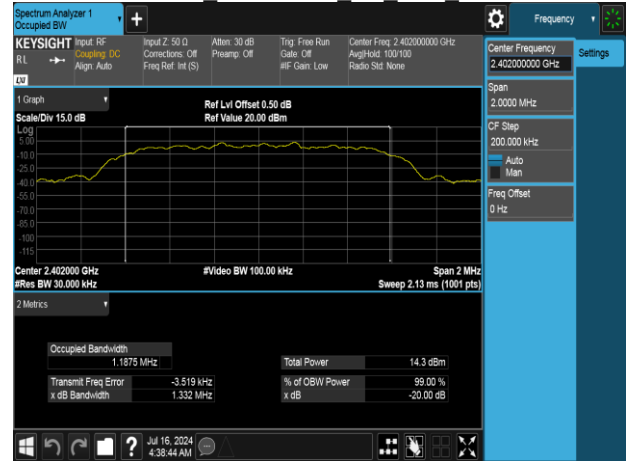

IC OBW 99% GFSK 1M DH5 2441MHz

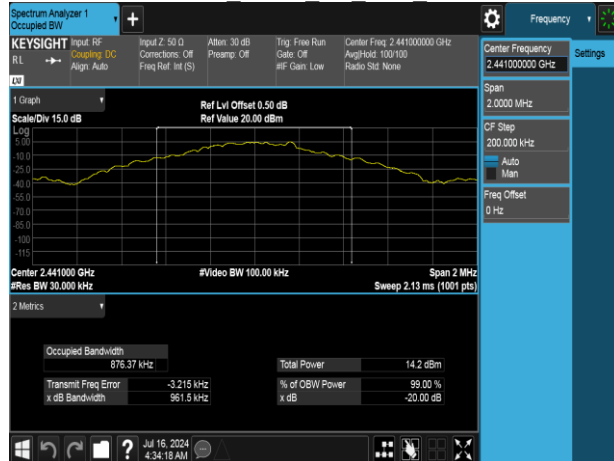

IC OBW 99% π /4DQPSK 2M DH5 2441MHz

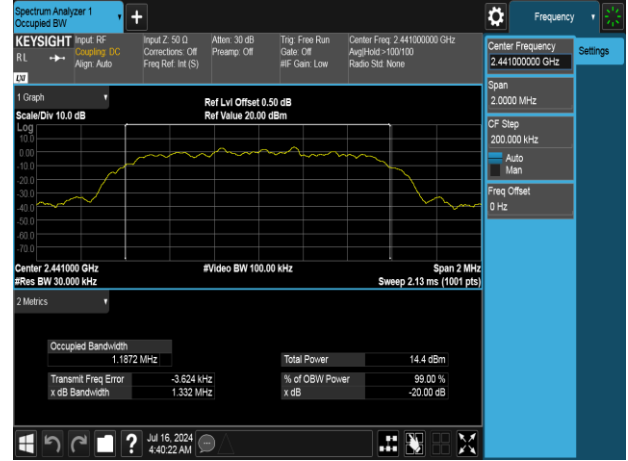


IC OBW 99% GFSK 1M DH5 2480MHz



IC OBW 99% π /4DQPSK 2M DH5 2480MHz




IC OBW 99% 8DPSK 3M DH5 2402MHz

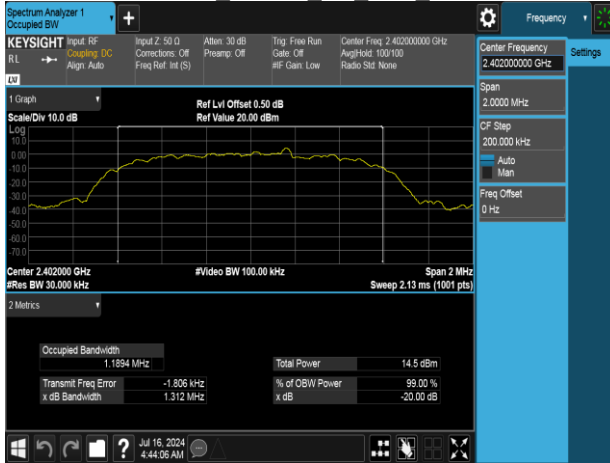

IC OBW 99% 8DPSK 3M DH5 2441MHz



IC OBW 99% 8DPSK 3M DH5 2480MHz

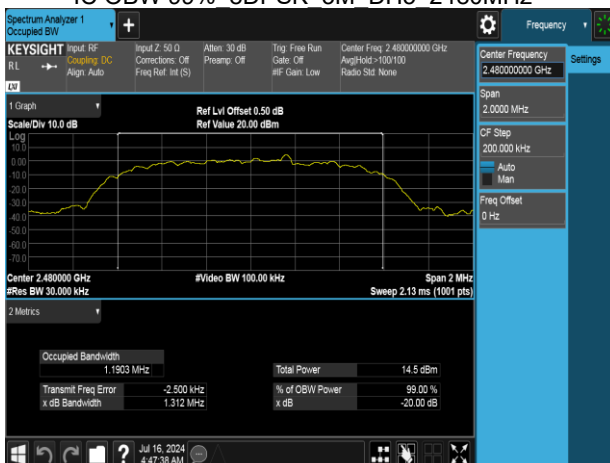

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(a)(1),

Peak output power :

FCC

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Average output power : For reporting purposes only.

4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup

Refer to section 1.9.



Report No.: TMWK2407002364KR

Page: 29 / 76
Rev.: 03

4.3.4 Test Result

Temperature: 23.1°C
Humidity: 55% RH

Test date: July 16, 2024
Tested by: Marco Chan

Peak & Average output power :

1M BR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	6	6.72	4.699	125
Mid	2441	7	6.64	4.613	125
High	2480	7	6.65	4.624	125

1M BR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	6	6.68	4.660	125
Mid	2441	7	6.61	4.585	125
High	2480	7	6.64	4.617	125

2M EDR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	9.41	8.730	125
Mid	2441	10	9.30	8.511	125
High	2480	10	9.24	8.395	125

2M EDR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	6.86	4.849	125
Mid	2441	10	6.78	4.760	125
High	2480	10	6.80	4.782	125

3M EDR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	9.92	9.817	125
Mid	2441	10	9.79	9.528	125
High	2480	10	9.75	9.441	125

3M EDR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	6.90	4.902	125
Mid	2441	10	6.79	4.780	125
High	2480	10	6.81	4.802	125

Note: Measured by power meter, cable loss + Duty cycle factor has been offsetted to the power meter for Avg. power and cable loss has been offsetted for Peak power measurement.

4.4 FREQUENCY SEPARATION

4.4.1 Test Limit

According to §15.247(a)(1),

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 300kHz, VBW = 910kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

4.4.3 Test Setup

Refer to section 1.9.



Report No.: TMWK2407002364KR

Page: 31 / 76
Rev.: 03

4.4.4 Test Result

Temperature: 23.1°C

Test date: July 16, 2024

Humidity: 55% RH

Tested by: Marco Chan

Test mode: GFSK_BDR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.000	0.64	PASS
Mid	2441	1.000	0.64	PASS
High	2480	1.000	0.64	PASS

Test mode: $\pi/4$ -DQPSK_2Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.000	0.89	PASS
Mid	2441	1.000	0.89	PASS
High	2480	1.000	0.89	PASS







Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.000	0.88	PASS
Mid	2441	1.000	0.88	PASS
High	2480	1.000	0.88	PASS



Report No.: TMWK2407002364KR

Page: 32 / 76
Rev.: 03

Test Data

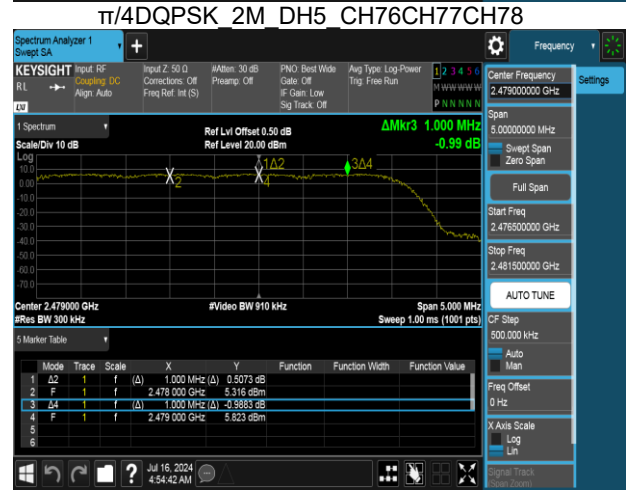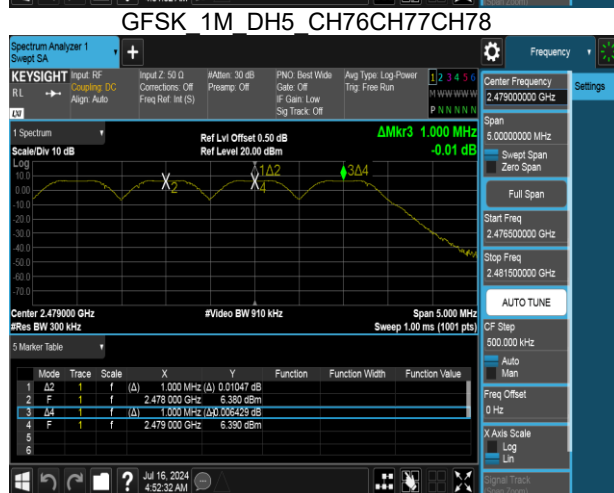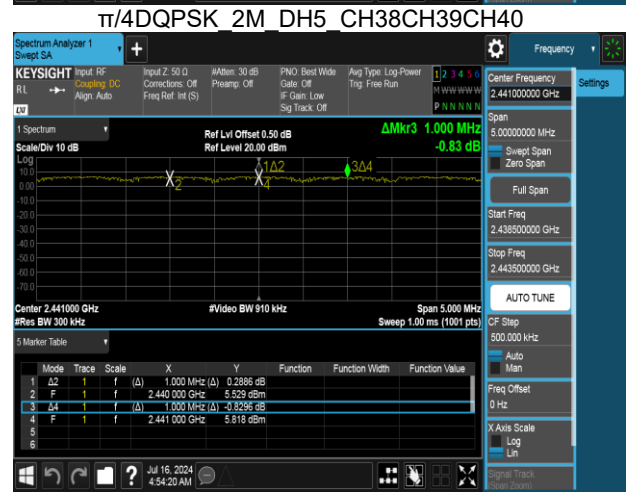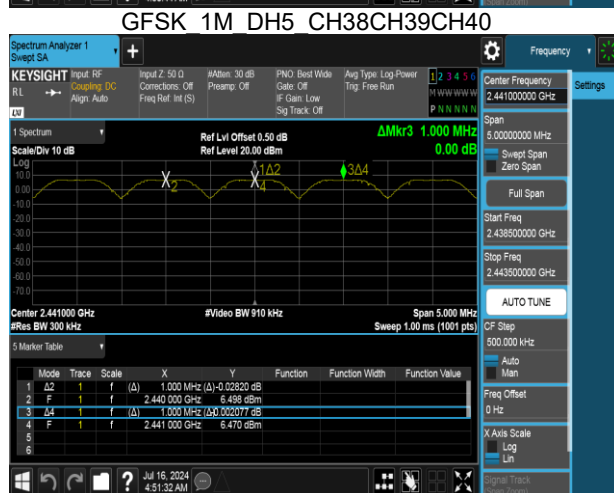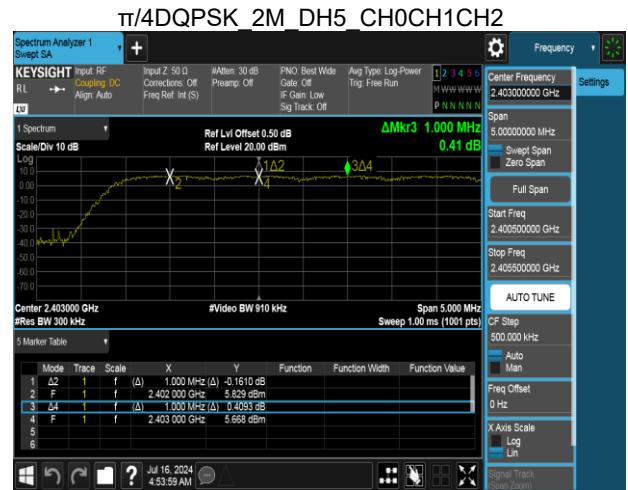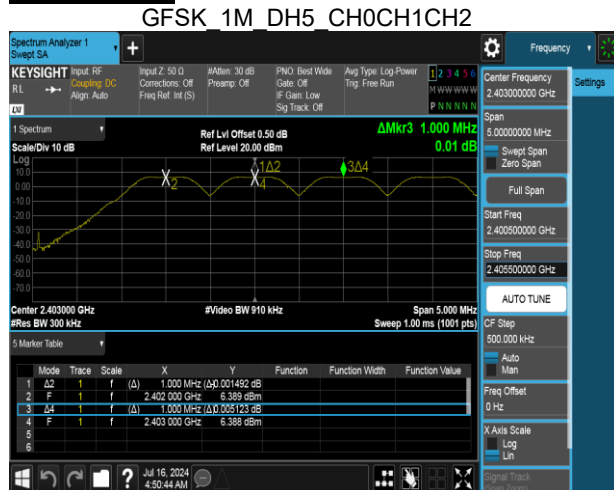


Report No.: TMWK2407002364KR

8DPSK 3M DH5 CH0CH1CH2



8DPSK 3M DH5 CH38CH39CH40

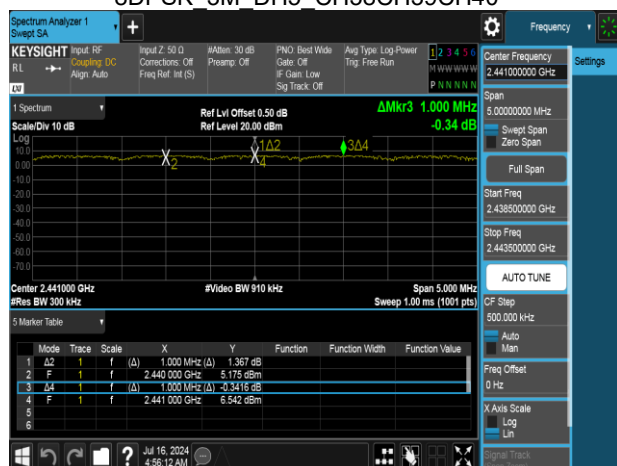

8DPSK 3M DH5 CH76CH77CH78



4.5 NUMBER OF HOPPING

4.5.1 Test Limit

According to §15.247(a)(1)(iii),

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

4.5.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2441 MHz, RBW=300KHz, VBW =910kHz for left half.
4. Set spectrum analyzer Start Freq. = 2441 MHz, Stop Freq. = 2483.5 MHz, RBW=300KHz, VBW =910kHz for right half.
5. Max hold, view and count how many channel in the band.

4.5.3 Test Setup

Refer to section 1.9.

4.5.4 Test Result

Temperature: 23.1°C

Test date: July 16, 2024

Humidity: 55% RH





Tested by: Marco Chan

Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BDR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	



Report No.: TMWK2407002364KR

Test Data

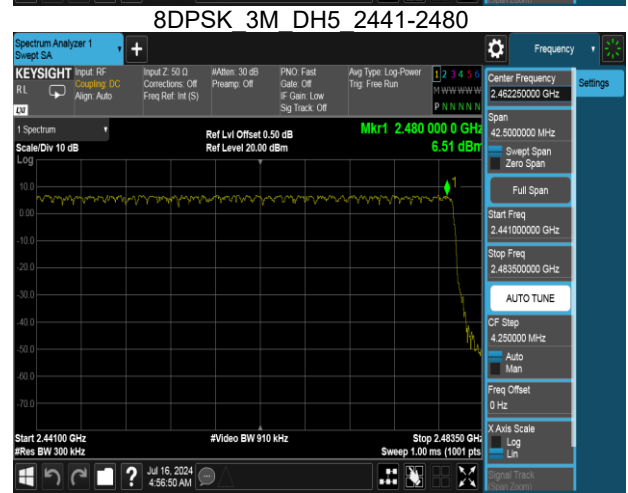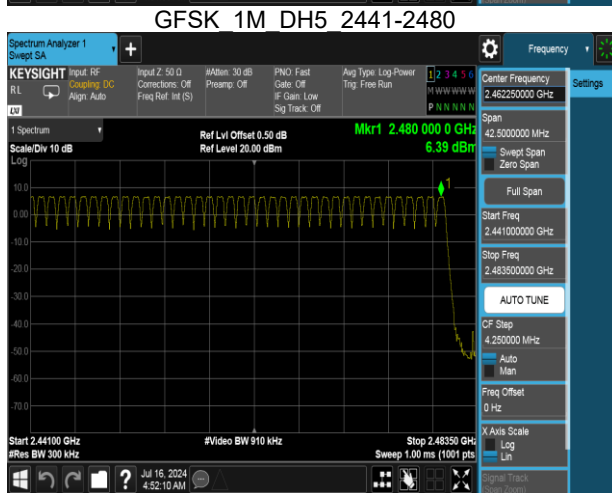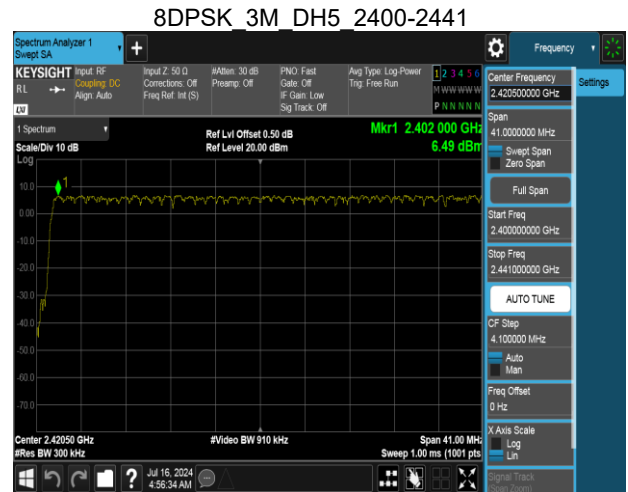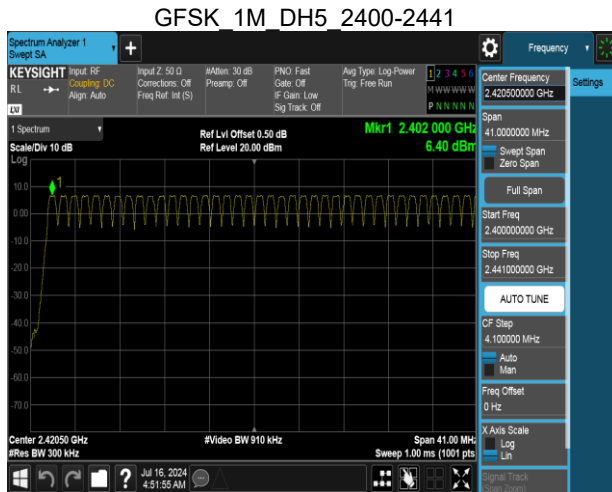

4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

According to §15.247(d),

Limit	-20 dBc
-------	---------

4.6.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with both hopping "ON" and "OFF" modes ".

4.6.3 Test Setup

Refer to section 1.9.

4.6.4 Test Result

Temperature: 23.1°C

Test date: July 16, 2024

Humidity: 55% RH

Tested by: Marco Chan



Report No.: TMWK2407002364KR

Page: 37 / 76
Rev.: 03

Test Data

Band Edge

Band Edge GFSK 1M DH5 2402MHz



Band Edge 8DPSK 3M DH5 2402MHz



Band Edge GFSK 1M DH5 2480MHz



Band Edge 8DPSK 3M DH5 2480MHz



Hopping mode

Hopping Band Edge GFSK 1M DH5 2402MHz



Hopping Band Edge 8DPSK 3M DH5 2402MHz



Hopping Band Edge GFSK 1M DH5 2480MHz



Hopping Band Edge 8DPSK 3M DH5 2480MHz




Spurious Emission

Spurious Emission GFSK 1M DH5 2402MHz




Spurious Emission $\pi/4$ DQPSK 2M DH5 2402MHz

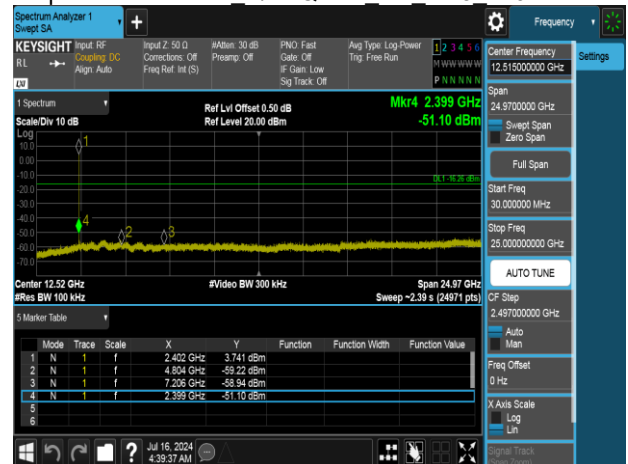

Spurious Emission GFSK 1M DH5 2441MHz




Spurious Emission $\pi/4$ DQPSK 2M DH5 2441MHz

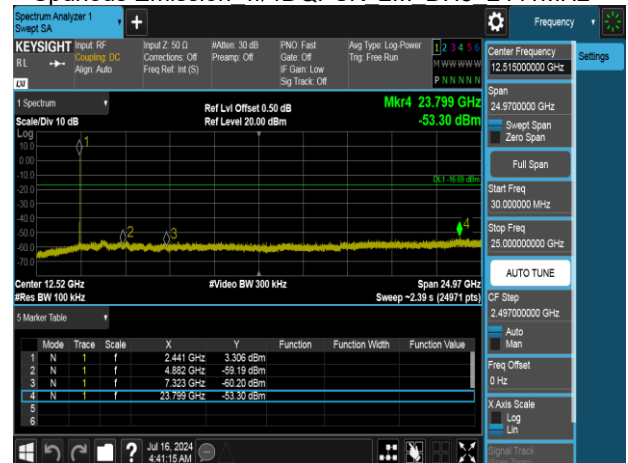


Spurious Emission GFSK 1M DH5 2480MHz




Spurious Emission $\pi/4$ DQPSK 2M DH5 2480MHz

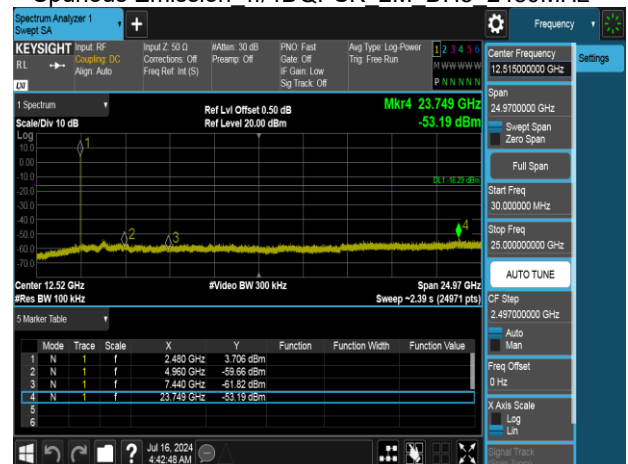


Spurious Emission 8DPSK 3M DH5 2402MHz

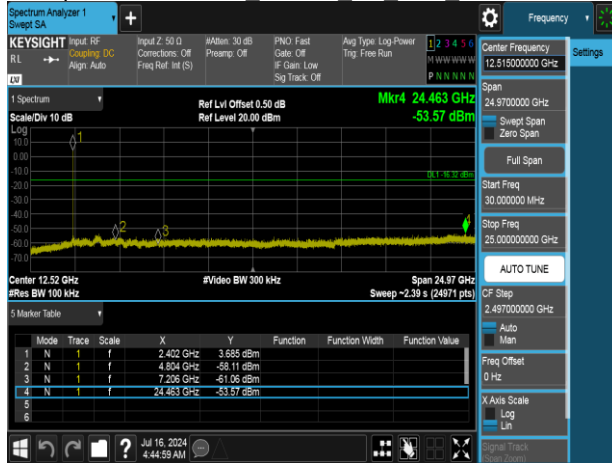

Spurious Emission 8DPSK 3M DH5 2441MHz

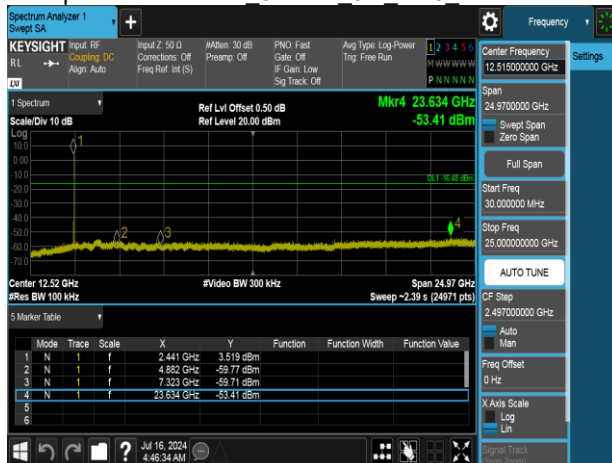

Spurious Emission 8DPSK 3M DH5 2480MHz

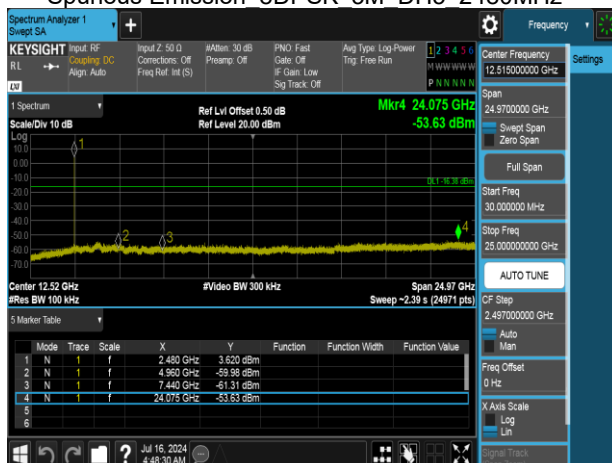

4.7 TIME OF OCCUPANCY (DWEELL TIME)

4.7.1 Test Limit

According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = 5 ms ~15ms(Depends on signal characteristics)

4.7.3 Test Setup

Refer to section 1.9.



Report No.: TMWK2407002364KR

Page: 42 / 76
Rev.: 03

4.7.4 Test Result

Temperature: 23.1°C

Test date: July 16, 2024

Humidity: 55% RH

Tested by: Marco Chan

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
Mid	DH1	123.20	400
	DH3	262.40	400
	DH5	308.80	400

$\pi/4$ DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
Mid	2DH1	124.80	400
	2DH3	262.40	400
	2DH5	307.20	400

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
Mid	3DH1	123.20	400
	3DH3	262.40	400
	3DH5	308.80	400

GFSK (1Mbps):

CH Mid	DH1 time slot	=	0.385	*	(1600/2/79)	*	31.6	=	123.20 (ms)
	DH3 time slot	=	1.640	*	(1600/4/79)	*	31.6	=	262.40 (ms)
	DH5 time slot	=	2.895	*	(1600/6/79)	*	31.6	=	308.80 (ms)

$\pi/4$ -DQPSK (2Mbps):

CH Mid	2DH1 time slot	=	0.390	*	(1600/2/79)	*	31.6	=	124.80 (ms)
	2DH3 time slot	=	1.640	*	(1600/4/79)	*	31.6	=	262.40 (ms)
	2DH5 time slot	=	2.880	*	(1600/6/79)	*	31.6	=	307.20 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slot	=	0.385	*	(1600/2/79)	*	31.6	=	123.20 (ms)
	3DH3 time slot	=	1.640	*	(1600/4/79)	*	31.6	=	262.40 (ms)
	3DH5 time slot	=	2.895	*	(1600/6/79)	*	31.6	=	308.80 (ms)

A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps) for AFH Mode			
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)
20	DH5	154.40	400
$\pi/4$ DQPSK (2Mbps) for AFH Mode			
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)
20	2DH5	153.60	400
8-DPSK (3Mbps) for AFH Mode			
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)
20	3DH5	154.40	400

GFSK (1Mbps):

DH5 time slot = 2.895 (ms) * (800/6/20) * 8 = 154.40 (ms)

 $\pi/4$ -DQPSK (2Mbps):

2DH5 time slot = 2.880 (ms) * (800/6/20) * 8 = 153.60 (ms)

8-DPSK (3Mbps):

3DH5 time slot = 2.895 (ms) * (800/6/20) * 8 = 154.40 (ms)

Note: Based on normal hopping, the DH5 type has worse results than DH1, so only DH5 is recorded.