

# KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE  
6-8-7 NISHITENMA  
KITA-KU OSAKA 530-0047 JAPAN



IKOMA TESTING LABORATORY  
12128 TAKAYAMA-CHO  
IKOMA-CITY NARA 630-0101 JAPAN

## TEST REPORT

Report No.A-001-03-C

Date: 18 March 2003

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

All the tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

### 1. Applicant

Company Name : Pacific Industrial Co., LTD.  
Mailing Address : Godo-cho, Anpachi, Gifu, 503-2397 Japan

### 2. Identification of Tested Device

Type of Device : Transmitter  
Kind of Equipment Authorization : ☐: DoC ☒: Certification ☐: Verification  
FCC ID : PAX PMV1017  
Device Name : Tire Pressure Monitoring System Transmitter  
Trade Name : PACIFIC  
Model Number : PMV-1017  
Serial Number : 030315 ☒: Prototype ☐: Pre-production ☐: Production  
Date of Manufacture : March 2003

### 3. Test Items and Procedure

☐: AC Power Line Conducted Emission Measurement  
☒: Radiated Emission Measurement  
☒: Emission Bandwidth Measurement

Above all tests were performed under: ANSI C63.4 – 1992

☒: without deviation, ☐: with deviation(details are found inside of this report)

### 4. Date of Test

Receipt of Test Sample : 15 March 2003  
Condition of Test Sample : ☒: Damage is not found on the set.  
☐: Damage is found on the set. (Details are described in this report)  
Test Completed on : 15 March 2003

A handwritten signature in blue ink, appearing to read "S. Izumi".

Seiichi Izumi  
General Manager/ Ikoma Testing Laboratory

Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY .....</b> | <b>3</b>  |
| 0.1. Laboratory Accreditation .....                                  | 3         |
| 0.2. Measurement Uncertainty .....                                   | 3         |
| <b>1. CERTIFICATION OF THE COMPLIANCE .....</b>                      | <b>3</b>  |
| <b>2. GENERAL INFORMATION .....</b>                                  | <b>4</b>  |
| 2.1. Product Description .....                                       | 4         |
| 2.2. Description for Equipment Authorization .....                   | 4         |
| 2.3. Test Facility .....                                             | 5         |
| <b>3. TESTED SYSTEM .....</b>                                        | <b>6</b>  |
| 3.1. Test Mode .....                                                 | 6         |
| 3.2. Characteristics of transmitting train .....                     | 6         |
| 3.3. Characterization and condition of EUT System .....              | 8         |
| <b>4. RADIATED EMISSION MEASUREMENT .....</b>                        | <b>9</b>  |
| 4.1. Test Procedure .....                                            | 9         |
| 4.2. Test Results .....                                              | 10        |
| <b>5. EMISSION BANDWIDTH MEASUREMENT .....</b>                       | <b>16</b> |
| 5.1. Test Configuration .....                                        | 16        |
| 5.2. Test Results .....                                              | 16        |
| <b>6. USED TEST EQUIPMENTS AND CALIBRATION STATUS .....</b>          | <b>18</b> |

## 0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY

### 0.1. Laboratory Accreditation

KEC is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP) for the specific scope of accreditation under Lab Code: 200207-0.

When the test report concerns with the NVLAP accreditation test, the first page of the test report is signed by NVLAP Approved Signatory accompanied by the NVLAP logo.

The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

### 0.2. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measured is complete only when a statement of uncertainty is given.

KEC quotes Measurement Uncertainty (U)

of +/- 4.9 dB for Radiated Emissions

of +/- 2.2 dB for Conducted Emissions

## 1. CERTIFICATION OF THE COMPLIANCE

This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

KEC evaluation criteria for compliance:

The Product complies, if

the measured results are below the specification limit by a margin more than or equal to

1/2 U (2.5 dB) for Radiated Emissions

U (2.2 dB) for Conducted Emissions

## 2. GENERAL INFORMATION

### 2.1. Product Description

The PACIFIC Model No. : PMV-1017 (referred to as the EUT in this report) is a Tire Pressure Monitoring System Transmitter for cars.

#### 1) Technical Specifications

· Operating frequency range : 314.98 MHz  
Type of antenna : Internal Antenna  
Type of Emission : F2D (FSK)  
Frequency deviation : 40 kHz (Nominal)

#### 2) Contained Oscillators

SAW : 314.73 MHz

#### 3) Rated Power Supply

: DC3V

### 2.2. Description for Equipment Authorization

|                                                            |                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1) Type of device                                         | : <input checked="" type="checkbox"/> Intentional Radiators                                                                                                                                                                                                                                                                      |
| (2) Reference Rule and Specification                       | : FCC Rule Part 15 Subpart C, Section 15.231 Periodic operation in the band 40.66 - 40.70MHz and above 70 MHz<br><input type="checkbox"/> Section 15.207<br><input checked="" type="checkbox"/> Section 15.209<br><input checked="" type="checkbox"/> Section 15.231(c)<br><input checked="" type="checkbox"/> Section 15.231(e) |
| (3) Kind of Equipment Authorization                        | : <input type="checkbox"/> DoC <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification                                                                                                                                                                                                           |
| (4) Procedure of Application                               | : <input type="checkbox"/> Original Equipment <input checked="" type="checkbox"/> Modification                                                                                                                                                                                                                                   |
| (5) Highest Frequency used in the Device                   | : 314.98 MHz                                                                                                                                                                                                                                                                                                                     |
| (6) Upper Frequency of Radiated Emission Measurement Range | : <input type="checkbox"/> 1000 MHz <input type="checkbox"/> 2000 MHz <input type="checkbox"/> 5000 MHz<br><input checked="" type="checkbox"/> Tenth harmonics of the highest fundamental frequency                                                                                                                              |

## 2.3. Test Facility

All tests described in this report were performed by:

Name: KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)  
IKOMA TESTING LABORATORY

OpenArea TestSite ☐ No.1 ☐ No.3 ☐ No.4

Anechoic Chamber ☐ No.1 ☒ No.3

Shielded Room ☐ No.1 ☐ No.2 ☐ No.4 ☐ No.5 ☐ No.6

Address: 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The KEC has been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO/IEC 17025.

Also the laboratory has been authorized by TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (ISO/IEC 17025).

EMC M.C. Anechoic Chamber No.3 has been filed with the Industry Canada under the criteria of RSS212, issue 1. (File number : IC4149-3)

### 3. TESTED SYSTEM

#### 3.1. Test Mode

Continuously transmitted mode.

[Note]

The EUT was operated continuously in measurement. In the measurement of radiated emission.

The EUT was placed horizontally or vertically on the test table.

The data of operation modes that produce the maximum emission were reported at each frequency.

#### 3.2. Characteristics of transmitting train

The transmission of EUT is less than 1.0 second and the intervals are greater than 10 seconds.  
See plot figure 1 to 4.

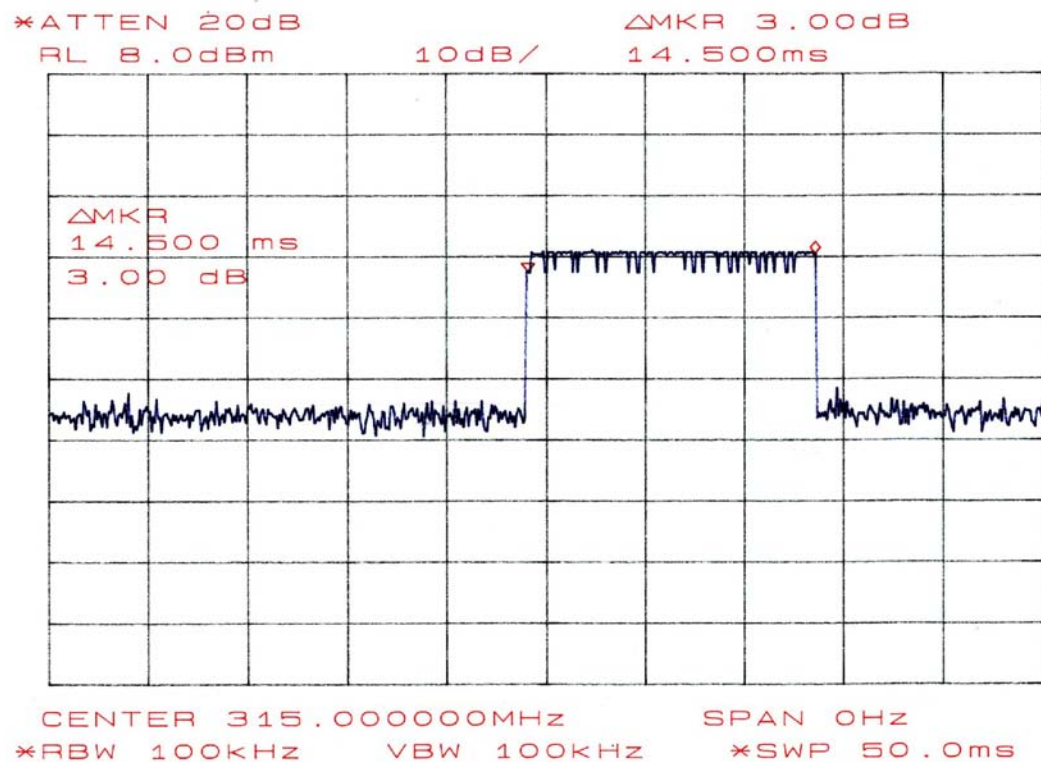


Figure 1. normal transmission

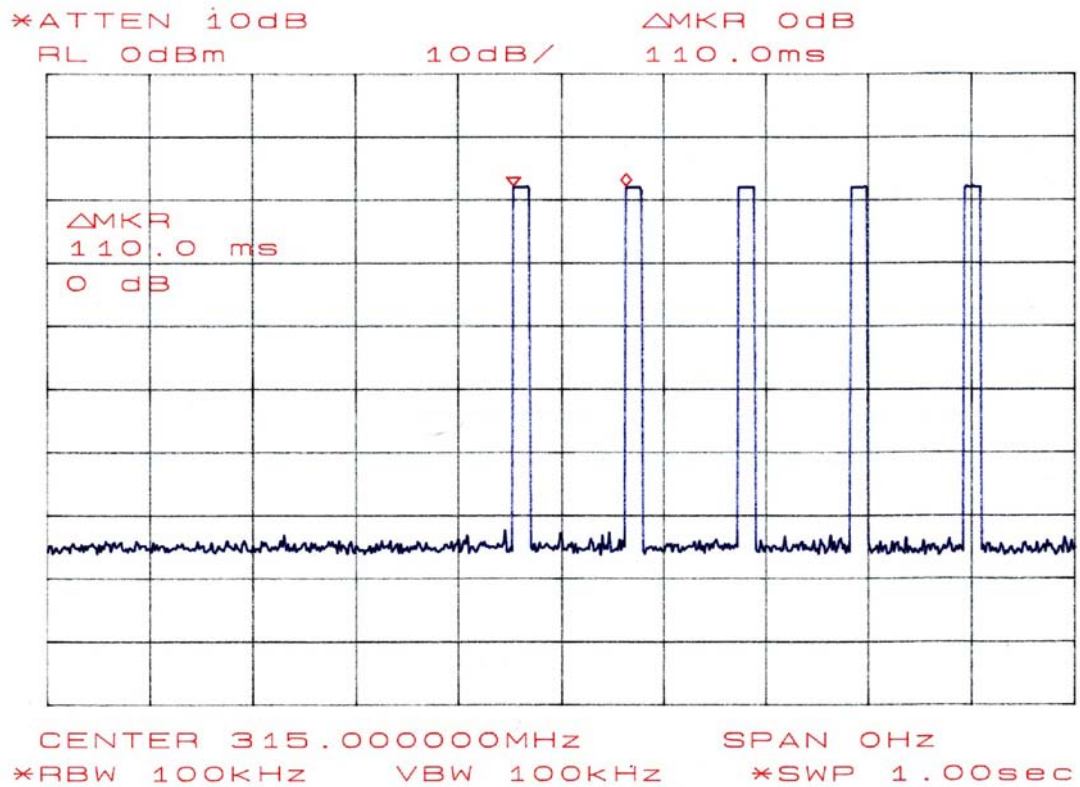


Figure 2. Alert status transmission 1

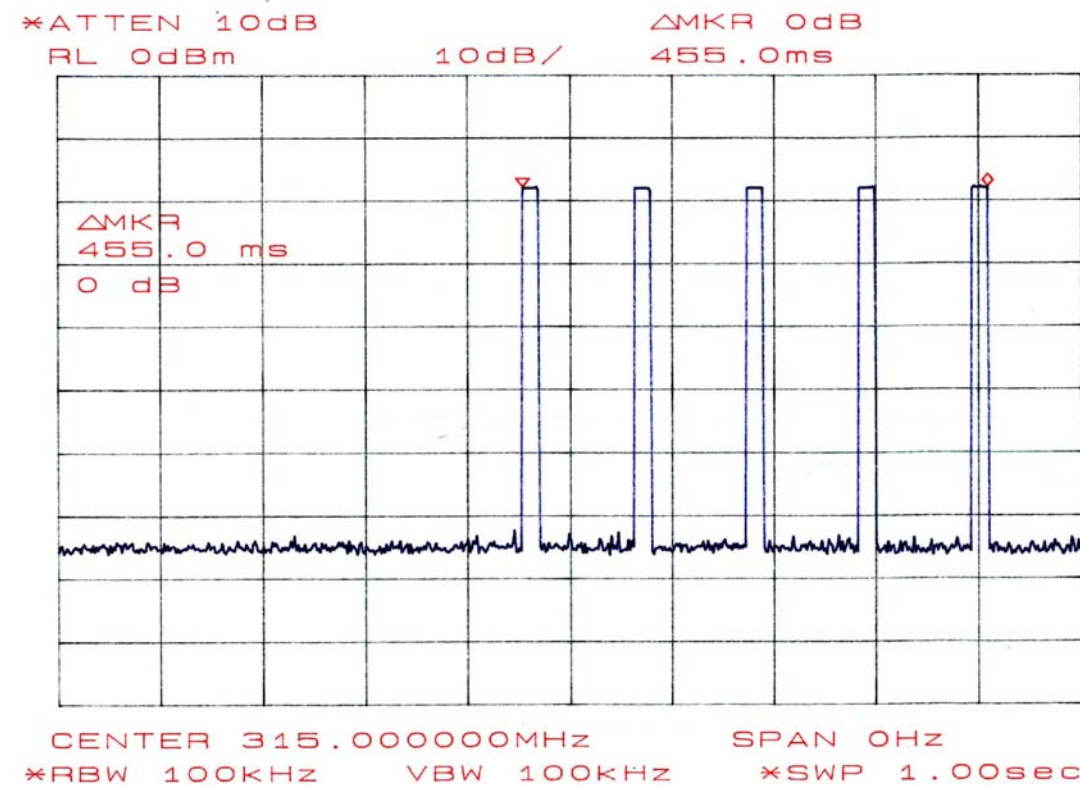


Figure 3. Alert status transmission 1

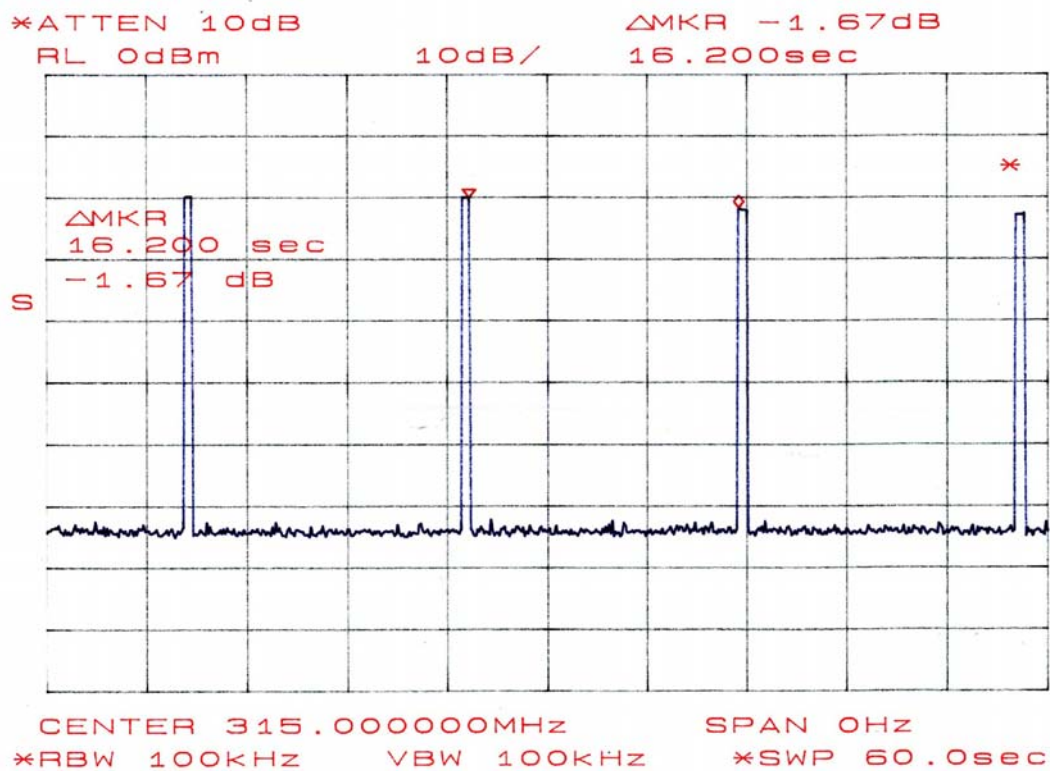


Figure 4. Transmission interval

- [Note]
- (1) In figure 3, the duration of each transmission is not greater than one second.
  - (2) In figure 4, the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

3.3. Characterization and condition of EUT System

☒ : normal , ☐ : not normal (that is )

#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1. Test Procedure

|     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1) | Configure the EUT System in accordance with ANSI C63.4-1992 section 8.<br><input checked="" type="checkbox"/> : without deviation, <input type="checkbox"/> : with deviation(details are found below)<br>See also the block diagram and the photographs of EUT System configuration in this report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| (2) | If the EUT system is connected to a public power network, all power cords for the EUT System are connected the receptacle on the turntable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| (3) | Warm up the EUT System.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| (4) | Activate the EUT System and run the prepared software for the test, if necessary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| (5) | To find out the emissions of the EUT System, preliminary radiated measurement are performed at a closer distance than that specified for final radiated measurement using the spectrum analyzer (*1) and the broad band antenna.<br>In the frequency above 1 GHz, it is performed using the spectrum analyzer (*2) and the horn antenna.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| (6) | To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| (7) | The spectrums are scanned from 30 MHz to the upper frequency of measurement range, and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| (8) | In final compliance test, the six highest emissions minimum, recorded above, are measured at the specified distance using the broad band antenna or the tuned dipole antenna and the test receiver (*3).<br>In the frequency above 1 GHz, the measurements are performed by the horn antenna and<br><input type="checkbox"/> the test receiver (*4).<br><input checked="" type="checkbox"/> the spectrum analyzer(*2) with pre-amplifier.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|     | <div data-bbox="363 1173 440 1202">[Note]</div> <div data-bbox="284 1209 319 1238">(*1)</div> <div data-bbox="363 1209 951 1330">           Spectrum Analyzer Set Up Conditions<br/>           Frequency range : 30 - 1000 MHz<br/>           Resolution bandwidth : 100 kHz<br/>           Detector function : Peak mode         </div> <div data-bbox="284 1337 319 1366">(*2)</div> <div data-bbox="363 1337 1324 1525">           Spectrum Analyzer Set Up Conditions<br/>           Frequency range : 1 GHz - Upper frequency of measurement range<br/>           Resolution bandwidth : 1 MHz<br/>           Video bandwidth : 1 MHz<br/>           Attenuator : 10 dB<br/>           Detector function : Peak mode         </div> <div data-bbox="284 1532 319 1561">(*3)</div> <div data-bbox="363 1532 999 1621">           Test Receiver Set Up Conditions<br/>           Detector function : Quasi-Peak or Peak<br/>           IF bandwidth : 120 kHz         </div> <div data-bbox="284 1628 319 1657">(*4)</div> <div data-bbox="363 1628 868 1715">           Test Receiver Set Up Conditions<br/>           Detector function : Average<br/>           IF bandwidth : 1 MHz         </div> |

## 4.2. Test Results

Measurement Distance ☒: 3m ☐: 10m

| Measured Frequency | Antenna Factor<br>(*1) | Peak to Average Factor<br>(*2) | Meter Reading           |                       | Maximum Field Strength | Limits     | Margin for Limits |
|--------------------|------------------------|--------------------------------|-------------------------|-----------------------|------------------------|------------|-------------------|
|                    |                        |                                | Horizontal Polarization | Vertical Polarization |                        |            |                   |
| ( MHz )            | ( dB/m )               | ( dB )                         | ( dBuV )                | ( dBuV )              | ( dBuV/m )             | ( dBuV/m ) | ( dB )            |
| [ Fundamental ]    |                        |                                |                         |                       |                        |            |                   |
| 314.98             | 18.6                   | -16.7                          | 62.7                    | 58.8                  | 64.6                   | 67.7       | 3.1               |
| 315.02             | 18.6                   | -16.7                          | 62.5                    | 58.3                  | 64.4                   | 67.7       | 3.3               |
| [ Harmonics ]      |                        |                                |                         |                       |                        |            |                   |
| 629.88             | 24.6                   | -16.7                          | 31.3                    | 27.3                  | 39.2                   | 47.7       | 8.5               |
| 944.82             | 28.8                   | -16.7                          | 27.2                    | 25.1                  | 39.3                   | 47.7       | 8.4               |
| 1259.83            | -12.8                  | -16.7                          | 68.7                    | 61.0                  | 39.2                   | 54.0       | 14.8              |
| 1574.81            | -12.6                  | -16.7                          | 73.1                    | 65.8                  | 43.8                   | 54.0       | 10.2              |
| 1889.80            | -11.1                  | -16.7                          | 61.1                    | 58.1                  | 33.3                   | 54.0       | 20.7              |
| 2204.77            | -10.9                  | -16.7                          | 58.0                    | 57.1                  | 30.4                   | 54.0       | 23.6              |
| 2519.75            | -10.5                  | -16.7                          | 55.6                    | 49.6                  | 28.4                   | 54.0       | 25.6              |
| 2834.73            | - 9.7                  | -16.7                          | 53.5                    | 52.4                  | 27.1                   | 54.0       | 26.9              |
| 3149.71            | - 8.8                  | -16.7                          | 46.4                    | 44.8                  | 20.9                   | 54.0       | 33.1              |

## [Note]

The restrict band data below 1GHz, see the figure 5.  
30-1000MHz spectrum chart.

## Restricted Band Above 1GHz

| Measured Frequency | Antenna Factor<br>(*1) | Peak to Average Factor<br>(*2) | Meter Reading           |                       | Maximum Field Strength | Limit      | Margin for Limits |
|--------------------|------------------------|--------------------------------|-------------------------|-----------------------|------------------------|------------|-------------------|
|                    |                        |                                | Horizontal Polarization | Vertical Polarization |                        |            |                   |
| [ MHz ]            | [ dB/m ]               | [ dB ]                         | [ dBuV ]                | [ dBuV ]              | [ dBuV/m ]             | [ dBuV/m ] | [ dB ]            |
| 1000.00            | -13.5                  | -16.7                          | <45.0                   | <45.0                 | <14.8                  | 54.0       | >39.2             |
| 1240.00            | -12.7                  | -16.7                          | <45.0                   | <45.0                 | <15.6                  | 54.0       | >38.4             |
| 1300.00            | -12.5                  | -16.7                          | <47.0                   | <47.0                 | <17.8                  | 54.0       | >36.2             |
| 1427.00            | -12.1                  | -16.7                          | <47.0                   | <47.0                 | <18.2                  | 54.0       | >35.8             |
| 1435.00            | -12.1                  | -16.7                          | <47.0                   | <47.0                 | <18.2                  | 54.0       | >35.8             |
| 1574.81            | -12.6                  | -16.7                          | 73.1                    | 65.8                  | 43.8                   | 54.0       | 10.2              |
| 1626.50            | -12.2                  | -16.7                          | <47.0                   | <47.0                 | <18.1                  | 54.0       | >35.9             |
| 1645.50            | -12.1                  | -16.7                          | <47.0                   | <47.0                 | <18.2                  | 54.0       | >35.8             |
| 1646.50            | -12.1                  | -16.7                          | <47.0                   | <47.0                 | <18.2                  | 54.0       | >35.8             |
| 1660.00            | -12.0                  | -16.7                          | <47.0                   | <47.0                 | <18.3                  | 54.0       | >35.7             |
| 1710.00            | -11.5                  | -16.7                          | <47.0                   | <47.0                 | <18.8                  | 54.0       | >35.2             |
| 1718.80            | -11.5                  | -16.7                          | <47.0                   | <47.0                 | <18.8                  | 54.0       | >35.2             |
| 1722.20            | -11.5                  | -16.7                          | <47.0                   | <47.0                 | <18.8                  | 54.0       | >35.2             |
| 2200.00            | -10.3                  | -16.7                          | <46.0                   | <46.0                 | <19.0                  | 54.0       | >35.0             |
| 2204.77            | -10.9                  | -16.7                          | 58.0                    | 57.4                  | 30.4                   | 54.0       | 23.6              |
| 2300.00            | -10.5                  | -16.7                          | <46.0                   | <46.0                 | <18.8                  | 54.0       | >35.2             |
| 2310.00            | -10.4                  | -16.7                          | <46.0                   | <46.0                 | <18.9                  | 54.0       | >35.1             |
| 2390.00            | -10.5                  | -16.7                          | <46.0                   | <46.0                 | <18.8                  | 54.0       | >35.2             |
| 2483.50            | -10.5                  | -16.7                          | <47.0                   | <47.0                 | <19.8                  | 54.0       | >34.2             |
| 2500.00            | -10.4                  | -16.7                          | <47.0                   | <47.0                 | <19.9                  | 54.0       | >34.1             |
| 2655.00            | -9.9                   | -16.7                          | <47.0                   | <47.0                 | <20.4                  | 54.0       | >33.6             |
| 2834.73            | -9.7                   | -16.7                          | 53.5                    | 52.4                  | 27.1                   | 54.0       | 26.9              |
| 2900.00            | -9.2                   | -16.7                          | <47.0                   | <47.0                 | <21.1                  | 54.0       | >32.9             |
| 3260.00            | -8.9                   | -16.7                          | <45.0                   | <45.0                 | <19.4                  | 54.0       | >34.6             |
| 3267.00            | -8.9                   | -16.7                          | <45.0                   | <45.0                 | <19.4                  | 54.0       | >34.6             |

## RADIATED EMISSION

Model Name : Transmitter  
Model No. : PMV-1017  
Serial No. : 030315  
Test Condition : Continuous Tx mode

Reference No. : FCC Part15 subpart C  
Power Supply : DC3V  
Temp/Humi : 22°C, 38%  
Operator : Ikuya Minematsu

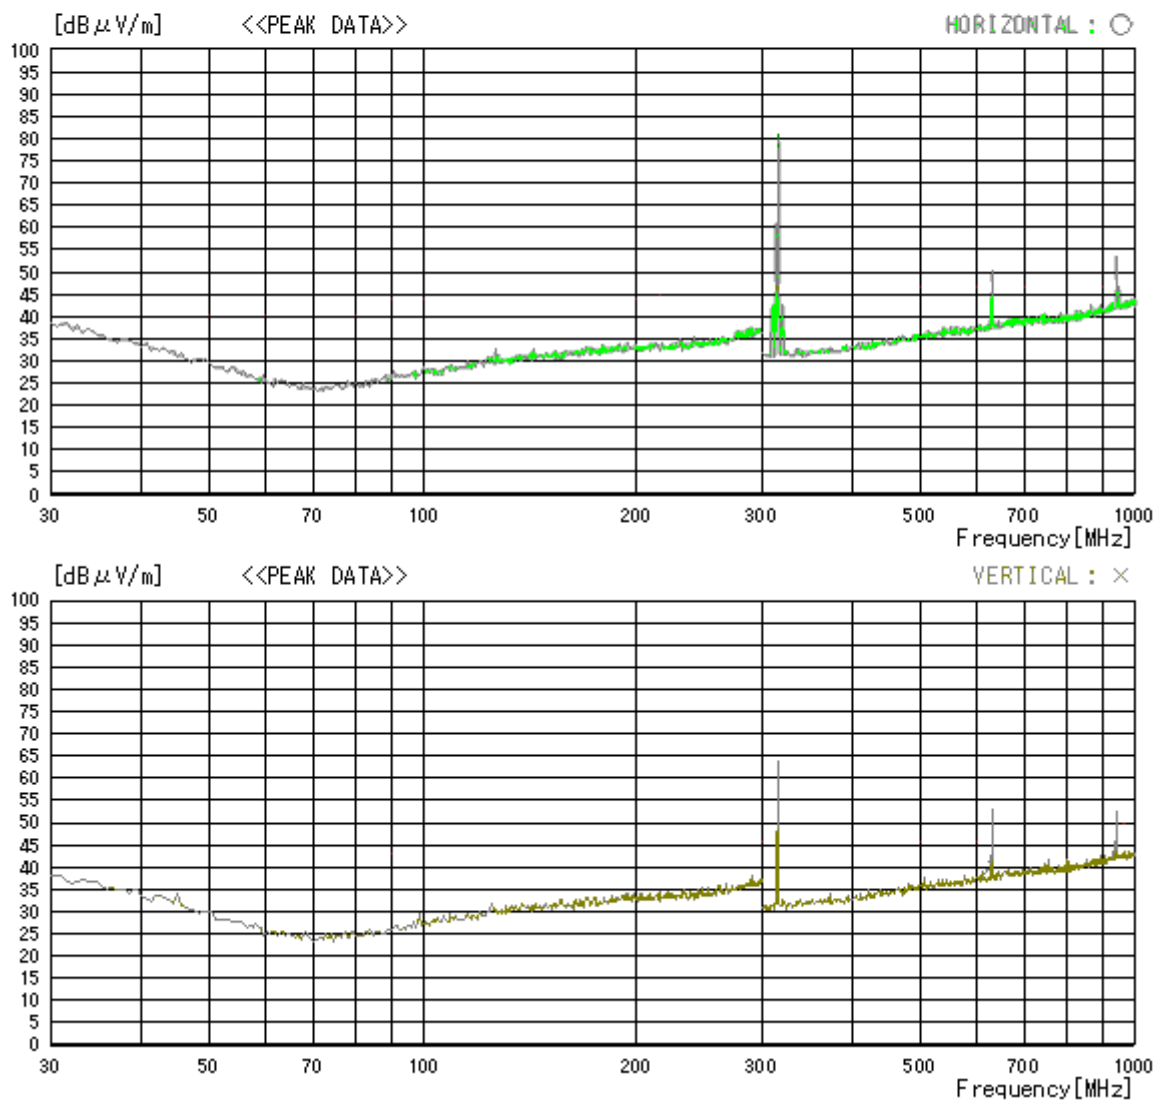


Figure 5. 30-1000MHz spectrum chart

- Continued -

## [Remark]

(\*1) : Antenna Factor includes the cable loss, above 1GHz, antenna factor includes both of the cable loss and pre-amplifier gain.

(\*2) : Conversion Factor, See figure 6 and 7 (the picture of spectrum analyzer) and See Page 14, Calculation of Conversion Factor (Peak detector to Average).

(\*3) : If the measurement value with the peak detector meets the average limits, the measurement with average detector is omitted.

In FCC rule, the limit of measurement of radiated emission above 1GHz is regulated on the average value. Therefore, the average value above 1GHz was determined by using a reduced the video bandwidth of spectrum analyzer to obtain the average value in this case spectrum analyzer set up condition.

Resolution Bandwidth : 1 MHz

Video Bandwidth : 30Hz

Detector function : Peak detector

## [Note]

- (1) \* mark in Measured Frequency : Measured with the tuned dipole antenna.  
No mark in Measured Frequency : Measured with the broadband antenna.
- (2) All emission not reported were less than 10dB $\mu$ V at meter reading.

## [Calculation method]

Maximum Field Strength (dB $\mu$ V/m)

= Meter Reading (at maximum level of Horizontal or Vertical) (dB $\mu$ V) + Antenna Factor (dB/m)

## [Calculation of Limit (Average detector) ]

Fundamental

$L = 20 \log (16.667 \times F - 2833.333)$  Where, L: Limit [dB $\mu$ V/m], F: Frequency [MHz]

$L = 67.7$  [dB $\mu$ V/m] at  $F=314.95$ [MHz]

Spurious Emission

$L = 67.7 - 20 = 47.7$  [dB $\mu$ V/m]

Above 1000 MHz, the limit is replaced at 54 dB $\mu$ V/m.

## [Environment]


Temperature: 22°C

Humidity: 36%

## [Tested Date/ Tester]

15 March 2003

Signature

  
Ikuya Minematsu

## [ Calculation of Conversion Factor ( Peak detector to Average ) ]

In accordance with ANSI C63.4-1992 section 13.1.4.2, The EUT's transmitting pulse modulated emissions, therefore the average level of emissions are found by measuring peak level of the emission and correcting them with the duty cycle.

From Figure 6.

The value of the sum of the pulse widths in one period : 14.5 [ msec ]  
The length of the period : 100 [ msec ]

As the EUT pulse train exceeds 100ms, calculate the duty cycle by averaging the sum of the pulse widths over the width with the highest average value.

Then, Conversion Factor PEAK to AVERAGE is calculated as follows.

$$\begin{aligned} \text{Conversion Factor} & & & 14.5 \text{ [ msec ]} \\ \text{PEAK to AVERAGE} & (\text{ dB } ) = 20 \text{ Log ( Duty cycle ) } = 20 \text{ Log } \frac{\quad}{100 \text{ [ msec ]}} \\ & = -16.7 \text{ (dB)} \end{aligned}$$

$$\text{Duty cycle} = \frac{\text{The value of the sum of the pulse widths in one period } \sum_{n=1}^n t_n}{\text{The length of period (T)}}$$

## [ Sample Calculation at conversion Peak to Average ]

Field Strength (dBμV/m)

$$= \text{Meter Reading (at Maximum level of horizontal or vertical) (dBμV) + Antenna Factor (dB/m) + Conversion Factor (dB)}$$

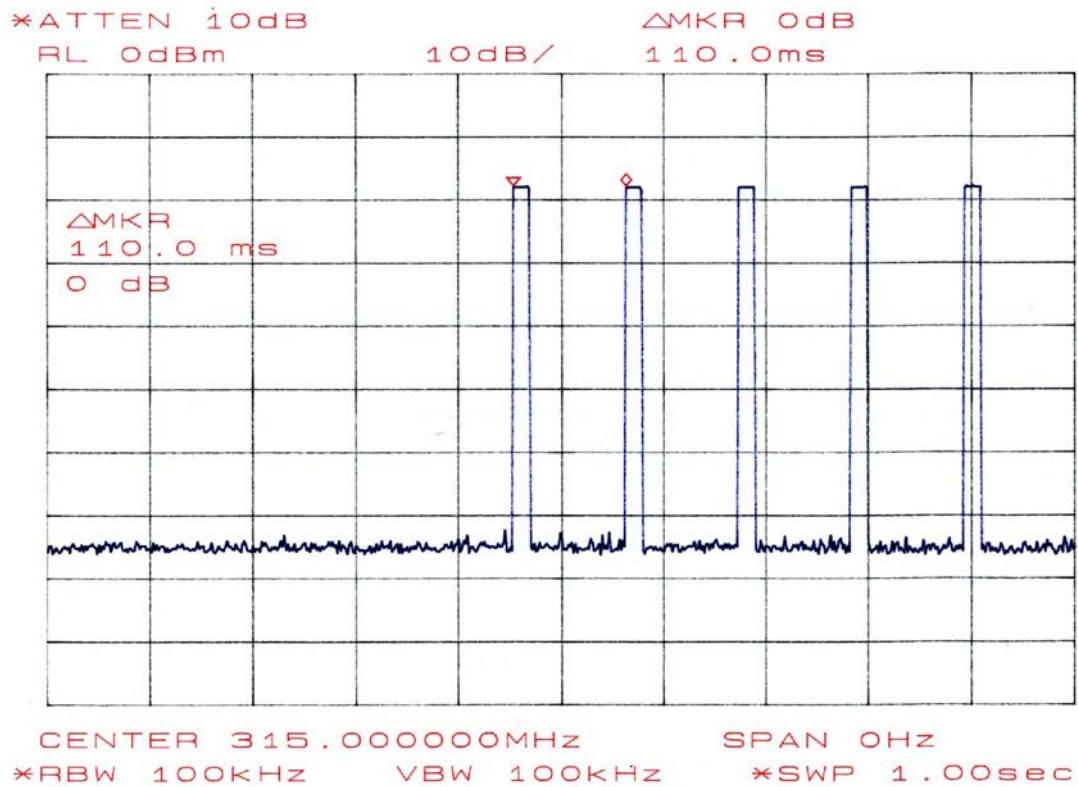


Figure 6


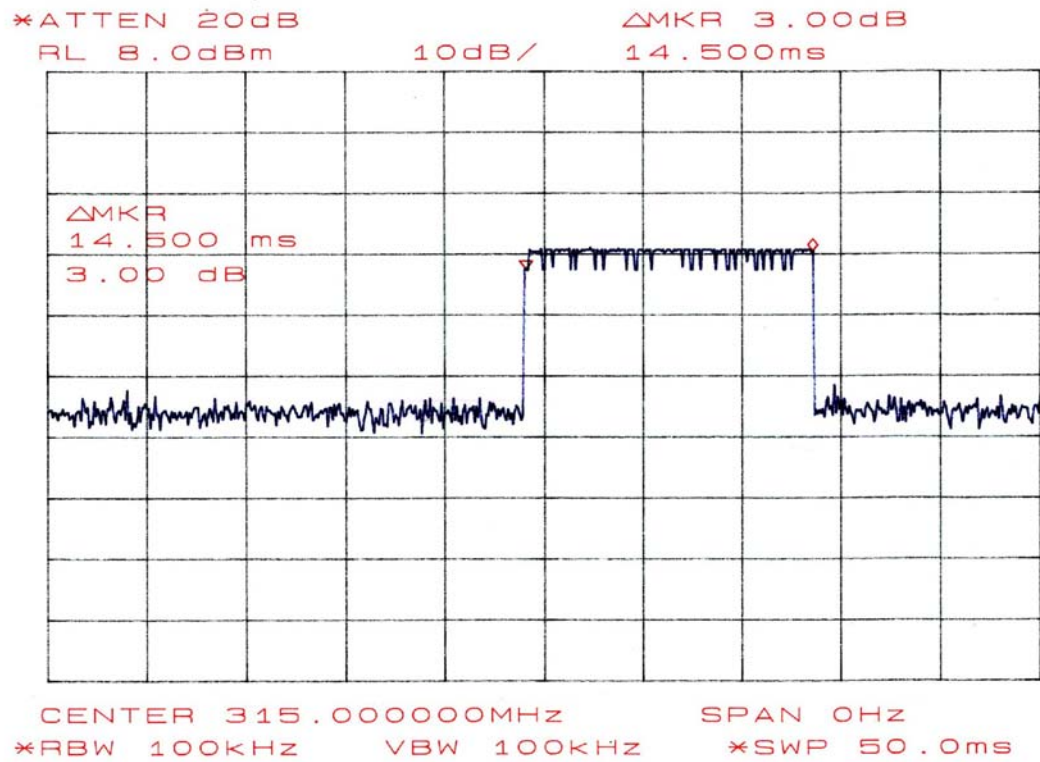


Figure 7

## 5. EMISSION BANDWIDTH MEASUREMENT

## 5.1. Test Configuration

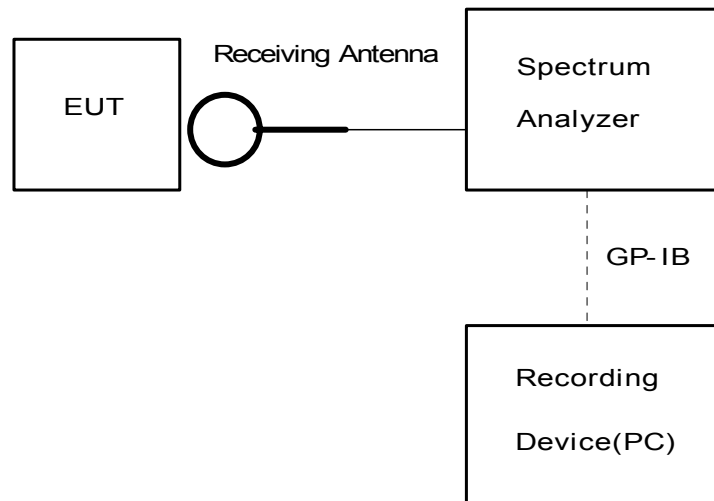

## 5.2. Test Results

Measured emission bandwidth = 475 kHz

See next Figure 8(the picture of spectrum analyzer)

## [ Note ]

Emission Bandwidth was determined at the points 20dB down from the modulated carrier.

## Spectrum Analyzer Setting:

|                      |                |
|----------------------|----------------|
| Center Frequency     | = 315.00 MHz   |
| Frequency Span       | = 500 kHz/div. |
| Resolution Bandwidth | = 100 kHz      |
| Video Bandwidth      | = 10 MHz       |
| Sweep Time           | = 50 m sec     |
| Trace Mode           | : MAX. HOLD    |

## [ Environment ]

Temperature : 22°C    Humidity : 36%

## [ Calculation of Limit ]

Limit of Emission bandwidth =  $315.00 \text{ MHz} \times 0.25\% = 787.50 \text{ kHz}$

Tested Date : 15 March 2003

Signature

Ikuya Minematsu

- Continued -

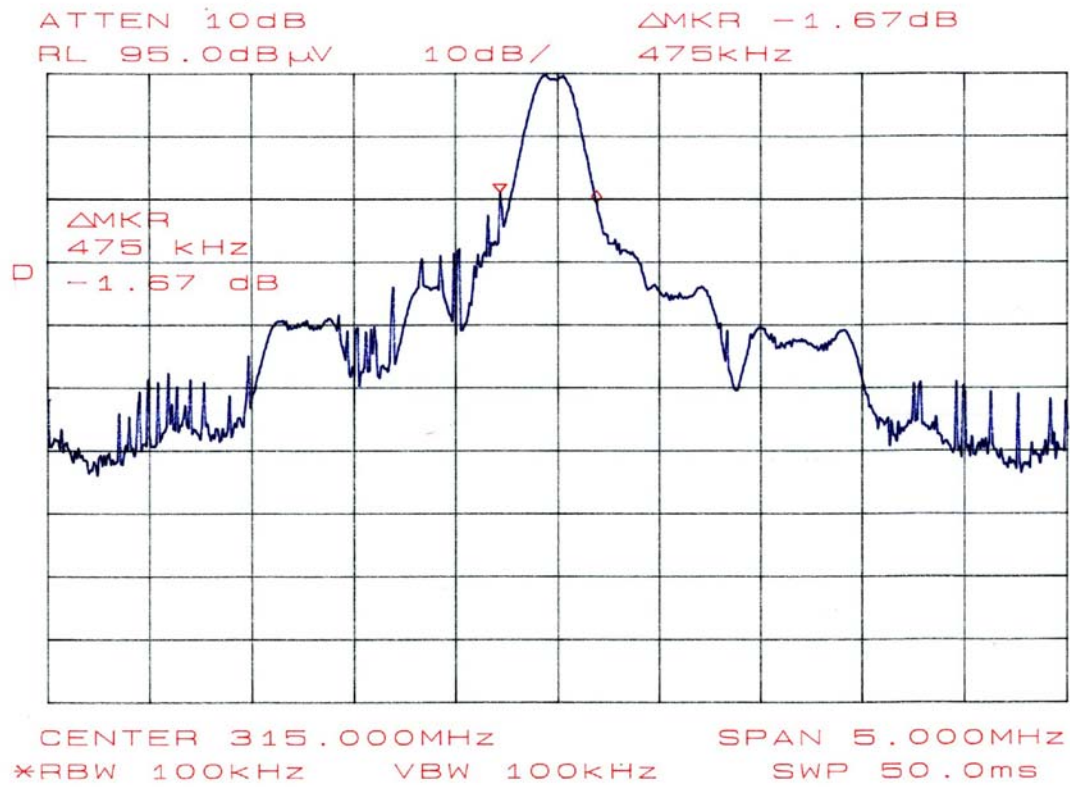


Figure 8

## 6. USED TEST EQUIPMENTS AND CALIBRATION STATUS

| Equipment            | Manufacturer    | Model No.  | Specifications                 | KEC Control No. | Test Item (*) | Last Cal. | Next Cal. |
|----------------------|-----------------|------------|--------------------------------|-----------------|---------------|-----------|-----------|
| Test Receiver        | Rohde & Schwarz | ESHS10     | Frequency Range 9kHz-30MHz     | FS-83           | N/A           | 2003/1    | 2004/1    |
|                      |                 | ESVS10     | Frequency Range 20MHz-1.0GHz   | FS-66           | 2             | 2002/12   | 2003/12   |
| Spectrum Analyzer    | Hewlett Packard | 8564E      | Frequency Range 30 Hz-40 GHz   | SA-39           | 2,3           | 2003/2    | 2004/2    |
|                      |                 | 8568B      | Frequency Range 100 Hz-1.5 GHz | FS-46-3         | N/A           | 2002/6    | 2003/6    |
| Pre-amplifier        | Hewlett Packard | 8449B      | Frequency Range 1 GHz-26.5 GHz | AM-52           | 2             | 2003/2    | 2004/2    |
| Biconical Antenna    | Schwarzbeck     | BBA9106    | Frequency Range 30MHz-300MHz   | AN-180          | 2             | 2003/2    | 2004/2    |
| Log-Periodic Antenna | Schwarzbeck     | UHALP9108A | Frequency Range 300MHz-1GHz    | AN-215          | 2             | 2003/2    | 2004/2    |
| Tuned Dipole Antenna | Kyoritsu        | KBA-511AS  | Frequency Range 25MHz-500MHz   | AN-135          | 2             | 2003/2    | 2005/2    |
|                      |                 | KBA-611S   | Frequency Range 500MHz-1GHz    | AN-137          | 2             | 2003/2    | 2005/2    |
| Horn Antenna         | Raven           | 92888-2    | Frequency Range 1 GHz- 2GHz    | AN-211          | 2             | 2001/8    | 2003/8    |
|                      |                 | 91889-2    | Frequency Range 2 GHz- 5GHz    | AN-212          | 2             | 2001/8    | 2003/8    |
| LISN for EUT         | Kyoritsu        | KNW-407    | Frequency Range 150kHz- 30MHz  | FL-107          | N/A           | 2002/4    | 2003/4    |
| LISN for Peripheral  | Kyoritsu        | KNW-242    | Frequency Range 10kHz- 30MHz   | FL-110          | N/A           | 2002/4    | 2003/4    |

## [Note]

Test Item (\*):     1:    Conducted Emission Measurement  
                              2:    Radiated Emission Measurement  
                              3:    Bandwidth Measurement  
                              N/A: Not Applicable

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.