

**NATIONAL CERTIFICATION LABORATORY**

**8370 Court Avenue, Suite B-1  
Ellicot City, MD 21043**

**(410) 461-5548**

**FCC REPORT OF RADIO INTERFERENCE**

**for**

**GVC International U.S.A., Inc.  
6262 Katella Avenue  
Cypress, California 90630**

**EPIQ-694 Pentium PC**

**FCC ID: PB3EPIQ-694**

**July 14, 2000**

## TABLE OF CONTENTS

- 1.0** Introduction
- 1.1** Summary
- 2.0** Description of Equipment Under Test (EUT)
- 2.1** EMI Countermeasures
- 3.0** Test Program
- 4.0** Test Configuration
- 5.0** Conducted Emissions Scheme
- 6.0** Radiated Emissions Scheme

## TABLES

- Table 1. Support Equipment
- Table 2. Interface Cables
- Table 3. Measurement Equipment

## EXHIBITS

- Exhibit 1. EUT Photographs
- Exhibit 2. User Manual Statement
- Exhibit 3. FCC Label Requirement

*NCL PROJ.# GVC-547*

## 1.0 Introduction

This report has been prepared on behalf of GVC International U.S.A., Inc., to support the FCC Certification of a Part 15 Class “B” Digital Device. The Equipment Under Test was the GVC International U.S.A., Inc. **EPIQ-694 Pentium PC**.

Radio-Noise Emissions tests were performed according to the ANSI C63.4- 1992, Chapter 11 titled “Measurement of Information Technology Equipment”. The measuring equipment conforms to ANSI C63.2 Specifications for electromagnetic Noise and Field Strength-Instrumentation.

Test was performed at National Certification Laboratory in Ellicott City, MD. Site description and site attenuation data have been placed on file with the FCC’s sampling and Measurements Branch. FCC acceptance was granted on May 26, 1993.

### 1.1 Summary

The GVC International U.S.A., Inc. **EPIQ-694 Pentium PC** complies with the limits for Class “B” Digital Device.

## 2.0 Description of Equipment Under Test (EUT)

The EUT Features:

|                                |                            |
|--------------------------------|----------------------------|
| <b><u>MICRO-PROCESSORS</u></b> | <b><u>CLOCK SPEEDS</u></b> |
| Pentium II, III                | 66-133 MHz                 |
| <b><u>OTHERS</u></b>           | <b><u>OSCILLATORS</u></b>  |
| 4 PCI Slots                    | Motherboard:               |
| 2 USB Ports                    | 32.768 KHz                 |
| 3 DIMM Sockets                 | 14.318 MHz                 |
| 2 Serial Ports                 | 24.576 MHz                 |
| 1 Parallel Port                |                            |
| IDE/FDD Controllers            |                            |
| Audio/Game Ports               |                            |
| AGP Video Slot                 |                            |
| 52X CD ROM                     |                            |
| ATX Form                       |                            |
| 2 ISA Slots                    |                            |

## 2.1 EMI Countermeasure

The following modifications were made to the EUT, by the project engineer to assure compliance to Class "B" specifications:

None.

## 3.0 Test Program

The EUT was tested with a program written to send a continuous stream of "H's" to the video, serial, and parallel ports of the computer. Worst case emissions are recorded in the data tables.

***BASIC program used:***

```
10  FOR N=1 TO 35
15  FOR M=1 TO 80
20  PRINT "h";:
25  NEXT M
30  NEXT N
40  OPEN "COM1:1200, E, 7, 1, CSO, DOS" FOR OUTPUT AS #1
50  OPEN "COM2:1200, E, 7, 1, CSO, DOS" FOR OUTPUT AS #2
52  FOR I=1 TO 160
54  PRINT #1, "H";:
56  PRINT #2, "H";:
58  NEXT I
60  FOR J=1 TO 80
65  LPRINT "H";:
70  NEXT J
75  CLOSE
80  GOTO 10
```

## 4.0 Test Configuration

The computer system and support equipment were setup on the test table in a manner that follows the general guidelines of ANSI C63.4, Section 6.2.1. The support equipment consisted of a keyboard, video monitor, printer, mouse and modem, mic., speaker, and joystick, as prescribed in Section 11.2 (ANSI C63.4). The computer was centered on the table with it's rear flush with the rear of the table.

The video monitor was placed 10 cm from the right side of the computer with it's front flush with the front of the EUT. The modem was placed 10 cm from the right side of the video monitor, while the printer was set on the opposite side of the computer also 10 cm away. The keyboard was placed in front of the monitor, flush with the front of the test table. All other equipment such as mouse, speaker, mic., joystick were placed in the front part of table on either side of the keyboard, maintaining 10 cm spacing.

Serial, video and parallel I/O cables were draped over the back edge of the table, and the keyboard and mouse cables were placed on top of the table. Cables were more than 40 cm from the ground plane during radiated and conducted tests. The video monitor was powered from the computer's auxiliary 120 VAC IEC connector, which produced worst-case radiated emissions.

Photographs and interconnection diagrams are provided in Exhibit 1.

## 5.0 Conducted Emissions Scheme

The EUT is placed on an 80 cm high 1 X 1.5 meter non-conductive table. Power to the CPU is provided through a Solar Corporation 50  $\Omega$ /50  $\mu$ H line Impedance Stabilization Network bonded to a 2.2 X 2 meter horizontal ground plane, and a 2.2 X 2 meter vertical ground plane. The LISN has its AC input supplied from filtered AC power source. A separate LISN provides AC power to the peripheral equipment. I/O cables are moved about to obtain maximum emissions.

The 50 $\Omega$  output of the LISN is connected to the input of the spectrum analyzer and emissions in the frequency range of 450 kHz to 30 MHz are searched. The detector function is set to quasi-peak and the resolution bandwidth is set at 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth for final measurements. All emissions within 20 dB of the limit are recorded in the data tables.

## 6.0 Radiated Emissions Scheme

The EUT was initially scanned in the frequency range 30 to 2000 MHz indoor at a distance of 1 meter to determine its emissions profile. The EUT was then placed on an 80 cm high 1 x1.5 meter non-conductive motorized turntable for radiated testing on the 3-meter open area test site. The emissions from the EUT are measured continuously at every azimuth by rotating the turntable. Biconical, horn, and log periodic broadband antennas are mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna is varied between 1 to 4 meters. Cables are varied in position to produce maximum emissions. Both the horizontal and vertical field components are measured.

**Measurements from 30-1000 MHz:** The output from the antenna is connected to the input of the spectrum analyzer. The detector function is set to quasi-peak. The resolution bandwidth of the spectrum analyzer system is set at 120 kHz for the range 30-1000 MHz with all post-detector filtering no less than 10 times the resolution bandwidth.

**Measurements from 1-2 GHz:** The output from the horn antenna is connected to the input of a 30 dB pre-Amp, which is in turn attached to the spectrum analyzer. The detector function is set to Peak. The resolution bandwidth of the spectrum analyzer system is set at 1 MHz for the range 1-2 GHz. All emissions within 10 dB of the limit are recorded in the data tables.

To convert the spectrum analyzer reading into a quantified E-field level to allow comparison with the FCC limits. It is necessary to account for various calibration factors. These factors include cable loss (CL) and antenna factors (AF). The AF/CL in dB/m is algebraically added to the Spectrum Analyzer voltage in dB $\mu$ V/m. This level is then compared with the FCC limit.

### EXAMPLE:

|                         |  |
|-------------------------|--|
| Spectrum Analyzer Volt: | VdB $\mu$ V                                |
| Composite factor:       | AF/CLdB/m                                  |
| Electric Field:         | $EdB\mu V/m = VdB\mu V + AF/CLdB/m$        |
| Linear Conversion:      | $E\mu V/m = \text{Antilog}(EdB\mu V/m/20)$ |

## FCC CLASS "B" CONDUCTED EMISSIONS DATA

**CLIENT:** GVC International U.S.A., Inc.

**EUT:** EPIQ-694

**CPU:** PENTIUM III

**CLOCK** 866 MHz

**MODE:**

**LINE 1-Neutral:** Quasi-Peak Level      **Date:** 09/20/2000

| FREQUENCY<br>MHz | SPEC. Ana.<br>dBuV | Calc. Volt.<br>uV | FCC LIMIT<br>uV | MARGIN<br>dB | CONDITION |
|------------------|--------------------|-------------------|-----------------|--------------|-----------|
| 0.51             | 32.80              | 43.65             | 250.00          | 15.16        | PASS      |
| 6.20             | 28.80              | 27.54             | 250.00          | 19.16        | PASS      |
| 22.90            | 29.00              | 28.18             | 250.00          | 18.96        | PASS      |
| 28.20            | 29.90              | 31.26             | 250.00          | 18.06        | PASS      |
| 29.40            | 30.70              | 34.28             | 250.00          | 17.26        | PASS      |

**LINE 2-Phase:** Quasi-Peak Level

| FREQUENCY<br>MHz | SPEC. Ana.<br>dBuV | Calc. Volt.<br>uV | FCC LIMIT<br>uV | MARGIN<br>dB | CONDITION |
|------------------|--------------------|-------------------|-----------------|--------------|-----------|
| 0.58             | 32.40              | 41.69             | 250.00          | 15.56        | PASS      |
| 2.10             | 36.00              | 63.10             | 250.00          | 11.96        | PASS      |
| 22.90            | 27.20              | 22.91             | 250.00          | 20.76        | PASS      |
| 28.20            | 28.30              | 26.00             | 250.00          | 19.66        | PASS      |
| 29.40            | 28.80              | 27.54             | 250.00          | 19.16        | PASS      |

TEST ENGINEER:

Brian Haqhtalab

## FCC CLASS "B" RADIATED EMISSIONS DATA

**CLIENT:** GVC International U.S.A., Inc.

**EUT:** EPIQ- 694

**CPU:** Pentium III

**CLOCK** 866 MHz

**MODE:**

**3 METER TEST** Quasi-Peak Level **DATE: 07/13/2000**

| FREQUENCY<br>MHz | POLARITY |      | SPEC A<br>dBuV | AF/CL<br>dB/m | E-FIELD<br>dBuV/m | E-FIELD<br>uV/m | LIMIT<br>uV/m | MARGIN<br>dB | CONDITION |
|------------------|----------|------|----------------|---------------|-------------------|-----------------|---------------|--------------|-----------|
|                  | HORIZ    | VERT |                |               |                   |                 |               |              |           |
| 144.04           | H        |      | 22.00          | 14.50         | 36.50             | 66.83           | 150.00        | 7.02         | PASS      |
| 156.02           | H        |      | 24.00          | 15.00         | 39.00             | 89.13           | 150.00        | 4.52         | PASS      |
| 168.02           |          | V    | 22.00          | 16.00         | 38.00             | 79.43           | 150.00        | 5.52         | PASS      |
| 261.00           | H        |      | 16.00          | 21.00         | 37.00             | 70.79           | 200.00        | 9.02         | PASS      |
| 305.95           | H        |      | 20.00          | 13.00         | 33.00             | 44.67           | 200.00        | 13.02        | PASS      |
| 330.07           | H        |      | 23.00          | 14.00         | 37.00             | 70.79           | 200.00        | 9.02         | PASS      |
| 466.75           |          | V    | 19.00          | 17.00         | 36.00             | 63.10           | 200.00        | 10.02        | PASS      |
| 800.10           |          | V    | 20.00          | 23.00         | 43.00             | 141.25          | 200.00        | 3.02         | PASS      |

TEST ENGINEER:

Brian Haghtalab

**Table 1**  
**Support Equipment**

| <b>MANUFACTURER</b>                                     | <b>FCC ID #</b>   | <b>SERIAL #</b> |
|---|-------------------|-----------------|
| <b>MONITOR:</b><br><br>Samsung CVB4917<br>SVGA          | A3LCVB491         | H2EB802157      |
| <b>SERIAL DEVICE:</b><br><br>US Robotics 2400B<br>Modem | CJE794COURIER2400 | 30-039207       |
| <b>PARALLEL DEVICE:</b><br><br>Epson T-1000 Printer     | BKM9A8P7ORA       | OAOO59174       |
| <b>KEYBOARD:</b><br><br>Fujitsu                         | C9S4D5KB4700      | None            |
| <b>SERIAL MOUSE:</b><br><br>Logitech                    | DZL6QBC           | 48ULTSL1901     |
| <b>AGP VIDEO CARD</b><br><br>ATI-Rage 128               | FCC-DOC           | 10251913031     |

**Table 2**

**Interface Cables Used**

|   |   |
|---|---|
| <b>EUT to Printer</b>   | 1.5 meter bundled to 1 meter in length - shielded |
| <b>EUT to Modem</b>   | 1 meter in length – shielded                      |
| <b>Modem<br/>(connected to<br/>telephone jack)</b>  | Standard RJ-11 cable bundled to 40 cm unshielded  |
| <b>EUT Power</b>  | Shielded 120 VAC power cord                       |
| All other I/O cables such as monitor, keyboard, mouse are permanently attached to the peripherals - presume shielded. |   |
| Note: 2 USB cables are attached to the USB connectors of the EUT.   |   |

**Table 3**  
**Measurement Equipment Used**

The following equipment is used to perform measurements:

| <b>EQUIPMENT</b>                         | <b>SERIAL NUMBER</b> |
|--|----------------------|
| Wavetek 2410A 1100 MHz Signal Generator  | 1362016              |
| EMCO Model 3110 Biconical Antenna        | 1619                 |
| EMCO Model 3146 Log Periodic Antenna     | 1222                 |
| Antenna Research LPD-3500 Log Antenna    | 1005                 |
| Advantest Model R4131D Spectrum Analyzer | 54378A               |
| Solar 8012-50-R-24-BNC LISN              | 927230               |
| 4 Meter Antenna Mast                     | None                 |
| Motorized Turntable                      | None                 |
| RG-233U 50 ohm coax Cable                | None                 |

## EXHIBIT 1

### EUT PHOTOGRAPHS




**EXHIBIT 1**

**EUT PHOTOGRAPHS**




**EXHIBIT 1**

**EUT PHOTOGRAPHS**

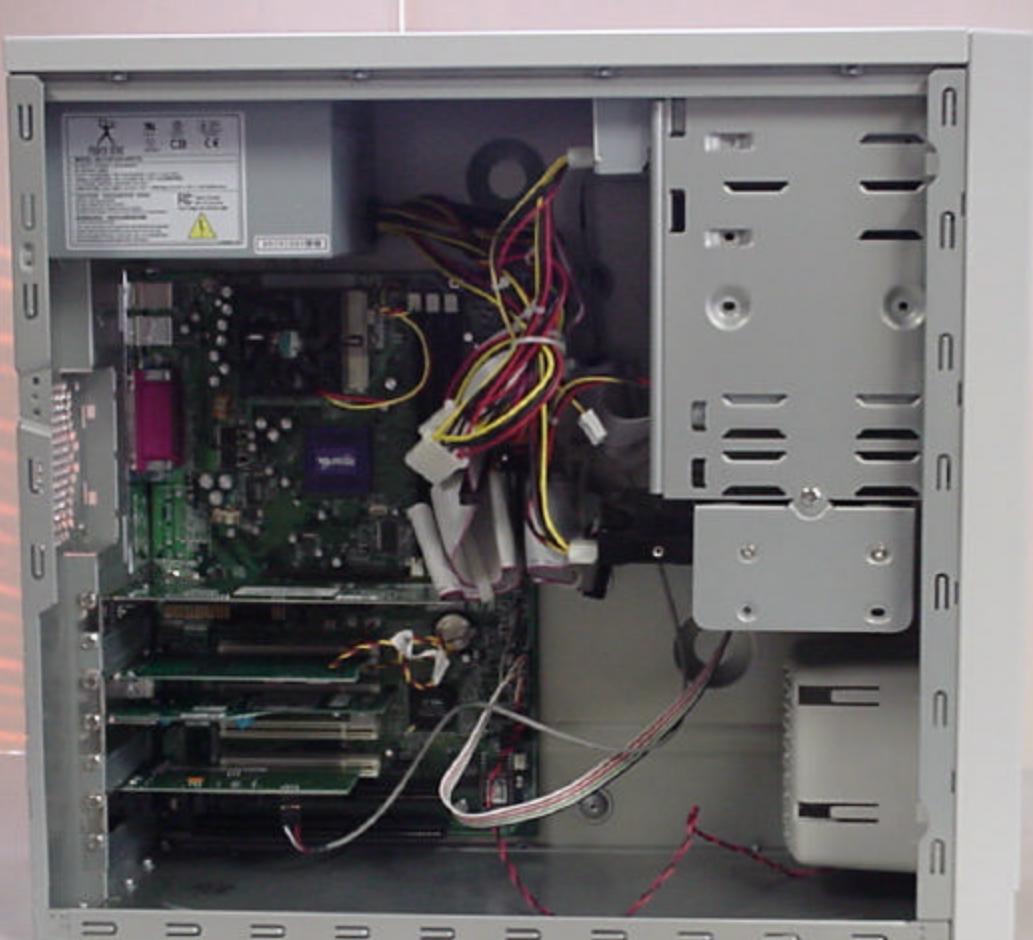


## EXHIBIT 1

### EUT PHOTOGRAPHS

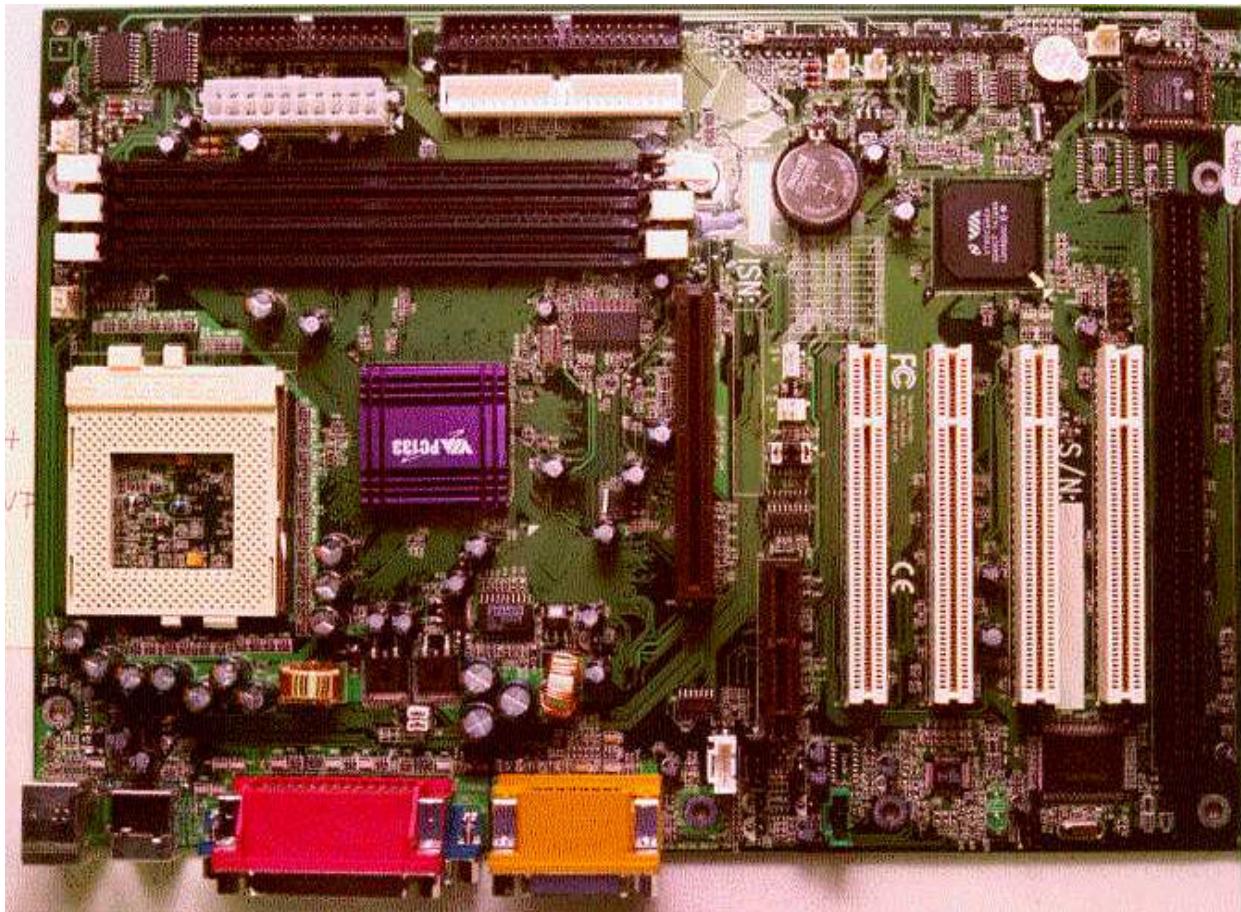

## MAXIMUM RADIATED EMISSIONS CONFIGURATION

### TEST CONFIGURATION

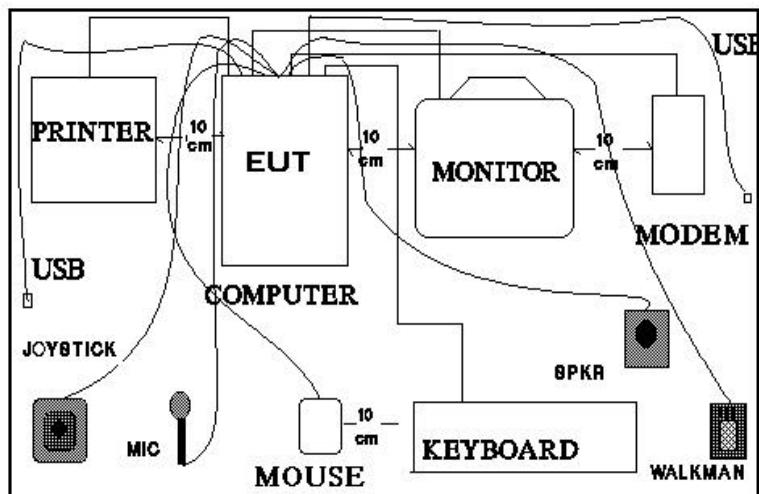

## **EXHIBIT 2**

### **USER MANUAL STATEMENT**

Each computing device which has been Certified as complying with the Class B limits, shall have the following statement printed in the User Manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **EXHIBIT 3**

### **Class “B” Labeling Format**

**FCC ID: PB3EPIQ-694**

This device complies with Part 15 of FCC Rules:  
Operation is subject to the following two conditions: (1) this  
device may not cause harmful interference, and (2) this device  
must accept any interference received, including interference that  
may cause undesired operation.