

APPLICATION FOR CERTIFICATION
On Behalf of
Technic Star Ltd.

Safe & Sound Monitor

Model Number: 3808

Prepared for : Technic Star Ltd.
Room 2115, Hung To Road No. 1,
Kwun Tong, Hong Kong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F03016
Date of Test : Jan.16, 2003
Date of Report : Jan.24, 2003

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Test Facility	1-2
1.3. Test Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Limit	2-1
2.4. EUT Configuration on Test	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-2
3. RADIATED EMISSION TEST	3-3
3.1. Test Equipment	3-3
3.2. Block Diagram of Test Setup	3-3
3.3. Radiated Emission Limit (Class B)	3-4
3.4. EUT Configuration on Test	3-4
3.5. Operating Condition of EUT	3-5
3.6. Test Procedure	3-5
3.7. Radiated Emission Test Results	3-6
4. BANDWIDTH TEST	4-1
4.1. Test Equipment	4-1
4.2. Test Standard	4-1
4.3. Bandwidth Limit	4-1
4.4. Test Procedure	4-1
5. PHOTOGRAPH	5-1
5.1. Photos of Power Line Conducted Emission Test	5-1
5.2. Photos of Radiated Emission Test (In Anechoic Chamber)	5-2
APPENDIX I	(5 pages)
APPENDIX II	(5 pages)

TEST REPORT DECLARATION

Applicant : Technic Star Ltd.
Manufacturer : Technic Star Products Factory
EUT Description : Safe & Sound Monitor
(A) MODEL NO : 3808
(B) SERIAL NO : F2003012401
(C) Power Supply : Adaptor Input 120V/60Hz
Output DC 6V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C August, 2002.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Jan.16, 2003

Prepared by : Kathy Liu / Assistant

Reviewer : Lake Wang / Supervisor

Approved & Authorized Signer : Alex Deng / Assistant Manager

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Safe & Sound Monitor
This report is about transmitter FCC ID and the receiver FCC DOC report please refer to AUDIX Number ACS-F03013.

Model Number : 3808

Applicant : Technic Star Ltd.
Room 2115, Hung To Road No.1,
Kwun Tong, Hong Kong

Manufacturer : Technic Star Products Factory
Xiang Jiao Tang Industrial Area 2, Xue Xiang
Buji, Shenzhen, China

Power Cord : Unshielded, Undetachable 2.0m

AC Adaptor : M/N: DV-6100
Manufacture: DVE

Date of Test : Jan.16, 2003

1.2. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 24, 2000

3m & 10m Open Site : Certificated by FCC, USA
Jan. 29, 2001

Certificated by VCCI, Japan
Jan.01, 2002

EMC Lab. : Certificated by DATech, German
Feb. 02, 1999

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2002

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.3. Test Uncertainty

Conducted Emission Uncertainty = ± 2.66dB

Radiated Emission Uncertainty = ± 4.26dB


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Jun. 02, 02	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	Jun. 02, 02	1 Year
3.	L.I.S.N. #2	R&S	ESH2-Z5	834066/011	Jun. 02, 02	1 Year
4.	Terminator	EMCO	50Ω	No. 1	Jun. 02, 02	1 Year
5.	Terminator	EMCO	50Ω	No. 2	Jun. 02, 02	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Aug. 23, 02	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M74389	Nov 30, 02	1/2 Year
8.	PC	N/A	586ATXS	N/A	N/A	N/A
9.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

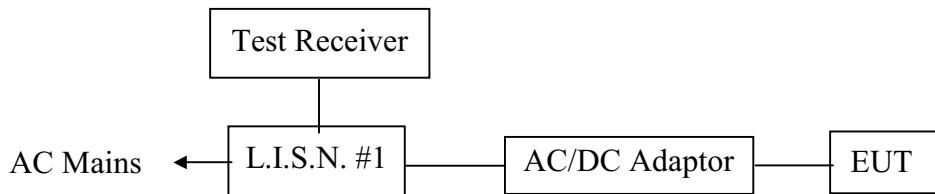

(EUT: Safe & Sound Monitor)

2.3. Power Line Conducted Emission Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. Safe & Sound Monitor (EUT)

Model Number	:	3808
Serial Number	:	F2003012401
Manufacturer	:	Technic Star Products Factory

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown on Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (TX Channel A/TX Channel B) and measure it.

2.6. Test Procedure

The EUT is put on the table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the AC/DC Adapter. The AC/DC Adapter power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the testing equipment; and the peripheral equipment powers from other L.I.S.N.. Please refer to the block diagram of the test setup and photographs. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables must be changed according to ANSI / IEEE Standard 213-1987 on Conducted Emission Test.

The bandwidth of the field strength meter (R & S Test Receiver ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The details of test modes are as the followings, and the test data please see APPENDIX I.

2.7. Power Line Conducted Emission Test Results

PASS.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	Jun. 02, 02	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Jun. 02, 02	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep 20, 02	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 14, 03	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Aug.04, 02	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Aug.04, 02	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Aug.04, 02	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Aug.04, 02	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Nov 30, 02	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: Safe & Sound Monitor)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

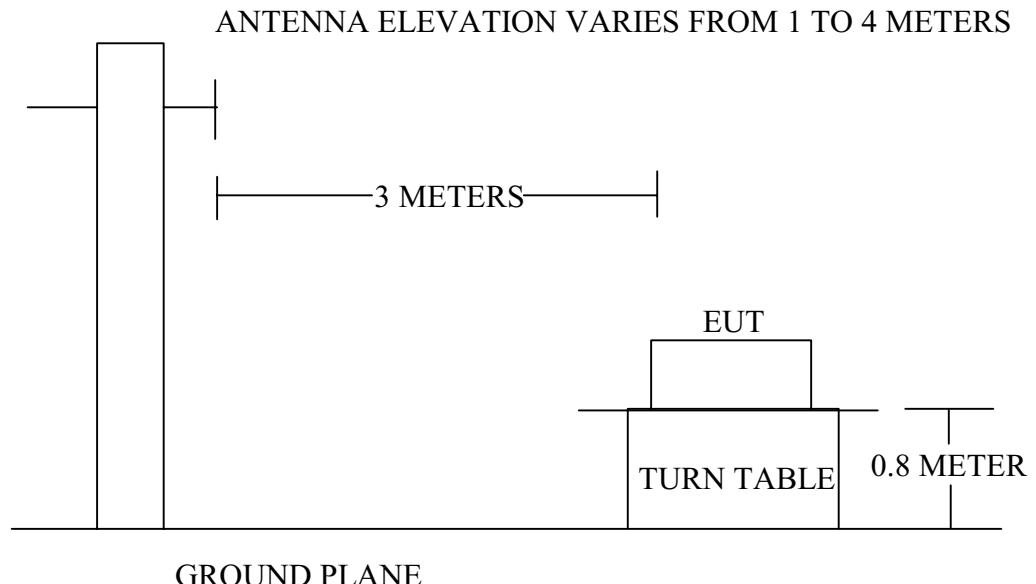

3.3. Radiated Emission Limit (Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. Safe & Sound Monitor (EUT)

Model Number : 3808
 Serial Number : F2003012401
 Manufacturer : Technic Star Products Factory

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Channel A/TX Channel B) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-1992 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

The test modes (TX Channel A/TX Channel B) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Jan.16, 2003	Temperature :	24°C
EUT :	Safe & Sound Monitor	Humidity :	56%
Model No. :	3808	Test Mode :	TX Channel A
Test Engineer:	Jimmy		

Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Over Limits	Limits	Remark
MHz	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB μ V/m	
49.833	7.12	1.36	49.20	57.69	-22.31	80.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading+Cable Loss

Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Over Limits	Limits	Remark
MHz	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB μ V/m	
33.220	12.47	1.13	12.60	26.20	-13.80	40.00	QP
49.833	7.12	1.36	66.20	74.69	-5.31	80.00	Average
99.670	10.16	2.01	17.60	29.77	-13.73	43.50	QP

Remark: 1. All readings are Average and QP values.

2. Emission Level = Antenna Factor + Meter Reading+Cable Loss

Reviewer : _____

Date of Test :	Jan.16, 2003	Temperature :	24°C
EUT :	Safe & Sound Monitor	Humidity :	56%
Model No. :	3808	Test Mode :	TX Channel B
Test Engineer:	Jimmy		

Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Over Limits	Limits	Remark
MHz	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB μ V/m	
49.882	5.73	1.36	49.00	56.10	-23.90	80.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading+Cable Loss

Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Over Limits	Limits	Remark
MHz	dB/m	dB	Vertical	Vertical	dB μ V/m	dB μ V/m	
33.254	12.47	1.13	11.80	25.40	-14.60	40.00	QP
49.882	7.10	1.36	66.00	74.47	-5.53	80.00	Average
99.764	10.16	2.01	17.40	29.57	-13.93	43.50	QP

Remark: 1. All readings are Average and QP values.


2. Emission Level = Antenna Factor + Meter Reading+Cable Loss

Reviewer : _____



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 2 File#: Technic star.EMI Date: 2003-01-16 Time: 15:22:53

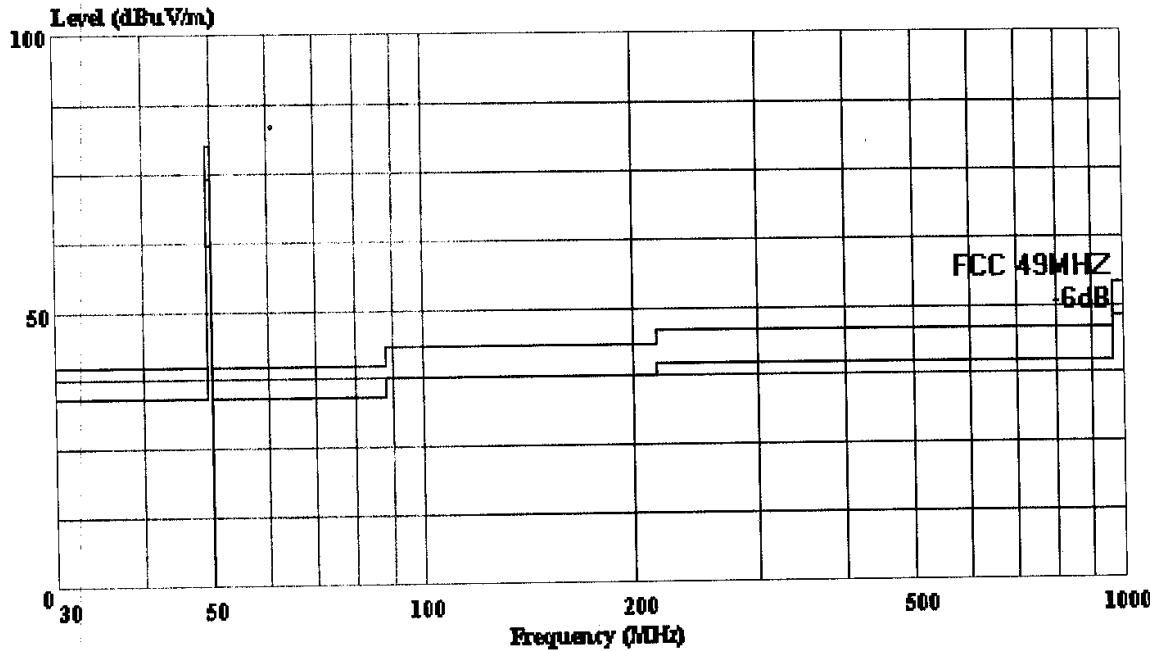

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR HORIZONTAL

EUT : Safe & Sound Monitor

M/N : 3808

Power : Adaptor input 120V/60Hz output DC 6V

Test Engineer: Jimmy

Memo : TX Channel A

: Ant pos : 1m Table pos : 90'


Page: 1

	Limit	Over	Read	Cable	Probe	
Freq	Line	Level	Limit	Level	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	49.833	80.00	57.69	-22.31	50.50	1.36 5.82 Average



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 4 File#: Technic star.EMI Date: 2003-01-16 Time: 15:28:53

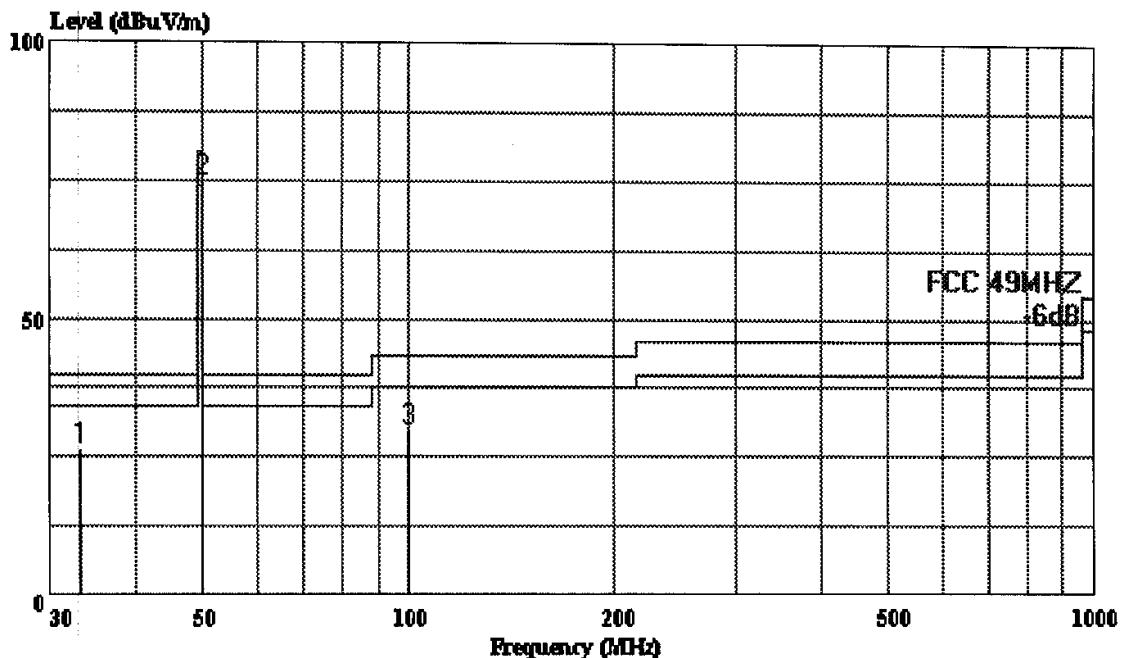

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR VERTICAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel A
 : Ant pos: 1m Table pos: 160'


Page: 1

Freq	Limit		Over Limit	Read Level	Cable Loss	Probe Factor	Remark
	Line	Level					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	33.220	40.00	26.20	-13.80	12.60	1.13	12.47 QP
2	49.833	80.00	74.69	-5.31	66.20	1.36	7.12 Average
3	99.670	43.50	29.77	-13.73	17.60	2.01	10.16 QP



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 8 File#: Technic star.EMI Date: 2003-01-16 Time: 15:32:16

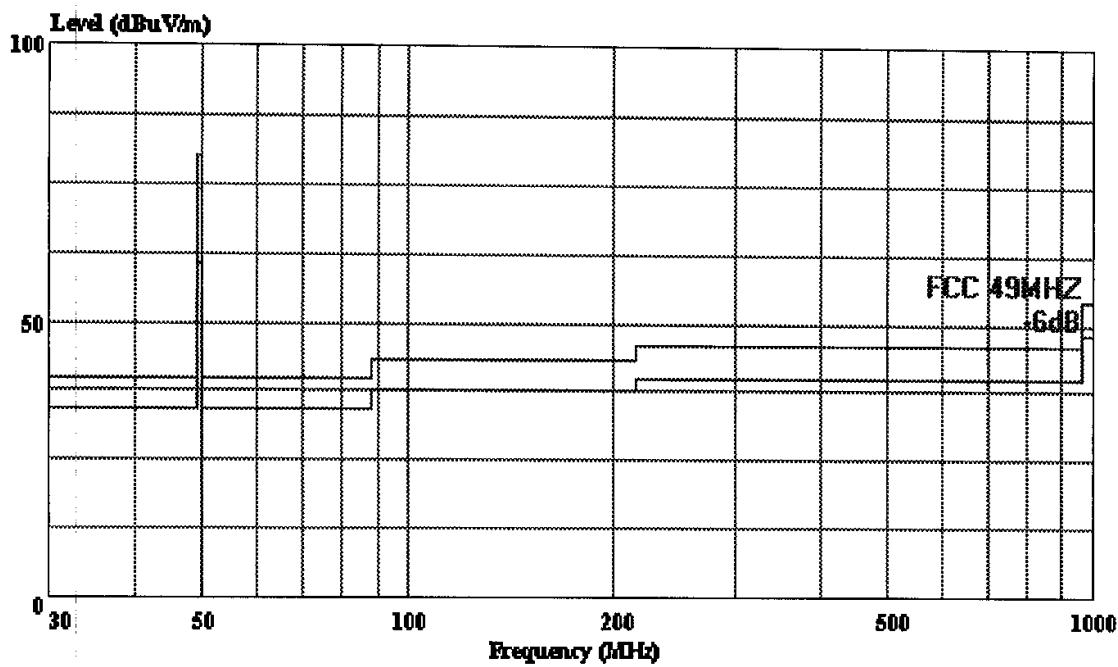

Trace:

Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR HORIZONTAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel B


Page: 1

Freq	Limit	Over Limit	Read Level	Cable	Probe	Remark
	Line			dB	dBuV	
	MHz	dBuV/m	dBuV/m	dB	dB	
1	49.882	80.00	56.10	-23.90	49.00	1.36 5.73 Average



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data#: 6 File#: Technic star.EMI Date: 2003-01-16 Time: 15:30:54

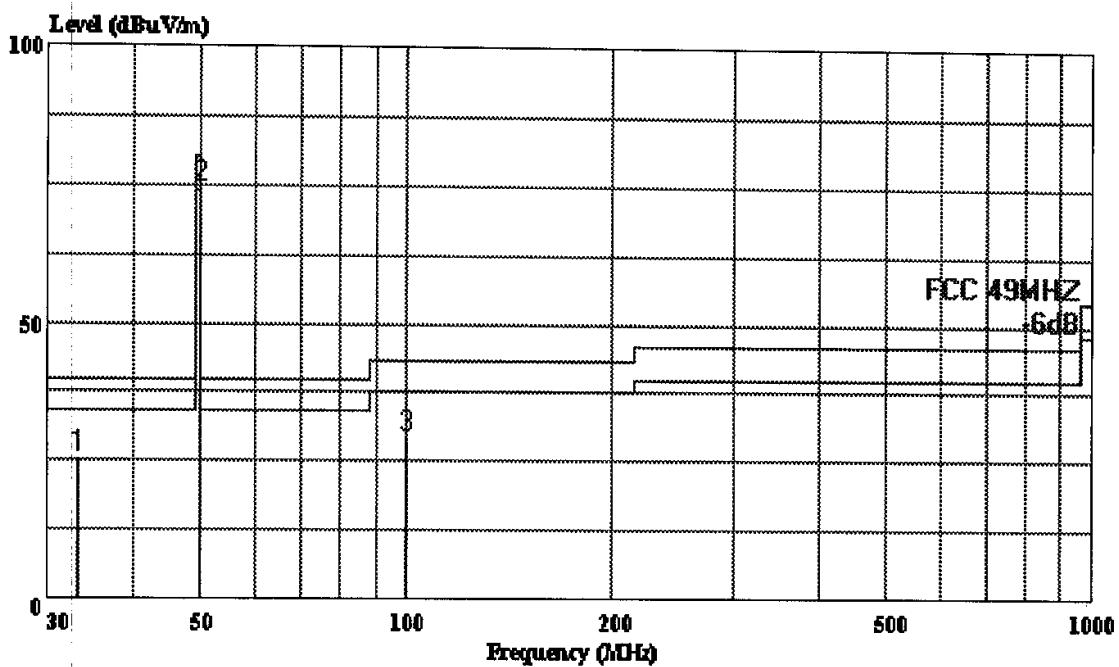

Trace:

Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR VERTICAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz output DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel B

Page: 1

Freq	Limit		Over Limit	Read Level	Cable Loss	Probe Factor	Remark
	Line	Level					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	33.254	40.00	25.40	-14.60	11.80	1.13	12.47 QP
2	49.882	80.00	74.47	-5.53	66.00	1.36	7.10 Average
3	99.764	43.50	29.57	-13.93	17.40	2.01	10.16 QP

4. BANDWIDTH TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	2002.03.29	1 Y
2.	Antenna	EMCO	3115	9607-4877	2002.12.02	1.5 Y
3.	Print				N/A	N/A

4.2. Test Standard

The test completeness FCC 15C (2).

4.3. Bandwidth Limit


The minimum 6dB bandwidth shall be at least 500KHz.

4.4. Test Procedure



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 339 File#: Technic star.EMI Date: 2003-03-04 Time: 13:36:03

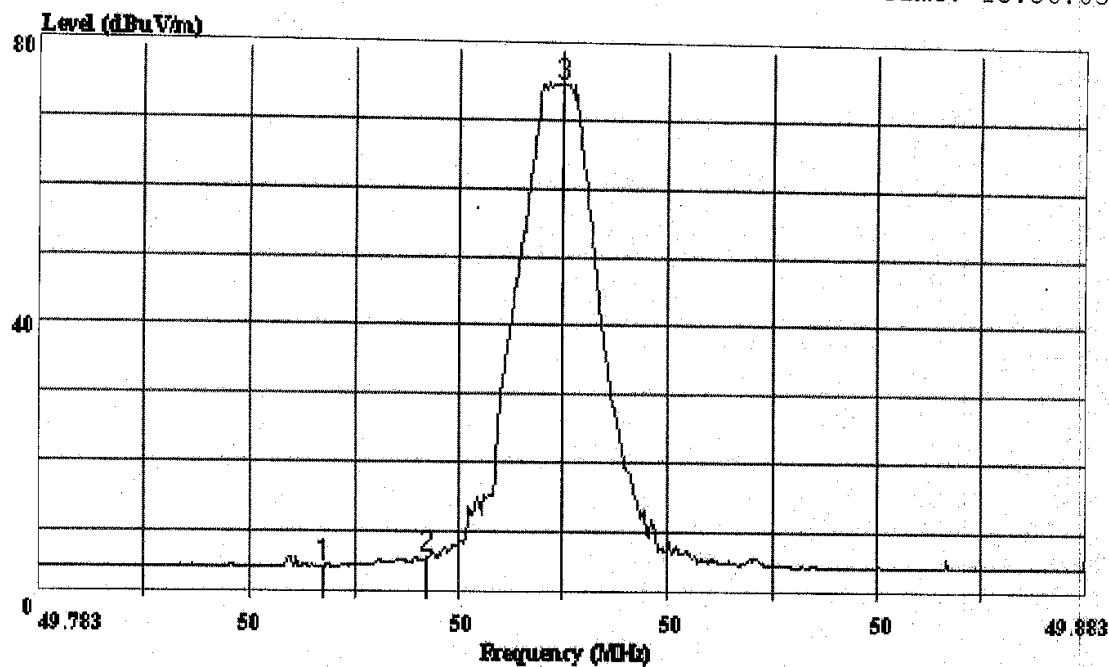

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace: 33A

Ref Trace:

Condition: FCC PEAK LIMIT(49MHZ 3m 2598FACTOR VERTICAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz output DC 6V
 Test Engineer: Jimmv
 Memo : Channel A
 : RBW: 1KHz


Page: 1

Freq	Limit Level	Read		Probe Factor	Cable Factor	Preamp Loss	Remark
		Line	Level				
MHz	dBuV/m	dBuV/m	dBuV	dB	dB	dB	dB
1	49.810	4.90	100.00	20.87	-15.97	7.20	1.35 24.52 Peak
2	49.820	6.22	100.00	22.19	-15.97	7.20	1.35 24.52 Peak
3	49.833	74.98	100.00	90.95	-15.97	7.20	1.35 24.52 Peak



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 341 File#: Technic star.EMI Date: 2003-03-04 Time: 14:05:52

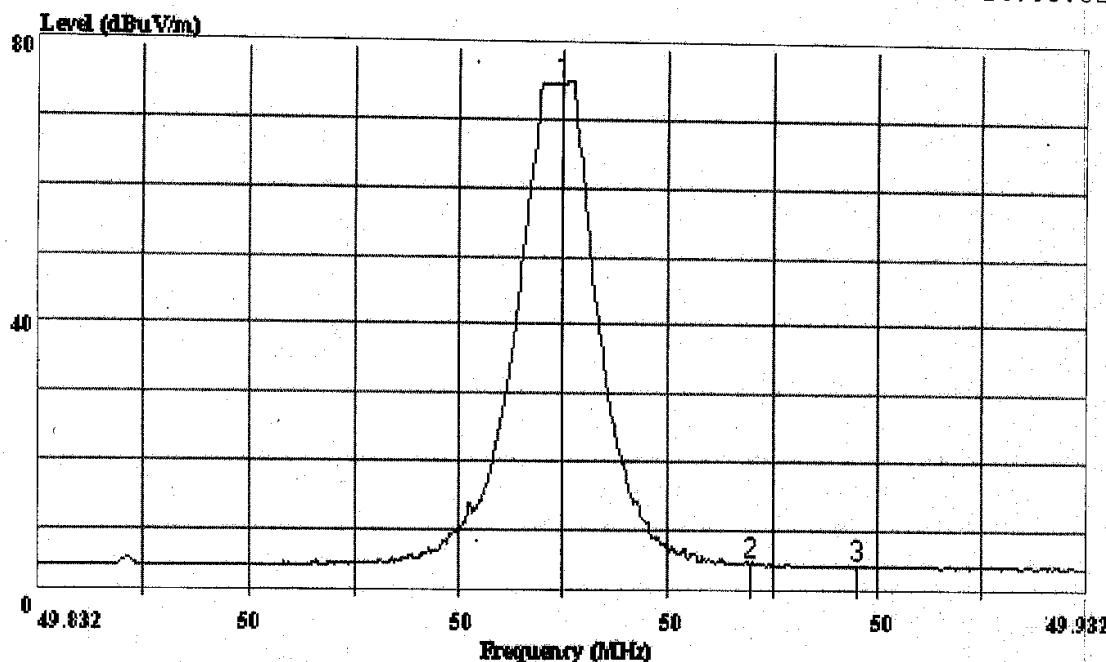

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace: 1

Ref Trace:

Condition: FCC PEAK LIMIT(49MHZ 3m 2598FACTOR VERTICAL)

EUT : Safe & Sound Monitor

M/N : 3808

Power : Adaptor input 120V/60Hz output DC 6V

Test Engineer: Jimmv

Memo : Channel B

: RBW: 1KHz

Page: 1


Freq	Limit Level	Read Line	Probe		Cable Loss	Preamp Factor	Remark
			dBuV	Factor			
1	49.882	75.13	100.00	91.20	-16.06	7.09	1.37 24.52 Peak
2	49.900	5.26	100.00	21.33	-16.07	7.09	1.37 24.52 Peak
3	49.910	4.83	100.00	20.90	-16.07	7.09	1.37 24.52 Peak

APPENDIX I



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data#: 35 File#: Evenflo Inc..EMI Date: 2003-01-16 Time: 18:44:55

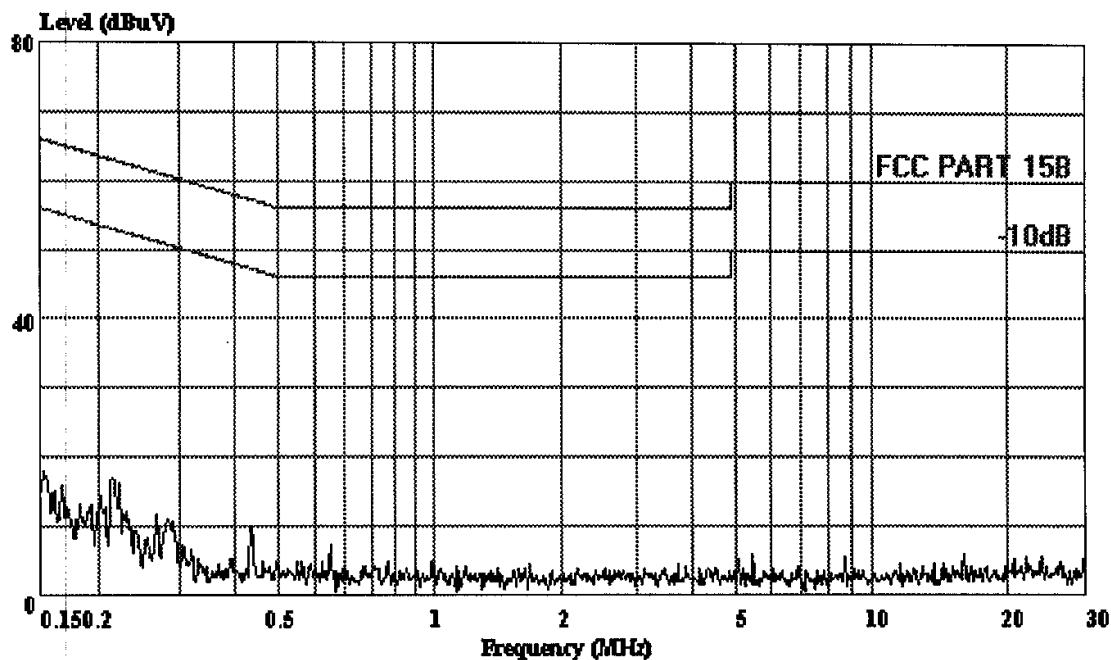

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)
 EUT : Safe & Sound Monitor
 M/N : 3808
 OP Cond : TX Channel A
 Test Engineer: Jimmy
 Test Spec : Adaptor input 120V/60Hz output DC 6V
 Comment : Temp:22'C
 : Humi:47%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel: 0755-26639496
 Fax: 26632877

Data#: 36 File#: Evenflo Inc..EMI Date: 2003-01-16 Time: 18:46:14

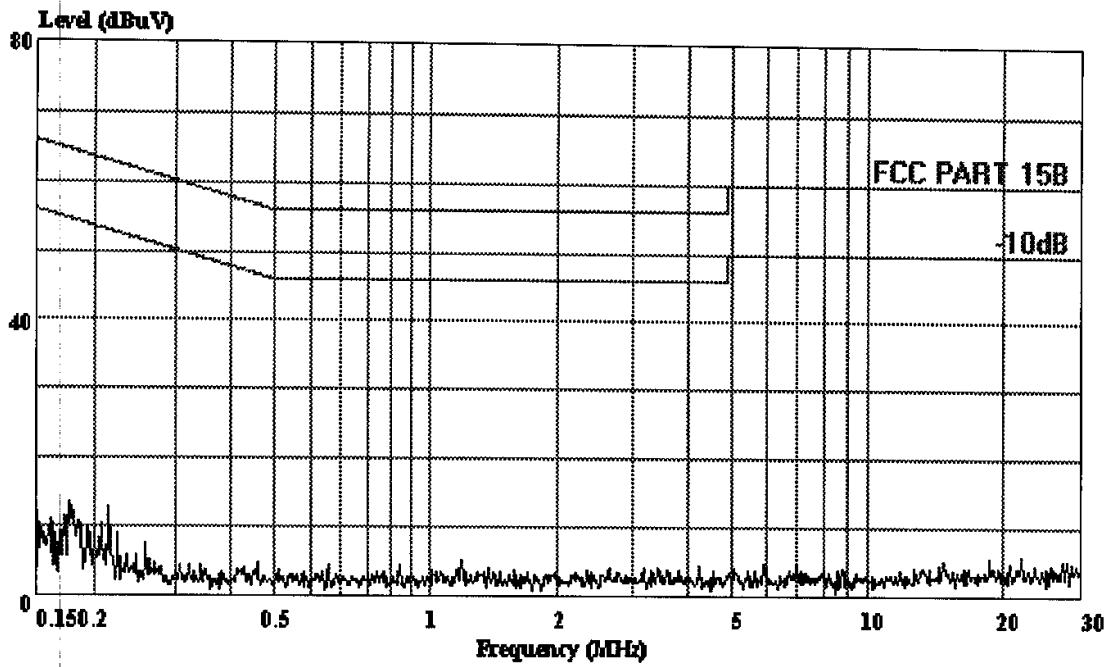

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15B VB (KNW-407)
 EUT : Safe & Sound Monitor
 M/N : 3808
 OP Cond : TX Channel A
 Test Engineer: Jimmy
 Test Spec : Adaptor input 120V/60Hz output DC 6V
 Comment : Temp:22'C
 : Humi:47%



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data #: 38 File #: Evenflo Inc..EMI Date: 2003-01-16 Time: 18:48:51

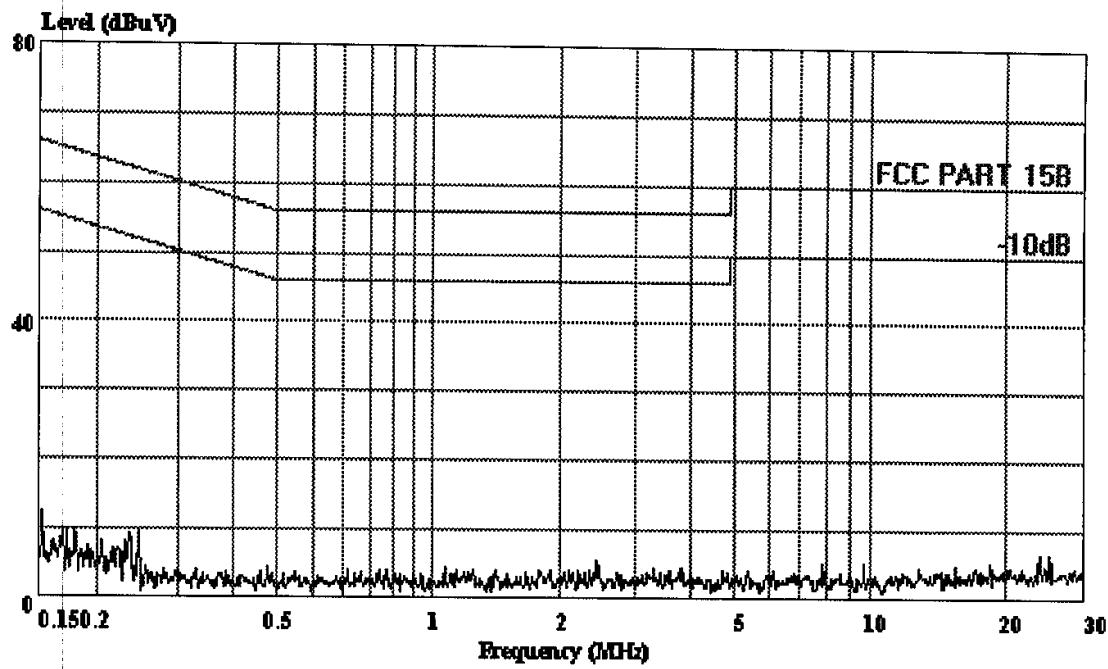

Trace:


Ref Trace:

Condition: FCC PART 15B VA(KNW-407)
 EUT : Safe & Sound Monitor
 M/N : 3808
 OP Cond : TX Channel B
 Test Engineer: Jimmy
 Test Spec : Adaptor input 120V/60Hz output DC 6V
 Comment : Temp:22'C
 : Humi:47%



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data#: 37 File#: Evenflo Inc..EMI Date: 2003-01-16 Time: 18:47:25

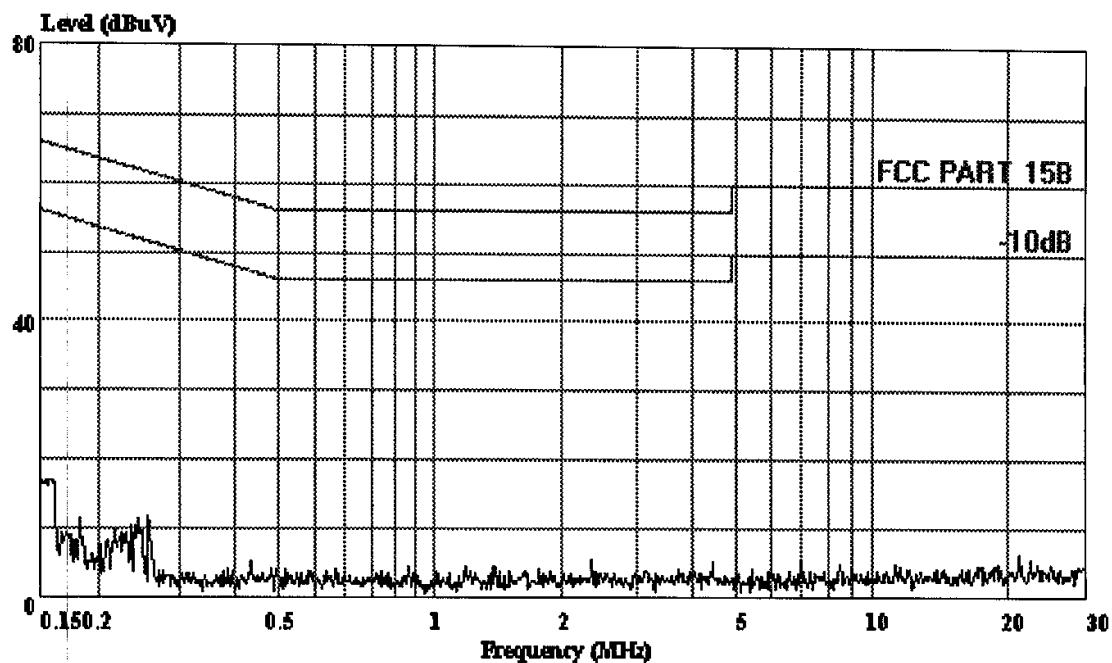

Trace:

Ref Trace:

Condition: FCC PART 15B VB (KNW-407)
 EUT : Safe & Sound Monitor
 M/N : 3808
 OP Cond : TX Channel B
 Test Engineer: Jimmy
 Test Spec : Adaptor input 120V/60Hz output DC 6V
 Comment : Temp:22'C
 : Humi:47%


APPENDIX II



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel: 0755-26639496
 Fax: 26632877

Data#: 1 File#: Technic star.EMI Date: 2003-01-16 Time: 15:18:38

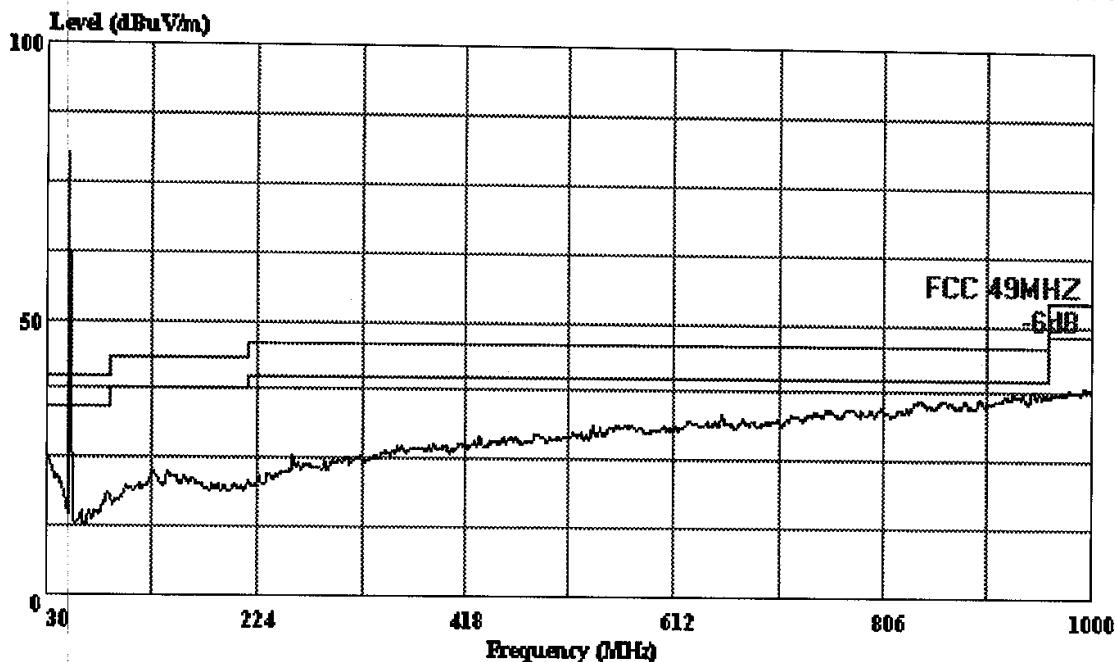

Trace:


Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR HORIZONTAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel A



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data#: 3 File#: Technic star.EMI Date: 2003-01-16 Time: 15:24:36

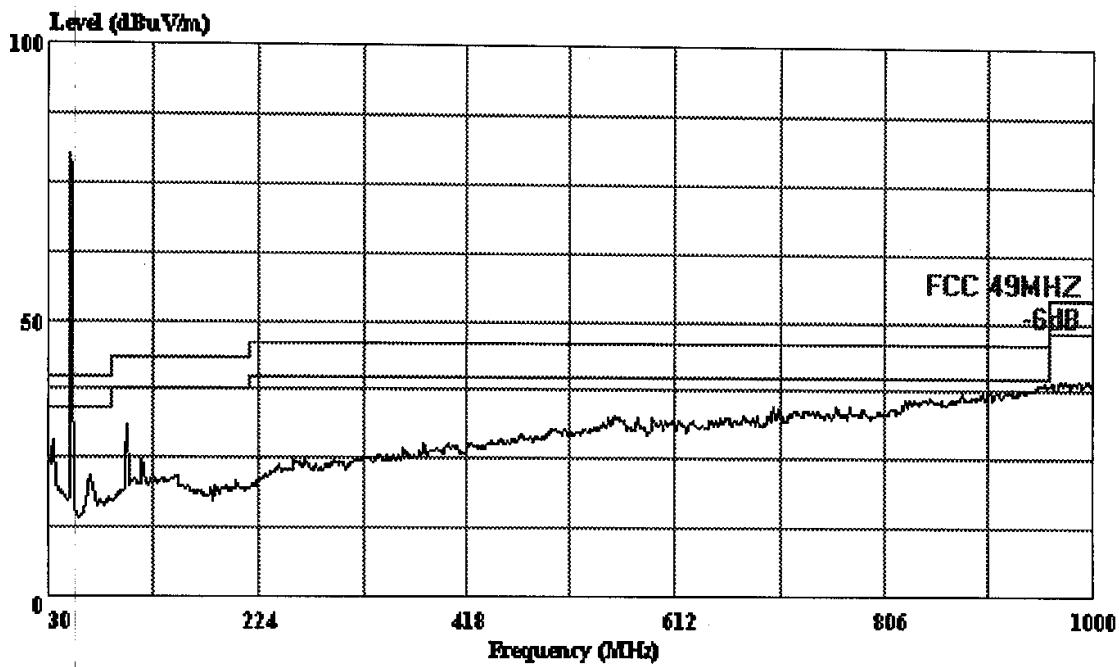

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC 49MHZ 3m 2598FACTOR VERTICAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel A



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel: 0755-26639496
 Fax: 26632877

Data#: 7 File#: Technic star.EMI Date: 2003-01-16 Time: 15:32:03

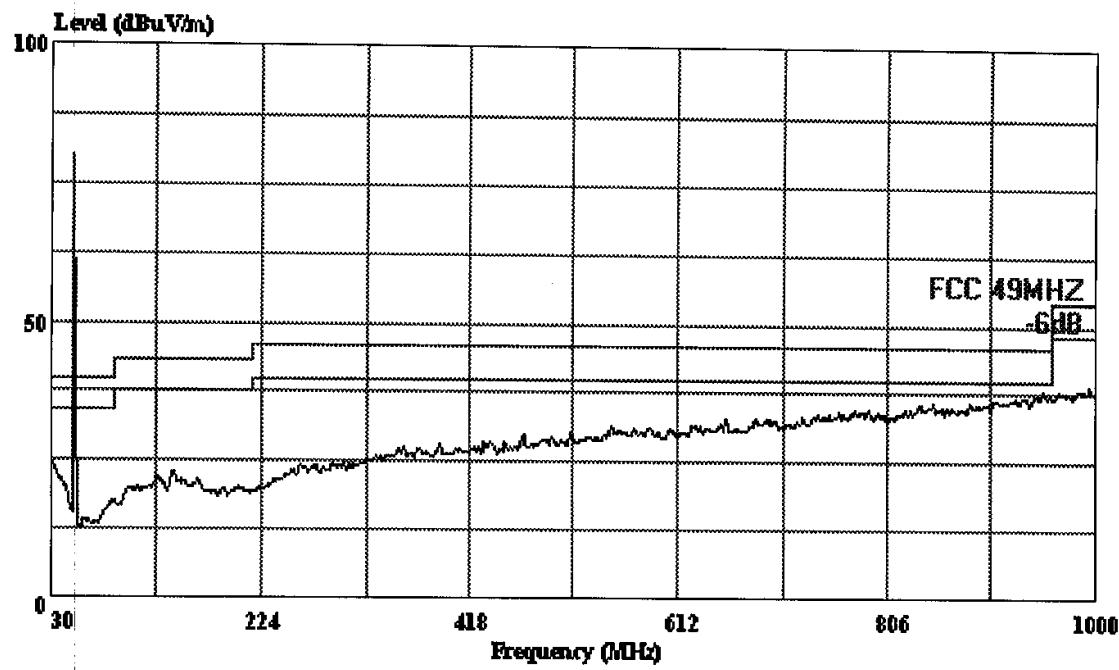

Trace:


Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR HORIZONTAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel B



Shenzhen Science & Ind Park
Tel: 0755-26639496
Fax: 26632877

Data#: 5 File#: Technic star.EMI Date: 2003-01-16 Time: 15:30:17

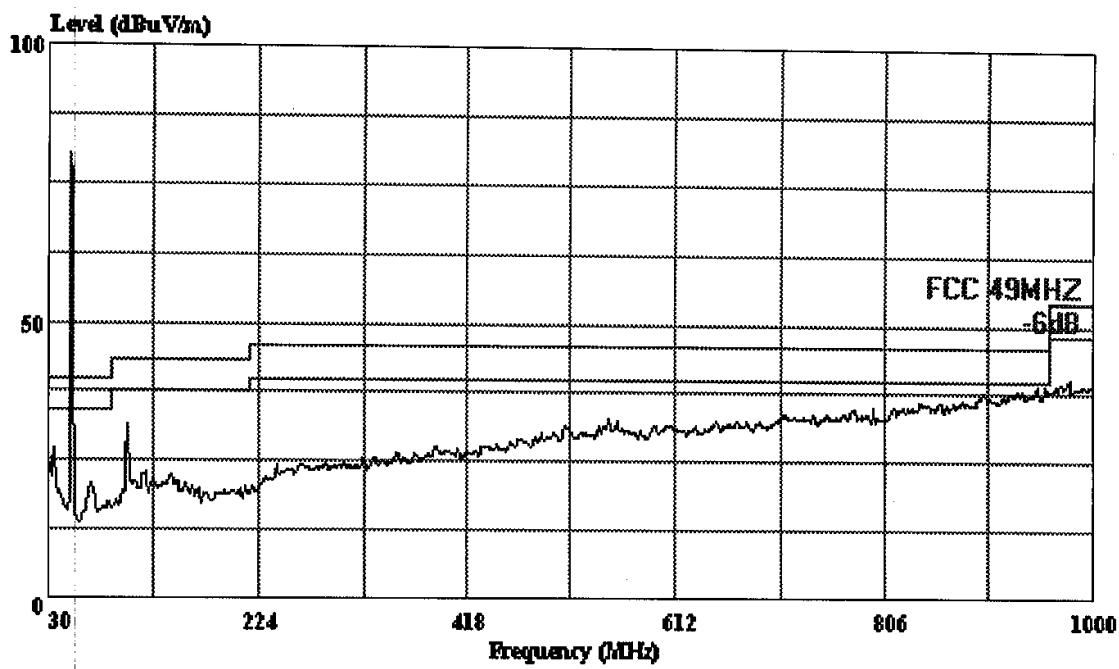

Trace:

Ref Trace:

Condition: FCC 49MHZ 3m 2598FACTOR VERTICAL
 EUT : Safe & Sound Monitor
 M/N : 3808
 Power : Adaptor input 120V/60Hz ouput DC 6V
 Test Engineer: Jimmy
 Memo : TX Channel B