DANAK-195222 DELTA-K221263-1 Page 1 of 10 3 annexes



DELTA





Thi. una DAI Aca

Measurements of radio frequency interference from Fingerprint Reader 100 SC Parallel Performed for Precise Biometrics AB

Project no.: K221263-1 Date: 2000-10-12 DELTA

Danish Electronics,

Light & Acoustics

Venlighedsvej 4 DK-2970 Hørsholm Denmark

Tel. (+45) 45 86 77 22 Fax (+45) 45 86 58 98 www.delta.dk

This report is issued under the rules of DANAK (The Danish Accreditation Scheme) - see overleaf.

The report must not be reproduced, except in full, without the written approval of DEITA

LIABILITY

The following provisions shall apply in respect of accredited testing and calibration tasks conducted by DELTA Danish Electronics, Light & Acoustics (herein- after DELTA) and of test reports and calibration certificates issued by DELTA.

- 1. DELTA shall not be liable for any loss or damage unless it is established that such loss or damage results from negligence or breach of duty on the part of DELTA.
- 2. The procedures used for testing/calibration and the preparation of the present test report/calibration certificate are based on the knowledge and techniques available to DELTA at the time of testing/calibration. DELTA shall not be held liable should subsequent technical developments indicate that such knowledge or techniques were inadequate or incorrect.
- 3. DELTA shall not be liable for loss or damage
- in cases where the product causing such loss or damage has not been tested by DELTA, except where it is established that such product is identical to one tested or examined by DELTA, or

- in cases where such loss or damage results from a property of a product or of a use, to which such product is put, which either has not been tested or examined and described in the present report or differs from DELTA's description in that report of the properties of the product or of uses to which it might be put.
- 4. DELTA will in no event be liable for consequential losses such as, but not limited to, loss of profit.
- 5. Should a third party enter a claim for compensation which exceeds the limits for DELTA's liability as set out in § 1-4 above, then defence against any such claim shall be the responsibility of the Client if DELTA so requires, and all costs of such defence and of any litigation in connection therewith shall be borne by the Client. Should DELTA be held liable or otherwise be ordered to make payments in excess of the limits set out in § 1-4, then the Client shall be obliged to indemnify and hold DELTA harmless in respect of such excess.
- 6. Any dispute arising out of or relating to this Test Report shall be referred to Copenhagen Arbitration. The interpretation and performance of this Test Report shall be governed by and construed in accordance with the laws of Denmark.

DANAK (DANISH ACCREDITATION)

DANAK was established in 1991 in pursuance of the Industry and Trade Promotion Act No. 394 of 13 June 1990. The scheme is a continuation of the accreditation scheme established in 1973 under the auspices of the former Danish National Testing Board (STP).

The requirements to the accredited testing laboratories are laid down in the Danish Agency for Development of Trade and Industry Statutory Order No. 258 of 11 April 1994 on accreditation of laboratories to perform technical testing etc.

The standards DS/EN 45001 "General criteria for the operation of testing laboratories" and DS/EN 45002 "General criteria for the assessment of testing laboratories" are integrated parts of the statutory order.

In order to obtain accreditation to perform technical testing it is, among other things, required:

- that the testing laboratory and its personnel are free from any commercial, financial and other pressures which might influence their technical judgement.
- that the testing laboratory operates a quality system which is documented.
- that the testing laboratory is furnished with items of

- equipment required for correct performance of the tests and measurements which the laboratory is accredited to perform.
- that the testing laboratory has sufficient personnel, having the necessary education, training, technical knowledge and experience for their assigned functions.
- that the testing laboratory has procedures for traceable calibration of equipment used for accredited testing.
- that accredited testing is performed after fully documented methods.
- that the testing laboratory has records which contain sufficient information to permit repetition of the test.
- that the testing laboratory is assessed and surveyed by DANAK on a regular basis.
- that the accredited laboratory shall take out an insurance which will cover liability in connection with accredited testing

Test reports carrying the logo of DANAK are used to report accredited testing and the logo shows that the testing has been performed in accordance with the rules of accreditation.



Title Measurements of radio frequency interference from

Fingerprint Reader 100 SC Parallel

Test object Fingerprint Reader 100 SC Parallel

Report no. DANAK-195222

Project no. K221263-1

Date of test 2000-07-19

Client Precise Biometrics AB

Dag Hamerskjölds väg 2

S – 224 64 Lund

Sweden

Telephone: +46 46 311100 Telefax: +46 46 311101

Contact person Mr. Håkan Lohmander

Manufacturer Precise Biometrics AB

Specifications FCC Rules and Regulations, Part 15, Subpart B, class B.

Results The emission from the test object was below the limit of

the above specification.

Test personnel Jesper Nielsen

Date 2000-10-12

Project manager

Per Hansen,

Facility Manager, EMC

DELTA

Responsible

Jørgen Duvald Christensen, Department Manager, EMC

DELTA

	Table of contents	Page
1.	Summary of test results	4
2.	Test specimen	5
3.	General test conditions	6
3.1	Test set-up	6
4.	Tests and results	9
4.1	Conducted emission, AC mains (FCC Part 15, Subpart B, Class B)	9
4.2	Radiated electromagnetic field (FCC Part 15, Subpart B, Class B)	10
	Annex 1 List of instruments (1 page)	

AC mains (FCC class B) (4 pages)

Annex 2 Test record sheets and photos regarding conducted emission,

1. Summary of test results

The results of the emission tests can be summarised as follows:

Emission tests	FCC Rules and Regulations, part 15 Subpart B Class B
Conducted emission, AC mains	Passed
Radiated electroma gnetic field	Passed

Abbreviations: Passed: The emission was below the limit.

Not done : No test was performed.

N/A : Not applicable.

Not relevant : The test was not relevant for the test object.

The test results relate only to the specimen tested.

2. Test specimen

Category : Electronic identification equipment

Manufacturer : Precise Biometrics AB

Model/Type : Precise 100 SC Parallel

Part no. : MS010004

Serial no. : 00006219

Supply voltage : 5.0 VDC supplied from the LapTop PC to the test object.

115 VAC supplied to the LapTop PC power adapter.

Operational mode: Test mode (a test programme was executing all functions)

Comments : PCB rev. D installed.

3. General test conditions

3.1 Test set-up

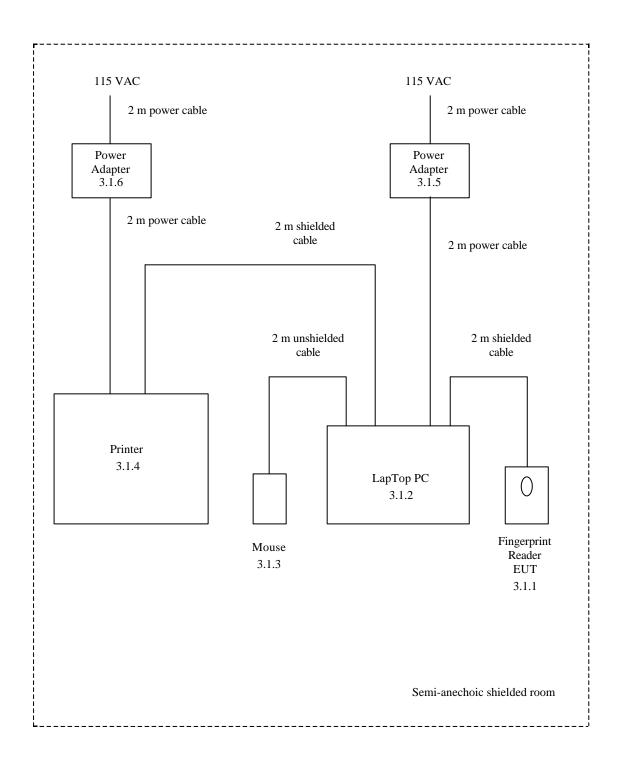


FIG. 1 Test configuration including test object and peripheral equipment

The complete system used during the tests consisted of the following units:

3.1.1 Fingerprint Reader EUT

Manufacturer : Precise Biometrics AB Model/type : Precise 100 SC Parallel

Part no. : MS010004 Serial no. : 00006219

FCC ID : -

3.1.2 LapTop PC AUX 1

Manufacturer : IBM

Model/type : ThinkPad 600E

Part no. : 2645-4BG Serial no. : 5528TVC

FCC ID : FCC compliant

3.1.3 Mouse AUX 2

Manufacturer : Microsoft

Model/type : -

Part no. : 83351-576

Serial no. : 0304842-00000

FCC ID : 3872A463

3.1.4 Printer AUX 3

Manufacturer : Hewlett Packard Model/type : Deskjet 895 CXi

Part no. : C6410A

Serial no. : H00151N087 FCC ID : FCC compliant

3.1.5 Power adapter AUX 4

Manufacturer : Hewlett Packard

Model/type : Part no. : Serial no. : -

FCC ID : FCC compliant

3.1.6 Power adapter AUX 5

Manufacturer : Hewlett Packard

Model/type : -

Part no. : -

Serial no. : -

FCC ID : FCC compliant

4. Tests and results

4.1 Conducted emission, AC mains (FCC Part 15, Subpart B, Class B)

	Requi	rements
Specification	FCC Rules and Regulation	s Part 15, Subpart B, Class B
Test method	FCC Rules and Regulations Part 15, Subpart B, Class B	
Test set-up	ANSI C	63.4:1992
Frequency range	0.45 -	30 MHz
Limit (quasi-peak):	0.45-0.50 MHz:	48 dBμV
Test record sheets and photos Annex 2		Annex 2

Results:

The emission was within the specified limits.

Climatic conditions:

22.1°C and 49.0 %RH

Comments:

The conducted emission was measured on the AC-mains to the LapTop PC power adapter.

115 VAC supply power to the LapTop PC power adapter.

4.2 Radiated electromagnetic field (FCC Part 15, Subpart B, Class B)

	Requi	irements
Specification	FCC Rules and Regulation	ns Part 15, Subpart B, Class B
Test method	FCC Rules and Regulation	ns Part 15, Subpart B, Class B
Test set-up	ANSI C	C63.4:1992
Measuring distance	3	3 m
Frequency range	quency range 30 - 1000 MHz	
Limit: (quasi-peak)	30-88 MHz: 88-216 MHz: 216-960 MHz: 960-1000 MHz:	40.0 dBμV/m 43.5 dBμV/m 46.0 dBμV/m 54.0 dBμV/m
Test record sheets and photos Annex 3		Annex 3

Results:

The emission was within the specified limits.

Climatic conditions:

22.1°C and 49.0 %RH

Comments:

115 VAC supply power to the LapTop PC power adapter.

Annex 1

List of instruments

(1 page)

List of instruments

EC NO.	INSTRUMENT	MANUFACTURER	ТҮРЕ
29797	BILOG ANTENNA, 30-1000 MHz	SCHAFFNER/CHASE	CBL 6111A
29337	ARTIFICIAL MAINS NETWORK	ROHDE & SCHWARZ	ESH2-Z5
29916	AUTOMATIC EMI RECEIVER	ROHDE & SCHWARZ	ESCS-30
29861	EMI-SOFTWARE Ver. 1.6	ROHDE & SCHWARZ	ES-K1


Annex 2

Test record sheets and photos regarding conducted emission, AC mains (FCC class B)

(4 pages)

DELTA Electronics Testing.

EUT:	Precise 100 SC Parallel
Manufacturer:	Precise Biometrics AB
dition:	
That Site:	EMC - 5
Onerator:	JN - K221263
Test Specification:	FCC class B
Comment:	Sheet 3
Start of Test:	2000-07-19

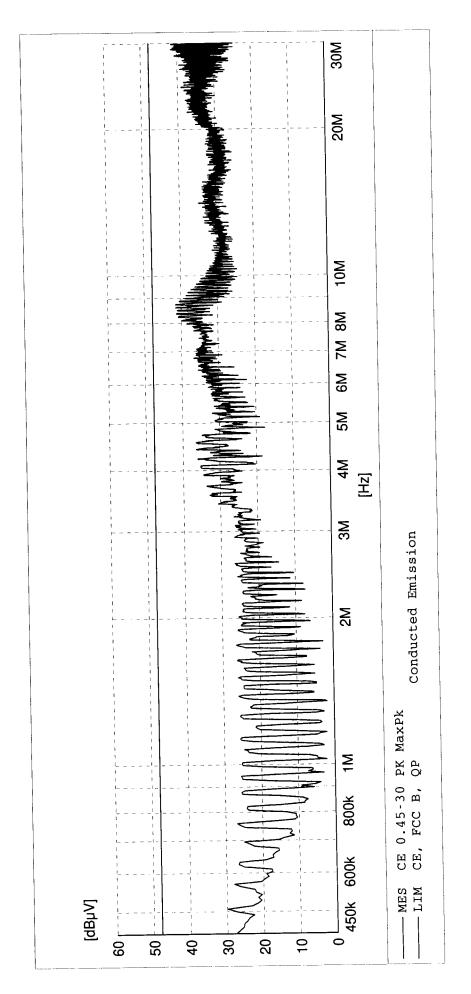

DELTA Electronics Testing.



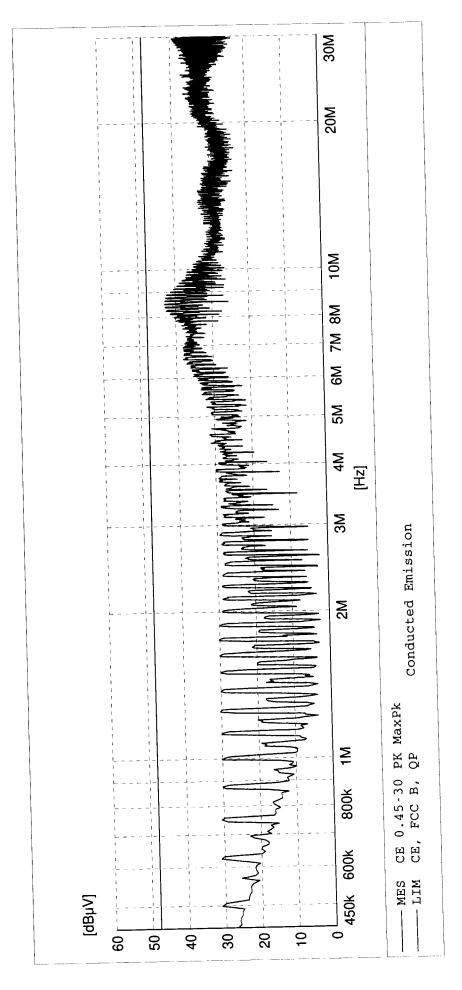




PHOTO A2.1



PHOTO A2.2

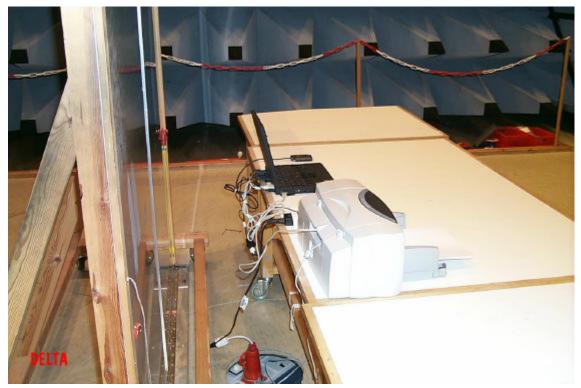


PHOTO A2.3

Annex 3

Test record sheets and photos regarding radiated electromagnetic field (FCC class B)


(4 pages)

DELTA Electronics Testing.

EUT:

Manufacturer:

Precise Biometrics AB
Operating Condition: Ant. 1 meter vertical. 115 VAC.
Test Site:
Operator:
Test Specification: FCC class B
Comment:
Start of Test:
2000-07-19

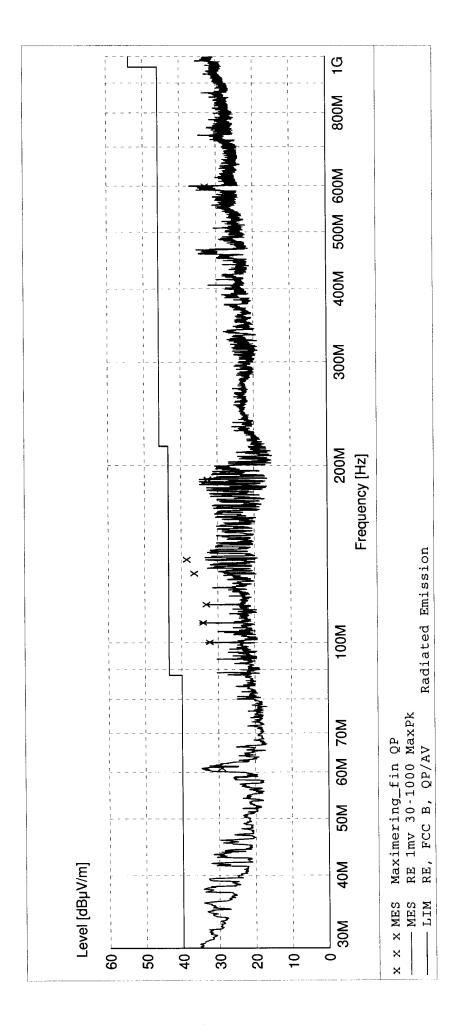

	Polarisation	VERTICAL VERTICAL VERTICAL VERTICAL HORIZONTAL HORIZONTAL HORIZONTAL
	Azimuth deg	163.00 89.00 46.00 35.00 195.00 355.00 98.00
:	Height cm	138.0 121.0 101.0 102.0 202.0 301.0 145.0
"Maximering_tin QF"	Margin dB	10.4 10.8 9.0 9.9 6.6 6.6 4.6 10.4
mering	Limit dBµV/m	0.04 44 6.04 7.04 7.04 7.04 7.04 7.04 7.04 7.04 7
: "Maxi	Transd dB	8.1 12.8 13.6 13.6 14.2 14.0 11.1 22.5
RESULT	AM Level dBµV/m	29.60 32.70 34.50 33.60 38.90 33.10
MEASUREMENT RESULT:	7/19/00 11:25 Frequency MHz	61.000000 100.170000 108.190000 116.200000 131.250000 138.600000 189.700000

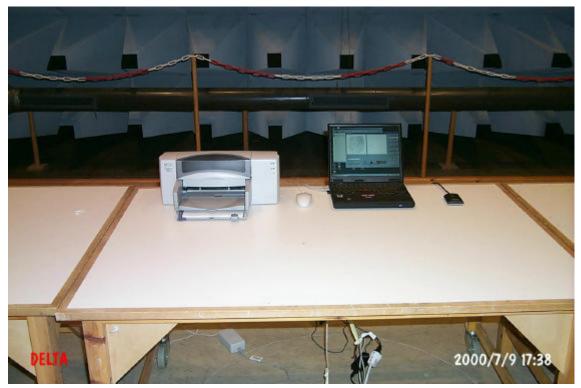


PHOTO A3.1



PHOTO A3.2

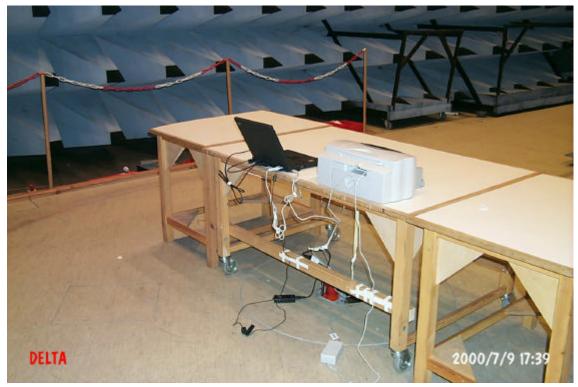


PHOTO A3.3



PHOTO A3.4