



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: April 16 ~ April 26, 2016

Test Report S/N: LR500111605C

Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID

**PBNRX01-CC85A**

APPLICANT

**ENTERMEDIA CO., LTD.**

|                                  |  |
|----------------------------------|--|
| <b>Equipment Class</b>           | <b>: Part 15 Spread Spectrum Transmitter (DSS)</b>   |
| <b>Manufacturing Description</b> | <b>: Wireless MIC receiver module</b>                |
| <b>Model name</b>                | <b>: RX01-CC85A</b>                                  |
| <b>Variation Model</b>           | <b>: RX01-CC85B</b>                                  |
| <b>Test Device Serial No.:</b>   | <b>: Identical prototype</b>                         |
| <b>Rule Part(s)</b>              | <b>: FCC Part 15.247 Subpart C; ANSI C-63.4-2014</b> |
| <b>Frequency Range</b>           | <b>: 2406 ~ 2474MHz</b>                              |
| <b>RF power</b>                  | <b>: Max -7.50 dBm – Conducted</b>                   |
| <b>Data of issue</b>             | <b>: April 28, 2016</b>                              |

This test report is issued under the authority of:

Yong-Cheol Wang, Manager

The test was supervised by:

Jungwon Seo, Test Engineer

**This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.**

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

|  |    |
|--|----|
| 1. GENERAL INFORMATION -----                   | 3  |
| 2. INFORMATION ABOUT TEST ITEM -----           | 4  |
| 3. TEST REPORT -----                           | 5  |
| 3.1 SUMMARY OF TESTS -----                     | 5  |
| 3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS----- | 6  |
| 3.3 TECHNICAL CHARACTERISTICS TEST -----       | 8  |
| 3.3.1 CARRIER FREQUENCY SEPARATION -----       | 8  |
| 3.3.2 NUMBER OF HOPPING FREQUENCIES -----      | 10 |
| 3.3.3 20 dB BANDWIDTH -----                    | 12 |
| 3.3.4 TIME OF OCCUPANCY (Dwell Time) -----     | 16 |
| 3.3.5 TRANSMITTER OUTPUT POWER -----           | 18 |
| 3.3.6 BAND EDGE -----                          | 21 |
| 3.3.7 CONDUCTED SPURIOUS EMISSIONS -----       | 25 |
| 3.3.8 RADIATED SPURIOUS EMISSIONS -----        | 28 |
| 3.3.9 AC CONDUCTED EMISSIONS -----             | 40 |

## **APPENDIX**

|  |    |
|--|----|
| APPENDIX TEST EQUIPMENT USED FOR TESTS ----- | 47 |
|--|----|

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No.  | Validity   | Reference             |
|--------|---------|--------------------|------------|-----------------------|
| NVLAP  | U.S.A   | 200723-0           | 2016-09-30 | ECT accredited Lab.   |
| RRA    | KOREA   | KR0049             | -          | EMC accredited Lab.   |
| FCC    | U.S.A   | 610755             | 2017-04-21 | FCC filing            |
| FCC    | U.S.A   | 649054             | 2017-04-13 | FCC CAB               |
| VCCI   | JAPAN   | R2133(10 m), C2307 | 2017-06-21 | VCCI registration     |
| VCCI   | JAPAN   | T-2009             | 2016-12-23 | VCCI registration     |
| VCCI   | JAPAN   | G-563              | 2018-12-13 | VCCI registration     |
| IC     | CANADA  | 5799A-1            | UPDATING   | IC filing             |
| KOLAS  | KOREA   | NO.551             | 2017-01-08 | KOLAS accredited Lab. |

## 2. Information about test item

### 2-1 Client

Company name : ENTERMEDIA CO., LTD.  
 Address : 157-1, Seongo-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea  
 Tel / Fax : TEL No : +82-02-680-9139 / FAX No : +82-32-673-0868

### 2-2 Manufacturer

Company name : ASSA TECHNOLOGY JOINT STOCK COMPANY  
 Address : Thanh Hoa Hamlet, Ho Nai 3 ward, Trang Bom District, Dong Nai province, Vietnam

### 2-3 Equipment Under Test (EUT)

Model name : RX01-CC85A  
 Variation model name : RX01-CC85B  
 Serial number : Identical prototype  
 Date of receipt : April 14, 2016  
 EUT condition : Pre-production, not damaged  
 Antenna type : PCB pattern antenna Max Gain 4.75 dBi  
 Frequency Range : 2406 ~ 2474 MHz  
 RF output power : Max. -7.50 dBm – Conducted  
 Number of channels : 18  
 Duty cycle : 8.40 %  
 Channel spacing : 4 MHz  
 Type of Modulation : Frequency Hopping Spread Spectrum(FHSS)  
 Power Source : DC 5 V

### 2-4 Tested frequency

| Bluetooth       | LOW  | MID  | HIGH |
|-----------------|------|------|------|
| Frequency (MHz) | 2406 | 2442 | 2474 |

### 2-5 Ancillary Equipment

| Equipment | Model No. | Serial No. | Manufacturer |
|-----------|-----------|------------|--------------|
| -         | -         | -          | -            |

### 3. Test Report

#### 3.1 Summary of tests

| FCC Part<br>Section(s) | Parameter                        | Limit   | Test<br>Condition | Status<br>(note 1) |
|------------------------|----------------------------------|---|-------------------|--------------------|
| 15.247(a)              | Carrier Frequency Separation     | $\geq 2/3$ of 20 dB BW                              | Conducted         | C                  |
| 15.247(a)              | Number of Hopping Frequencies    | $\geq 15$ channels                                  |                   | C                  |
| 15.247(a)              | 20 dB Bandwidth<br>99% Bandwidth | —   |                   | C                  |
| 15.247(a)              | Dwell Time                       | $\leq 0.4$ seconds                                  |                   | C                  |
| 15.247(b)              | Transmitter Output Power         | $\leq 1$ W for 1 Mbps<br>$\leq 125$ mW for 2,3 Mbps |                   | C                  |
| 15.247(d)              | Conducted Spurious emission      | $> 20$ dBc  |                   | C                  |
| 15.247(d)              | Band Edge                        | $> 20$ dBc  |                   | C                  |
| 15.249 / 15.209        | Field Strength of Harmonics      | $< 54$ dBuV (at 3 m)                                | Radiated          | C                  |
| 15.109                 | Field Strength                   | —   |                   | C                  |
| 15.207 /15.107         | AC Conducted Emissions           | EN 55022  | Line<br>Conducted | C                  |
| 15.203                 | Antenna requirement              | —   | —                 | C                  |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

#### Note 1: Antenna Requirement

→ The ENTERMEDIA CO., LTD. FCC ID: PBNRX01-CC85A unit complies with the requirement of §15.203.

The antenna type is PCB pattern antenna.

**Note 2:** The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2014

#### Note3: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2013) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “**Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems**” were used in the measurement of the ENTERMEDIA CO., LTD., FCC ID: PBNRX01-CC85A

## 3.2 Frequency Hopping System Requirements

### 3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3.2.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

Longest sequence of zeros: 8 (non-inverted signal)

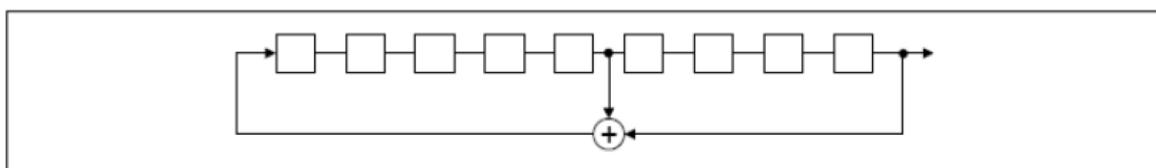

*Linear Feedback Shift Register for Generation of the PRBS sequence*

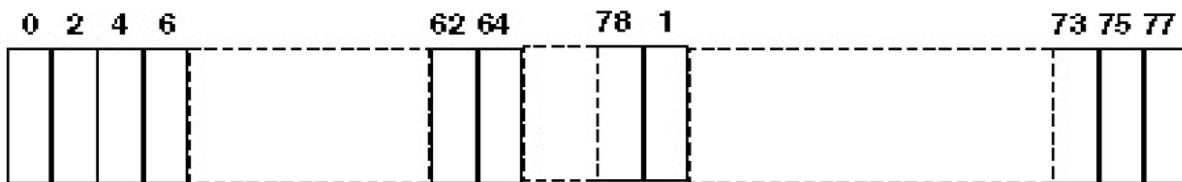

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 3.2.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

\*Example for a Bluetooth device using channel numbers would be : Chan 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75 etc.

### 3.3 TECHNICAL CHARACTERISTIC TEST

#### 3.3.1 Carrier Frequency Separation

##### Procedure:

The test follows DA00-705. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

##### The spectrum analyzer is set to:

Span = 10 MHz (Wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1 % of the span or more)      Sweep = auto

VBW = 10 kHz      Detector function = peak

Trace = max hold

##### Measurement Data:

| Test Results                       |          |
|------------------------------------|----------|
| Carrier Frequency Separation (MHz) | Result   |
| 3.9800                             | Complies |

- See next pages for actual measured spectrum plots.

##### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of 20 dB bandwidth of the hopping channel, whichever is greater.

##### Measurement Setup

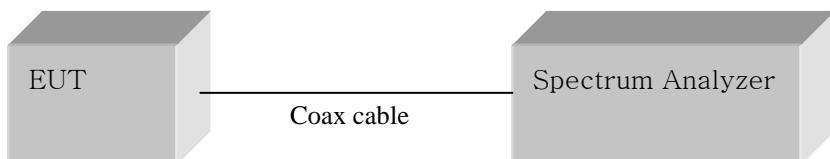
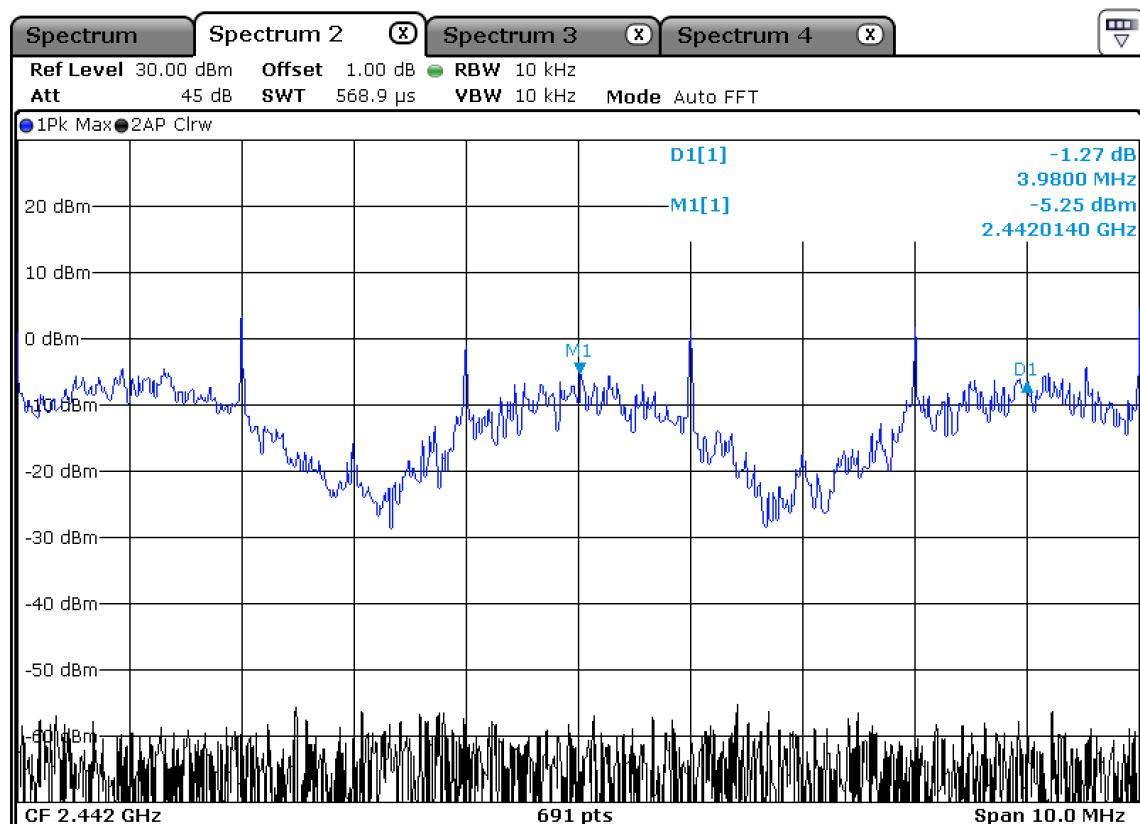


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency SeparationBasic Mode

### 3.3.2 Number of Hopping Frequencies

#### Procedure:

The test follows DA00-705. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to :

|  |                                       |
|--|---------------------------------------|
| Frequency range                        | Start = 2400.0 MHz, Stop = 2483.5 MHz |
| RBW = 100 kHz (1% of the span or more) | Sweep = auto                          |
| VBW = 100 kHz (VBW $\geq$ RBW)         | Detector function = peak              |
| Trace = max hold                       | Span > 40 MHz                         |

**Measurement Data : Complies**

|   |    |
|---|----|
| <b>Total number of Hopping Channels</b> | 18 |
|---|----|


- See next pages for actual measured spectrum plots.

**Minimum Standard:**

At least 15 channels

**Measurement Setup**

Same as the Chapter 3.3.1 (Figure 1)

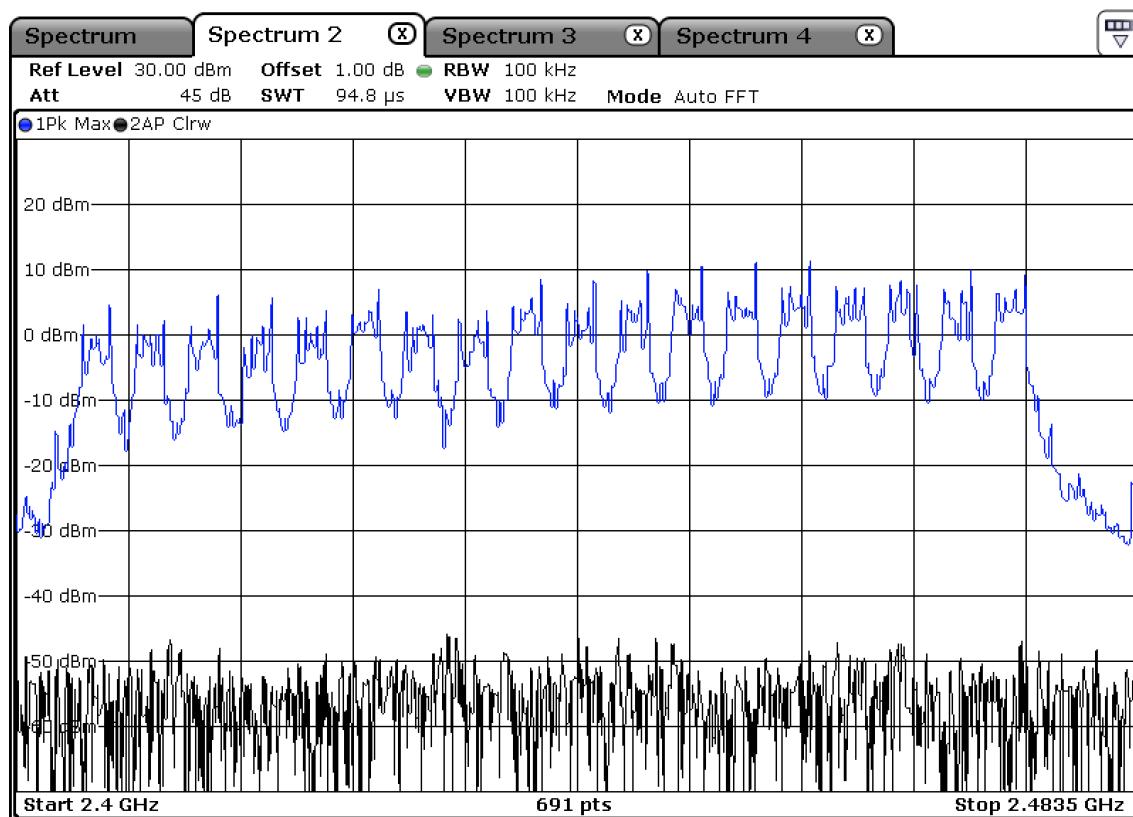Number of Hopping Frequencies

### 3.3.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

#### Measurement Data: Basic Mode

| Frequency<br>(MHz) | Channel No. | Test Results(MHz) |               |
|--------------------|-------------|-------------------|---------------|
|                    |             | 20dB Bandwidth    | 99% Bandwidth |
| 2406               | 1           | 0.0868            | 0.3126        |
| 2442               | 9           | 0.0912            | 0.1997        |
| 2474               | 18          | 0.2171            | 0.4298        |



- See next pages for actual measured spectrum plots.



#### Minimum Standard:



N/A

#### Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

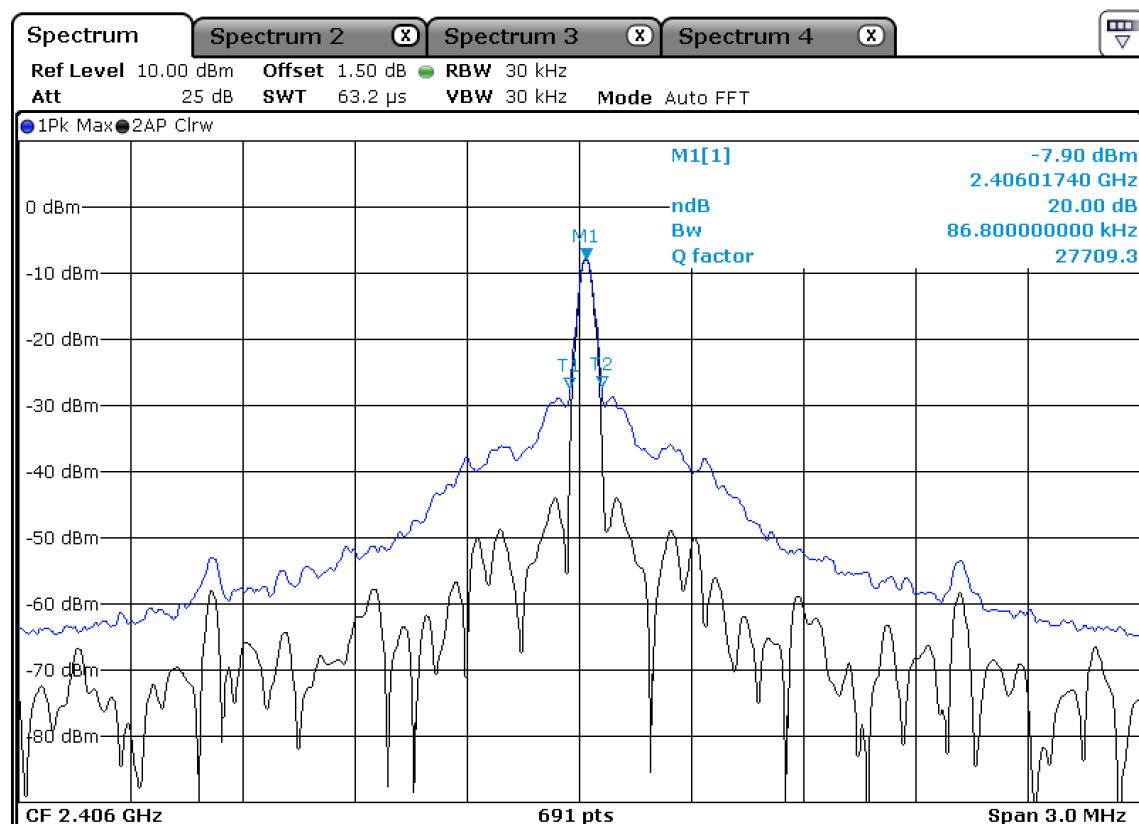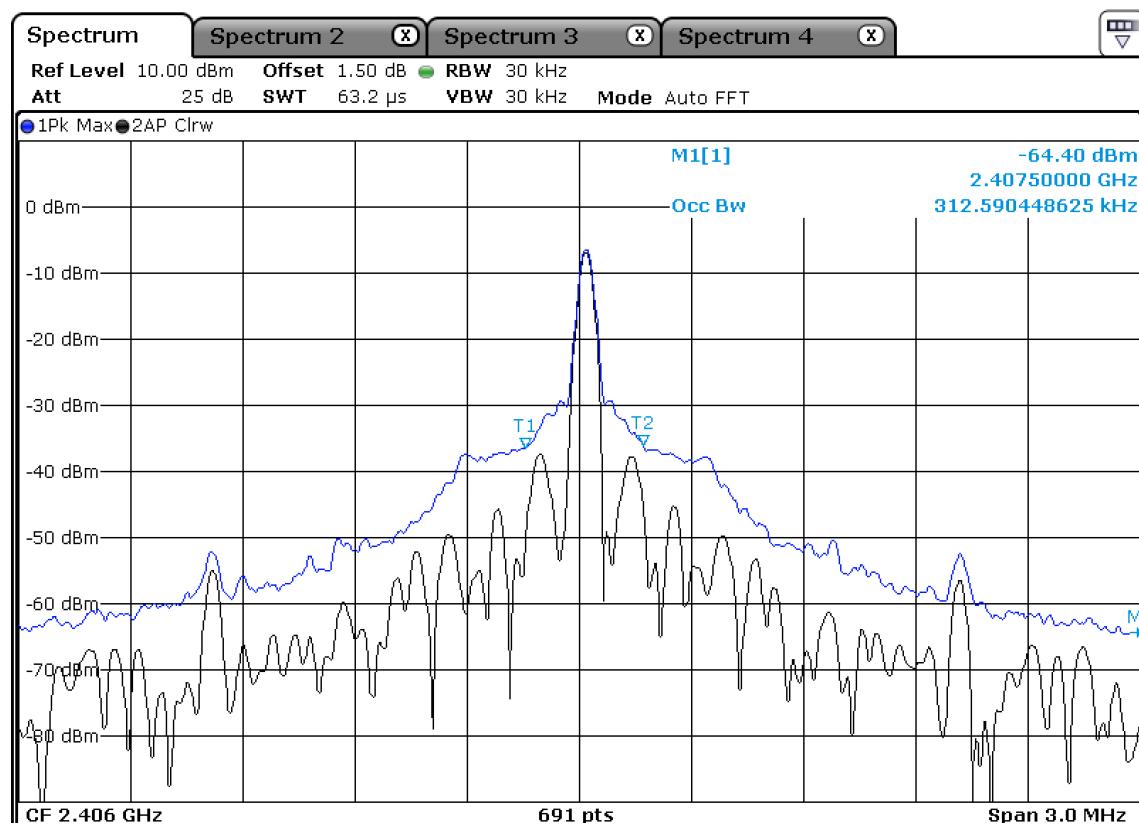Channel 1 of basic mode20 dB Bandwidth99% Bandwidth

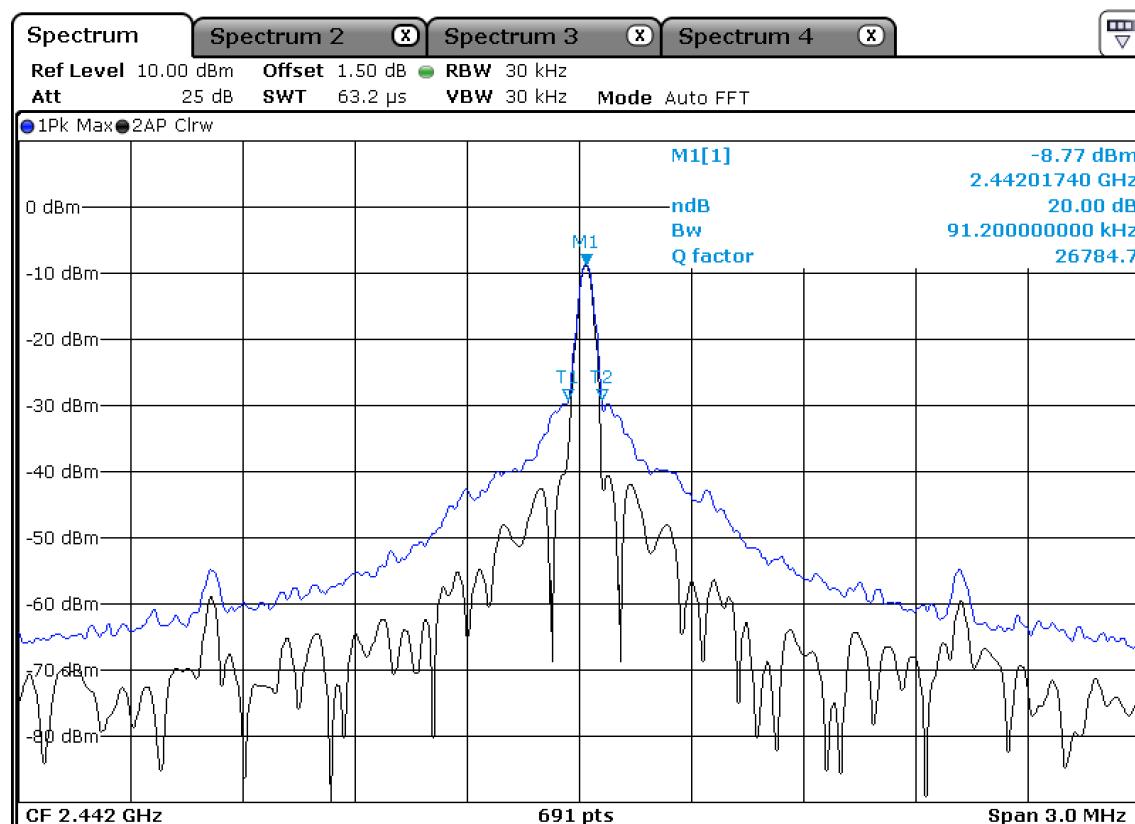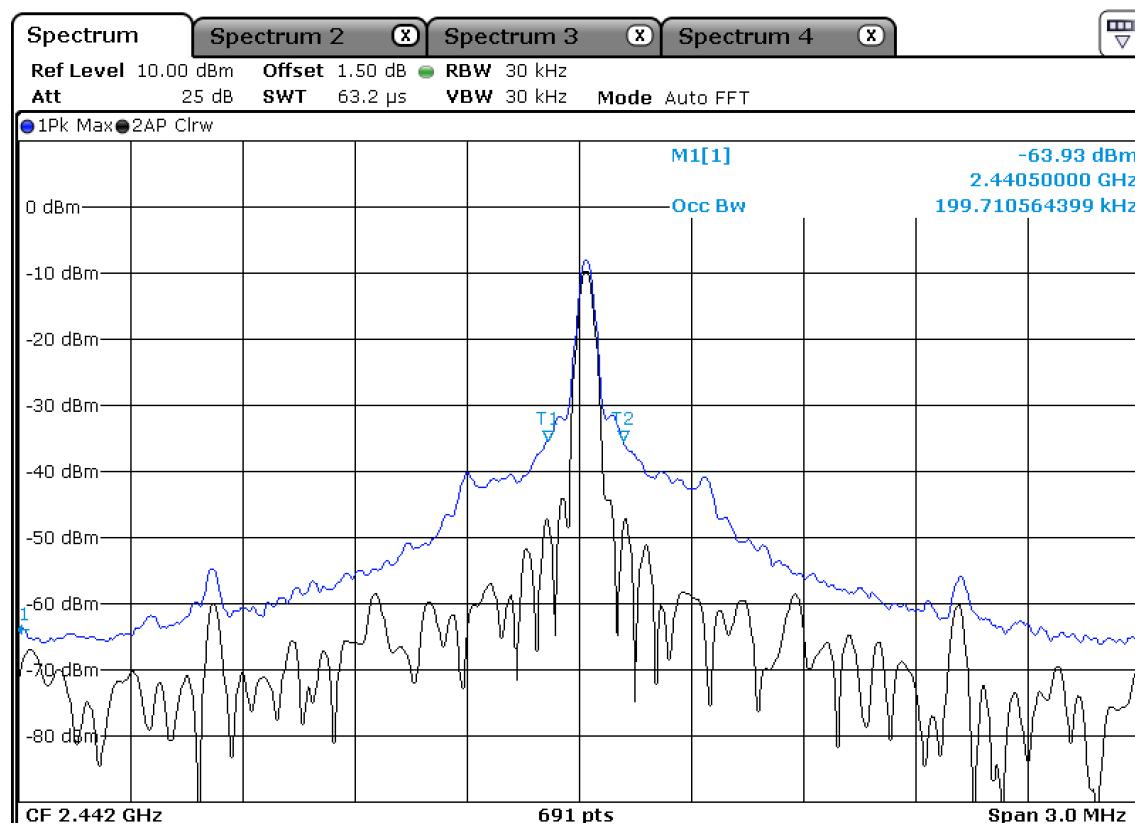Channel 2 of basic mode20 dB Bandwidth99% Bandwidth

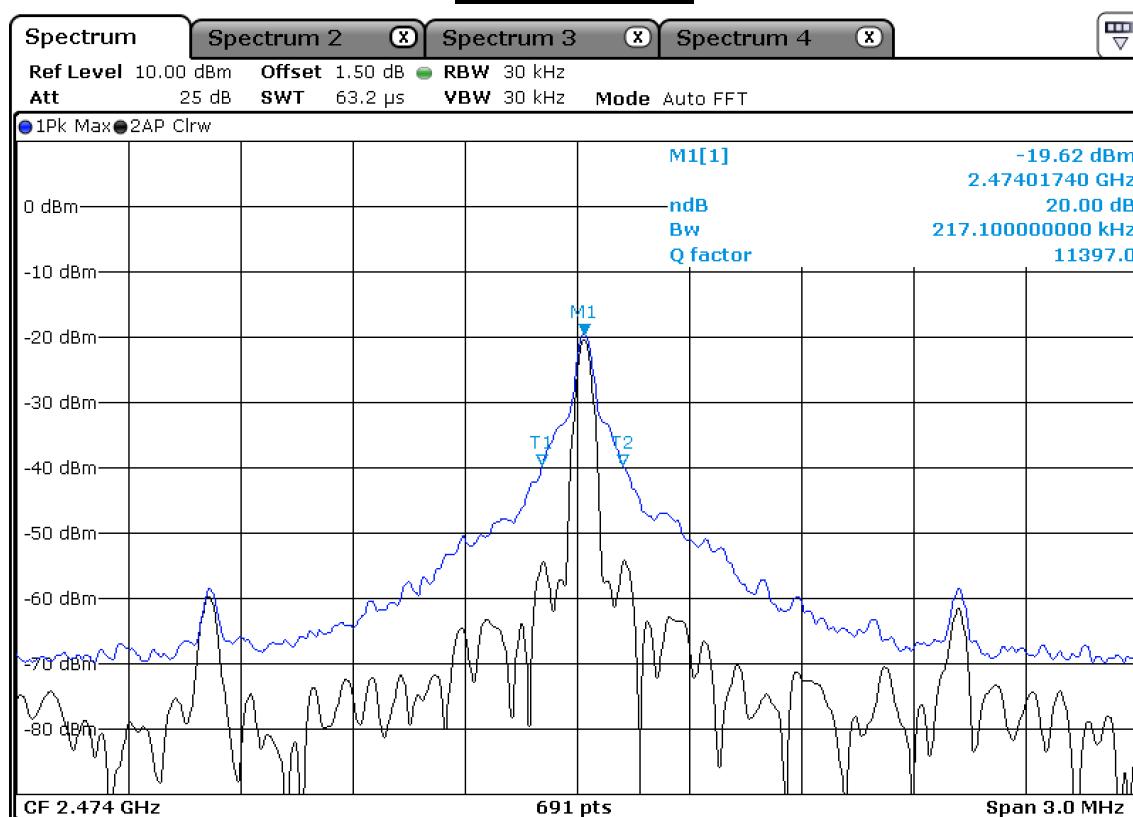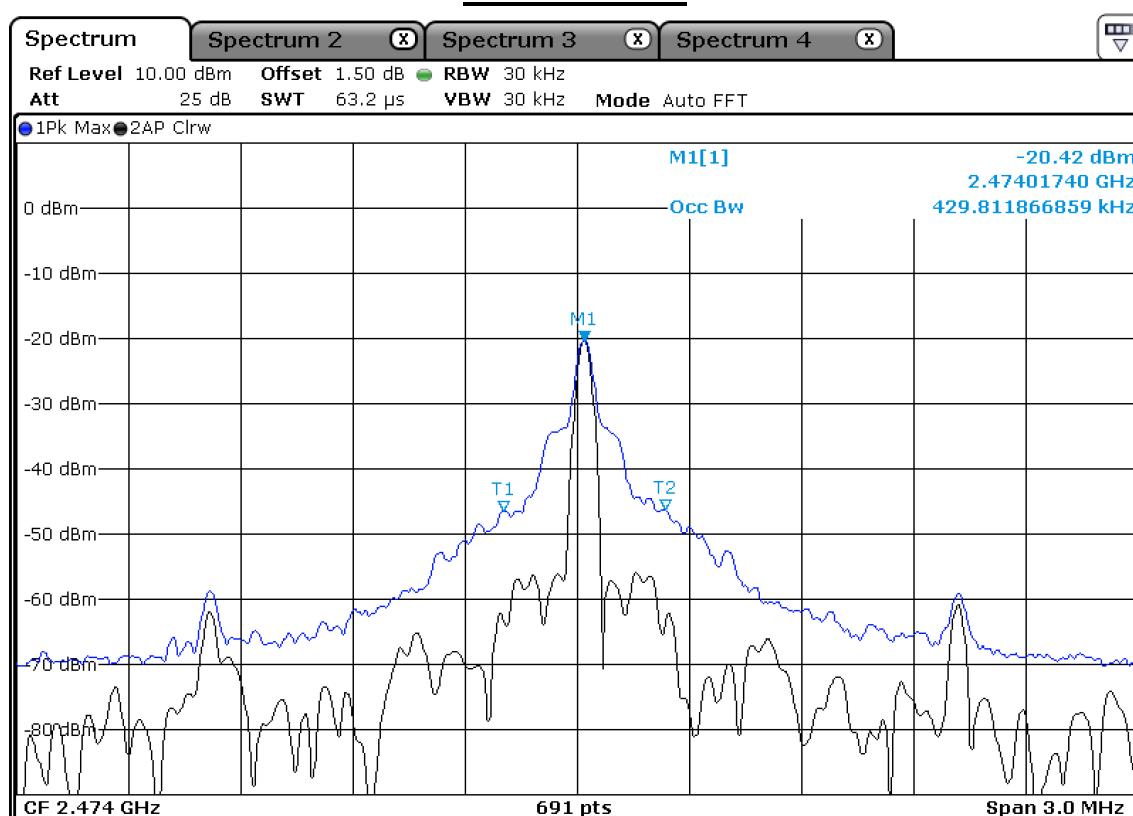Channel 3 of basic mode20 dB Bandwidth99% Bandwidth

### 3.3.4 Time of Occupancy (Dwell Time)

#### Procedure:

The test follows DA00-705. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

|                             |                              |
|-----------------------------|------------------------------|
| Center frequency = 2442 MHz | Span = zero                  |
| RBW = 1 MHz                 | VBW = 1 MHz (VBW $\geq$ RBW) |
| Trace = max hold            | Detector function = peak     |

#### Measurement Data :

| Mode | Number of transmission in a 7.2 s ( 18 Hopping*0.4) | Length of Transmission Time (msec) | Result (msec) | Limit (msec) |
|------|---|------------------------------------|---------------|--------------|
| FHSS | 17(Times / 3sec) *2.4 = 40.8                        | 0.209                              | 8.53          | 400          |



- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms

#### Minimum Standard:

0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

#### Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

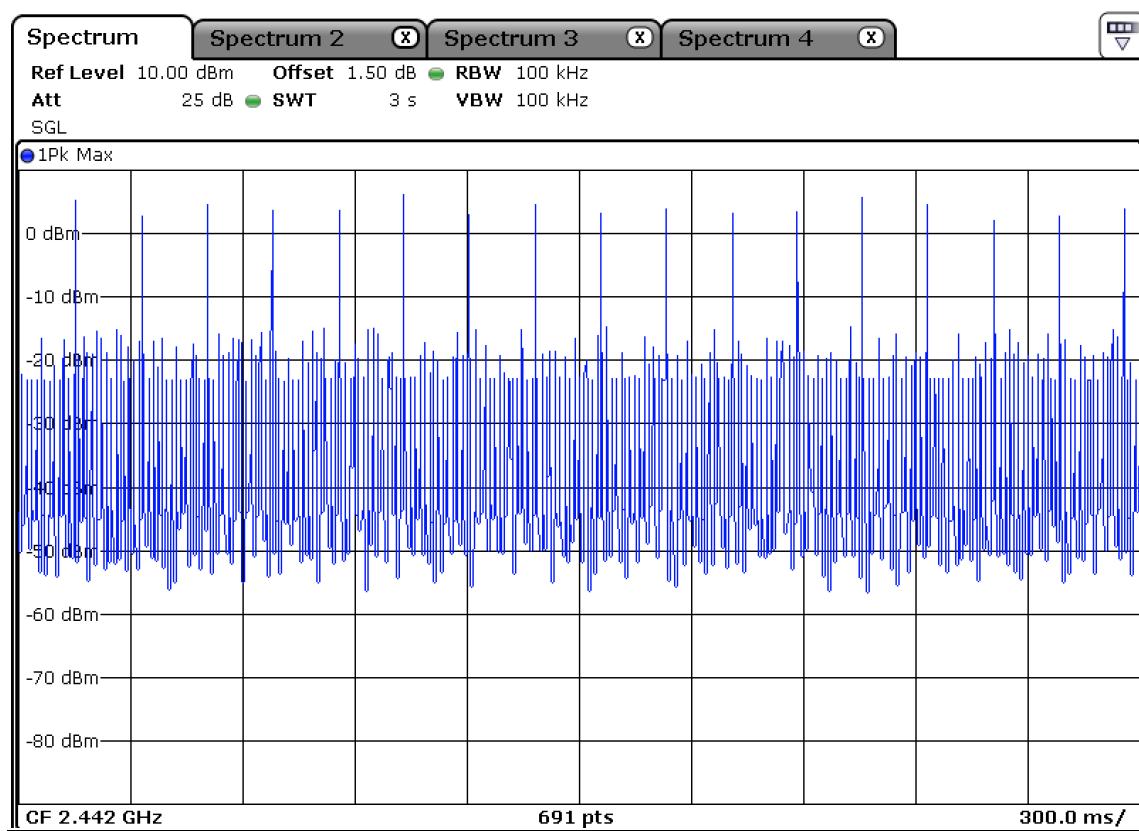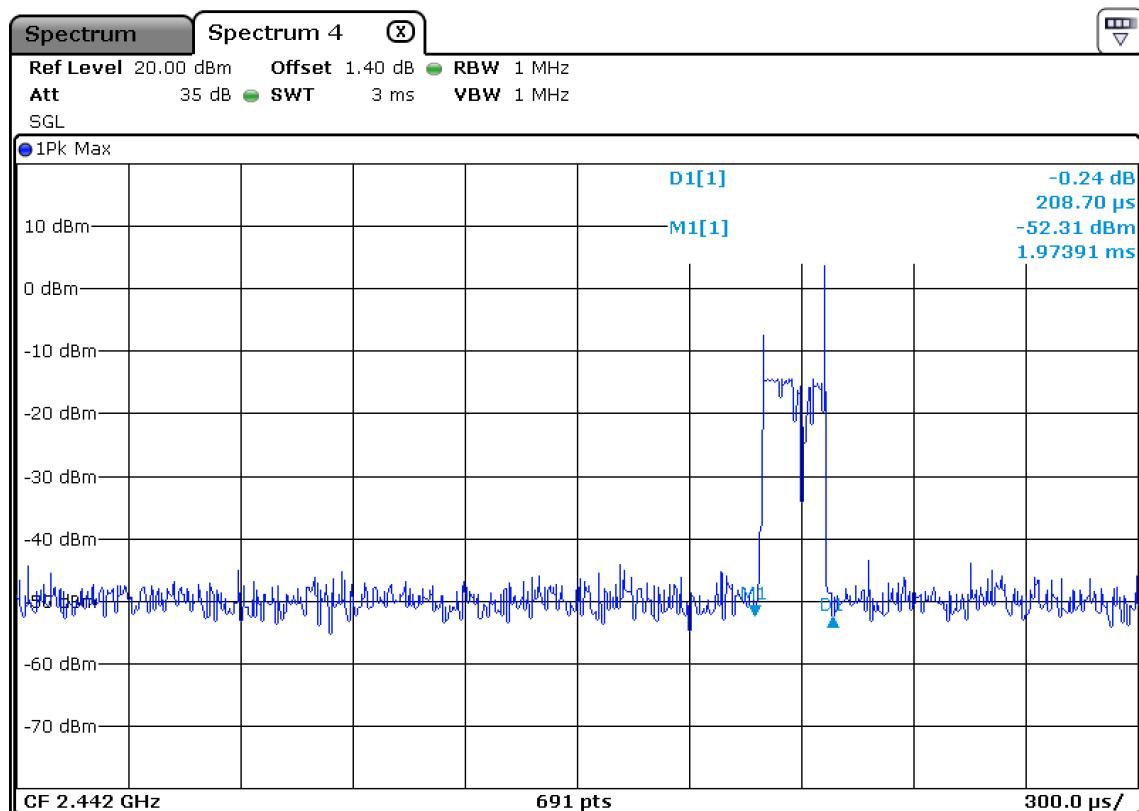basic mode

### 3.3.5 Transmitter Output Power

### Procedure:

The test follows DA00-705. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW  $\geq$  RBW)      Detector function = peak

## Measurement Data : Basic Mode

| Frequency<br>(MHz) | Ch. | Test Results  |             |          |
|--------------------|-----|---------------|-------------|----------|
|                    |     | dBm           | mW          | Result   |
| 2406               | 1   | <b>-7.50</b>  | <b>0.18</b> | Complies |
| 2442               | 9   | <b>-9.93</b>  | <b>0.10</b> | Complies |
| 2474               | 18  | <b>-17.77</b> | <b>0.02</b> | Complies |

- See next pages for actual measured spectrum plots.


|                          |  |
|--------------------------|--|
| <b>Minimum Standard:</b> | For frequency hopping systems with at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems: 0.125 W. |
|--------------------------|--|

---


## Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


**Channel 1**  
**Basic mode**

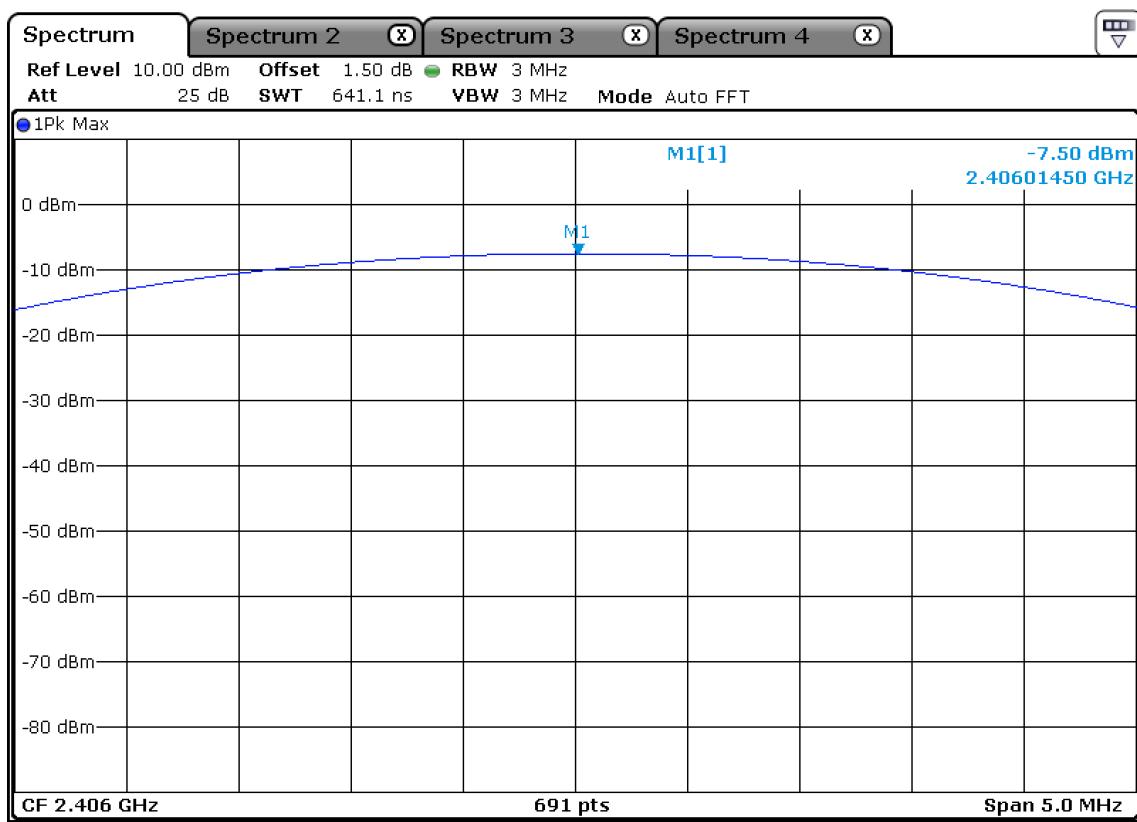

**Channel 2**  
**Basic mode**

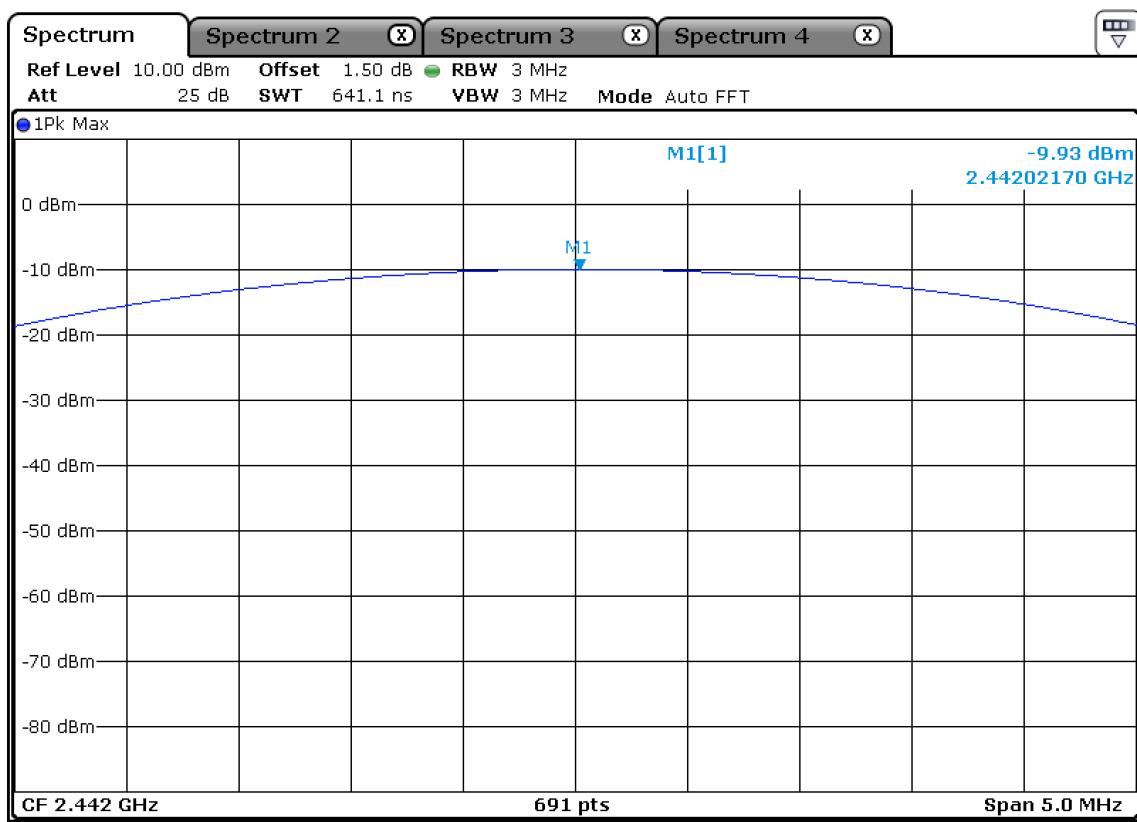

Channel 3  
Basic mode

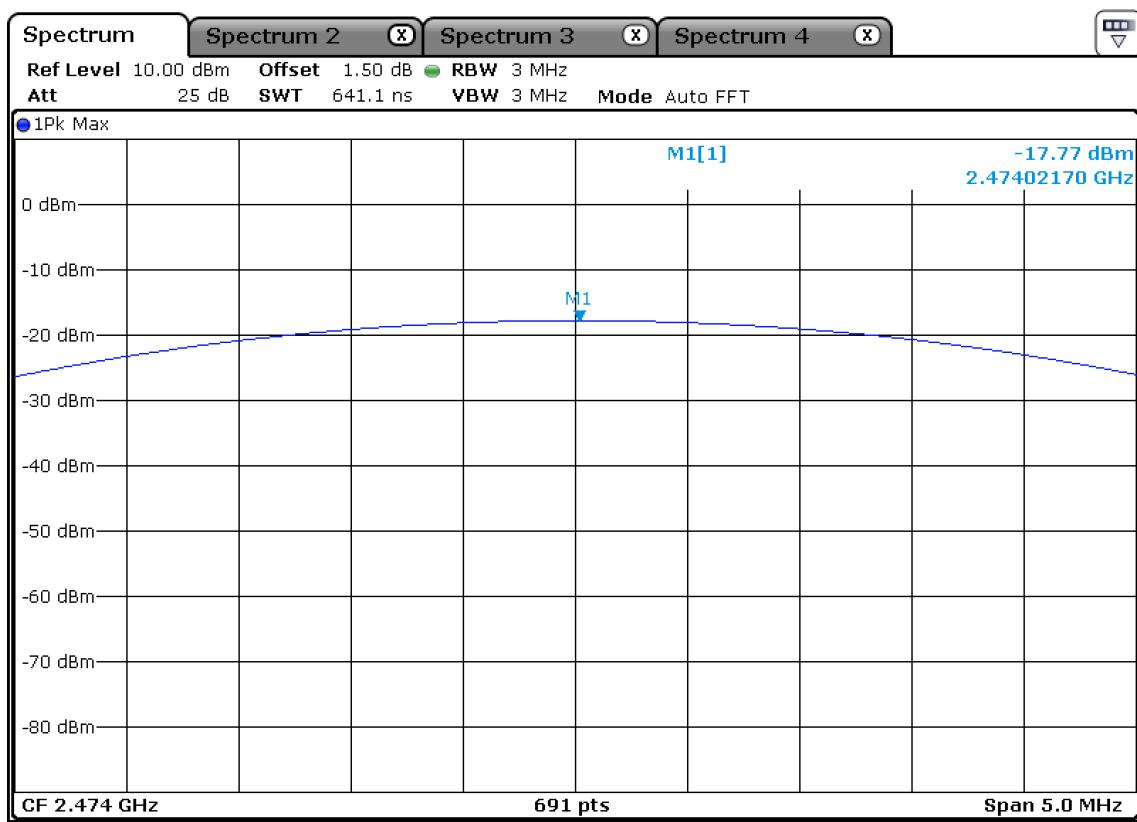

### 3.3.6 Band Edge

### Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

Span = 10 ~ 30 MHz      Detector function = peak

Trace = max hold      Sweep = auto

### Measurement Data: **Complies**

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


---

|                          |          |
|--------------------------|----------|
| <b>Minimum Standard:</b> | > 20 dBc |
|--------------------------|----------|


## Measurement Setup



Same as the Chapter 3.3.1 (Figure 1)

Band Edge  
Lower edge

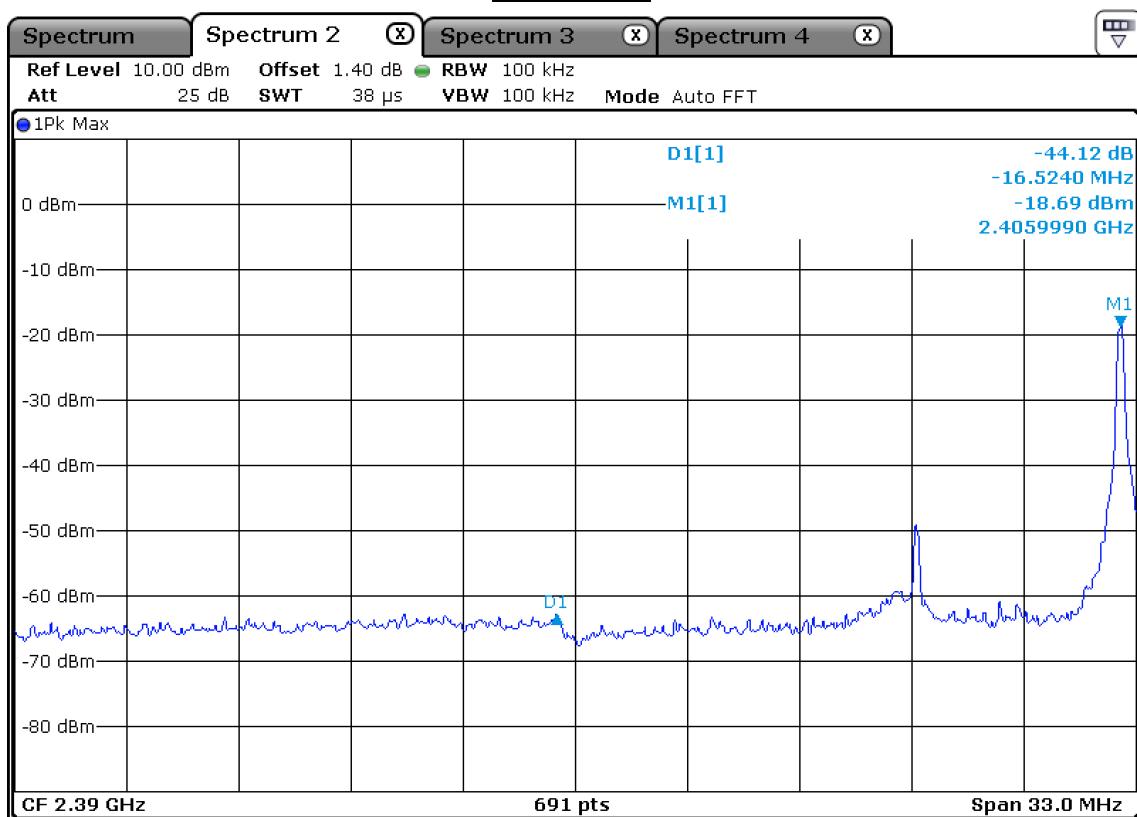

Upper edge

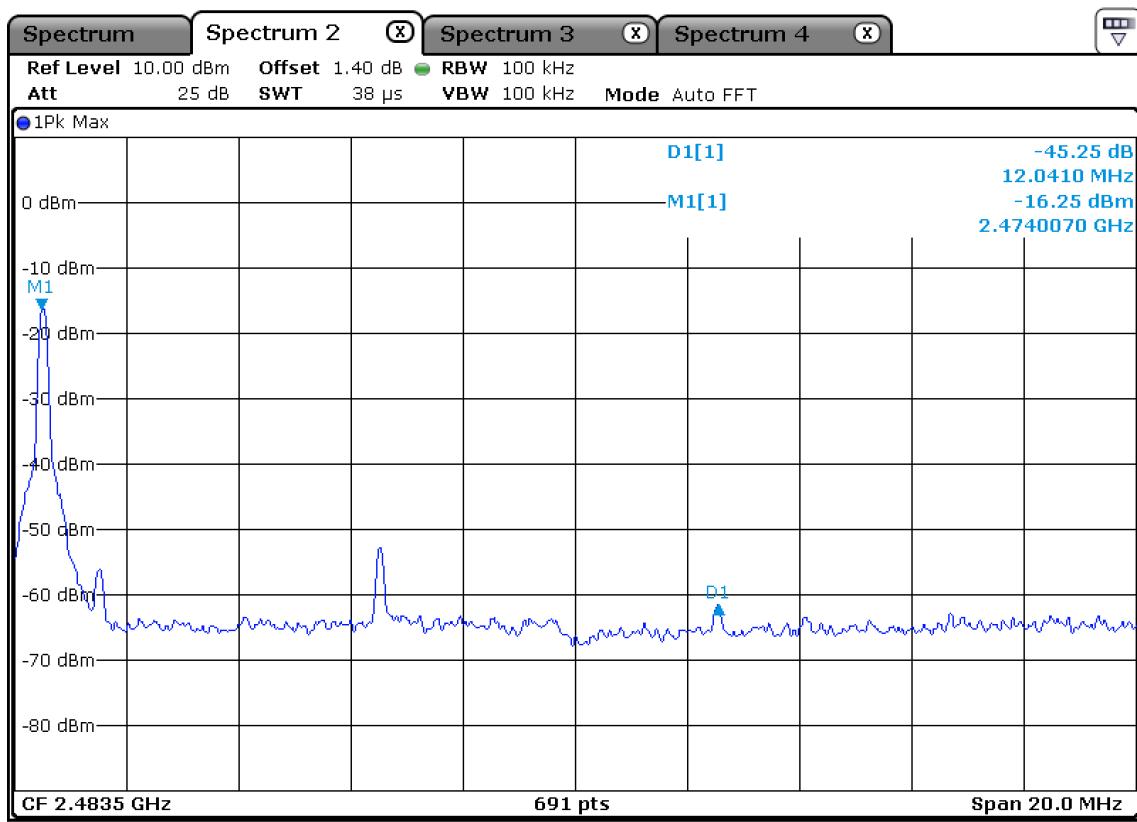

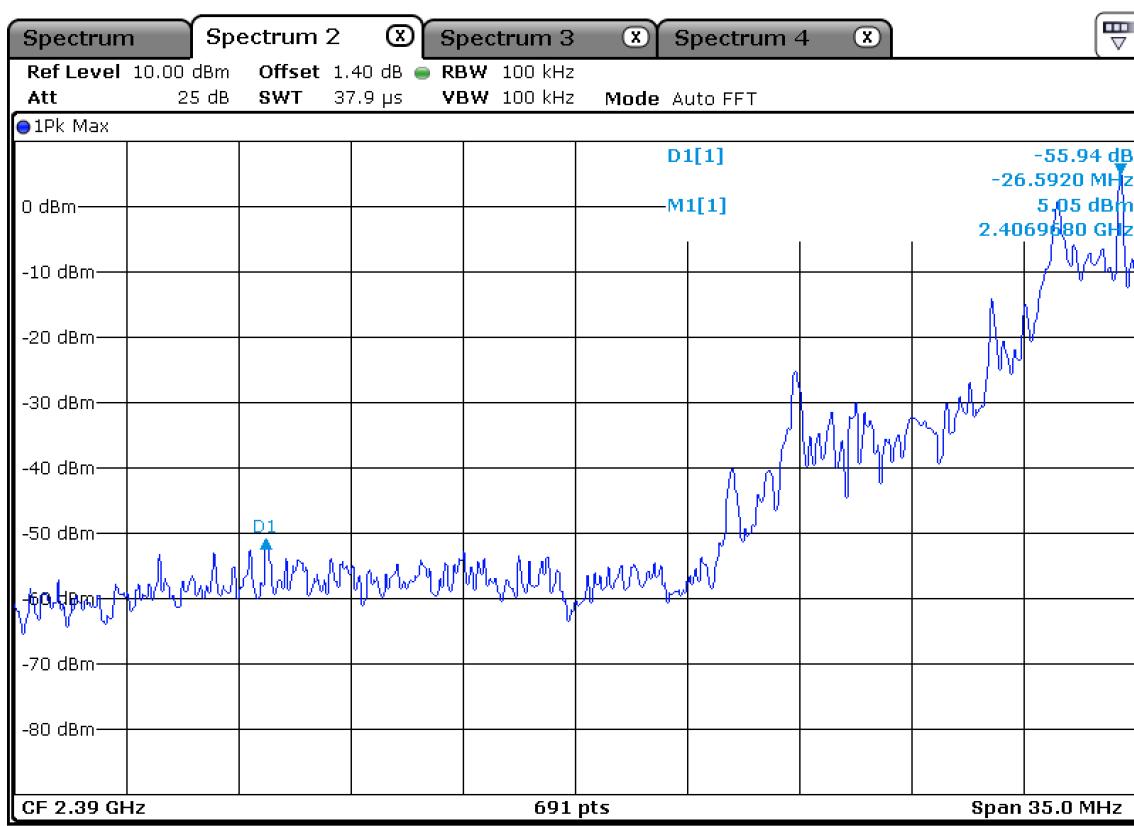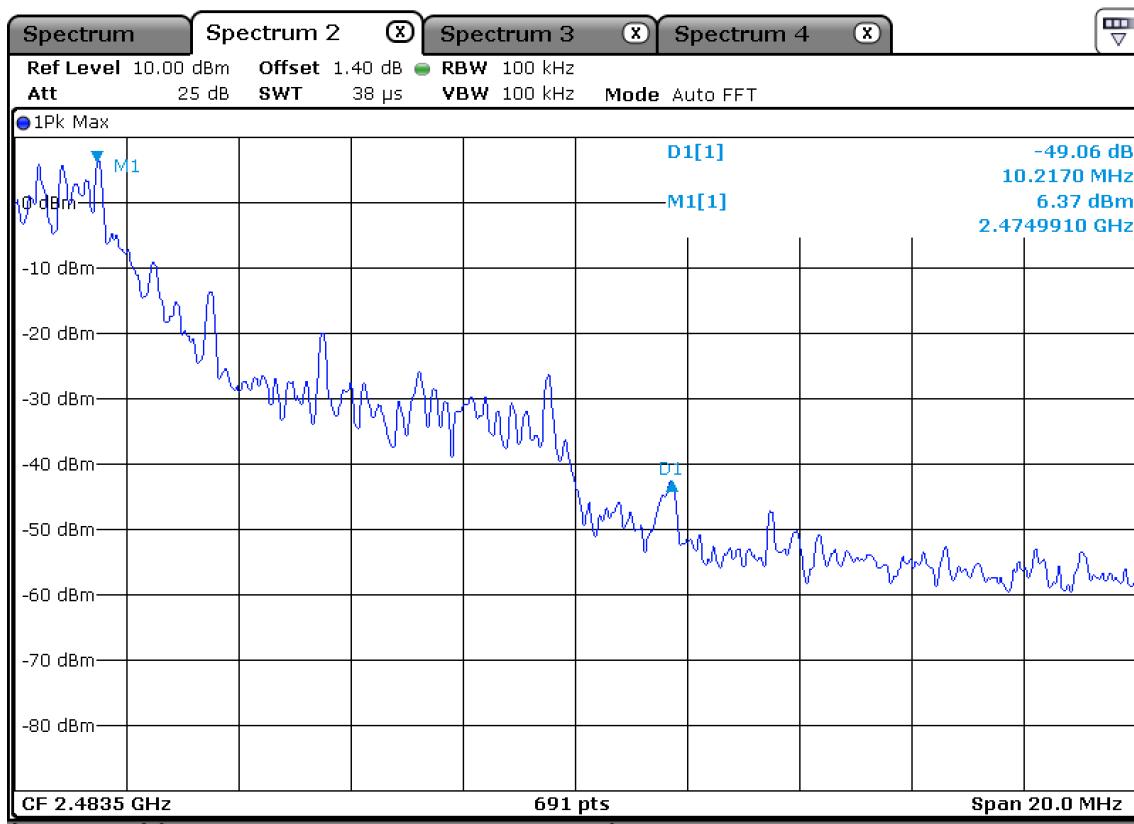Band Edge- HoppingLower edgeUpper edge

**Radiated Band edges in the restricted band 2310-2390 MHz measurement**

| Frequency<br>[MHz] | Reading<br>[dB $\mu$ V/m] |       | Pol. | Correction |                                  | Limits<br>[dB $\mu$ V/m] |      | Result<br>[dB $\mu$ V/m] |           | Margin<br>[dB] |       |
|--------------------|---------------------------|-------|------|------------|----------------------------------|--------------------------|------|--------------------------|-----------|----------------|-------|
|                    |                           |       |      | Antenna    | Factor<br>Amp.<br>Gain+CableLoss |                          |      | AV / Peak                | AV / Peak |                |       |
| 2351.1             | 33.45                     | 45.61 | V    | 32.21      | 25.27                            | 54.0                     | 74.0 | 40.39                    | 52.55     | 13.61          | 21.45 |

**Radiated Band edges in the restricted band 2483.5-2500 MHz measurement**

| Frequency<br>[MHz] | Reading<br>[dB $\mu$ V/m] |       | Pol. | Correction |                                  | Limits<br>[dB $\mu$ V/m] |      | Result<br>[dB $\mu$ V/m] |           | Margin<br>[dB] |       |
|--------------------|---------------------------|-------|------|------------|----------------------------------|--------------------------|------|--------------------------|-----------|----------------|-------|
|                    |                           |       |      | Antenna    | Factor<br>Amp.<br>Gain+CableLoss |                          |      | AV / Peak                | AV / Peak |                |       |
| 2484.1             | 29.54                     | 40.38 | V    | 32.21      | 25.27                            | 54.0                     | 74.0 | 36.48                    | 47.32     | 17.52          | 26.68 |

**Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.**

### **3.3.7 Conducted Spurious Emissions**

### Procedure:

The test follows DA00-705. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz      Detector function = peak

Trace = max hold

**Measurement Data: Complies**



- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


---

|                          |          |
|--------------------------|----------|
| <b>Minimum Standard:</b> | > 20 dBc |
|--------------------------|----------|

## Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

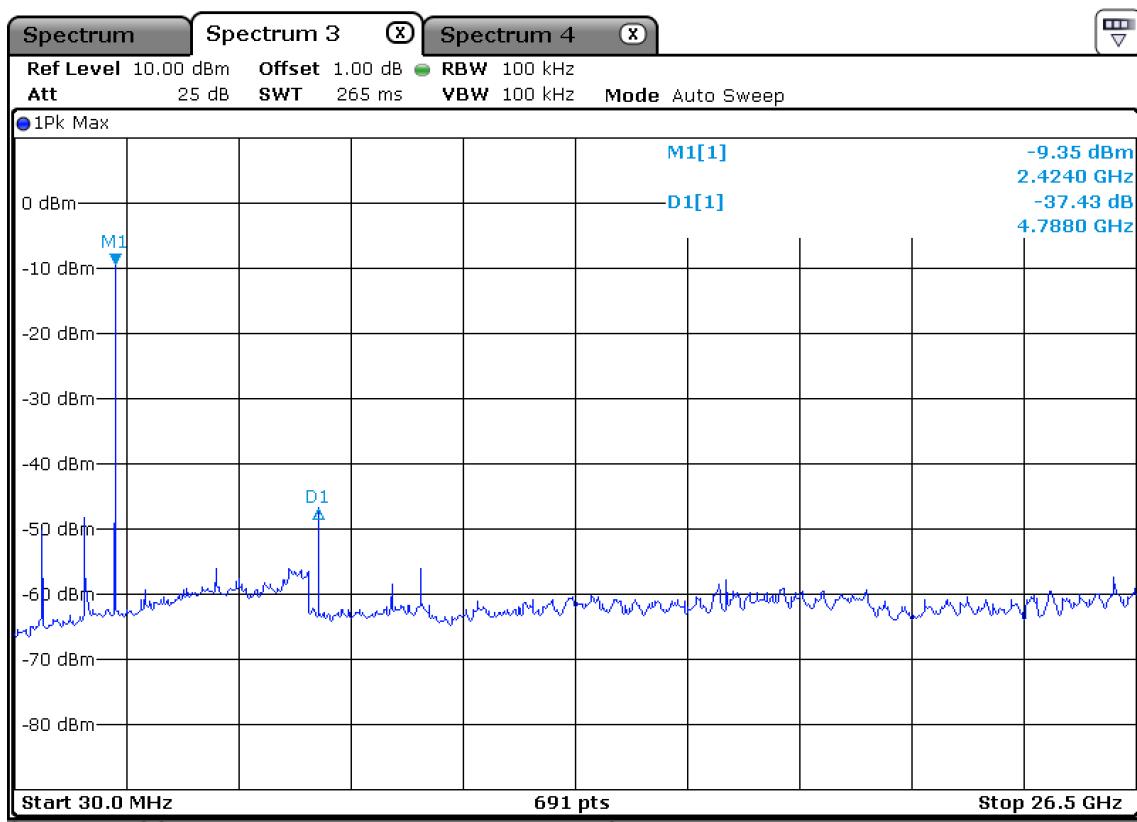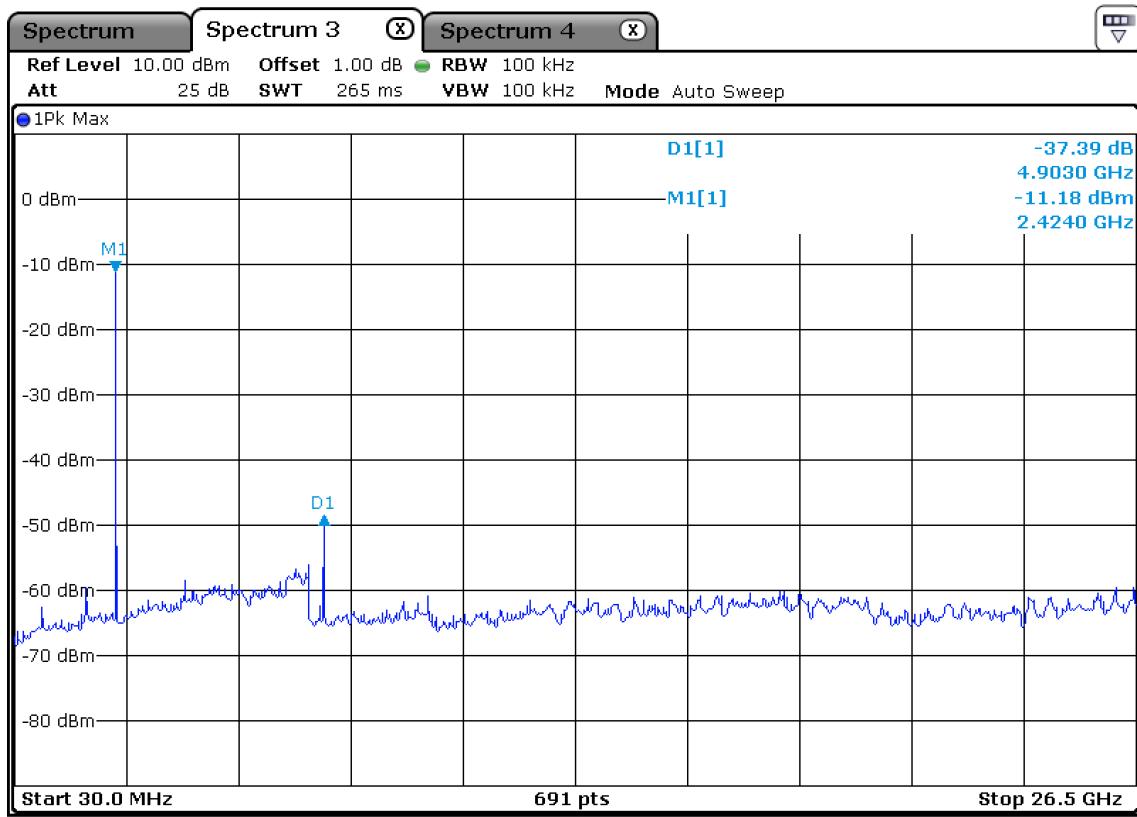Unwanted Emission – Low channelFrequency Range = 30 MHz ~ 26.5 GHzUnwanted Emission – Middle channelFrequency Range = 30 MHz ~ 26.5 GHz

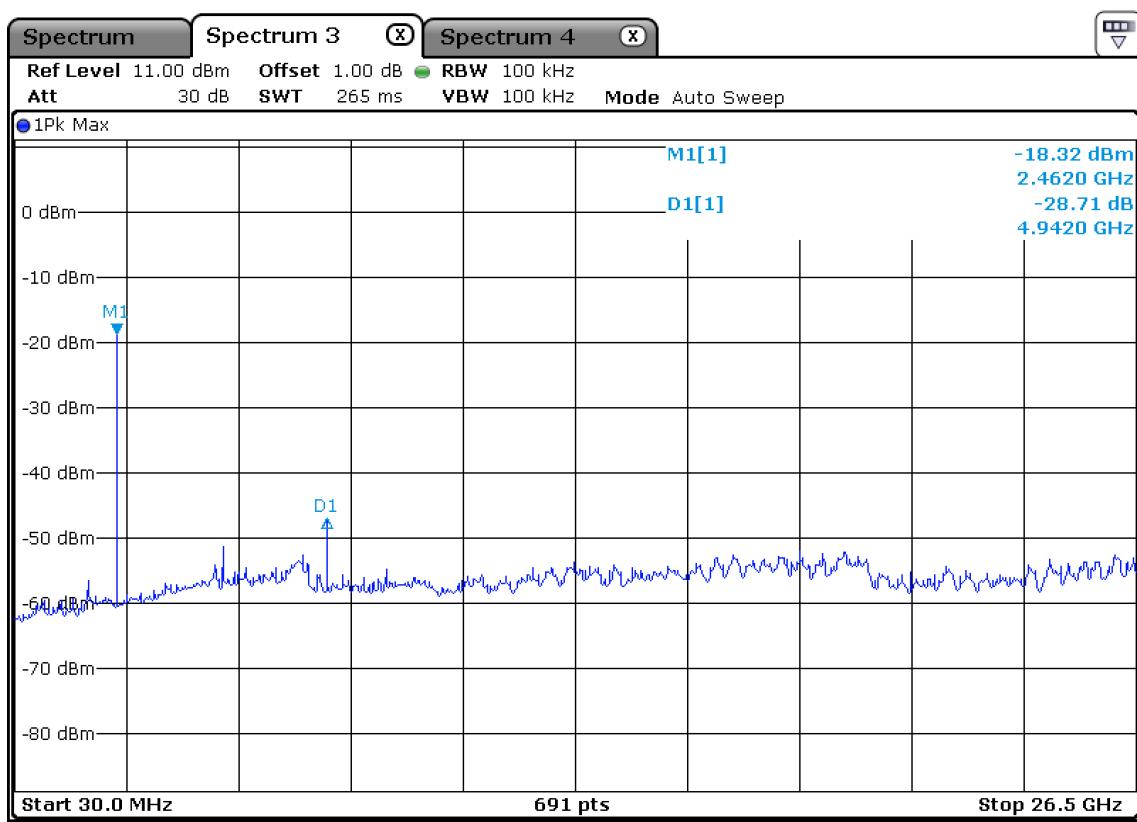Unwanted Emission – High channelFrequency Range = 30 MHz ~ 26.5 GHz

### 3.3.8 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA00-705. The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3 m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

#### The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30 MHz ~ 1 GHz)

VBW  $\geq$  RBW

= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )


Span = 100 MHz



Detector function = peak

Trace = max hold

Sweep = auto

#### **below 30 MHz**

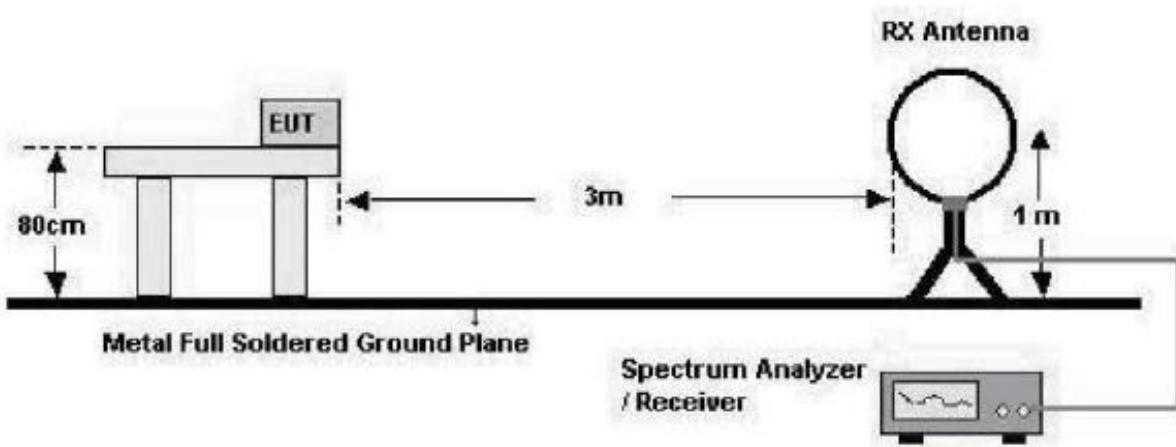

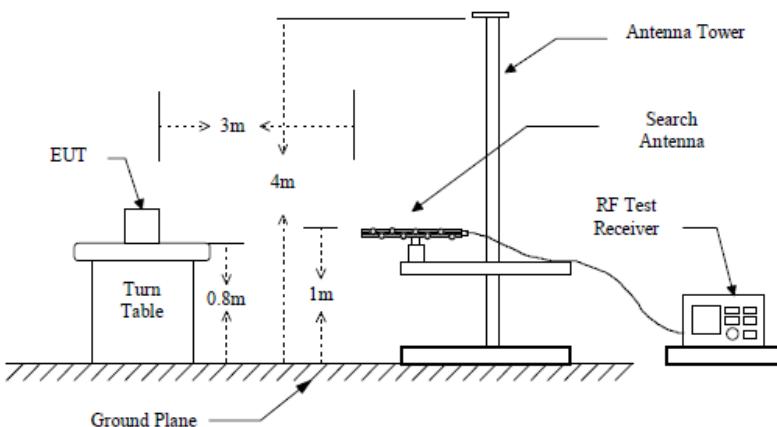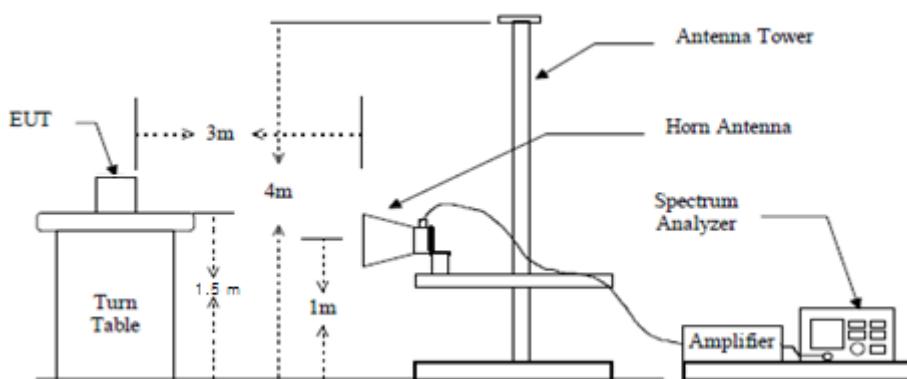**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

**Minimum Standard: FCC Part 15.209(a)**

| Frequency (MHz) | Limit (uV/m) @ 3 m    |
|-----------------|-----------------------|
| 0.009 ~ 0.490   | 2400/F(kHz) (@ 300 m) |
| 0.490 ~ 1.705   | 24000/F(kHz) (@ 30 m) |
| 1.705 ~ 30      | 30(@ 30 m)            |
| 30 ~ 88         | 100 **                |
| 88 ~ 216        | 150 **                |
| 216 ~ 960       | 200 **                |
| Above 960       | 500                   |

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Measurement Data : Hopping Mode**

| <b>Frequency</b><br>[MHz] | <b>Reading</b><br>[dBuV/m] |       | <b>Pol.</b> | <b>Correction</b><br>Factor |                | <b>D.C.F</b> | <b>Limits</b><br>[dBuV/m] |         | <b>Result</b><br>[dBuV/m] |           | <b>Margin</b><br>[dB] |      |
|---------------------------|----------------------------|-------|-------------|-----------------------------|----------------|--------------|---------------------------|---------|---------------------------|-----------|-----------------------|------|
|                           | AV                         | Peak  |             | Antenna                     | Amp.Gain+Cable |              | AV/Peak                   | AV/Peak | AV / Peak                 | AV / Peak |                       |      |
| 4878.1                    | 62.96                      | 64.64 | V           | 32.21                       | 25.27          | -53.60       | 54.0                      | 74.0    | 16.30                     | 18.0      | 37.7                  | 56.0 |
| -                         | -                          | -     | -           | -                           | -              | -            | -                         | -       | -                         | -         | -                     | -    |
| -                         | -                          | -     | -           | -                           | -              | -            | -                         | -       | -                         | -         | -                     | -    |
| -                         | -                          | -     | -           | -                           | -              | -            | -                         | -       | -                         | -         | -                     | -    |

- No other emissions were detected at a level greater than 20 dB below limit.

- D.C.F ( Duty Cycle Correction Factor) =  $20\log(\text{The worst Case DWELL Time}/100 \text{ ms})$

$$= 20\log(0.209 \text{ ms}/100 \text{ ms}) = -53.60$$

Radiated Emissions(below 1 GHz) – Wireless(LOW) mode


4, Songjuro 236 Beon-gil, Yangji-myeon,  
Cheoin-gu, Youngin-si, Gyeonggi-do,  
449-822 Korea  
Tel. +82-31-3236008,9  
Fax:+82-31-3236010

EUT/Model No. : RX01-CC85A

TEST MODE: Wireless(LOW) mode

Temp Humi : 22 / 37

Tested by: SIN S U

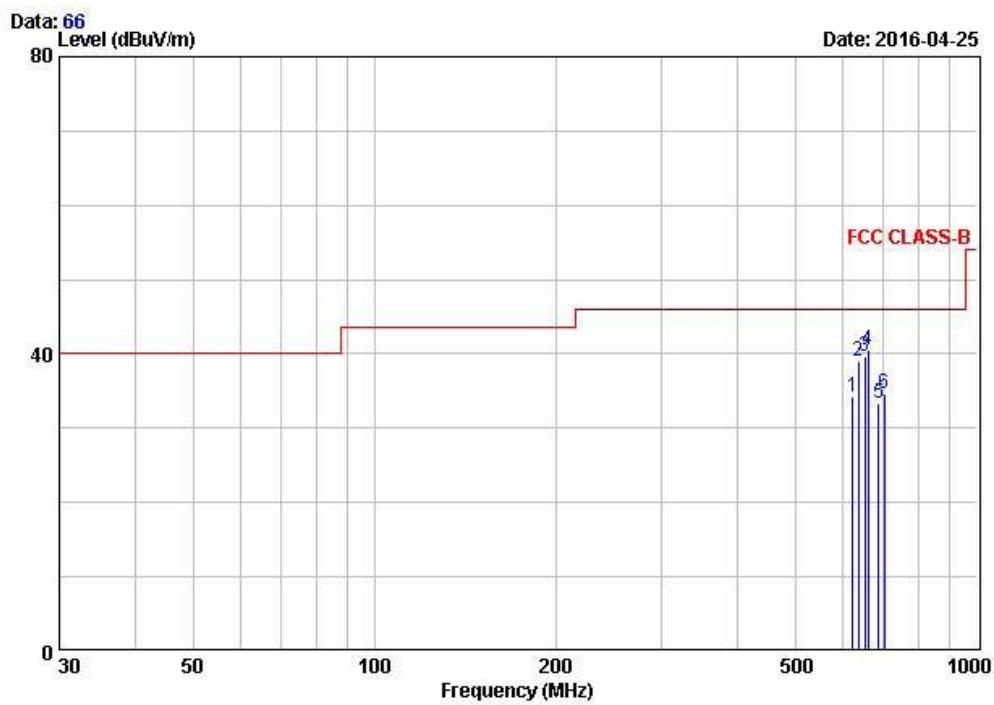

| Freq<br>MHz | Reading<br>dB <sub>uV/m</sub> | C.F<br>dB/m | Result<br>dB <sub>uV/m</sub> | Limit<br>QP        |                    | Margin<br>dB | Height<br>cm | Angle<br>deg | Polarity |
|-------------|-------------------------------|-------------|------------------------------|--------------------|--------------------|--------------|--------------|--------------|----------|
|             |                               |             |                              | dB <sub>uV/m</sub> | dB <sub>uV/m</sub> |              |              |              |          |
| 1 621.80    | 38.60                         | -4.32       | 34.28                        | 46.00              | 11.72              | 297          | 112          | HORIZONTAL   |          |
| 2 635.00    | 43.00                         | -3.95       | 39.05                        | 46.00              | 6.95               | 255          | 189          | HORIZONTAL   |          |
| 3 651.50    | 43.20                         | -3.51       | 39.69                        | 46.00              | 6.31               | 305          | 19           | HORIZONTAL   |          |
| 4 660.10    | 43.80                         | -3.28       | 40.52                        | 46.00              | 5.48               | 296          | 123          | HORIZONTAL   |          |
| 5 686.10    | 35.90                         | -2.62       | 33.28                        | 46.00              | 12.72              | 400          | 347          | HORIZONTAL   |          |
| 6 701.50    | 36.80                         | -2.22       | 34.58                        | 46.00              | 11.42              | 100          | 311          | HORIZONTAL   |          |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Wireless(MID) mode


4, Songjuro236Beon-gil, Yangji-myeon,  
Cheoin-gu, Youngin-si, Gyeonggi-do,  
449-822 Korea  
Tel :+82-31-3236008,9  
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A

TEST MODE: Wireless(MID) mode

Temp Humi : 22 / 37

Tested by: SIN S U

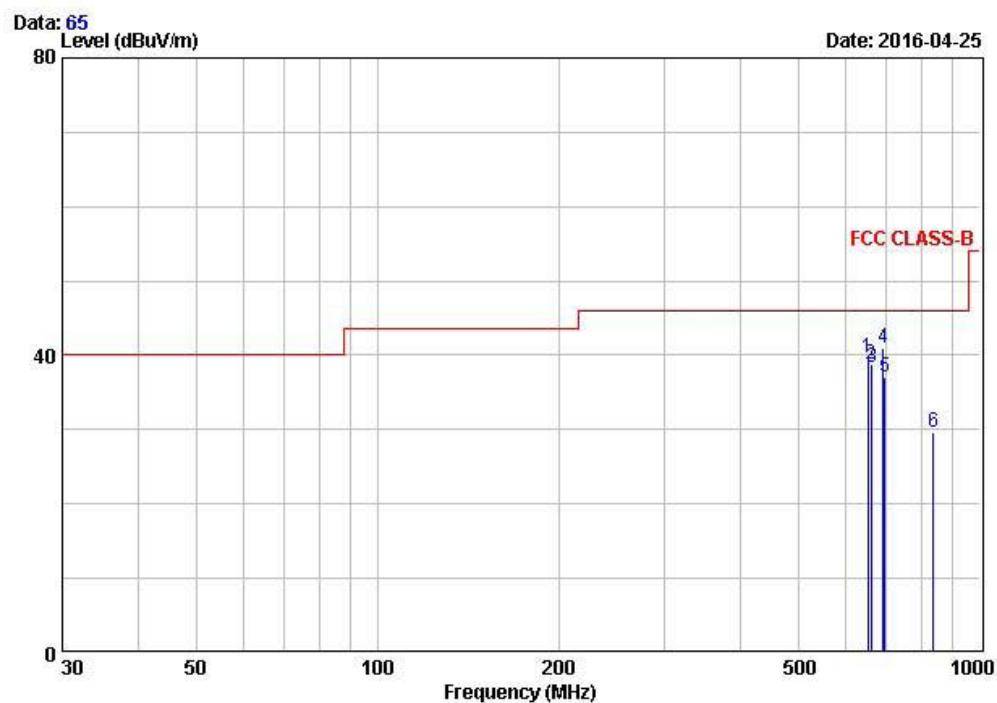

| Freq<br>MHz | Reading<br>dBuV/m | C.F<br>dB/m | Result<br>dBuV/m | Limit<br>QP     |          | Margin<br>dB | Height<br>cm | Angle<br>deg | Polarity |
|-------------|-------------------|-------------|------------------|-----------------|----------|--------------|--------------|--------------|----------|
|             |                   |             |                  | Limit<br>dBuV/m | QP<br>dB |              |              |              |          |
| 1 651.50    | 43.20             | -3.51       | 39.69            | 46.00           | 6.31     | 267          | 77           | HORIZONTAL   |          |
| 2 659.20    | 42.10             | -3.31       | 38.79            | 46.00           | 7.21     | 150          | 200          | HORIZONTAL   |          |
| 3 662.80    | 41.60             | -3.21       | 38.39            | 46.00           | 7.61     | 400          | 101          | HORIZONTAL   |          |
| 4 691.60    | 43.50             | -2.49       | 41.01            | 46.00           | 4.99     | 326          | 335          | HORIZONTAL   |          |
| 5 696.30    | 39.50             | -2.37       | 37.13            | 46.00           | 8.87     | 300          | 287          | HORIZONTAL   |          |
| 6 835.90    | 28.50             | 1.11        | 29.61            | 46.00           | 16.39    | 100          | 170          | HORIZONTAL   |          |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Wireless(HIGH) mode


4, Songjuro236Beon-gil, Yangji-myeon,  
Cheoin-gu, Youngin-si, Gyeonggi-do,  
449-822 Korea  
Tel :+82-31-3236008,9  
Fax :+82-31-3236010

EUT/Model No.: RX01-CC85A

TEST MODE: Wireless(HIGH) mode

Temp Humi : 22 / 37

Tested by: SIN S U

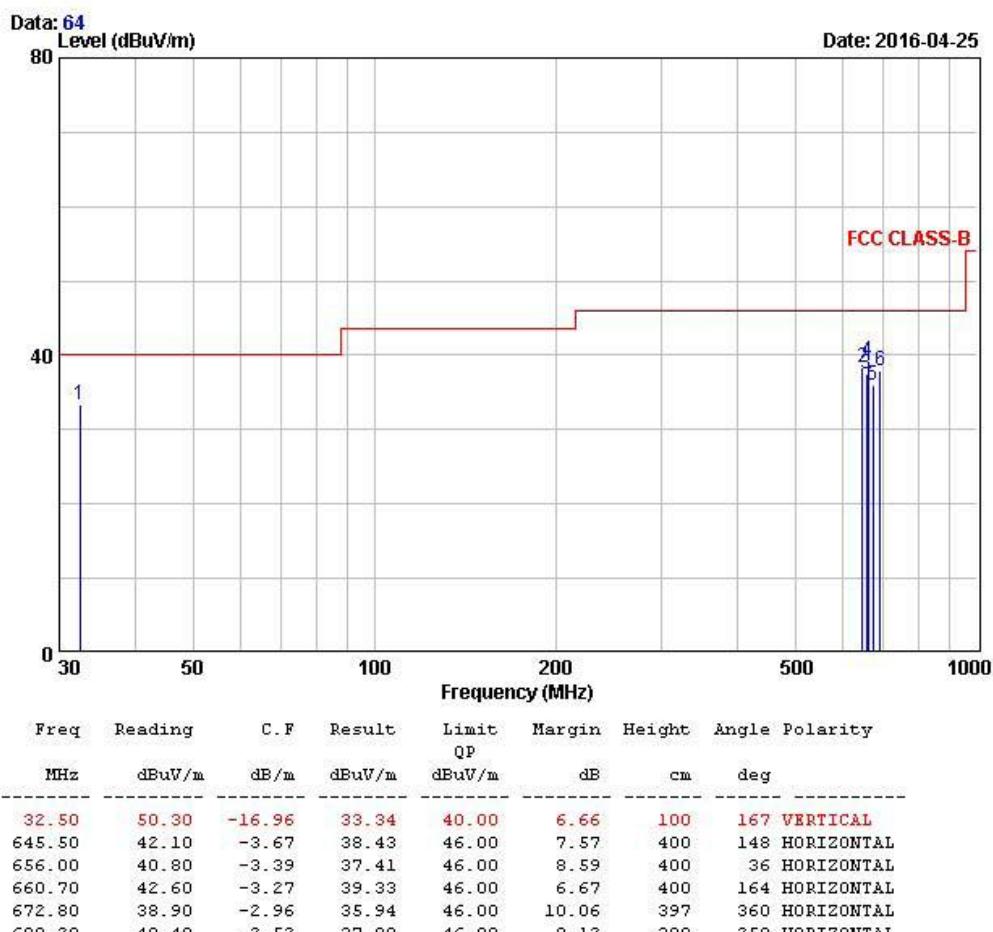


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission(Above 1 GHz) – Wireless(LOW) mode

EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A Test Mode: Wireless(LOW) mode  
Tested by : SIN S U Temp/Humi: 22 / 41

Data: 55 File: D:\LTA\_e3\le3\_backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (55)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

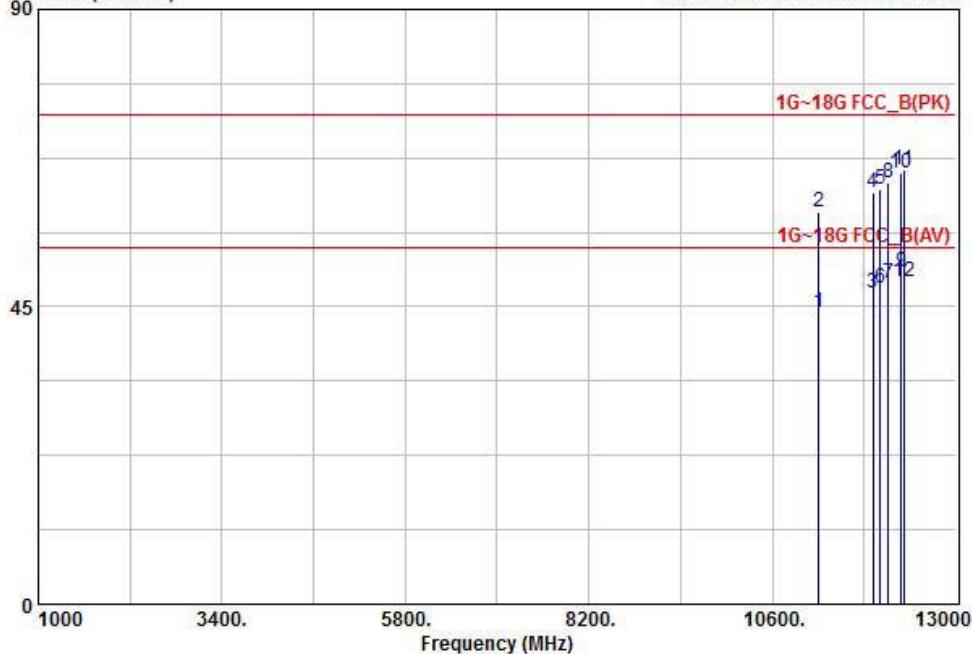

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   |
|-------------|-----------------|-----------|------------------------|-----------------|--------------|------------|
|             |                 |           |                        |                 |              | VERTICAL   |
| 111204.40   | 10.10           | 34.08     | 44.18                  | 54.00           | 9.82         | VERTICAL   |
| 211204.40   | 25.20           | 34.08     | 59.28                  | 74.00           | 14.72        | VERTICAL   |
| 311910.10   | 10.20           | 36.99     | 47.19                  | 54.00           | 6.81         | HORIZONTAL |
| 411910.10   | 25.20           | 36.99     | 62.19                  | 74.00           | 11.81        | HORIZONTAL |
| 512008.00   | 25.30           | 37.56     | 62.86                  | 74.00           | 11.14        | VERTICAL   |
| 612008.00   | 10.30           | 37.56     | 47.86                  | 54.00           | 6.14         | VERTICAL   |
| 712117.40   | 10.20           | 38.44     | 48.64                  | 54.00           | 5.36         | HORIZONTAL |
| 812117.40   | 25.30           | 38.44     | 63.74                  | 74.00           | 10.26        | HORIZONTAL |
| 912285.90   | 10.40           | 39.81     | 50.21                  | 54.00           | 3.79         | HORIZONTAL |
| 1012285.90  | 25.50           | 39.81     | 65.31                  | 74.00           | 8.69         | HORIZONTAL |
| 1112322.50  | 25.50           | 40.10     | 65.60                  | 74.00           | 8.40         | HORIZONTAL |
| 1212322.50  | 8.58            | 40.10     | 48.69                  | 54.00           | 5.31         | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless (LOW) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 107 File: D:\LTA\_e3\Backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (109)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

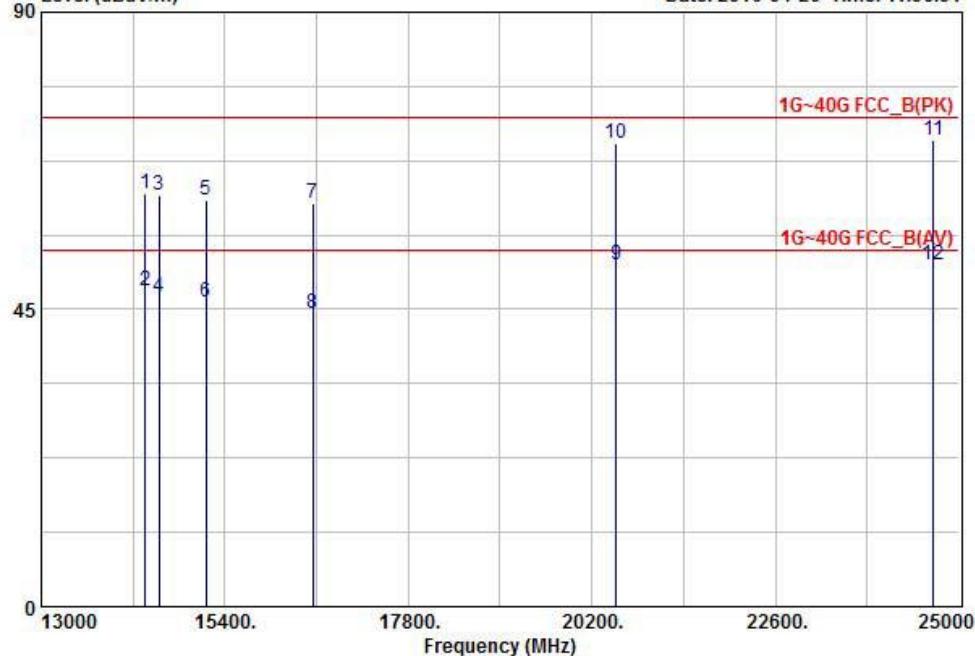

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit        | Margin<br>dB | Polarity   |
|-------------|-----------------|-----------|------------------------|--------------|--------------|------------|
|             |                 |           |                        | PK<br>dBuV/m |              |            |
| 114358.60   | 19.80           | 42.74     | 62.54                  | 74.00        | 11.46        | HORIZONTAL |
| 214358.60   | 5.00            | 42.74     | 47.74                  | 54.00        | 6.26         | HORIZONTAL |
| 314543.80   | 20.30           | 42.05     | 62.35                  | 74.00        | 11.65        | HORIZONTAL |
| 414543.80   | 4.90            | 42.05     | 46.95                  | 54.00        | 7.05         | HORIZONTAL |
| 515154.00   | 20.60           | 40.86     | 61.46                  | 74.00        | 12.54        | HORIZONTAL |
| 615154.00   | 5.20            | 40.86     | 46.06                  | 54.00        | 7.94         | HORIZONTAL |
| 716546.00   | 20.30           | 40.79     | 61.09                  | 74.00        | 12.91        | HORIZONTAL |
| 816546.00   | 3.60            | 40.79     | 44.39                  | 54.00        | 9.61         | HORIZONTAL |
| 920516.90   | 0.10            | 51.64     | 51.74                  | 54.00        | 2.26         | VERTICAL   |
| 1020516.90  | 18.50           | 51.64     | 70.14                  | 74.00        | 3.86         | VERTICAL   |
| 1124665.40  | 19.70           | 50.86     | 70.56                  | 74.00        | 3.44         | HORIZONTAL |
| 1224665.40  | 1.00            | 50.86     | 51.86                  | 54.00        | 2.14         | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal

Wireless(MID) mode

EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless(MID) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 54 File: D:\LTA\_e3\le3\_backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (55)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

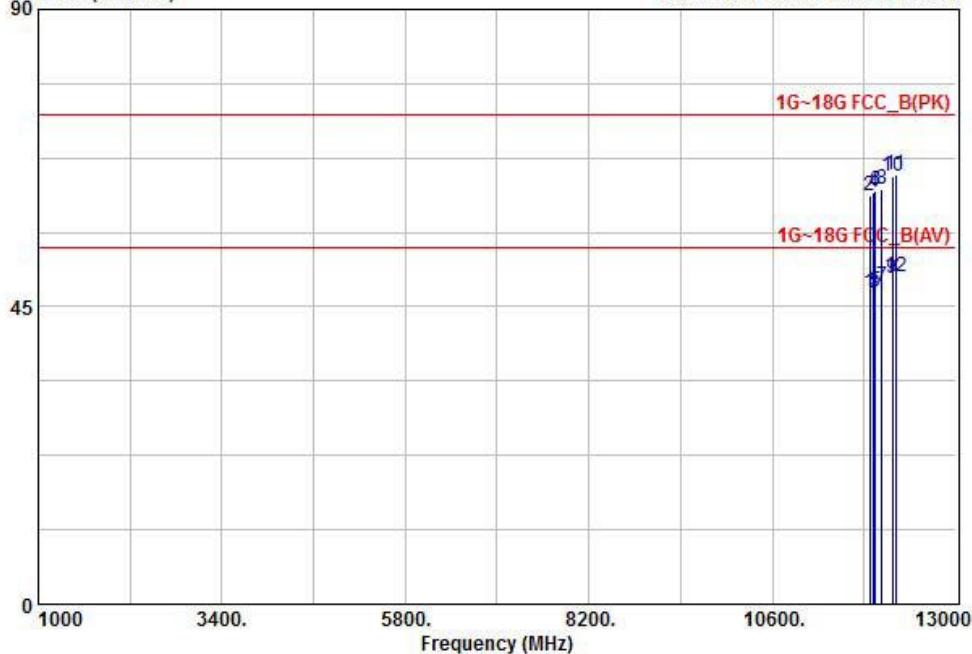

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   |
|-------------|-----------------|-----------|------------------------|-----------------|--------------|------------|
|             |                 |           |                        |                 |              | HORIZONTAL |
| 111871.20   | 10.20           | 36.78     | 46.98                  | 54.00           | 7.02         | HORIZONTAL |
| 211871.20   | 24.90           | 36.78     | 61.68                  | 74.00           | 12.32        | HORIZONTAL |
| 311923.20   | 10.10           | 37.07     | 47.17                  | 54.00           | 6.83         | VERTICAL   |
| 411923.20   | 25.10           | 37.07     | 62.17                  | 74.00           | 11.83        | VERTICAL   |
| 511948.80   | 10.20           | 37.21     | 47.41                  | 54.00           | 6.59         | VERTICAL   |
| 611948.80   | 25.30           | 37.21     | 62.51                  | 74.00           | 11.49        | VERTICAL   |
| 712032.50   | 10.30           | 37.76     | 48.06                  | 54.00           | 5.94         | HORIZONTAL |
| 812032.50   | 25.10           | 37.76     | 62.86                  | 74.00           | 11.14        | HORIZONTAL |
| 912166.00   | 10.50           | 38.84     | 49.34                  | 54.00           | 4.66         | HORIZONTAL |
| 1012166.00  | 25.80           | 38.84     | 64.64                  | 74.00           | 9.36         | HORIZONTAL |
| 1112208.20  | 25.70           | 39.18     | 64.88                  | 74.00           | 9.12         | HORIZONTAL |
| 1212208.20  | 10.40           | 39.18     | 49.58                  | 54.00           | 4.42         | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless (MID) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 108 File: D:\LTA\_e3\Backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (109)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

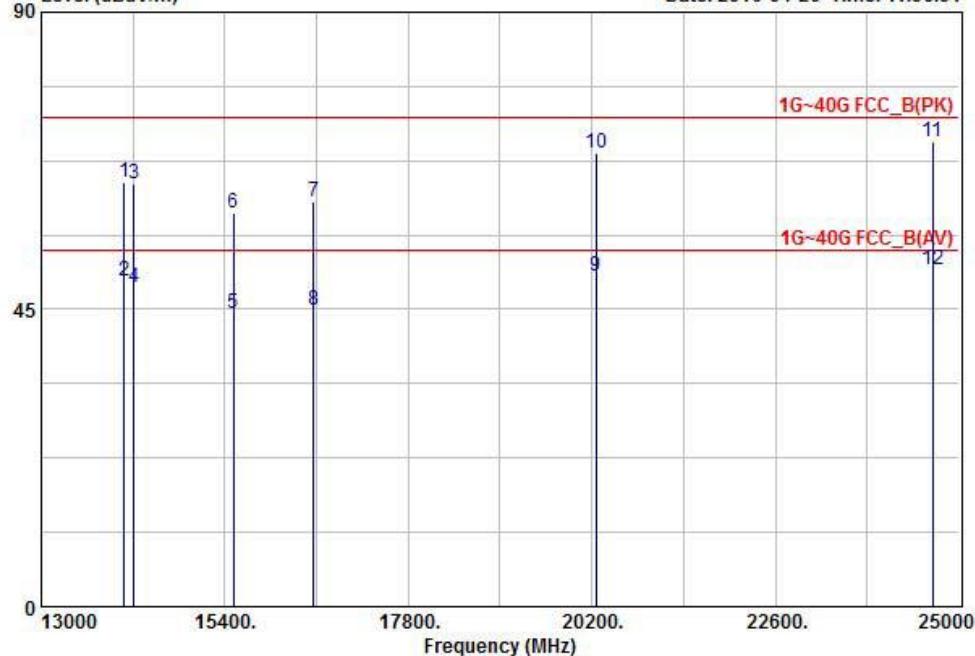

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   |
|-------------|-----------------|-----------|------------------------|-----------------|--------------|------------|
|             |                 |           |                        |                 |              | HORIZONTAL |
| 114084.40   | 20.20           | 44.01     | 64.21                  | 74.00           | 9.79         | HORIZONTAL |
| 214084.40   | 5.30            | 44.01     | 49.31                  | 54.00           | 4.69         | HORIZONTAL |
| 314213.70   | 20.50           | 43.41     | 63.91                  | 74.00           | 10.09        | HORIZONTAL |
| 414213.70   | 4.80            | 43.41     | 48.21                  | 54.00           | 5.79         | HORIZONTAL |
| 515513.90   | 5.40            | 39.09     | 44.49                  | 54.00           | 9.51         | HORIZONTAL |
| 615513.90   | 20.40           | 39.09     | 59.49                  | 74.00           | 14.51        | HORIZONTAL |
| 716558.00   | 20.40           | 40.84     | 61.24                  | 74.00           | 12.76        | HORIZONTAL |
| 816558.00   | 4.10            | 40.84     | 44.94                  | 54.00           | 9.06         | HORIZONTAL |
| 920254.30   | 0.12            | 49.89     | 50.01                  | 54.00           | 3.99         | VERTICAL   |
| 1020254.30  | 18.70           | 49.89     | 68.59                  | 74.00           | 5.41         | VERTICAL   |
| 1124660.40  | 19.50           | 50.86     | 70.36                  | 74.00           | 3.64         | HORIZONTAL |
| 1224660.40  | 0.20            | 50.86     | 51.06                  | 54.00           | 2.94         | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal


Wireless(HIGH) mode

EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A  
-----  
Tested by : SIN S U  
-----

Test Mode: Wireless(HIGH) mode  
-----  
Temp/Humi: 22 / 41  
-----

Data: 53 File: D:\LTA\_e3\le3\_backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (53)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

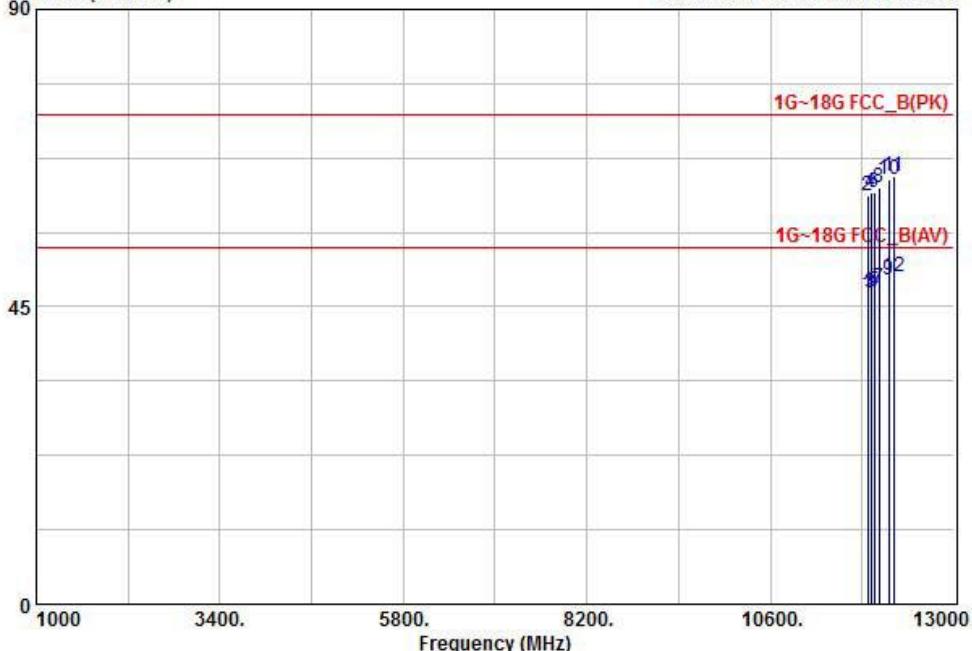

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity     |
|-------------|-----------------|-----------|------------------------|-----------------|--------------|--------------|
|             |                 |           |                        |                 |              | Polarization |
| 111873.50   | 10.10           | 36.79     | 46.89                  | 54.00           | 7.11         | HORIZONTAL   |
| 211873.50   | 25.00           | 36.79     | 61.79                  | 74.00           | 12.21        | HORIZONTAL   |
| 311911.70   | 10.10           | 37.00     | 47.10                  | 54.00           | 6.90         | VERTICAL     |
| 411911.70   | 25.20           | 37.00     | 62.20                  | 74.00           | 11.80        | VERTICAL     |
| 511952.80   | 10.20           | 37.23     | 47.43                  | 54.00           | 6.57         | VERTICAL     |
| 611952.80   | 25.10           | 37.23     | 62.33                  | 74.00           | 11.67        | VERTICAL     |
| 712026.00   | 10.10           | 37.70     | 47.80                  | 54.00           | 6.20         | HORIZONTAL   |
| 812026.00   | 25.20           | 37.70     | 62.90                  | 74.00           | 11.10        | HORIZONTAL   |
| 912152.50   | 10.40           | 38.73     | 49.13                  | 54.00           | 4.87         | HORIZONTAL   |
| 1012152.50  | 25.60           | 38.73     | 64.33                  | 74.00           | 9.67         | HORIZONTAL   |
| 1112215.00  | 25.50           | 39.23     | 64.73                  | 74.00           | 9.27         | HORIZONTAL   |
| 1212215.00  | 10.30           | 39.23     | 49.53                  | 54.00           | 4.47         | HORIZONTAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI I Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless (HIGH) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 109 File: D:\LTA\_e3\Backup\1GHz 이상\2016\CH1\_ABOVE 1GHz\_1604-1.EMI (109)  
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

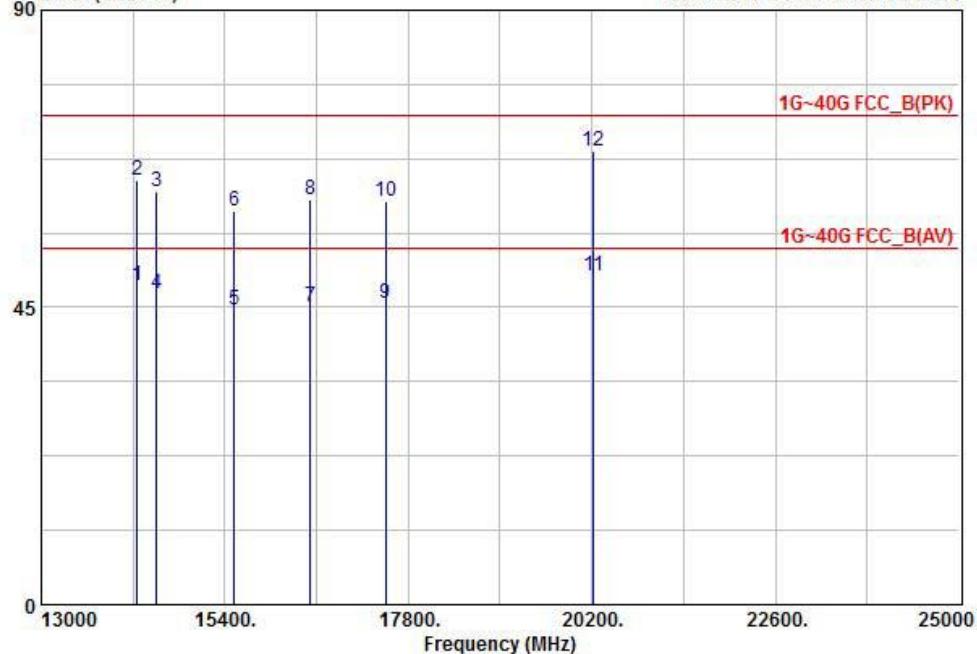

| Freq<br>MHz | Reading<br>dBuV | C.F<br>dB | Result<br>PK<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   |
|-------------|-----------------|-----------|------------------------|-----------------|--------------|------------|
|             |                 |           |                        |                 |              | PK         |
| 114254.00   | 5.20            | 43.23     | 48.43                  | 54.00           | 5.57         | HORIZONTAL |
| 214254.00   | 21.00           | 43.23     | 64.23                  | 74.00           | 9.77         | HORIZONTAL |
| 314513.00   | 20.40           | 42.08     | 62.48                  | 74.00           | 11.52        | HORIZONTAL |
| 414513.00   | 5.10            | 42.08     | 47.18                  | 54.00           | 6.82         | HORIZONTAL |
| 515521.30   | 5.50            | 39.11     | 44.61                  | 54.00           | 9.39         | HORIZONTAL |
| 615521.30   | 20.60           | 39.11     | 59.71                  | 74.00           | 14.29        | HORIZONTAL |
| 716521.80   | 4.40            | 40.68     | 45.08                  | 54.00           | 8.92         | HORIZONTAL |
| 816521.80   | 20.60           | 40.68     | 61.28                  | 74.00           | 12.72        | HORIZONTAL |
| 917503.50   | 1.48            | 44.12     | 45.60                  | 54.00           | 8.40         | HORIZONTAL |
| 1017503.50  | 16.98           | 44.12     | 61.10                  | 74.00           | 12.90        | HORIZONTAL |
| 1120221.80  | 0.20            | 49.65     | 49.85                  | 54.00           | 4.15         | VERTICAL   |
| 1220221.80  | 18.90           | 49.65     | 68.55                  | 74.00           | 5.45         | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal

### 3.3.9 AC Conducted Emissions

#### Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2014.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: **Complies**

- Refer to the next page.
- No other emissions were detected at a level greater than 20 dB below limit
- It gave the worse case emissions

#### Minimum Standard: FCC Part 15.207(a)/EN 55022

| Frequency Range<br>(MHz) | Conducted Limit (dB $\mu$ V) |            |
|--------------------------|------------------------------|------------|
|                          | Quasi-Peak                   | Average    |
| 0.15 ~ 0.5               | 66 to 56 *                   | 56 to 46 * |
| 0.5 ~ 5                  | 56                           | 46         |
| 5 ~ 30                   | 60                           | 50         |


\* Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Conducted Emissions - Wireless(LOW) mode + LINE

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : LINE  
Test Mode : Wireless(LOW) mode Test Power : 120 / 60  
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1565 File: D:\Conducted Data\2015\2016\1565 (1565)

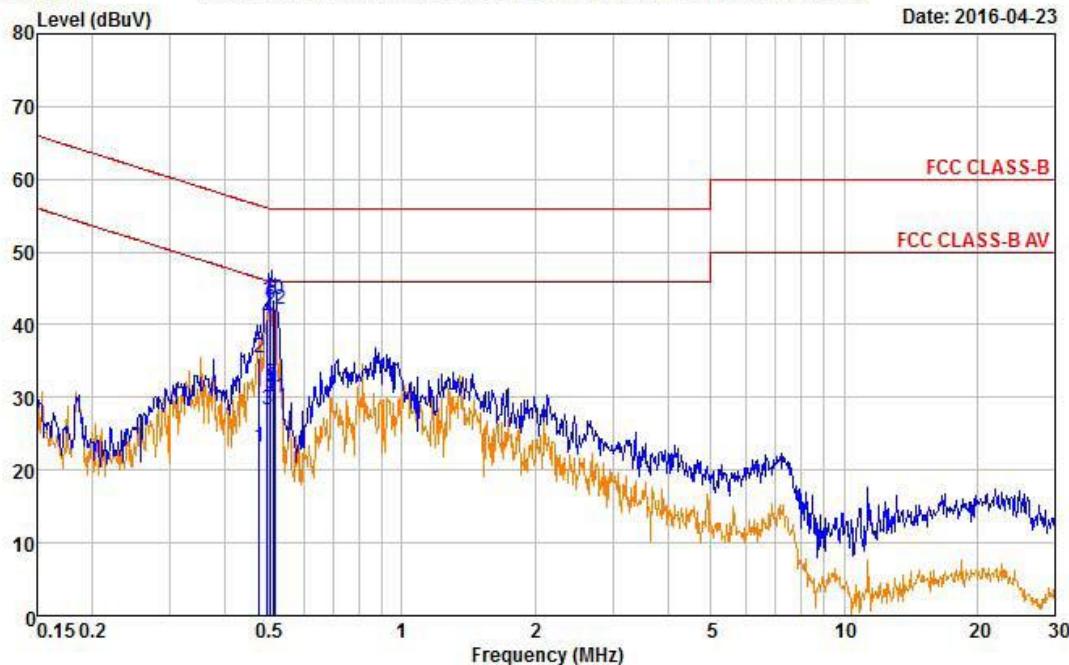

| Freq         | RD<br>QP     | RD<br>AV     | C.F          | Result<br>QP | Result<br>AV | Limit<br>QP  | Limit<br>AV  | Margin<br>QP | Margin<br>AV |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| MHz          | dBuV         | dBuV         | dB           | dBuV         | dBuV         | dBuV         | dBuV         | dB           | dB           |
| 0.476        | 25.30        | 13.10        | 10.09        | 35.39        | 23.19        | 56.41        | 46.41        | 21.02        | 23.22        |
| 0.497        | 30.66        | 18.33        | 10.08        | 40.74        | 28.41        | 56.05        | 46.05        | 15.31        | 17.64        |
| 0.505        | 32.80        | 20.42        | 10.09        | 42.89        | 30.51        | 56.00        | 46.00        | 13.11        | 15.49        |
| <b>0.512</b> | <b>33.42</b> | <b>21.77</b> | <b>10.09</b> | <b>43.51</b> | <b>31.86</b> | <b>56.00</b> | <b>46.00</b> | <b>12.49</b> | <b>14.14</b> |
| 0.513        | 33.30        | 21.30        | 10.10        | 43.40        | 31.40        | 56.00        | 46.00        | 12.60        | 14.60        |
| 0.519        | 31.95        | 19.88        | 10.10        | 42.05        | 29.98        | 56.00        | 46.00        | 13.95        | 16.02        |


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(MID) mode + LINE

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : LINE  
Test Mode : Wireless(MID) mode Test Power : 120 / 60  
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1553 File: D:\Conducted Data\2015\2016\LTA\_Conduction\_2016\_04.EM6 (1553)

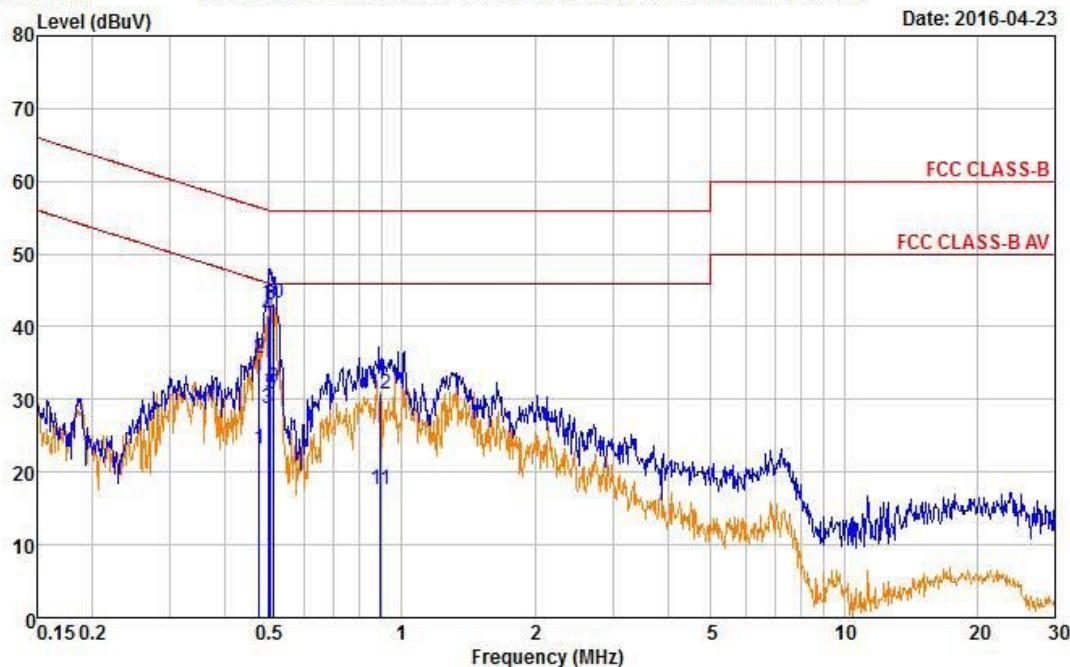

| Freq<br>MHz | RD<br>QP |       | RD<br>AV |       | C.F<br>dB | Result<br>QP<br>dBuV | Result<br>AV<br>dBuV | Limit<br>QP<br>dBuV |       | Limit<br>AV<br>dBuV |       | Margin<br>QP<br>dB | Margin<br>AV<br>dB |
|-------------|----------|-------|----------|-------|-----------|----------------------|----------------------|---------------------|-------|---------------------|-------|--------------------|--------------------|
|             | dBuV     | dBuV  | dBuV     | dBuV  |           |                      |                      | dBuV                | dBuV  | dBuV                | dBuV  |                    |                    |
| 0.476       | 25.47    | 13.02 | 10.09    | 35.56 | 23.11     | 56.41                | 46.41                | 20.85               | 23.30 | 46.00               | 46.00 | 12.88              | 15.28              |
| 0.499       | 31.42    | 18.73 | 10.08    | 41.50 | 28.81     | 56.02                | 46.02                | 14.52               | 17.21 | 56.00               | 56.00 | 12.92              | 15.16              |
| 0.507       | 33.03    | 20.63 | 10.09    | 43.12 | 30.72     | 56.00                | 46.00                | 12.85               | 23.30 | 56.00               | 56.00 | 12.67              | 14.27              |
| 0.507       | 32.99    | 20.75 | 10.09    | 43.08 | 30.84     | 56.00                | 46.00                | 12.85               | 23.30 | 56.00               | 56.00 | 12.67              | 14.27              |
| 0.514       | 33.23    | 21.63 | 10.10    | 43.33 | 31.73     | 56.00                | 46.00                | 12.67               | 14.27 | 56.00               | 56.00 | 12.67              | 14.27              |
| 0.897       | 20.49    | 7.34  | 10.36    | 30.85 | 17.70     | 56.00                | 46.00                | 25.15               | 28.30 | 56.00               | 56.00 | 25.15              | 28.30              |


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(HIGH) mode + LINE

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : LINE  
Test Mode : Wireless(HIGH) mode Test Power : 120 / 60  
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1549 File: D:\Conducted Data\2015\2016\LTA\_Conduction\_2016\_04.EM6 (1549)

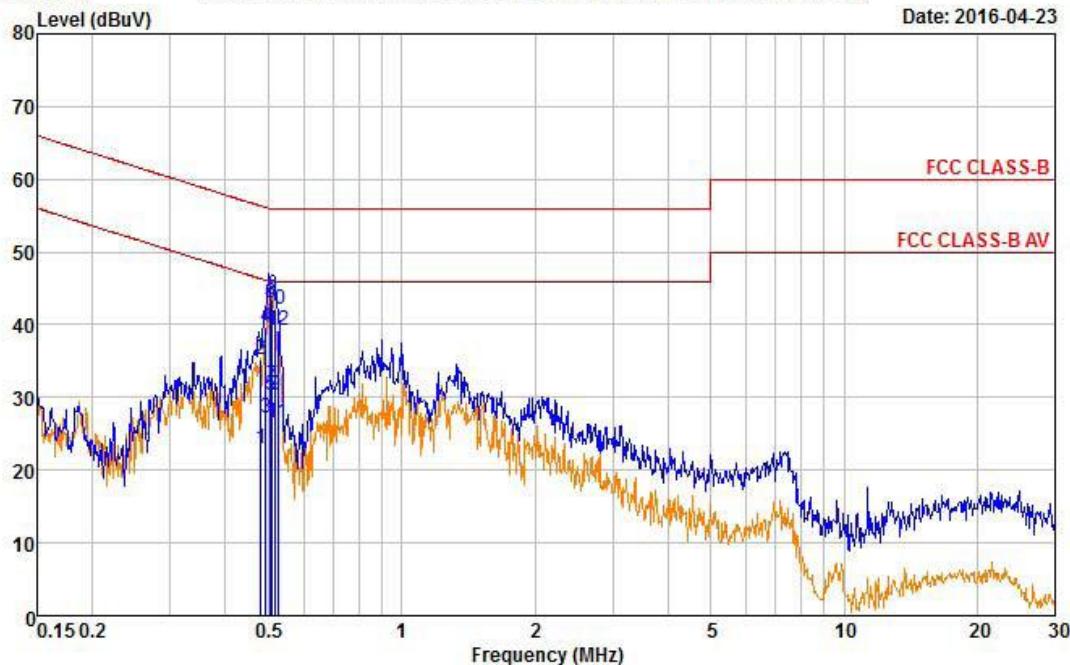

| Freq<br>MHz | RD<br>QP |       | RD<br>AV |       | C.F<br>dB | Result<br>QP<br>dBuV | Result<br>AV<br>dBuV | Limit<br>QP<br>dBuV |       | Limit<br>AV<br>dBuV |       | Margin<br>QP<br>dB | Margin<br>AV<br>dB |
|-------------|----------|-------|----------|-------|-----------|----------------------|----------------------|---------------------|-------|---------------------|-------|--------------------|--------------------|
|             | dBuV     | dBuV  | dBuV     | dBuV  |           |                      |                      | dBuV                | dBuV  | dBuV                | dBuV  |                    |                    |
| 0.480       | 25.16    | 12.96 | 10.08    | 35.24 | 23.04     | 56.34                | 46.34                | 21.10               | 23.30 | 56.00               | 46.00 | 13.89              | 15.66              |
| 0.494       | 29.59    | 17.09 | 10.08    | 39.67 | 27.17     | 56.10                | 46.10                | 16.43               | 18.93 | 56.00               | 46.00 | 12.97              | 15.58              |
| 0.506       | 32.94    | 20.33 | 10.09    | 43.03 | 30.42     | 56.00                | 46.00                | 12.58               | 14.35 | 56.00               | 46.00 | 13.89              | 15.66              |
| 0.510       | 33.33    | 21.56 | 10.09    | 43.42 | 31.65     | 56.00                | 46.00                | 12.58               | 14.35 | 56.00               | 46.00 | 13.89              | 15.66              |
| 0.519       | 32.01    | 20.24 | 10.10    | 42.11 | 30.34     | 56.00                | 46.00                | 13.89               | 15.66 | 56.00               | 46.00 | 16.71              | 19.40              |
| 0.525       | 29.18    | 16.49 | 10.11    | 39.29 | 26.60     | 56.00                | 46.00                | 16.71               | 19.40 | 56.00               | 46.00 | 16.71              | 19.40              |


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Wireless(LOW) mode + NEUTRAL

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : NEUTRAL  
Test Mode : Wireless(LOW) mode Test Power : 120 / 60  
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1561 File: D:\Conducted Data\2015\2016\LTA\_Conduction\_2016\_04.EM6 (1561)

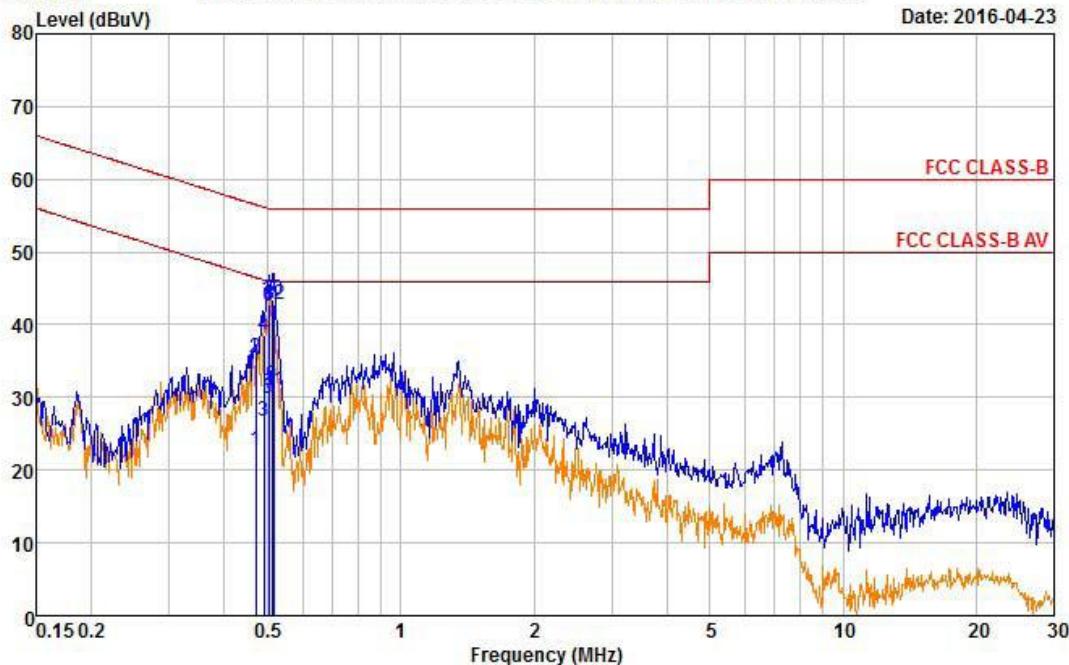

| Freq<br>MHz | RD<br>QP |       | RD<br>AV |       | C.F<br>dB | Result<br>QP<br>dBuV | Result<br>AV<br>dBuV | Limit<br>QP<br>dBuV | Limit<br>AV<br>dBuV | Margin<br>QP<br>dB | Margin<br>AV<br>dB |
|-------------|----------|-------|----------|-------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|
|             | dBuV     | dBuV  | dBuV     | dBuV  |           |                      |                      |                     |                     |                    |                    |
| 0.471       | 25.41    | 12.62 | 10.01    | 35.42 | 22.63     | 56.49                | 46.49                | 21.07               | 23.86               |                    |                    |
| 0.491       | 28.54    | 16.65 | 10.00    | 38.54 | 26.65     | 56.15                | 46.15                | 17.61               | 19.50               |                    |                    |
| 0.504       | 32.62    | 19.83 | 10.00    | 42.62 | 29.83     | 56.00                | 46.00                | 13.38               | 16.17               |                    |                    |
| 0.506       | 32.69    | 20.55 | 10.01    | 42.70 | 30.56     | 56.00                | 46.00                | 13.30               | 15.44               |                    |                    |
| 0.512       | 33.38    | 21.59 | 10.01    | 43.39 | 31.60     | 56.00                | 46.00                | 12.61               | 14.40               |                    |                    |
| 0.517       | 32.67    | 20.90 | 10.02    | 42.69 | 30.92     | 56.00                | 46.00                | 13.31               | 15.08               |                    |                    |


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(MID) mode + NEUTRAL

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : NEUTRAL  
 Test Mode : Wireless(MID) mode Test Power : 120 / 60  
 Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1557 File: D:\Conducted Data\2015\2016\lta\_Conduction\_2016\_04.EM6 (1557)

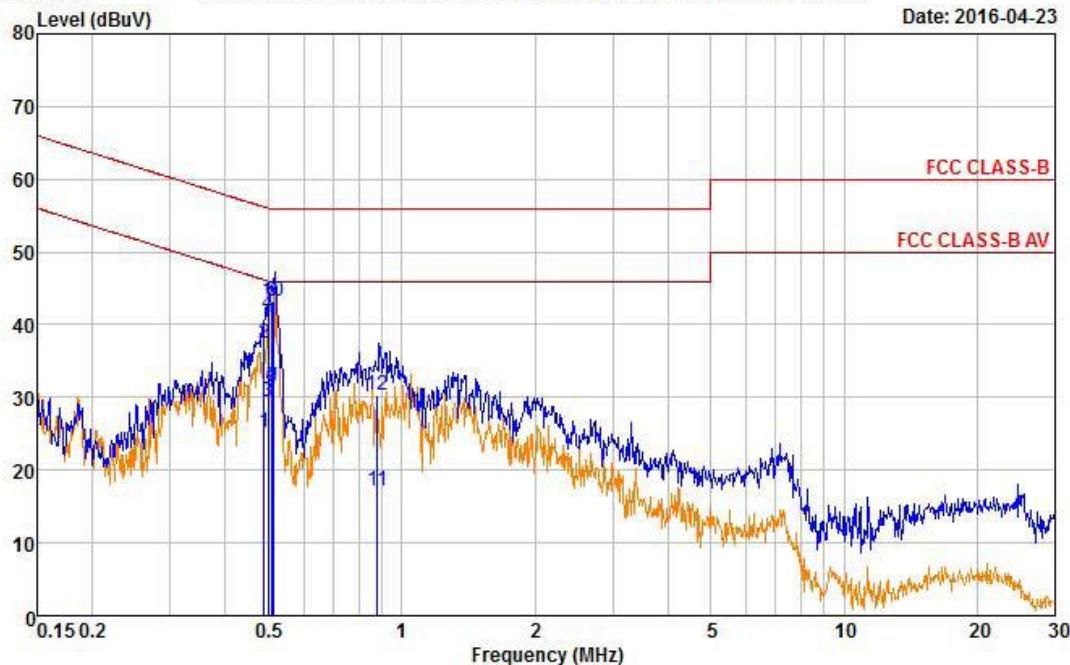


| Freq<br>MHz | RD<br>QP | RD<br>AV | C.F   | Result<br>QP | Result<br>AV | Limit<br>QP | Limit<br>AV | Margin<br>QP | Margin<br>AV |
|-------------|----------|----------|-------|--------------|--------------|-------------|-------------|--------------|--------------|
|             | dBuV     | dBuV     | dB    | dBuV         | dBuV         | dBuV        | dBuV        | dB           | dB           |
| 0.488       | 27.45    | 15.25    | 10.00 | 37.45        | 25.25        | 56.19       | 46.19       | 18.74        | 20.94        |
| 0.499       | 31.35    | 19.34    | 10.00 | 41.35        | 29.34        | 56.02       | 46.02       | 14.67        | 16.68        |
| 0.507       | 33.14    | 21.02    | 10.01 | 43.15        | 31.03        | 56.00       | 46.00       | 12.85        | 14.97        |
| 0.511       | 33.20    | 21.41    | 10.01 | 43.21        | 31.42        | 56.00       | 46.00       | 12.79        | 14.58        |
| 0.512       | 33.23    | 21.43    | 10.01 | 43.24        | 31.44        | 56.00       | 46.00       | 12.76        | 14.56        |
| 0.882       | 20.14    | 6.85     | 10.27 | 30.41        | 17.12        | 56.00       | 46.00       | 25.59        | 28.88        |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(HIGH) mode + NEUTRAL

4, Songjuro 236 Beon-gil, Yangji-myeon  
Cheoin-gu, Youngin-si, Gyeonggi-do  
449-822 Korea  
Tel:+82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : NEUTRAL  
 Test Mode : Wireless(HIGH) mode Test Power : 120 / 60  
 Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

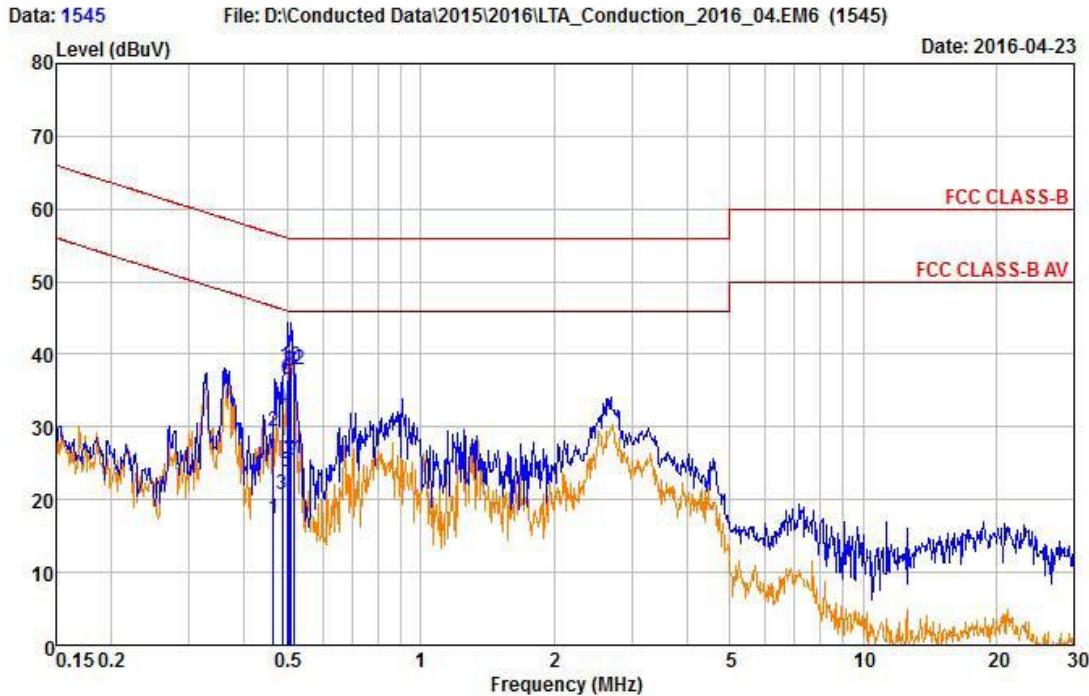

| Freq<br>MHz | RD<br>QP | RD<br>AV | C.F<br>dB | Result<br>QP | Result<br>AV | Limit<br>QP | Limit<br>AV | Margin<br>QP | Margin<br>AV |
|-------------|----------|----------|-----------|--------------|--------------|-------------|-------------|--------------|--------------|
|             | dBuV     | dBuV     | dB        | dBuV         | dBuV         | dBuV        | dBuV        | dB           | dB           |
| 0.466       | 19.36    | 7.43     | 10.01     | 29.37        | 17.44        | 56.59       | 46.59       | 27.22        | 29.15        |
| 0.487       | 22.53    | 10.71    | 10.00     | 32.53        | 20.71        | 56.21       | 46.21       | 23.68        | 25.50        |
| 0.498       | 26.51    | 13.91    | 10.00     | 36.51        | 23.91        | 56.03       | 46.03       | 19.52        | 22.12        |
| 0.506       | 27.75    | 15.40    | 10.01     | 37.76        | 25.41        | 56.00       | 46.00       | 18.24        | 20.59        |
| 0.509       | 28.29    | 15.41    | 10.01     | 38.30        | 25.42        | 56.00       | 46.00       | 17.70        | 20.58        |
| 0.516       | 27.93    | 15.53    | 10.02     | 37.95        | 25.55        | 56.00       | 46.00       | 18.05        | 20.45        |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

**APPENDIX**  
**TEST EQUIPMENT USED FOR TESTS**

|    | <b>Description</b>                   | <b>Model No.</b> | <b>Serial No.</b> | <b>Manufacturer</b>    | <b>Interval</b> | <b>Last Cal. Date</b> |
|----|--------------------------------------|------------------|-------------------|------------------------|-----------------|-----------------------|
| 1  | Signal Analyzer (9 kHz ~ 30 GHz)     | FSV30            | 100757            | R&S                    | 1 year          | 2016-03-22            |
| 2  | Signal Generator (~ 3.2 GHz)         | 8648C            | 3623A02597        | HP                     | 1 year          | 2016-03-21            |
| 3  | SYNTHESIZED CW GENERATOR             | 83711B           | US34490456        | HP                     | 1 year          | 2016-03-21            |
| 4  | Attenuator (3 dB)                    | 8491A            | 37822             | HP                     | 1 year          | 2015-09-14            |
| 5  | Attenuator (10 dB)                   | 8491A            | 63196             | HP                     | 1 year          | 2015-09-14            |
| 6  | Test Receiver (~ 30 MHz)             | ESHS10           | 828404/009        | R&S                    | 1 year          | 2016-03-21            |
| 7  | EMI Test Receiver (~ 7 GHz)          | ESCI7            | 100722            | R&S                    | 1 year          | 2015-09-15            |
| 8  | RF Amplifier (~ 1.3 GHz)             | 8447D OPT 010    | 2944A07684        | HP                     | 1 year          | 2015-09-14            |
| 9  | RF Amplifier (1 ~ 26.5 GHz)          | 8449B            | 3008A02126        | HP                     | 1 year          | 2016-03-22            |
| 10 | Horn Antenna (1 ~ 18 GHz)            | 3115             | 00114105          | ETS                    | 1 year          | 2016-04-21            |
| 11 | DRG Horn (Small)                     | 3116B            | 81109             | ETS-Lindgren           | 1 year          | 2016-02-26            |
| 12 | DRG Horn (Small)                     | 3116B            | 133350            | ETS-Lindgren           | 1 year          | 2016-02-26            |
| 13 | TRILOG Antenna                       | VULB 9160        | 9160-3237         | SCHWARZBECK            | 2 year          | 2015-04-21            |
| 14 | Temp.Humidity Data Logger            | SK-L200TH II A   | 00801             | SATO                   | 1 year          | 2015-05-04            |
| 15 | Splitter (SMA)                       | ZFSC-2-2500      | SF617800326       | Mini-Circuits          | -               | -                     |
| 16 | Power Divider                        | 11636A           | 06243             | HP                     | 1 year          | 2015-09-14            |
| 17 | DC Power Supply                      | 6674A            | 3637A01657        | Agilent                | -               | -                     |
| 18 | Frequency Counter                    | 5342A            | 2826A12411        | HP                     | 1 year          | 2016-03-21            |
| 19 | Power Meter                          | EPM-441A         | GB32481702        | HP                     | 1 year          | 2016-03-22            |
| 20 | Power Sensor                         | 8481A            | 3318A94972        | HP                     | 1 year          | 2016-01-05            |
| 21 | Audio Analyzer                       | 8903B            | 3729A18901        | HP                     | 1 year          | 2015-09-14            |
| 22 | Modulation Analyzer                  | 8901B            | 3749A05878        | HP                     | 1 year          | 2015-09-15            |
| 23 | TEMP & HUMIDITY Chamber              | YJ-500           | LTAS06041         | JinYoung Tech          | 1 year          | 2015-09-14            |
| 24 | Stop Watch                           | HS-3             | 812Q08R           | CASIO                  | 2 year          | 2016-03-22            |
| 25 | LISN                                 | KNW-407          | 8-1430-1          | Kyoritsu               | 1 year          | 2015-09-14            |
| 26 | Two-Lime V-Network                   | ESH3-Z5          | 893045/017        | R&S                    | 1 year          | 2016-03-21            |
| 27 | UNIVERSAL RADIO COMMUNICATION TESTER | CMU200           | 106243            | R&S                    | 1 year          | 2016-03-21            |
| 28 | Highpass Filter                      | WHKX1.5/15G-10SS | 74                | Wainwright Instruments | 1 year          | 2016-03-21            |
| 29 | Highpass Filter                      | WHKX3.0/18G-10SS | 118               | Wainwright Instruments | 1 year          | 2016-03-21            |
| 30 | Active Loop Antenna                  | FMZB1519         | 1519-031          | SCHWARZBECK            | 2 year          | 2016-01-12            |
| 31 | OSP120 BASE UNIT                     | OSP120           | 101230            | R&S                    | 1 year          | 2016-03-22            |
| 32 | Signal Generator(100 kHz ~ 40 GHz)   | SMB100A          | 177621            | R&S                    | 1 year          | 2016-03-22            |
| 33 | Signal Analyzer (10 Hz ~ 40 GHz)     | FSV40            | 101367            | R&S                    | 1 year          | 2016-03-22            |