



Report No.: 07249661
Model: CD4552B/07
Talk Mode

Report No.:07249661

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0700
---	---	----	-----	--------

12	9k	30M	EW1449
----	----	-----	--------

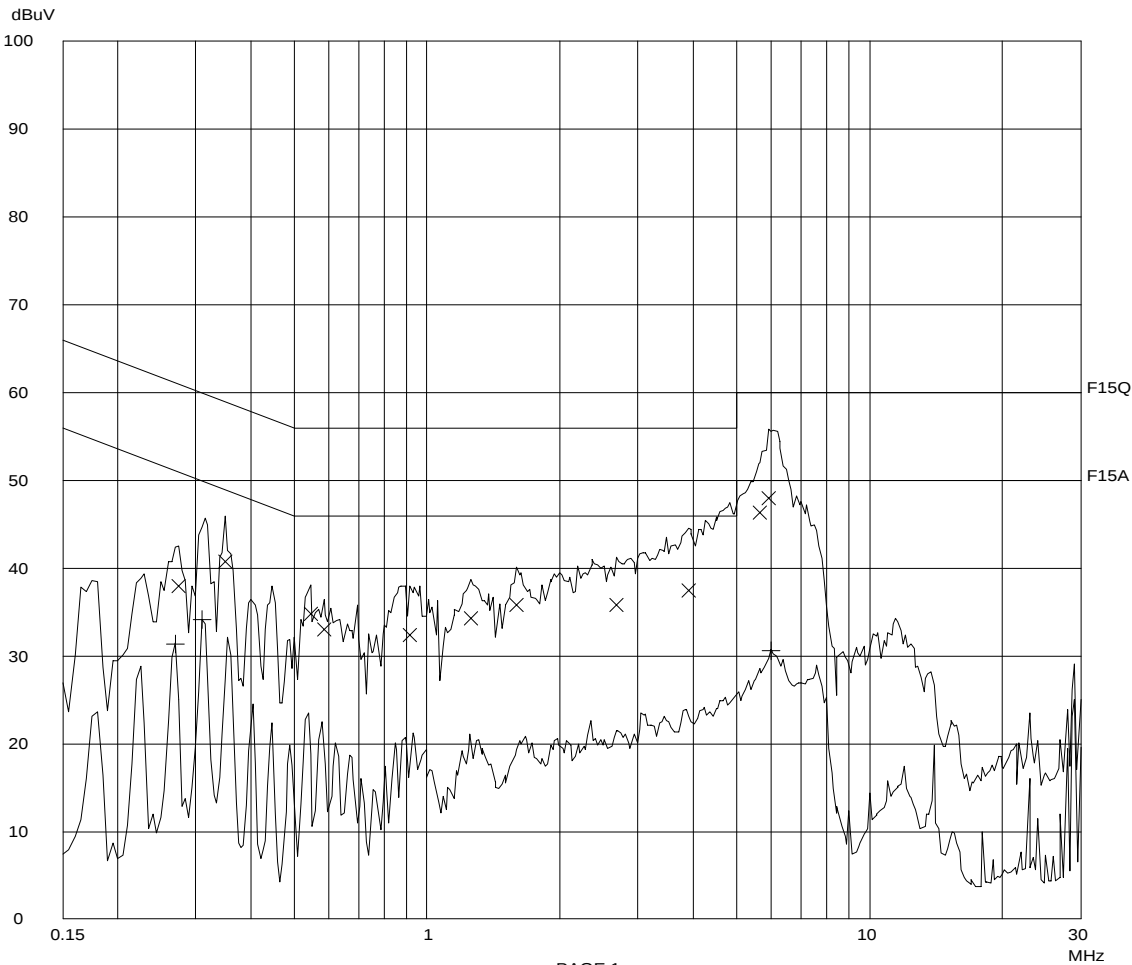

Ctrl No.:



Report No.: 07249661
Model: CD4552B/07
Talk Mode

Report No.:07249661

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.27500	37.9	61.0	-23.1
0.35000	40.7	59.0	-18.3
0.54500	34.7	56.0	-21.3
0.58500	33.0	56.0	-23.0
0.91500	32.3	56.0	-23.7
1.25500	34.3	56.0	-21.7
1.59000	35.8	56.0	-20.2
2.68000	35.8	56.0	-20.2
3.89500	37.4	56.0	-18.6
5.66500	46.3	60.0	-13.7
5.91000	47.9	60.0	-12.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.27000	31.3	51.1	-19.8
0.31000	34.1	50.0	-15.9
6.00500	30.5	50.0	-19.5

* limit exceeded

Ctrl No.:



Report No.: 07249661
Model: CD4552B/07
Talk with Charging Mode


Report No.:07249661

Scan Settings (1 Range)

Frequencies -----				Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
12	9k	30M	EW1449

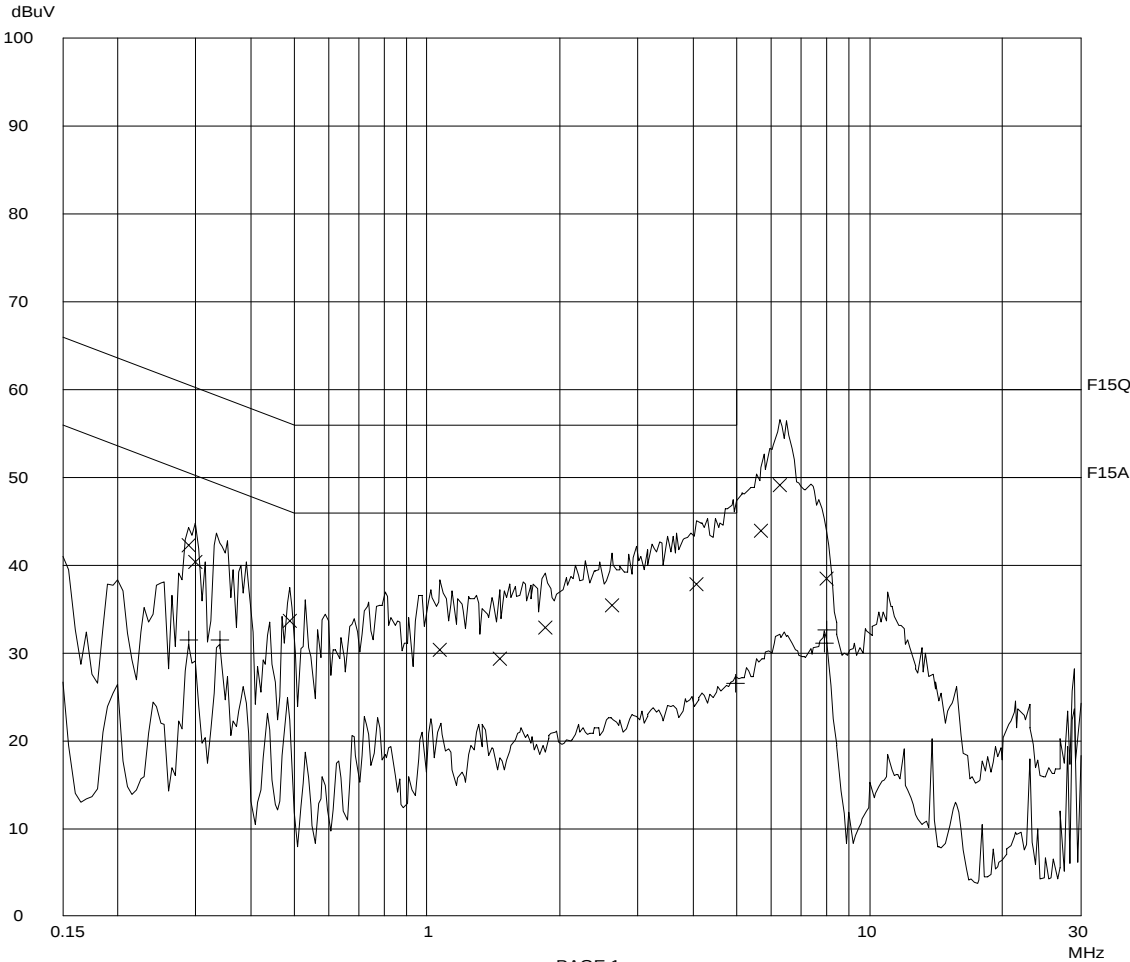

Ctrl No.:



Report No.: 07249661
Model: CD4552B/07
Talk with Charging Mode

Report No.:07249661

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.29000	42.3	60.6	-18.3
0.30000	40.3	60.2	-19.9
0.49000	33.6	56.2	-22.6
1.07000	30.3	56.0	-25.7
1.46000	29.3	56.0	-26.7
1.85500	32.8	56.0	-23.2
2.62000	35.3	56.0	-20.7
4.05500	37.8	56.0	-18.2
5.68500	43.9	60.0	-16.1
6.27000	49.0	60.0	-11.0
8.01500	38.4	60.0	-21.6

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.29000	31.4	50.6	-19.2
0.34000	31.4	49.2	-17.8
4.99000	26.6	46.0	-19.4
7.93000	31.0	50.0	-19.0
8.00000	32.6	50.0	-17.4

* limit exceeded

Ctrl No.:



Report No.: 07249661
Model: CD4502B/07
Talk Mode

Report No.:07249661

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
12	9k	30M	EW1449

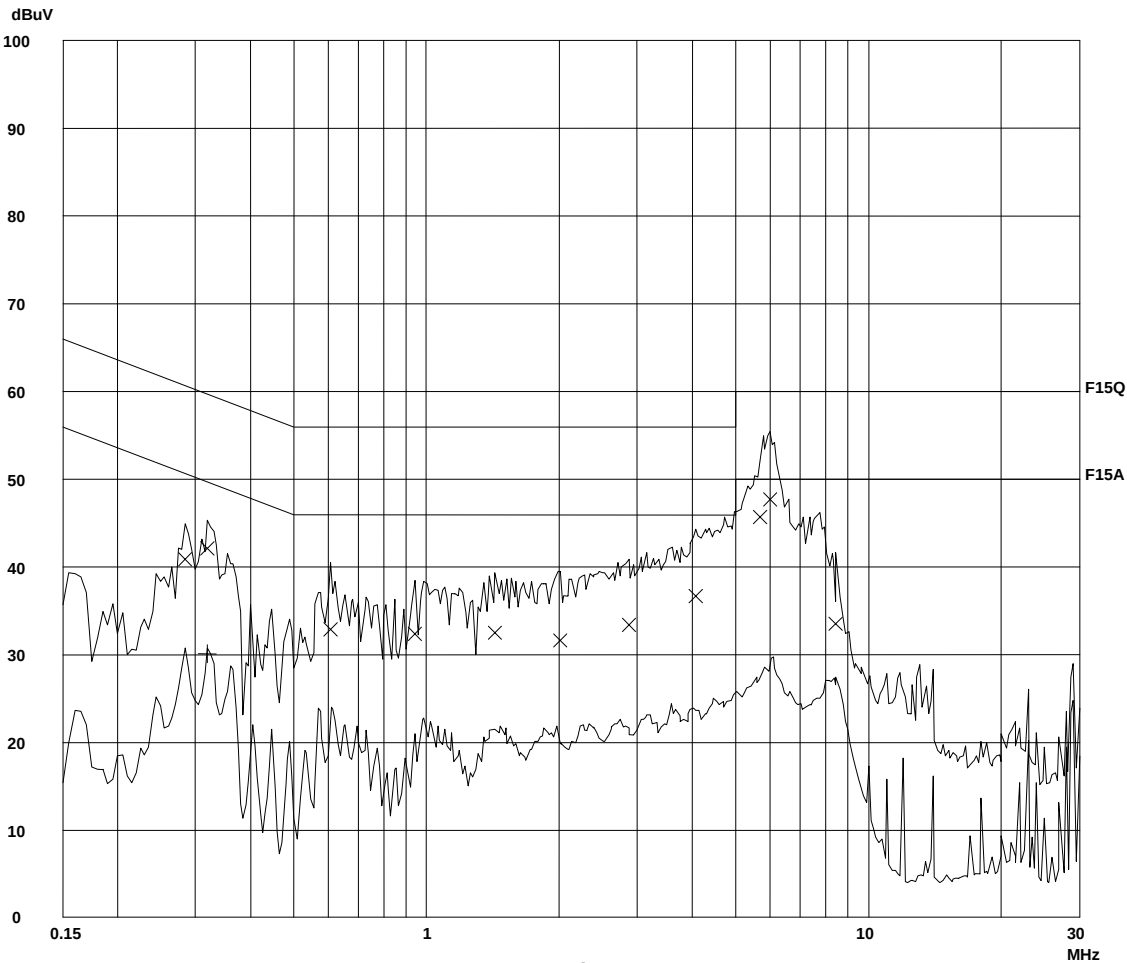



Report No.: 07249661
Model: CD4502B/07
Talk Mode

Report No.:07249661

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.28500	40.8	60.7	-19.9
0.32000	42.0	59.7	-17.7
0.60500	32.9	56.0	-23.1
0.94000	32.4	56.0	-23.6
1.43000	32.4	56.0	-23.6
2.00500	31.6	56.0	-24.4
2.87500	33.4	56.0	-22.6
4.06500	36.7	56.0	-19.3
5.70000	45.6	60.0	-14.4
5.99500	47.7	60.0	-12.3
8.44500	33.5	60.0	-26.5

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.32000	30.1	49.7	-19.6

* limit exceeded

Ctrl No.: N/A



Report No.: 07249661
Model: CD4502B/07
Talk with Charging Mode
AC Port "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW1449

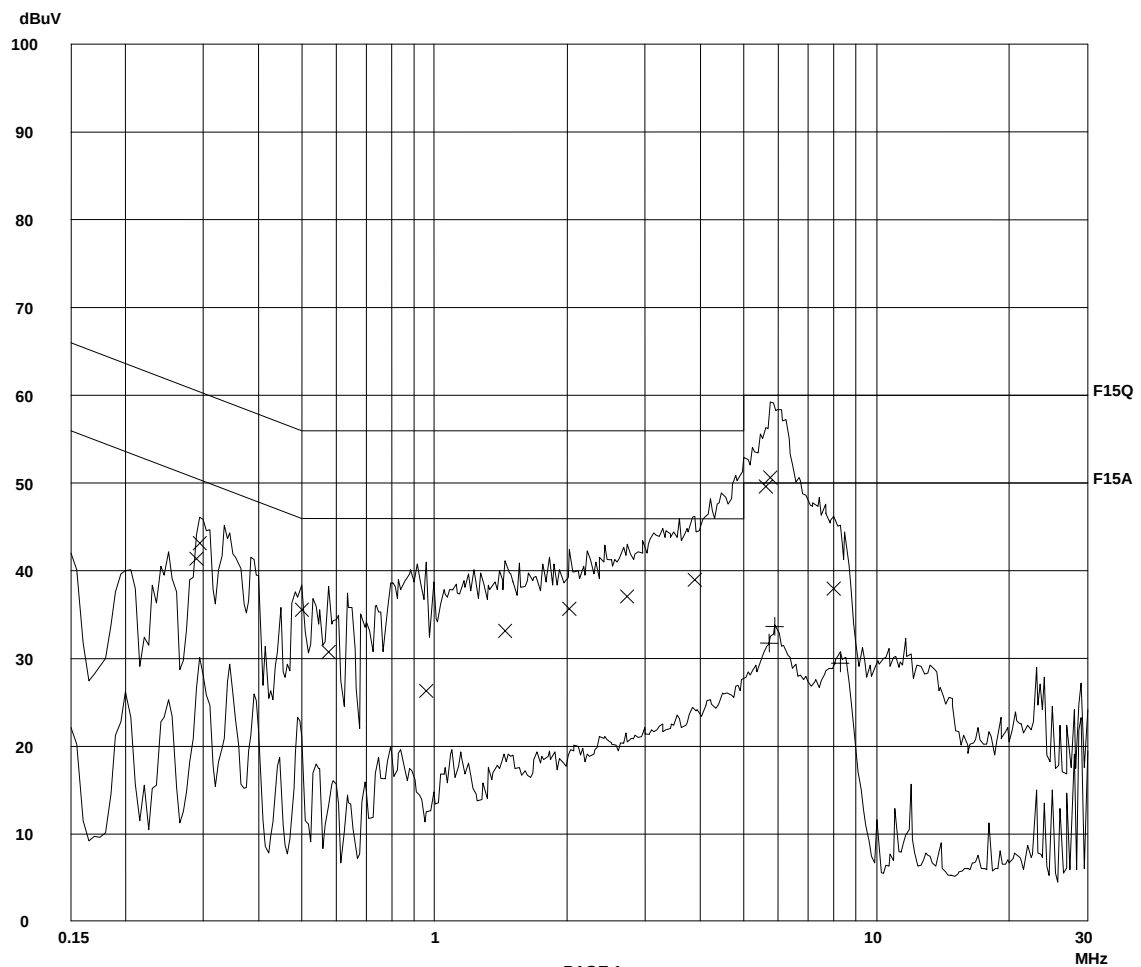

Ctrl No.: N/A



Report No.: 07249661
Model: CD4502B/07
Talk with Charging Mode
AC Port "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

0.29000	41.3	60.6	-19.3
0.29500	43.1	60.3	-17.2
0.50000	35.6	56.0	-20.4
0.57500	30.7	56.0	-25.3
0.96000	26.2	56.0	-29.8
1.44500	33.1	56.0	-22.9
2.02000	35.6	56.0	-20.4
2.73500	37.0	56.0	-19.0
3.89000	38.9	56.0	-17.1
5.63000	49.6	60.0	-10.4
5.75500	50.6	60.0	-9.4
8.02000	37.9	60.0	-22.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

5.71500	31.7	50.0	-18.3
5.90500	33.6	50.0	-16.4
8.28000	29.4	50.0	-20.6

* limit exceeded



Report No.: 07249661
Model: CD4502B/07
Talk with Charging Mode
AC Port "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW1449

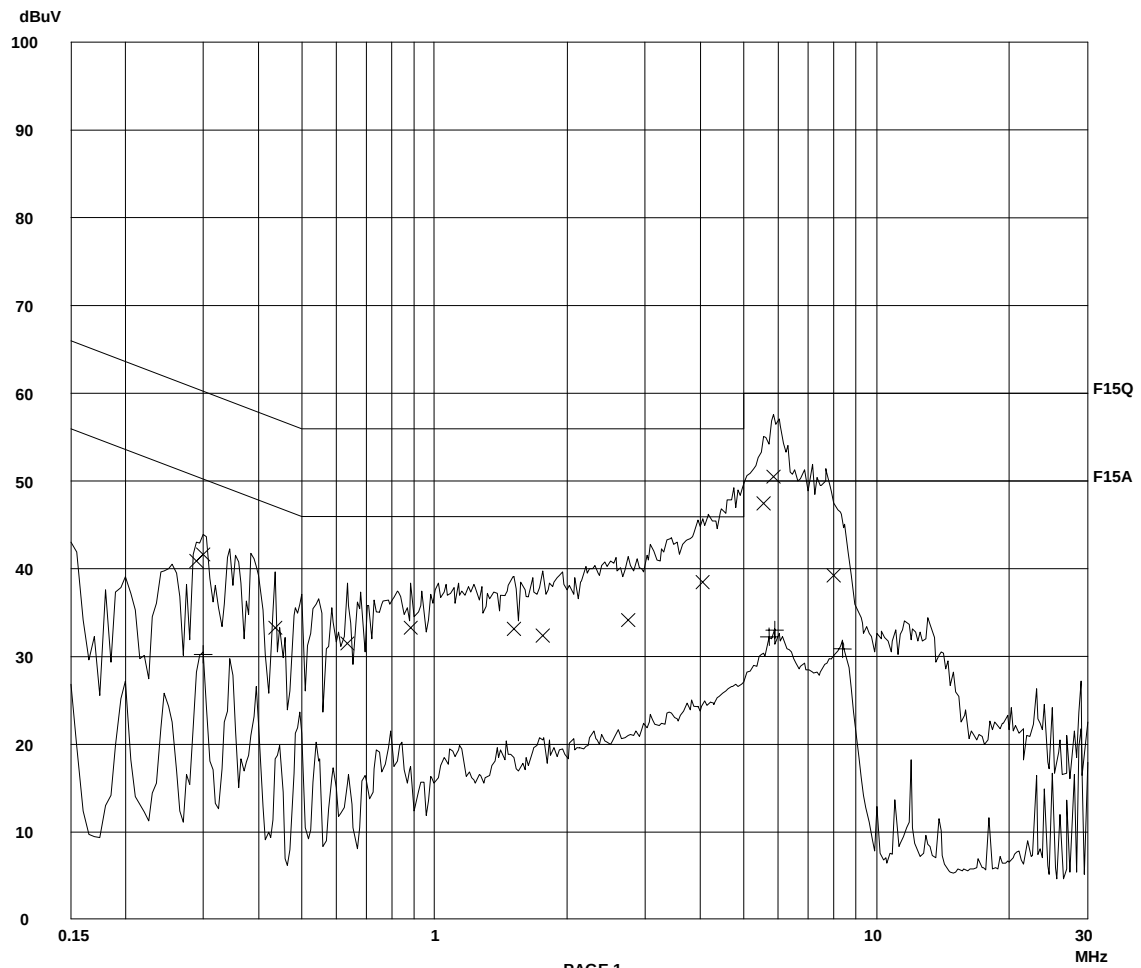



Report No.: 07249661
Model: CD4502B/07
Talk with Charging Mode
AC Port "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

0.29000	40.8	60.6	-19.8
0.30000	41.6	60.2	-18.6
0.43500	33.3	57.2	-23.9
0.63500	31.5	56.0	-24.5
0.88500	33.2	56.0	-22.8
1.51500	33.1	56.0	-22.9
1.76000	32.3	56.0	-23.7
2.74000	34.1	56.0	-21.9
4.04500	38.4	56.0	-17.6
5.56000	47.5	60.0	-12.5
5.86000	50.5	60.0	-9.5
7.98500	39.2	60.0	-20.8

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

0.30000	30.2	50.2	-20.0
5.71500	32.3	50.0	-17.7
5.87500	32.9	50.0	-17.1
8.39500	30.8	50.0	-19.2

* limit exceeded