



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Vertical		
Remark:			

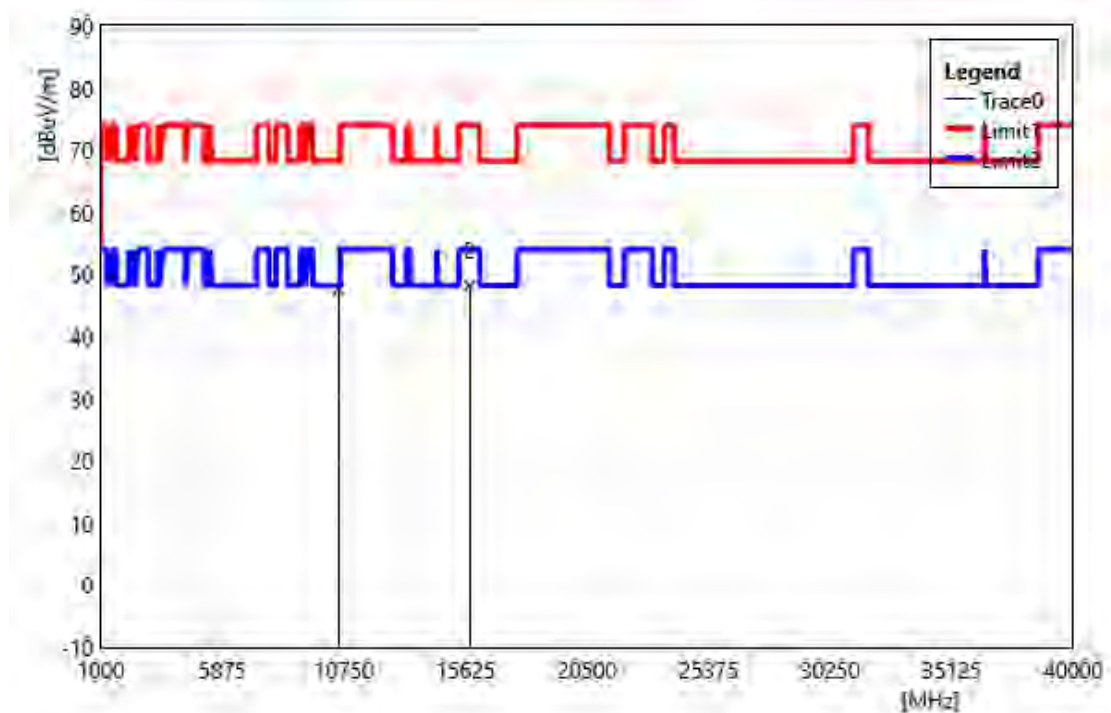


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	36.02	11.59	47.61	68.20	-20.59	PEAK
2	15780.00	34.35	13.75	48.10	74.00	-25.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Horizontal		
Remark:			

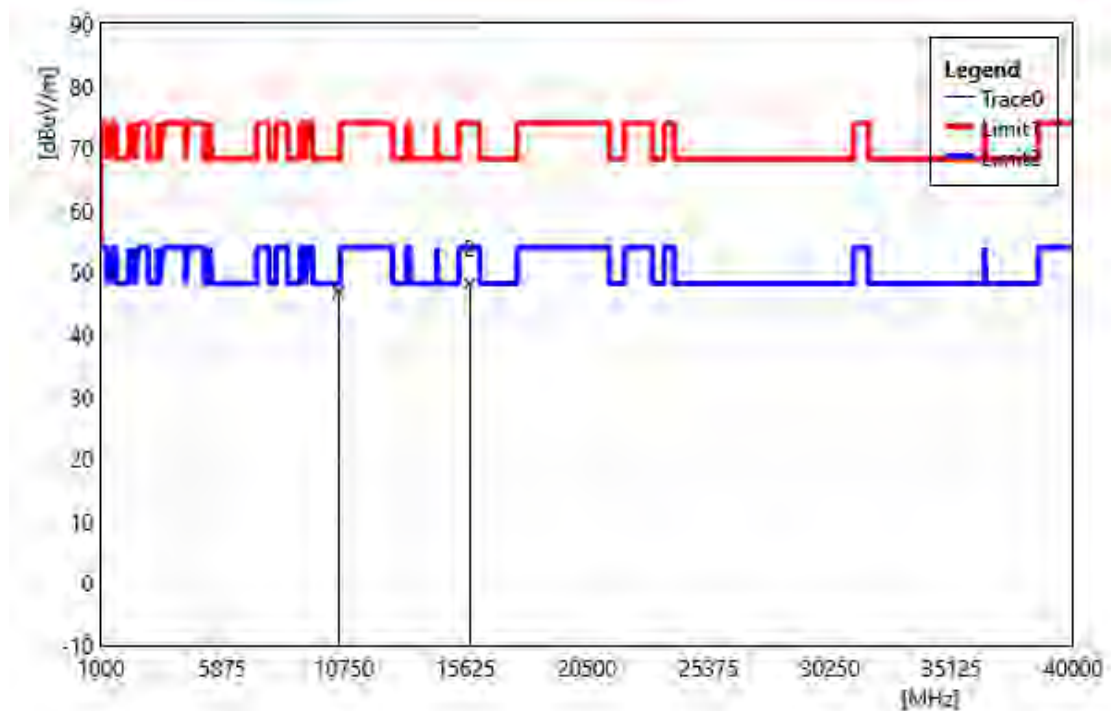


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	35.19	11.59	46.78	68.20	-21.42	PEAK
2	15780.00	34.35	13.75	48.10	74.00	-25.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Vertical		
Remark:			

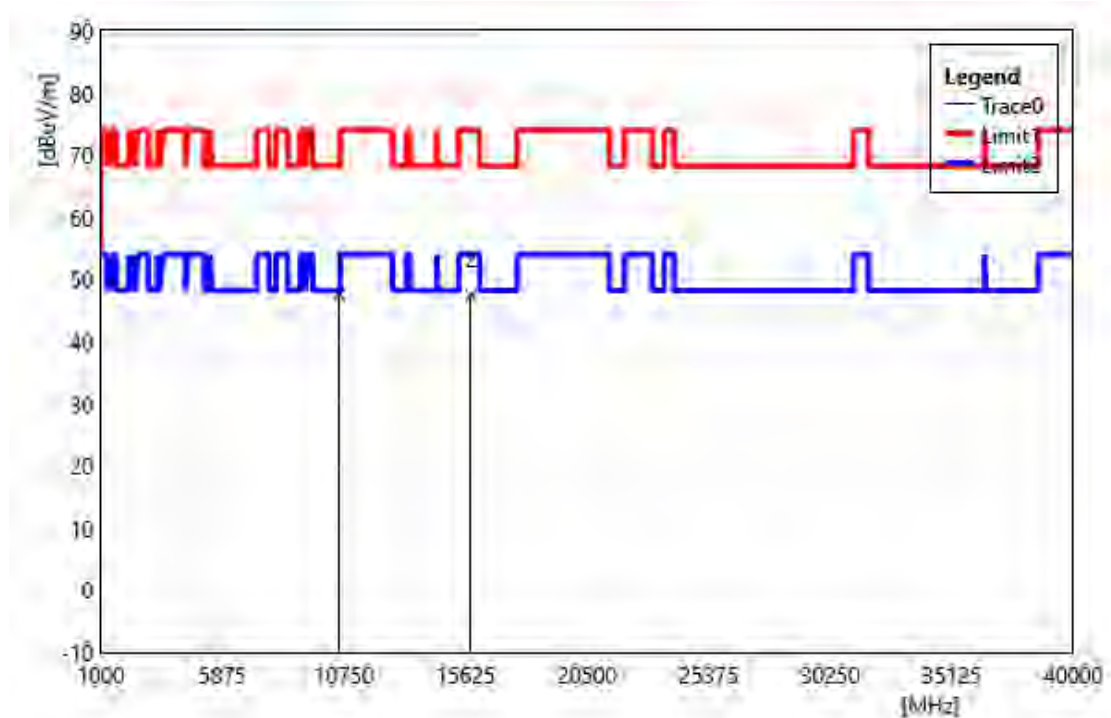


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	36.02	11.56	47.58	68.20	-20.62	PEAK
2	15840.00	33.84	13.60	47.44	74.00	-26.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Horizontal		
Remark:			

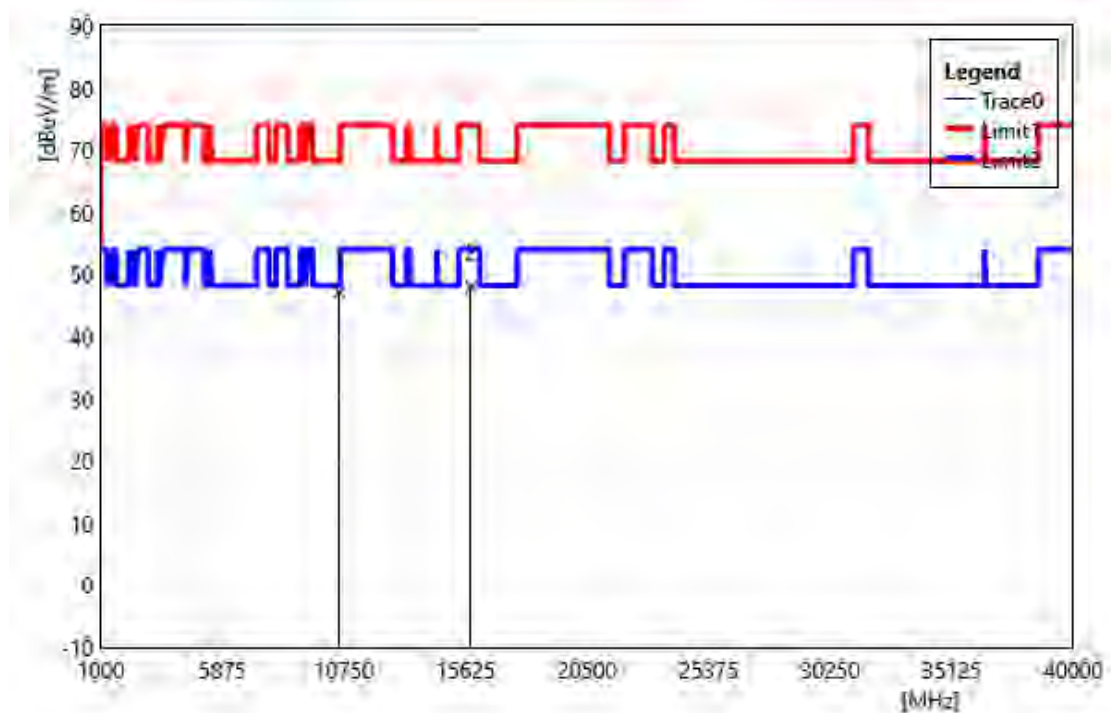


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	35.60	11.56	47.16	68.20	-21.04	PEAK
2	15840.00	34.33	13.60	47.93	74.00	-26.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

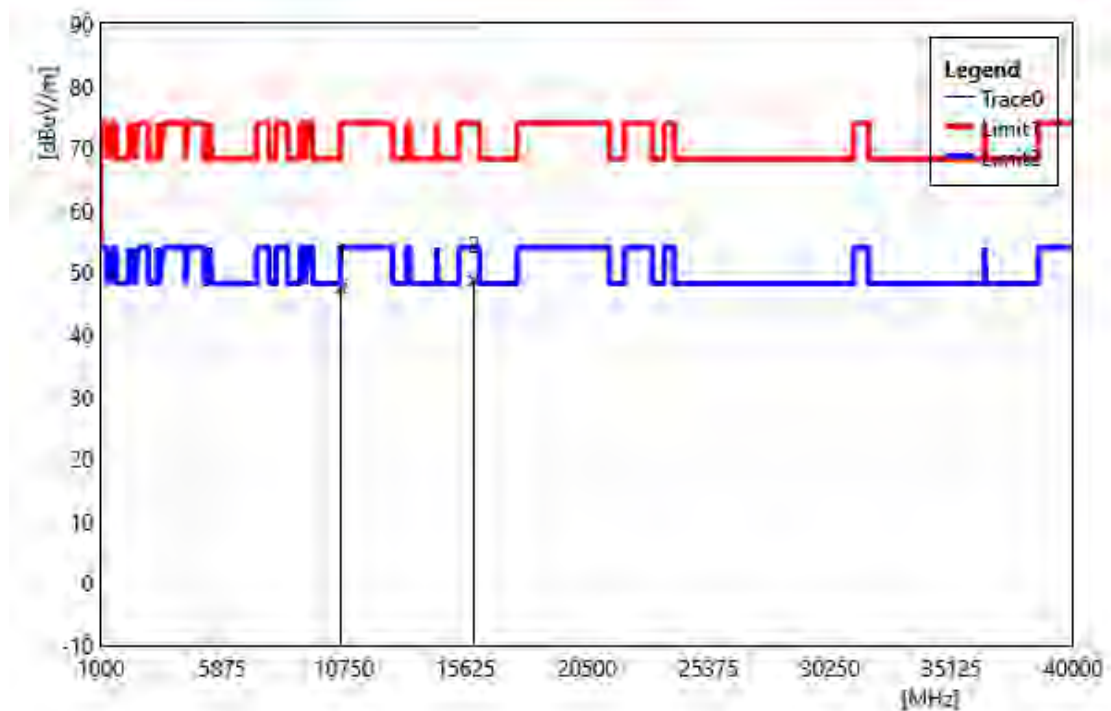


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	35.94	11.55	47.49	74.00	-26.51	PEAK
2	15960.00	35.46	13.22	48.68	74.00	-25.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

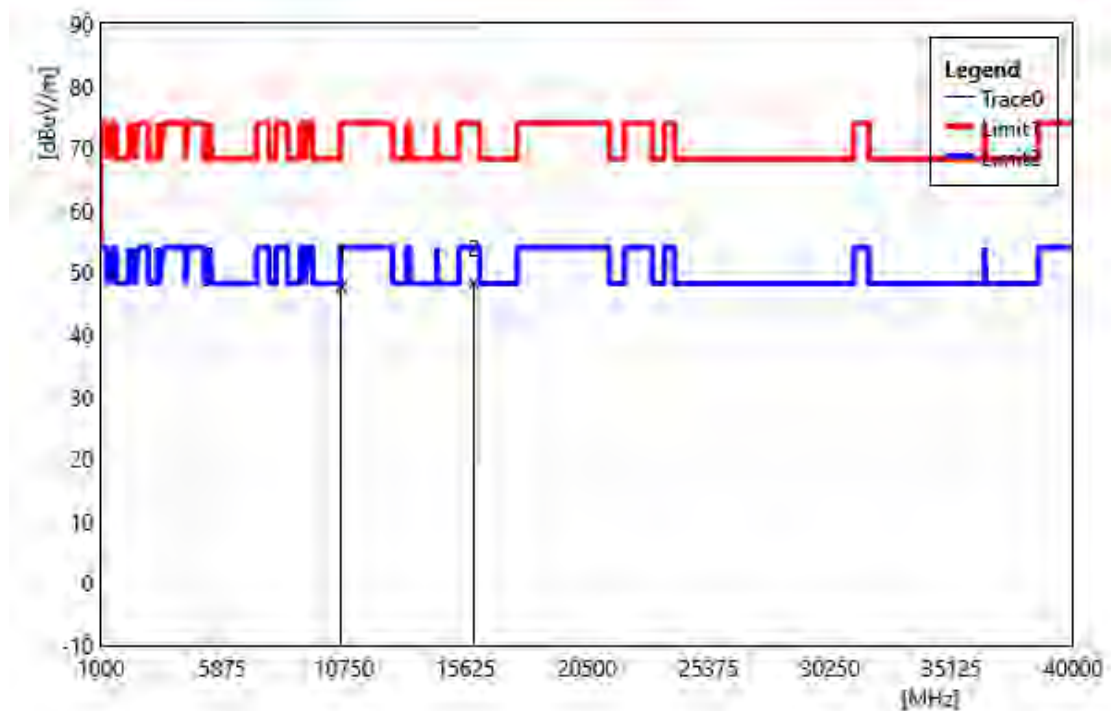


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	36.10	11.55	47.65	74.00	-26.35	PEAK
2	15960.00	35.01	13.22	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

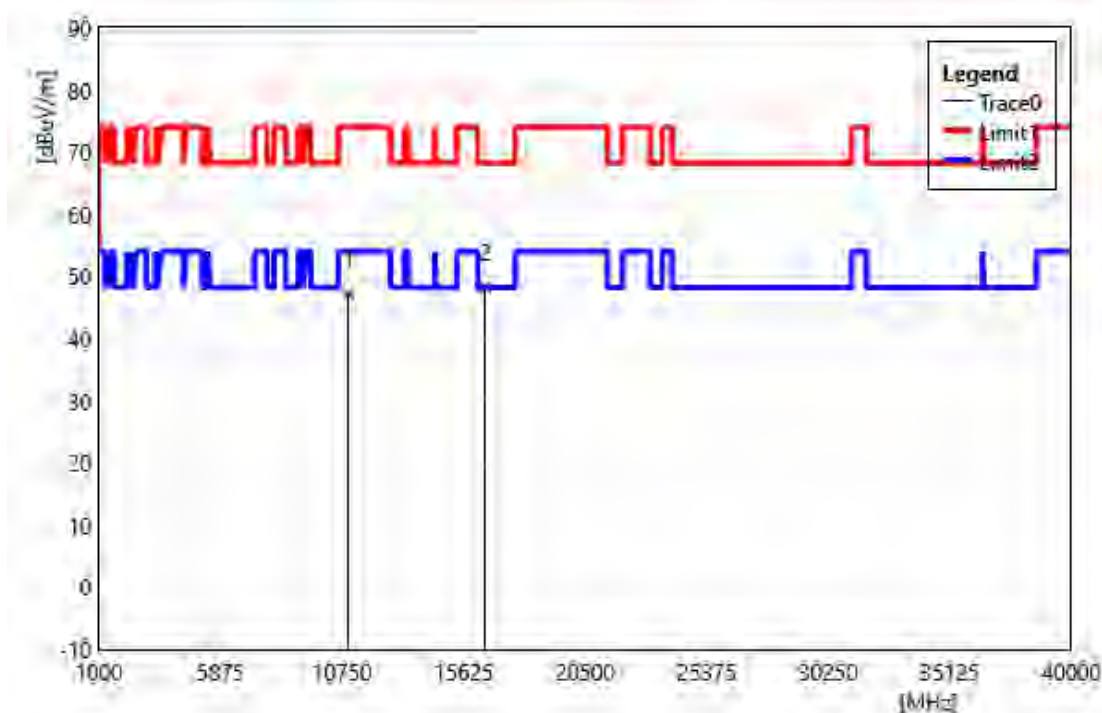


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.41	11.79	47.20	74.00	-26.80	PEAK
2	16500.00	33.88	14.31	48.19	68.20	-20.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

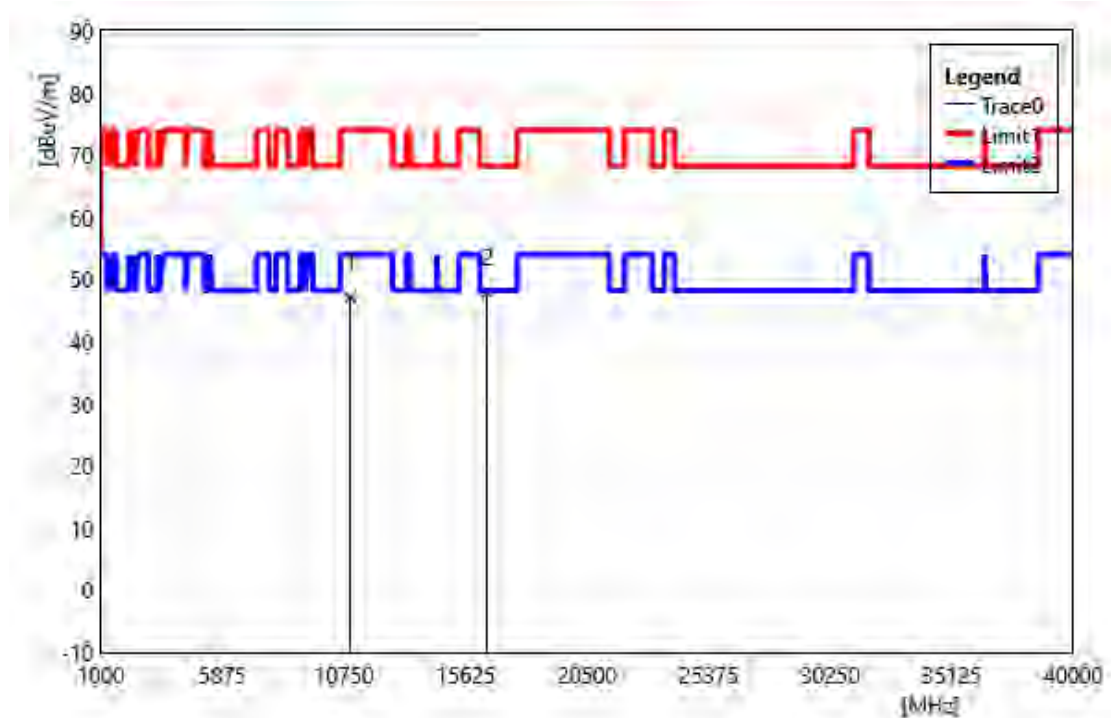


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.40	11.79	47.19	74.00	-26.81	PEAK
2	16500.00	33.63	14.31	47.94	68.20	-20.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Vertical		
Remark:			

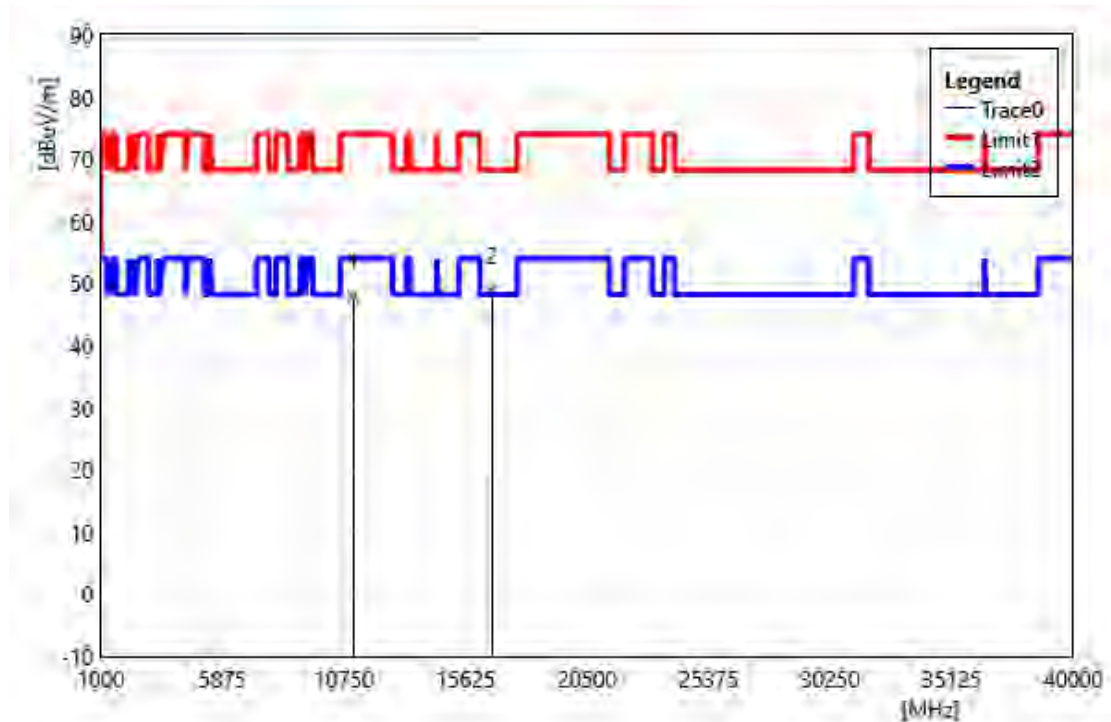


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.83	12.03	47.86	74.00	-26.14	PEAK
2	16680.00	33.62	15.21	48.83	68.20	-19.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Horizontal		
Remark:			

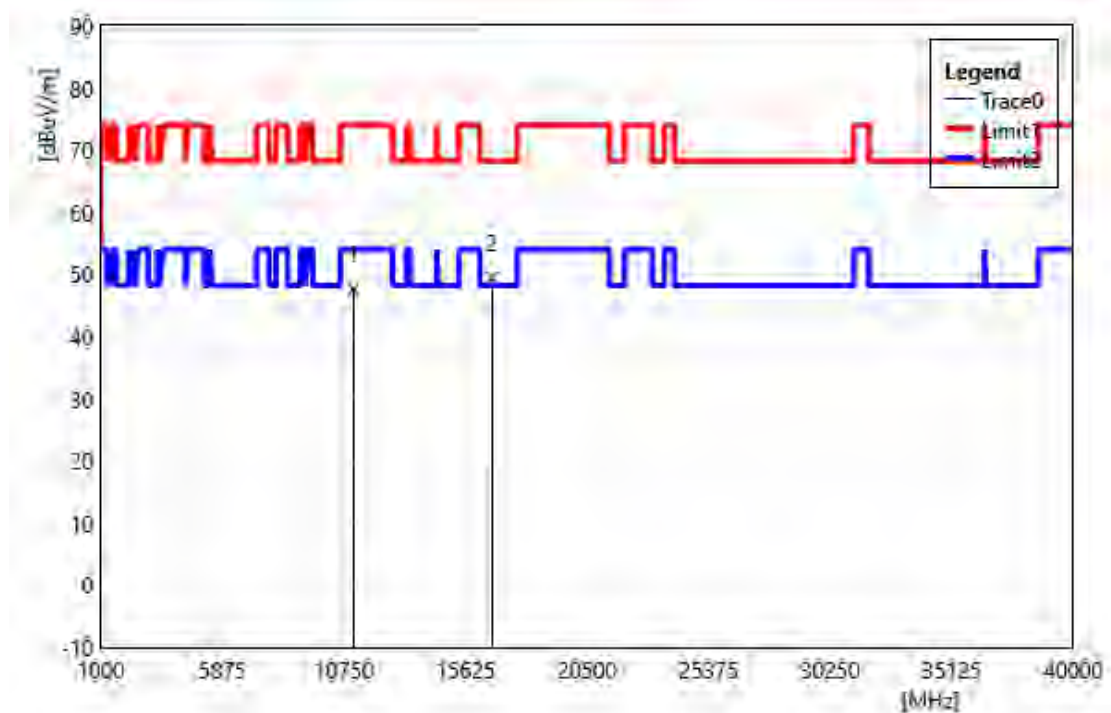


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.54	12.03	47.57	74.00	-26.43	PEAK
2	16680.00	34.27	15.21	49.48	68.20	-18.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Vertical		
Remark:			

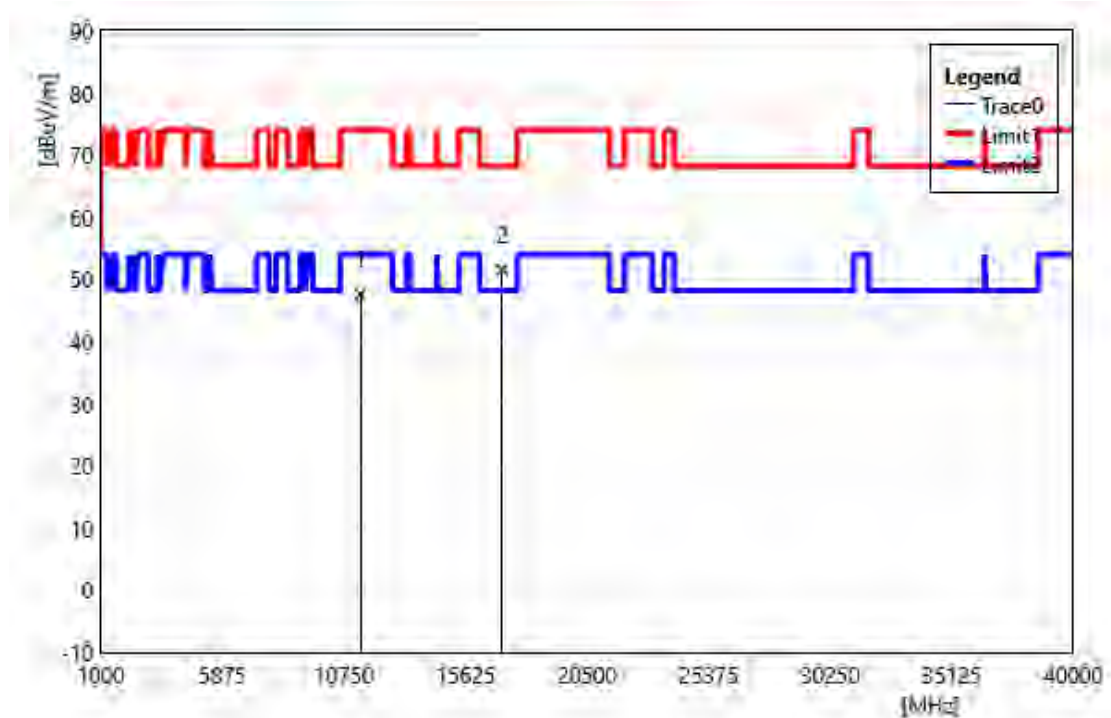


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.40	12.21	47.61	74.00	-26.39	PEAK
2	17100.00	34.18	17.37	51.56	68.20	-16.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Horizontal		
Remark:			

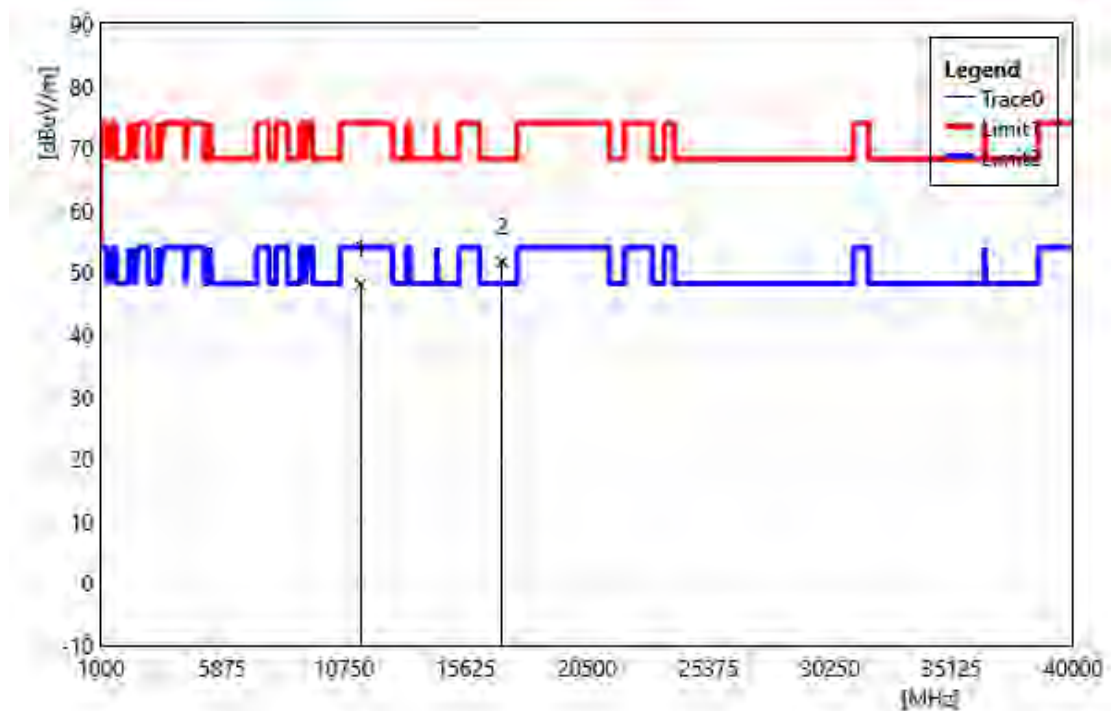


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.89	12.21	48.10	74.00	-25.90	PEAK
2	17100.00	34.33	17.37	51.70	68.20	-16.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Vertical		
Remark:			

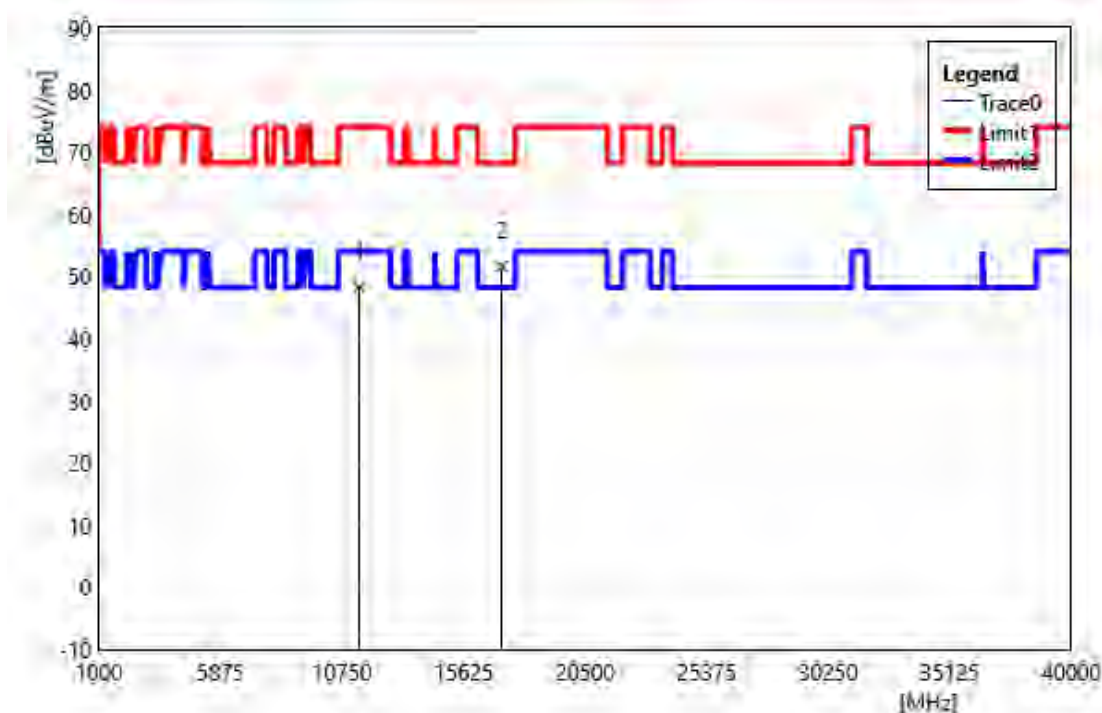


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	35.98	12.41	48.39	74.00	-25.61	PEAK
2	17160.00	33.75	17.82	51.57	68.20	-16.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Horizontal		
Remark:			

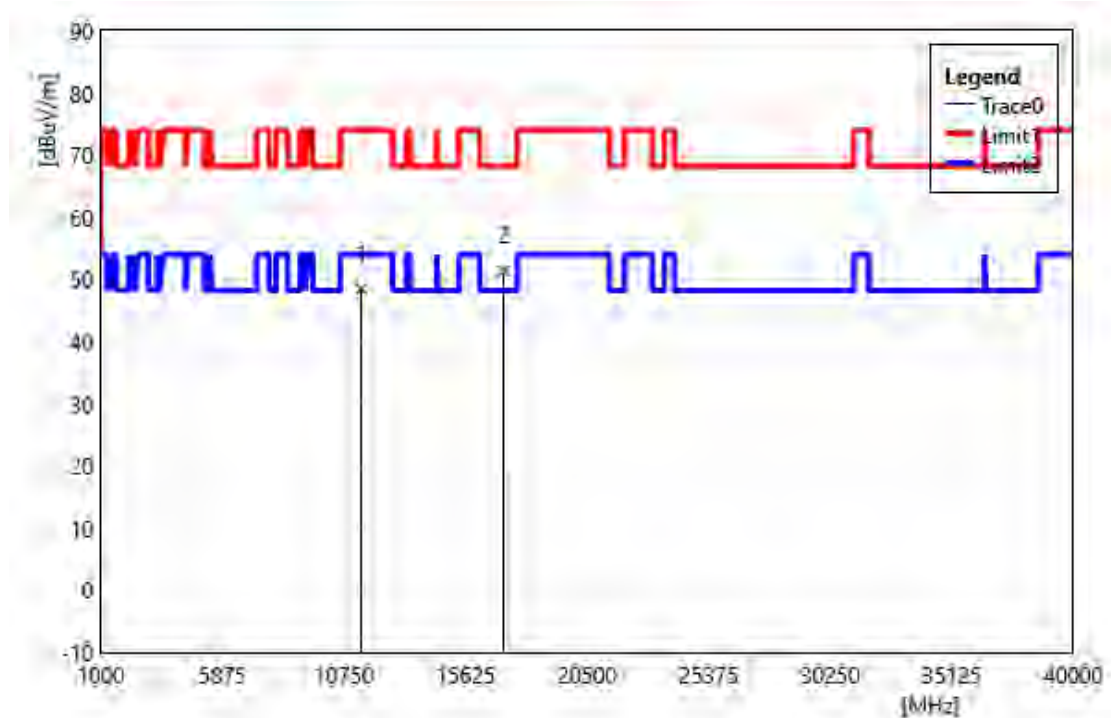


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	36.05	12.41	48.46	74.00	-25.54	PEAK
2	17160.00	33.46	17.82	51.28	68.20	-16.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Vertical		
Remark:			

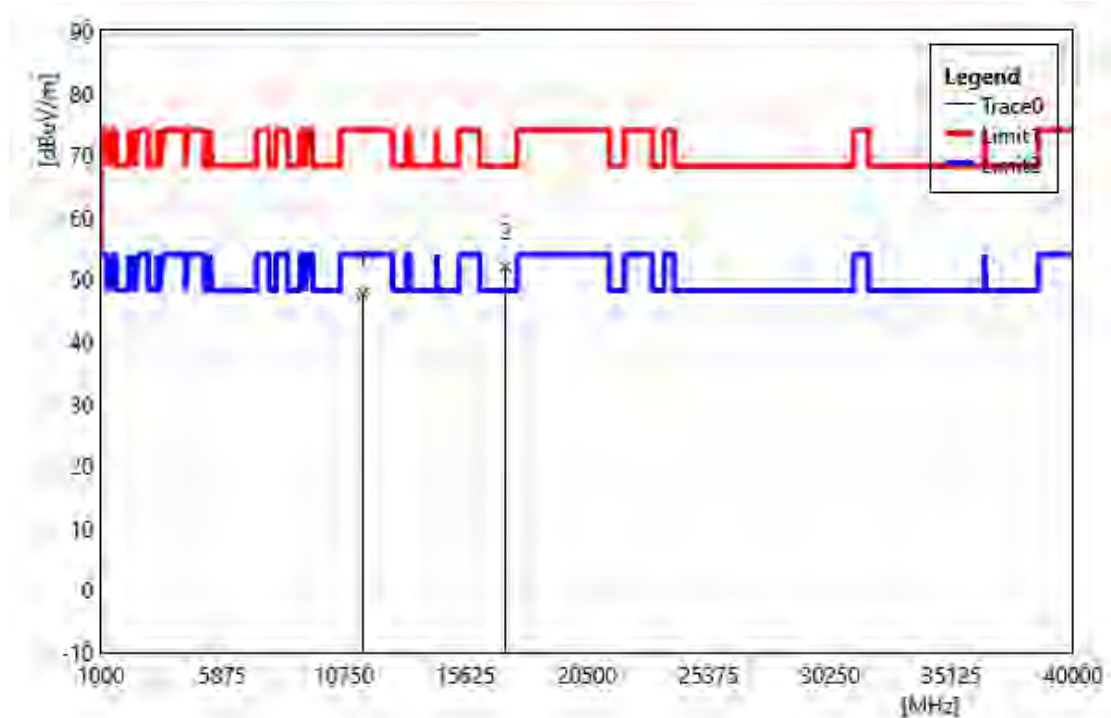


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	35.05	12.65	47.70	74.00	-26.30	PEAK
2	17235.00	33.59	18.45	52.04	68.20	-16.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Horizontal		
Remark:			

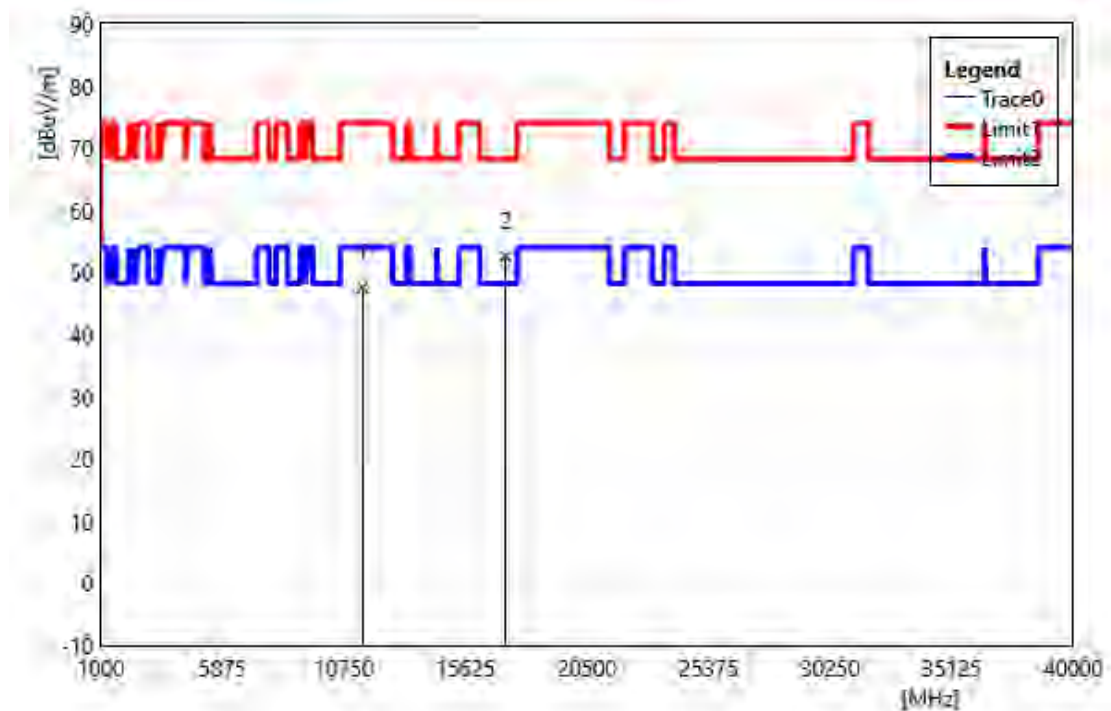


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.91	12.65	47.56	74.00	-26.44	PEAK
2	17235.00	34.12	18.45	52.57	68.20	-15.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Vertical		
Remark:			

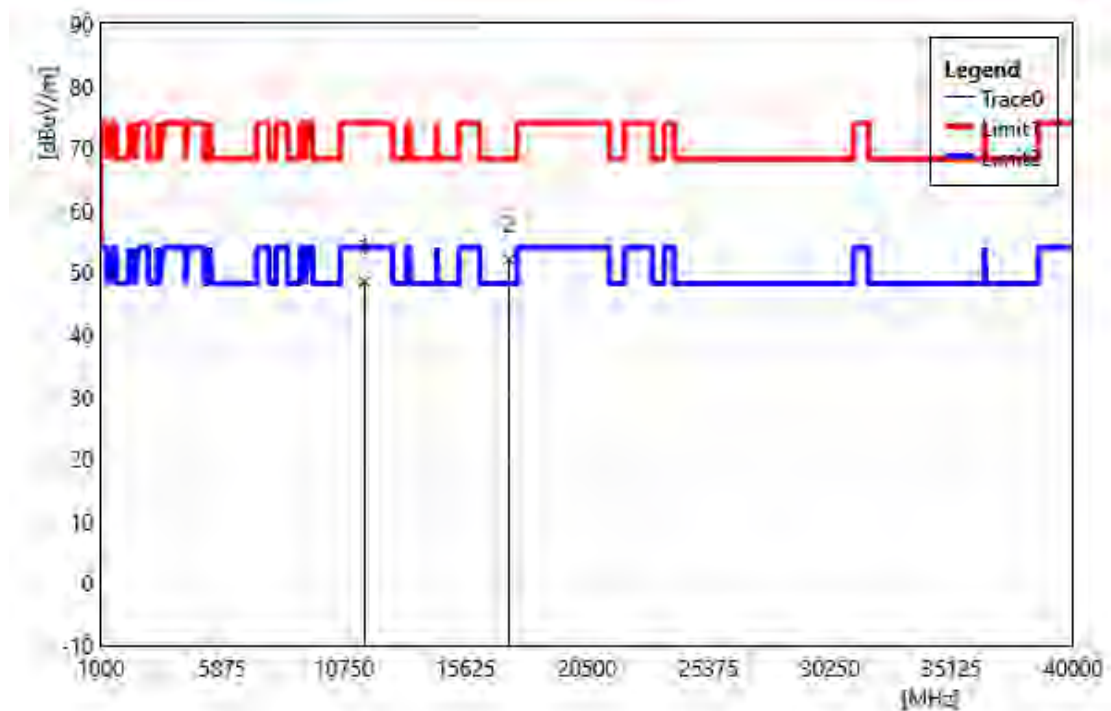


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	36.10	12.42	48.52	74.00	-25.48	PEAK
2	17355.00	32.72	19.36	52.08	68.20	-16.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Horizontal		
Remark:			

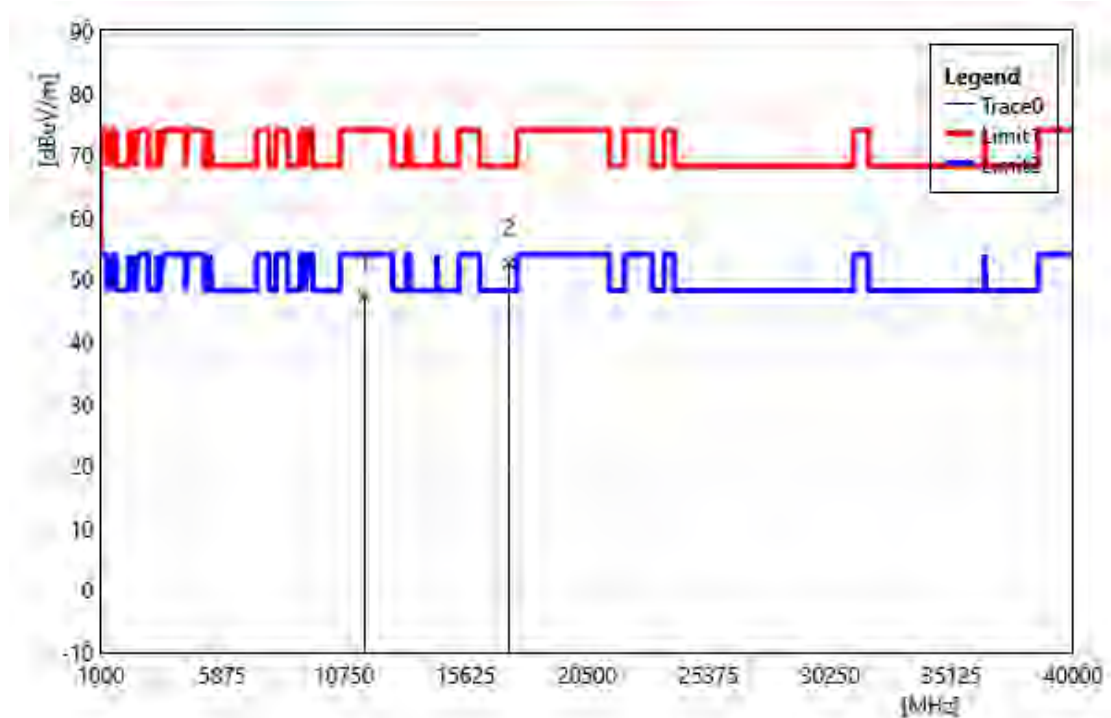


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	34.90	12.42	47.32	74.00	-26.68	PEAK
2	17355.00	33.22	19.36	52.59	68.20	-15.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Vertical		
Remark:			

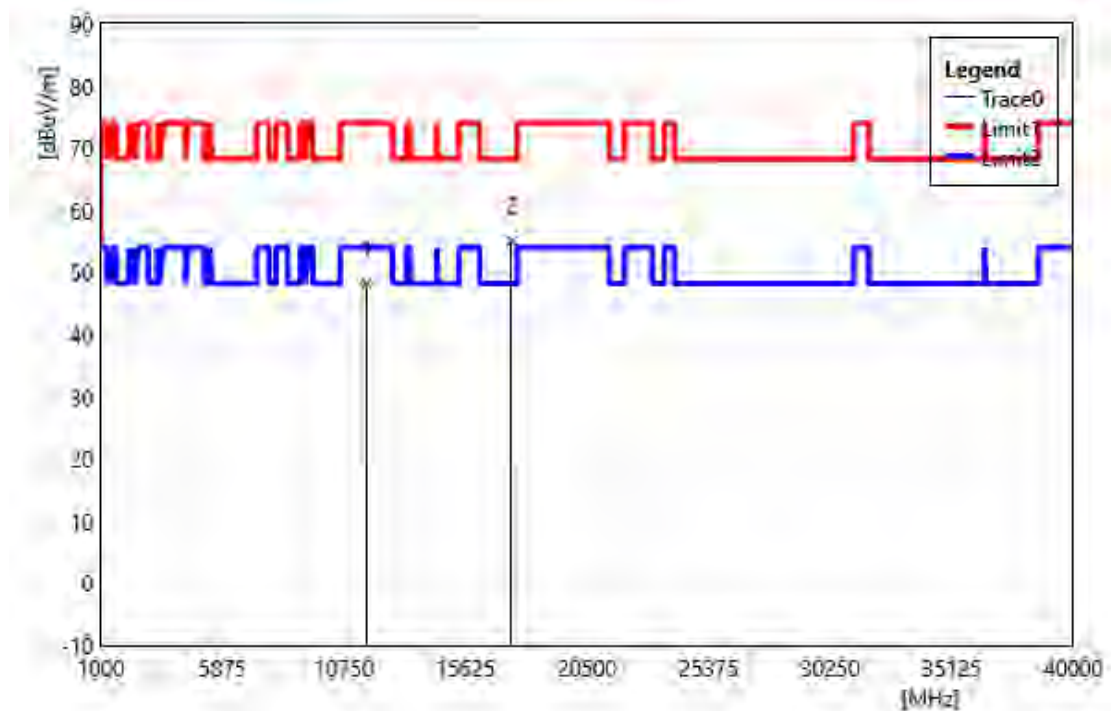


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.94	12.16	48.10	74.00	-25.90	PEAK
2	17475.00	34.79	20.31	55.10	68.20	-13.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Horizontal		
Remark:			

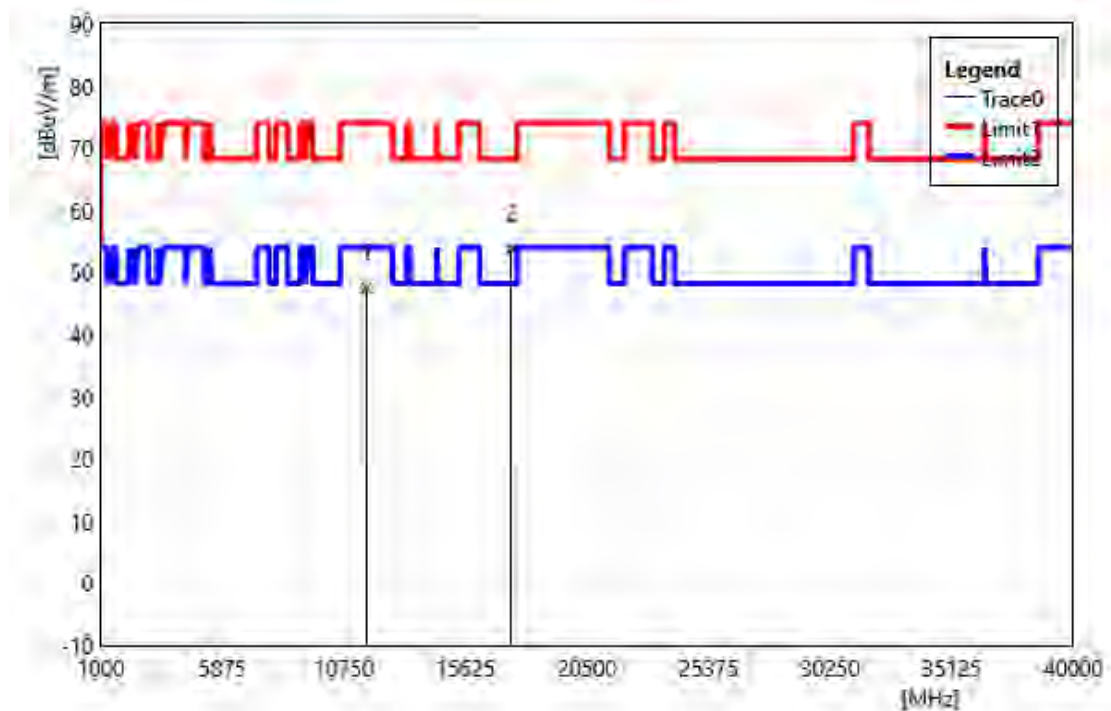


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.31	12.16	47.47	74.00	-26.53	PEAK
2	17475.00	33.48	20.31	53.79	68.20	-14.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

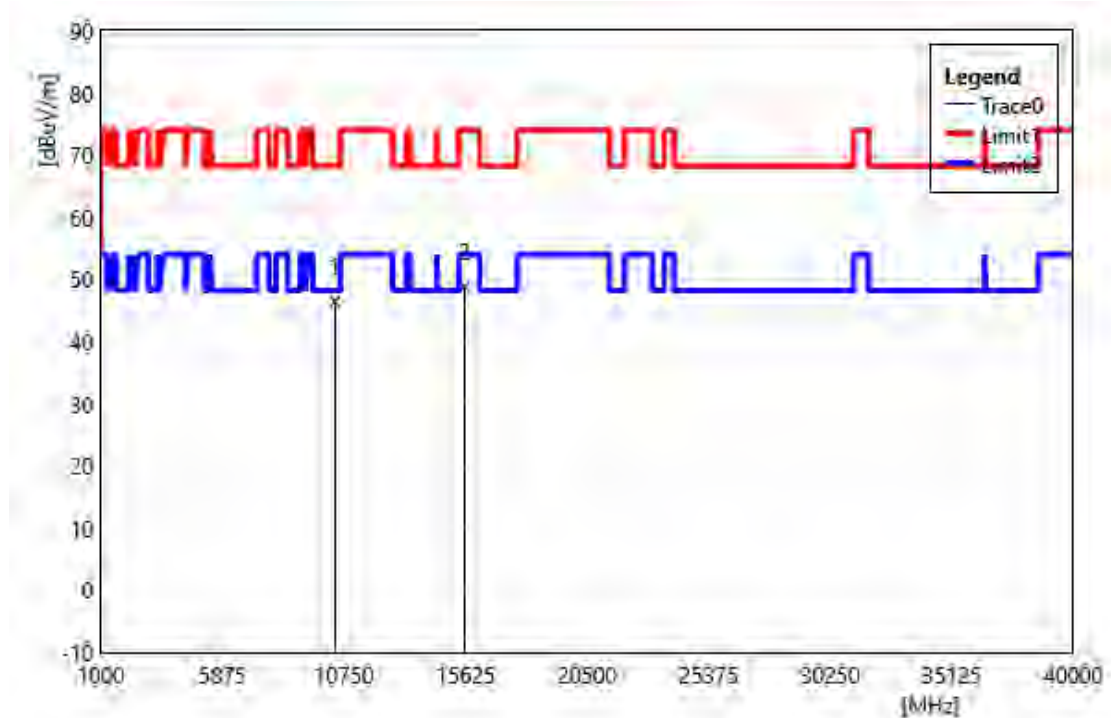


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	35.15	11.28	46.43	68.20	-21.77	PEAK
2	15570.00	34.85	14.02	48.87	74.00	-25.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

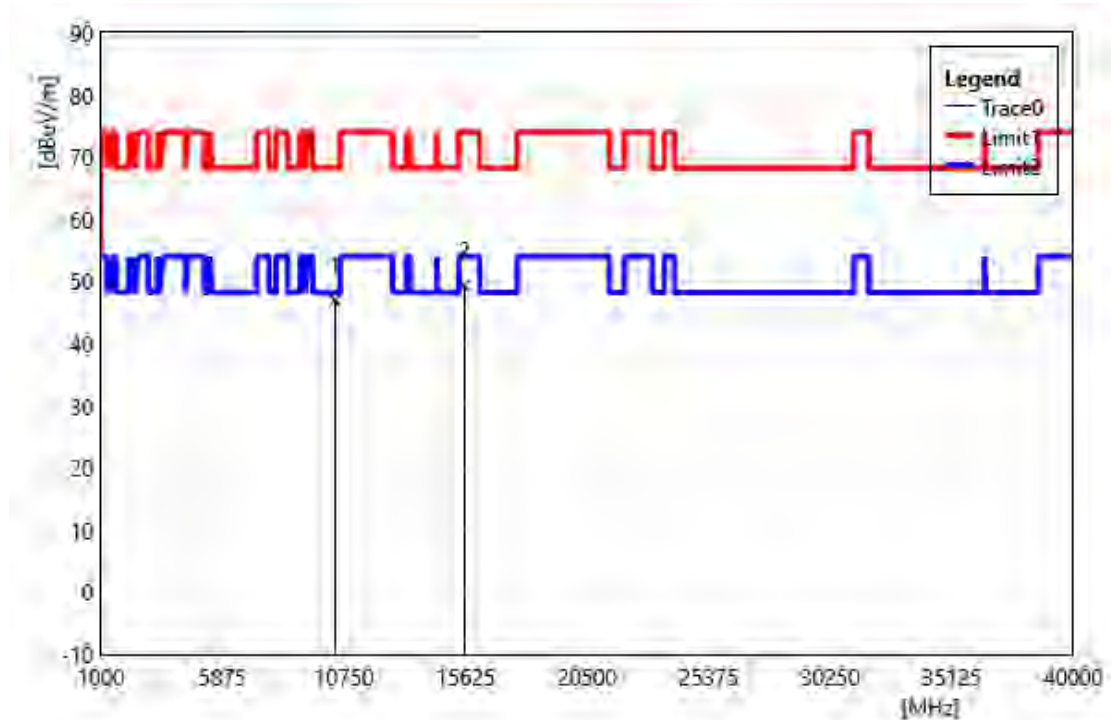


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	35.65	11.28	46.93	68.20	-21.27	PEAK
2	15570.00	35.27	14.02	49.29	74.00	-24.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

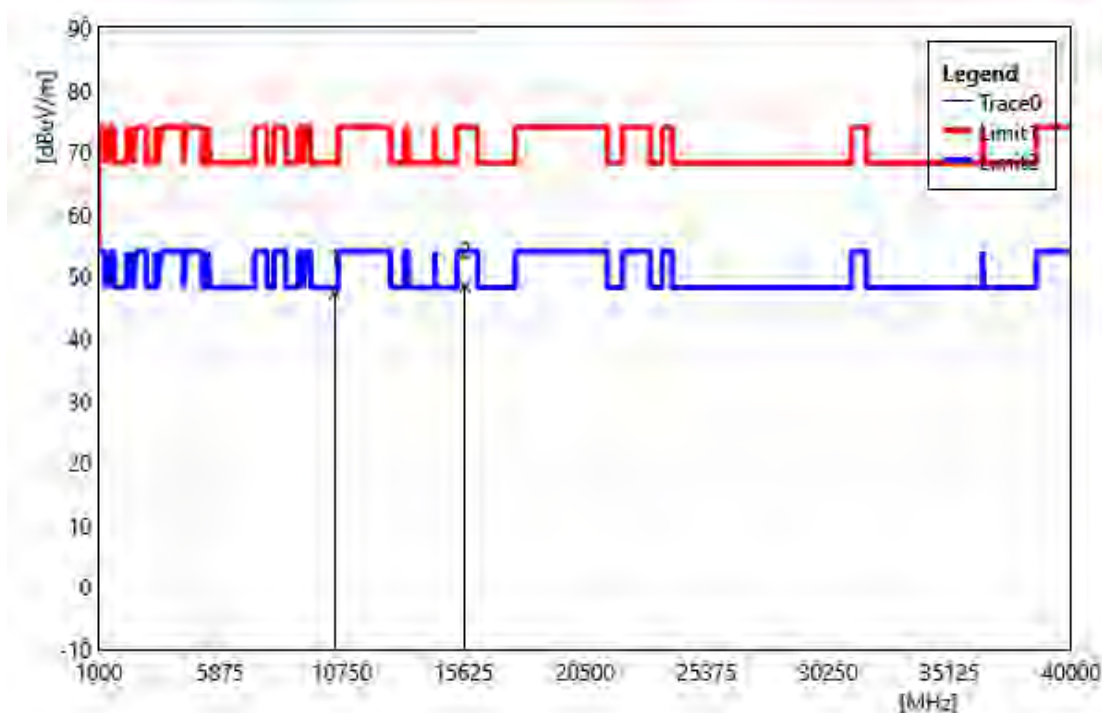


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.77	11.51	47.28	68.20	-20.92	PEAK
2	15690.00	34.57	13.85	48.42	74.00	-25.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

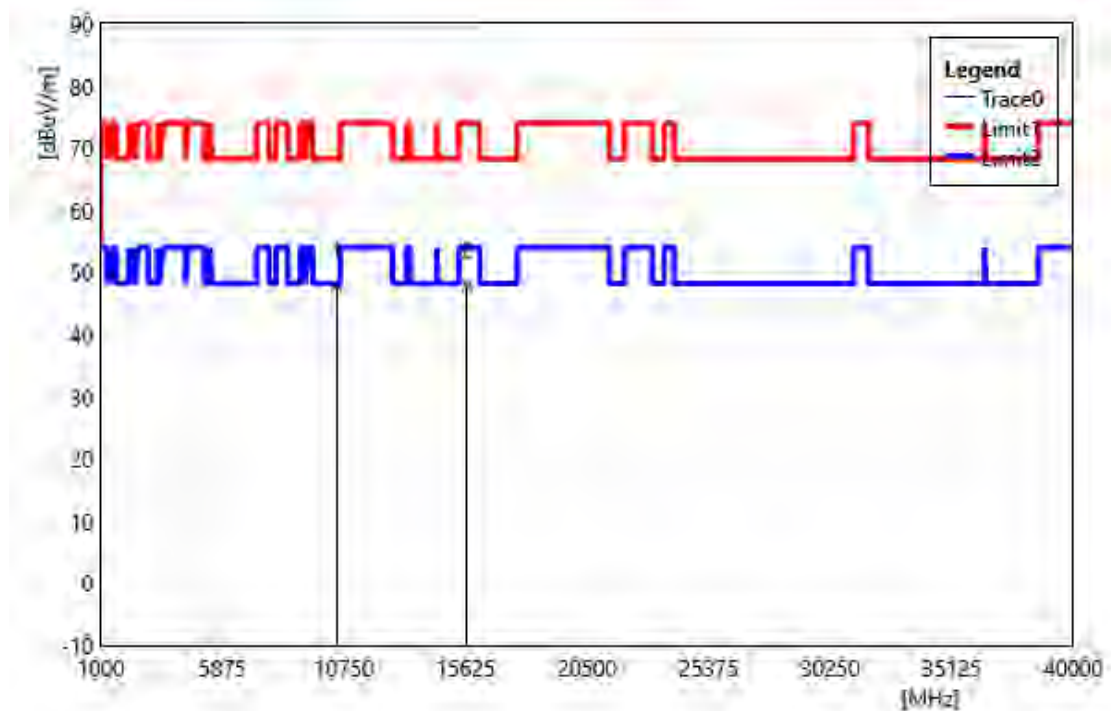


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	36.35	11.51	47.86	68.20	-20.34	PEAK
2	15690.00	34.00	13.85	47.85	74.00	-26.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

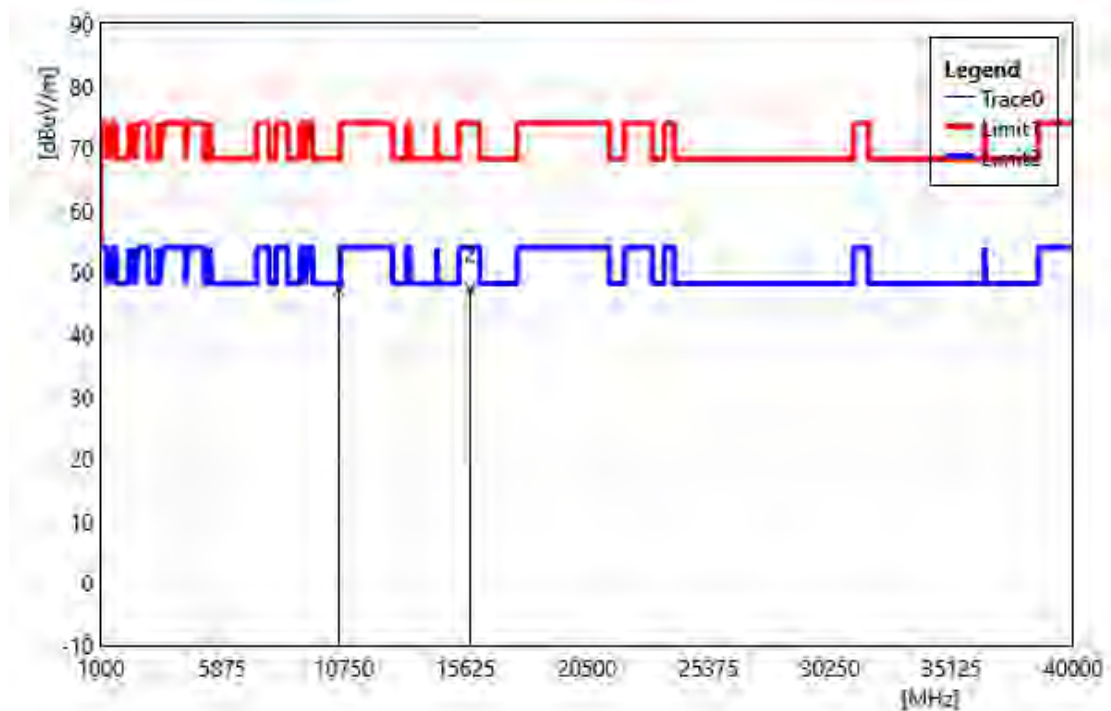


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.73	11.58	47.31	68.20	-20.89	PEAK
2	15810.00	33.64	13.69	47.33	74.00	-26.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

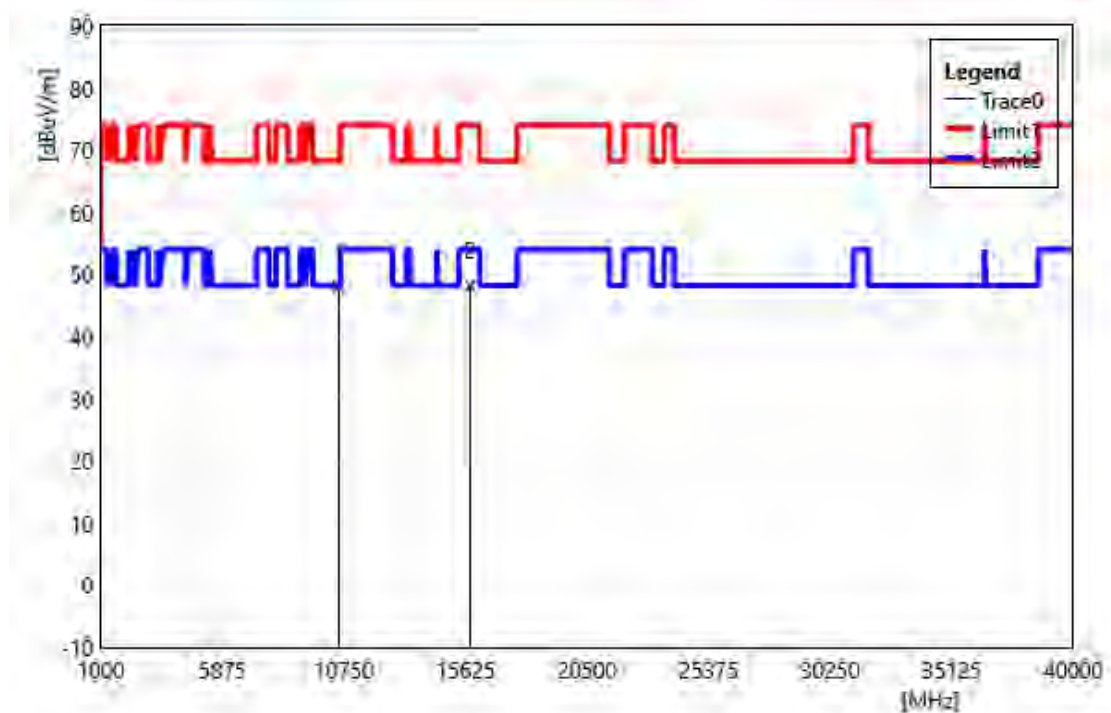


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	36.37	11.58	47.95	68.20	-20.25	PEAK
2	15810.00	34.38	13.69	48.07	74.00	-25.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

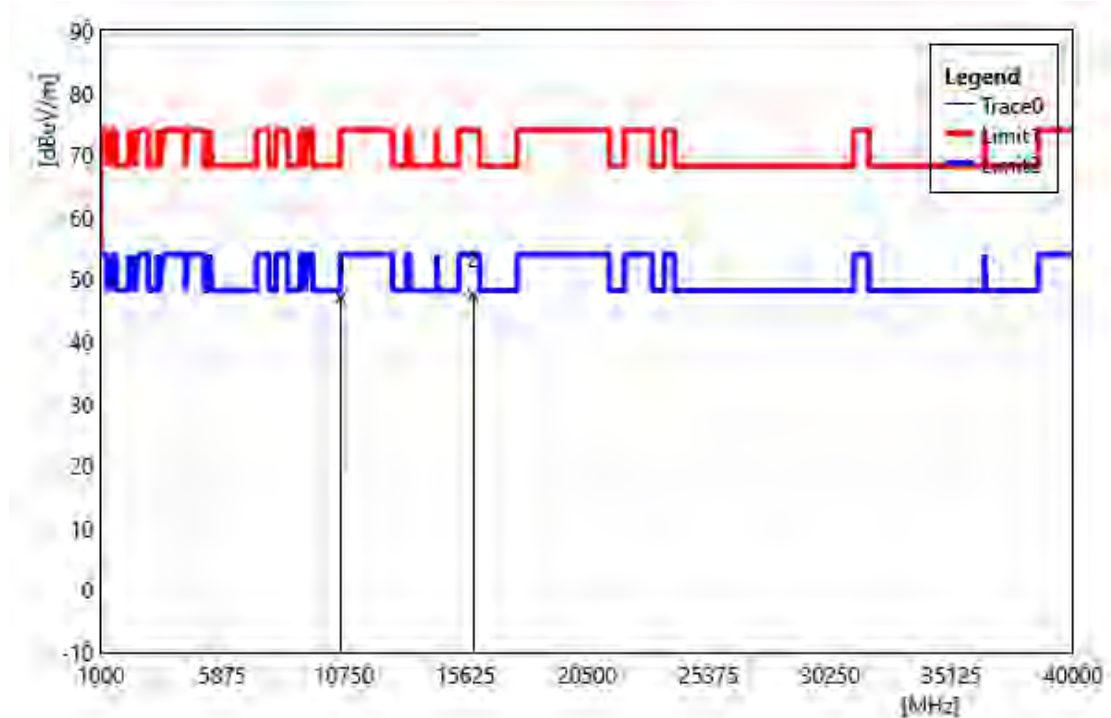


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	35.54	11.55	47.09	74.00	-26.91	PEAK
2	15930.00	34.14	13.31	47.45	74.00	-26.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

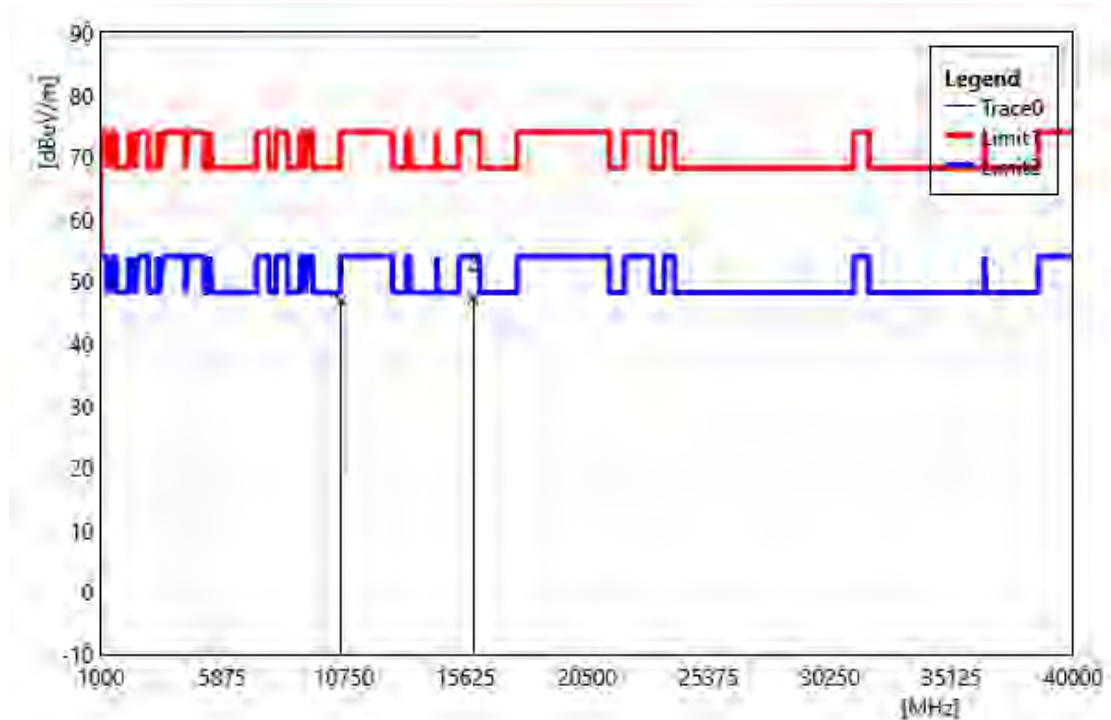


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	35.30	11.55	46.85	74.00	-27.15	PEAK
2	15930.00	33.99	13.31	47.30	74.00	-26.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

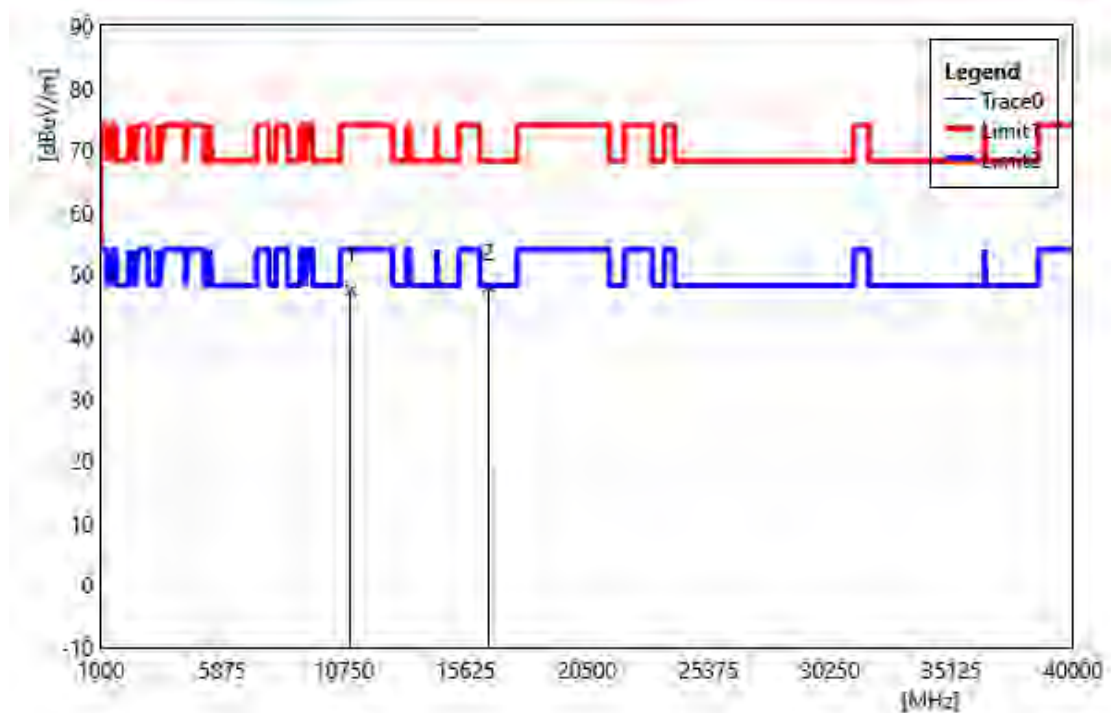


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.63	11.85	47.48	74.00	-26.52	PEAK
2	16530.00	33.51	14.47	47.98	68.20	-20.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

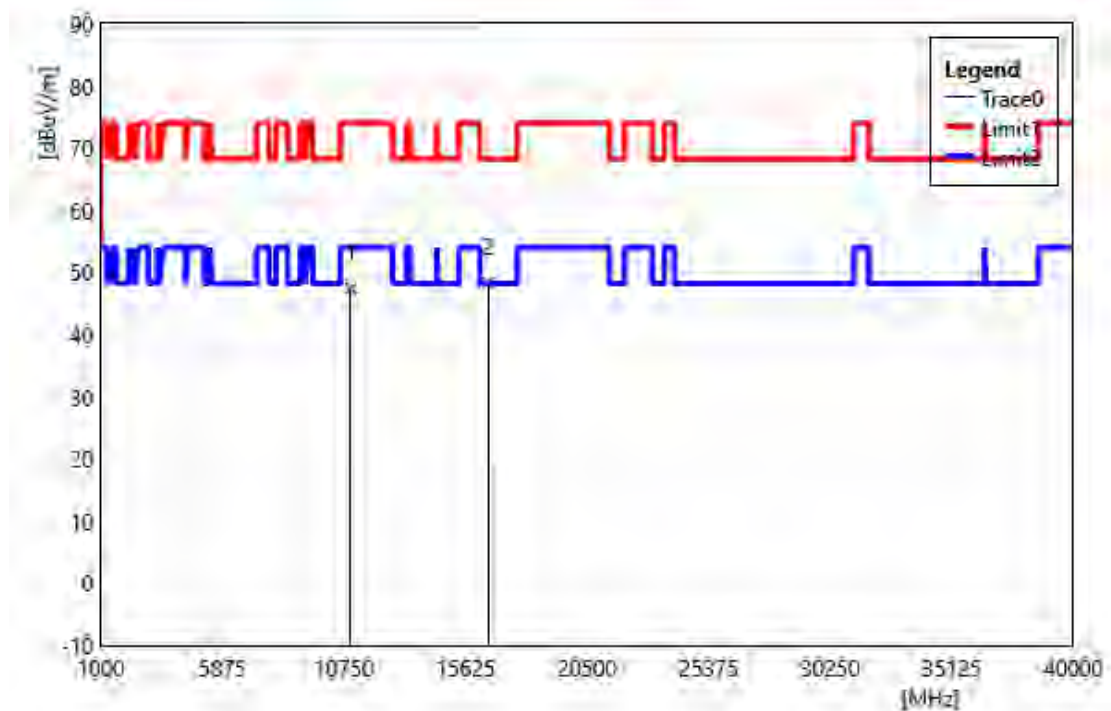


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.59	11.85	47.44	74.00	-26.56	PEAK
2	16530.00	33.86	14.47	48.33	68.20	-19.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

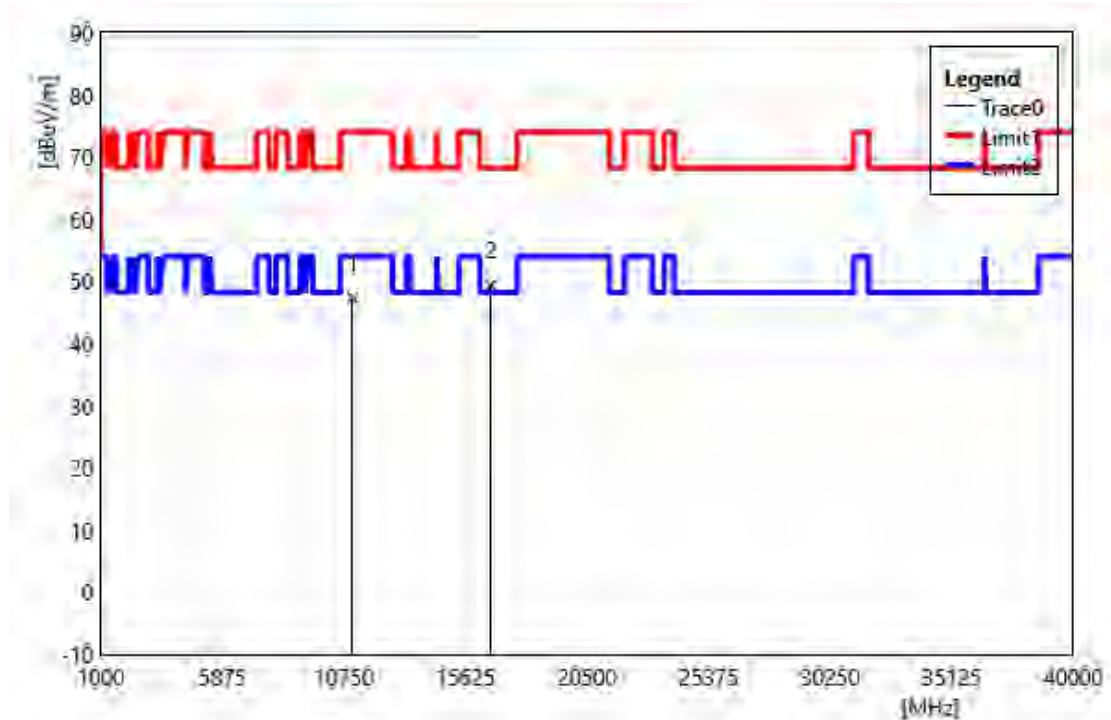


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.32	12.07	47.39	74.00	-26.61	PEAK
2	16650.00	34.25	15.08	49.33	68.20	-18.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

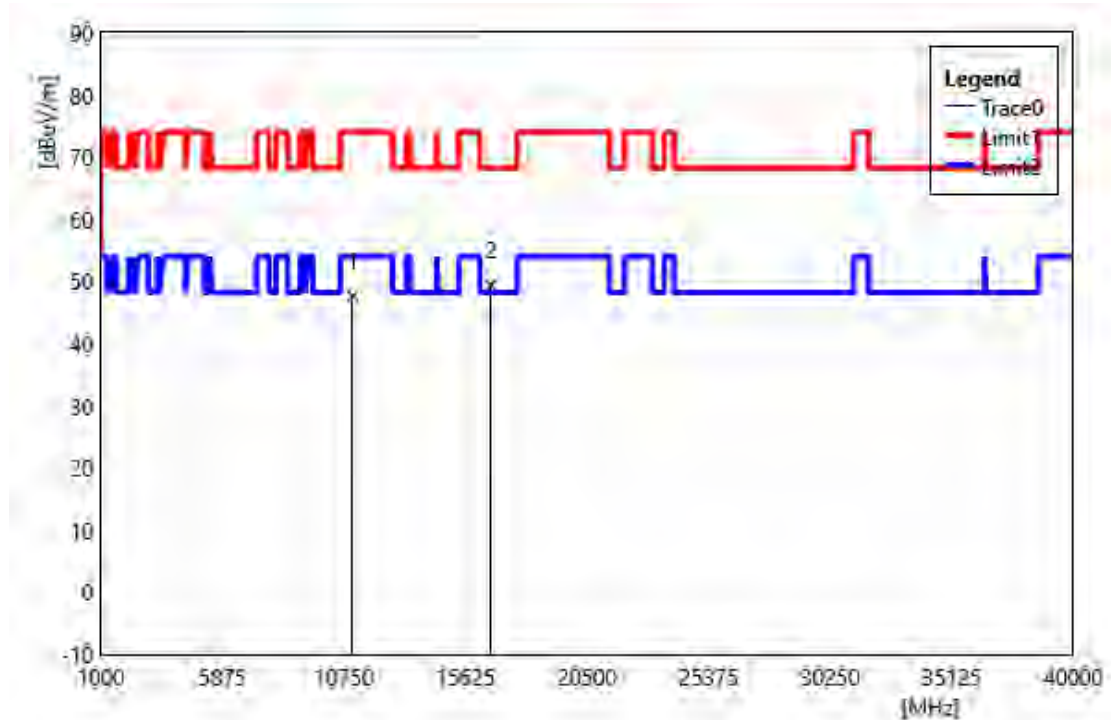


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.57	12.07	47.64	74.00	-26.36	PEAK
2	16650.00	34.36	15.08	49.44	68.20	-18.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Vertical		
Remark:			

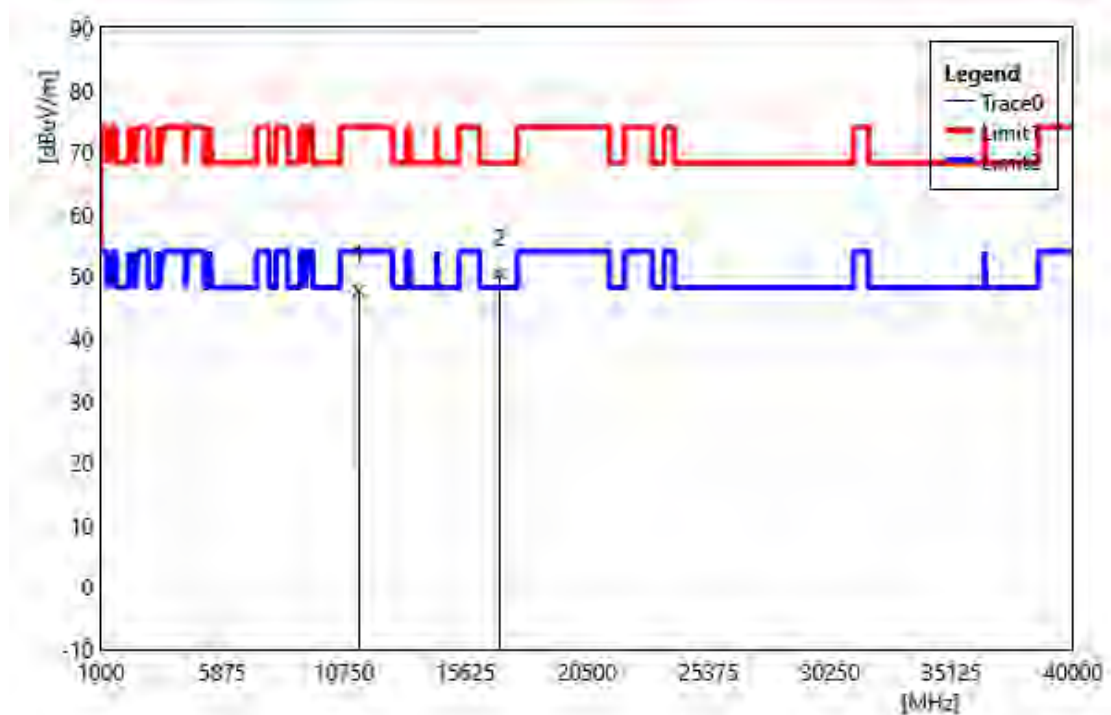


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.68	12.05	47.73	74.00	-26.27	PEAK
2	17010.00	33.60	16.79	50.39	68.20	-17.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Horizontal		
Remark:			

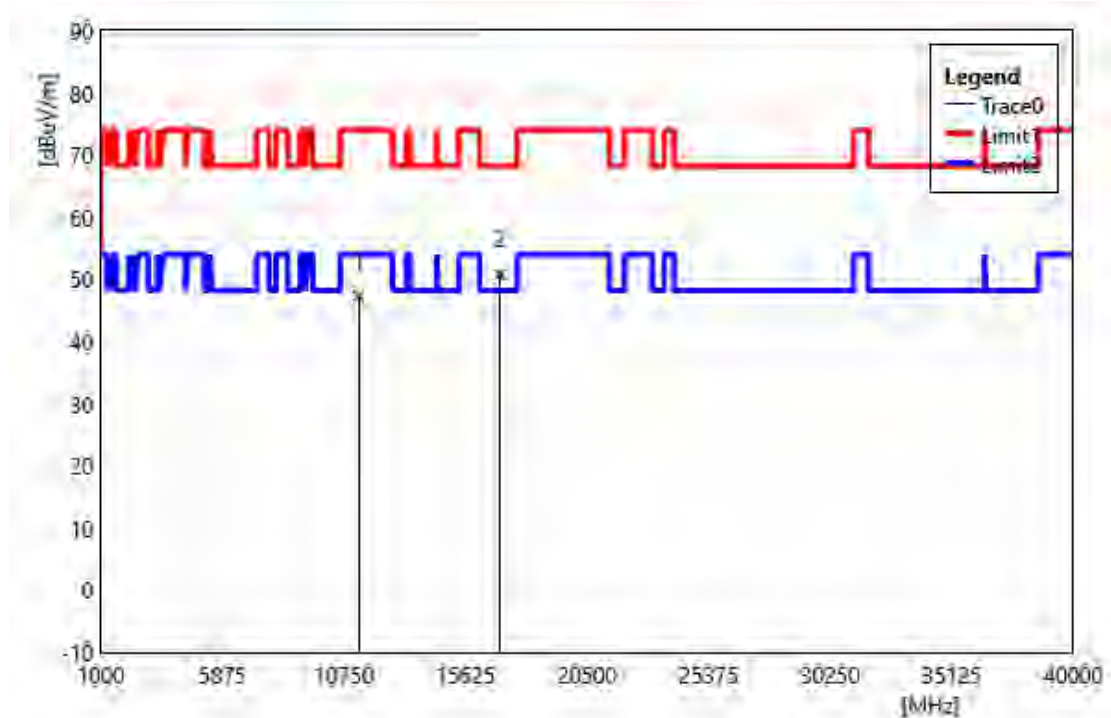


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.29	12.05	47.34	74.00	-26.66	PEAK
2	17010.00	34.05	16.79	50.84	68.20	-17.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Vertical		
Remark:			

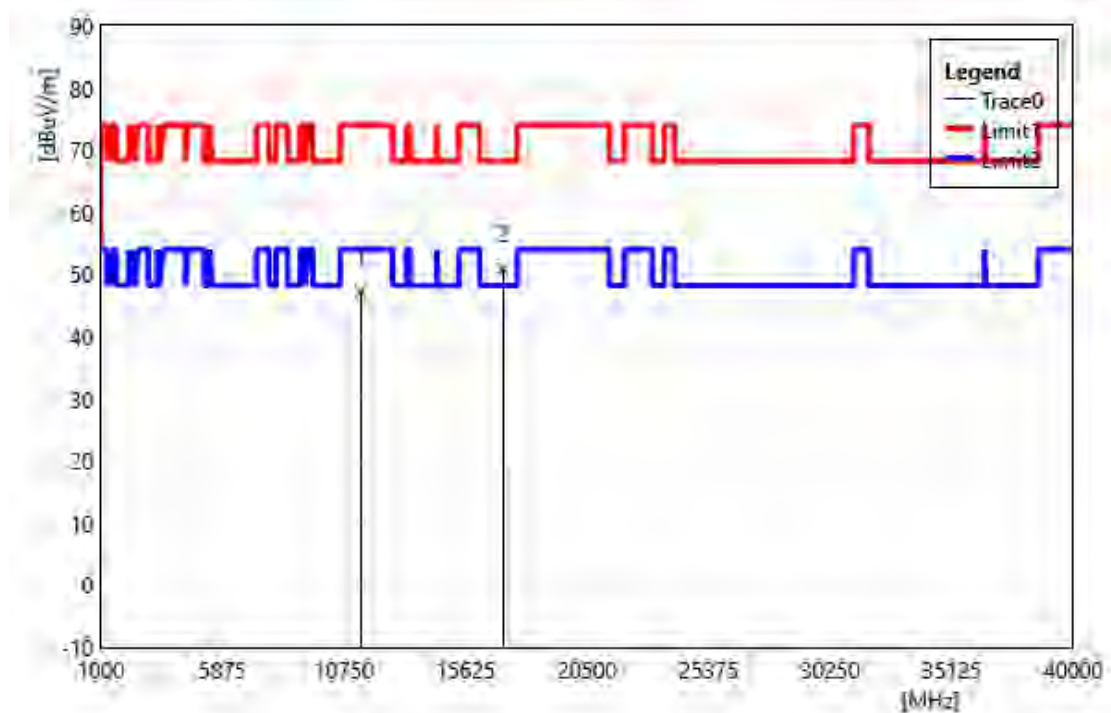


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	34.99	12.31	47.30	74.00	-26.70	PEAK
2	17130.00	33.30	17.60	50.90	68.20	-17.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Horizontal		
Remark:			

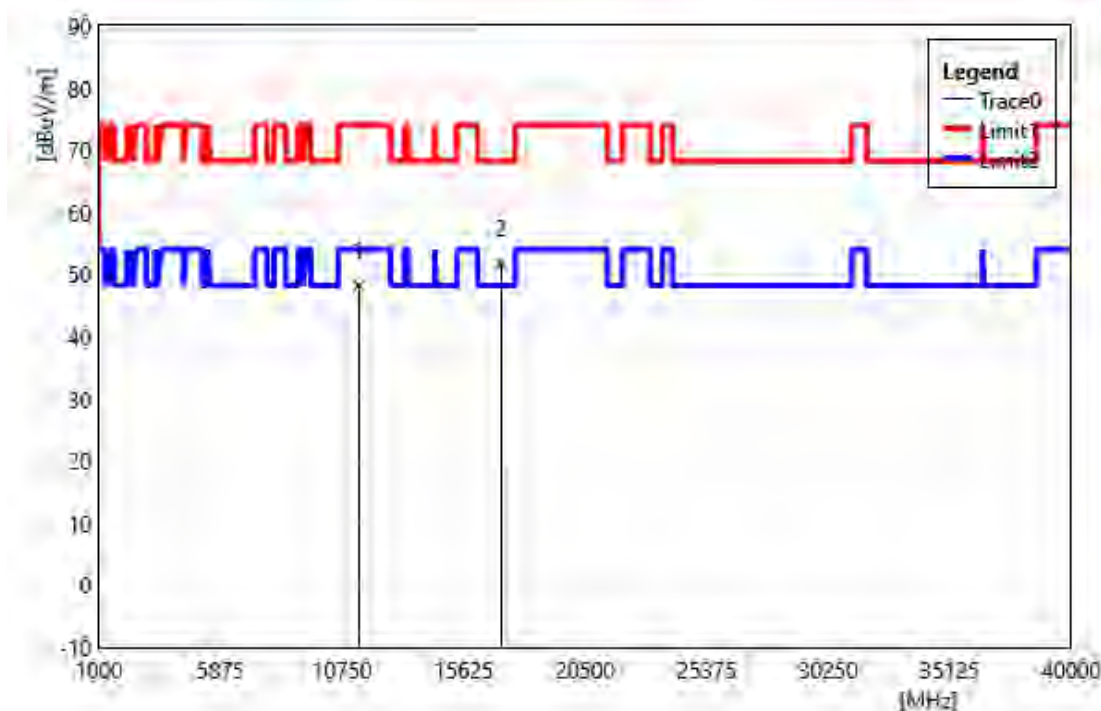


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.89	12.31	48.20	74.00	-25.80	PEAK
2	17130.00	34.15	17.60	51.75	68.20	-16.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Vertical		
Remark:			

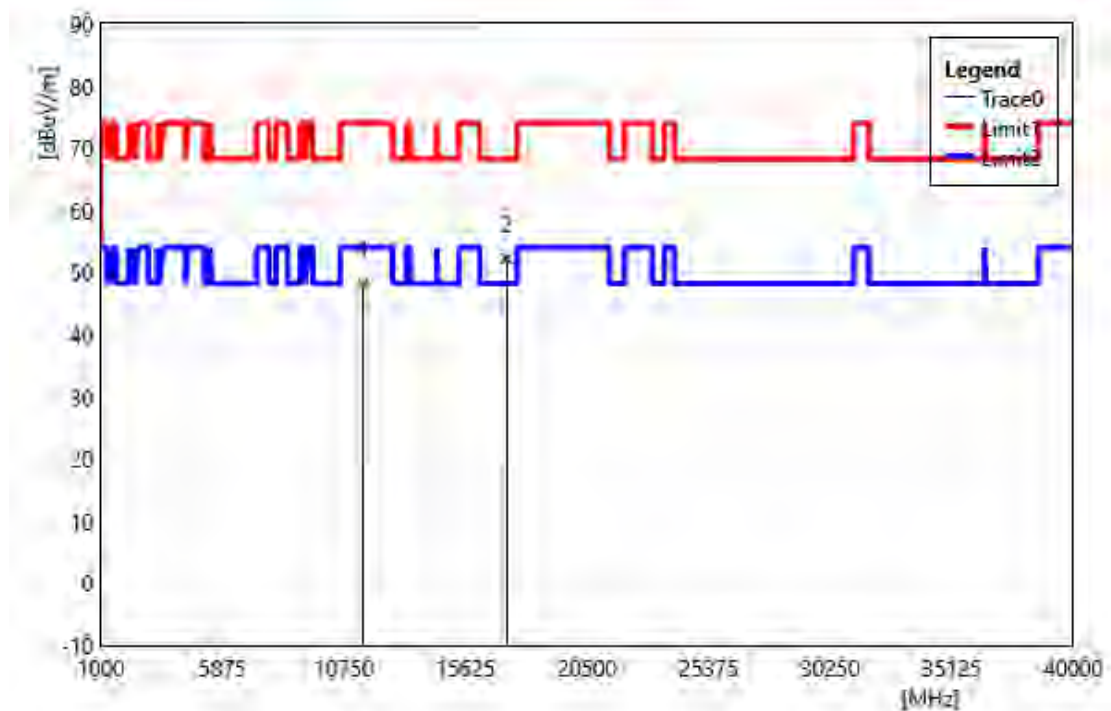


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.37	12.66	48.03	74.00	-25.97	PEAK
2	17265.00	33.42	18.73	52.15	68.20	-16.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Horizontal		
Remark:			

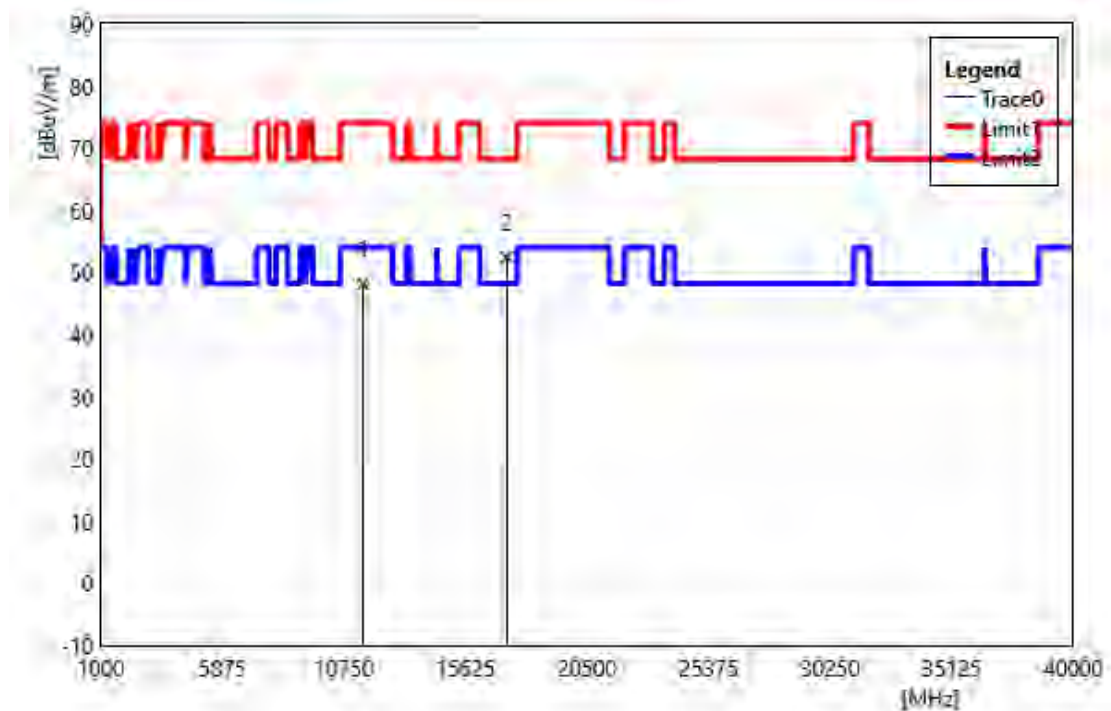


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.42	12.66	48.08	74.00	-25.92	PEAK
2	17265.00	33.72	18.73	52.45	68.20	-15.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Vertical		
Remark:			

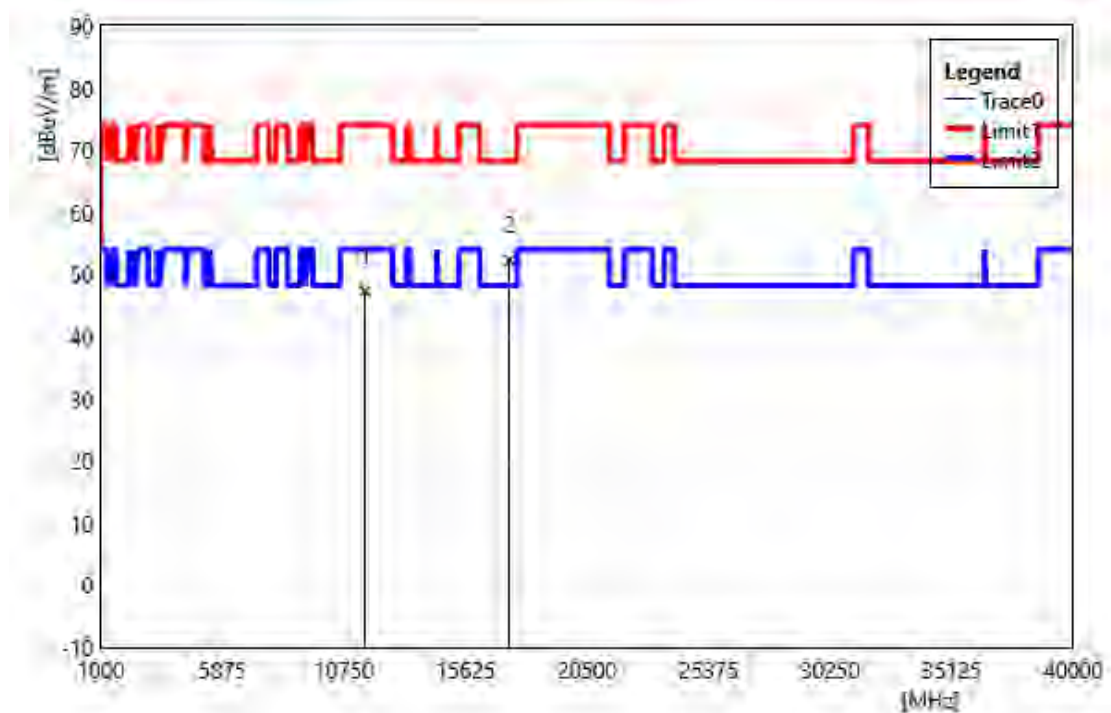


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.97	12.34	47.31	74.00	-26.69	PEAK
2	17385.00	32.75	19.52	52.27	68.20	-15.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Horizontal		
Remark:			

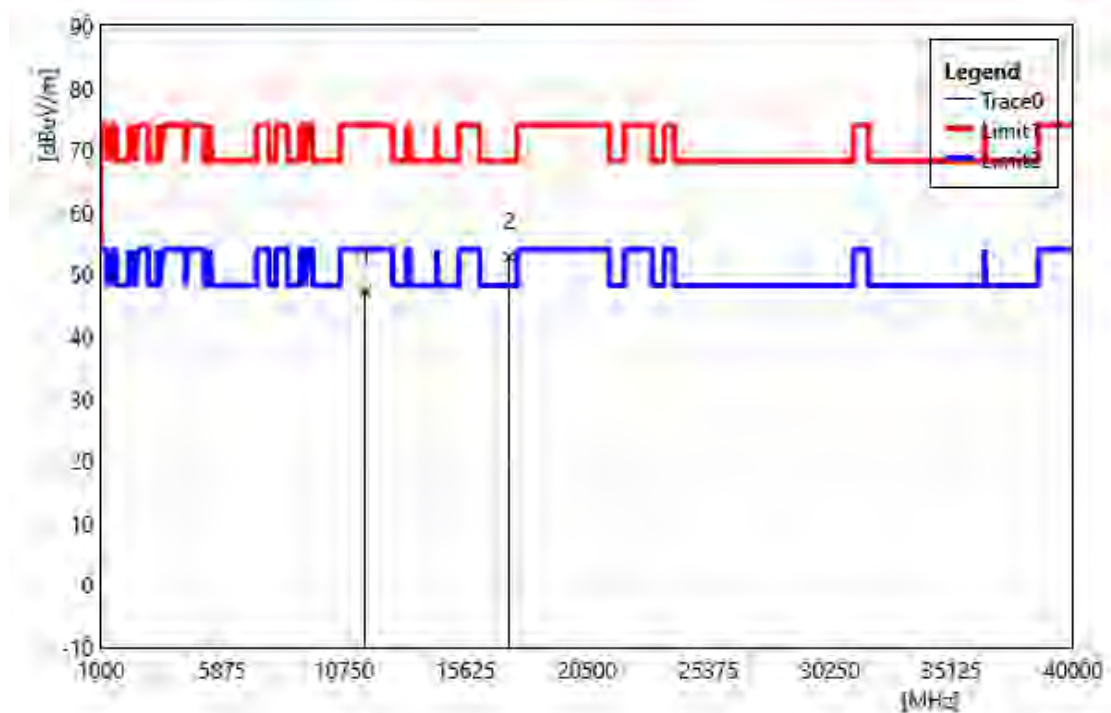


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.88	12.34	47.22	74.00	-26.78	PEAK
2	17385.00	33.28	19.52	52.80	68.20	-15.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

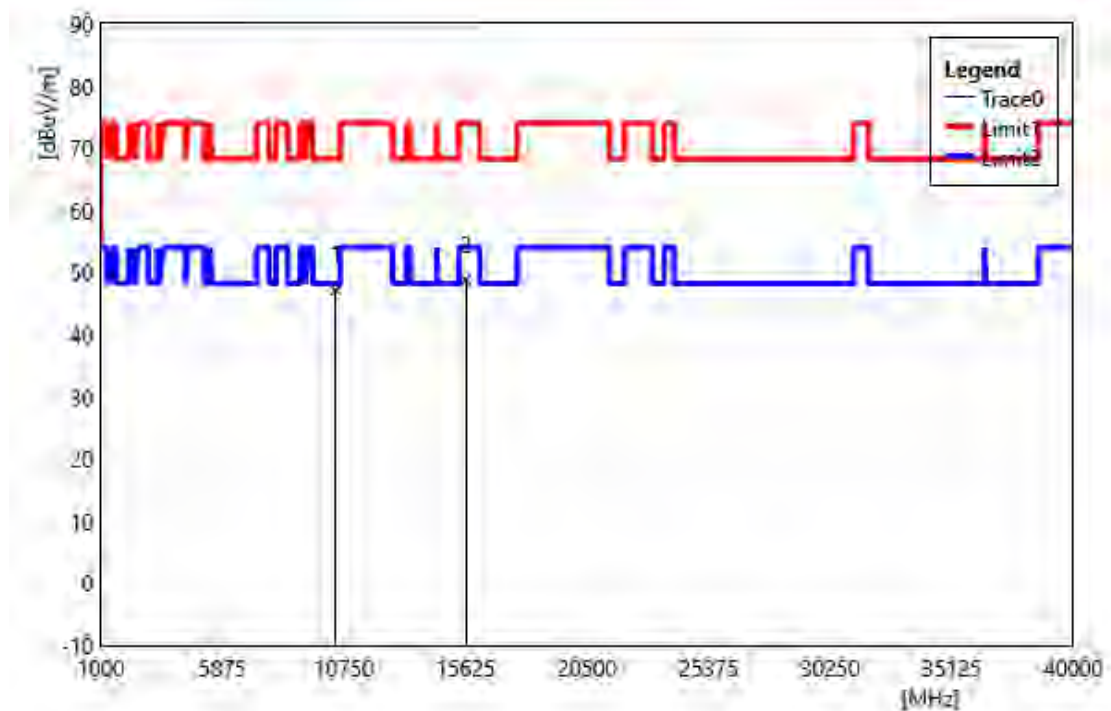


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.70	11.42	47.12	68.20	-21.08	PEAK
2	15630.00	34.91	13.92	48.83	74.00	-25.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

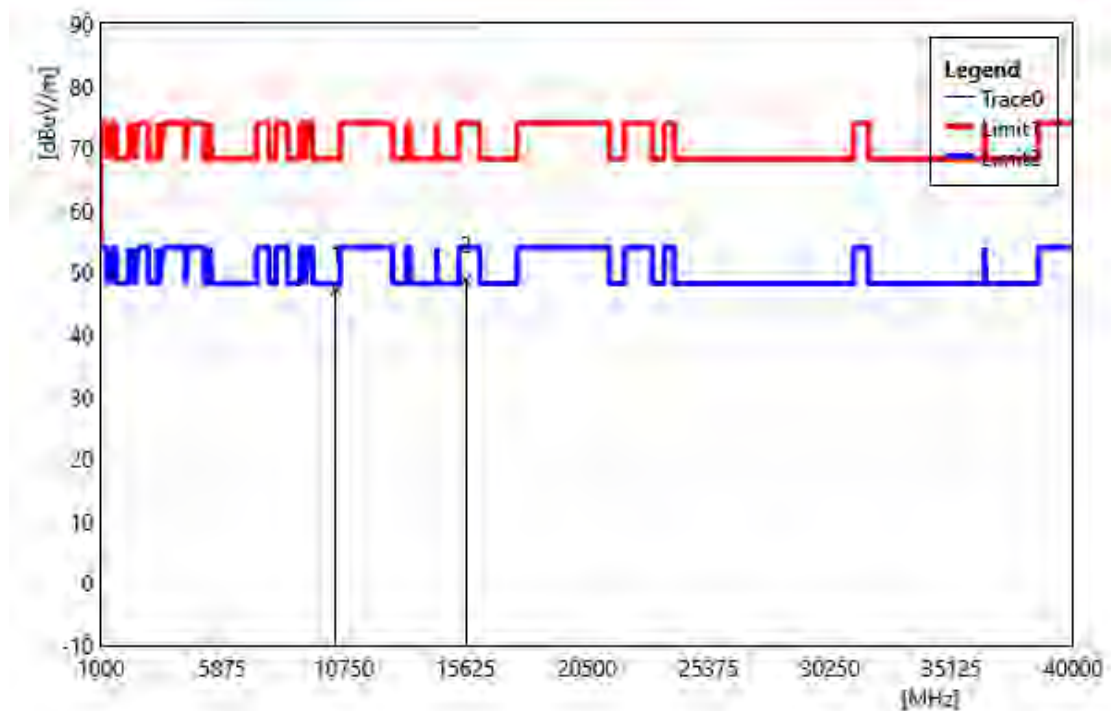


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.72	11.42	47.14	68.20	-21.06	PEAK
2	15630.00	34.84	13.92	48.76	74.00	-25.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

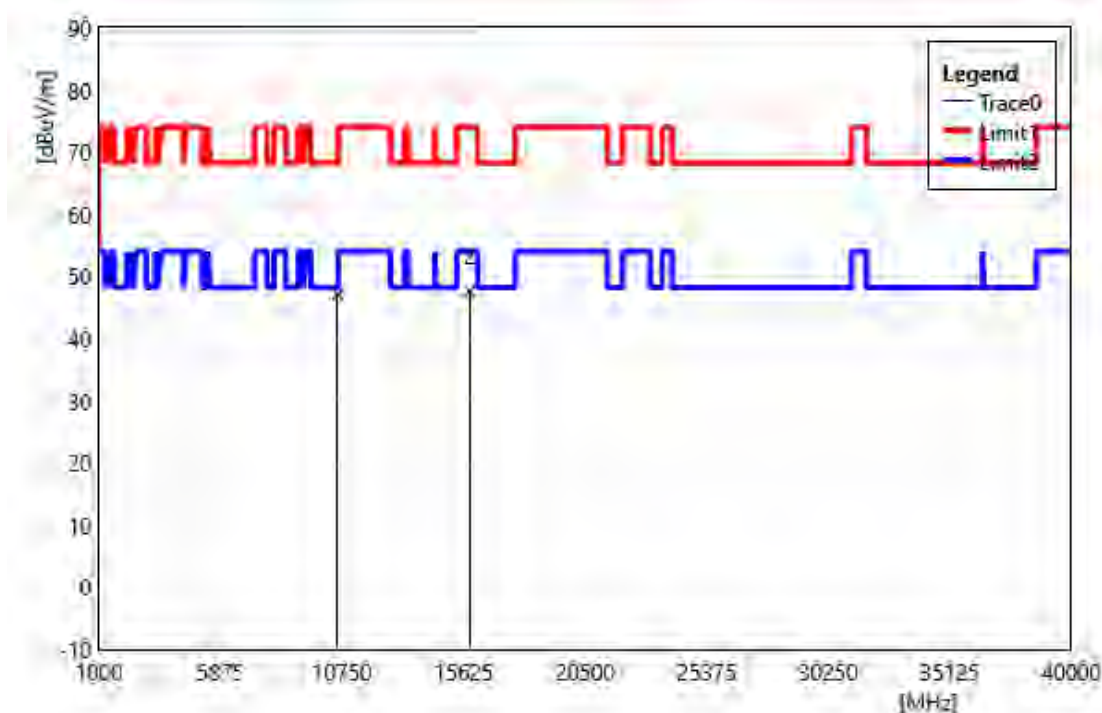


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.56	11.55	47.11	68.20	-21.09	PEAK
2	15870.00	34.13	13.50	47.63	74.00	-26.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Horizontal		
Remark:			

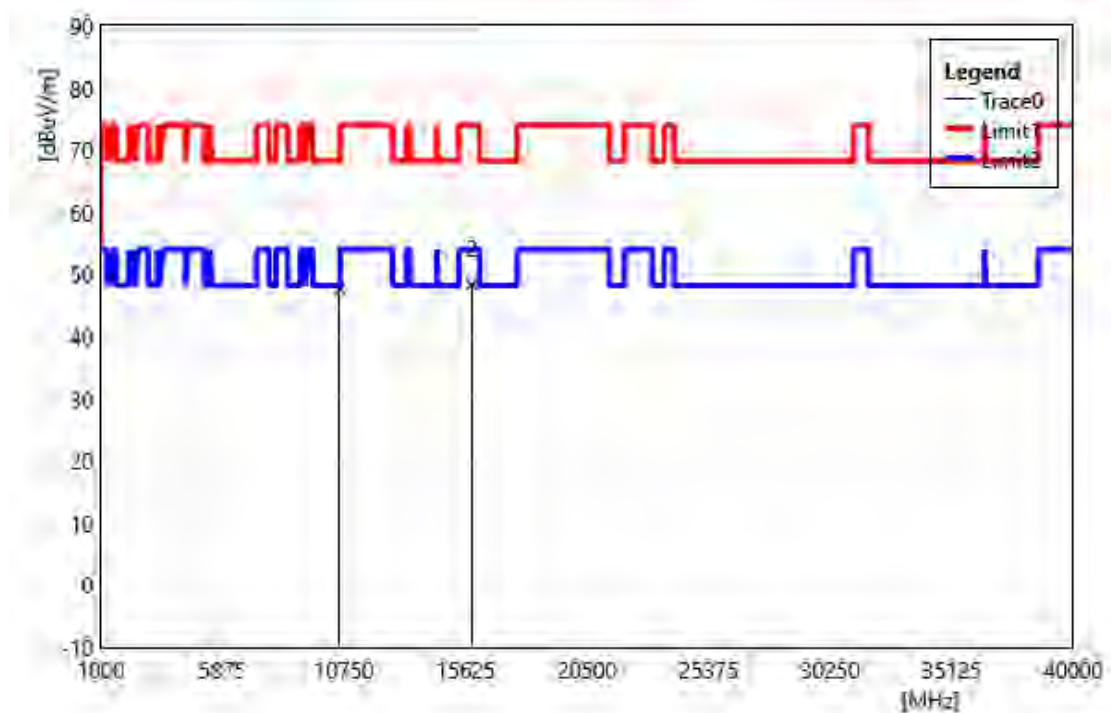


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	36.05	11.55	47.60	68.20	-20.60	PEAK
2	15870.00	34.82	13.50	48.32	74.00	-25.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

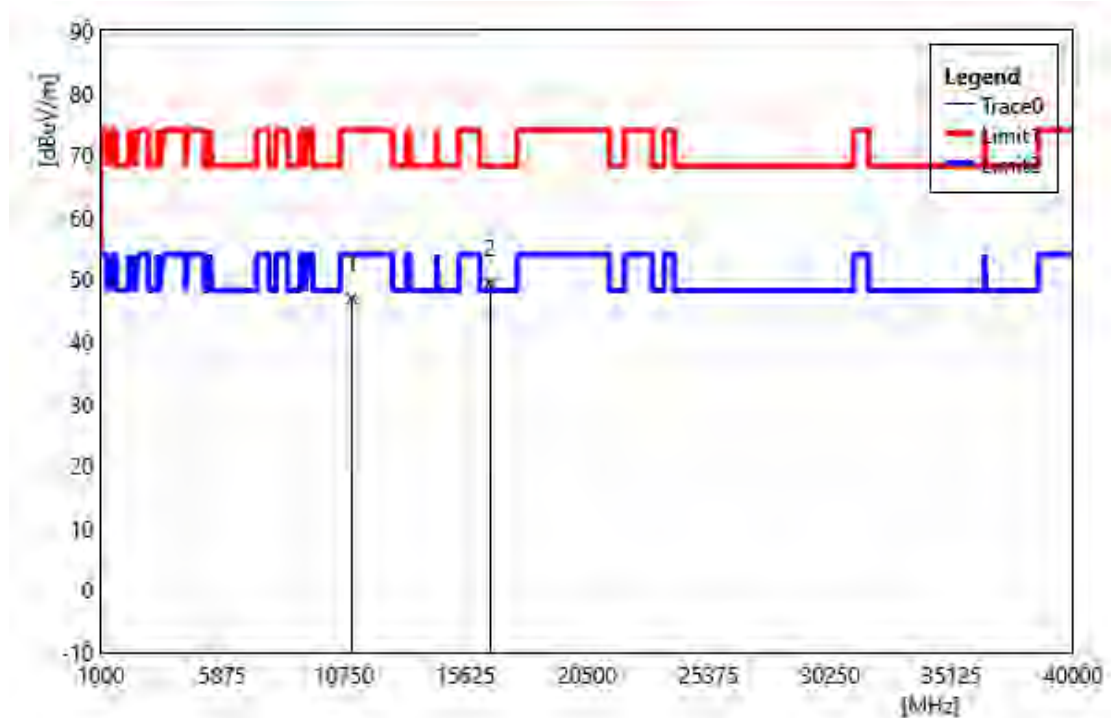


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	34.96	11.96	46.92	74.00	-27.08	PEAK
2	16590.00	34.63	14.80	49.43	68.20	-18.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

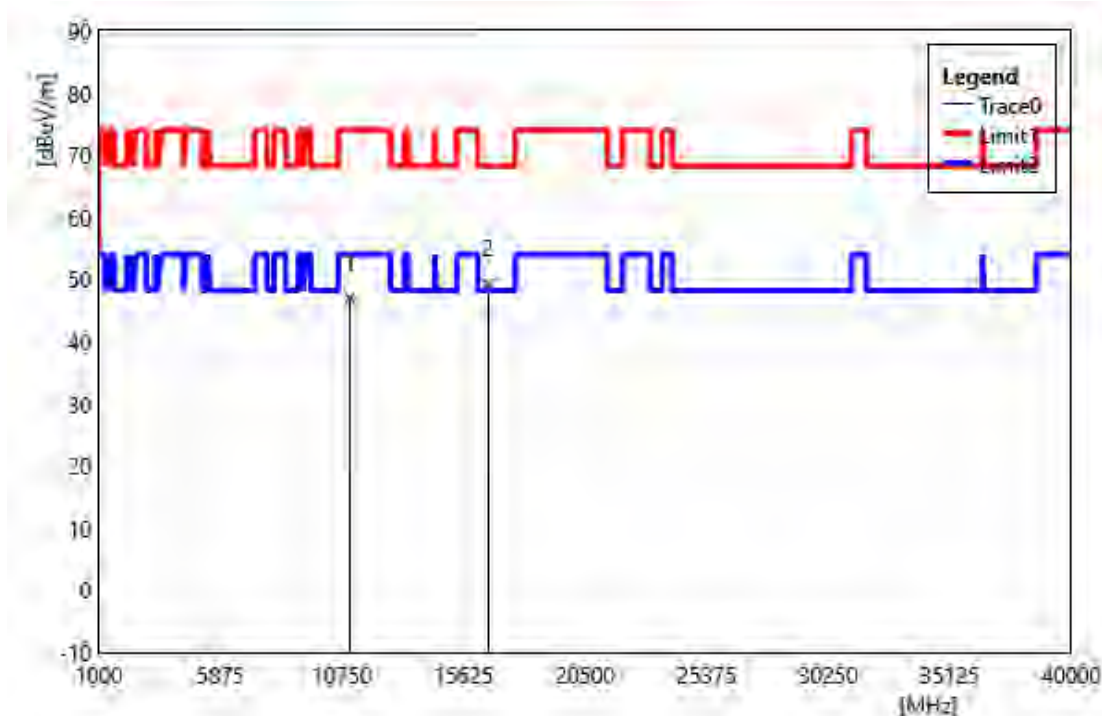


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.04	11.96	47.00	74.00	-27.00	PEAK
2	16590.00	34.42	14.80	49.22	68.20	-18.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

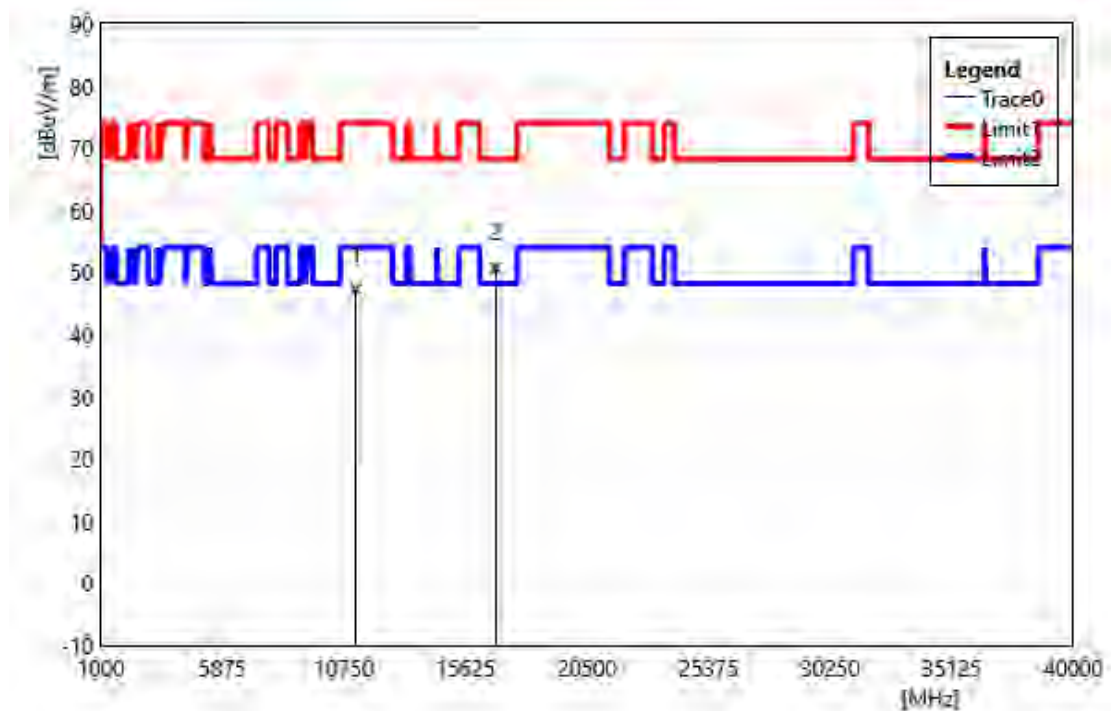


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.45	11.87	47.32	74.00	-26.68	PEAK
2	16830.00	34.57	16.11	50.68	68.20	-17.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

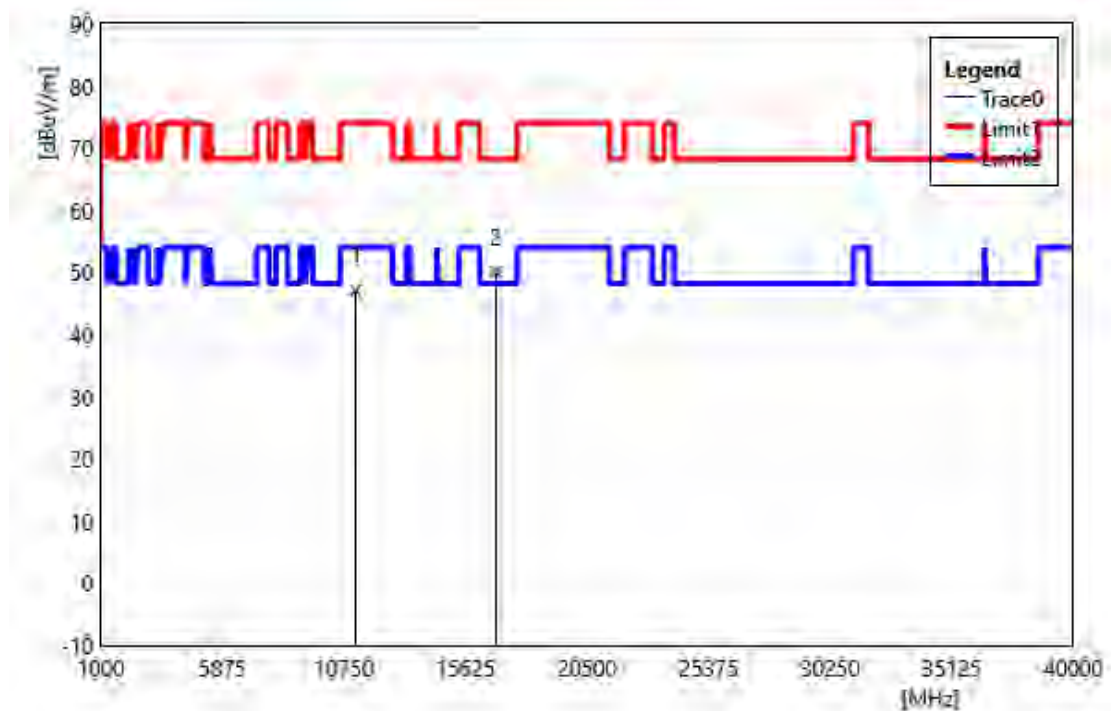


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.24	11.87	47.11	74.00	-26.89	PEAK
2	16830.00	33.96	16.11	50.07	68.20	-18.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Vertical		
Remark:			

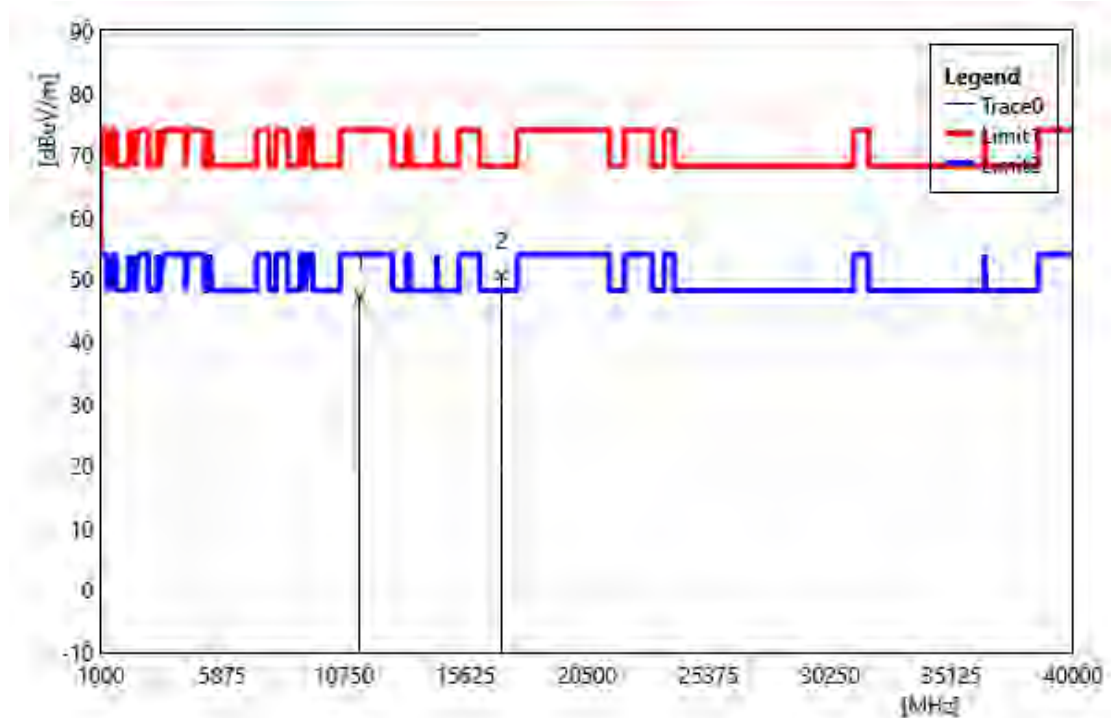


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.10	12.16	47.26	74.00	-26.74	PEAK
2	17070.00	33.47	17.18	50.65	68.20	-17.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Horizontal		
Remark:			

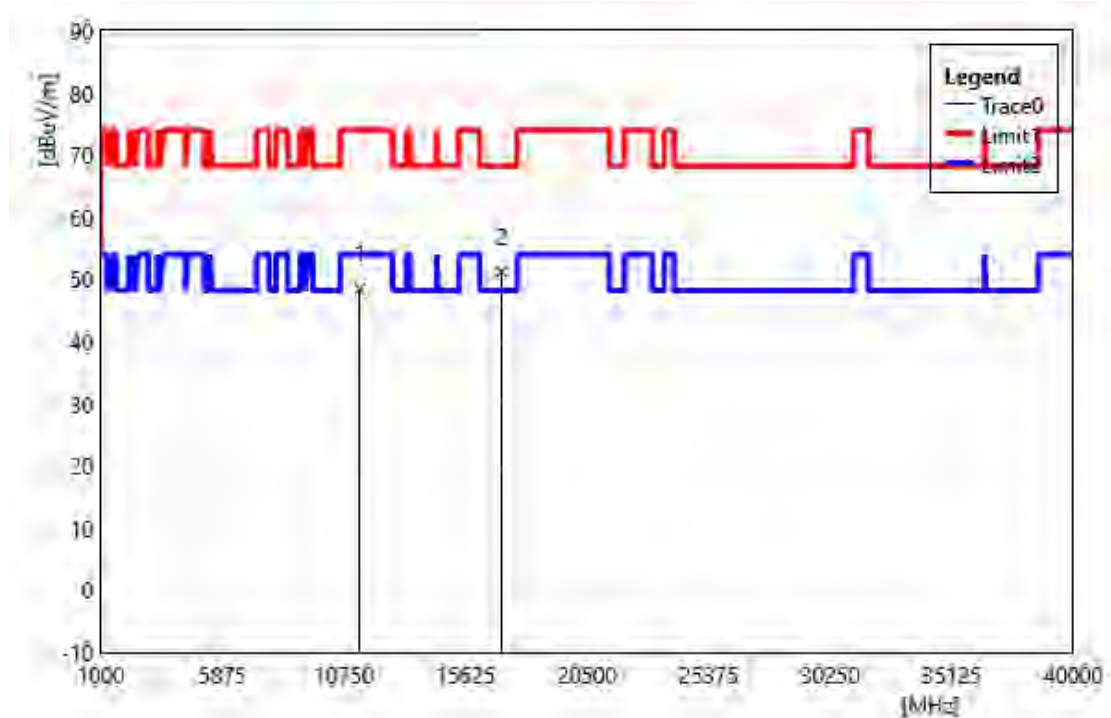


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	36.32	12.16	48.48	74.00	-25.52	PEAK
2	17070.00	34.08	17.18	51.26	68.20	-16.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

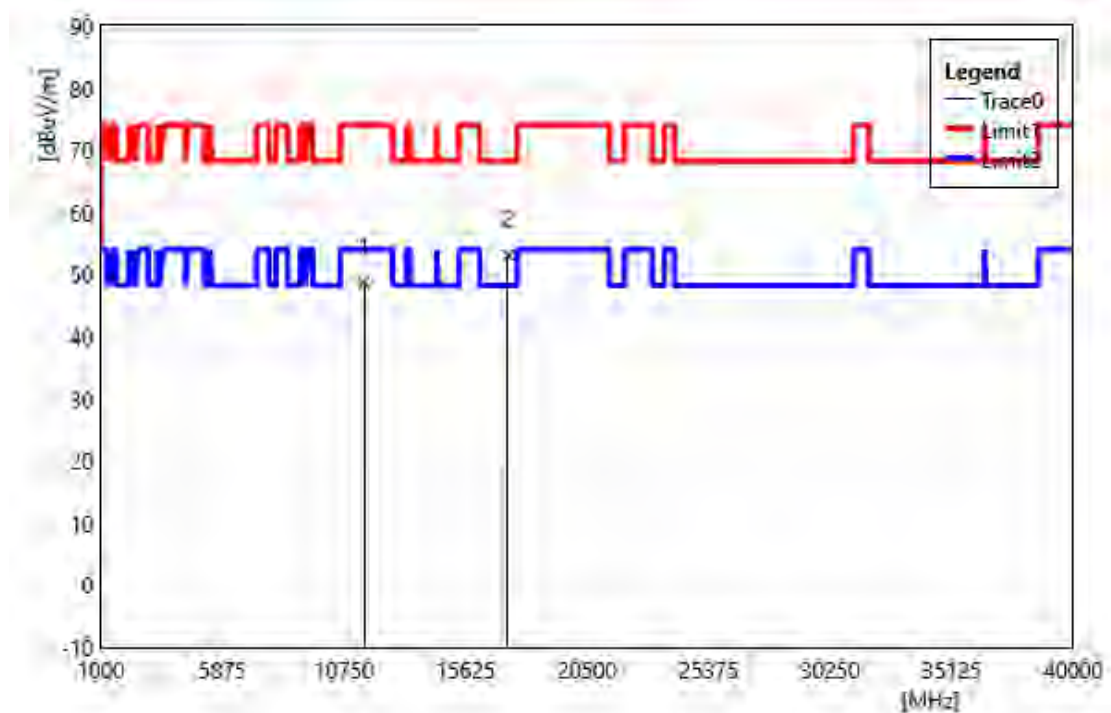


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	36.15	12.50	48.65	74.00	-25.35	PEAK
2	17325.00	33.92	19.19	53.11	68.20	-15.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

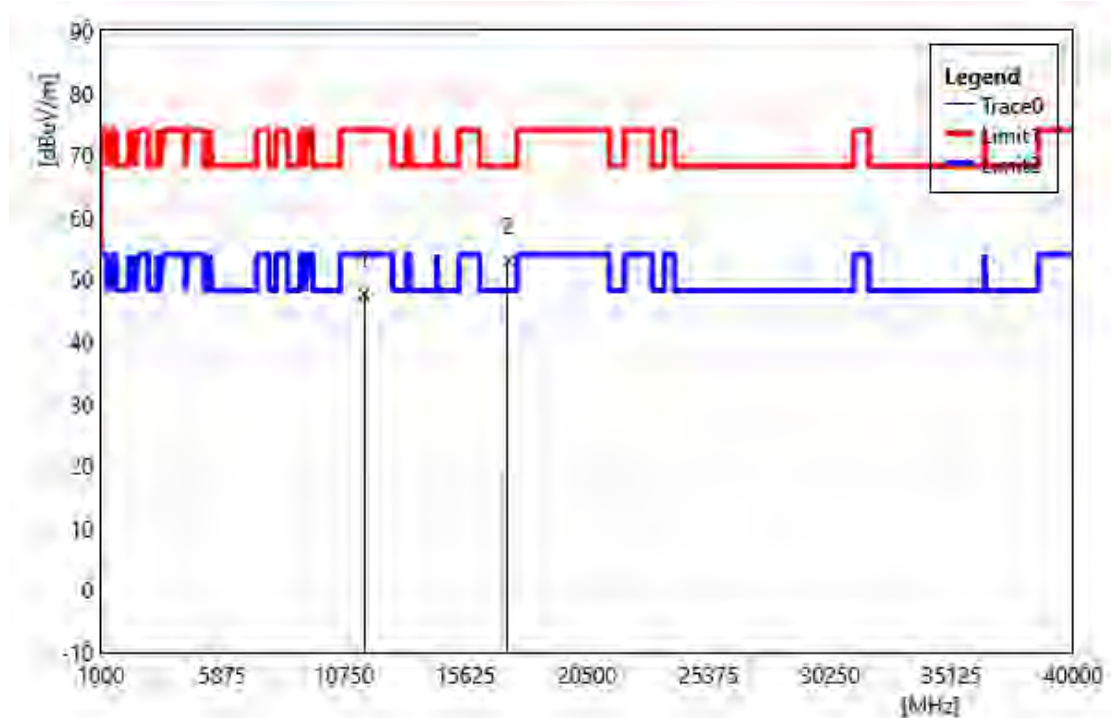


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.12	12.50	47.62	74.00	-26.38	PEAK
2	17325.00	33.77	19.19	52.96	68.20	-15.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	2.4 G+5 G+6 G+BLE		
Polarization:	Vertical		
Remark:			

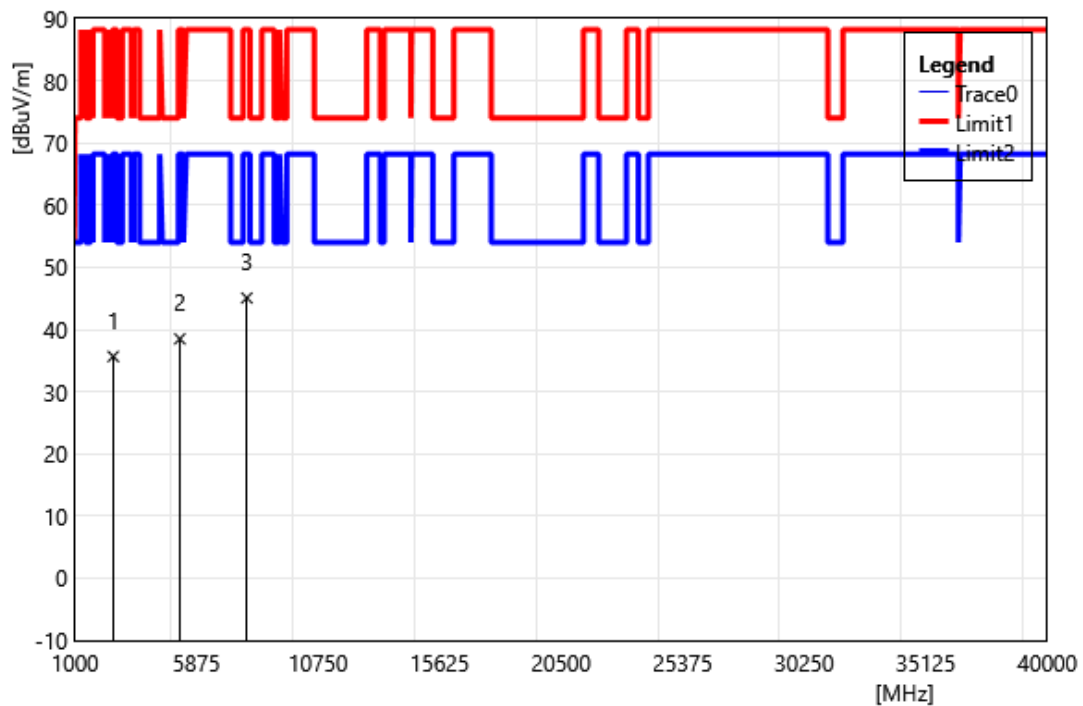

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2537.00	43.49	-7.83	35.66	88.20	-52.54	PEAK
2	5207.00	39.70	-1.20	38.50	88.20	-49.70	PEAK
3	7896.00	38.78	6.30	45.08	88.20	-43.12	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	2.4 G+5 G+6 G+BLE		
Polarization:	Horizontal		
Remark:			

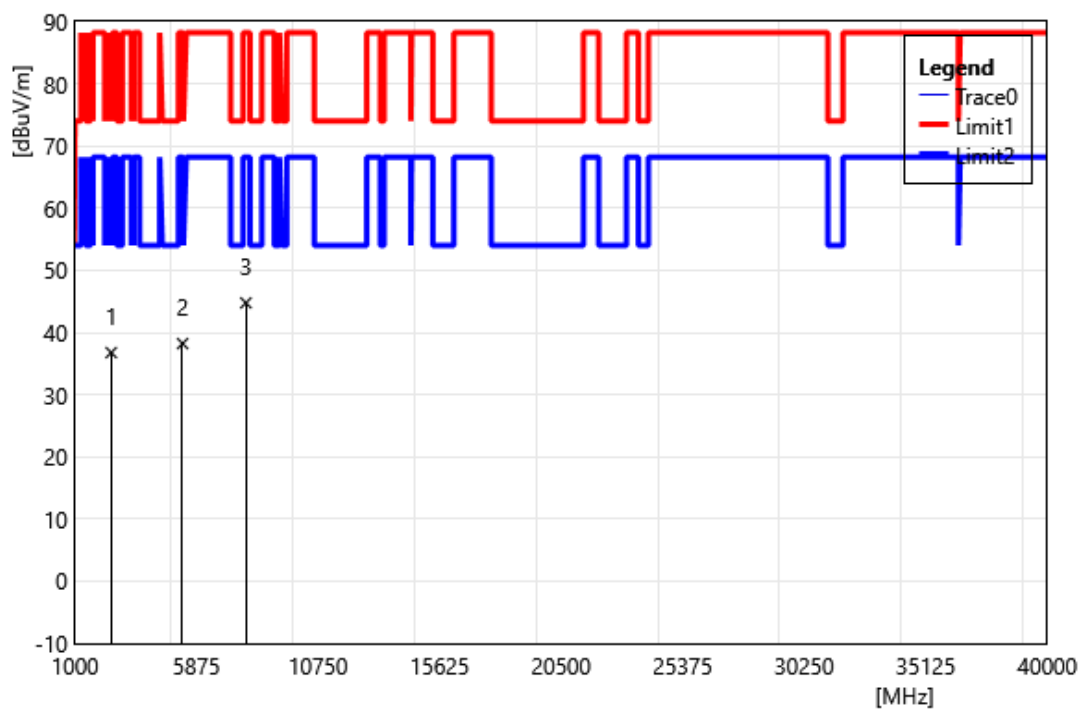

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2457.00	44.43	-7.66	36.77	88.20	-51.43	PEAK
2	5317.00	39.75	-1.53	38.22	88.20	-49.98	PEAK
3	7859.00	38.72	6.05	44.77	88.20	-43.43	PEAK


Band Edge

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

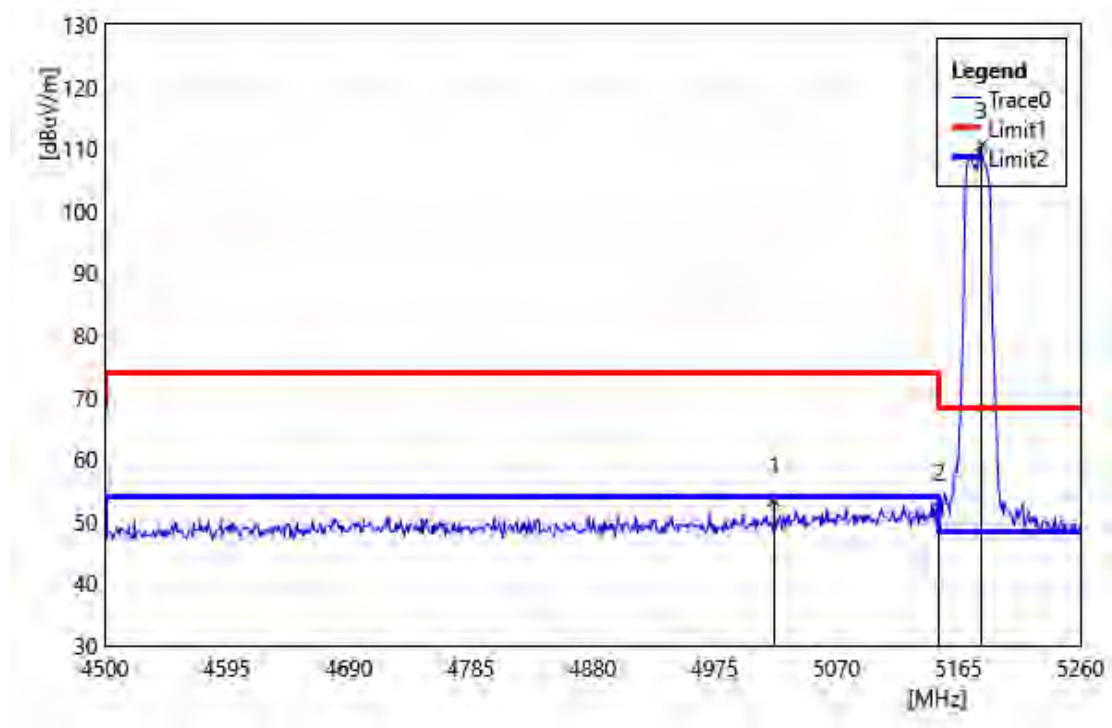


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5021.36	54.72	-1.43	53.29	74.00	-20.71	PEAK
2	5150.00	52.94	-0.91	52.03	74.00	-21.97	PEAK
3	5183.24	111.63	-1.07	110.56	68.20	42.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

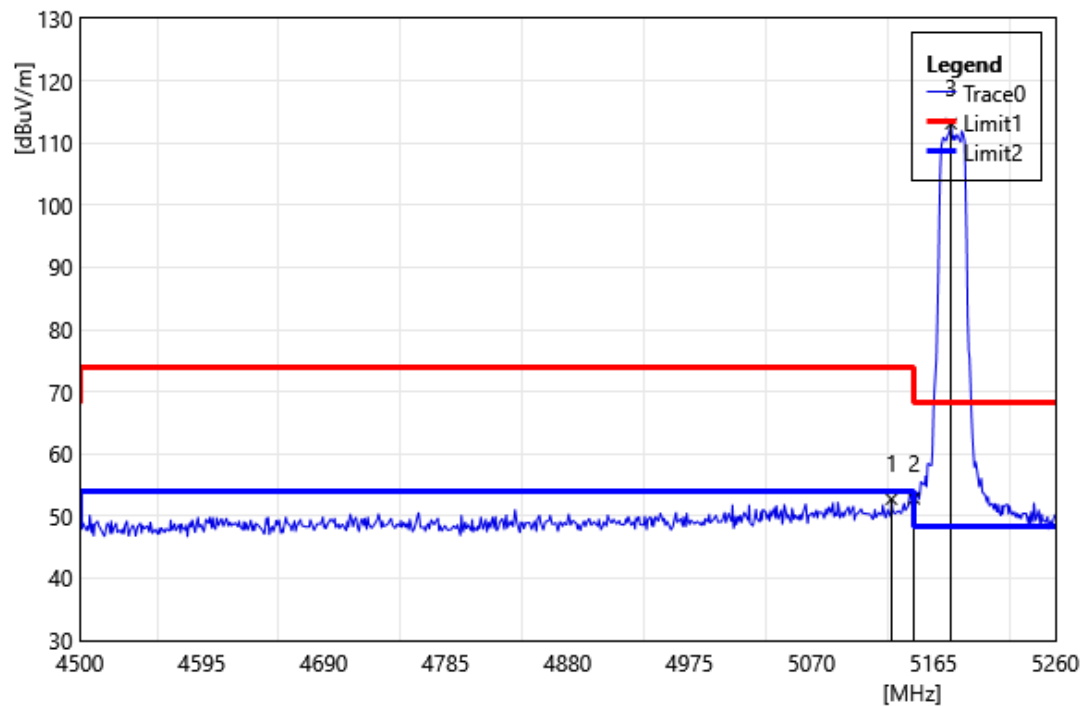


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5132.32	53.61	-0.89	52.72	74.00	-21.28	PEAK
2	5150.00	53.71	-0.91	52.80	74.00	-21.20	PEAK
3	5178.68	114.15	-1.05	113.10	68.20	44.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

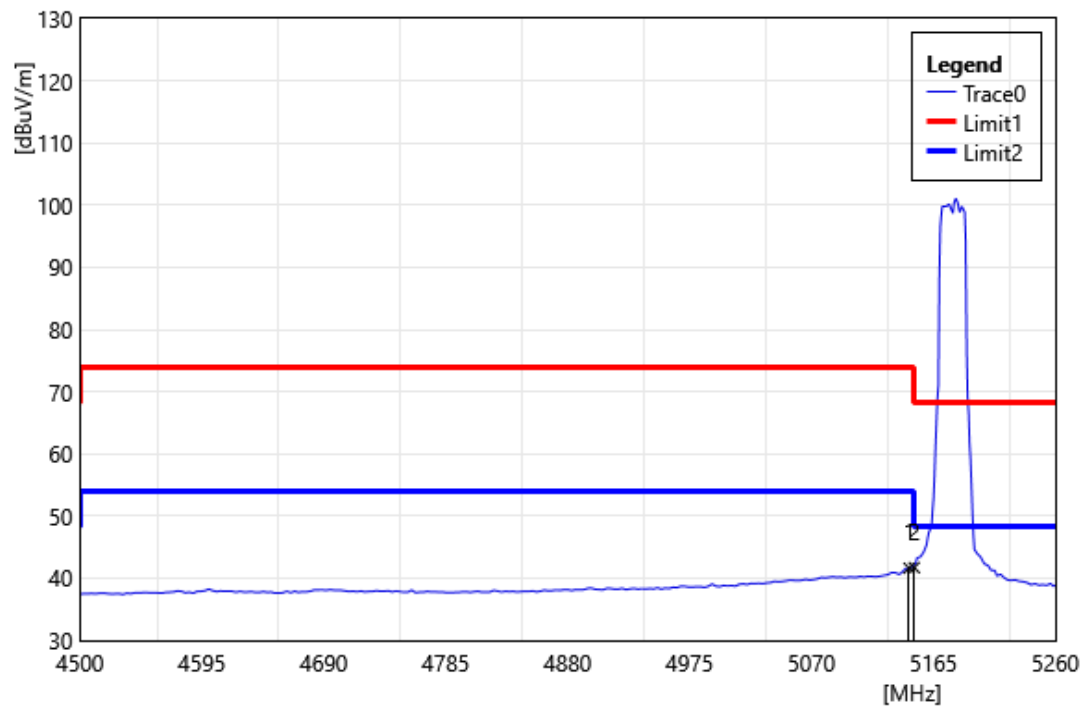


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	42.52	-0.90	41.62	54.00	-12.38	AVG
2	5150.00	42.62	-0.91	41.71	54.00	-12.29	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

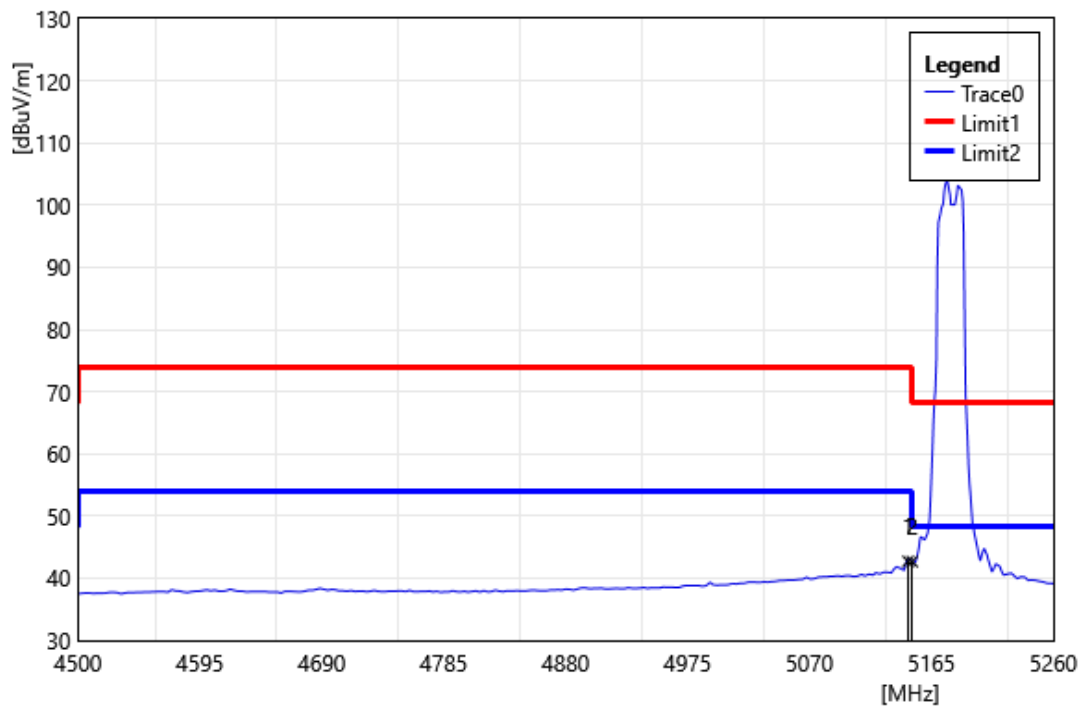


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	43.62	-0.90	42.72	54.00	-11.28	AVG
2	5150.00	43.58	-0.91	42.67	54.00	-11.33	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Vertical		
Remark:			

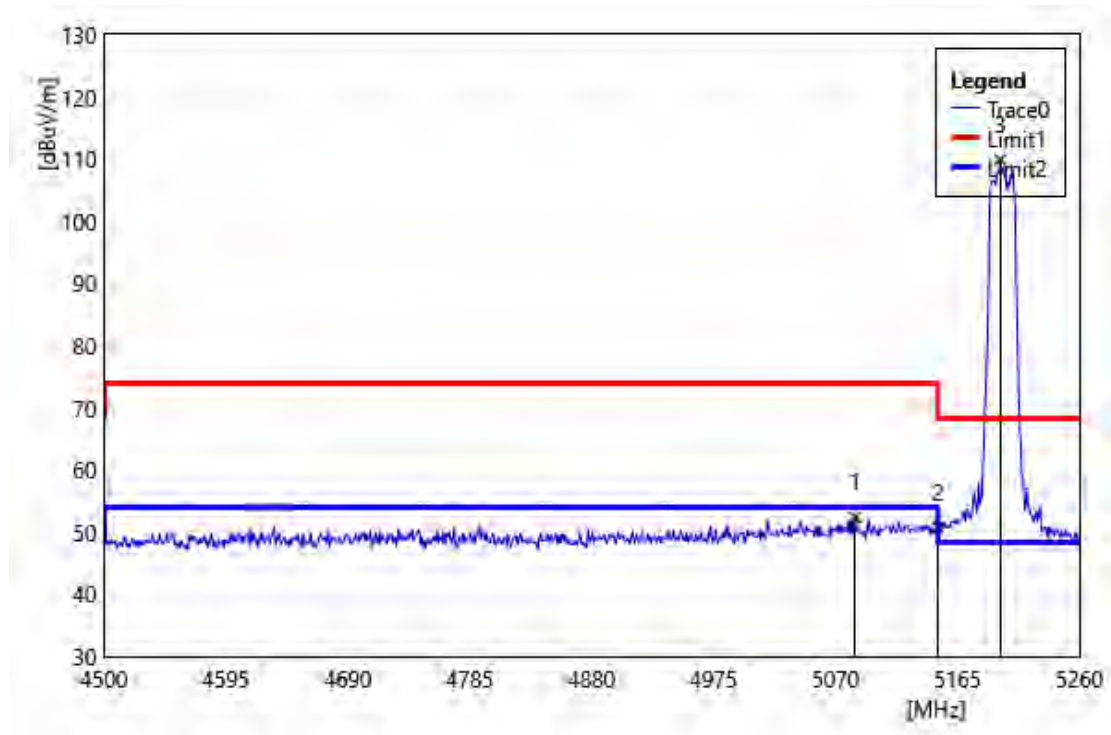


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5085.20	53.29	-0.94	52.35	74.00	-21.65	PEAK
2	5150.00	51.62	-0.91	50.71	74.00	-23.29	PEAK
3	5198.44	111.02	-1.15	109.87	68.20	41.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Horizontal		
Remark:			

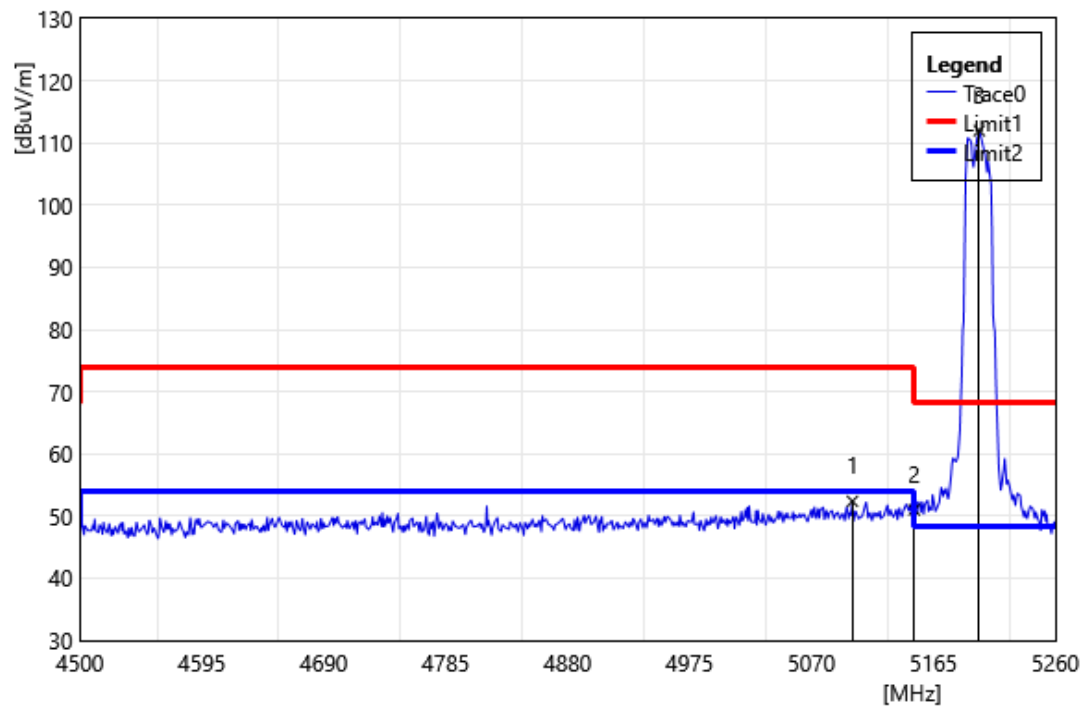


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5101.92	53.24	-0.86	52.38	74.00	-21.62	PEAK
2	5150.00	51.92	-0.91	51.01	74.00	-22.99	PEAK
3	5200.72	113.15	-1.16	111.99	68.20	43.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Vertical		
Remark:			

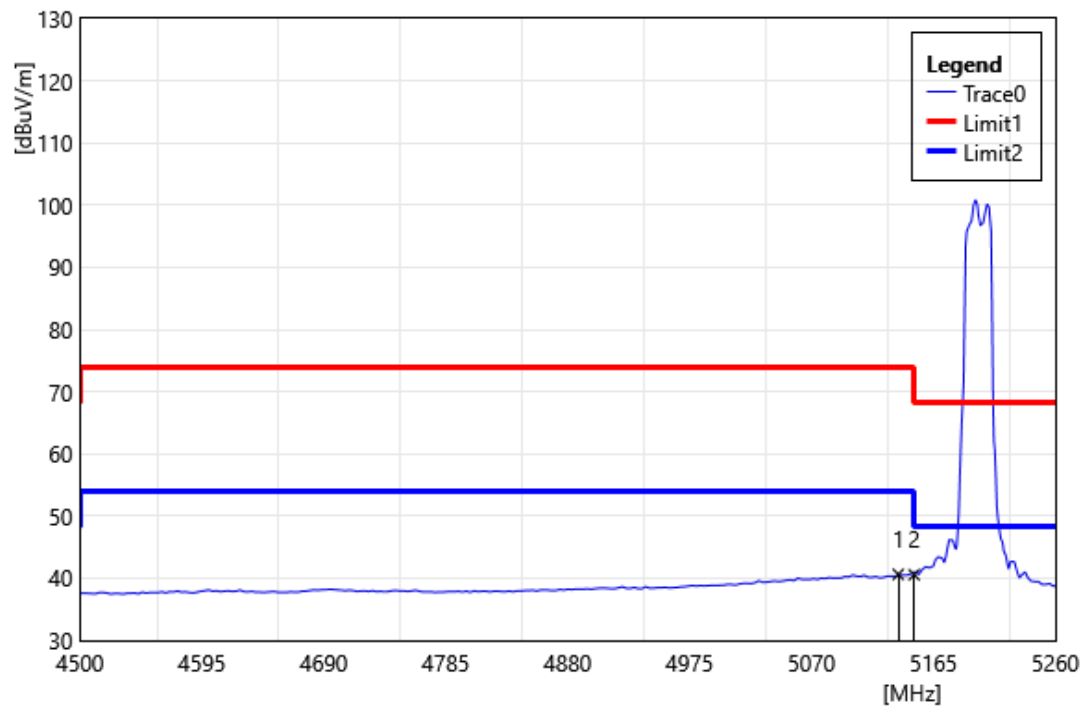


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	41.52	-0.90	40.62	54.00	-13.38	AVG
2	5150.00	41.47	-0.91	40.56	54.00	-13.44	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Horizontal		
Remark:			

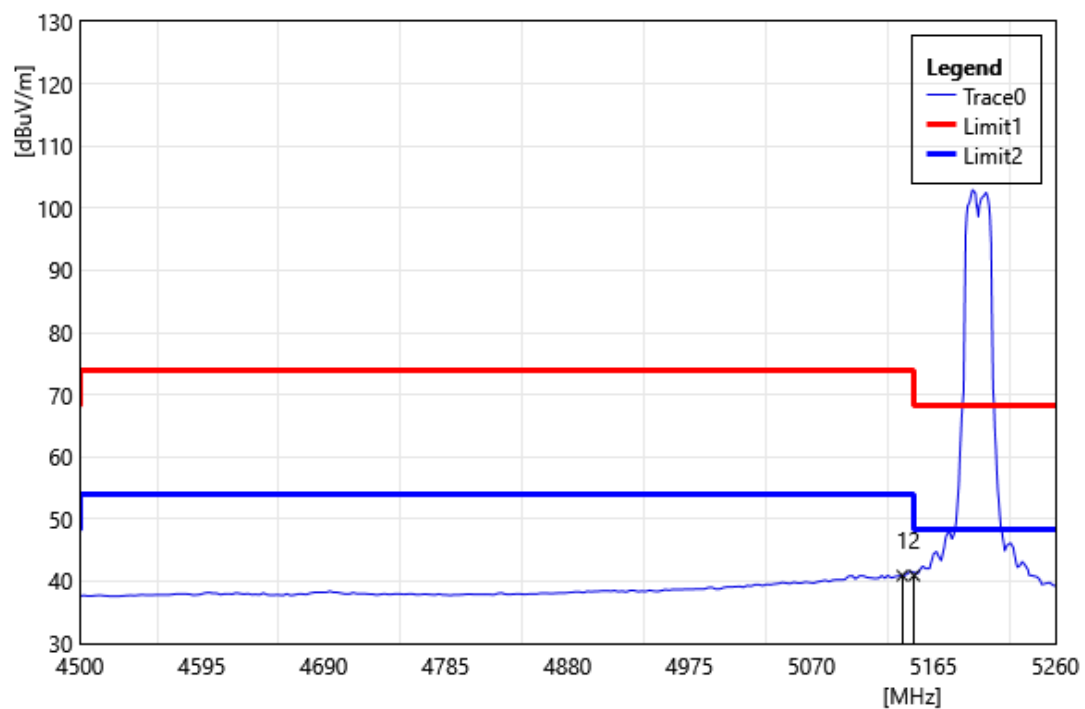


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	41.80	-0.90	40.90	54.00	-13.10	AVG
2	5150.00	41.85	-0.91	40.94	54.00	-13.06	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Vertical		
Remark:			

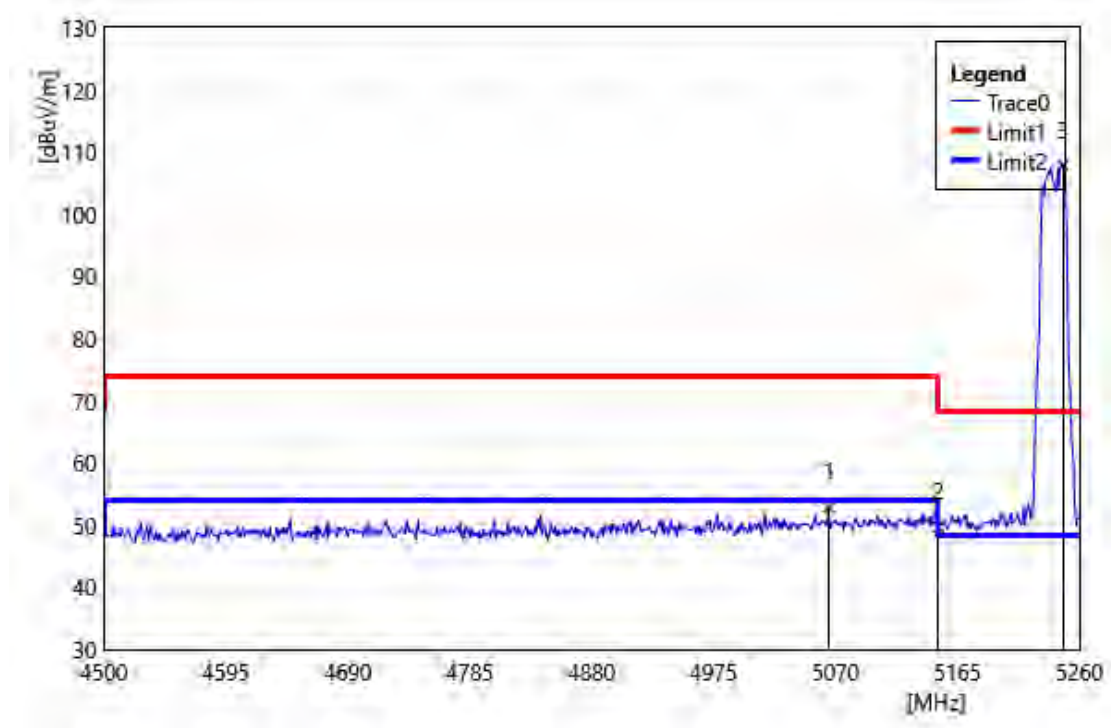


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5064.68	53.95	-1.04	52.91	74.00	-21.09	PEAK
2	5150.00	50.62	-0.91	49.71	74.00	-24.29	PEAK
3	5247.08	109.41	-1.48	107.93	68.20	39.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Horizontal		
Remark:			

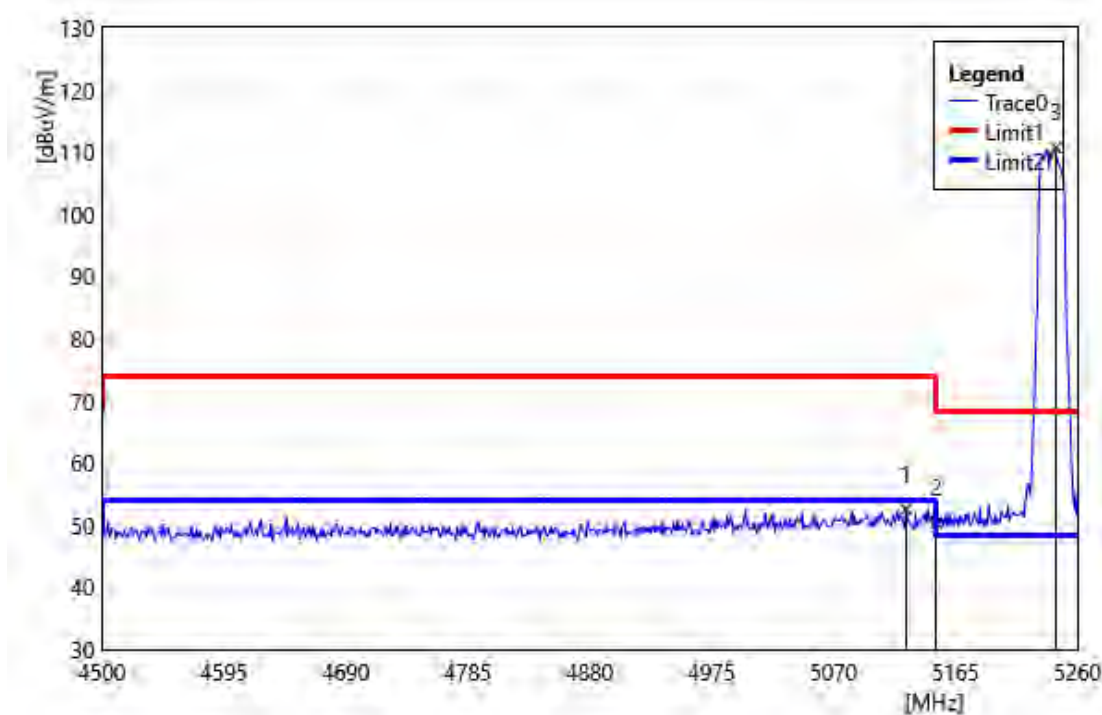


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5126.24	53.45	-0.89	52.56	74.00	-21.44	PEAK
2	5150.00	51.29	-0.91	50.38	74.00	-23.62	PEAK
3	5243.28	112.14	-1.45	110.69	68.20	42.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Vertical		
Remark:			

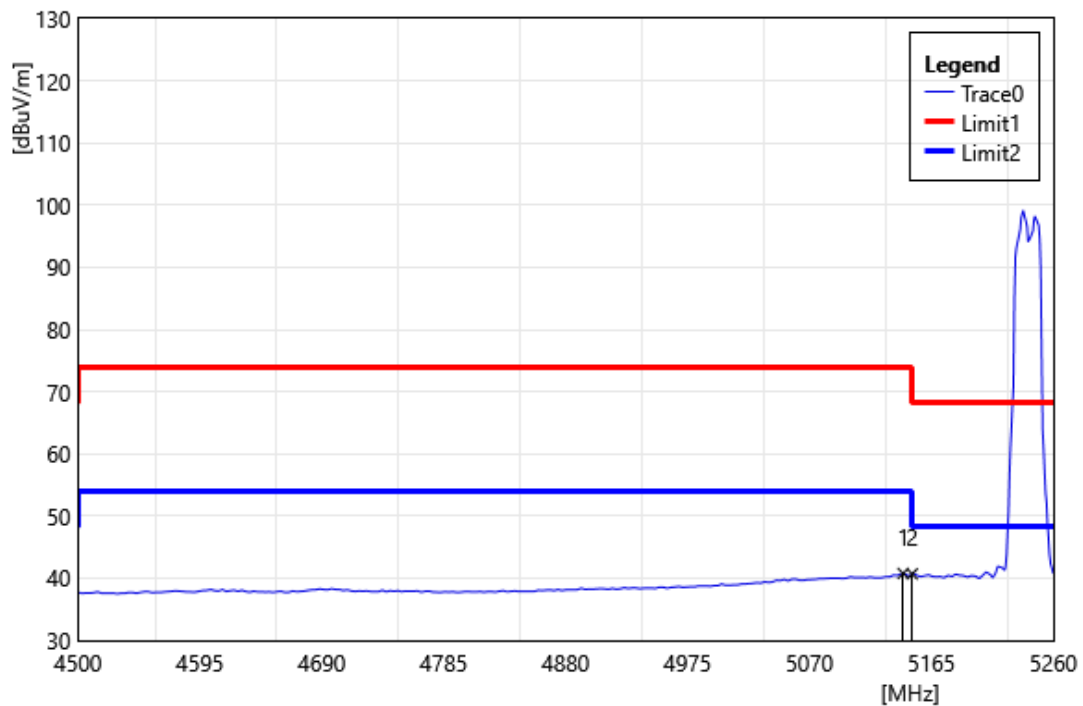


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	41.68	-0.90	40.78	54.00	-13.22	AVG
2	5150.00	41.60	-0.91	40.69	54.00	-13.31	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Horizontal		
Remark:			

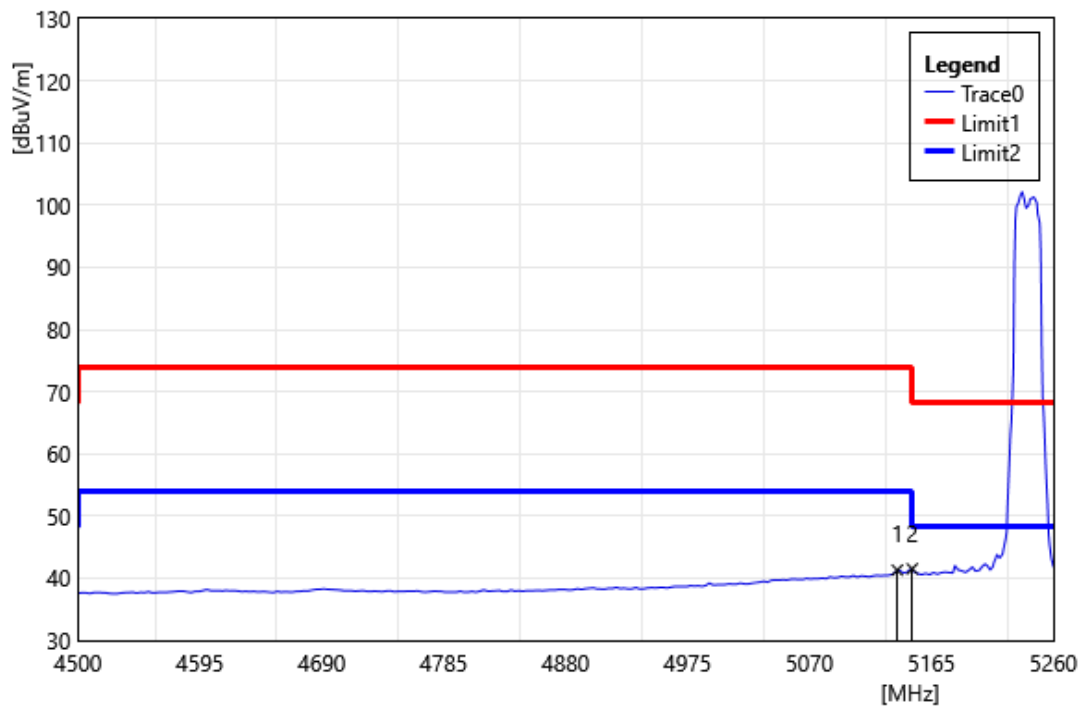


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5138.40	42.20	-0.90	41.30	54.00	-12.70	AVG
2	5150.00	42.42	-0.91	41.51	54.00	-12.49	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Vertical		
Remark:			

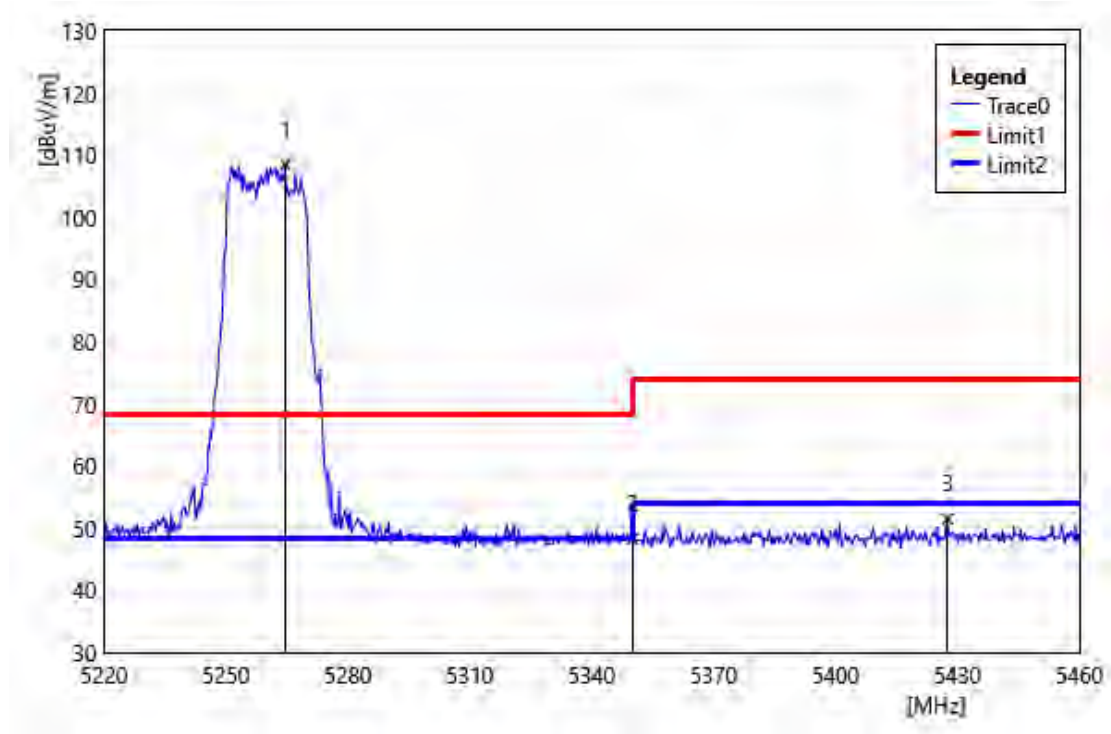


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5264.64	109.98	-1.54	108.44	68.20	40.24	PEAK
2	5350.00	49.53	-1.29	48.24	74.00	-25.76	PEAK
3	5427.60	52.22	-0.74	51.48	74.00	-22.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Horizontal		
Remark:			

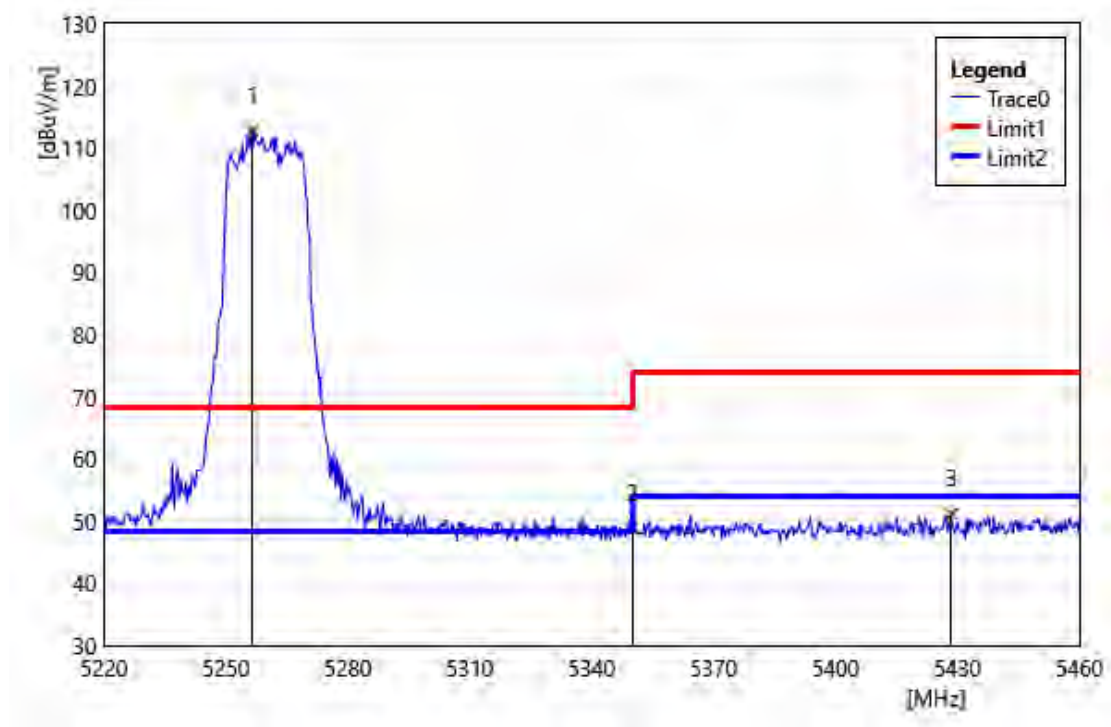


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5256.48	114.36	-1.52	112.84	68.20	44.64	PEAK
2	5350.00	50.15	-1.29	48.86	74.00	-25.14	PEAK
3	5428.56	51.88	-0.74	51.14	74.00	-22.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Vertical		
Remark:			

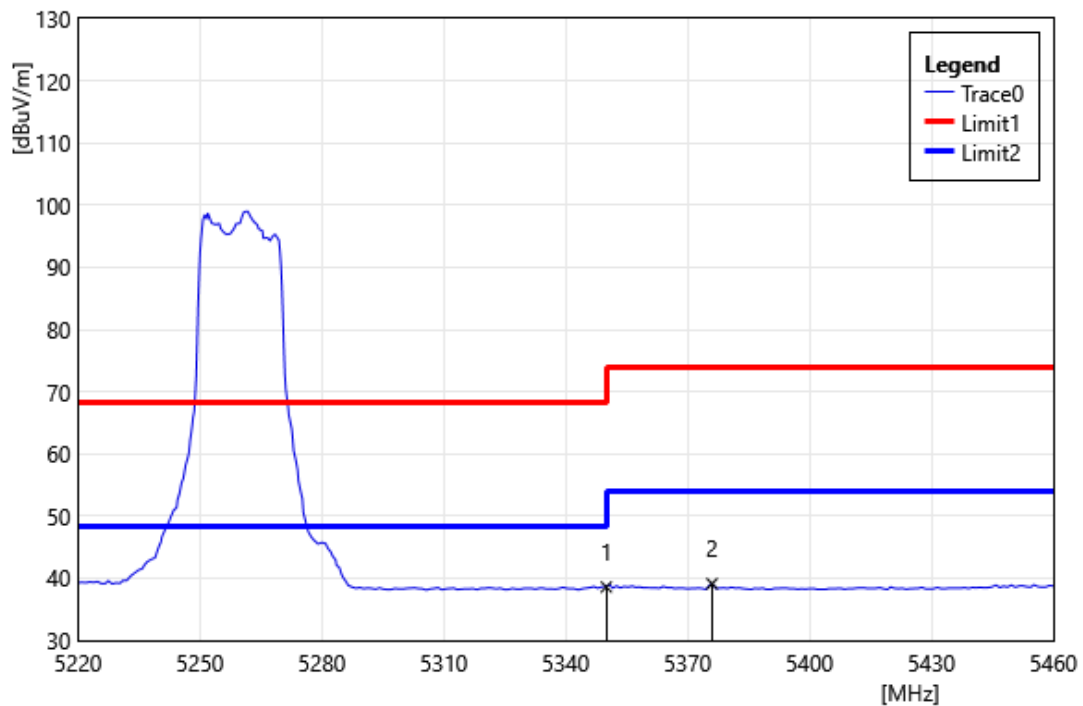


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	39.88	-1.29	38.59	54.00	-15.41	AVG
2	5376.00	40.23	-1.11	39.12	54.00	-14.88	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Horizontal		
Remark:			

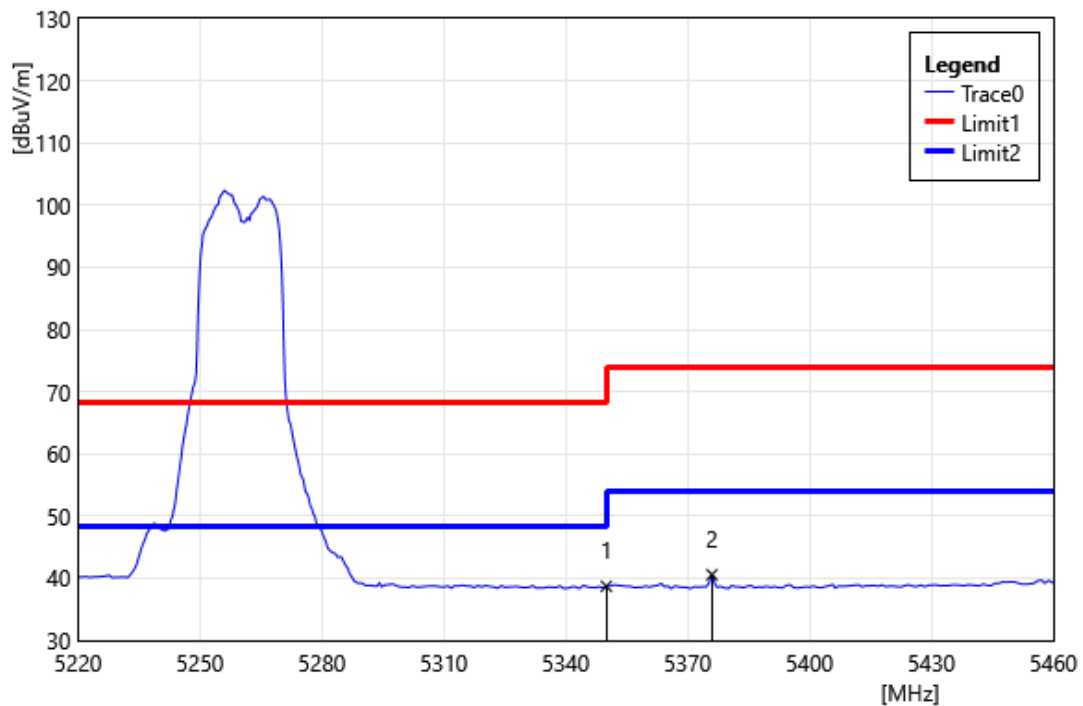


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	39.99	-1.29	38.69	54.00	-15.31	AVG
2	5376.00	41.68	-1.11	40.57	54.00	-13.43	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Vertical		
Remark:			

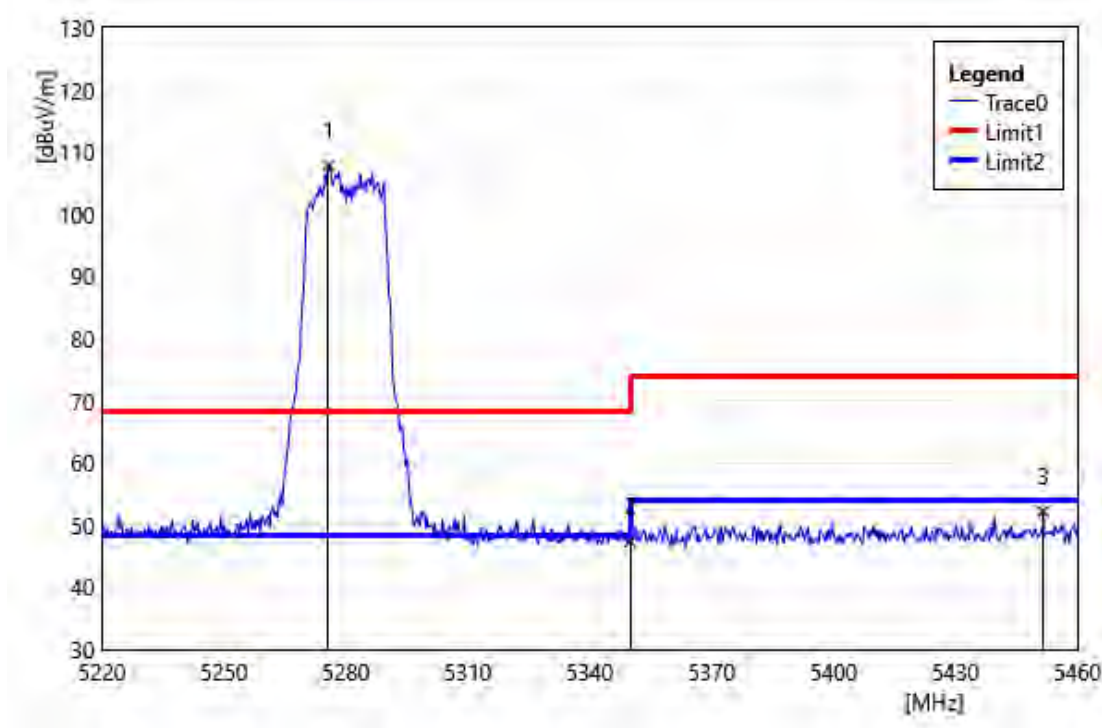


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.68	109.42	-1.58	107.84	68.20	39.64	PEAK
2	5350.00	48.67	-1.29	47.38	74.00	-26.62	PEAK
3	5451.60	52.77	-0.58	52.19	74.00	-21.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Horizontal		
Remark:			

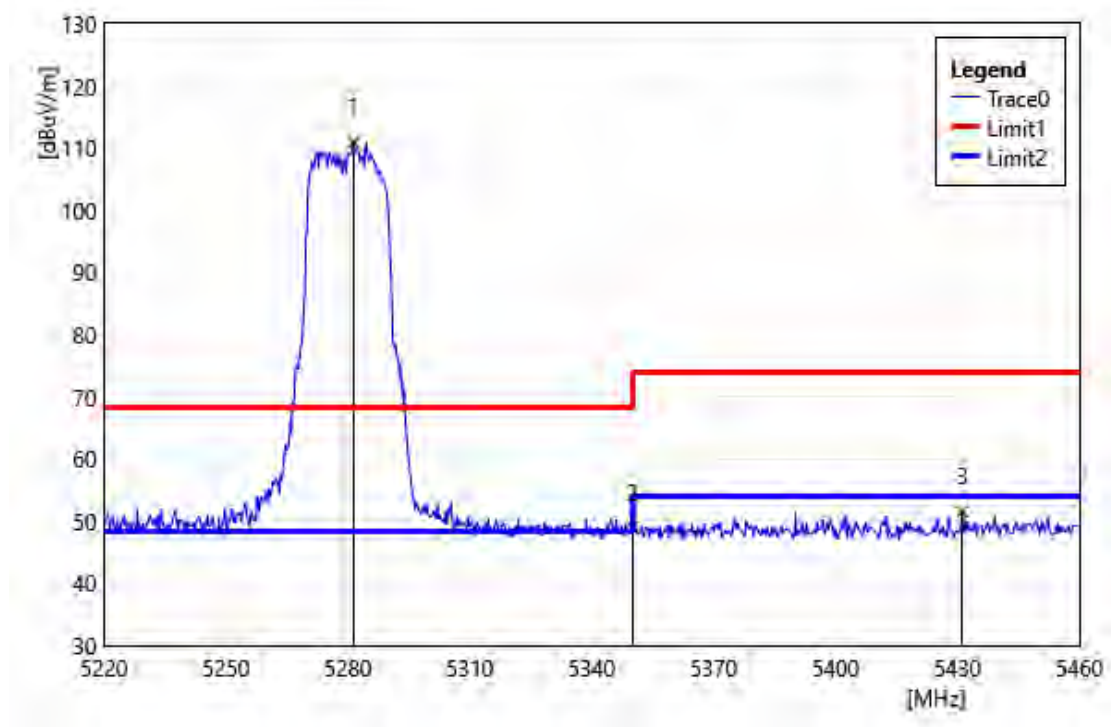


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.44	112.60	-1.59	111.01	68.20	42.81	PEAK
2	5350.00	50.31	-1.29	49.02	74.00	-24.98	PEAK
3	5431.20	52.22	-0.72	51.50	74.00	-22.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Vertical		
Remark:			

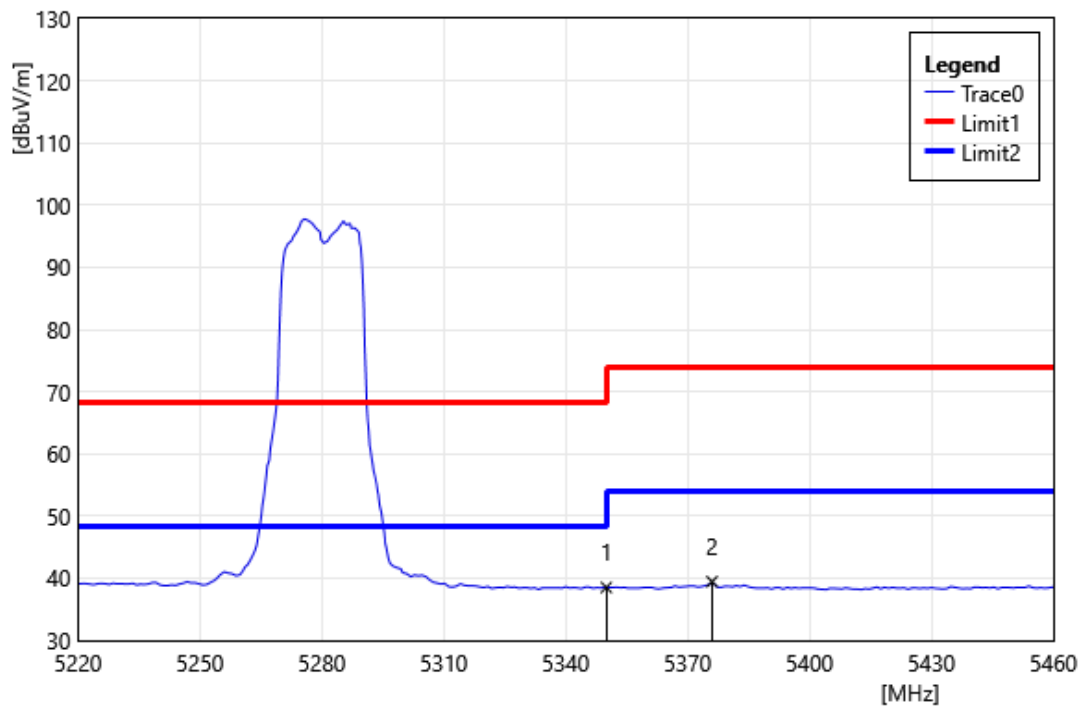


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	39.80	-1.29	38.51	54.00	-15.49	AVG
2	5376.00	40.56	-1.11	39.45	54.00	-14.55	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Horizontal		
Remark:			

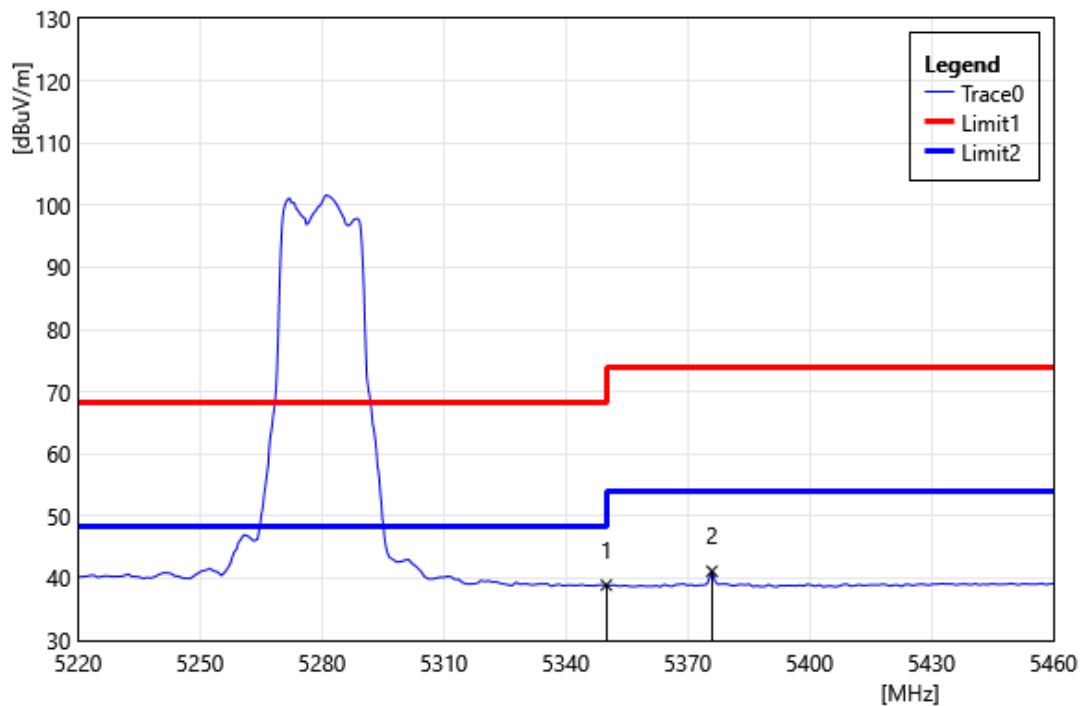


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.18	-1.29	38.89	54.00	-15.11	AVG
2	5376.00	42.24	-1.11	41.13	54.00	-12.87	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

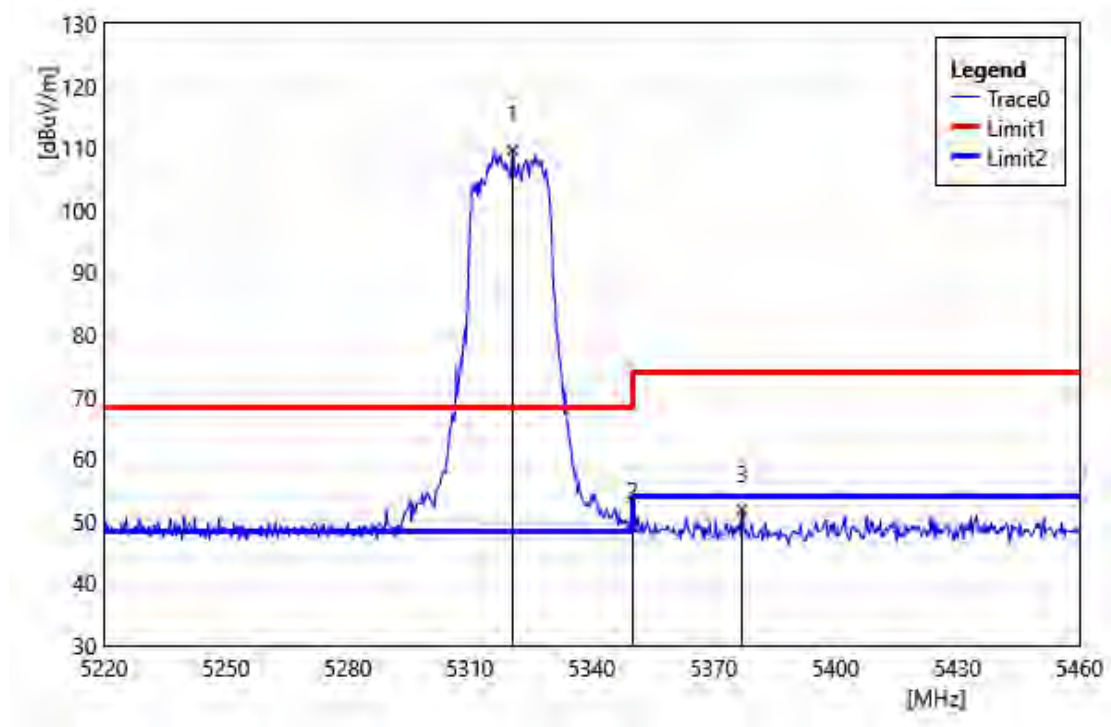


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5320.56	111.22	-1.50	109.72	68.20	41.52	PEAK
2	5350.00	50.45	-1.29	49.16	74.00	-24.84	PEAK
3	5376.96	52.91	-1.10	51.81	74.00	-22.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

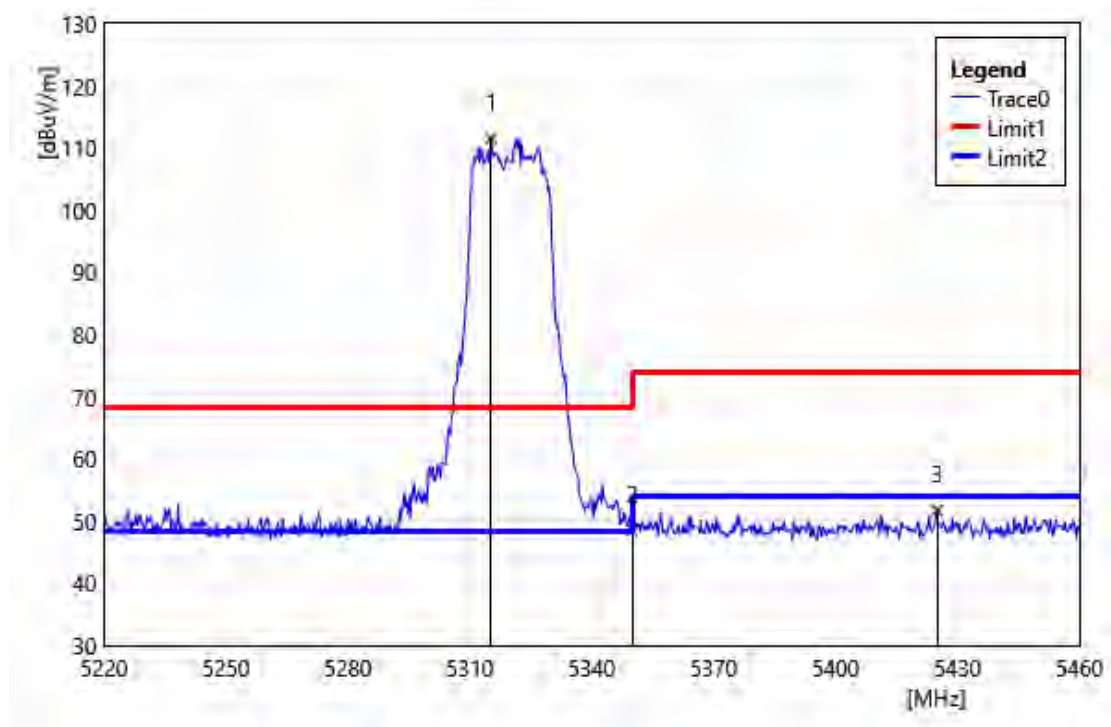


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5315.28	113.18	-1.54	111.64	68.20	43.44	PEAK
2	5350.00	49.85	-1.29	48.56	74.00	-25.44	PEAK
3	5424.96	52.47	-0.76	51.71	74.00	-22.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

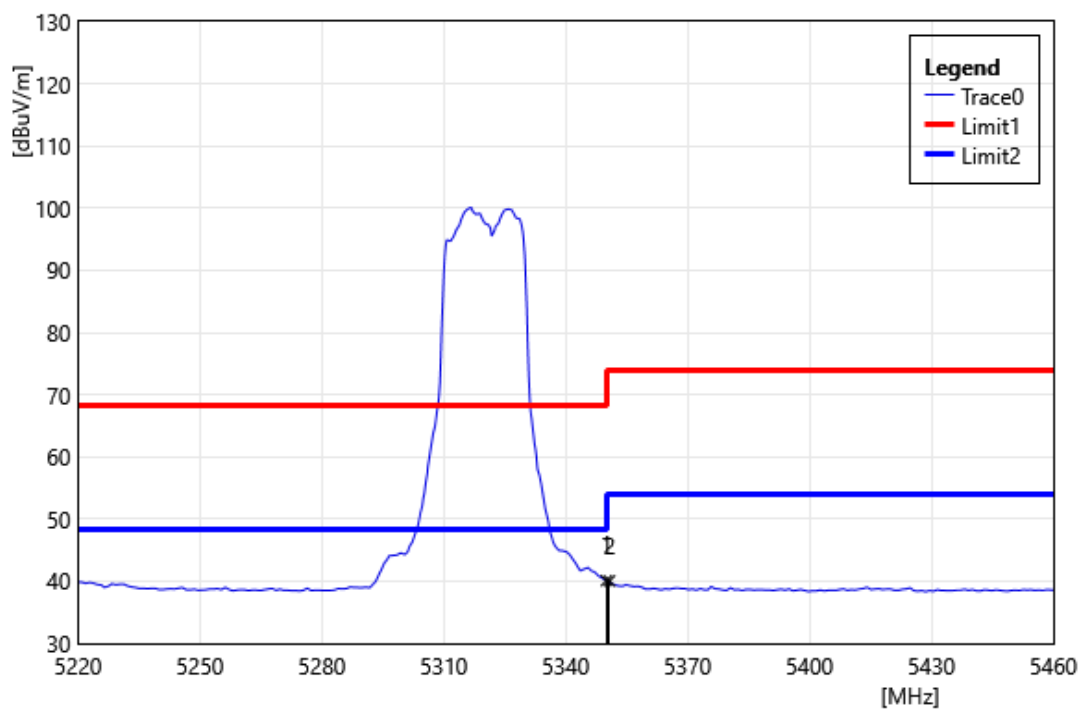


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.39	-1.29	40.09	54.00	-13.91	AVG
2	5350.80	41.34	-1.29	40.05	54.00	-13.95	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

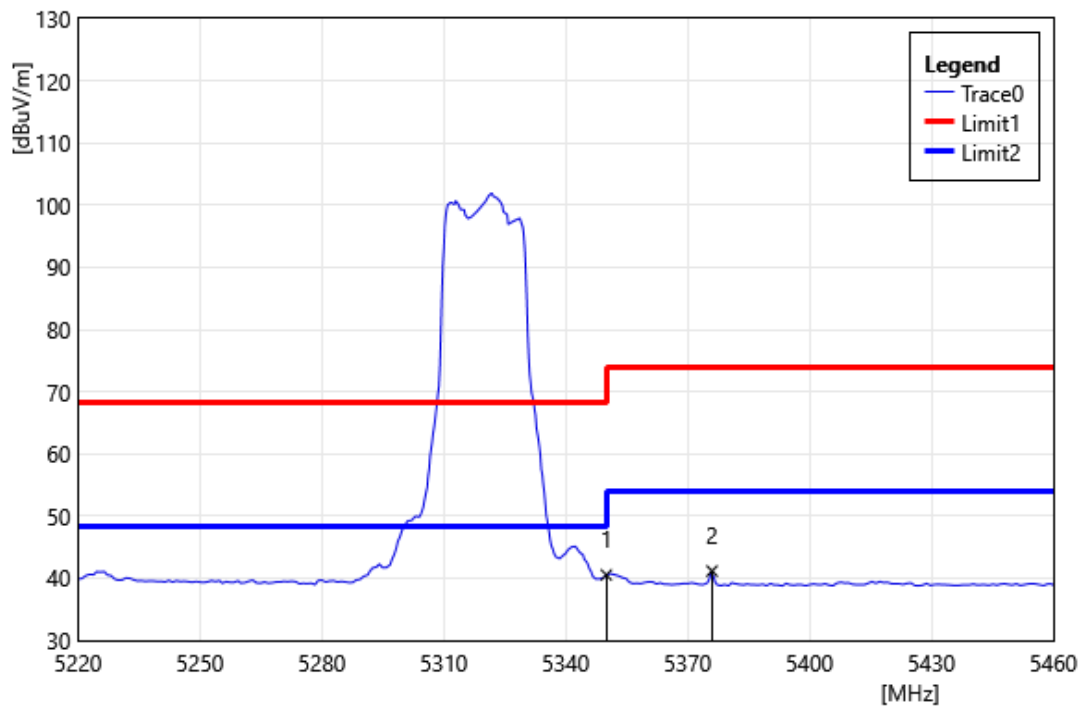


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.84	-1.29	40.54	54.00	-13.46	AVG
2	5376.00	42.27	-1.11	41.16	54.00	-12.84	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

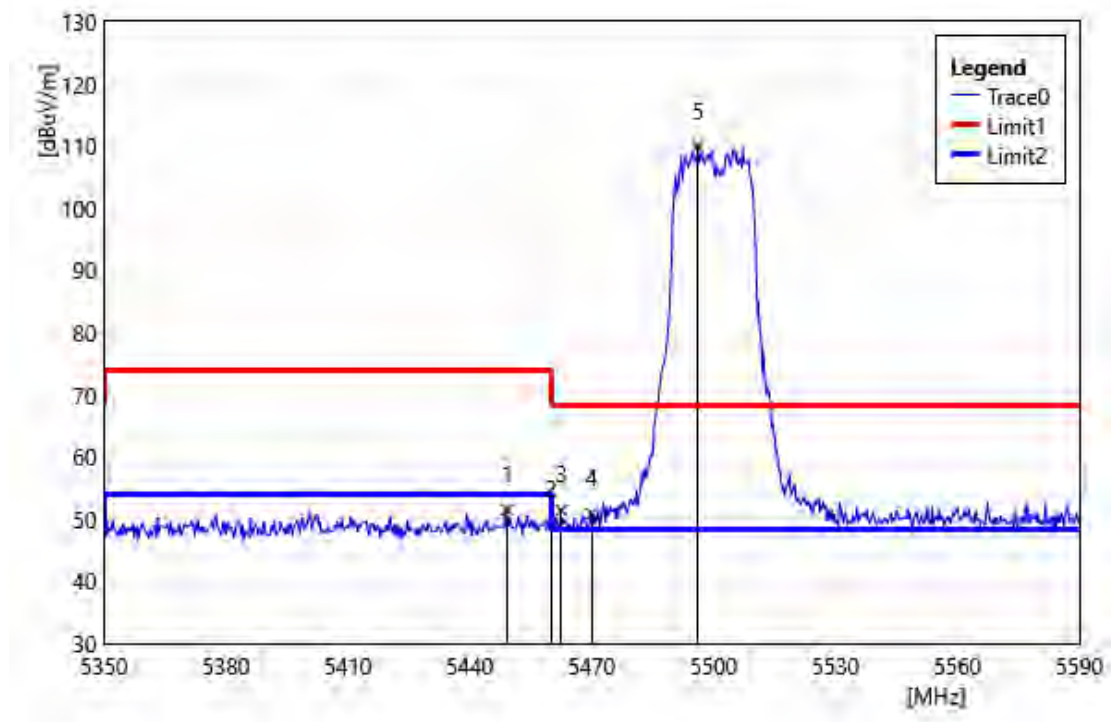


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5449.12	52.11	-0.59	51.52	74.00	-22.48	PEAK
2	5460.00	49.75	-0.57	49.18	74.00	-24.82	PEAK
3	5462.56	52.00	-0.57	51.43	68.20	-16.77	PEAK
4	5470.00	51.47	-0.56	50.91	68.20	-17.29	PEAK
5	5496.16	110.52	-0.53	109.99	68.20	41.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

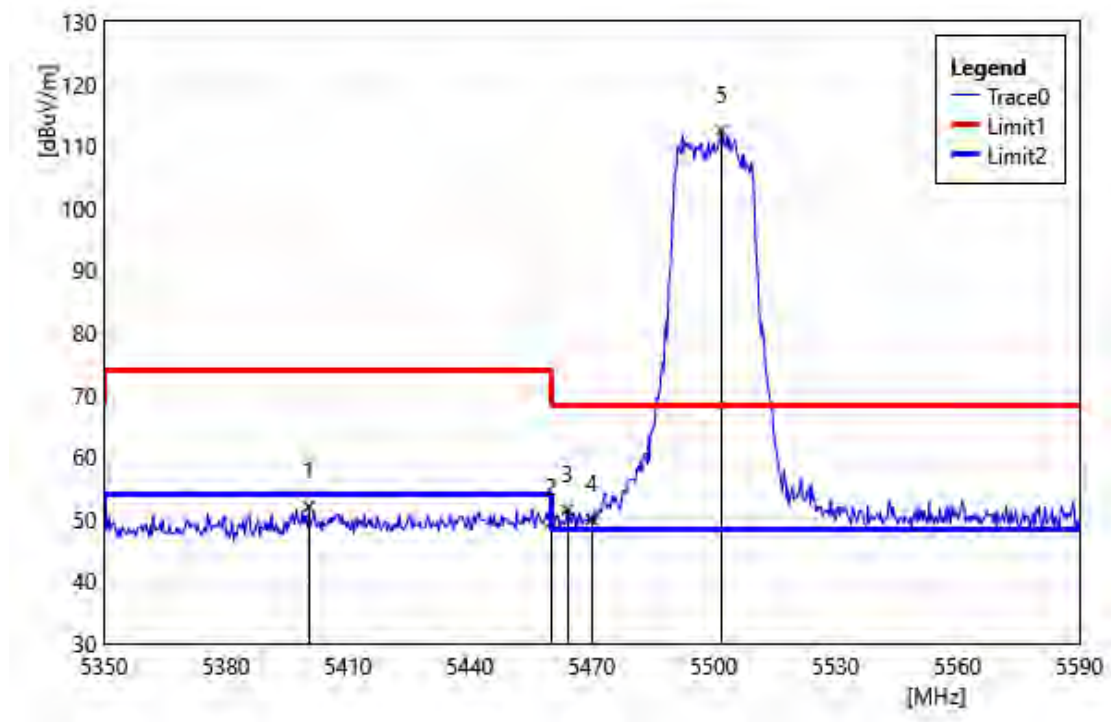


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5400.40	52.97	-0.94	52.03	74.00	-21.97	PEAK
2	5460.00	50.07	-0.57	49.50	74.00	-24.50	PEAK
3	5464.00	52.06	-0.57	51.49	68.20	-16.71	PEAK
4	5470.00	50.48	-0.56	49.92	68.20	-18.28	PEAK
5	5501.92	113.02	-0.53	112.49	68.20	44.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

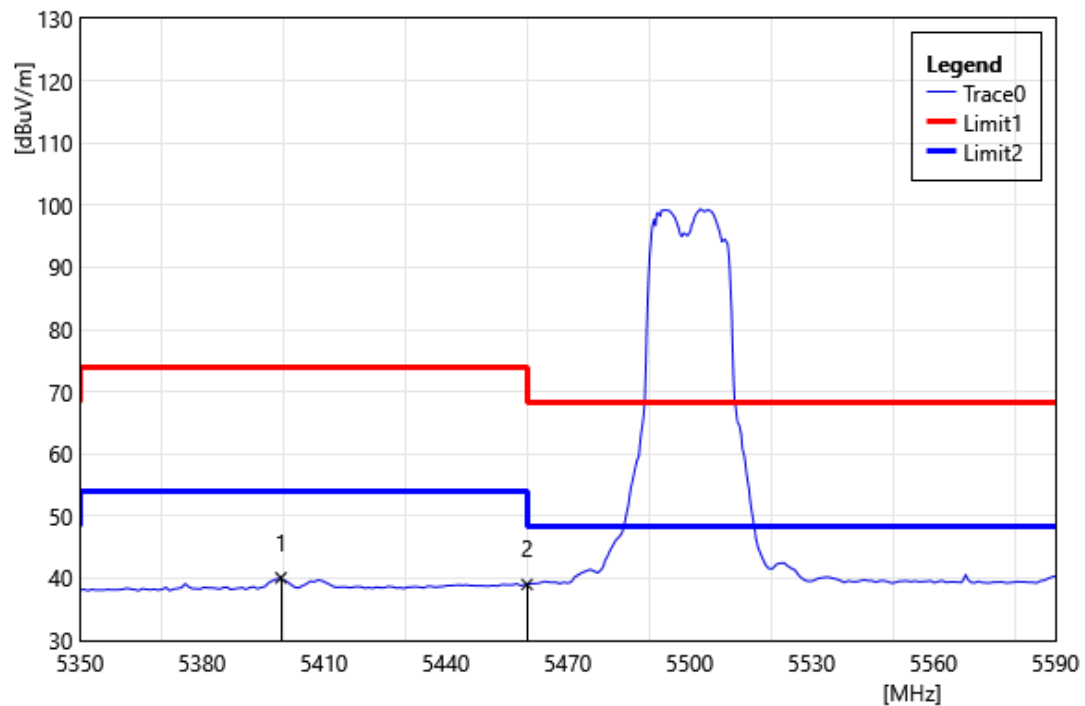


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5399.44	41.00	-0.94	40.06	54.00	-13.94	AVG
2	5460.00	39.58	-0.57	39.01	54.00	-14.99	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

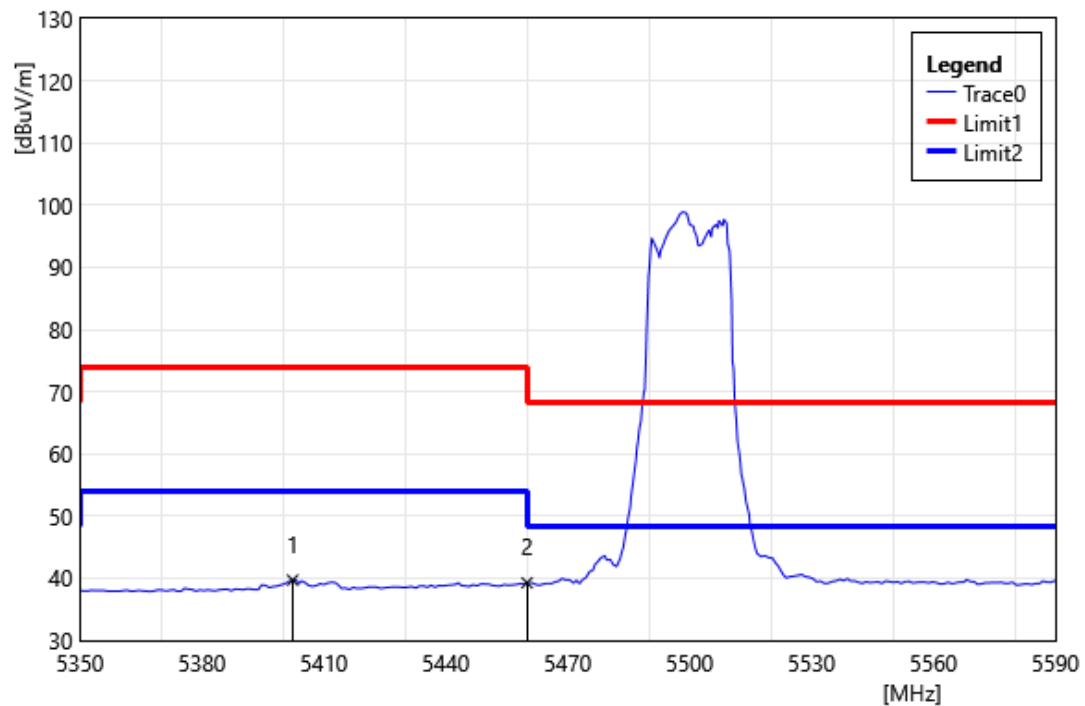


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5402.32	40.62	-0.92	39.70	54.00	-14.30	AVG
2	5460.00	39.84	-0.57	39.27	54.00	-14.73	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Vertical		
Remark:			

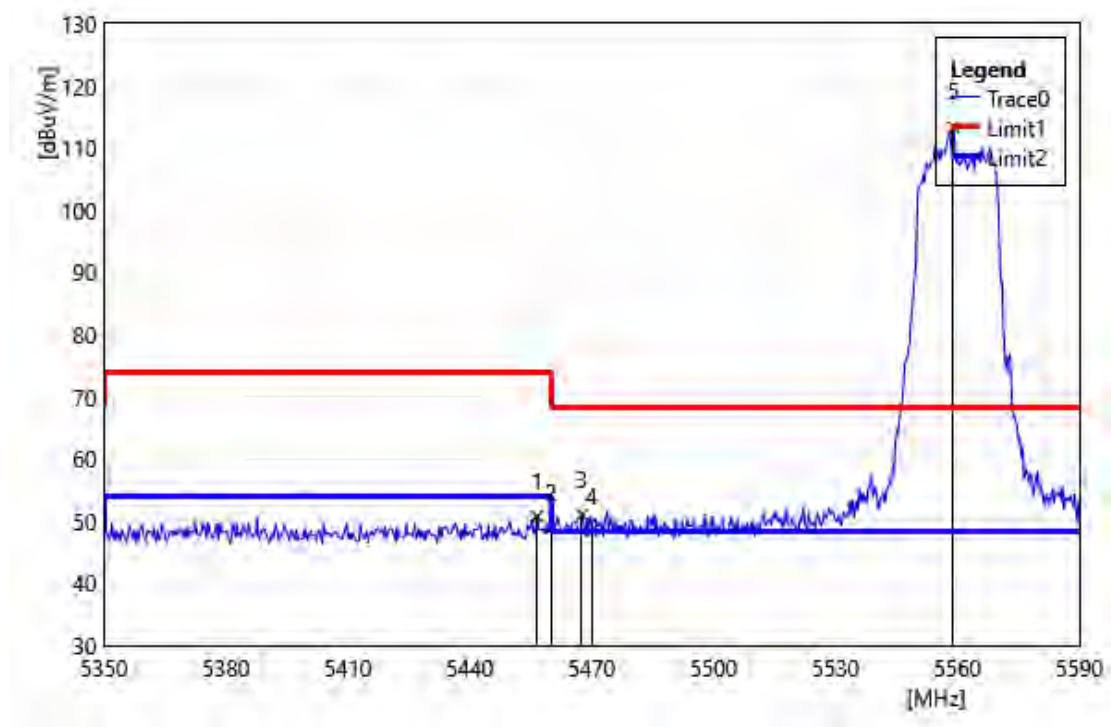


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.56	51.34	-0.58	50.76	74.00	-23.24	PEAK
2	5460.00	49.46	-0.57	48.89	74.00	-25.11	PEAK
3	5467.60	51.58	-0.56	51.02	68.20	-17.18	PEAK
4	5470.00	48.96	-0.56	48.40	68.20	-19.80	PEAK
5	5559.04	113.87	-0.51	113.36	68.20	45.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Horizontal		
Remark:			

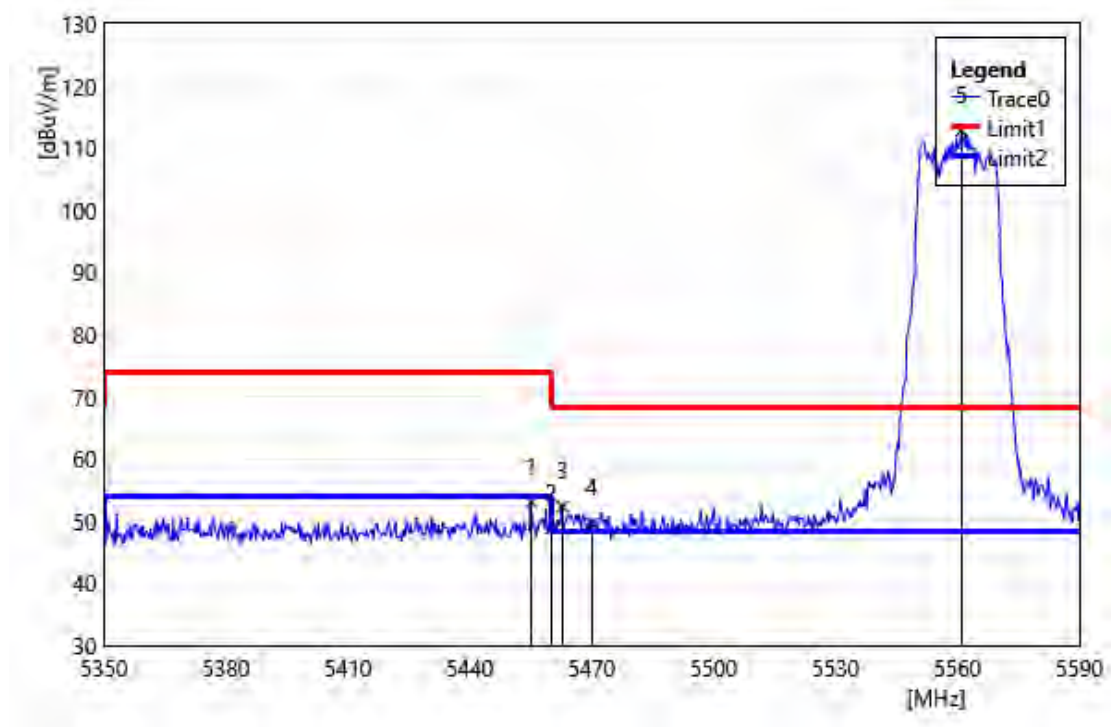


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.12	53.59	-0.58	53.01	74.00	-20.99	PEAK
2	5460.00	49.33	-0.57	48.76	74.00	-25.24	PEAK
3	5462.80	52.88	-0.57	52.31	68.20	-15.89	PEAK
4	5470.00	50.23	-0.56	49.67	68.20	-18.53	PEAK
5	5560.96	113.34	-0.52	112.83	68.20	44.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Vertical		
Remark:			

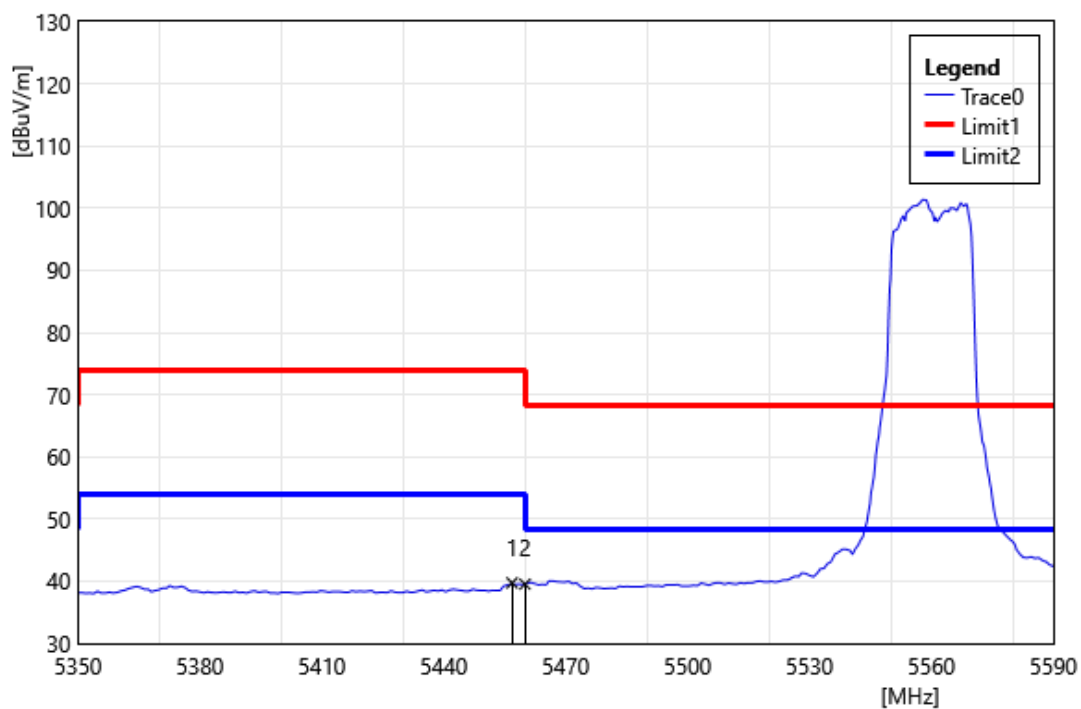


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.80	40.31	-0.58	39.73	54.00	-14.27	AVG
2	5460.00	40.10	-0.57	39.53	54.00	-14.47	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Horizontal		
Remark:			

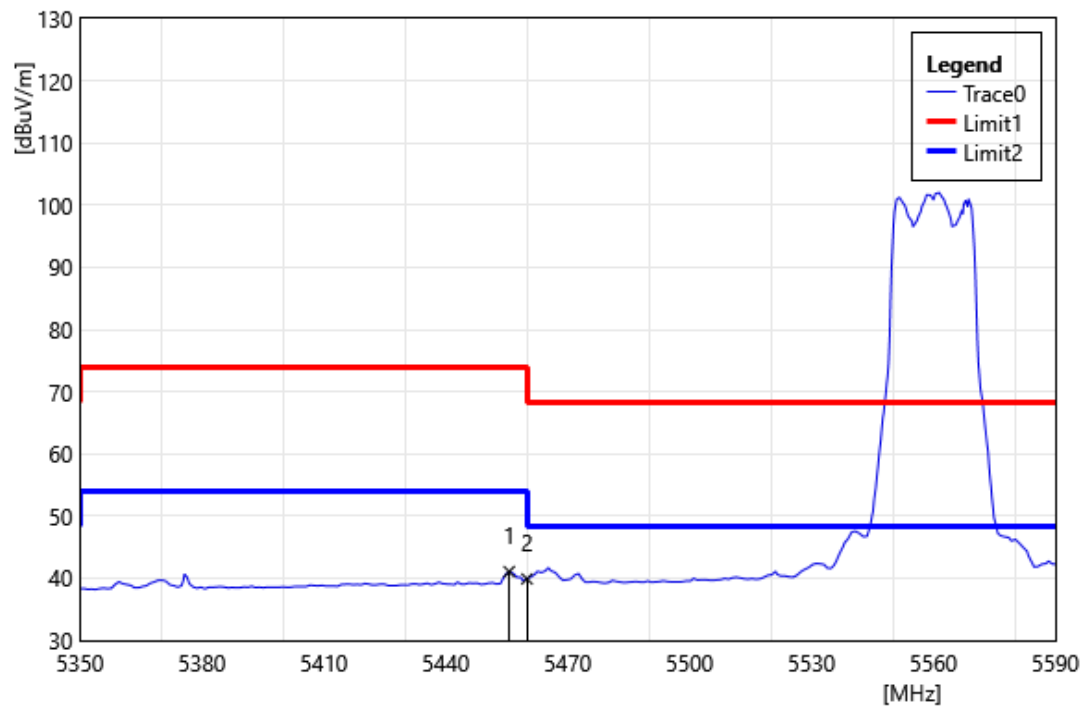


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.60	41.64	-0.58	41.06	54.00	-12.94	AVG
2	5460.00	40.46	-0.57	39.89	54.00	-14.11	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Vertical		
Remark:			

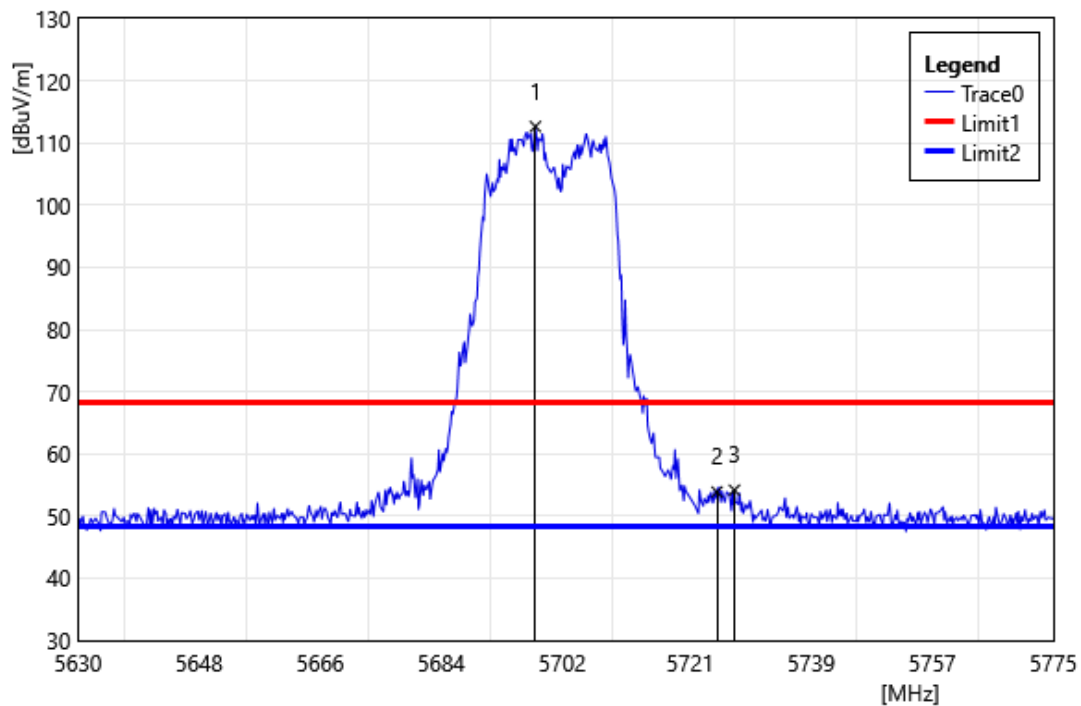


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.01	113.27	-0.61	112.66	68.20	44.46	PEAK
2	5725.00	54.22	-0.34	53.88	68.20	-14.32	PEAK
3	5727.59	54.48	-0.32	54.16	68.20	-14.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Horizontal		
Remark:			

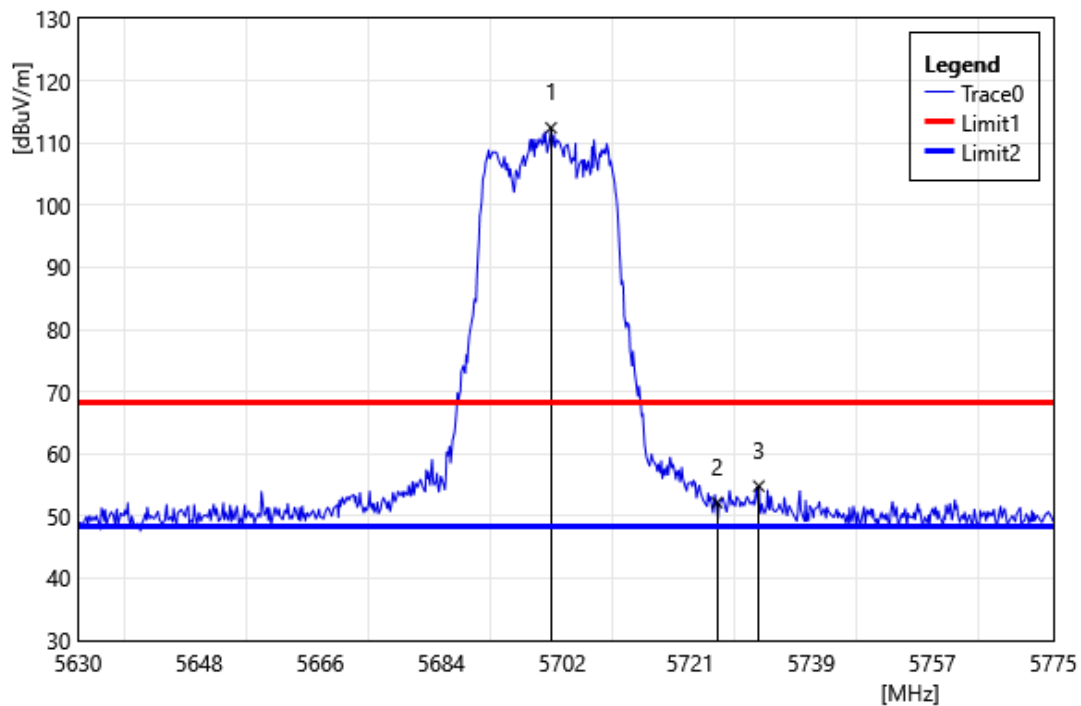


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5700.33	113.05	-0.61	112.44	68.20	44.24	PEAK
2	5725.00	52.50	-0.34	52.16	68.20	-16.04	PEAK
3	5731.21	55.11	-0.28	54.83	68.20	-13.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Vertical		
Remark:			

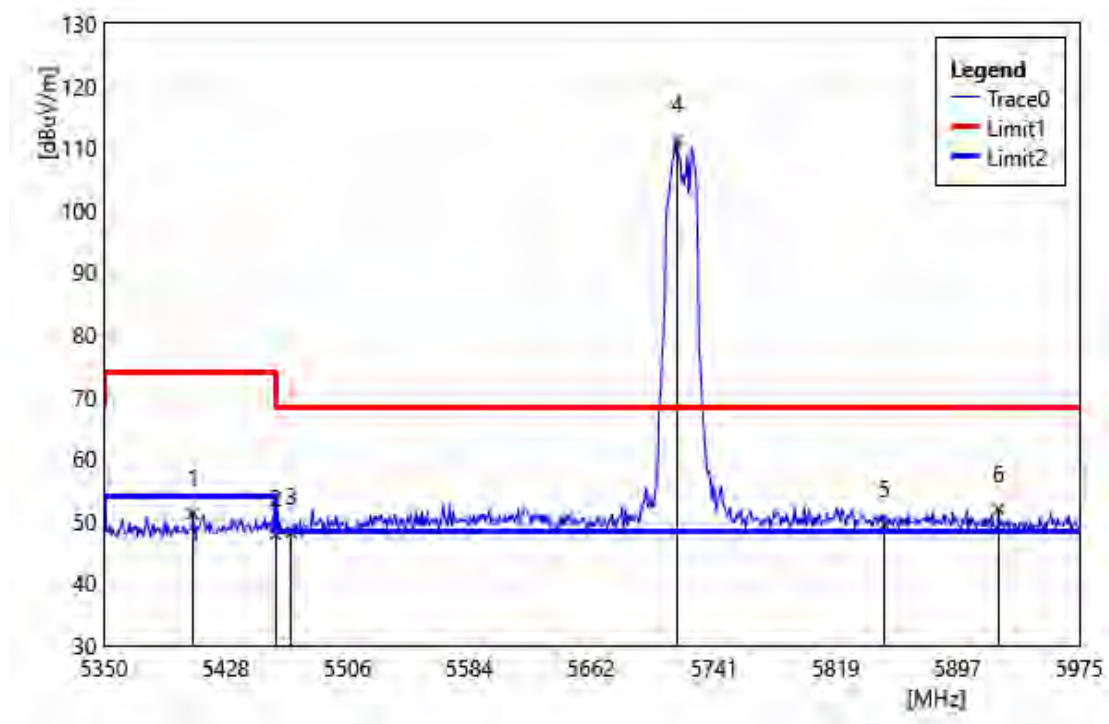


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5406.88	52.06	-0.89	51.17	74.00	-22.83	PEAK
2	5460.00	48.42	-0.57	47.85	74.00	-26.15	PEAK
3	5470.00	48.71	-0.56	48.15	68.20	-20.05	PEAK
4	5717.50	111.64	-0.42	111.22	68.20	43.02	PEAK
5	5850.00	49.16	0.28	49.44	68.20	-18.76	PEAK
6	5923.13	51.63	0.29	51.92	68.20	-16.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Horizontal		
Remark:			

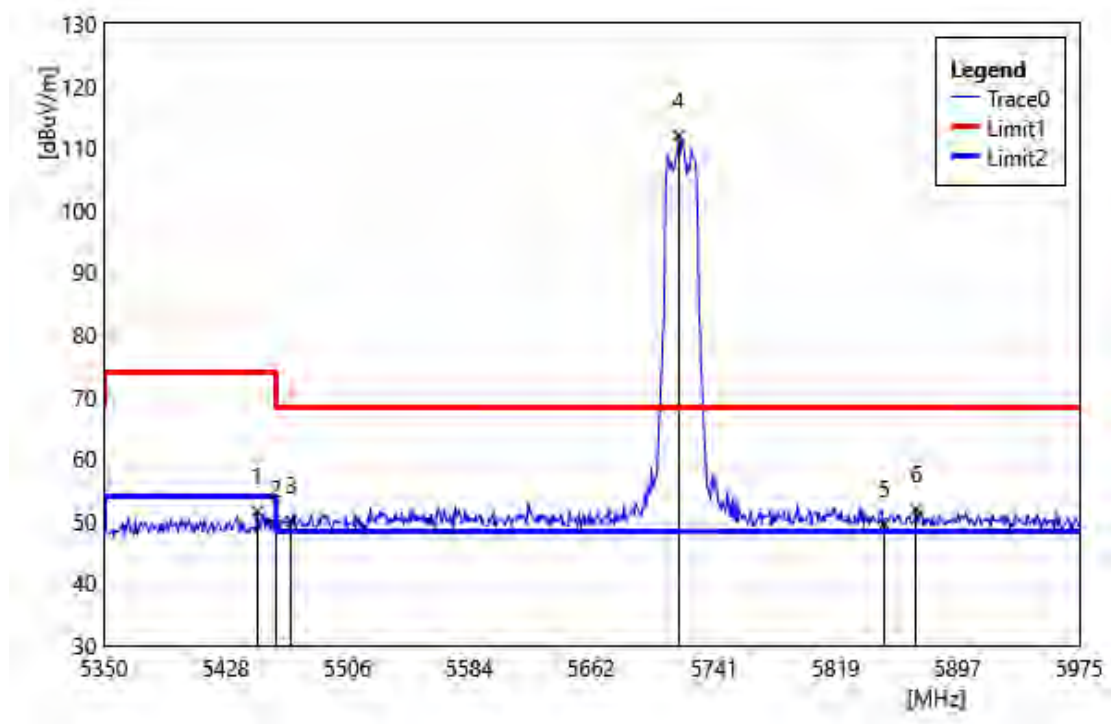


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.13	52.20	-0.60	51.60	74.00	-22.41	PEAK
2	5460.00	49.96	-0.57	49.39	74.00	-24.61	PEAK
3	5470.00	50.53	-0.56	49.97	68.20	-18.23	PEAK
4	5718.13	112.43	-0.42	112.01	68.20	43.81	PEAK
5	5850.00	49.18	0.28	49.46	68.20	-18.74	PEAK
6	5870.63	51.54	0.33	51.87	68.20	-16.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Vertical		
Remark:			

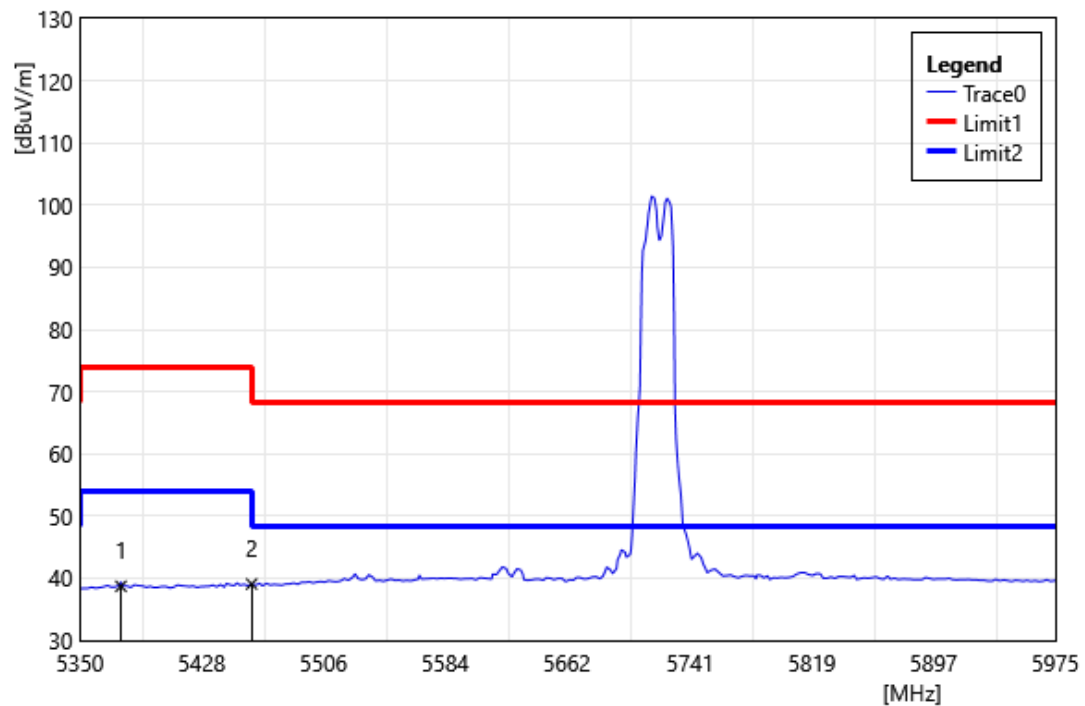


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	39.82	-1.11	38.71	54.00	-15.29	AVG
2	5460.00	39.64	-0.57	39.07	54.00	-14.93	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Horizontal		
Remark:			

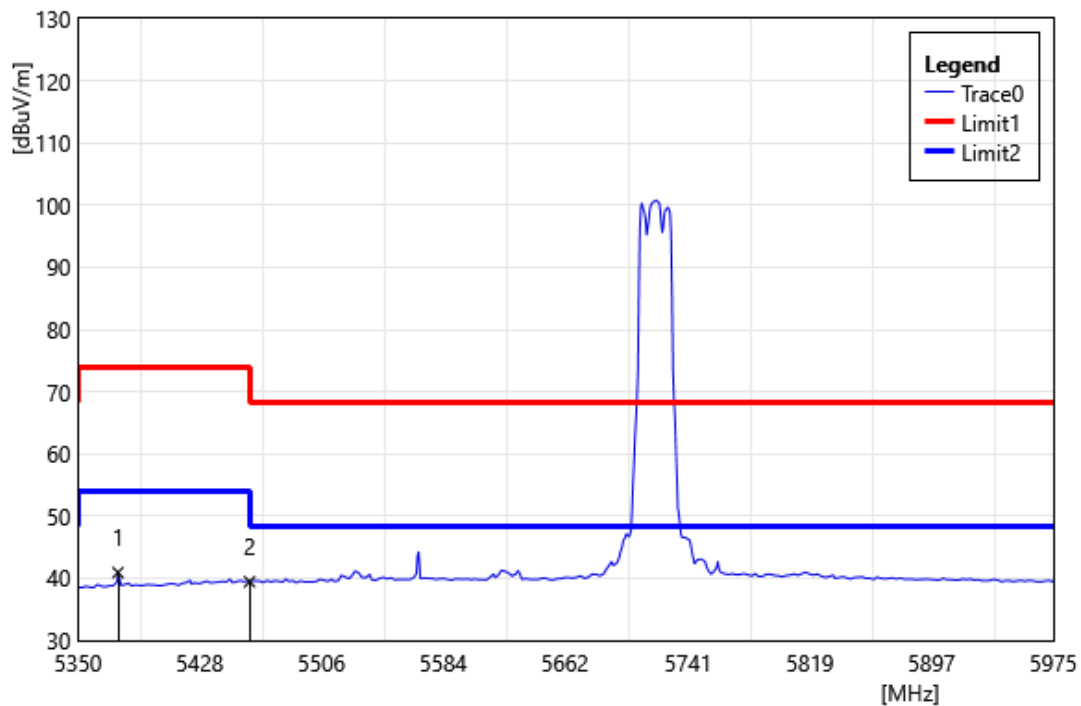


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	42.02	-1.11	40.91	54.00	-13.09	AVG
2	5460.00	40.00	-0.57	39.43	54.00	-14.57	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Vertical		
Remark:			

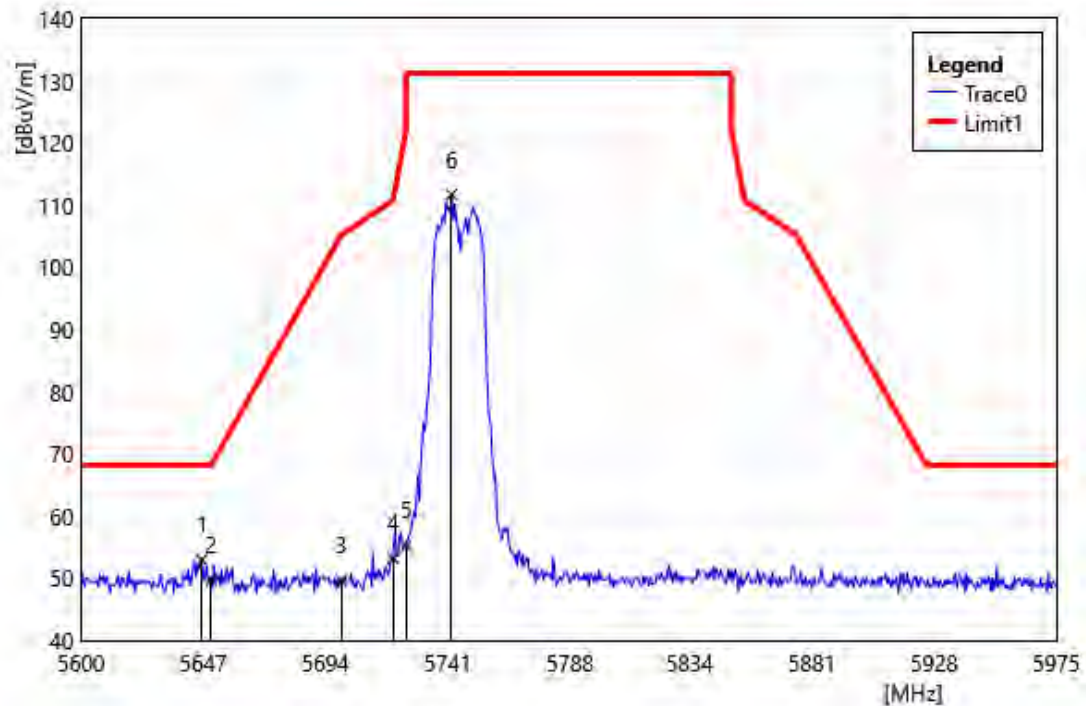


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.50	53.61	-0.64	52.97	68.20	-15.23	PEAK
2	5650.00	50.36	-0.64	49.72	68.20	-18.48	PEAK
3	5700.00	50.28	-0.61	49.67	105.20	-55.53	PEAK
4	5720.00	53.59	-0.40	53.19	110.80	-57.61	PEAK
5	5725.00	55.49	-0.34	55.15	122.20	-67.05	PEAK
6	5742.50	111.84	-0.16	111.68	131.20	-19.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Horizontal		
Remark:			

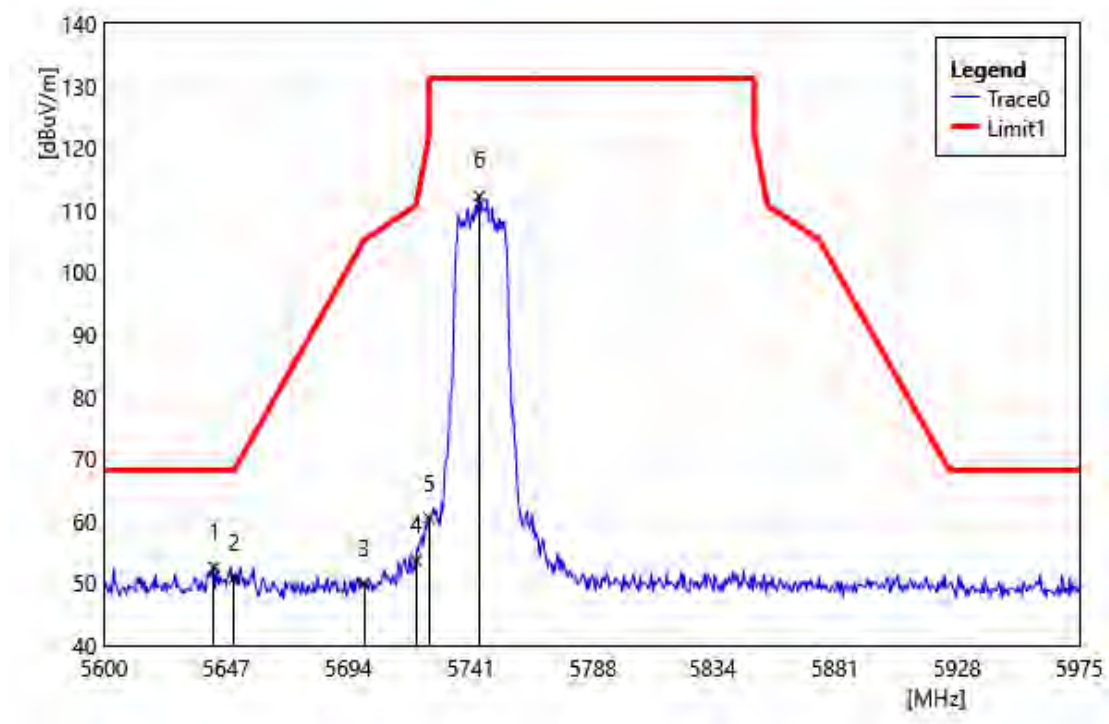


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.38	53.22	-0.63	52.59	68.20	-15.61	PEAK
2	5650.00	51.49	-0.64	50.85	68.20	-17.35	PEAK
3	5700.00	50.59	-0.61	49.98	105.20	-55.22	PEAK
4	5720.00	54.17	-0.40	53.77	110.80	-57.03	PEAK
5	5725.00	60.82	-0.34	60.48	122.20	-61.72	PEAK
6	5744.38	112.42	-0.14	112.28	131.20	-18.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Vertical		
Remark:			

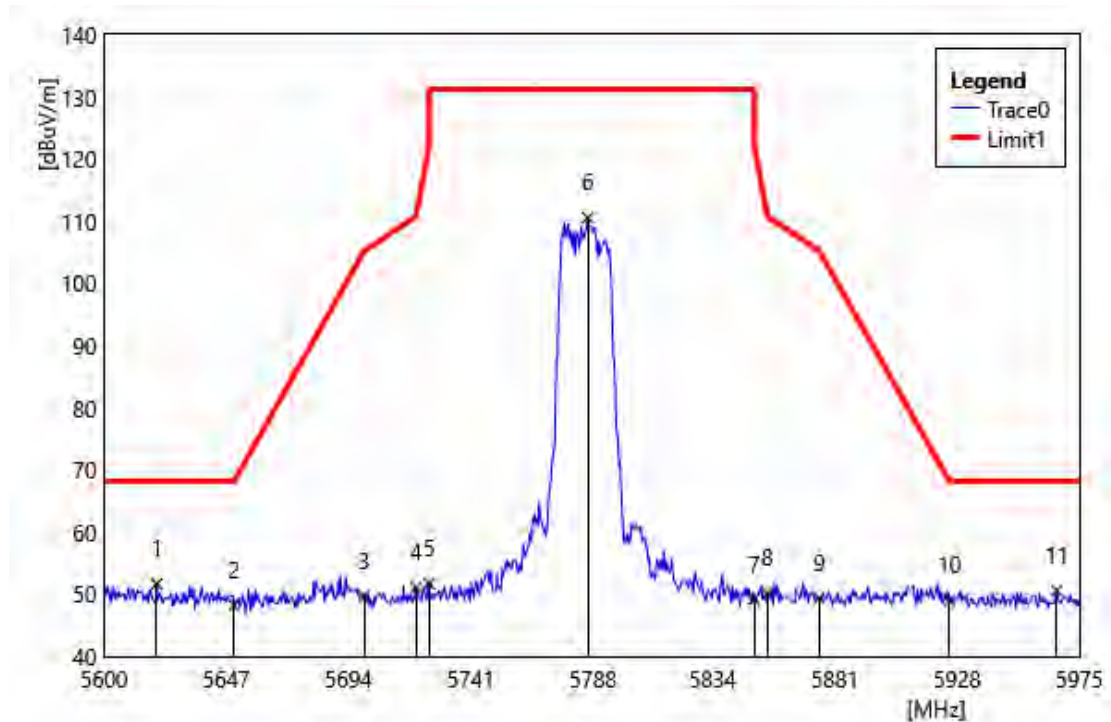


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5620.25	52.28	-0.60	51.68	68.20	-16.52	PEAK
2	5650.00	48.88	-0.64	48.24	68.20	-19.96	PEAK
3	5700.00	50.33	-0.61	49.72	105.20	-55.48	PEAK
4	5720.00	51.43	-0.40	51.03	110.80	-59.77	PEAK
5	5725.00	51.98	-0.34	51.64	122.20	-70.56	PEAK
6	5786.00	110.45	0.09	110.54	131.20	-20.66	PEAK
7	5850.00	48.91	0.28	49.19	122.20	-73.01	PEAK
8	5855.00	49.92	0.29	50.21	110.80	-60.59	PEAK
9	5875.00	49.04	0.34	49.38	105.20	-55.82	PEAK
10	5925.00	48.74	0.28	49.02	68.20	-19.18	PEAK
11	5966.38	50.40	0.18	50.58	68.20	-17.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Horizontal		
Remark:			

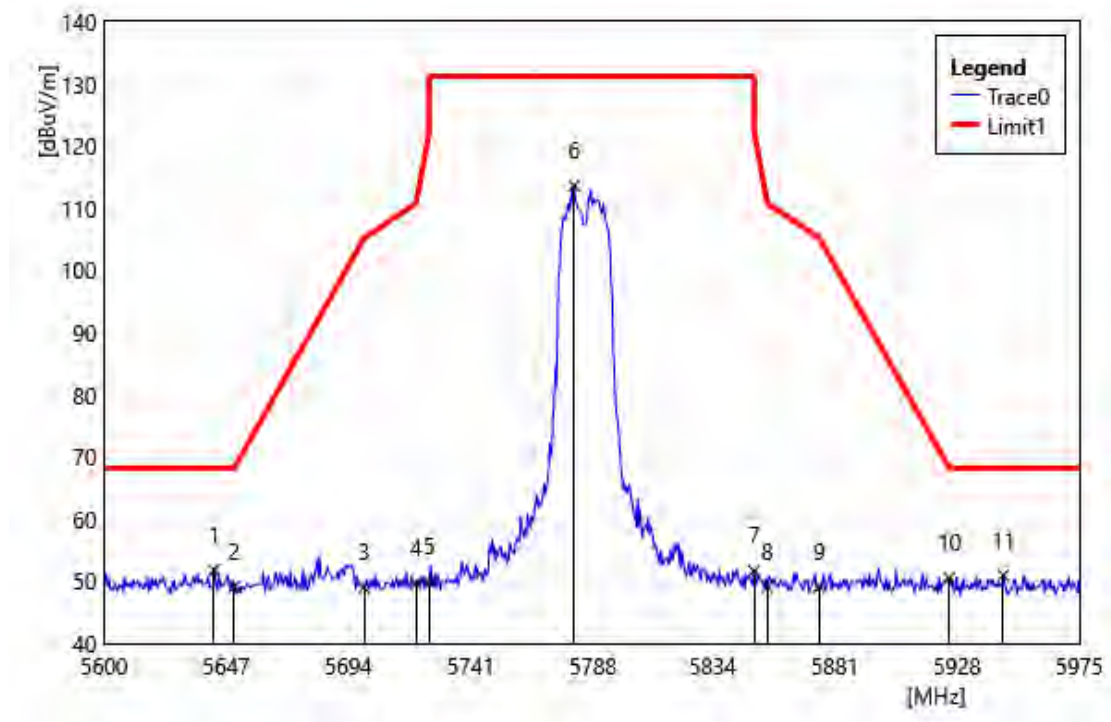


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.38	52.46	-0.63	51.83	68.20	-16.37	PEAK
2	5650.00	49.76	-0.64	49.12	68.20	-19.08	PEAK
3	5700.00	49.58	-0.61	48.97	105.20	-56.23	PEAK
4	5720.00	50.04	-0.40	49.64	110.80	-61.16	PEAK
5	5725.00	50.16	-0.34	49.82	122.20	-72.38	PEAK
6	5780.75	113.53	0.06	113.59	131.20	-17.61	PEAK
7	5850.00	51.37	0.28	51.65	122.20	-70.55	PEAK
8	5855.00	48.81	0.29	49.10	110.80	-61.70	PEAK
9	5875.00	48.75	0.34	49.09	105.20	-56.11	PEAK
10	5925.00	50.16	0.28	50.44	68.20	-17.76	PEAK
11	5945.75	50.79	0.16	50.95	68.20	-17.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Vertical		
Remark:			

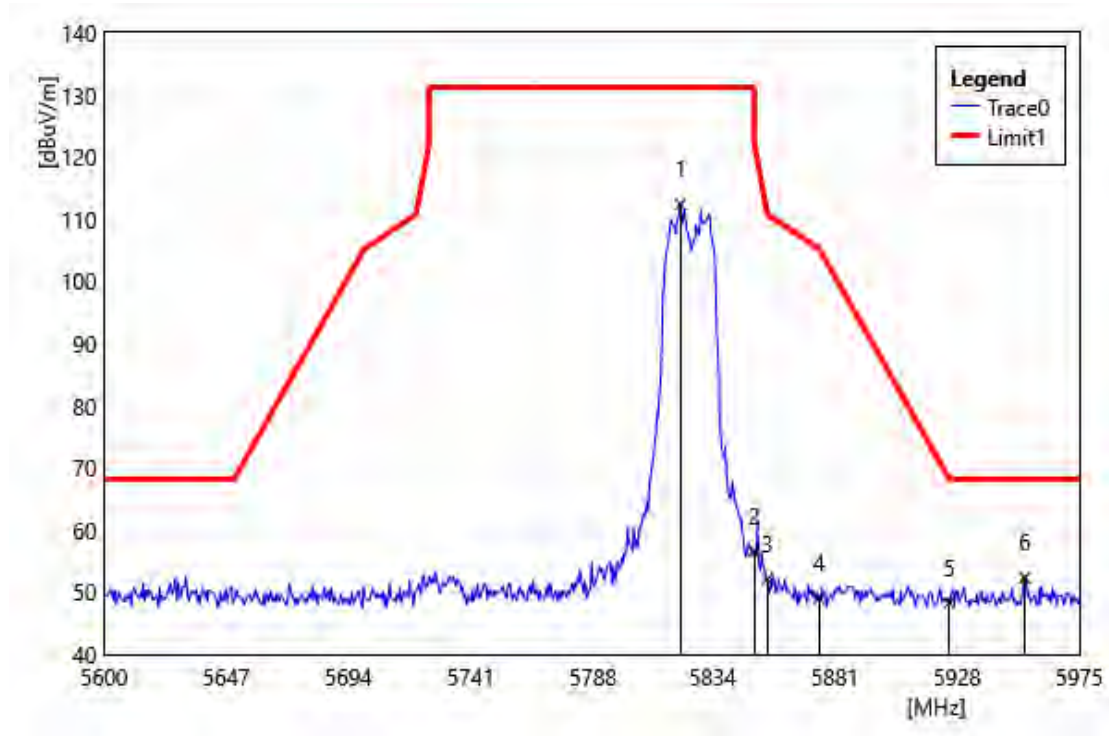


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5821.63	112.18	0.21	112.39	131.20	-18.81	PEAK
2	5850.00	56.34	0.28	56.62	122.20	-65.58	PEAK
3	5855.00	51.84	0.29	52.13	110.80	-58.67	PEAK
4	5875.00	48.69	0.34	49.03	105.20	-56.17	PEAK
5	5925.00	48.02	0.28	48.30	68.20	-19.90	PEAK
6	5954.00	52.19	0.15	52.34	68.20	-15.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Horizontal		
Remark:			

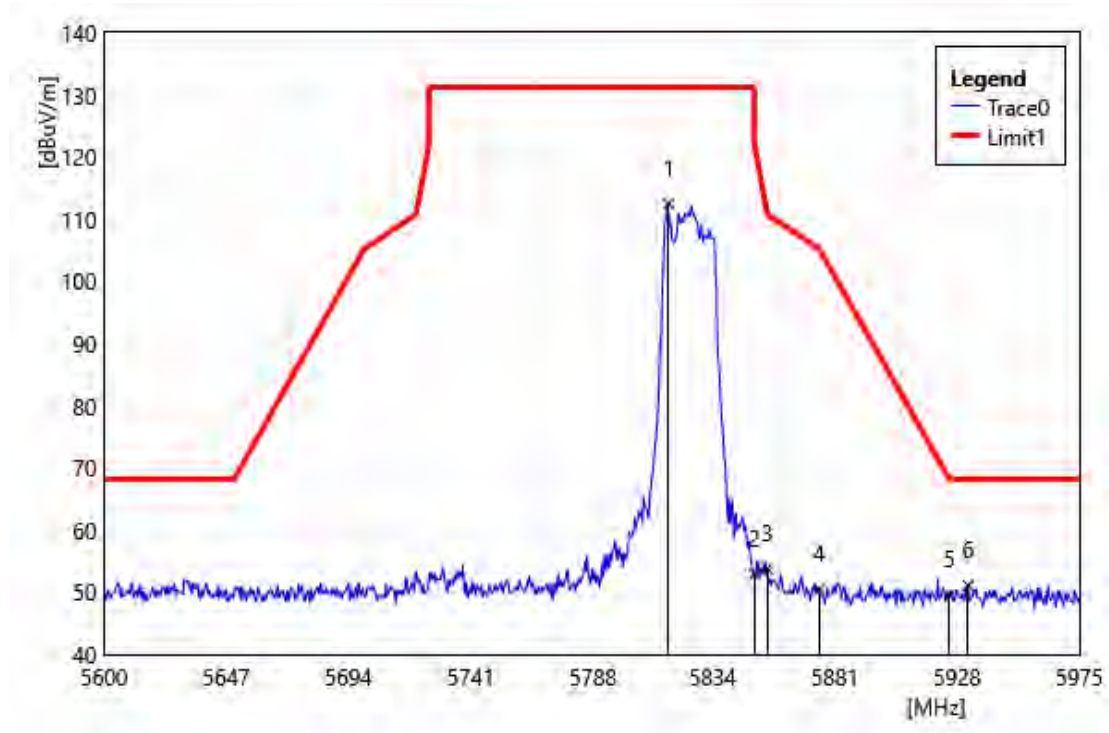


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5817.13	112.29	0.19	112.48	131.20	-18.72	PEAK
2	5850.00	52.57	0.28	52.85	122.20	-69.35	PEAK
3	5855.00	53.54	0.29	53.83	110.80	-56.97	PEAK
4	5875.00	50.05	0.34	50.39	105.20	-54.81	PEAK
5	5925.00	49.29	0.28	49.57	68.20	-18.63	PEAK
6	5932.25	50.87	0.24	51.11	68.20	-17.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

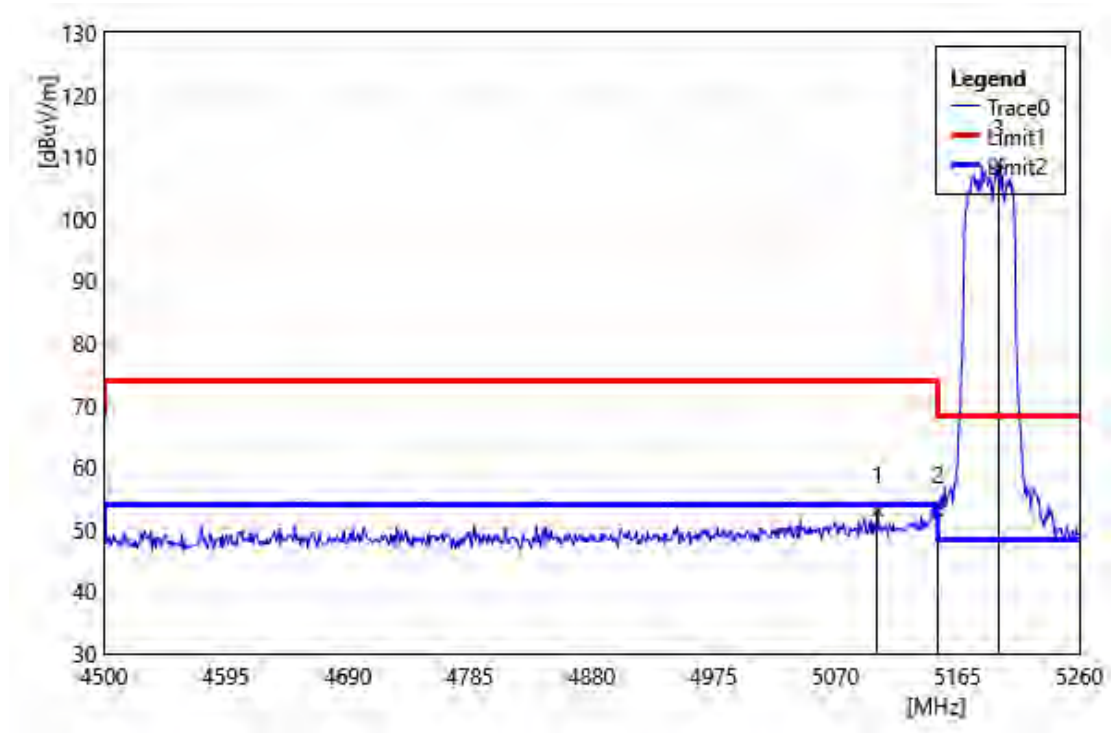


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5102.68	53.87	-0.86	53.01	74.00	-20.99	PEAK
2	5150.00	53.83	-0.91	52.92	74.00	-21.08	PEAK
3	5196.92	110.04	-1.14	108.90	68.20	40.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

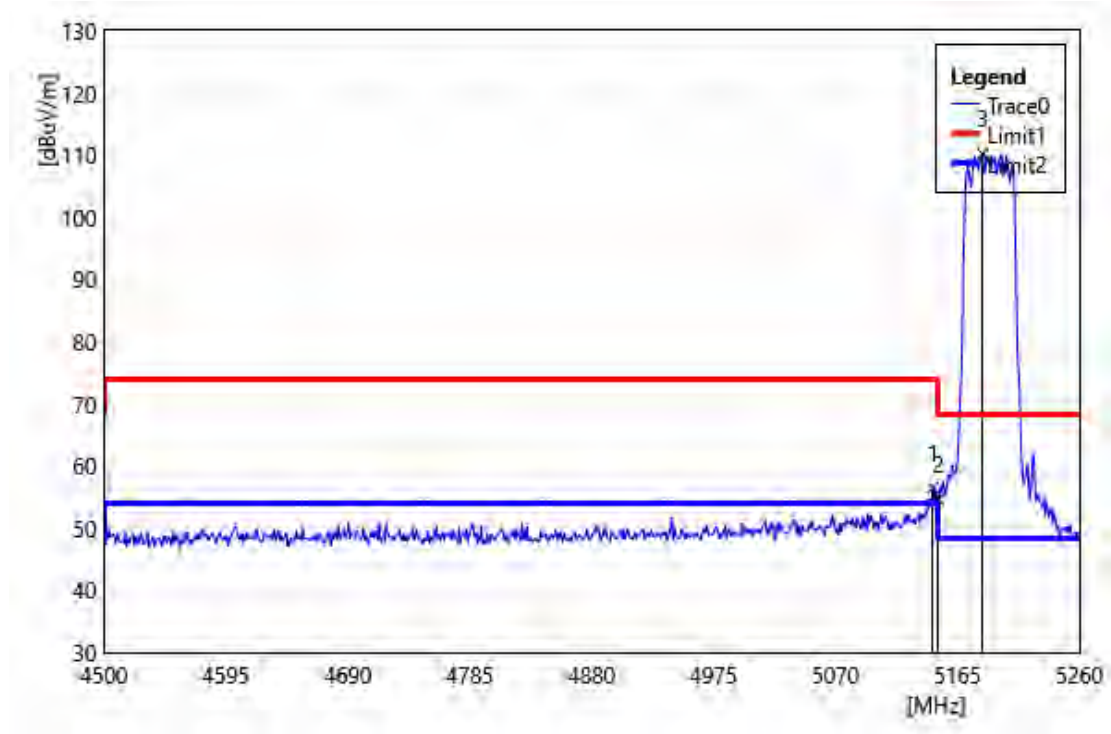


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	57.36	-0.90	56.46	74.00	-17.55	PEAK
2	5150.00	55.56	-0.91	54.65	74.00	-19.35	PEAK
3	5184.76	111.21	-1.08	110.13	68.20	41.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

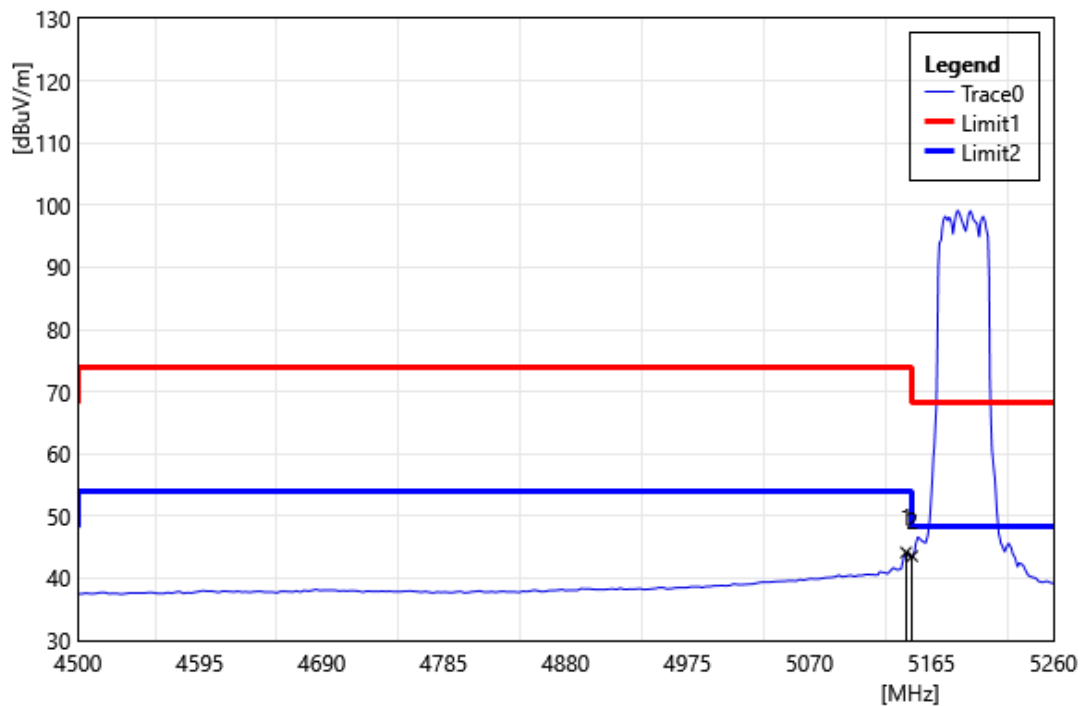


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	45.04	-0.90	44.14	54.00	-9.86	AVG
2	5150.00	44.46	-0.91	43.55	54.00	-10.45	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

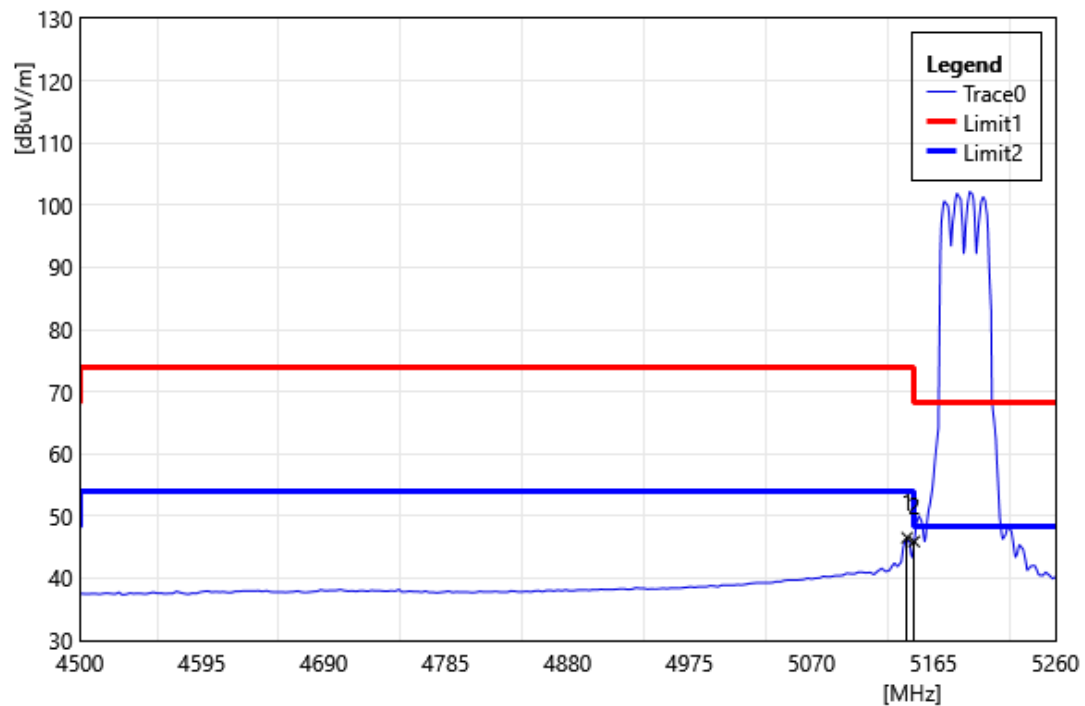


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	47.41	-0.90	46.51	54.00	-7.49	AVG
2	5150.00	46.80	-0.91	45.89	54.00	-8.11	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

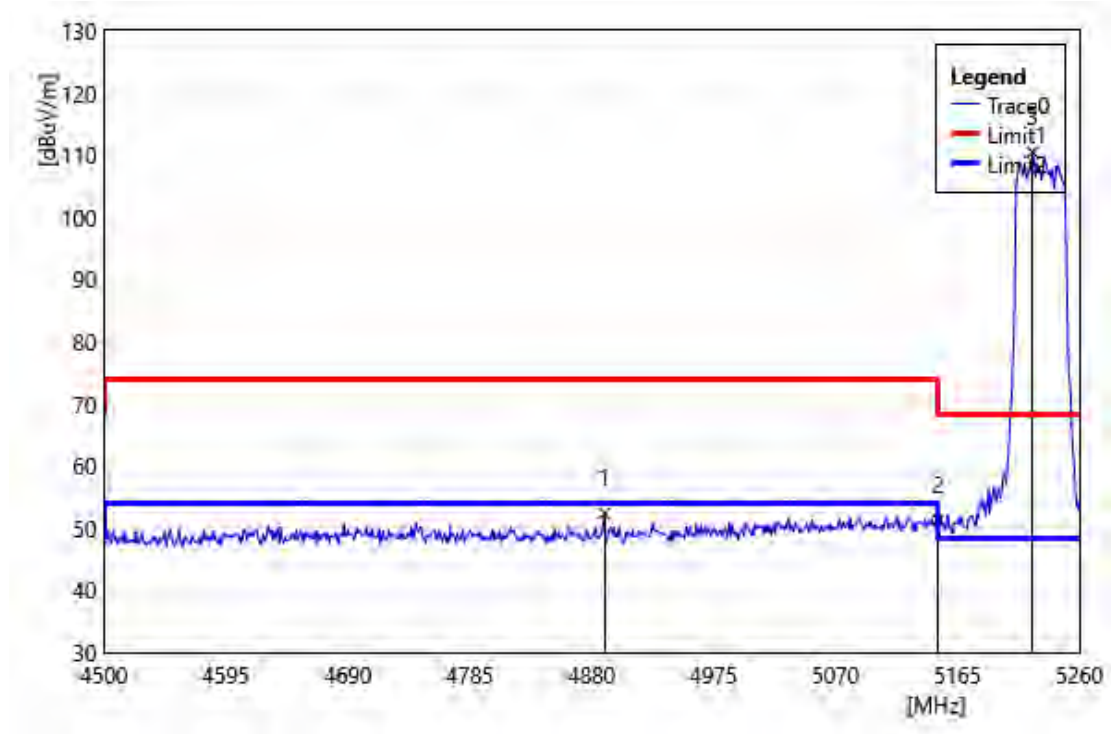


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4889.88	54.13	-1.79	52.34	74.00	-21.66	PEAK
2	5150.00	52.22	-0.91	51.32	74.00	-22.68	PEAK
3	5223.52	111.77	-1.32	110.45	68.20	42.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

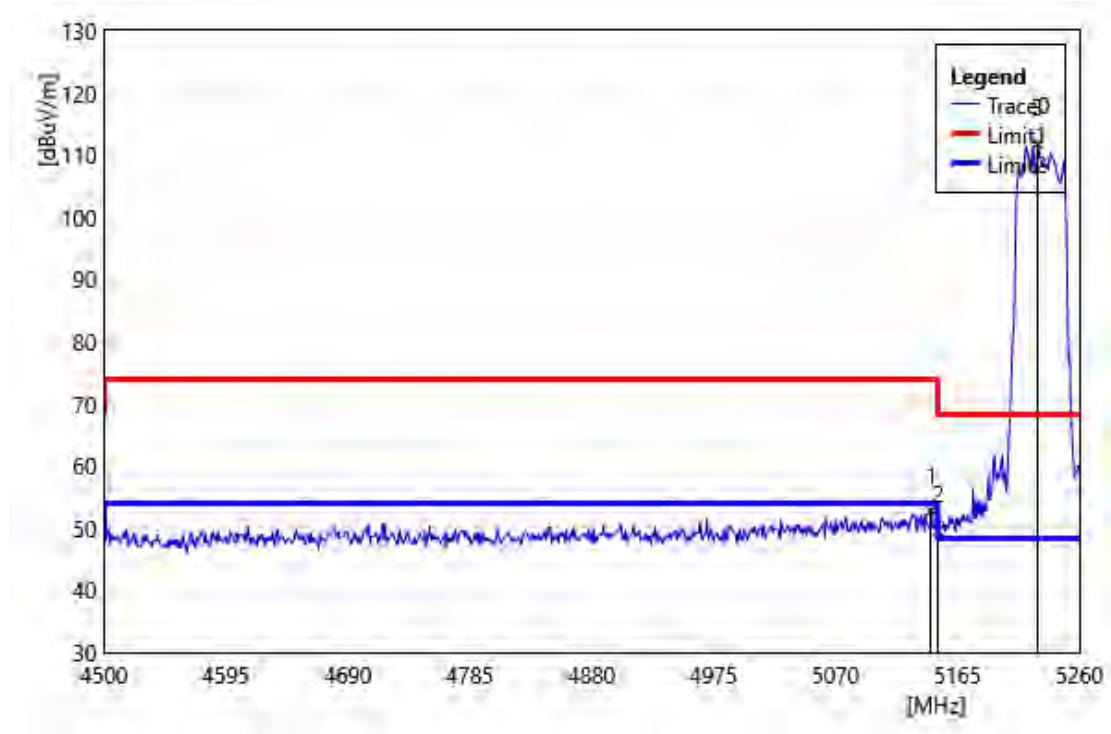


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	53.76	-0.90	52.86	74.00	-21.14	PEAK
2	5150.00	50.54	-0.91	49.63	74.00	-24.37	PEAK
3	5227.32	113.16	-1.34	111.82	68.20	43.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

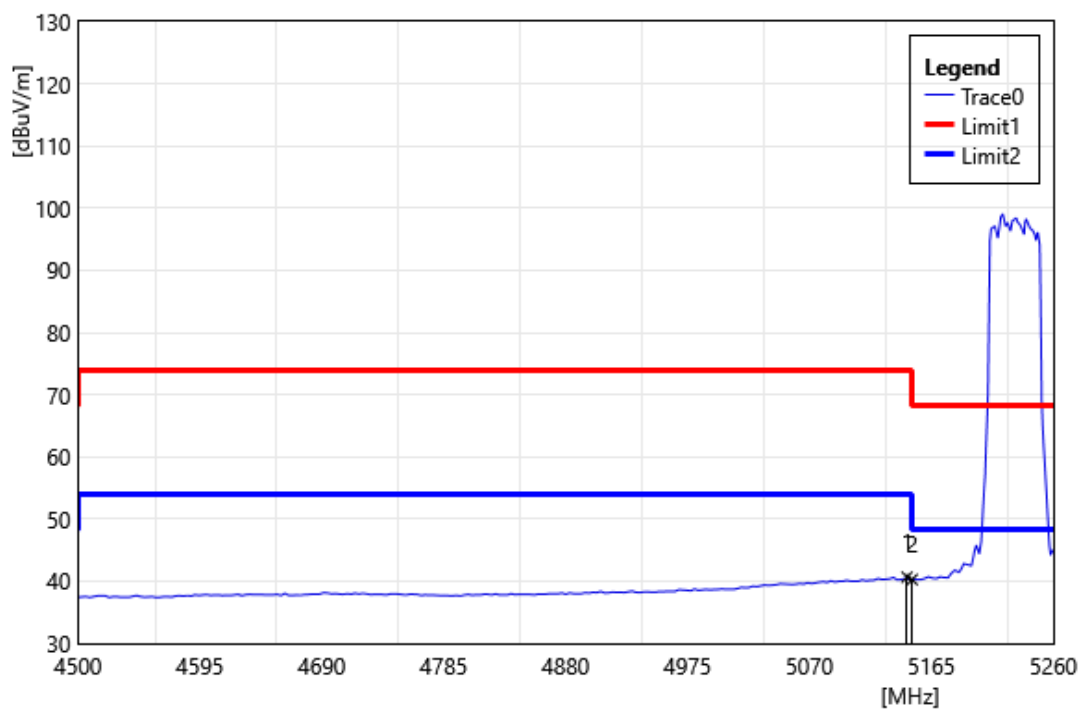


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	41.55	-0.90	40.65	54.00	-13.35	AVG
2	5150.00	41.18	-0.91	40.27	54.00	-13.73	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

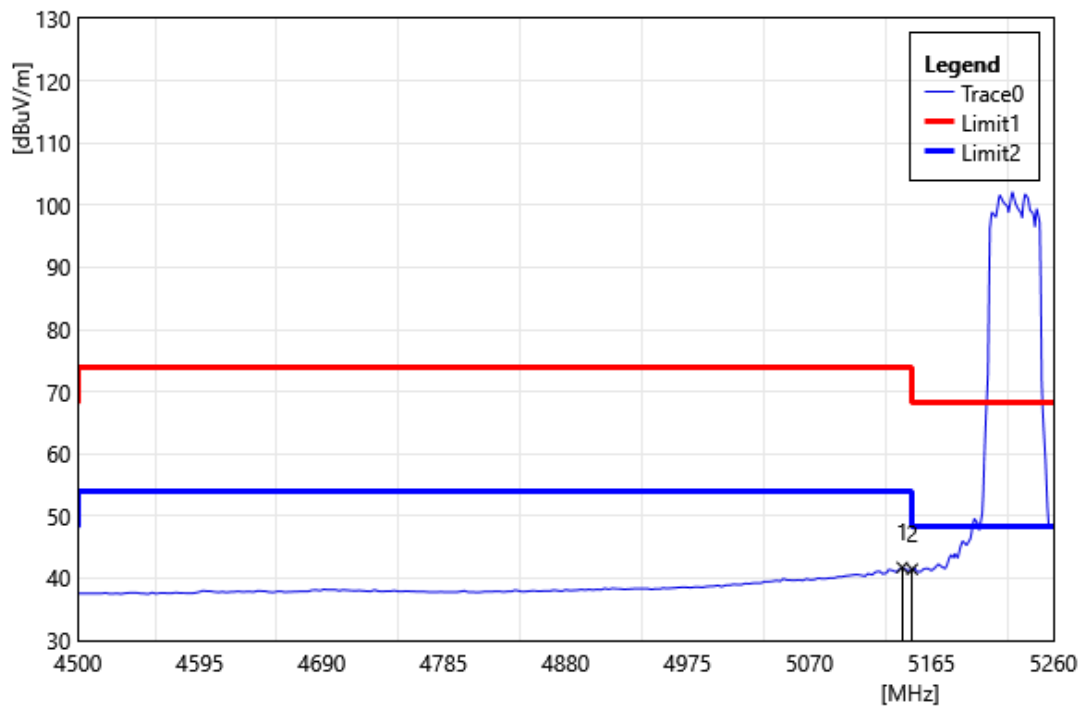


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	42.63	-0.90	41.73	54.00	-12.27	AVG
2	5150.00	42.33	-0.91	41.43	54.00	-12.57	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

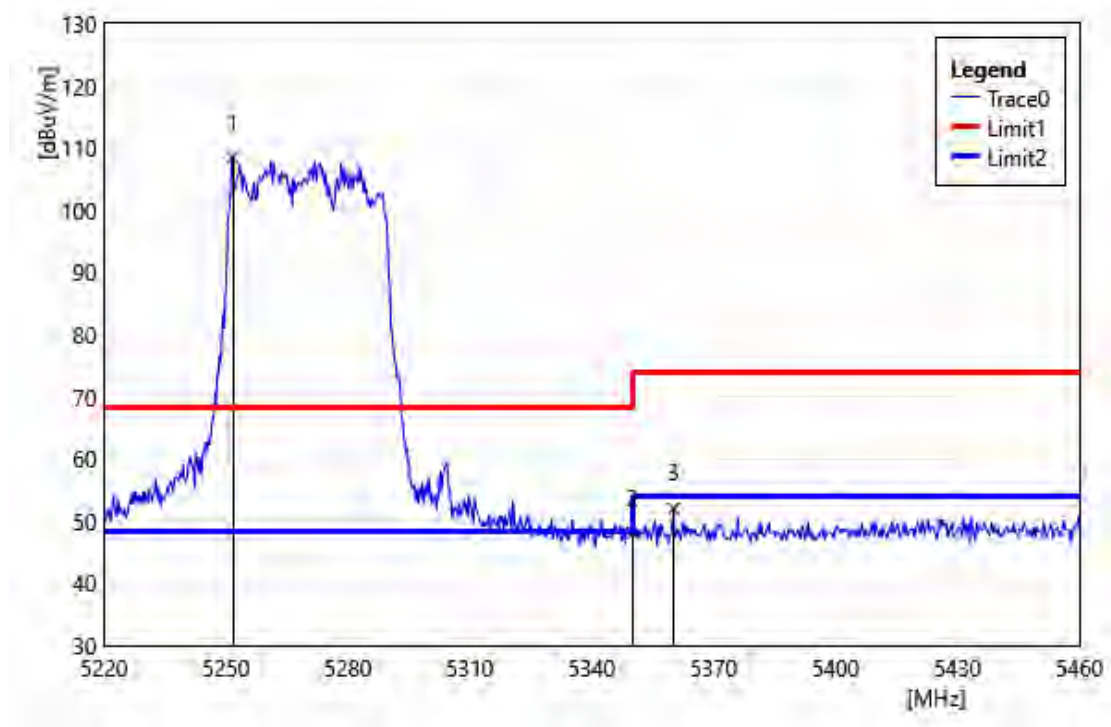


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5251.68	110.00	-1.50	108.50	68.20	40.30	PEAK
2	5350.00	49.31	-1.29	48.02	74.00	-25.98	PEAK
3	5360.16	53.26	-1.22	52.04	74.00	-21.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

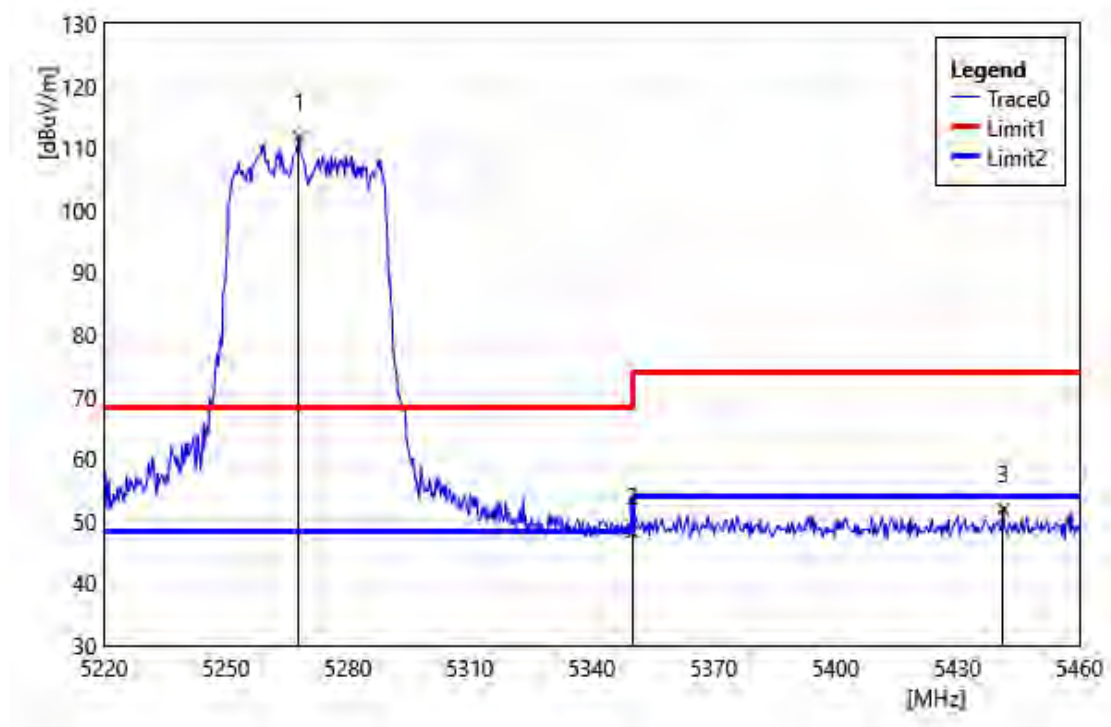


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5268.00	113.31	-1.55	111.76	68.20	43.56	PEAK
2	5350.00	49.44	-1.29	48.15	74.00	-25.85	PEAK
3	5441.28	52.64	-0.65	51.99	74.00	-22.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

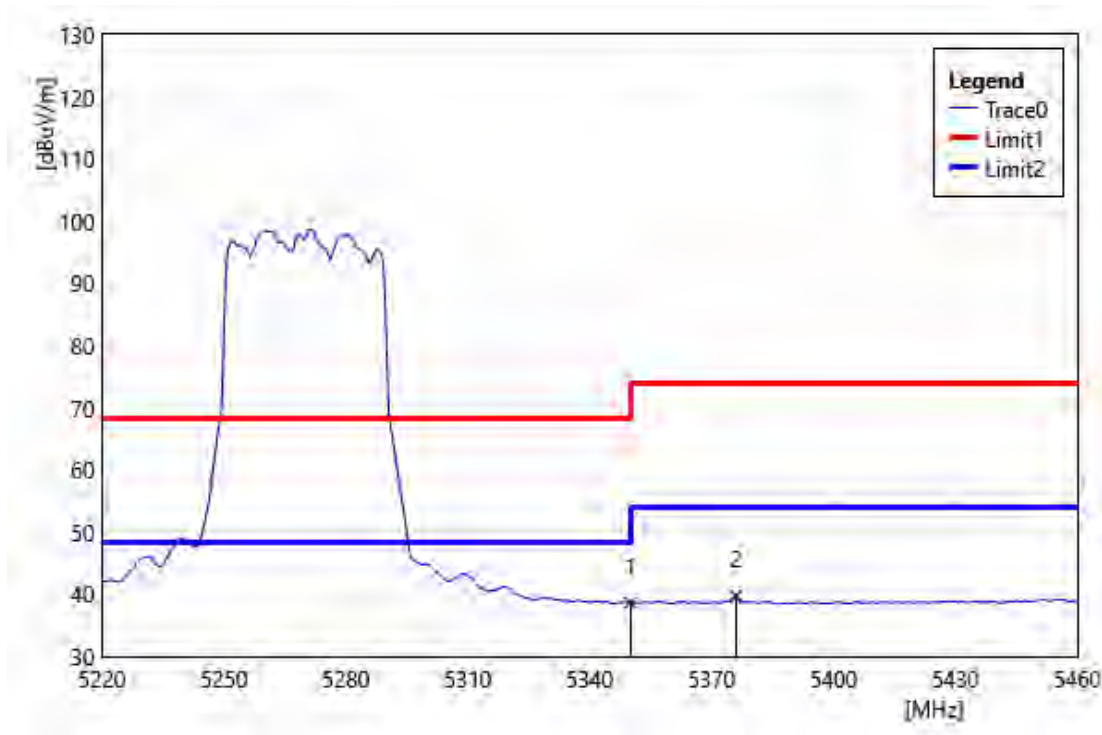


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	39.94	-1.29	38.65	54.00	-15.35	AVG
2	5376.00	40.91	-1.11	39.80	54.00	-14.20	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

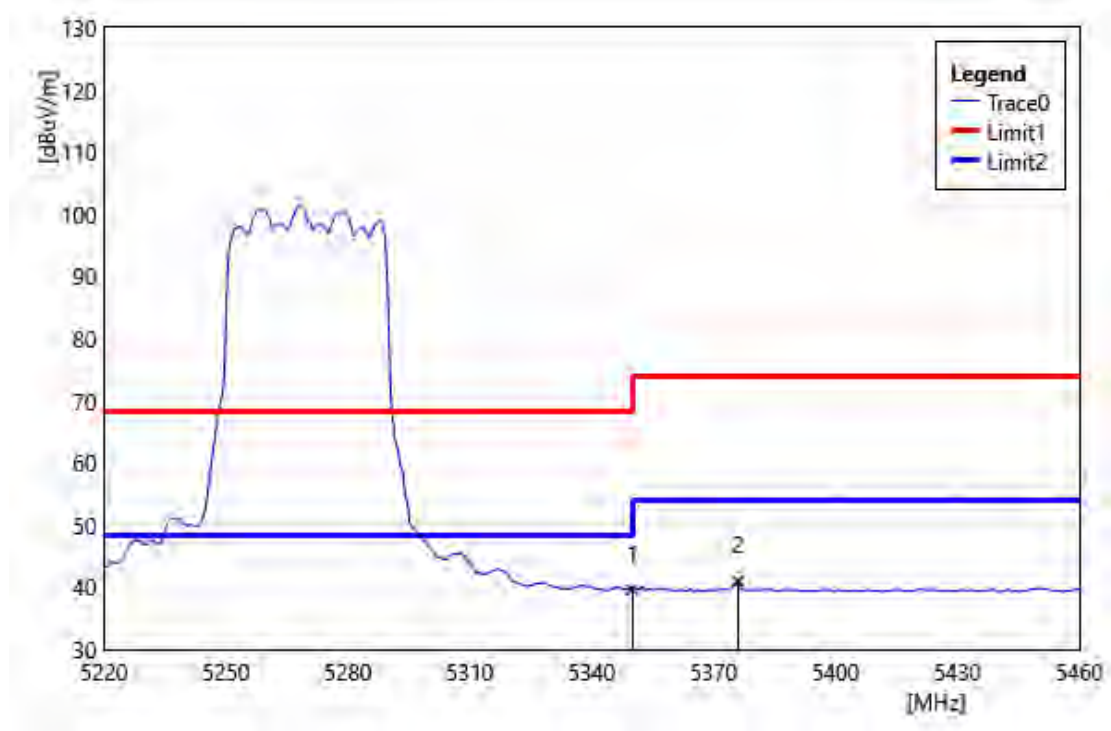


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.97	-1.29	39.68	54.00	-14.32	AVG
2	5376.00	42.12	-1.11	41.02	54.00	-12.99	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

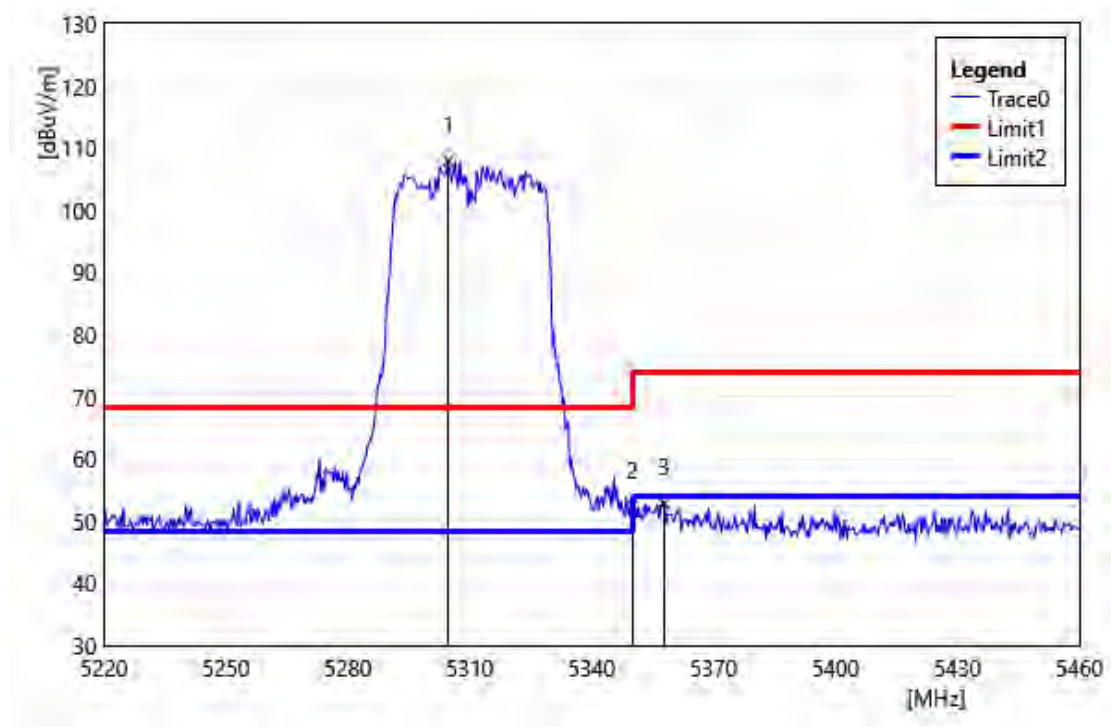


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5304.72	109.62	-1.61	108.01	68.20	39.81	PEAK
2	5350.00	53.72	-1.29	52.43	74.00	-21.57	PEAK
3	5357.76	54.14	-1.24	52.90	74.00	-21.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

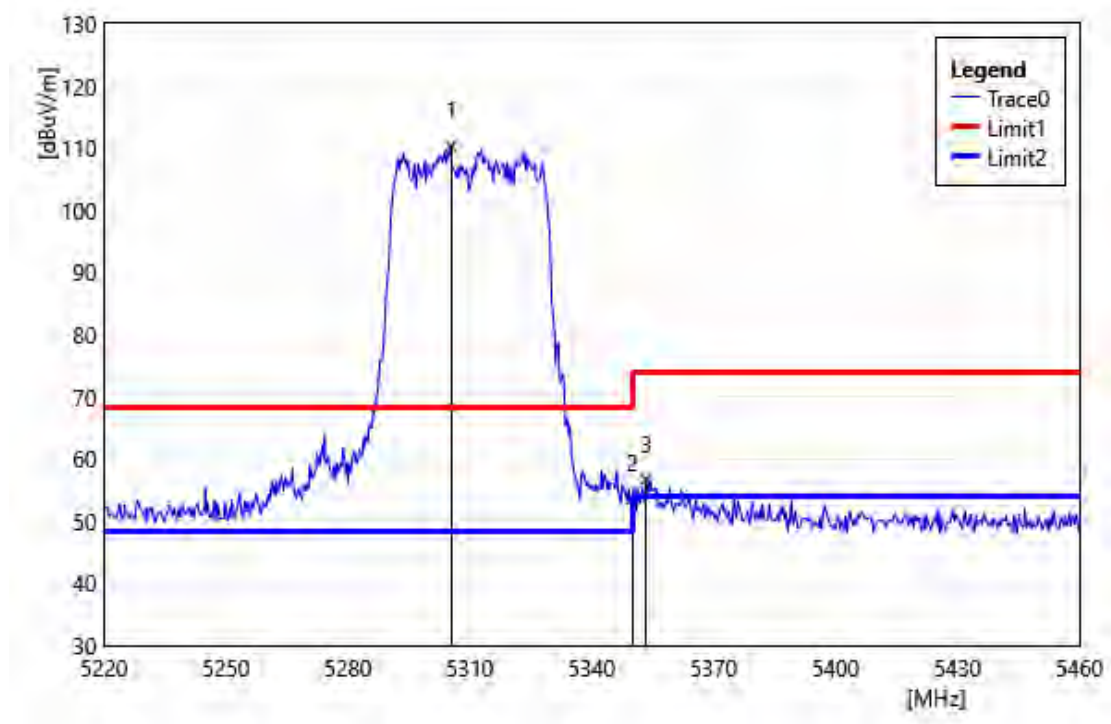


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5305.44	112.00	-1.61	110.39	68.20	42.19	PEAK
2	5350.00	54.80	-1.29	53.50	74.00	-20.50	PEAK
3	5353.44	58.02	-1.27	56.75	74.00	-17.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

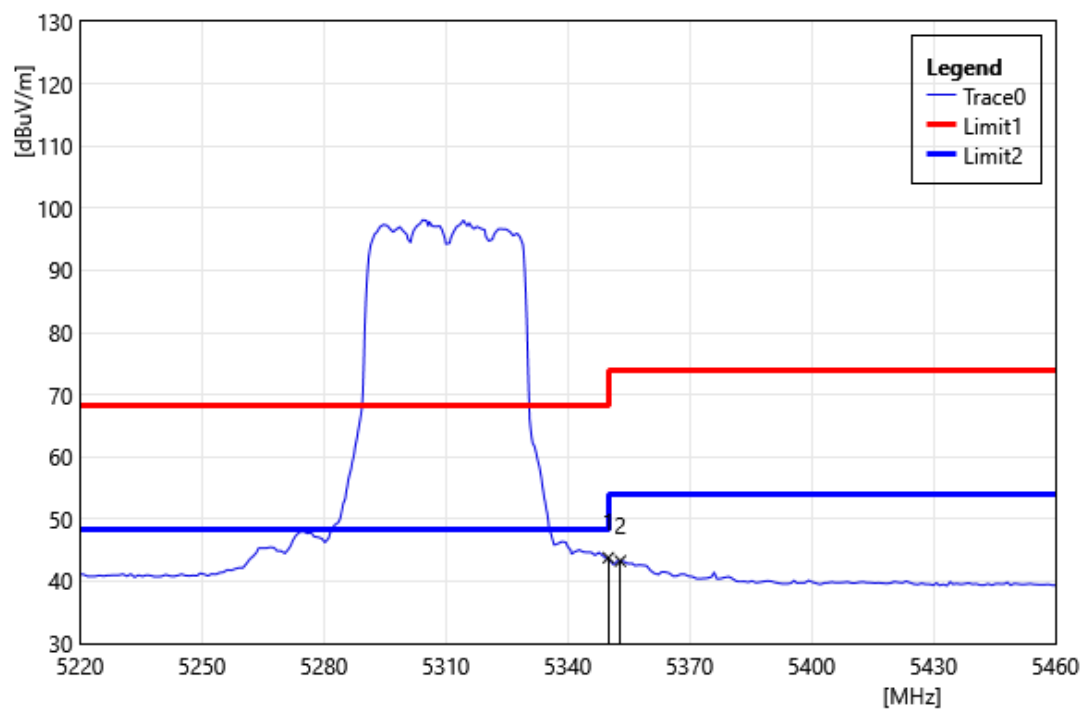


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.06	-1.29	43.77	54.00	-10.23	AVG
2	5352.96	44.53	-1.27	43.26	54.00	-10.74	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

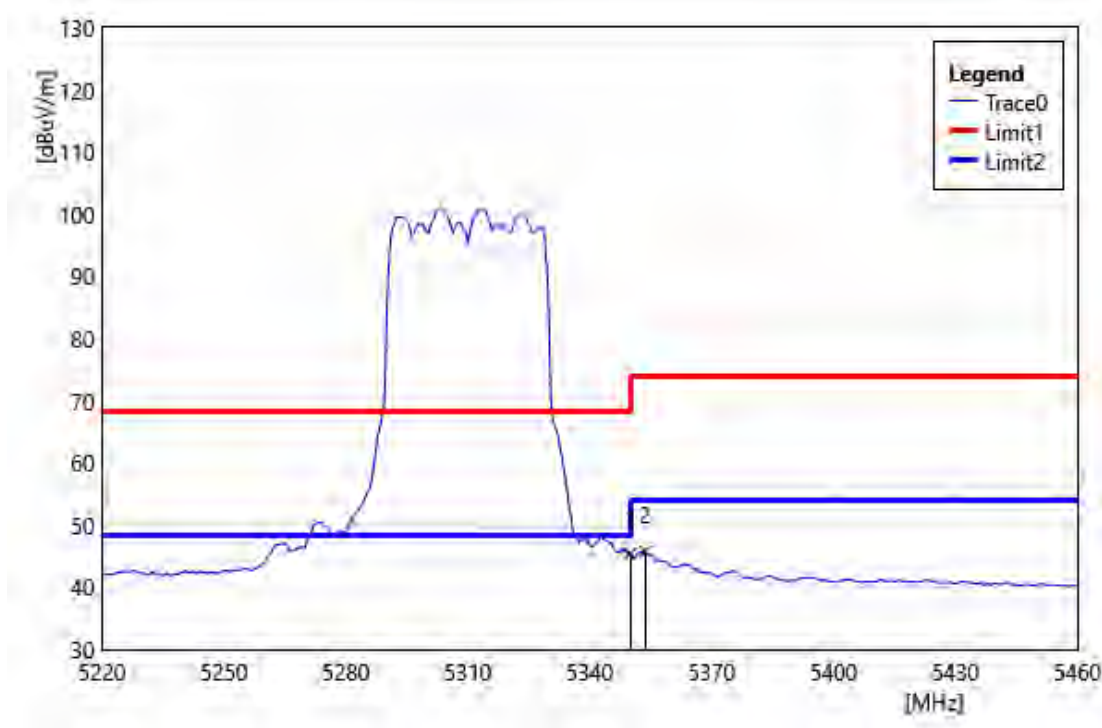


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.69	-1.29	45.40	54.00	-8.60	AVG
2	5353.68	47.02	-1.27	45.75	54.00	-8.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

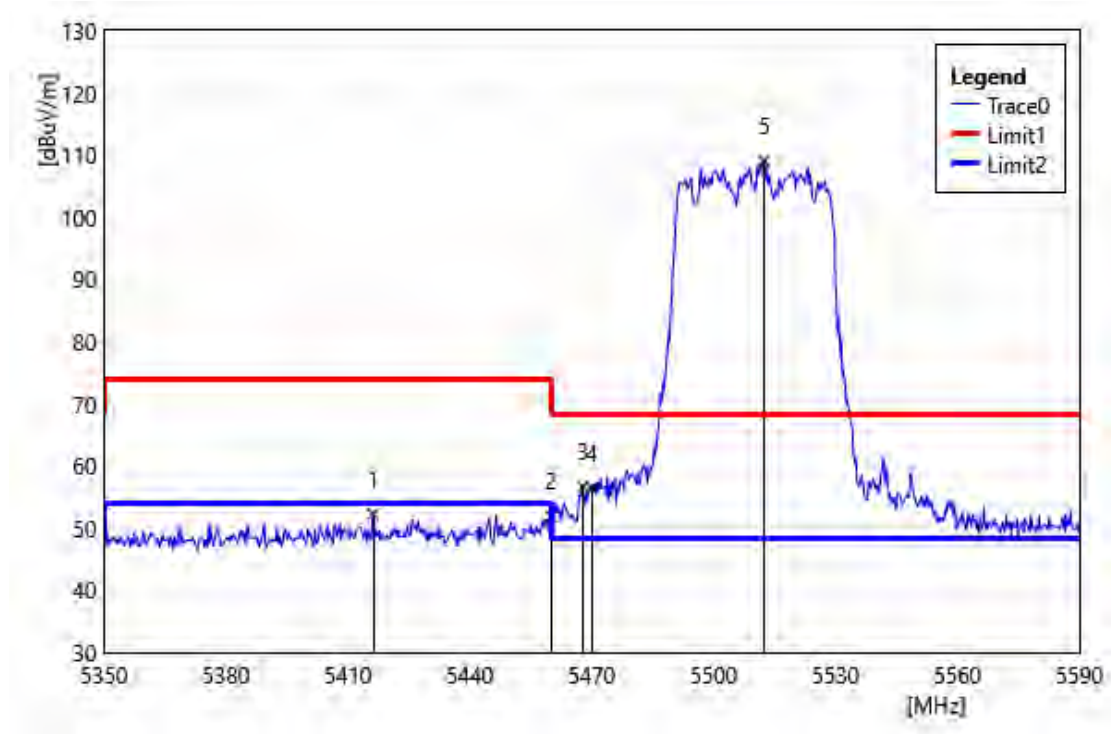


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5416.24	53.08	-0.82	52.26	74.00	-21.74	PEAK
2	5460.00	52.42	-0.57	51.85	74.00	-22.15	PEAK
3	5467.84	57.27	-0.56	56.71	68.20	-11.49	PEAK
4	5470.00	57.02	-0.56	56.46	68.20	-11.74	PEAK
5	5512.48	109.48	-0.52	108.96	68.20	40.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

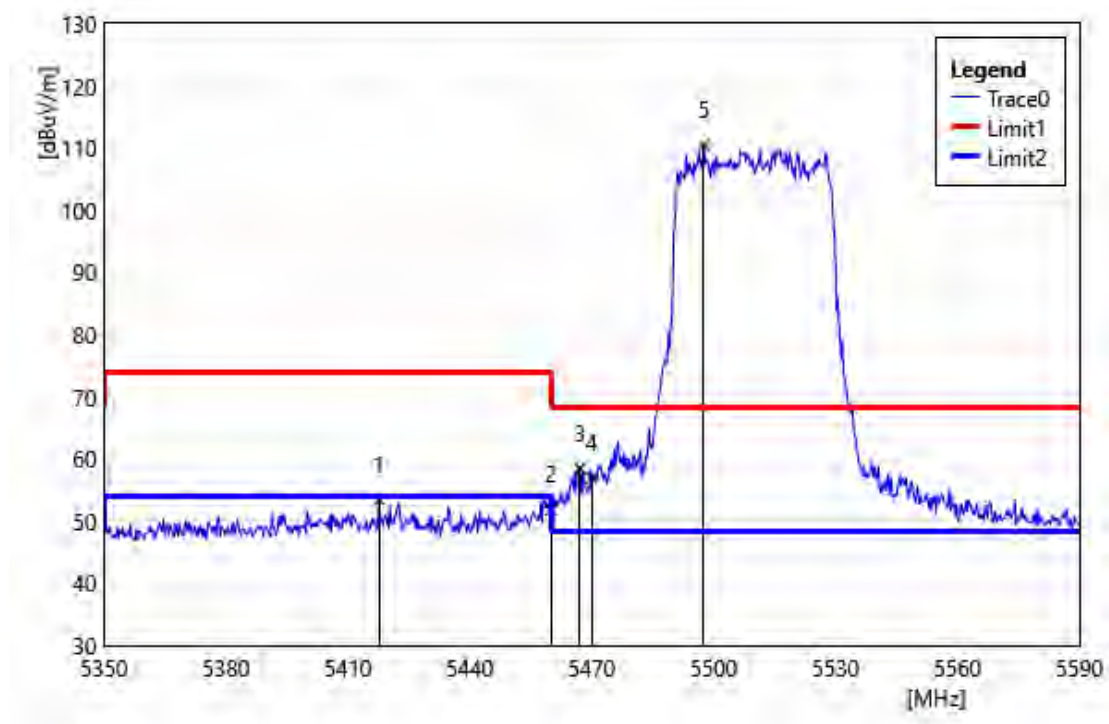


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5417.68	54.23	-0.81	53.42	74.00	-20.58	PEAK
2	5460.00	52.32	-0.57	51.75	74.00	-22.25	PEAK
3	5467.12	59.07	-0.57	58.50	68.20	-9.70	PEAK
4	5470.00	57.44	-0.56	56.88	68.20	-11.32	PEAK
5	5497.60	111.02	-0.53	110.49	68.20	42.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

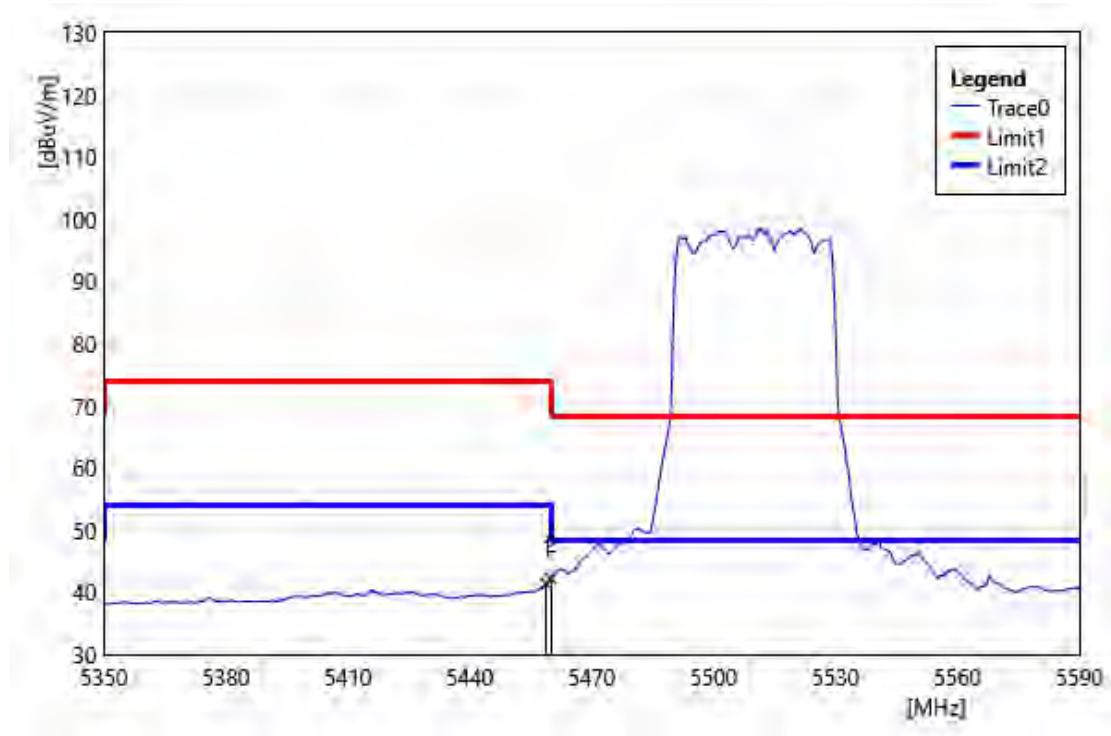


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	41.86	-0.57	41.29	54.00	-12.71	AVG
2	5460.00	42.73	-0.57	42.16	54.00	-11.84	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

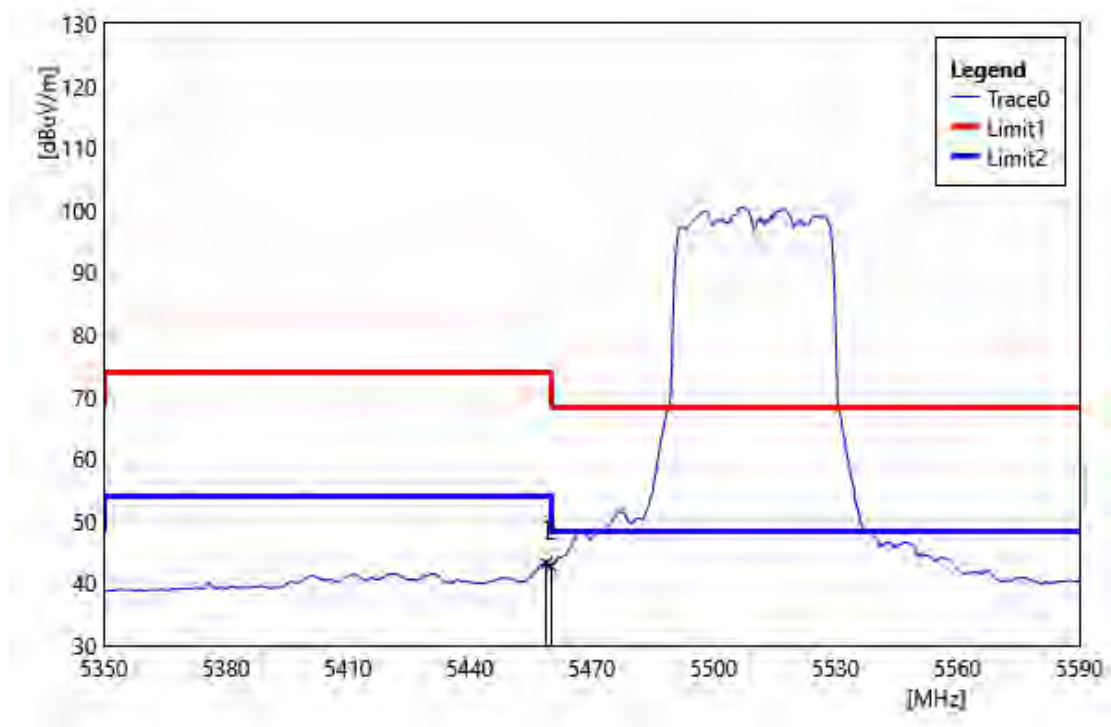


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	43.79	-0.57	43.22	54.00	-10.78	AVG
2	5460.00	43.32	-0.57	42.75	54.00	-11.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

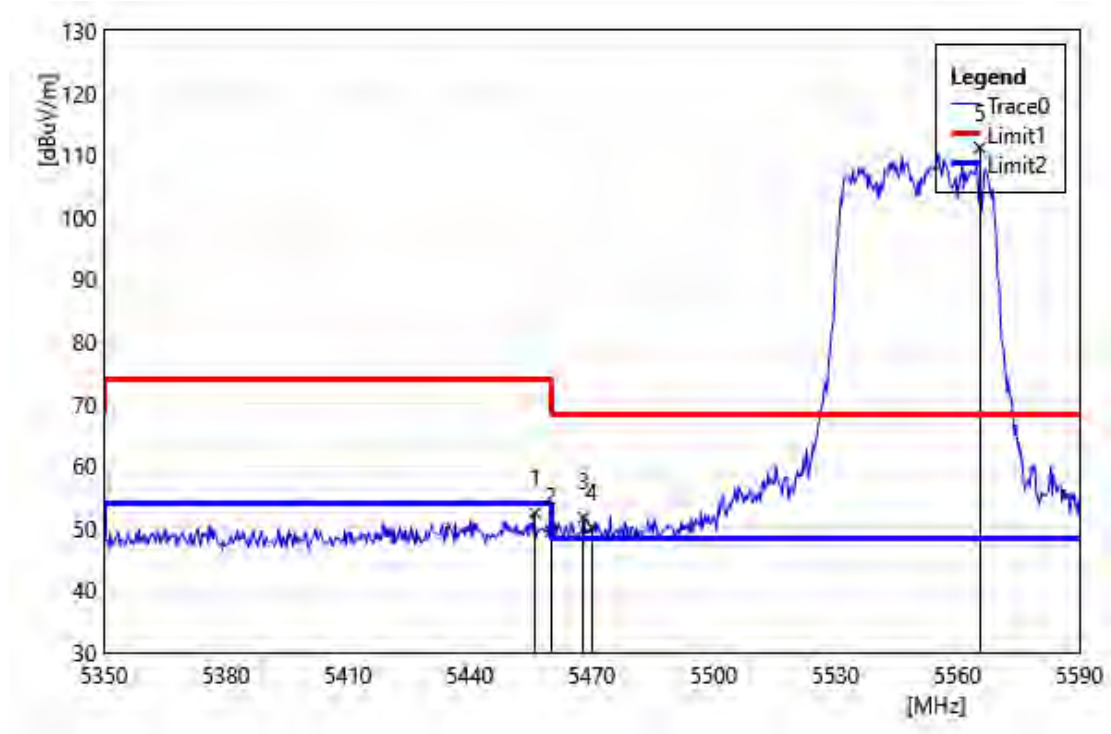


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.08	53.01	-0.58	52.43	74.00	-21.57	PEAK
2	5460.00	50.04	-0.57	49.47	74.00	-24.53	PEAK
3	5468.08	52.26	-0.56	51.70	68.20	-16.50	PEAK
4	5470.00	50.68	-0.56	50.12	68.20	-18.08	PEAK
5	5565.52	111.72	-0.52	111.20	68.20	43.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

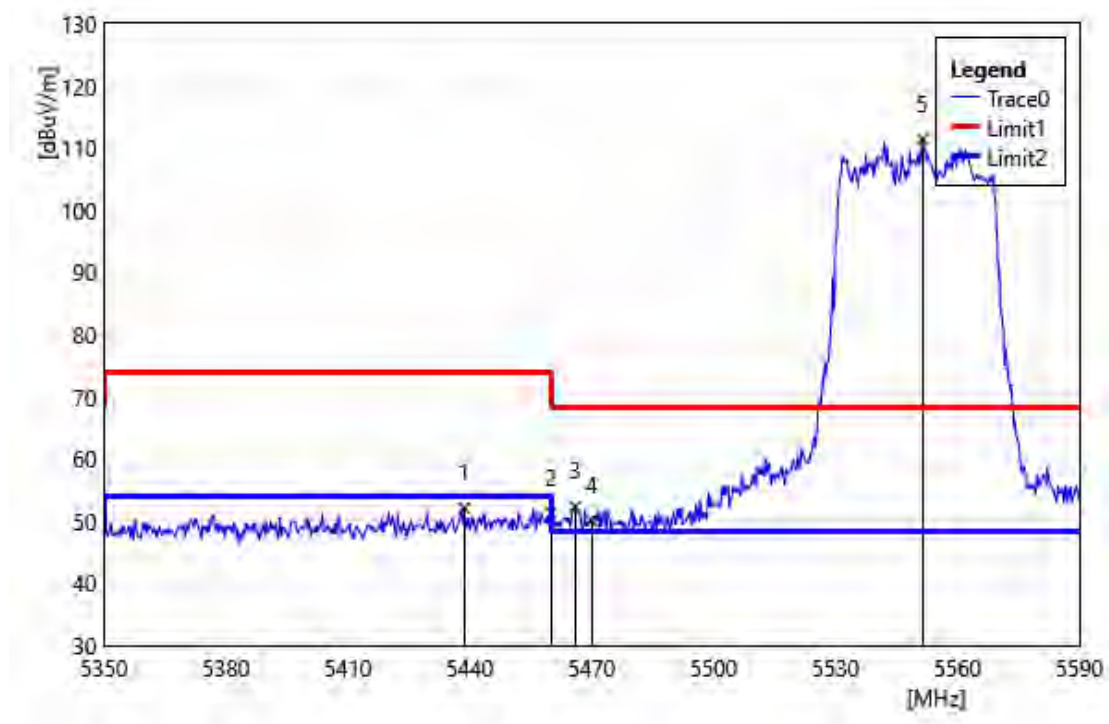


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5438.56	52.77	-0.66	52.11	74.00	-21.89	PEAK
2	5460.00	51.87	-0.57	51.30	74.00	-22.70	PEAK
3	5465.92	52.88	-0.57	52.31	68.20	-15.89	PEAK
4	5470.00	50.62	-0.56	50.06	68.20	-18.14	PEAK
5	5551.36	111.94	-0.50	111.44	68.20	43.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

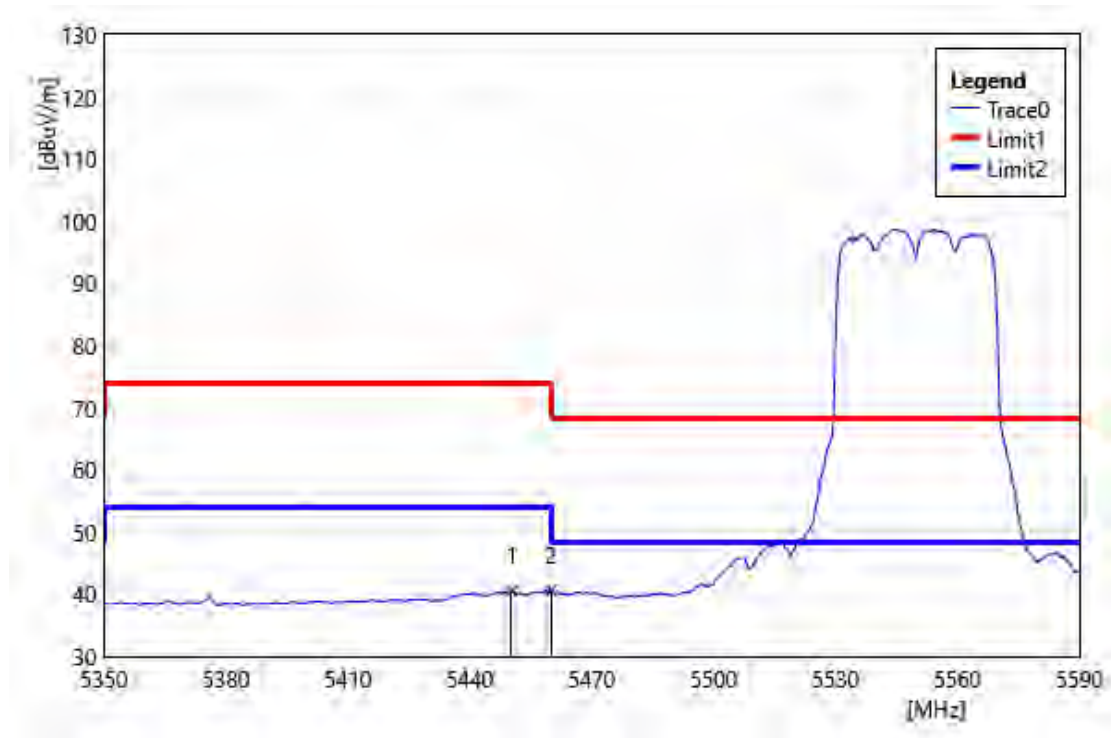


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.32	41.12	-0.58	40.54	54.00	-13.46	AVG
2	5460.00	41.19	-0.57	40.62	54.00	-13.38	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

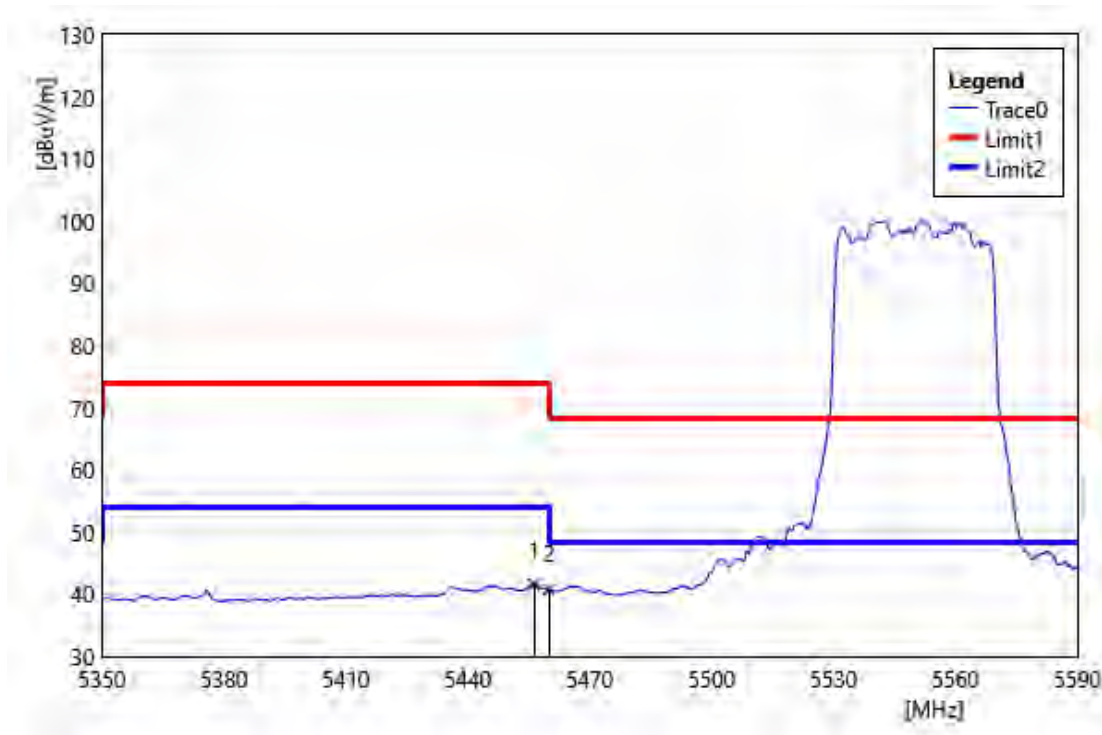


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.32	42.14	-0.58	41.56	54.00	-12.44	AVG
2	5460.00	41.35	-0.57	40.78	54.00	-13.22	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Vertical		
Remark:			

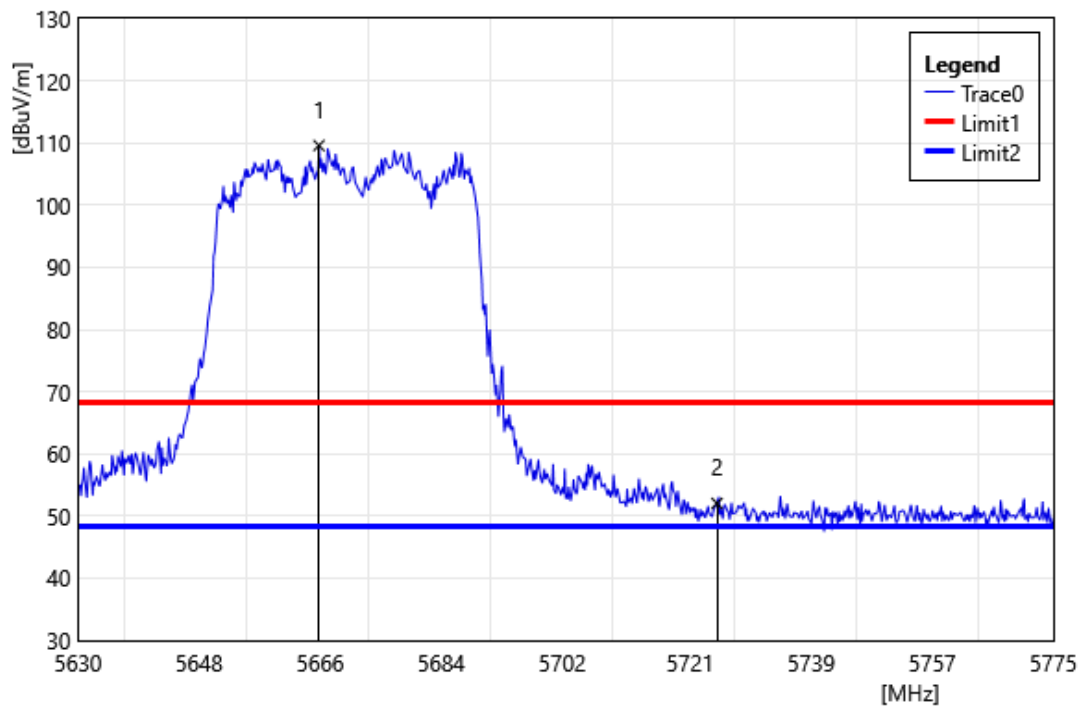


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5665.82	110.23	-0.63	109.60	68.20	41.40	PEAK
2	5725.00	52.38	-0.34	52.04	68.20	-16.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Horizontal		
Remark:			

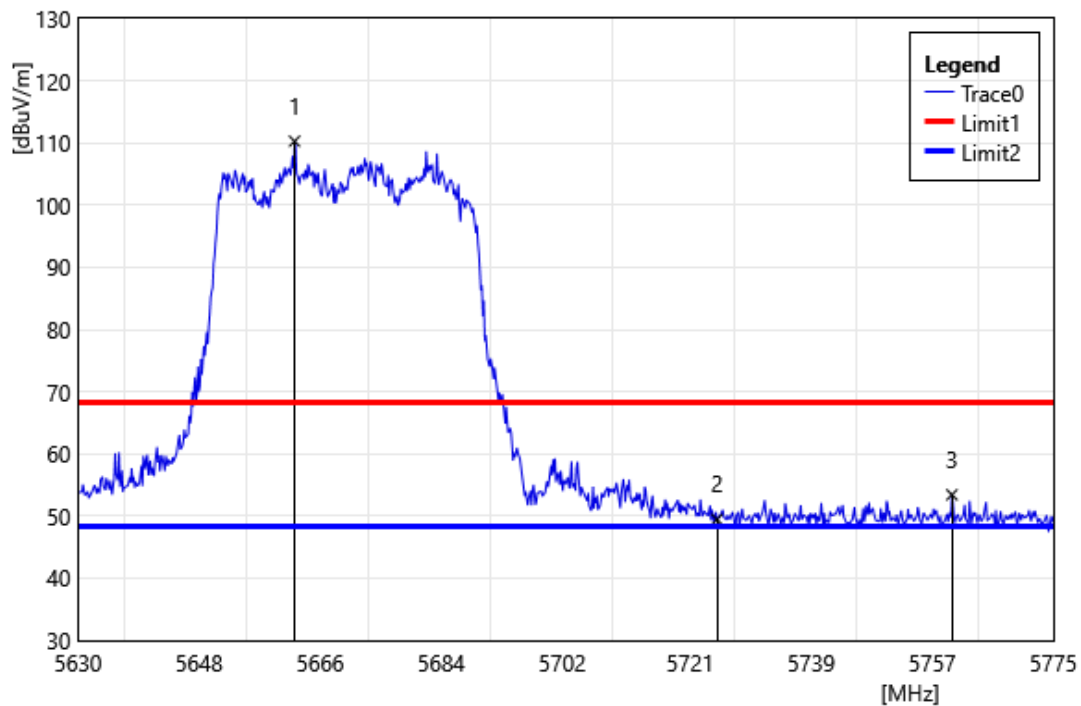


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5662.19	110.93	-0.63	110.30	68.20	42.10	PEAK
2	5725.00	49.80	-0.34	49.46	68.20	-18.74	PEAK
3	5759.92	53.46	-0.03	53.43	68.20	-14.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Vertical		
Remark:			

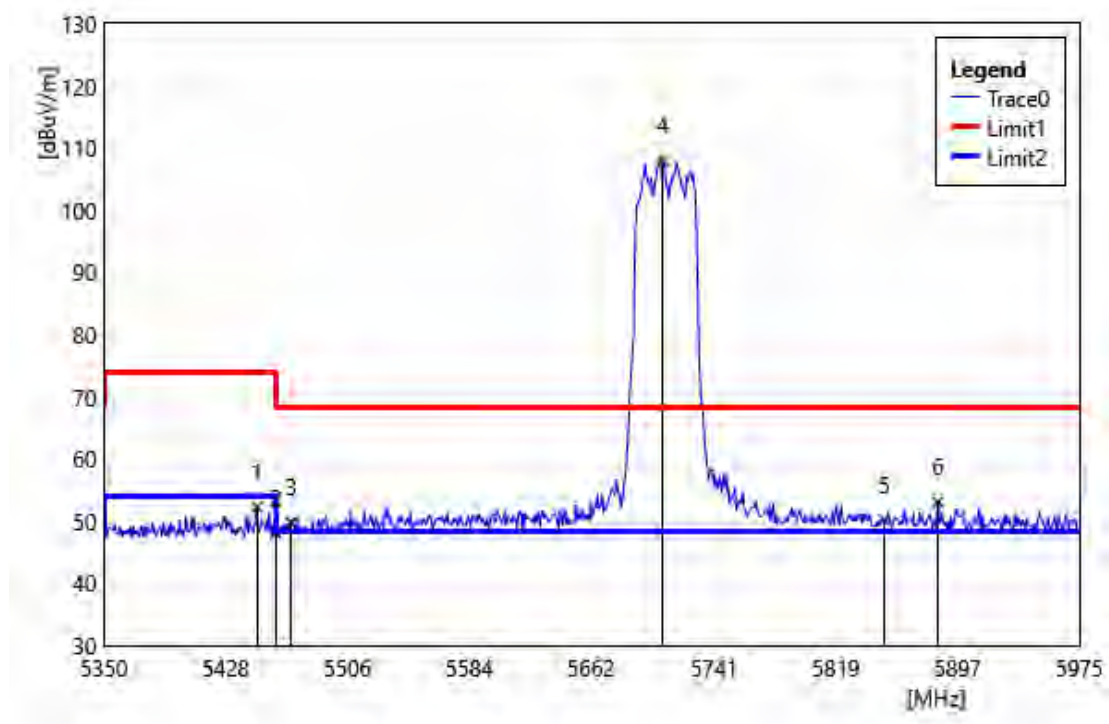


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.13	52.87	-0.60	52.27	74.00	-21.73	PEAK
2	5460.00	48.68	-0.57	48.11	74.00	-25.89	PEAK
3	5470.00	50.36	-0.56	49.80	68.20	-18.40	PEAK
4	5708.13	108.58	-0.52	108.06	68.20	39.86	PEAK
5	5850.00	49.88	0.28	50.16	68.20	-18.04	PEAK
6	5884.38	52.66	0.37	53.03	68.20	-15.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Horizontal		
Remark:			

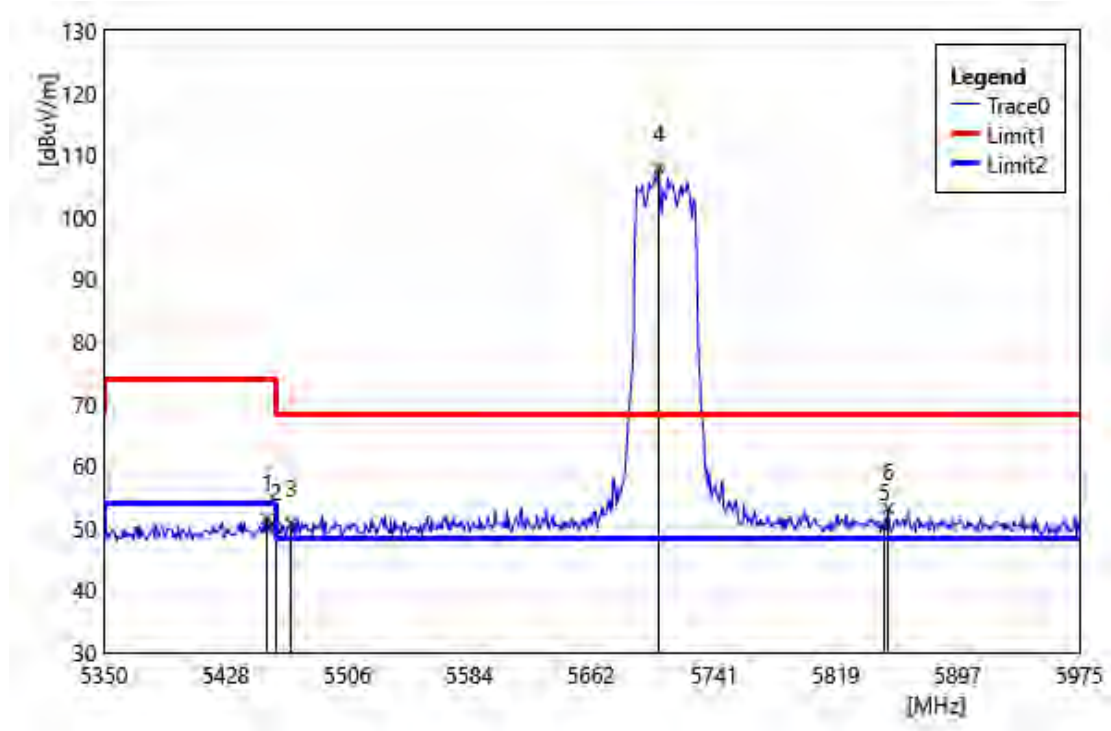

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.38	52.10	-0.58	51.52	74.00	-22.48	PEAK
2	5460.00	50.62	-0.57	50.05	74.00	-23.95	PEAK
3	5470.00	51.33	-0.56	50.77	68.20	-17.43	PEAK
4	5705.63	108.41	-0.55	107.86	68.20	39.66	PEAK
5	5850.00	49.87	0.28	50.15	68.20	-18.05	PEAK
6	5852.50	52.90	0.29	53.19	68.20	-15.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Vertical		
Remark:			

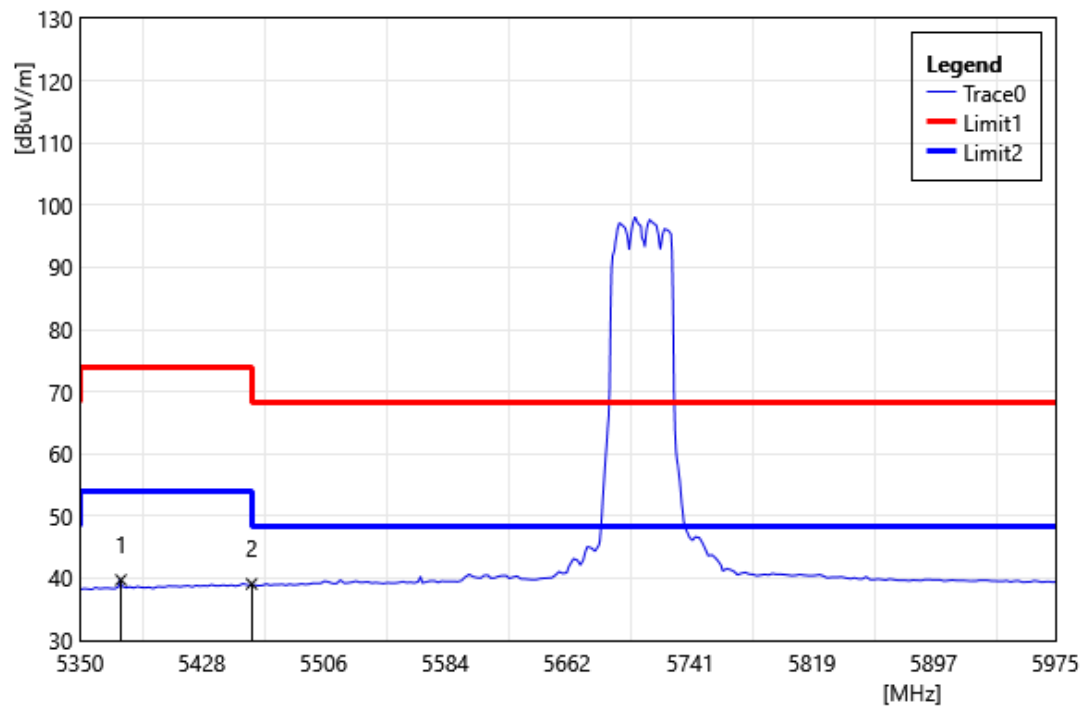

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	40.83	-1.11	39.72	54.00	-14.28	AVG
2	5460.00	39.66	-0.57	39.09	54.00	-14.91	AVG