


Appendix B. Radiated Emission Co-location Report


1. Results of Radiated Emissions for Co-located

Temperature	22°C	Humidity	54%
Test Engineer	Jay Luo	Configurations	EUT in Y axis + WALN function 2.4G + WALN function 5G

Horizontal

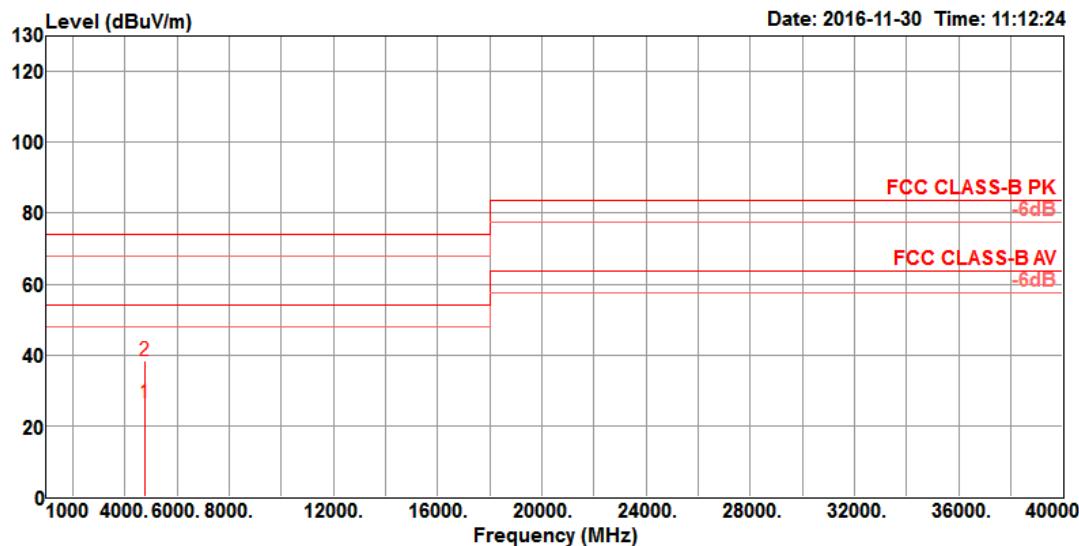

Freq	Level	Limit Line	Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
					Loss	Factor	Factor						
1	4755.74	26.43	54.00	-27.57	23.02	8.17	31.01	35.77	165	109	Average	HORIZONTAL	
2	4756.20	38.26	74.00	-35.74	34.83	8.18	31.02	35.77	165	109	Peak	HORIZONTAL	

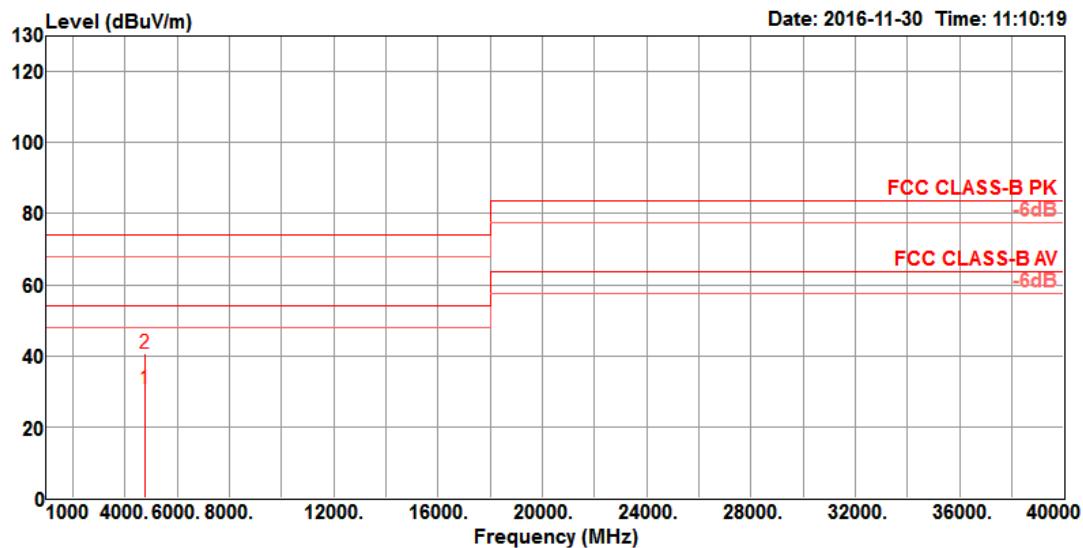Vertical


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB									
1	4755.63	30.69	54.00	-23.31	27.28	8.17	31.01	35.77	131	108	Average	VERTICAL
2	4758.72	40.72	74.00	-33.28	37.29	8.18	31.02	35.77	131	108	Peak	VERTICAL