



TESTING CERT #3478.01



TEST REPORT

EUT Description	WiGig, WLAN and BT, 2x2 PCIe M.2 adapter card
Brand Name	Intel® Tri-Band Wireless-AC 18260
Model Name	18260NGW, 18260NGW LC
Serial Number	WiGig MAC: 34:13:E8:31:A7:3B / 34:13:E8:06:31:F7 (see section 4)
FCC/IC ID	FCC ID: PD918260NG IC ID: 1000M-18260NG
Antenna type	Intel ® Wireless Gigabit Antenna-M 10042R (Array Antenna Model No . 10042RRFW) HW config: 31.1
Hardware/Software Version	Test SW: DRTU version 1.8.3-01157 Driver ver.: 2.0.130.118
Date of Sample Receipt	2015-10-29
Date of Test Start/End	2015-11-02 / 2015-12-06
Features	WiGig + 802.11 a/b/g/n/ac Wireless LAN + BDR/EDR 2.1 + BLE 4.0 (see section 5)

Applicant	Intel Mobile Communications 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Address	
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15C, Part 2.1091 IC RSS-210 Issue 8, IC RSS-Gen Issue 4, IC RSS-102 (see section 1)
---------------------	---

Test Report number	15102901.TR01
Revision Control	Rev. 00

The test results relate only to the samples tested. The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed byWalid EL HAJJ
(RF Test Operator)Jose M. FORTES
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 – 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples.....	4
5. EUT Features	5
6. Remarks and comments	5
7. Test Verdicts summary	5
8. Document Revision History.....	5
Annex A. Test & System Description	6
A.1 EUT DESCRIPTION	6
A.2 MEASUREMENT SYSTEM	7
A.3 TEST EQUIPMENT LIST	10
A.4 MEASUREMENT UNCERTAINTY EVALUATION	11
Annex B. Tests Results	12
B.1 EMISSION BANDWIDTH	12
B.2 PEAK AND AVERAGE POWER, RF DETECTOR.....	16
B.3 CONDUCTED PEAK OUTPUT POWER, RF DETECTOR	18
B.4 SPURIOUS EMISSIONS	19
B.5 FREQUENCY STABILITY	26
B.6 GROUP INSTALLATION.....	28
B.7 RF EXPOSURE	29
Annex C. Photographs	31
C.1 RADIATED TEST SETUP	31
C.2 TEST SAMPLE.....	32

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part 15 - Subpart C – §15.255 Operation within the band 57-64 GHz.
2. ANSI C63.10-2013, Clause 9 – Procedures for testing millimeter-wave systems.
3. IC RSS-Gen Issue 4 – General Requirements for Compliance of Radio Apparatus.
4. IC RSS-210 Issue 8 – Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
5. FCC 47 CFR Part 2 – Subpart J – §2.1091 Radiofrequency radiation exposure evaluation: mobile devices.
6. IC RSS-102 Issue 5 – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA).
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm listed by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by IC, with IC Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	20°C ± 2°C
Humidity	47% ± 5%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of reception	Note
#01	15081801.S16	RF Module	18260NGW	WFW: 3413E80631F2 BDM:3413E80631F6 WGM: 3413E80631F7	2015-08-26	Used for spurious tests below 40GHz, and for RF detector tests of Channel 2
	15081801.S04	Extender board	PCB00432	ASS00423-001 4324612-134	2015-08-17	
	15102901.S03	WiGig Antenna	RFEM2 10042RRFW	-	2015-10-29	
	15081801.S12	PCIe Extender	PCB00284	ASS00284-001 2843512-012	2015-08-17	
	15081801.S13	ExpressCard Adapter	-	-	2015-08-17	
	-	Laptop	Dell E55430	-	2015-08-17	
#02	15081801.S16	RF Module	18260NGW	WFW: 3413E80631F2 BDM:3413E80631F6 WGM: 3413E80631F7	2015-08-26	Used for RF detector tests of Channel 1
	15081801.S04	Extender board	PCB00432	ASS00423-001 4324612-134	2015-08-17	
	15102901.S01	WiGig Antenna	RFEM2 10042RRFW	-	2015-10-29	
	15081801.S12	PCIe Extender	PCB00284	ASS00284-001 2843512-012	2015-08-17	
	15081801.S13	ExpressCard Adapter	-	-	2015-08-17	
	-	Laptop	Dell E55430	-	2015-08-17	
#03	15081801.S16	RF Module	18260NGW	WFW: 3413E80631F2 BDM:3413E80631F6 WGM: 3413E80631F7	2015-08-26	Used for RF detector tests of Channel 3
	15081801.S04	Extender board	PCB00432	ASS00423-001 4324612-134	2015-08-17	
	15102901.S02	WiGig Antenna	RFEM2 10042RRFW	-	2015-10-29	
	15081801.S12	PCIe Extender	PCB00284	ASS00284-001 2843512-012	2015-08-17	
	15081801.S13	ExpressCard Adapter	-	-	2015-08-17	
	-	Laptop	Dell E55430	-	2015-08-17	
#04	15081801.S08	RF Module	18260NGW	WFM:3413E831A736 BDM:3413E831A73A WGM:3413E831A73B	2015-08-17	Used for all remaining tests
	15081801.S05	Extender board	PCB00469	ASS00469-001 4694213-134	2015-08-17	
	15102901.S01	WiGig Antenna	RFEM2 10042RRFW	-	2015-10-29	
	15081801.S24	PCIe Extender	PCB00284	ASS00284 2840614-070	2015-08-11	
	15081801.S25	ExpressCard Adapter	-	-	2015-08-11	
	-	Laptop	Dell E55430	41649374558	2015-08-11	

5. EUT Features

These are the detailed bands and modes supported by the equipment under Test:

WiGig	60GHz (57.24 – 63.72 GHz)
802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac	5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
BDR/EDR v2.1 Bluetooth LE v4.0	2.4GHz (2400.0 – 2483.5 MHz)

6. Remarks and comments

N/A

7. Test Verdicts summary

FCC part	RSS part	Test name	Verdict
15.255 (e) (1)	RSS-210 Annex A13.2.3	Emission & Occupied Bandwidth	P
15.255 (b) (1)	RSS-210 Annex A13.2.2 (1)	Peak and Average Power, RF detector	P
15.255 (e) (1)	RSS-210 Annex A13.2.3	Peak Output Power, RF detector	P
15.255 (c) (1) (2) (3) (4) 15.255 (d)	RSS-210 Annex A13.2.2	Spurious Emissions	P
15.255 (f)	RSS-210 Annex A13.2.5	Frequency Stability	P
15.255 (h)	RSS-210 Annex A13.2.6	Group Installation	P
-	RSS-210 Annex A13.2.7	Transmitter Identification	NA ¹
15.255 (g) 2.1091	RSS-102	RF Exposure	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

8. Document Revision History

Revision #	Date	Modified by	Details
Rev. 00	2015-12-09	W. EL HAJJ	First Issue

¹ According to applicant declaration, the EUT is used for indoor operation only. There are no outdoor units, therefore no transmissions are emitted outside the building

Annex A. Test & System Description


A.1 EUT Description

The EUT is a 60 GHz 802.11ac WiGig module adapter supporting one RFEM antenna array with typical application intended for portable platforms like Laptops, Tablets etc.:

Operation Frequencies	
Channel 1	58.32 GHz
Channel 2	60.48 GHz
Channel 3	62.64 GHz

Peak Antenna Gain	Channel 1: 15.3	Channel 2: 15.2	Channel 3 : 14.8	dB ⁱ
Highest EIRP		24.5		dBm
Highest Peak Output Power		11.75		mW


The EUT is composed by the tested RF module mounted on an extender board and connected to an antenna array via an Intermediate Frequency (IF) coaxial cable. The group is connected to a laptop via a PCIe cable, PCIe extender and an express card adapter.

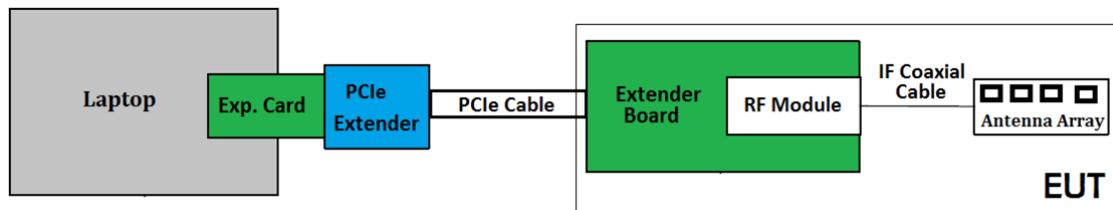


A.2 Measurement system




Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10-2013, Clause 9 – Procedures for testing millimeter-wave systems.



Emission Bandwidth Measurement Setup (57 – 64 GHz)

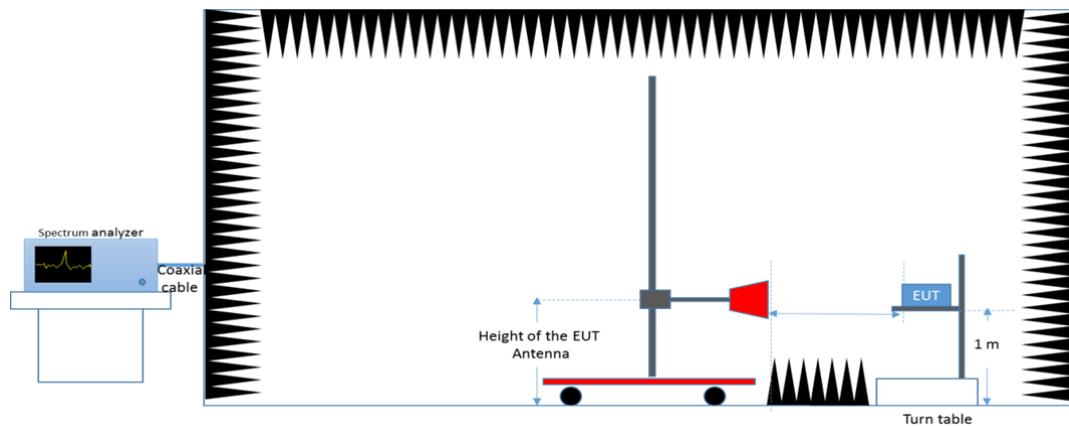

RF Detector Measurement Setup (57 – 64 GHz)

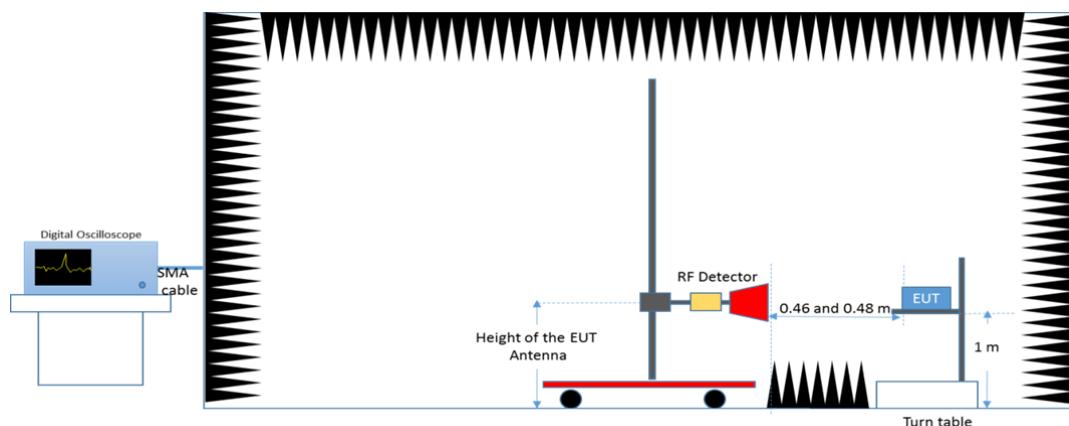

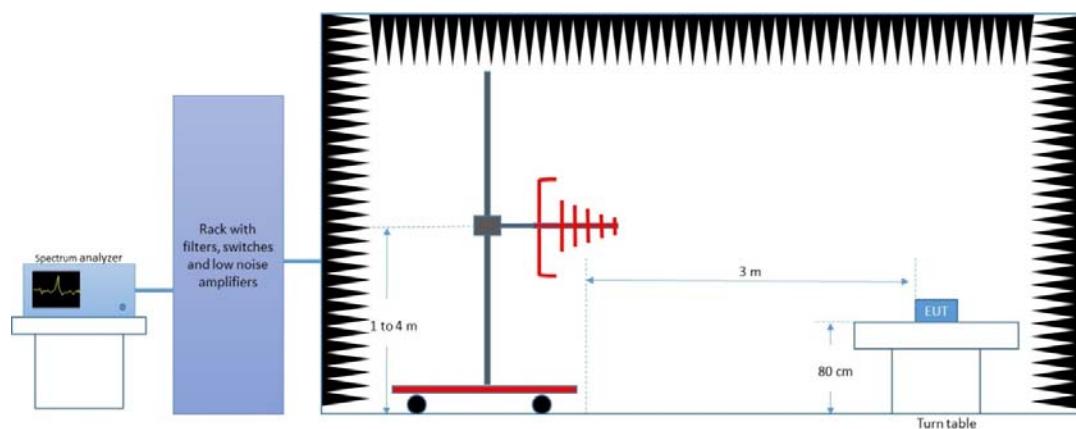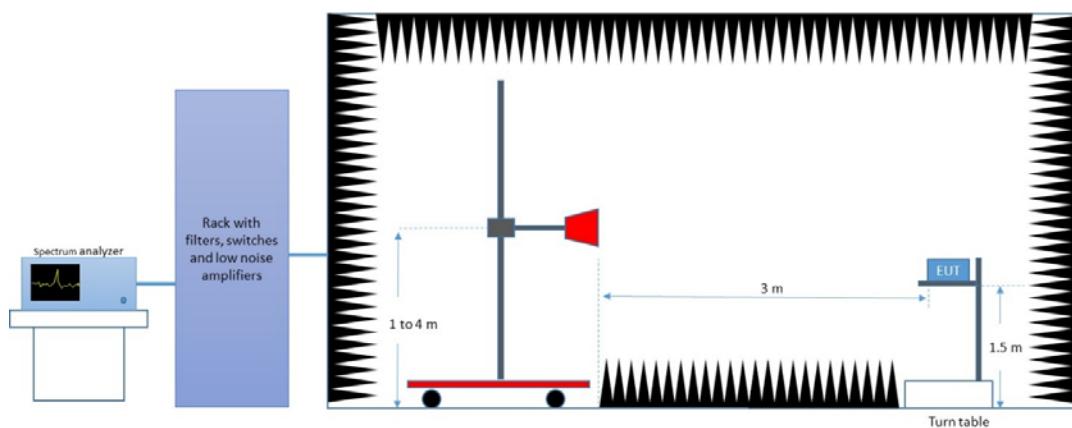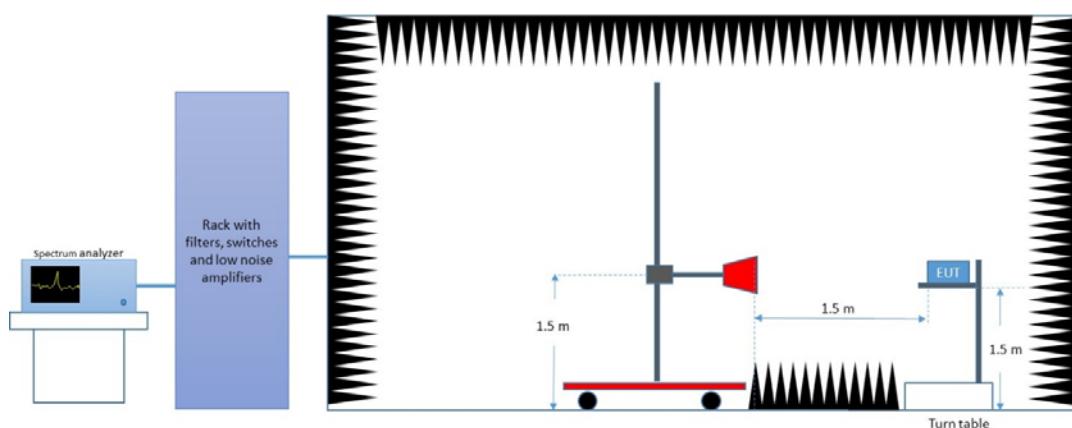Radiated Setup (30 MHz – 1 GHz)*Radiated Setup (1 GHz – 18 GHz)**Radiated Setup (18 GHz – 40 GHz)*

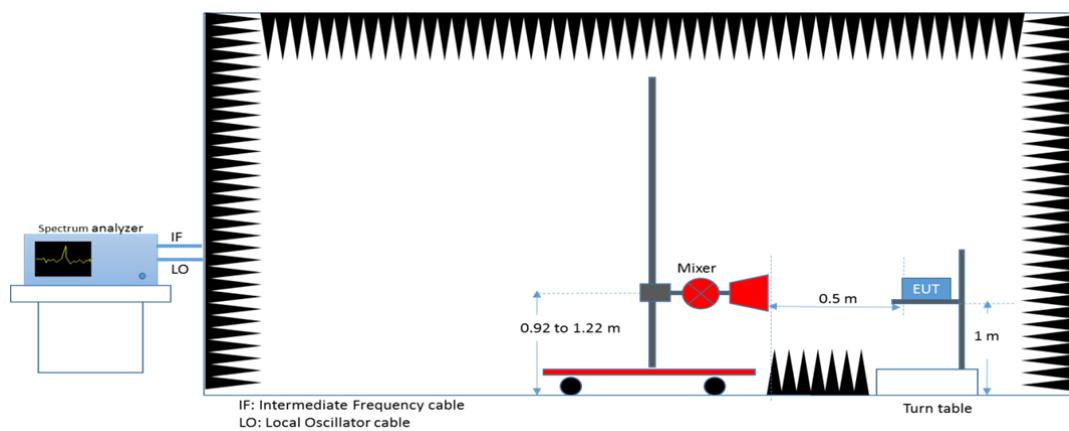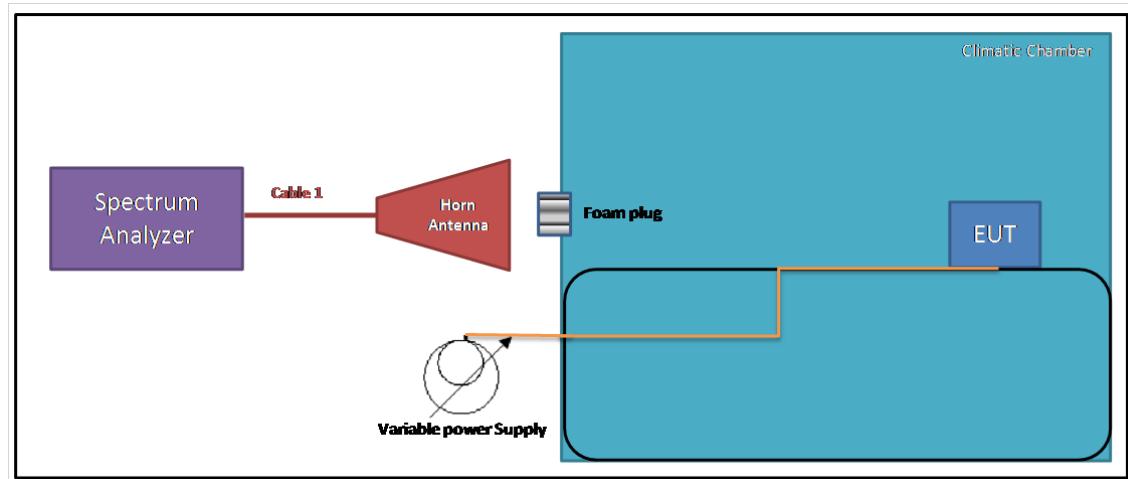Radiated Setup (40 GHz – 200 GHz)*Frequency Stability Measurement Setup (57 – 64 GHz)*

A.3 Test Equipment List

ID#	Device	Model Name	Manufacturer	S/N	Calibration Date	Calibration Due Date
0015	Spectrum Analyzer	FSU67	R&S	100092	2015-07-31	2017-07-31
0133	Spectrum Analyzer	FSV40	R&S	101072	2014-01-30	2016-01-30
0258	Spectrum Analyzer	FSV30	R&S	101318	2014-05-14	2016-05-14
0308	Signal Generator	SMB100A	R&S	178212	2015-03-16	2017-03-16
0014	Power Sensor	NRP-Z57	R&S	101280	2015-05-06	2017-05-06
0312	Digital Oscilloscope	RTE1052	R&S	101135	2015-03-25	2017-03-25
0251	RF Detector	DET-15	Millitech	-	N/A	N/A
0063	Multiplier Assembly (40-220 GHz)	AFM-40-220	RPG	394	N/A	N/A
0137	Measurement Antenna (30 MHz-1 GHz)	3142E	ETS Lindgren	00156946	2014-03-05	2016-03-05
0138	Measurement Antenna (1-6.4 GHz)	3117	ETS Lindgren	00152266	2014-03-04	2016-03-04
0141	Measurement Antenna (6.4-18 GHz)	3117-PA	ETS Lindgren	00157736	2014-06-03	2016-06-03
0139	Measurement Antenna (18-26.5GHz)	114514	ETS Lindgren	00167100	2014-04-25	2016 -04-25
0140	Measurement Antenna (26.5-40 GHz)	120722	ETS Lindgren	120722	2014-08-14	2016 -08-14
0064	Measurement Antenna (40-60 GHz)	FH-SG-060-25	RPG	20011	N/A	N/A
0066	Measurement Antenna (50-75 GHz)	FH-SG-075-25	RPG	20012	N/A	N/A
0068	Measurement Antenna (60-90 GHz)	FH-SG-090-25	RPG	-	N/A	N/A
0069	Measurement Antenna (75-110 GHz)	FH-SG-110-25	RPG	-	N/A	N/A
0070	Measurement Antenna (110-170 GHz)	FH-SG-170-25	RPG	-	N/A	N/A
0071	Measurement Antenna (140-220GHz)	FH-SG-220-25	RPG	-	N/A	N/A

NA: Not Applicable

ID#	Device	Model Name	Manufacturer	S/N	Calibration Date	Calibration Due Date
0057	MIXER 40-60GHz	FS-Z60	R&S	100130	2015-10-22	2017-10-22
0058	MIXER 60-90GHz	FS-Z90	R&S	100098	2015-06-04	2017-06-04
0059	MIXER 75-110GHz	FS-Z110	R&S	100069	2015-05-26	2017-05-26
0061	MIXER 110-170GHz	SAM-170	RPG	020000	2015-06-03	2017-06-03
0062	MIXER 140-220GHz	SAM-220	RPG	020012	2015-06-03	2017-06-03
0135	Anechoic chamber	FACT 3	ETS Lindgren	RFD_FA_100	2014-05-06	2016-05-06
0300	Climatic Chamber	SLT34/40	SECASI	56746020930010	2015-03-09	2017-03-09
0329	Measurement Software	EMC32	R&S	1300.7027.00 (100401)	N/A	N/A

NA: Not Applicable

A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:


Measurement type	Uncertainty [±dB]
Radiated tests for power Measurement (57-66G)	±3.4
Radiated spurious tests < 1GHz	±3.8
Radiated Spurious tests 1 GHz - 40GHz	±4.7
Radiated Spurious tests 40GHz - 200GHz	±4.7

Annex B. Tests Results

B.1 Emission Bandwidth

Test procedure

The setup below was used to measure the 6dB & 99% Bandwidth. The measurement antenna covering the band (50-75G) is connected to the spectrum analyzer through a coaxial cable. The Spectrum analyzer is able to measure directly up to 67GHz. The EUT is configured to operate at the Modulation and Coding Scheme index (MCS) giving the maximum output power (MCS 1)².

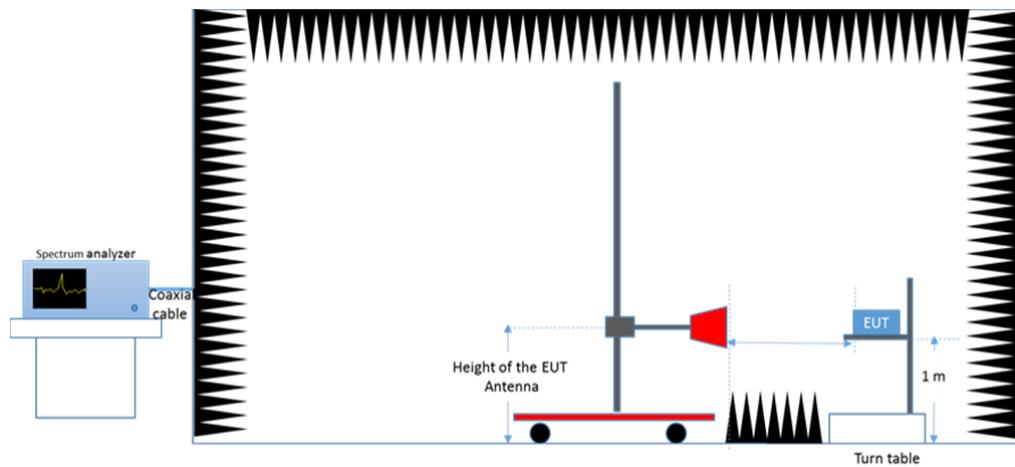



Results tables


Emission Bandwidths					
Mode	MCS	Channel	Frequency (GHz)	6 dB Bandwidth (GHz)	99% Bandwidth (GHz)
WiGig	1	1	58.32	1.234	1.939
WiGig	1	2	60.48	1.277	1.875
WiGig	1	3	62.64	1.217	1.859

² MCS 1 corresponds to $\pi/2$ BPSK Modulation type with a coding rate of (1/4) including repetition

Results screenshots

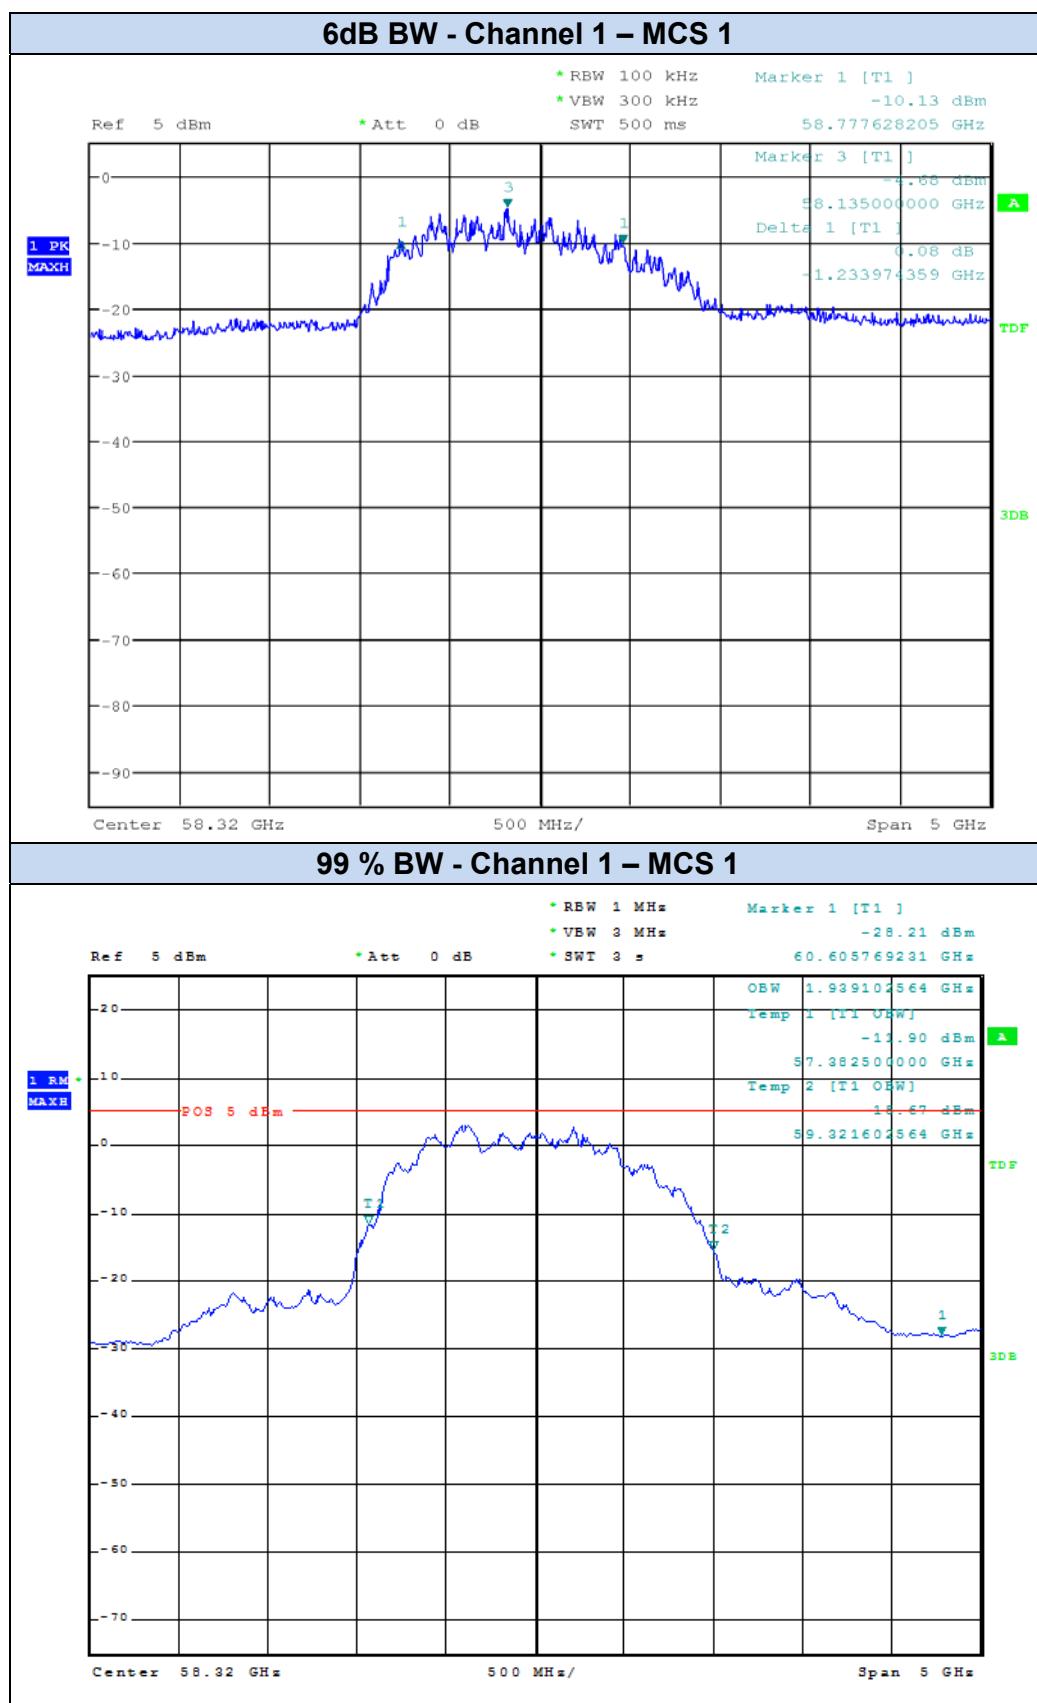

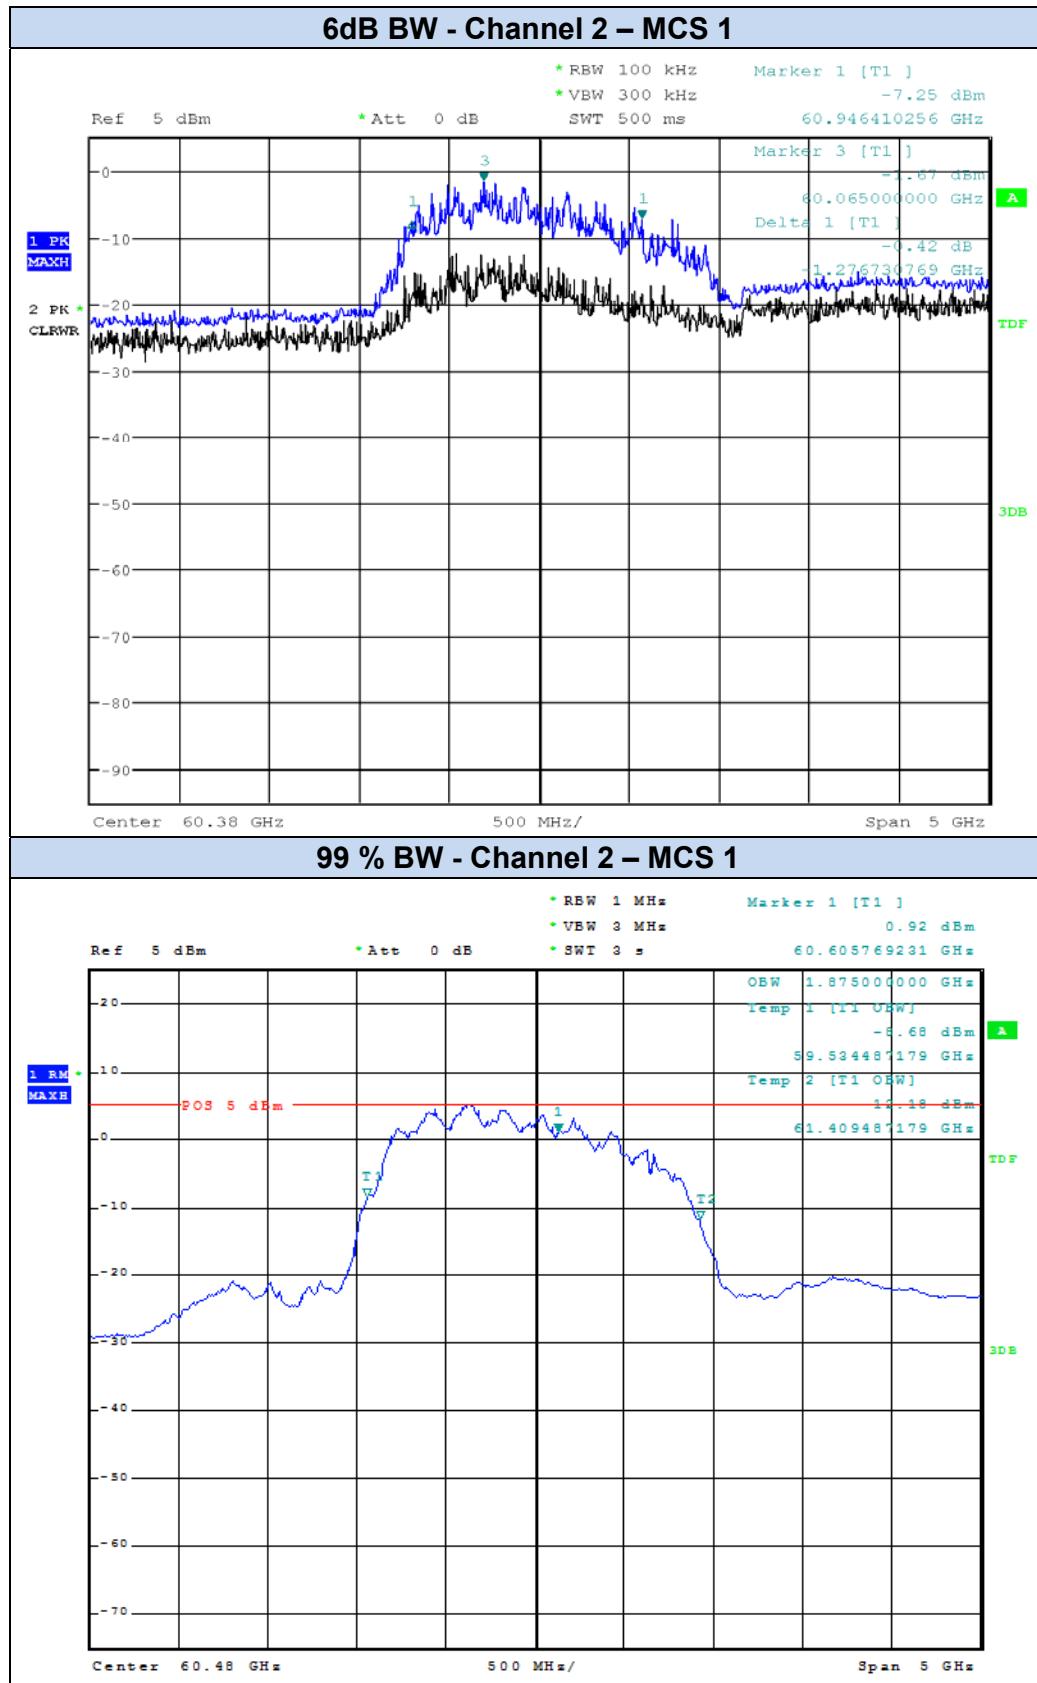

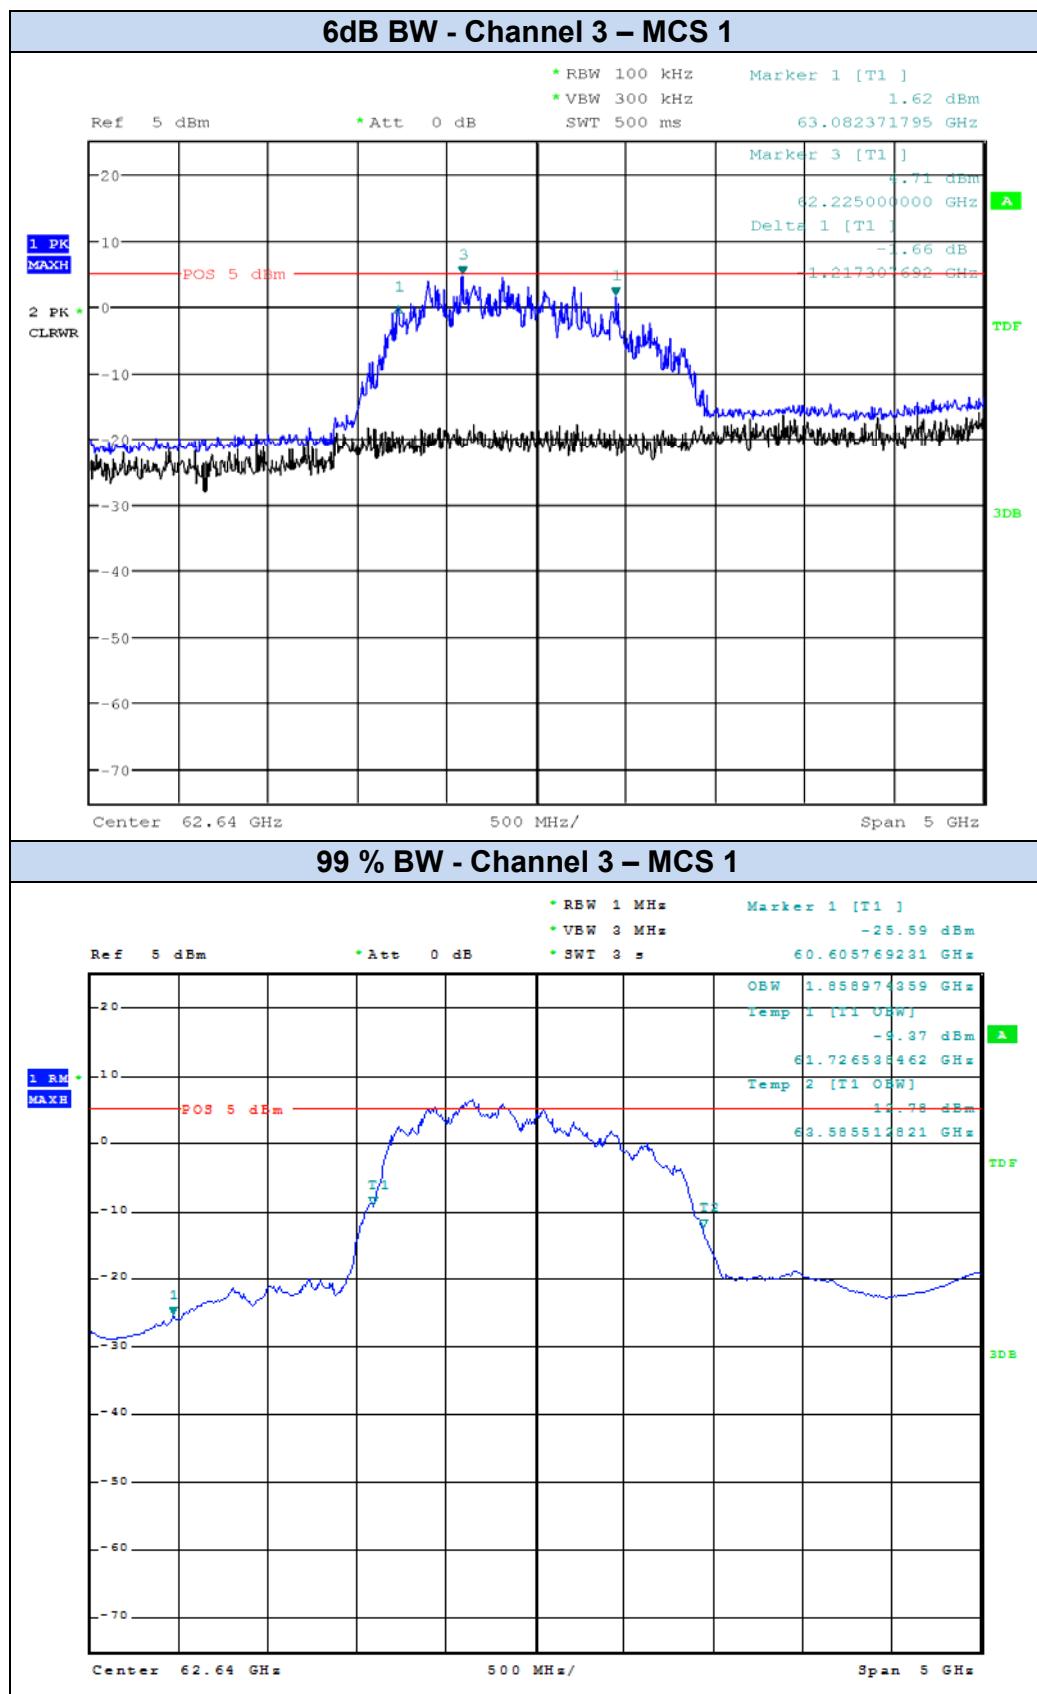

B.2 Peak and Average Power, RF detector

Test limits

FCC part	RSS part	Limits
15.255 (b) (1)	RSS-210 Annex A13.2.2 (1)	Within the 57-64 GHz band, emission levels shall not exceed the following equivalent isotropically radiated power (EIRP): the average power of any emission shall not exceed 40 dBm (equivalent to 9 μ W/cm ² power density at 3m) and the peak power of any emission shall not exceed 43 dBm (equivalent to 18 μ W/cm ² power density at 3m)

Test procedure

1. According to ANSI C63.10-2013, Clause 9, the measurement should be performed at a distance greater than or equal to the far field boundary distance. This later is given by

$$R_{(Far\ Field)} = \frac{2L^2}{\lambda}$$

Where

L is the largest dimension of the transmit antenna in m
 λ is the wavelength in m

Far field boundary calculation			
Frequency (GHz)	Wavelength (λ) (m)	L (m)	R far field (m)
58.32	0.0051	0.025	0.24
60.48	0.0050	0.025	0.25
62.64	0.0048	0.025	0.26

Our measurements are performed at a distance greater than **0.45m** > R far field. The measurement distances are 0.46 m for Channel 2 and 0.48 m for Channels 1 and 3.


2. The EUT is configured to operate at the Modulation and Coding Scheme index (MCS) giving the maximum output power (MCS 1).
3. Referring to ANSI C63.10-2013, Clause 9, the equivalent Peak and Average Power obtained using the RF detector measured voltage* (see setup below) are converted to EIRP using Friis equation and then compared to the limits.

$$EIRP(W) = \frac{P_R}{G_R} \cdot \left(\frac{4\pi D}{\lambda} \right)^2 \text{ and } EIRP(dBm) = 30 + 10 \log_{10}(EIRP(W))$$

Where:

P_R is the equivalent power measured at the output of the test antenna, in W
 λ is the wavelength of the emission under investigation in m
 G_R is the linear gain of the test antenna
 D is the measurement distance in m

* The conversion from the measured voltage to the equivalent power is done by a substitution measurement using the multiplier assembly generator (40-220G) and the power sensor (DC-67G) (see Test Equipment List in § A.3).

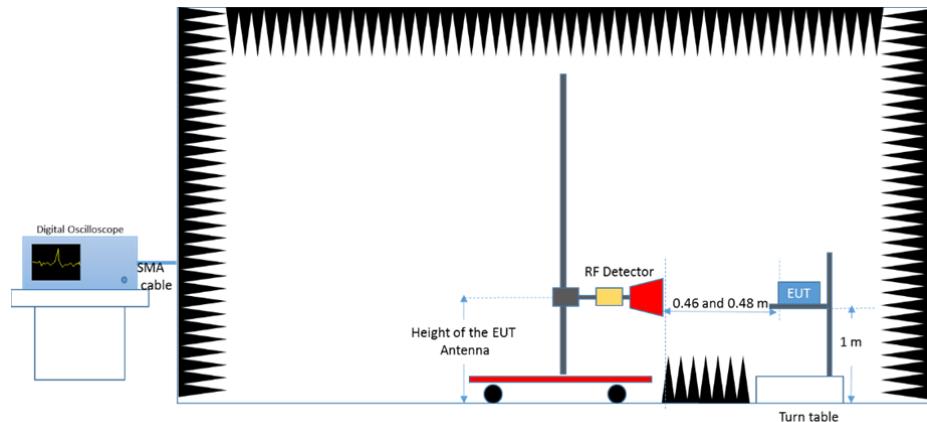

The measurement antenna is aligned with the maximum radiation direction issued from the EUT antenna in order to receive the maximum available power.

Results tables:

Peak EIRP									
Mode	MCS	Freq. (GHz)	D (m)	Measured Peak Voltage (mV)	P _R (dBm)	Rx Antenna Gain G _R (dBi)	EIRP (W)	EIRP (dBm)	Limit (dBm)
WiGig	1	58.32	0.48	5.850	-11.01	24.37	0.398	26.00	43
WiGig	1	60.48	0.46	5.850	-10.85	24.71	0.377	25.77	43
WiGig	1	62.64	0.48	3.794	-12.28	25	0.297	24.72	43

Average EIRP									
Mode	MCS	Freq. (GHz)	D (m)	Measured Peak Voltage (mV)	P _R (dBm)	Rx Antenna Gain G _R (dBi)	EIRP (W)	EIRP (dBm)	Limit (dBm)
WiGig	1	58.32	0.48	3.177	-12.81	24.37	0.263	24.20	40
WiGig	1	60.48	0.46	2.190	-13.21	24.71	0.219	23.41	40
WiGig	1	62.64	0.48	1.997	-12.5	25.00	0.316	24.50	40

B.3 Conducted Peak Output Power, RF detector

Test limits

FCC part	RSS part	Limits
15.255 (e) (1)	RSS-210 Annex A13.2.3	<p>The peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (b) of this section.</p> <p>Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).</p>

Test procedure

The peak output power in dBm is calculated by subtracting the DUT gain in dBi from the Peak EIRP in dBm found in section B.2.

Results tables:

Peak Output Power								
Mode	MCS	Freq. (GHz)	EIRP (dBm)	EUT Antenna Gain (dBi)	Output Power (dBm)	Output Power (mW)	6 dB Bandwidth (MHz)	Limit (mW)
WiGig	1	58.32	26.00	15.3	10.70	11.749	1234	500
WiGig	1	60.48	25.77	15.2	10.57	11.402	1277	500
WiGig	1	62.64	24.72	14.8	9.92	9.817	1217	500

B.4 Spurious Emissions


Test limits

FCC part	RSS part	Limits																																
15.255	RSS-210 Annex A13.2.2	<p>(c) (1): The power density of any emissions outside the 57-64 GHz band shall consist solely of spurious emissions.</p> <p>(c) (2): Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.</p> <p>(c) (3): Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters.</p> <p>(c) (4): The levels of the spurious emissions shall not exceed the level of the fundamental emission.</p> <p>(d): Only spurious emissions and transmissions related to a publicly-accessible coordination channel, whose purpose is to coordinate operation between diverse transmitters with a view towards reducing the probability of interference throughout the 57-64 GHz band, are permitted in the 57-57.05 GHz band.</p> <p>Note to paragraph (d): The 57-57.05 GHz is reserved exclusively for a publicly-accessible coordination channel. The development of standards for this channel shall be performed pursuant to authorizations issued under part 5 of this chapter.</p>																																
15.209	RSS-Gen Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr> <tr> <td>30-88</td><td>100</td><td>40</td><td>3</td></tr> <tr> <td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr> <tr> <td>216-960</td><td>200</td><td>46</td><td>3</td></tr> <tr> <td>960-25000</td><td>500</td><td>54</td><td>3</td></tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	960-25000	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																															
0.009-0.490	2400/f(kHz)	-	300																															
0.490-1.705	24000/f(kHz)	-	300																															
1.705-30.0	30	-	30																															
30-88	100	40	3																															
88-216	150	43.5	3																															
216-960	200	46	3																															
960-25000	500	54	3																															


Test procedure



1. The spurious emissions are measured for the Modulation and Coding Scheme index (MCS) giving the maximum output power (MCS 1).
2. The setups presented below were used to measure the radiated spurious emissions.
 1. **From 30 MHz to 40 GHz:** Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.
 2. **From 30MHz to 18GHz:** The measurements are done at the specification distance (3m) and the measured field strength is directly compared to the limit.
 3. **From 18GHz to 40GHz:** The measurements are done at a distance of (1.5m) then the measured field strength is extrapolated at the distance specified by the limit (3m) using an inverse distance correction factor (20 dB/decade of distance).
 4. **From 40 GHz to 200 GHz:** Depending of the frequency range and bands being tested, different antennas and mixers were used. The final measurement is done by varying the antenna height from 0.92 to 1.22 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations. The EIRP(dBm) is measured, then the power density at 3m is calculated and compared to the limit.


Radiated Setup (30 MHz – 1 GHz)

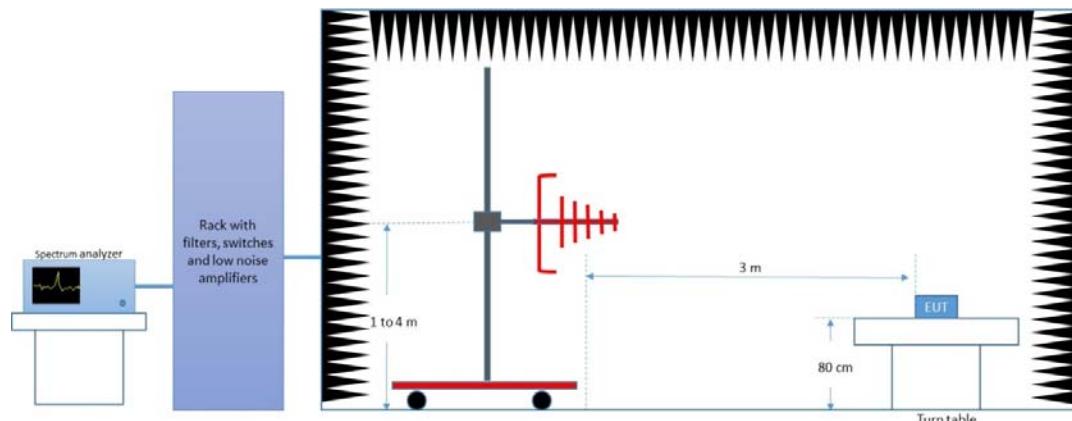

Radiated Setup (1 GHz – 18 GHz)

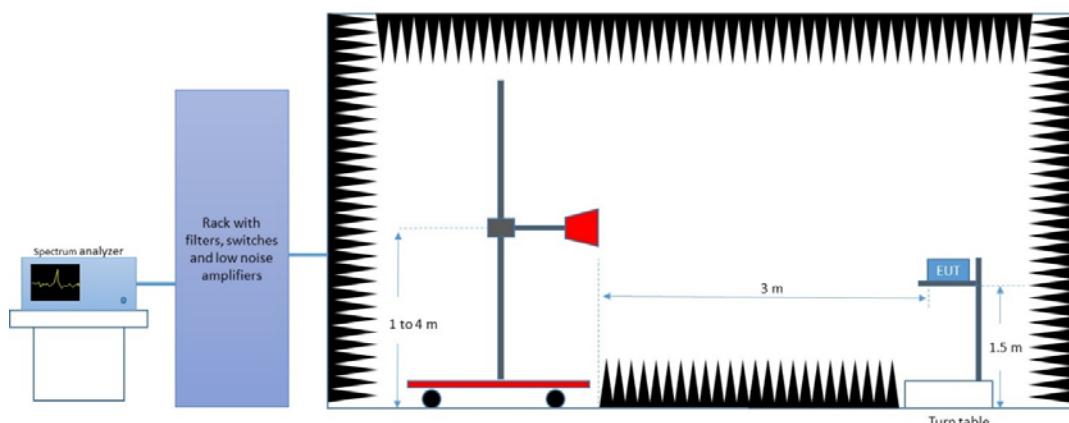

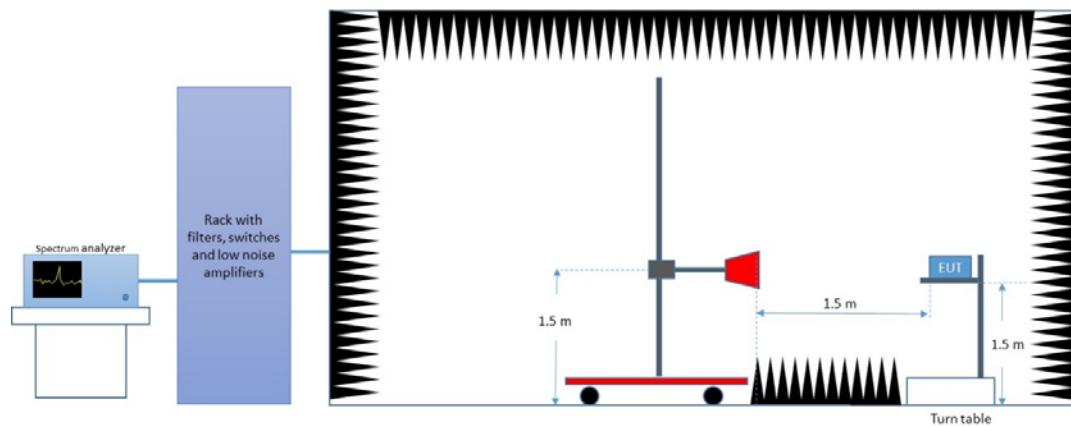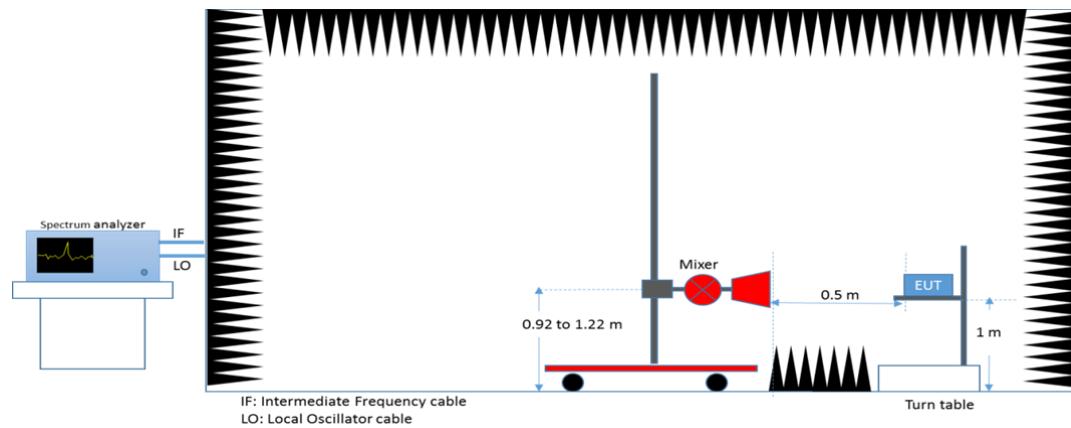Radiated Setup (18 GHz – 40 GHz)*Radiated Setup (40 GHz – 200 GHz)*

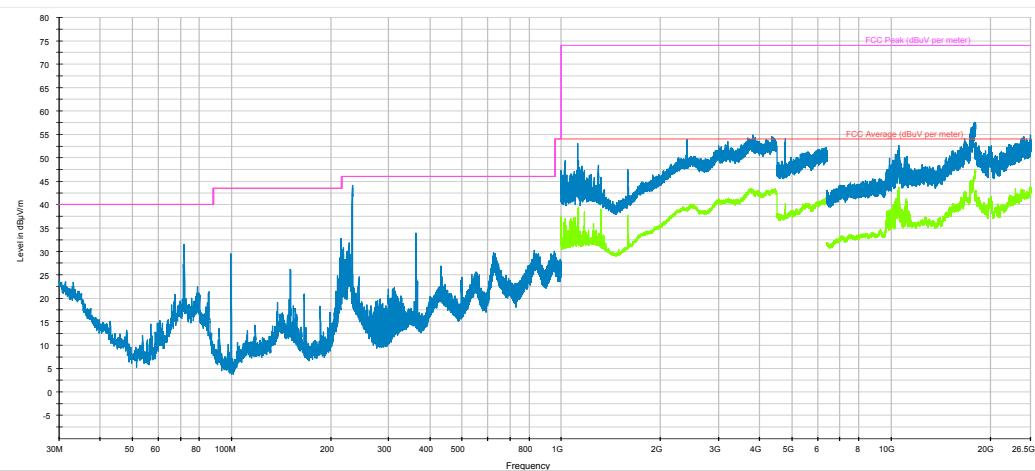
Tests Results**30 MHz – 40 GHz****Channel 1 – 58.32 GHz – MCS 1**

— Peak measurements — Avg measurements — FCC Avg — FCC Peak

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
232.35	44.10	---	46.06	1.96
1124.28	51.69	---	74.06	22.37
1124.85	---	40.64	54.06	13.42
4785.72	---	42.10	54.06	11.96
4789.08	55.65	---	74.06	18.41
10554.30	51.77	---	74.06	22.29
10559.89	---	46.19	54.06	7.87
23879.46	53.71	---	74.06	20.35
23880.11	---	43.53	54.06	10.53
37202.90	51.45	---	74.06	22.60
37232.50	---	39.57	54.06	14.49

30 MHz – 40 GHz

Channel 2 – 60.48 GHz - MCS 1

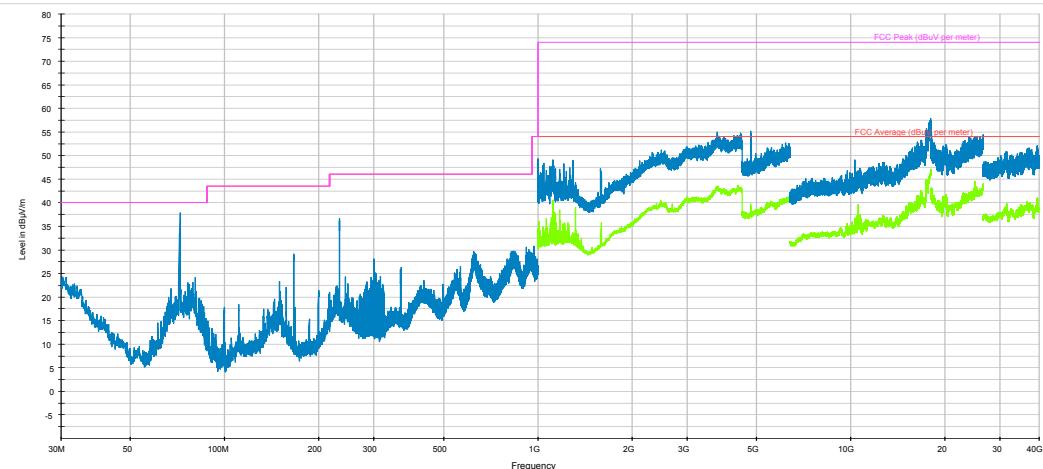


— Peak measurements — Avg measurements — FCC Avg — FCC Peak

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
71.99	37.79	---	40.06	2.26
1122.54	---	41.49	54.06	12.57
1122.71	43.44	---	74.06	30.62
4783.42	---	42.57	54.06	11.49
4790.08	55.90	---	74.06	18.16
10336.96	47.21	---	74.06	26.85
10560.01	---	42.30	54.06	11.76
23181.69	---	41.82	54.06	12.24
23184.05	51.46	---	74.06	22.59
37937.61	51.27	---	74.06	22.79
37944.36	---	39.39	54.06	14.67

30 MHz – 40 GHz

Channel 3 – 62.64 GHz - MCS 1

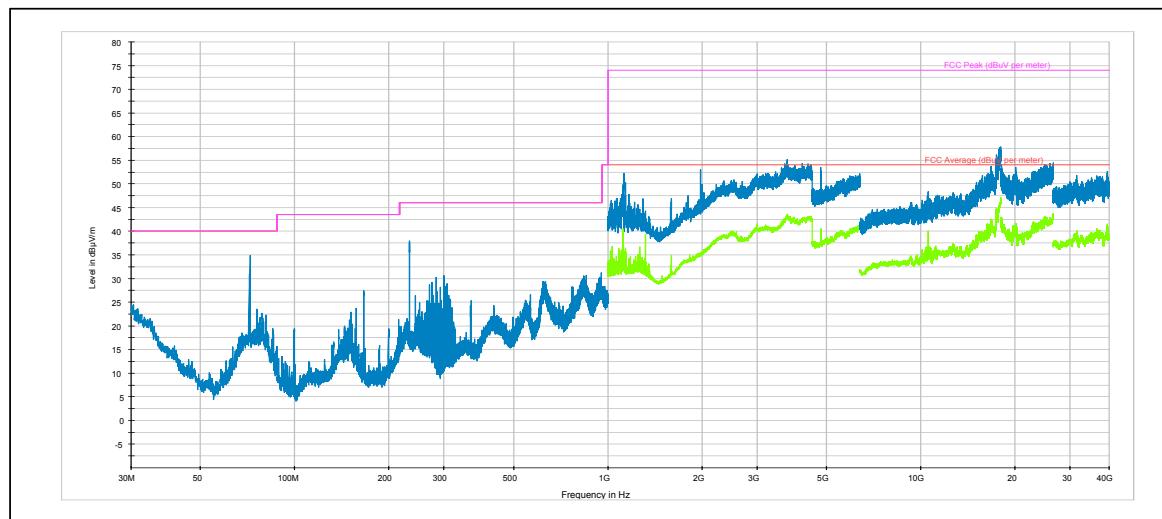

— Peak measurements — Avg measurements — FCC Avg — FCC Peak

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
72.00	36.14	---	40.06	3.92
232.36	37.90	---	46.06	8.16
1122.28	42.57	---	74.06	31.49
1123.80	---	41.53	54.06	12.53
4788.99	55.99	---	74.06	18.07
4789.25	---	43.02	54.06	11.04
10559.40	48.91	---	74.06	25.15
10559.71	---	45.79	54.06	8.27
24893.50	---	42.82	54.06	11.23
24929.38	54.10	---	74.06	19.96
34855.98	50.55	---	74.06	23.51
34865.32	---	39.76	54.06	14.30

40 GHz – 200 GHz**Channel 1 – 58.32 GHz - MCS 1**

No Spurious emissions identified above the noise floor up to 200GHz

Channel 2 – 60.48 GHz - MCS 1

No Spurious emissions identified above the noise floor up to 200GHz

Channel 3 – 62.64 GHz - MCS 1

Spurious Emission 40 GHz- 200 GHz					
Freq. (GHz)	EIRP (dBm)	Meas. Dist (m)	Spec. Dist (m)	Power Density @ 3m (pW/cm²)	Limit (pW/cm²)
65.0996	-39.81	0.5	3	0.092	90
73.3976	-35.25	0.5	3	0.264	90

No other spurious emissions identified up to 200 GHz above the highest level reported in the table.


B.5 Frequency Stability

Test limits

FCC part	RSS part	Limits
15.255 (f)	RSS-210 Annex A13.2.5	Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test procedure

1. Measurements are performed for the highest and lowest frequency of operation and with the modulation that produces the widest emission bandwidth (MCS1) according to the setup below.
2. These measurements are repeated for each step of temperature variation from (-20 to 50 °C) at the nominal voltage.
3. These measurements are repeated for an input voltage variation of 85% to 110% at the reference temperature
4. The frequency excursion is recorded by checking at each time if the 20 dB bandwidth of the fundamental emission is contained within the frequency band over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage.

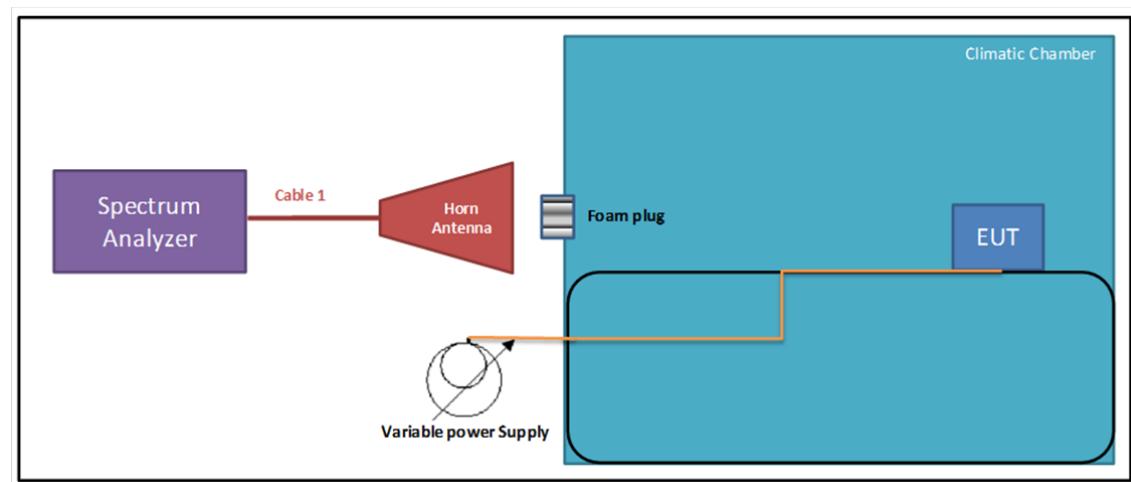

Results tables

Lowest frequency of operation (Channel 1)			
Power Supply (VDC)	Environment Temperature (°C)	Min Frequency (GHz) @ 20dB BW	Limit
3.3	50	57.2526	57 GHz
3.3	40	57.2686	57 GHz
3.3	30	57.2916	57 GHz
3.3	20	57.3020	57 GHz
3.3	10	57.2942	57 GHz
3.3	0	57.3023	57 GHz
3.3	-10	57.2953	57 GHz
3.3	-20	57.2953	57 GHz
2.805	20	57.3264	57 GHz
3.795	20	57.3424	57 GHz

Highest frequency of operation (Channel 3)			
Power Supply (VDC)	Environment Temperature (°C)	Max Frequency (GHz) @ 20dB BW	Limit
3.3	50	63.5935	64 GHz
3.3	40	63.57	64 GHz
3.3	30	63.6746	64 GHz
3.3	20	63.5294	64 GHz
3.3	10	63.6023	64 GHz
3.3	0	63.5234	64 GHz
3.3	-10	63.5264	64 GHz
3.3	-20	63.5985	64 GHz
2.805	20	63.6045	64 GHz
3.795	20	63.6041	64 GHz

B.6 Group Installation

Test limits

FCC part	RSS part	Limits
15.255 (h)	RSS-210 Annex A13.2.6	Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

Results

According to applicant's declaration, there is no external Phase-Locking input to realize a beamforming array.

B.7 RF Exposure

Limits

FCC part	Limits																																																																	
15.255 (g)	Regardless of the power density levels permitted under this section, devices operating under the provisions of this section are subject to the radiofrequency radiation exposure requirements specified in §§1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.																																																																	
2.1091	<p>(b) For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.</p> <p>(c)(2) Unlicensed personal communications service devices, unlicensed millimeter wave devices and unlicensed NII devices authorized under §§15.253(f), 15.255(g), 15.257(g), 15.319(i), and 15.407(f) of this chapter are also subject to routine environmental evaluation for RF exposure prior to equipment authorization or use if their ERP is 3 watts or more or if they meet the definition of a portable device as specified in §2.1093(b) requiring evaluation under the provisions of that section.</p>																																																																	
1.1310	<p>(e) Table 1 below sets forth limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.</p> <p style="text-align: center;">TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Electric field strength (V/m)</th> <th>Magnetic field strength (A/m)</th> <th>Power density (mW/cm²)</th> <th>Averaging time (minutes)</th> </tr> </thead> <tbody> <tr> <td colspan="5" style="text-align: center;">(A) Limits for Occupational/Controlled Exposure</td> </tr> <tr> <td>0.3-3.0</td> <td>614</td> <td>1.63</td> <td>*100</td> <td>6</td> </tr> <tr> <td>3.0-30</td> <td>1842/f</td> <td>4.89/f</td> <td>*900/f²</td> <td>6</td> </tr> <tr> <td>30-300</td> <td>61.4</td> <td>0.163</td> <td>1.0</td> <td>6</td> </tr> <tr> <td>300-1,500</td> <td></td> <td></td> <td>f/300</td> <td>6</td> </tr> <tr> <td>1,500-100,000</td> <td></td> <td></td> <td>5</td> <td>6</td> </tr> <tr> <td colspan="5" style="text-align: center;">(B) Limits for General Population/Uncontrolled Exposure</td> </tr> <tr> <td>0.3-1.34</td> <td>614</td> <td>1.63</td> <td>*100</td> <td>30</td> </tr> <tr> <td>1.34-30</td> <td>824/f</td> <td>2.19/f</td> <td>*180/f²</td> <td>30</td> </tr> <tr> <td>30-300</td> <td>27.5</td> <td>0.073</td> <td>0.2</td> <td>30</td> </tr> <tr> <td>300-1,500</td> <td></td> <td></td> <td>f/1500</td> <td>30</td> </tr> <tr> <td>1,500-100,000</td> <td></td> <td></td> <td>1.0</td> <td>30</td> </tr> </tbody> </table>	Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)	(A) Limits for Occupational/Controlled Exposure					0.3-3.0	614	1.63	*100	6	3.0-30	1842/f	4.89/f	*900/f ²	6	30-300	61.4	0.163	1.0	6	300-1,500			f/300	6	1,500-100,000			5	6	(B) Limits for General Population/Uncontrolled Exposure					0.3-1.34	614	1.63	*100	30	1.34-30	824/f	2.19/f	*180/f ²	30	30-300	27.5	0.073	0.2	30	300-1,500			f/1500	30	1,500-100,000			1.0	30
Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)																																																														
(A) Limits for Occupational/Controlled Exposure																																																																		
0.3-3.0	614	1.63	*100	6																																																														
3.0-30	1842/f	4.89/f	*900/f ²	6																																																														
30-300	61.4	0.163	1.0	6																																																														
300-1,500			f/300	6																																																														
1,500-100,000			5	6																																																														
(B) Limits for General Population/Uncontrolled Exposure																																																																		
0.3-1.34	614	1.63	*100	30																																																														
1.34-30	824/f	2.19/f	*180/f ²	30																																																														
30-300	27.5	0.073	0.2	30																																																														
300-1,500			f/1500	30																																																														
1,500-100,000			1.0	30																																																														

RSS part	Limits																																																							
RSS-102	<p>3. Evaluation Methods (...) Devices operating above 6 GHz regardless of the separation distance shall undergo an RF exposure evaluation.</p> <p>4. Exposure Limits For the purpose of this standard, Industry Canada has adopted the SAR and RF field strength limits established in Health Canada's RF exposure guideline, Safety Code 6.</p> <p style="text-align: center;">Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Electric Field (V/m rms)</th> <th>Magnetic Field (A/m rms)</th> <th>Power Density (W/m²)</th> <th>Reference Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>0.003-10²¹</td> <td>83</td> <td>90</td> <td>-</td> <td>Instantaneous*</td> </tr> <tr> <td>0.1-10</td> <td>-</td> <td>0.73/ <i>f</i></td> <td>-</td> <td>6**</td> </tr> <tr> <td>1.1-10</td> <td>87/ <i>f</i>^{0.5}</td> <td>-</td> <td>-</td> <td>6**</td> </tr> <tr> <td>10-20</td> <td>27.46</td> <td>0.0728</td> <td>2</td> <td>6</td> </tr> <tr> <td>20-48</td> <td>58.07/ <i>f</i>^{0.25}</td> <td>0.1540/ <i>f</i>^{0.25}</td> <td>8.944/ <i>f</i>^{0.5}</td> <td>6</td> </tr> <tr> <td>48-300</td> <td>22.06</td> <td>0.05852</td> <td>1.291</td> <td>6</td> </tr> <tr> <td>300-6000</td> <td>3.142 <i>f</i>^{0.3417}</td> <td>0.008335 <i>f</i>^{0.3417}</td> <td>0.02619 <i>f</i>^{0.6834}</td> <td>6</td> </tr> <tr> <td>6000-15000</td> <td>61.4</td> <td>0.163</td> <td>10</td> <td>6</td> </tr> <tr> <td>15000-150000</td> <td>61.4</td> <td>0.163</td> <td>10</td> <td>616000/ <i>f</i>^{1.2}</td> </tr> <tr> <td>150000-300000</td> <td>0.158 <i>f</i>^{0.5}</td> <td>4.21 x 10⁻⁴ <i>f</i>^{0.5}</td> <td>6.67 x 10⁻⁵ <i>f</i></td> <td>616000/ <i>f</i>^{1.2}</td> </tr> </tbody> </table> <p>Note: <i>f</i> is frequency in MHz. *Based on nerve stimulation (NS). ** Based on specific absorption rate (SAR).</p>	Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)	0.003-10 ²¹	83	90	-	Instantaneous*	0.1-10	-	0.73/ <i>f</i>	-	6**	1.1-10	87/ <i>f</i> ^{0.5}	-	-	6**	10-20	27.46	0.0728	2	6	20-48	58.07/ <i>f</i> ^{0.25}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6	48-300	22.06	0.05852	1.291	6	300-6000	3.142 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6	6000-15000	61.4	0.163	10	6	15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}	150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i> ^{1.2}
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)																																																				
0.003-10 ²¹	83	90	-	Instantaneous*																																																				
0.1-10	-	0.73/ <i>f</i>	-	6**																																																				
1.1-10	87/ <i>f</i> ^{0.5}	-	-	6**																																																				
10-20	27.46	0.0728	2	6																																																				
20-48	58.07/ <i>f</i> ^{0.25}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6																																																				
48-300	22.06	0.05852	1.291	6																																																				
300-6000	3.142 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6																																																				
6000-15000	61.4	0.163	10	6																																																				
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}																																																				
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i> ^{1.2}																																																				

Test procedure

For the purpose of this evaluation, a minimum distance of 20cm was used to calculate the equivalent plan wave power density based on the Average EIRP values obtained in B.2, to be compared with the power density limit, according to following formula:

$$S_{eq} = \frac{P_{avg} \cdot G}{4 \cdot \pi \cdot R^2} \Rightarrow S_{eq} = \frac{EIRP}{4 \cdot \pi \cdot R^2}$$

Where:

S_{eq} = Equivalent Plane Wave Power Density, in Watts per square meter.

P_{avg} = Source-Based Average Power at antenna terminals, in Watts.

$EIRP$ = Equivalent Isotropically Radiated Power, in Watts.

G = Gain of the Transmitting Antenna.

R = Distance from the Transmitting Antenna, in meters.

Results

Power Density Calculation							
Mode	MCS	Frequency (GHz)	Average EIRP (dBm)	Average EIRP (W)	Separation Distance (m)	Power Density (W/m ²)	Limit (W/m ²)
WiGig	1	58.32	24.20	0.258	0.2	0.523	10
WiGig	1	60.48	23.41	0.208	0.2	0.436	10
WiGig	1	62.64	24.50	0.316	0.2	0.561	10