

		AT4 wireless, S.A. Parque Tecnológico de Andalucía, c/ Severo Ochoa nº 2 29590 Campanillas/ Málaga/ España Tel. 952 61 91 00 - Fax 952 61 91 13 MÁLAGA, C.I.F. A29 507 456 Registro Mercantil de Málaga, Tomo 1169, Libro 82, Folio 133, Hoja MA3729
--	--	--

ASSESSMENT REPORT

Report No.:: 44948RRE.003

Approved by
(name / position & signature)

Issue date: 2015-01-21

Identification of item evaluated: INTEL DUAL BAND WIRELESS – AC 3165

Trademark: Not Supplied

Model and/or type reference: 3165NGW

Serial number: n/a

Features: 802.11 a/b/g/n/ac Wireless LAN + BT 4.0

Other identifications FCC: PD93165NG (factory install sku)

FCC: PD93165NGU (user install allowed)

IC: 1000M-3165NG

Description: 2x2 PCIe M.2 adapter card

Applicant: INTEL MOBILE COMMUNICATIONS

Address: 100 Center Point Circle, Suite 200
Columbia, South Carolina 29210 USA

CIF/NIF/Passport: Not Supplied

Contact person: Steve Hackett

Telephone: 803-216-2344

e-mail:: steven.c.hackett@intel.com

Manufacturer: INTEL MOBILE COMMUNICATIONS

Address: 100 Center Point Circle, Suite 200
Columbia, South Carolina, 29210 USA

CIF/NIF/Passport: Not Supplied

Telephone / Fax: 803-216-2344

Assessment requested

Evaluation of the possibility of extending the test results of Intel module 7265NGW contained in the test report 41273RRF.003, dated 2014/03/13 to Intel module 3165NGW based on the similarity letter provided by INTEL (See Annex A).

Test Report 41273RRF.003 reference standards are:

USA FCC Part 15.407 (10-1-12 Edition). Unlicensed National Information Infrastructure Devices. General technical requirements.

USA FCC Part 15.209 (10-1-12 Edition): Radiated emission limits; general requirements.
CANADA RSS-210 Issue 8 (December 2010). Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

CANADA RSS-Gen Issue 3 (December 2010). General Requirements and Information for the Certification of

Radio Apparatus.

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.

Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices 789033 D01 General UNII Test Procedures v01r03 dated 04/08/2013.

Guidance for IEEE 802.11ac and Pre-ac Device Emission Testing 644545 D01 Guidance for IEEE 802.11ac v01r02 dated 10/31/2013.

Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

NOTE: The specifications in the new standard RSS-Gen Issue 4 (November 2014) applicable to the module are the same as the ones specified in the former version RSS-Gen Issue 3 (December 2010).

Report template No: FDT70_00

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.

INDEX

Competences and guarantees	4
General conditions	4
Documents used	4
Summary	5
ANNEX A: Similarity Declaration letter.....	6
ANNEX B: Test results that apply to model 3165NGW	8

Competences and guarantees

AT4 wireless guarantees the reliability of the data presented in this report.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the works executed. All information evaluated will be handled as confidential.

General conditions

1. This report is only referred to the item that has undergone the evaluation.
2. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
3. This assessment report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Documents used

Documents undergoing used for the evaluation has been provided by: **The applicant**.

<u>Title</u>	<u>Description</u>	<u>Reception date</u>
41273RRF.003	<p>Test Report. reference standard USA FCC Part 15.407 (U-NII), 15.209 CANADA RSS-210, RSS-Gen.</p> <p>Unlicensed National Information Infrastructure Devices. General technical requirements.</p> <p>Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.</p> <p>General Requirements and Information for the Certification of Radio Apparatus.</p>	2014/12/15
Similarity Declaration letter	Similarity declaration between Intel® Dual Band Wireless-AC 7265, model 7265NGW and Intel® Dual Band Wireless-AC 3165, model 3165NGW	2014/12/15

Summary

Considering the differences between Intel® Dual Band Wireless-AC 7265, model 7265NGW and Intel® Dual Band Wireless-AC 3165, model 3165NGW declared by the client (see Annex A), we conclude that the following test results from 41273RRF.003 test report are fully applicable to model 3165NGW:

5.15 GHz -5.25 GHz Band.

- 15.407 (a) (1) / RSS-210 A9.2. (1). Power limits. Maximum output power.
- 15.407 (a) (1) / RSS-210 A9.2. (1). Peak power spectral density.
- 15.407 (b) (1), (7) / RSS-210 A9.2. (1). Radiated Band-edge emissions compliance (Transmitter).
- 15.407 (b) (1), (6), (7) / RSS-210 A9.2. (1). Undesirable radiated emissions (Transmitter).

5.25 GHz -5.35 GHz Band.

- 15.407 (a) (2) / RSS-210 A9.2. (2). Power limits. Maximum output power.
- 15.407 (a) (2) / RSS-210 A9.2. (2). Peak power spectral density.
- 15.407 (b) (2), (7) / RSS-210 A9.2. (2). Radiated Band-edge emissions compliance (Transmitter).
- 15.407 (b) (2), (6), (7) / RSS-210 A9.2. (2). Undesirable radiated emissions (Transmitter).

5.47 GHz -5.725 GHz Band.

- 15.407 (a) (2) / RSS-210 A9.2. (3). Power limits. Maximum output power.
- 15.407 (a) (2) / RSS-210 A9.2. (3). Peak power spectral density.
- 15.407 (b) (3), (7) / RSS-210 A9.2. (3). Radiated Band-edge emissions compliance (Transmitter).
- 15.407 (b) (3), (6), (7) / RSS-210 A9.2. (3). Undesirable radiated emissions (Transmitter)

Common requirements for all bands.

- 15.407 (a) (6). Peak excursion ratio of the modulation envelope.

The results are applicable to only one chain (Chain A or Chain B). The MIMO (Chain A+B) results are not applicable since according to the applicant's declaration MIMO data rates are disabled in model 3165NGW.

See Annex B for test results extracted from 41273RRF.003 test report.

NOTE: The results presented in this Assessment Report apply only to the particular item under evaluation established in page 1 of this document.

ANNEX A: Similarity Declaration letter



Similarity Declaration between:

Intel® Dual Band Wireless-AC 7265, model 7265NGW

And

Intel® Dual Band Wireless-AC 3165, model 3165NGW.

To whom it may concern,

This statement letter is to declare that the two following products are exactly the same board, meaning same HW, same schematic, same layout, same BoM:

- Intel® Dual Band Wireless-AC 7265, model 7265NGW
- Intel® Dual Band Wireless-AC 3165, model 3165NGW

The only difference is disabling by EEPROM all MIMO data rate for Intel® Dual Band Wireless-AC 3165, model 3165NGW (Please refer to below table for detailed data rate listing comparison)

Model 7265NGW supports 2 spatial streams and **Model 3165NGW** supports only 1 spatial stream.

HT MCS Index	Modulation and Coding Rate	Spatial Streams	Data Rate (Mbps)						VHT MCS Index	
			20 MHz Chan			40 MHz Chan				
			No 5ST	5ST	No 5ST	5ST	No 5ST	5ST		
0	QPSK 1/2	1	6.5	7.2	13.6	15.0	39.3	32.5	0	
1	QPSK 1/2	1	13.0	14.4	27.0	30.0	86.5	89.0	1	
2	QPSK 3/4	1	19.5	21.7	40.5	45.0	122.8	127.5	2	
3	16-QAM 1/2	1	26.0	28.9	54.0	60.0	172.0	180.0	3	
4	16-QAM 3/4	1	39.0	43.3	81.0	90.0	275.5	295.0	4	
5	64-QAM 2/3	1	52.0	57.8	108.0	120.0	324.0	340.0	5	
6	64-QAM 3/4	1	58.5	65.0	121.6	135.0	263.3	292.5	6	
7	64-QAM 5/6	1	65.0	72.2	135.0	150.0	292.5	325.0	7	
8	256-QAM 1/2	1	74.0	86.7	162.0	180.0	381.0	390.0	8	
9	256-QAM 3/4	1	84.0	97.4	180.0	200.0	390.0	433.3	9	
10	QPSK 1/2	2	13.0	14.4	27.0	30.0	86.5	89.0	0	
11	QPSK 3/4	2	26.0	28.9	54.0	60.0	172.0	180.0	1	
12	QPSK 5/6	2	39.0	43.3	81.0	90.0	178.5	186.0	2	
13	16-QAM 1/2	2	52.0	57.8	108.0	120.0	274.0	282.0	3	
14	16-QAM 3/4	2	76.0	86.7	162.0	180.0	391.0	390.0	4	
15	64-QAM 2/3	2	104.0	115.6	216.0	240.0	458.0	520.0	5	
16	64-QAM 3/4	2	117.0	130.0	243.0	260.0	525.0	550.0	6	
17	64-QAM 5/6	2	130.0	144.4	270.0	300.0	585.0	630.0	7	
18	256-QAM 1/2	2	156.0	173.1	324.0	360.0	702.0	780.0	8	
19	256-QAM 3/4	2	176.0	197.4	360.0	400.0	780.0	866.7	9	

Authorized signature by:

Wilfrid LEFEVRE
Regulatory Program Manager



Intel Mobile Communications SAS

Le Navigator B
505 route des Lucolles
CS 70293
06905 Sophia Antipolis cedex
France
Tel +33 (0)4 93 00 14 00
Fax +33 (0)4 93 00 14 01

SAS au capital de 2 000 000 Euros – RCS Grasse B 527 863 039 – NAF 7219Z – Siret 527 863 039 00022

ANNEX B: Test results that apply to model 3165NGW

APPENDIX B CONTENT:

Test results for 5.15 GHz – 5.25 GHz band.....	10
TEST CONDITIONS.....	11
99 % and 26 dB Bandwidth	14
Section 15.407 Subclause (a) (1) / RSS-210 A9.2. (1). Maximum output power, Peak power spectral density and antenna gain.....	25
Section 15.407 Subclause (a) (6). Peak excursion ratio of the modulation envelope	45
Section 15.407 Subclause (b) (1) / RSS-210 A9.2. (1). Undesirable radiated emissions (Transmitter) 1 to 40 GHz	51
Test results for 5.25 GHz – 5.35 GHz band.....	89
TEST CONDITIONS.....	90
99 % and 26 dB Bandwidth	93
Section 15.407 Subclause (a) (2) / RSS-210 A9.2. (2). Maximum output power, Peak power spectral density and antenna gain.....	104
Section 15.407 Subclause (b) (2) / RSS-210 A9.2. (2). Undesirable radiated emissions (Transmitter) 1 to 40 GHz	124
Test results for 5.47 GHz – 5.725 GHz band.....	161
TEST CONDITIONS.....	162
99 % and 26 dB Bandwidth	165
Section 15.407 Subclause (a) (2) / RSS-210 A9.2. (3). Maximum output power, Peak power spectral density and antenna gain.....	188
Section 15.407 Subclause (b) (3) / RSS-210 A9.2. (3). Undesirable radiated emissions (Transmitter) 1 to 40 GHz	228
Summary	289
Remarks and comments	289

Test results for 5.15 GHz – 5.25 GHz band

TEST CONDITIONS

Power supply (V):

$V_{nominal} = 3.3 \text{ Vdc}$

Type of power supply = DC voltage from HMC/NGFC test board.

Type of antenna = External attachable PIFA antenna.

Declared Gain for antenna = 3.6 dBi

Operating frequencies in the sub-band 5.15-5.25 GHz.

-For IEEE 802.11a, the equipment uses channels 36, 40, 44, 48.

-For IEEE 802.11n, there are two bandwidths:

For 20 MHz bandwidth the equipment uses channels 36, 40, 44, 48.

For 40 MHz bandwidth the equipment uses channels 38, 46.

-For IEEE 802.11ac, there are three bandwidths:

For 20 MHz bandwidth the equipment uses channels 36, 40, 44, 48.

For 40 MHz bandwidth the equipment uses channels 38, 46.

For 80 MHz bandwidth the equipment uses channel 42.

TEST FREQUENCIES:

For WiFi a/n20/ac20:

Lowest channel (36): 5180 MHz

Middle channel (40): 5200 MHz

Highest channel (48): 5240 MHz

For WiFi n40/ac40:

Lowest channel (38): 5190 MHz

Highest channel (46): 5230 MHz

For WiFi ac80:

Middle channel (42): 5210 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.10: 2009 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 and FCC KBD 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually but not simultaneously.

For 802.11n/ac modes 802.11n20/ac20 (20 MHz channel bandwidth), 802.11n40/ac40 (40MHz channel bandwidth) and 802.11ac80 (80MHz channel bandwidth) mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually and simultaneously.

For radio testing purposes the card was installed in a test fixture. The test fixture is connected to a laptop computer and dc power supplied. The laptop computer was used to configure the EUT to continuously transmit at a specified output power with different modes and modulation schemes.

The data rates of 6Mb/s for 802.11a, HT0 (SISO) for 802.11n20/ac20 and n40/ac40, and VHT0 (SISO) for 802.11 ac80 were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and spurious levels at the band edges.

The field strength at the band edges was evaluated for each mode and on each chain individually on the lowest and highest channels at the rated power for the channel under test. Where the power at the edge channels was lower than the power at the center channels additional measurements were made at the adjacent channels. Single transmission at each chain and simultaneous transmission at both chains modes were fully evaluated.

The PC was using the Intel test utility DRTU Version “DRTU 1.7.3-859”

During transmitter test the EUT was being controlled by the Intel DRTU tool to operate in a continuous transmit mode on the test channels as required and in each of the different modulation modes.

The conducted RF output power at each chain was adjusted according to the client's supplied Target values (see following table) using the Intel DRTU tool and measuring the power by using a calibrated average power meter. Measured values for adjustment were within -0.2 dB/+0.3 dB respect to the Target values.

RF conducted output power target values

	Mode	BW (MHz)	Channel / Freq (MHz).	SISO Chain A (dBm)	SISO Chain B (dBm)	MIMO at both ports A and B (dBm)
5.15-5.25GHz Band	802.11a	20	36 / 5180	14	14	n/a
			40 / 5200	14.5	14.5	n/a
			48 / 5240	14.5	14.5	n/a
	802.11n	20	36 / 5180	14	14	11.50
			40 / 5200	14.5	14.5	11.50
			48 / 5240	14.5	14.5	11.50
	802.11n*	40	38 / 5190	12	13.5	10.00
			46 / 5230	16.5	16.5	14.50
	802.11ac	80	42 / 5210	13.5	13.5	11.50

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyzer using low loss RF cables with sma type connectors. The reading in the spectrum analyzer is corrected taking into account the cable loss.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 1m for the frequency range 1 GHz-40 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360°.

Measurements were made in both horizontal and vertical planes of polarization.

99 % and 26 dB Bandwidth

RESULTS

1. 802.11a mode (see next plots).

CHAIN A

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
99% bandwidth (MHz)	17.40	17.36	17.40
26 dB bandwidth (MHz)	25.56	25.88	26.12
Measurement uncertainty (kHz)	± 7		

CHAIN B

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
99% bandwidth (MHz)	17.40	17.44	17.44
26 dB bandwidth (MHz)	25.68	25.84	25.68
Measurement uncertainty (kHz)	± 7		

2. 802.11 n20 MHz and 802.11 ac20 MHz modes. (see next plots).

CHAIN A

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
99% bandwidth (MHz)	18.40	18.40	18.40
26 dB bandwidth (MHz)	26.28	26.28	26.76
Measurement uncertainty (kHz)	± 7		

CHAIN B

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
99% bandwidth (MHz)	18.40	18.40	18.40
26 dB bandwidth (MHz)	25.68	26.72	26.88
Measurement uncertainty (kHz)	± 7		

Note: the test was performed with 802.11 n20 MHz mode which is the same modulation scheme as 802.11 ac 20 MHz.

3. 802.11 n40 MHz and 802.11 ac 40 MHz modes. (see next plots).

CHAIN A

	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
99% bandwidth (MHz)	36.40	36.60
26 dB bandwidth (MHz)	44.40	45.60
Measurement uncertainty (kHz)	±7	

CHAIN B

	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
99% bandwidth (MHz)	36.40	36.50
26 dB bandwidth (MHz)	44.60	45.20
Measurement uncertainty (kHz)	±7	

Note: the test was performed with 802.11 n40 MHz mode which is the same modulation scheme as 802.11 ac 40 MHz.

4. 802.11 ac 80 MHz mode. (see next plots).

CHAIN A


	Frequency 5210 MHz
99% bandwidth (MHz)	75.45
26 dB bandwidth (MHz)	82.50
Measurement uncertainty (kHz)	±7

CHAIN B


	Frequency 5210 MHz
99% bandwidth (MHz)	75.30
26 dB bandwidth (MHz)	82.50
Measurement uncertainty (kHz)	±7

802.11a mode CHAIN A


Lowest Channel

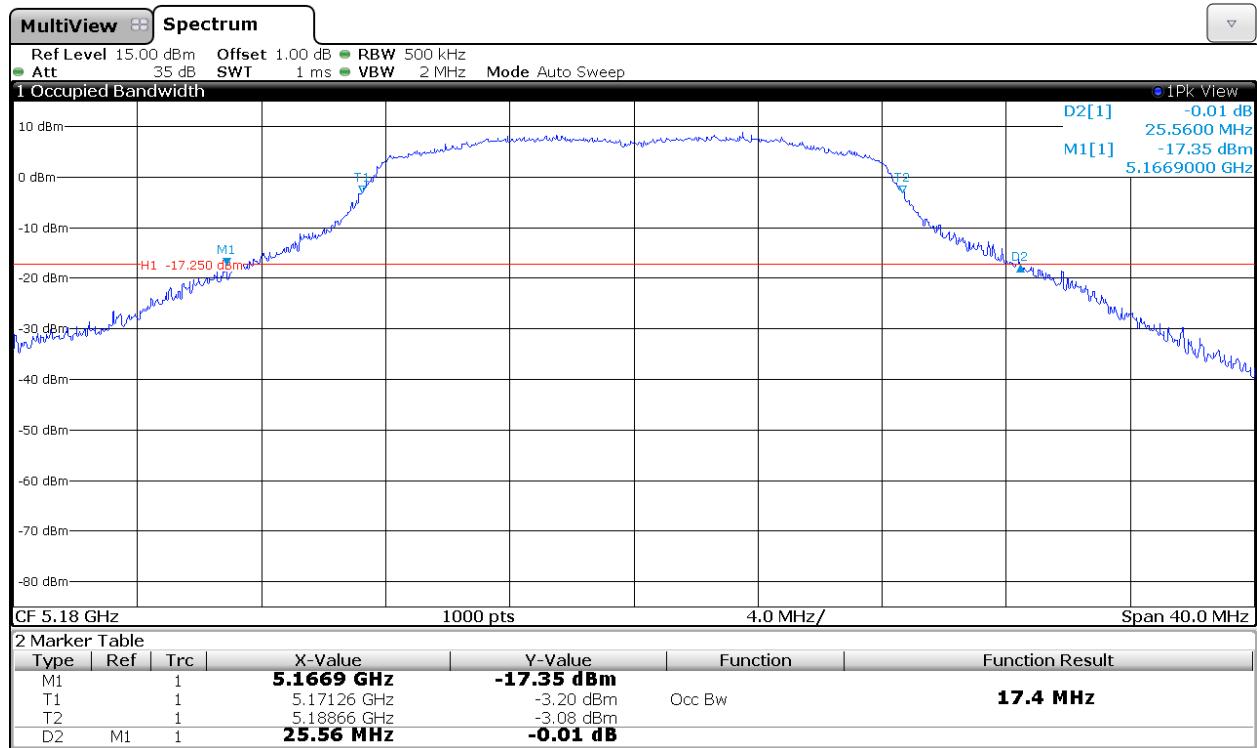

Middle Channel

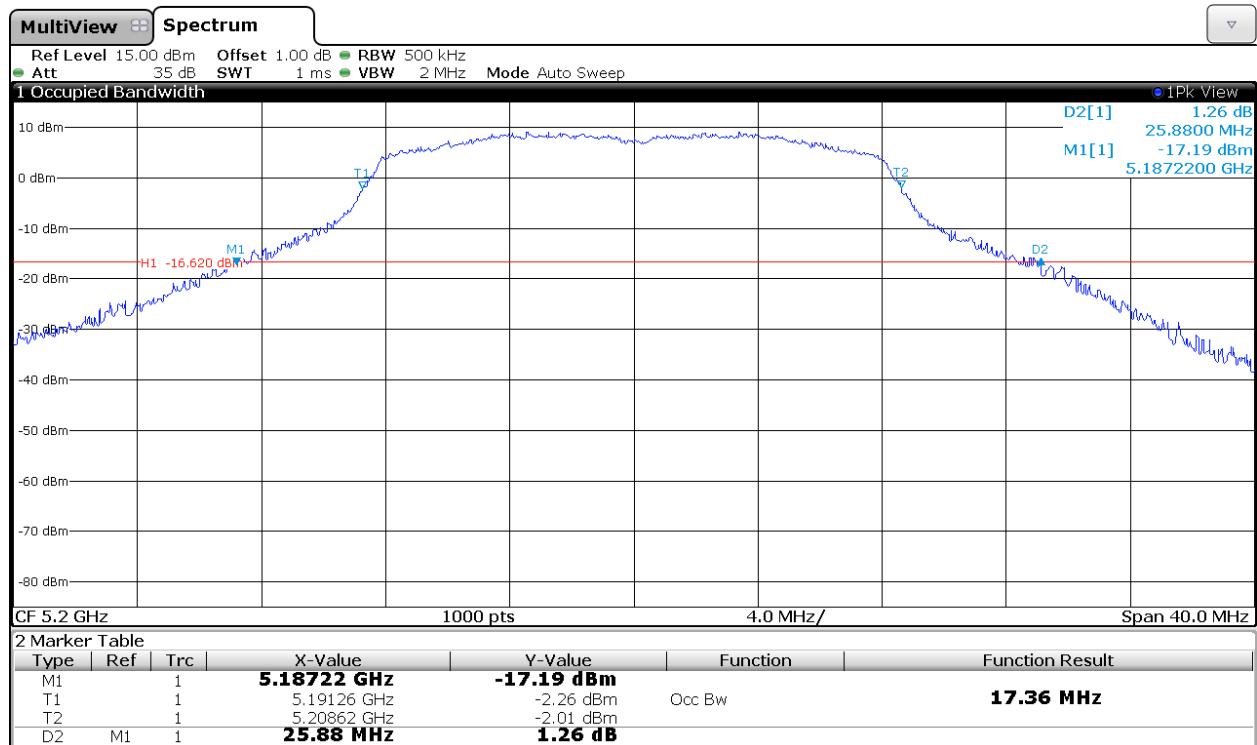


Highest Channel

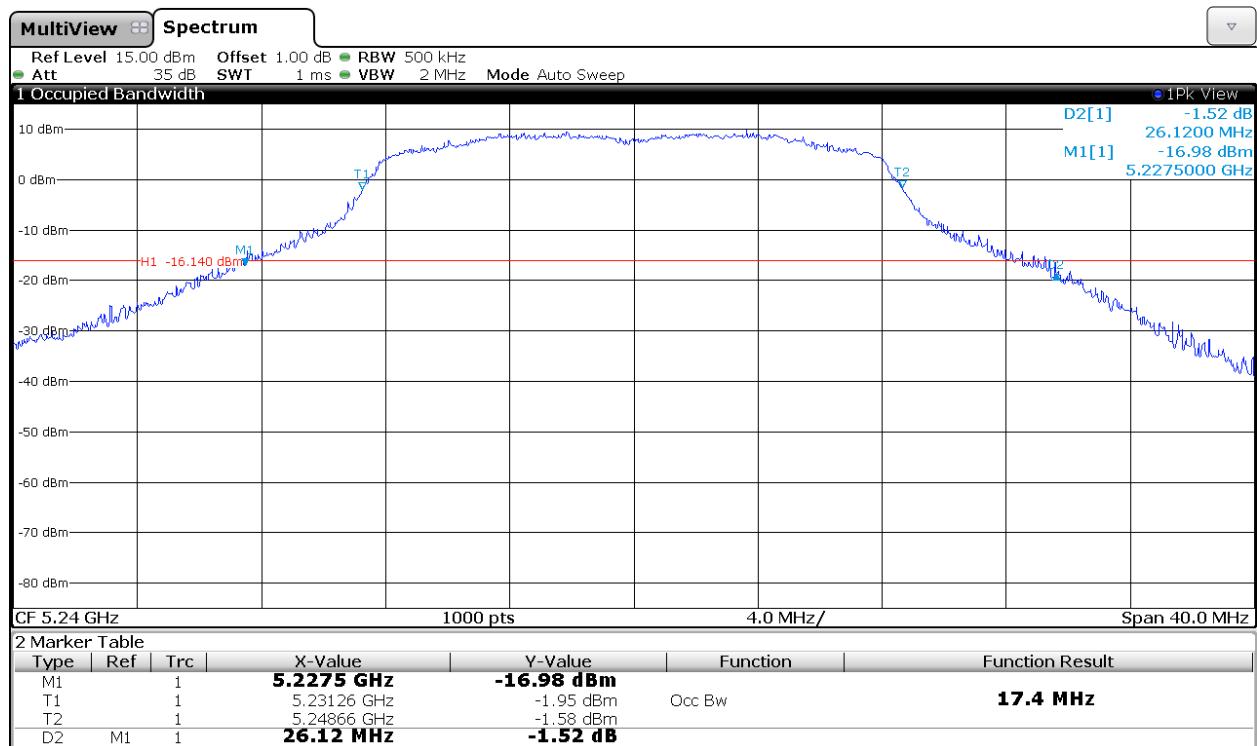


802.11a mode CHAIN B


Lowest Channel

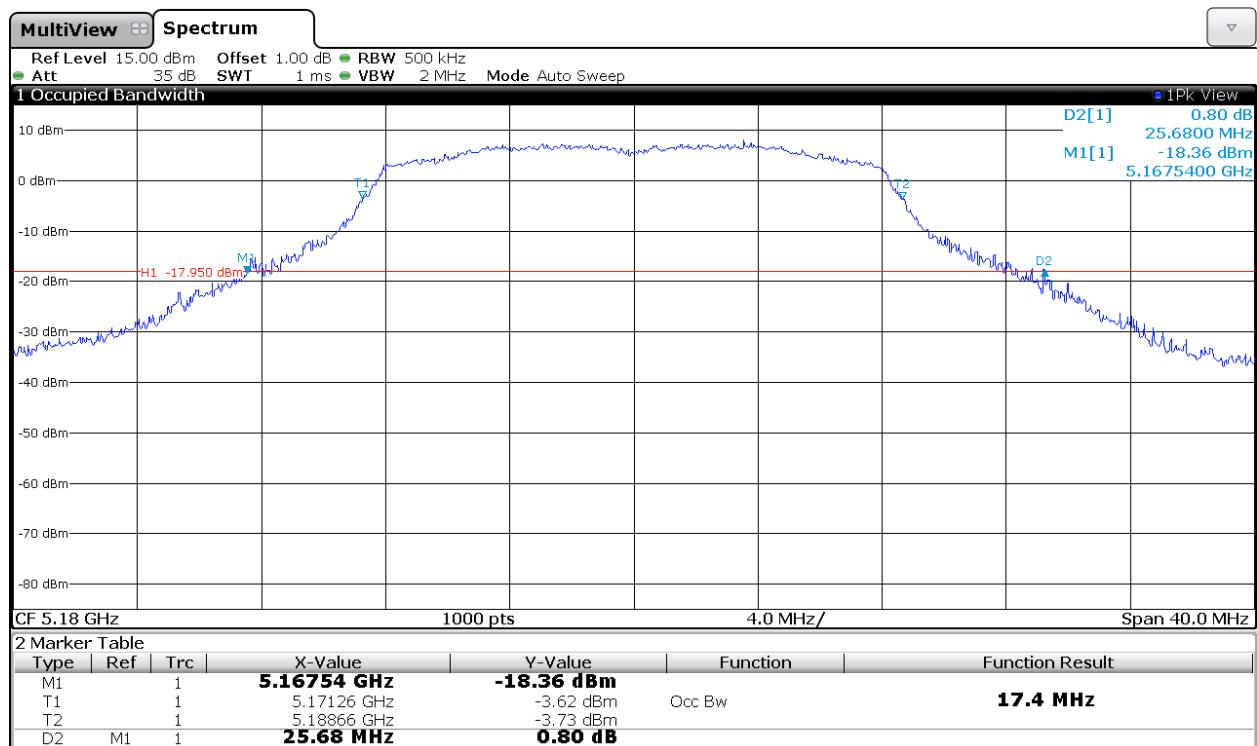

Middle Channel

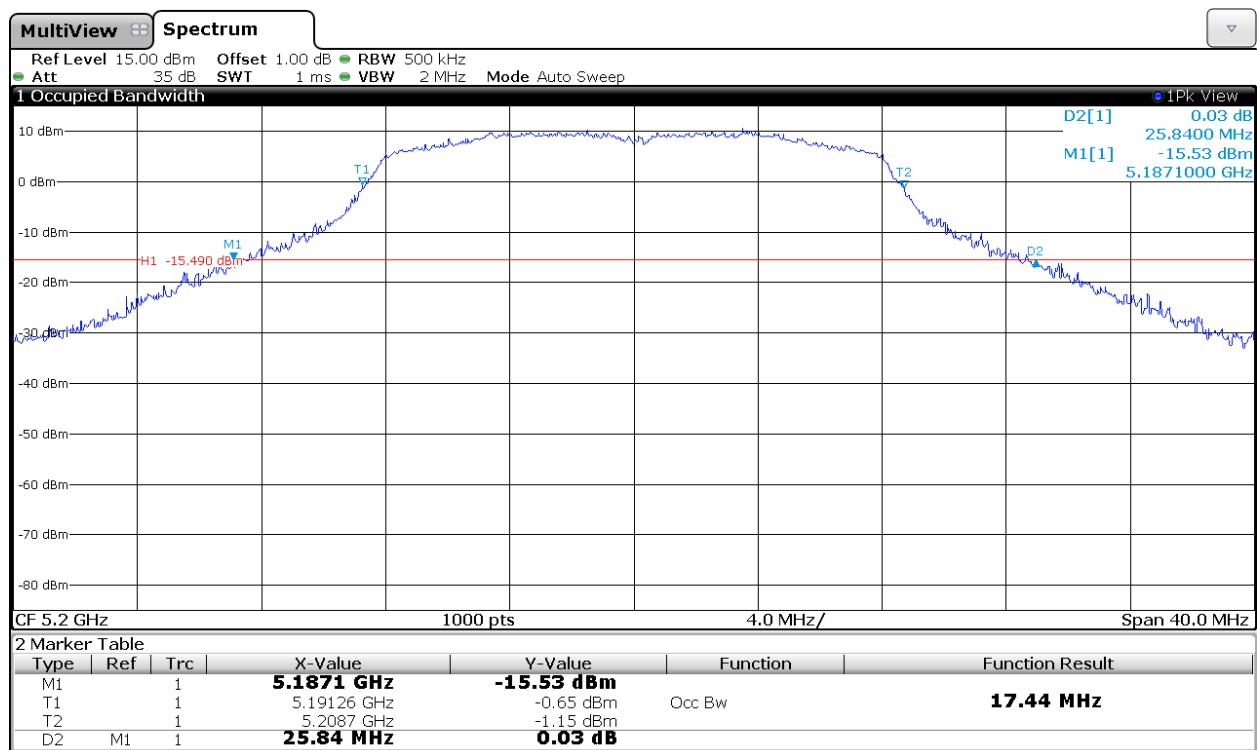


Highest Channel

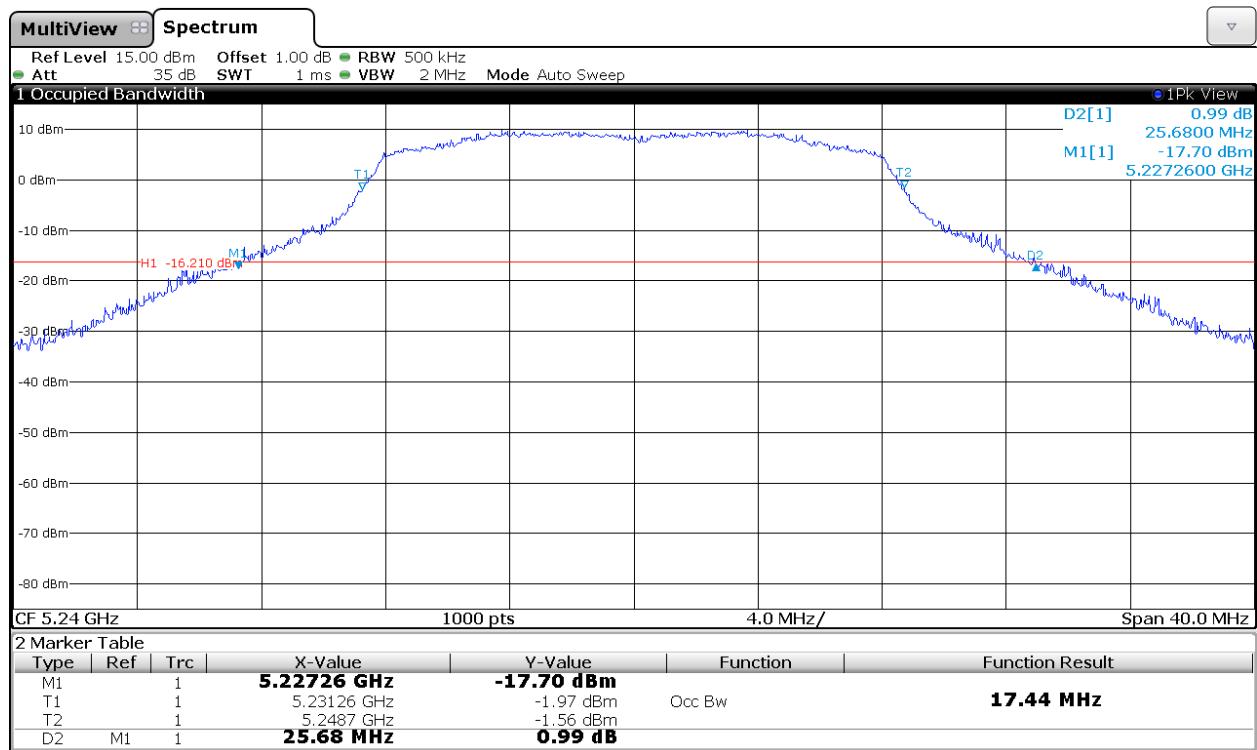


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN A


Lowest Channel

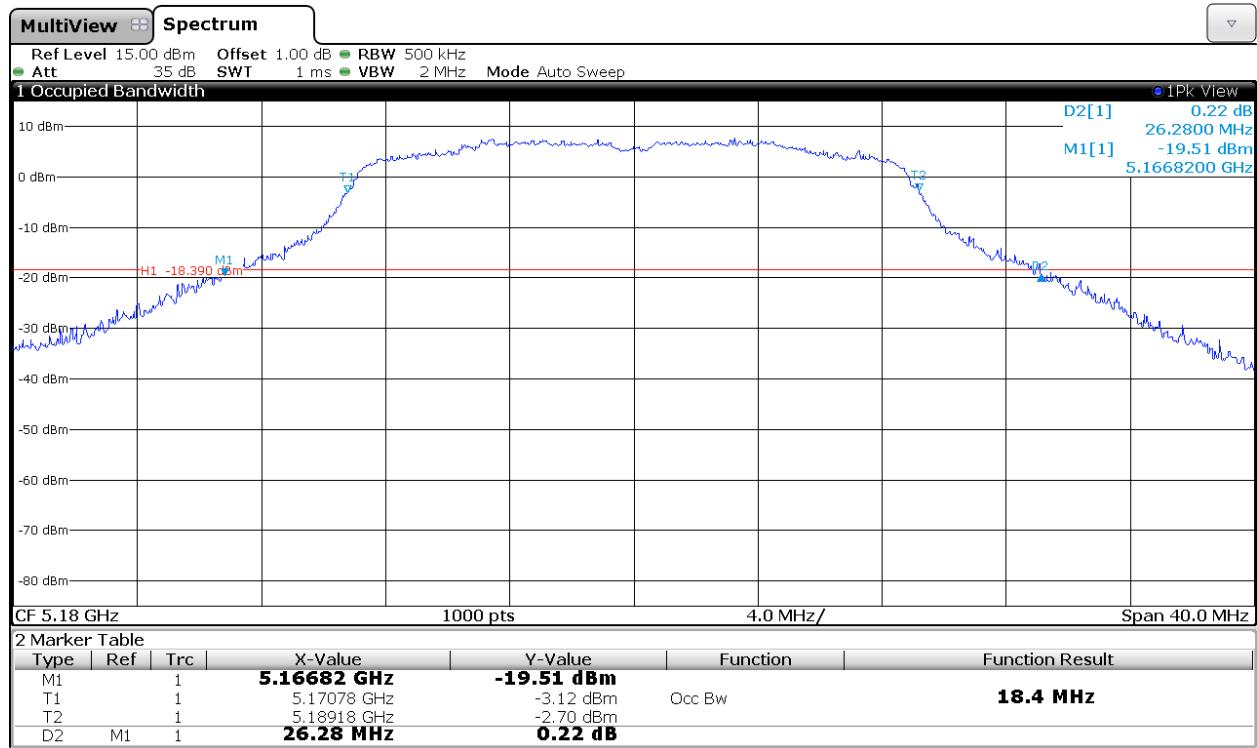

Middle Channel

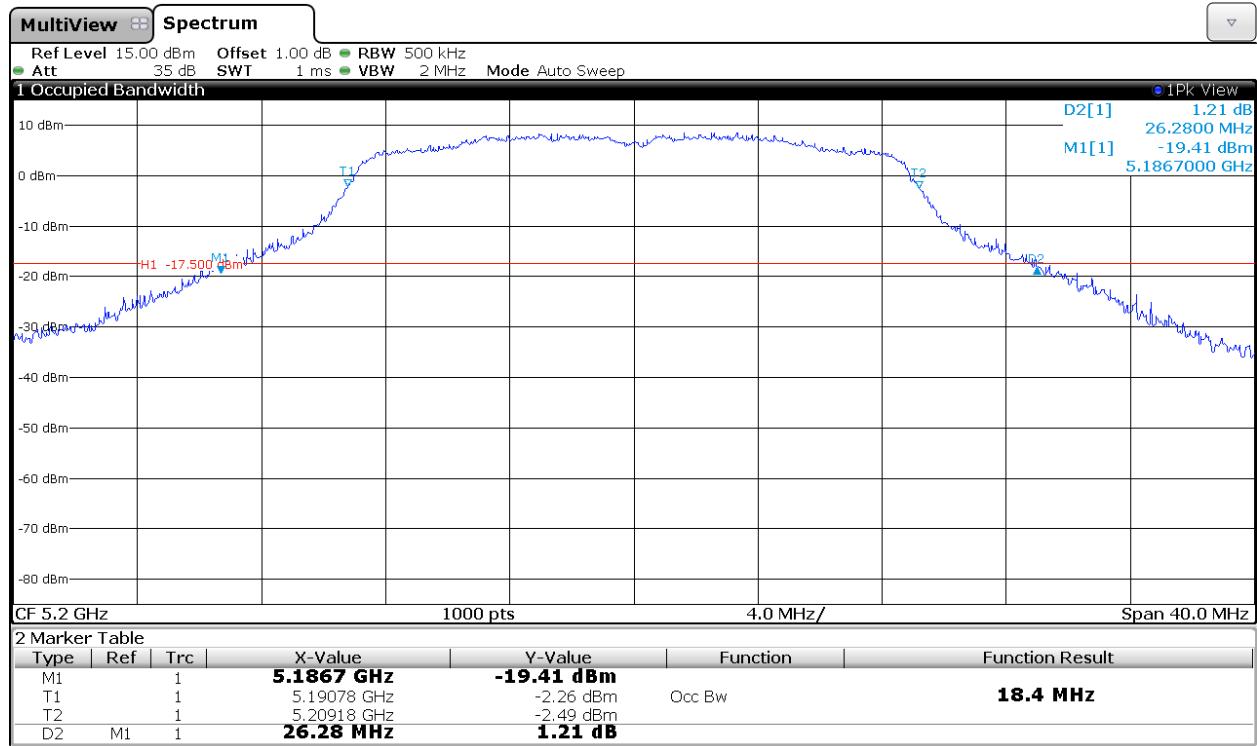


Highest Channel

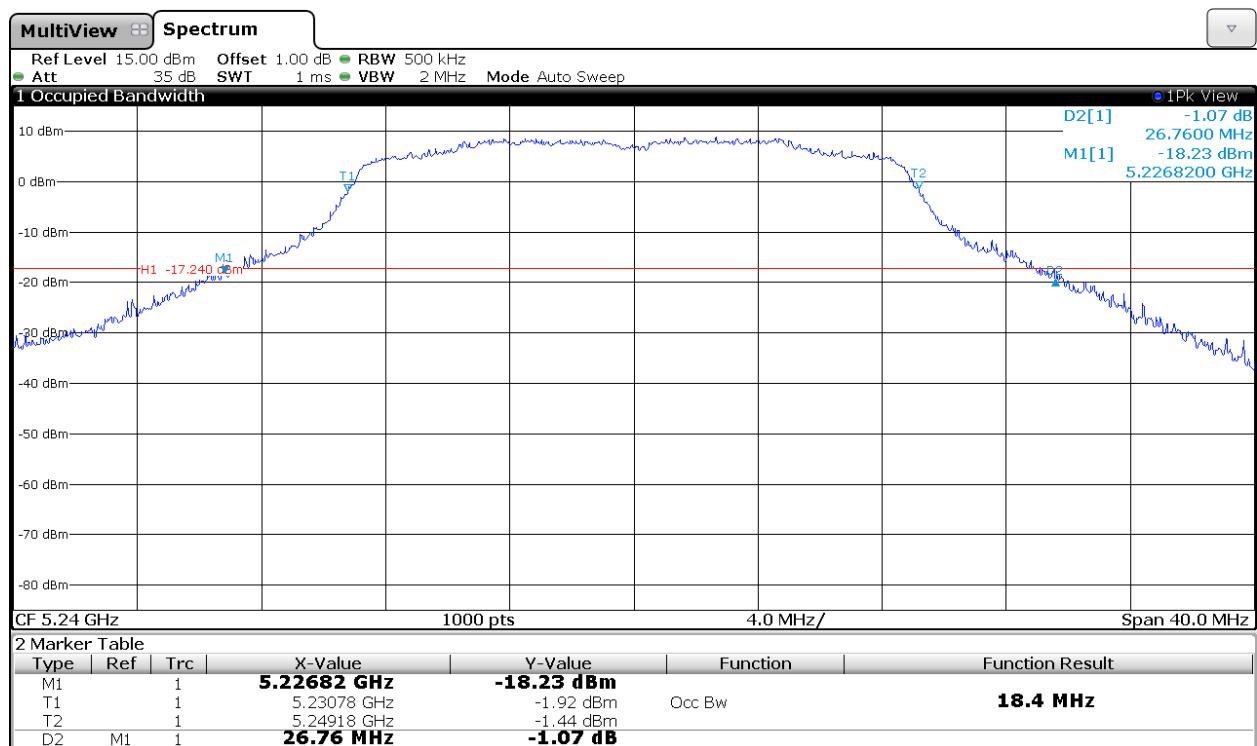


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN B


Lowest Channel

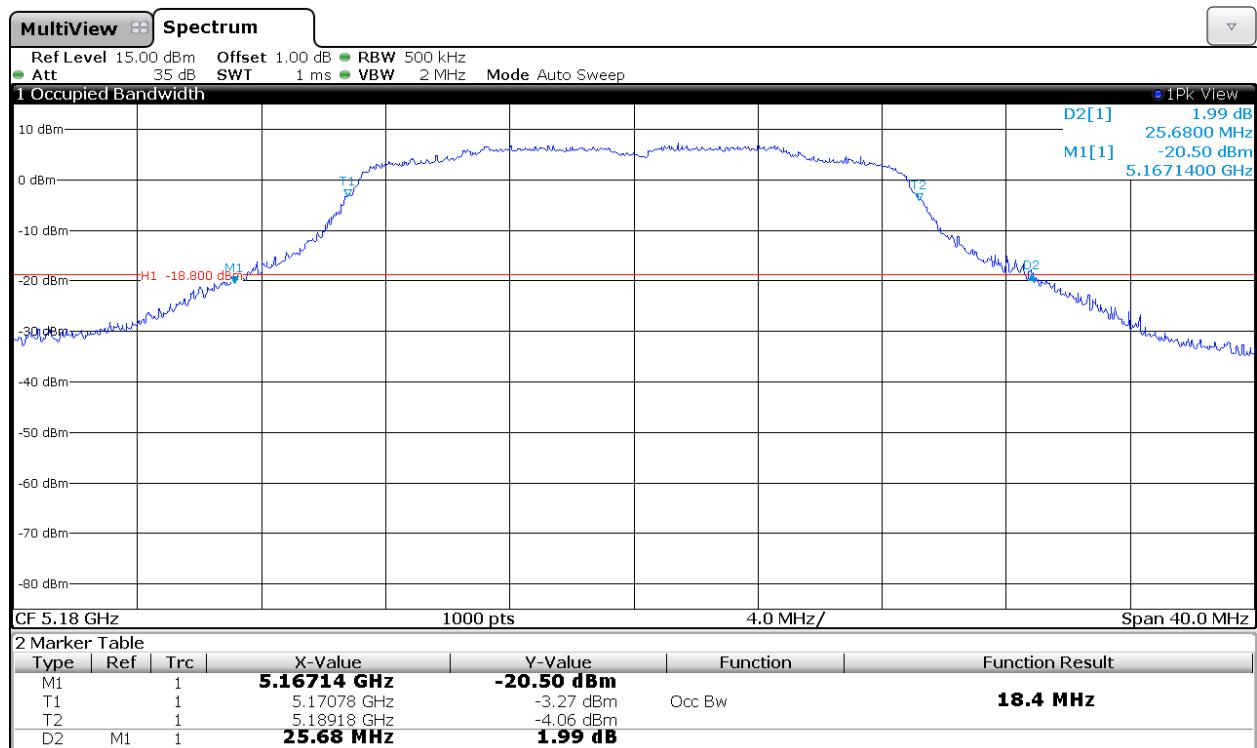

Middle Channel

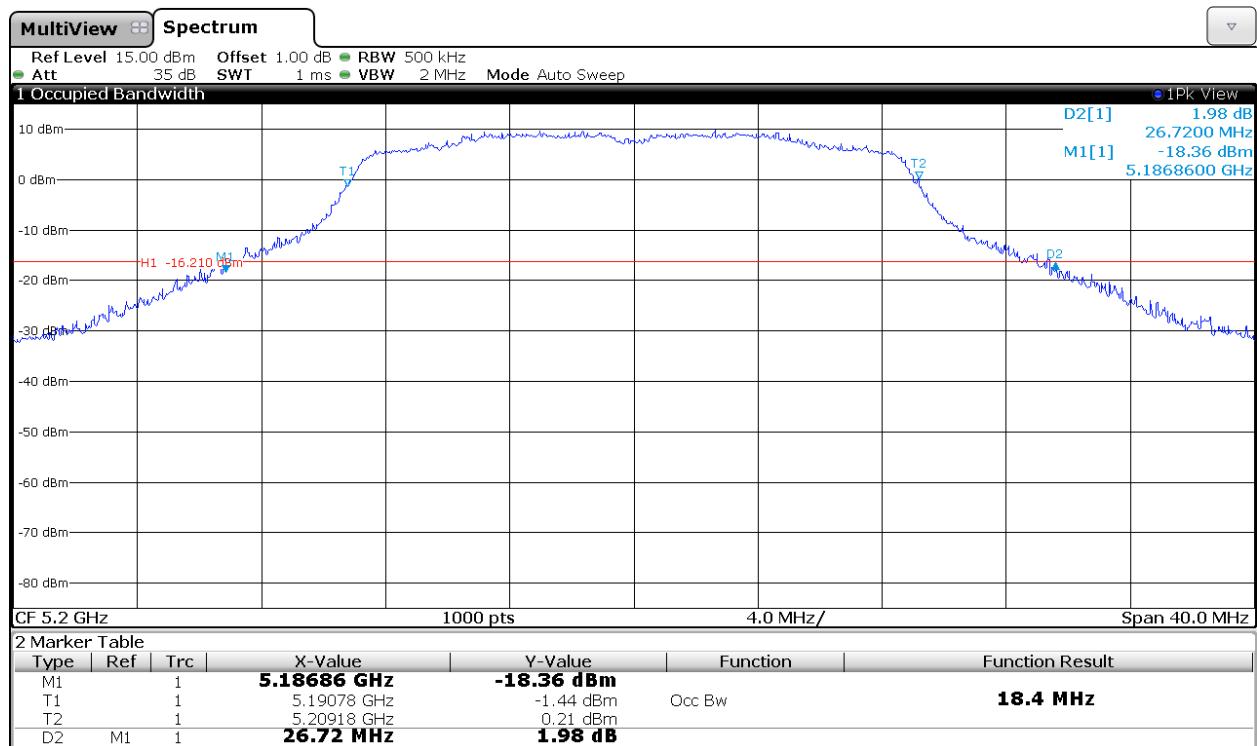


Highest Channel

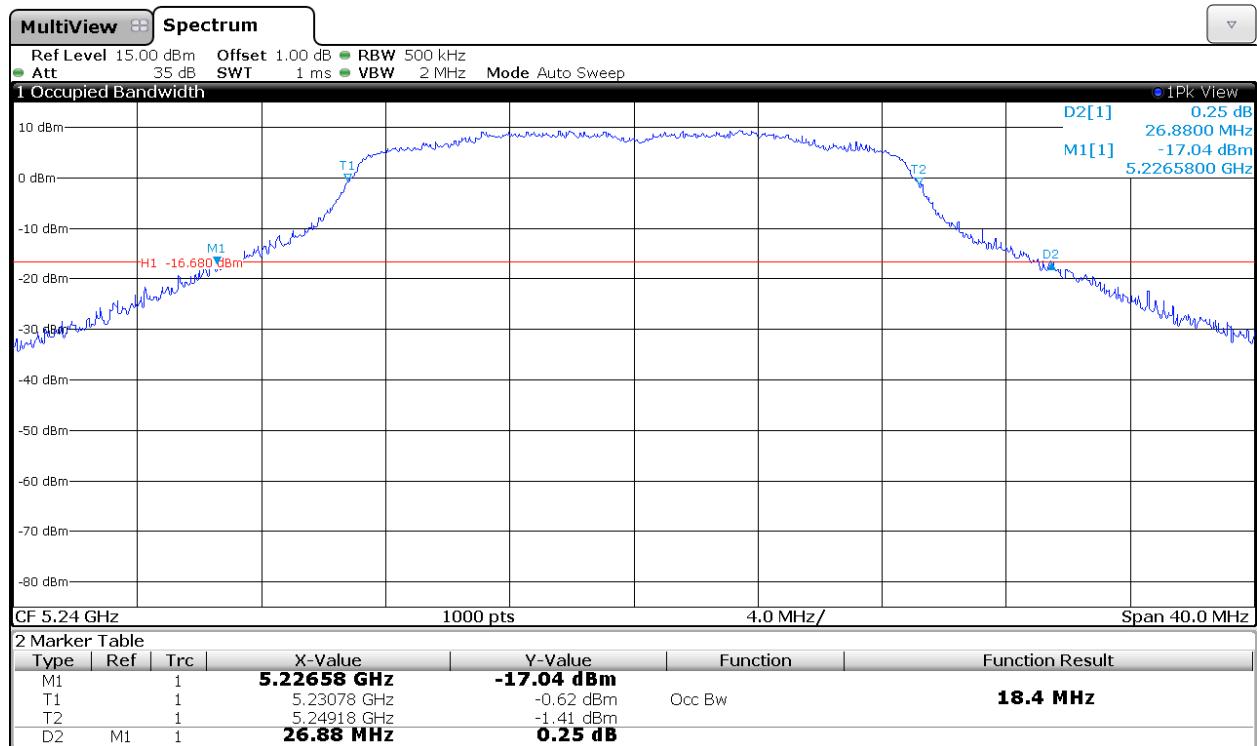


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN A

Lowest Channel

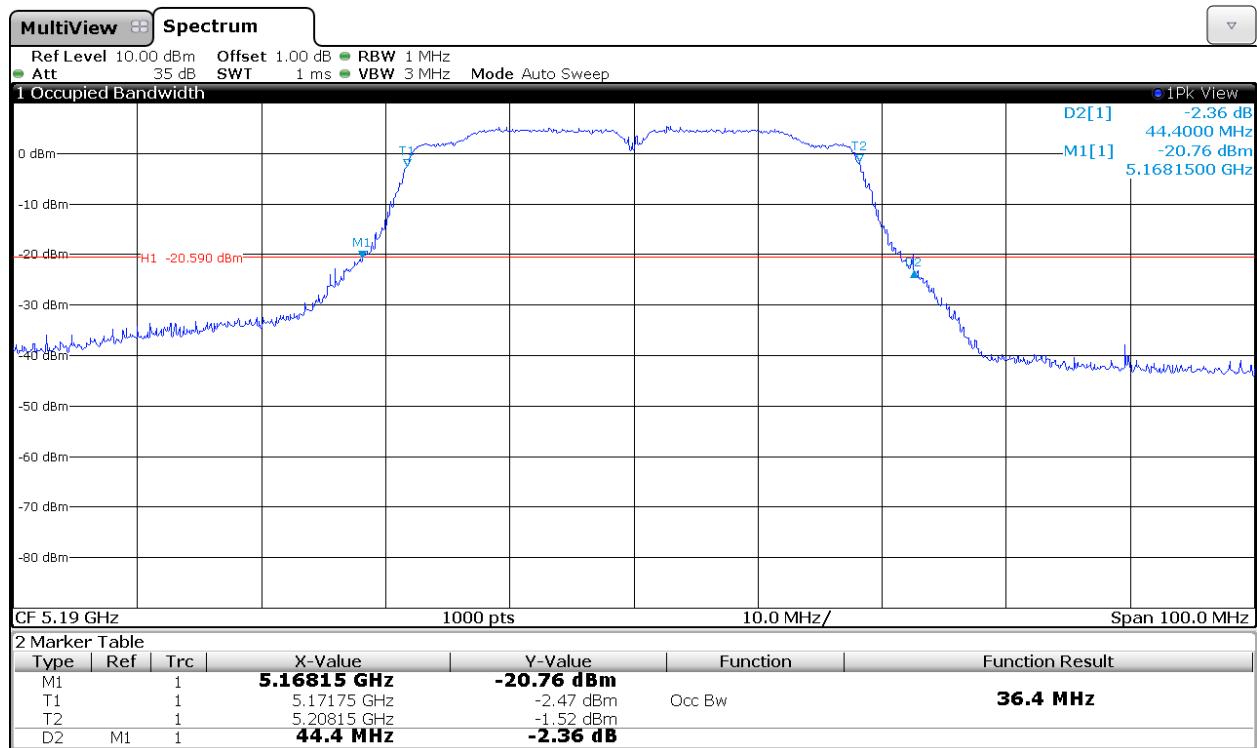


Highest Channel

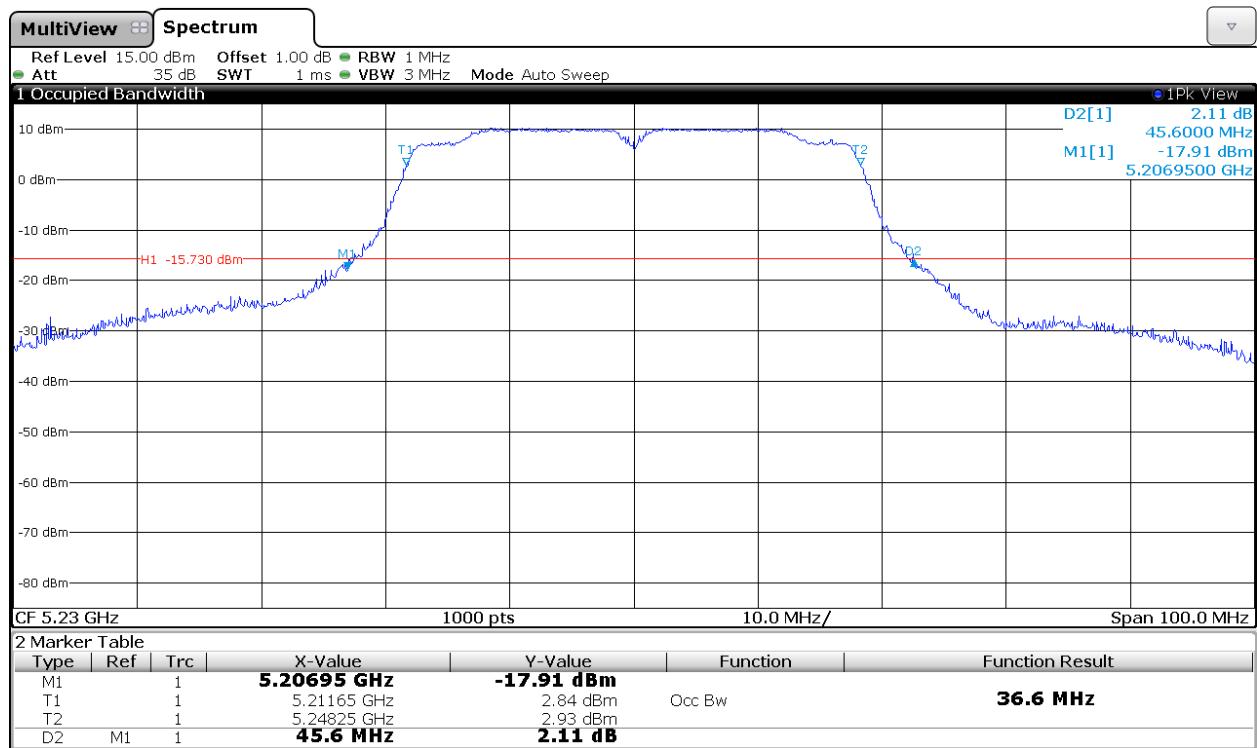


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN B


Lowest Channel

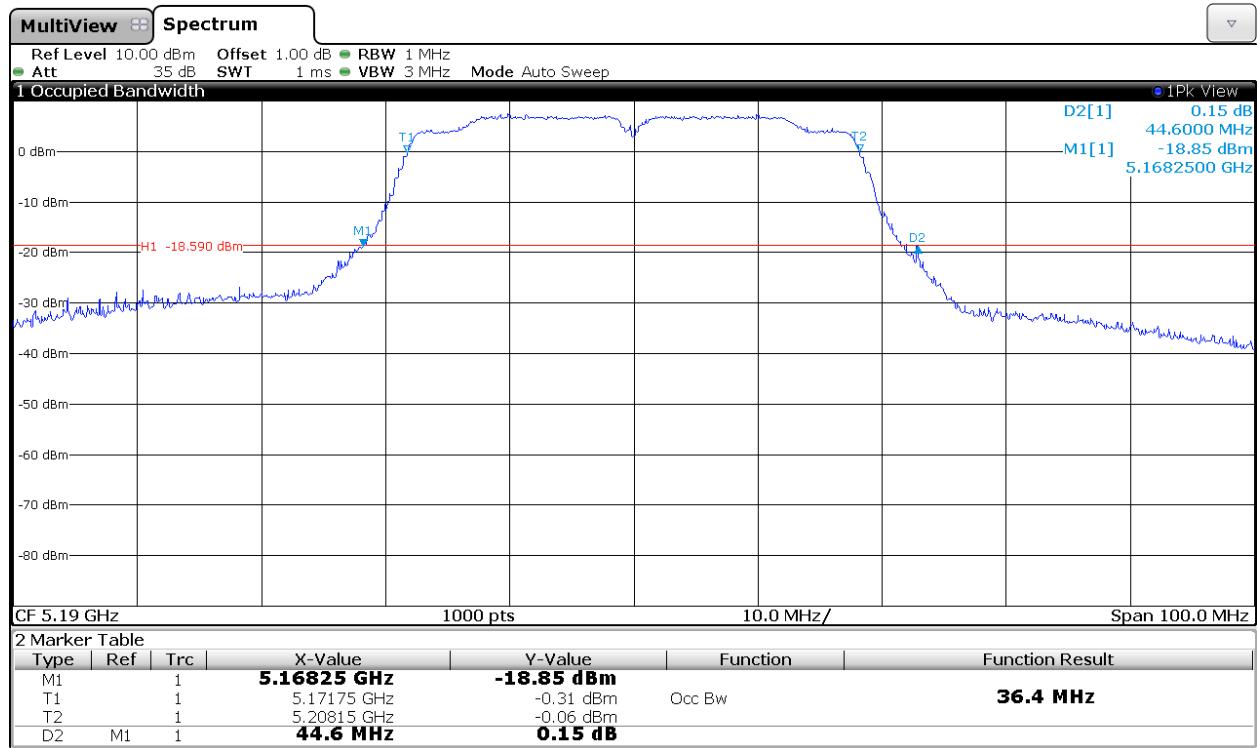


Highest Channel

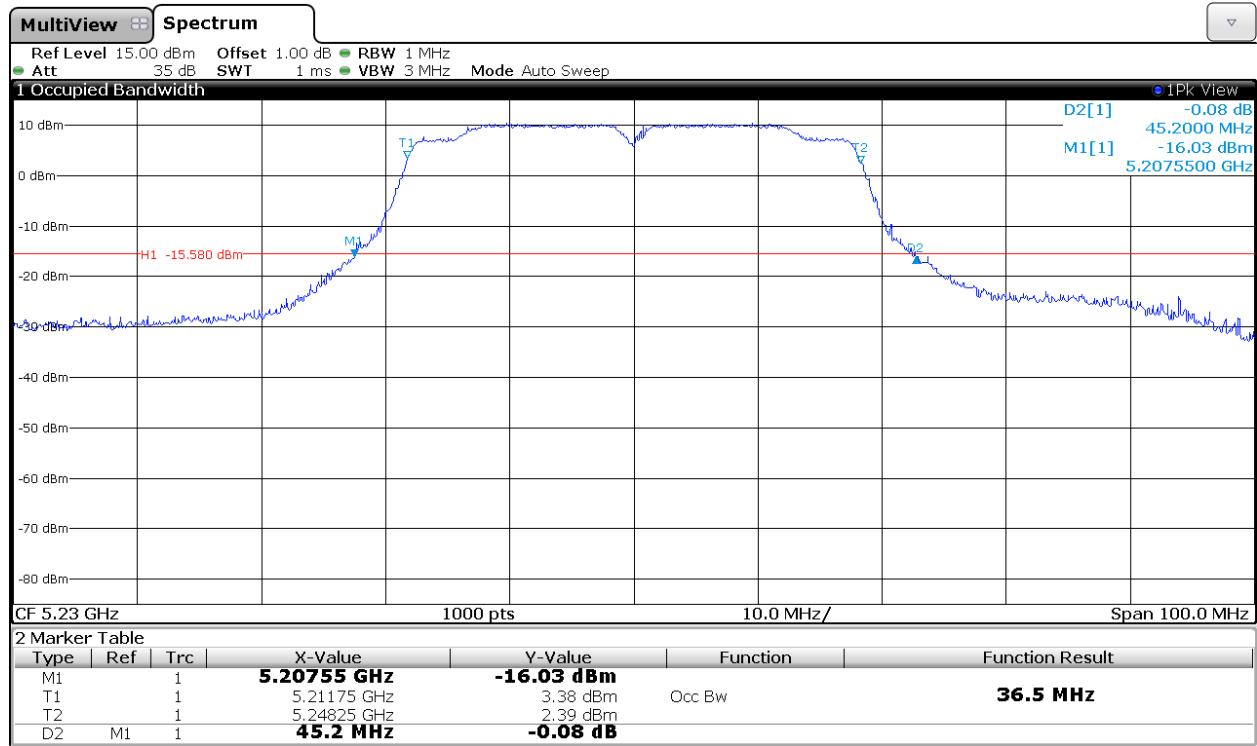

802.11 ac 80 MHz mode CHAIN A

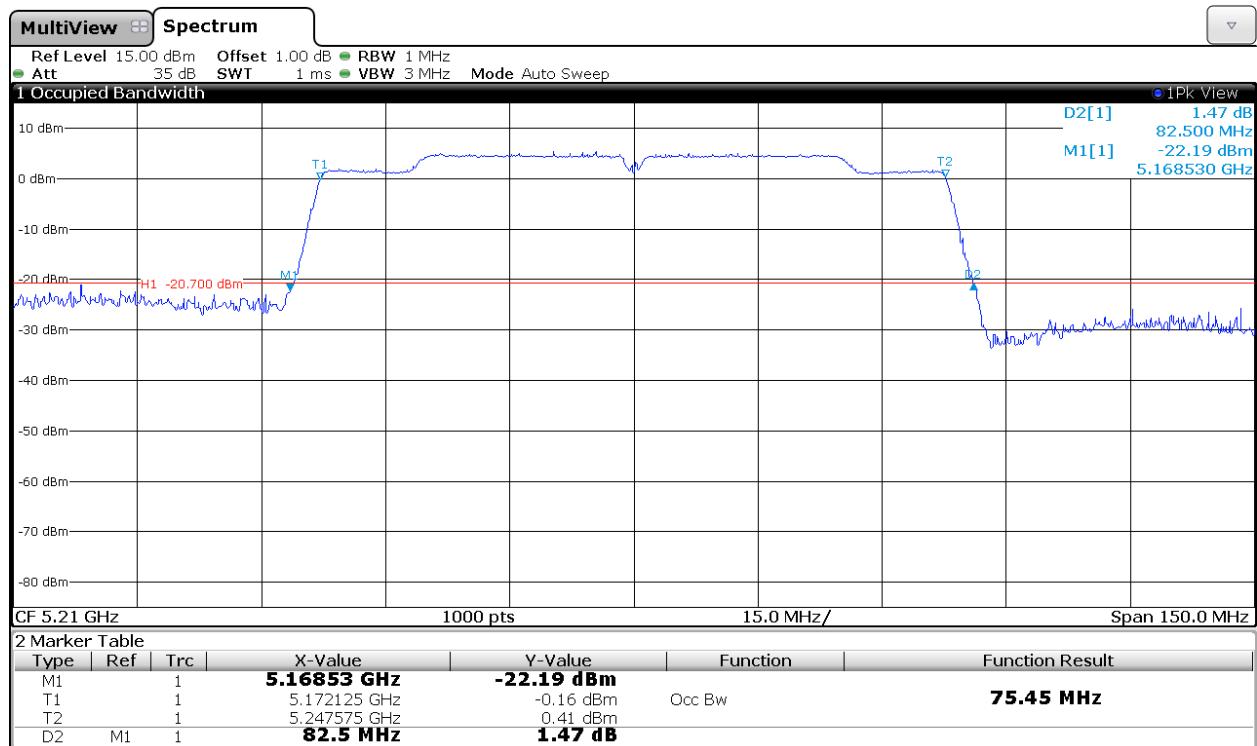

802.11 ac 80 MHz mode CHAIN B

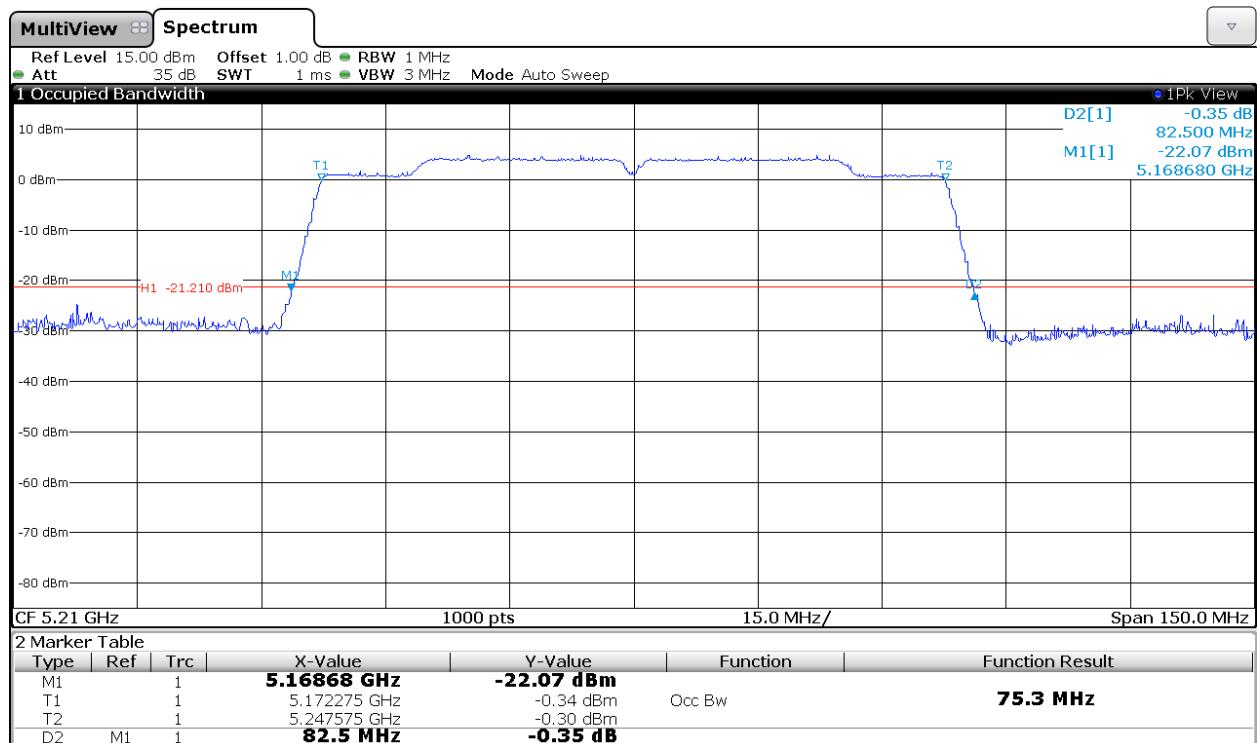

Section 15.407 Subclause (a) (1) / RSS-210 A9.2. (1). Maximum output power, Peak power spectral density and antenna gain

SPECIFICATION

FCC 15.407: For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17 dBm) or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-210: The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Within the emission bandwidth, when the peak spectral density per MHz over any continuous transmission exceeds the average ($10 \log_{10} B$) value by more than 3 dB, the permissible power spectral density shall be reduced by the excess amount.

RESULTS

The maximum conducted output power was measured using the channel power integration method according to point E 2) b) (Method SA-1) of Guidance 789033 D01.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units (mW—not dBm).

The e.i.r.p. levels are calculated by adding the declared maximum antenna gain (dBi).

The peak power spectral density (PPSD) was measured using the method according to point F) (Method SA-1) of Guidance 789033 D01.

The e.i.r.p. levels are calculated by adding the declared maximum antenna gain (dBi).

For MIMO mode, the Measure and add $10 \log(NANT)$ dB, (where NANT is the number of outputs) technique was used according to the Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(NANT)$ dB is added to each spectrum value before comparing to the emission limit. Number of outputs = 2.

The number of transmit antennas (NANT) are 2 and the number of spatial streams (Nss) are 2 and therefore the Array Gain is 0 dB.

1. 802.11a mode (see next plots).

CHAIN A

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5180 MHz	14.10	17.70	3.81	7.41
5200 MHz	14.45	18.05	3.87	7.47
5240 MHz	14.38	17.98	3.94	7.54

CHAIN B

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5180 MHz	13.79	17.39	3.34	6.94
5200 MHz	14.45	18.05	3.96	7.56
5240 MHz	14.47	18.07	3.96	7.56

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

2. 802.11 n20 MHz and 802.11 ac 20 MHz modes. (see next plots).

Note: the test was performed with 802.11 n20 MHz mode which is the same modulation scheme as 802.11 ac 20 MHz.

CHAIN A

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5180 MHz	13.73	17.33	3.11	6.71
5200 MHz	14.35	17.95	3.94	7.54
5240 MHz	14.53	18.13	3.97	7.57

CHAIN B

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5180 MHz	13.91	17.51	3.36	6.96
5200 MHz	14.54	18.14	3.91	7.51
5240 MHz	14.49	18.09	3.89	7.49

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power Chain A (dBm)	Maximum conducted output power Chain B (dBm)	Total conducted output power (dBm) A+B	Total output power e.i.r.p. (dBm) A+B
5180 MHz	11.49	11.23	14.37	17.97
5200 MHz	11.38	11.48	14.44	18.04
5240 MHz	11.56	11.46	14.52	18.12

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 3.6 dBi

Frequency	PPSD/MHz Chain A (dBm)	PPSD/MHz Chain B (dBm)	Total PPSD/MHz Chain A (dBm) ¹	Total PPSD/MHz Chain B (dBm) ¹	Total PPSD/MHz Chain A e.i.r.p. (dBm)	Total PPSD/MHz Chain B e.i.r.p. (dBm)
5180 MHz	0.97	0.80	3.98	3.81	7.58	7.41
5200 MHz	0.95	0.93	3.96	3.94	7.56	7.54
5240 MHz	0.92	0.90	3.93	3.91	7.53	7.51

Note 1: The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Measurement uncertainty = ±1.2 dB

Verdict: PASS

3. 802.11 n40 MHz and 802.11 ac 40 MHz modes. (see next plots).

Note: the test was performed with 802.11 n40 MHz mode which is the same modulation scheme as 802.11 ac 40 MHz.

CHAIN A

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5190 MHz	11.73	15.33	-2.21	1.39
5230 MHz	16.40	20.00	2.42	6.02

CHAIN B

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5190 MHz	13.12	16.72	-0.81	2.79
5230 MHz	16.20	19.80	2.32	5.92

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power Chain A (dBm)	Maximum conducted output power Chain B (dBm)	Total conducted output power (dBm) A+B	Total output power e.i.r.p. (dBm) A+B
5190 MHz	9.87	9.71	12.80	16.40
5230 MHz	13.94	13.94	16.95	20.55

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 3.6 dBi

Frequency	PPSD/MHz Chain A (dBm)	PPSD/MHz Chain B (dBm)	Total PPSD/MHz Chain A (dBm) ¹	Total PPSD/MHz Chain B (dBm) ¹	Total PPSD/MHz Chain A e.i.r.p. (dBm)	Total PPSD/MHz Chain B e.i.r.p. (dBm)
5190 MHz	-3.78	-3.98	-0.77	-0.97	2.83	2.63
5230 MHz	-0.42	0.09	2.59	3.10	6.19	6.70

 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

4. 802.11 ac 80 MHz mode. (see next plots).
CHAIN A

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5210 MHz	13.69	17.29	-3.27	0.33

CHAIN B

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power (dBm)	Maximum output power e.i.r.p. (dBm)	PPSD/MHz (dBm)	PPSD/MHz e.i.r.p. (dBm)
5210 MHz	13.79	17.39	-3.03	0.57

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 3.6 dBi

Frequency	Maximum conducted output power Chain A (dBm)	Maximum conducted output power Chain B (dBm)	Total conducted output power (dBm)	Total output power e.i.r.p. (dBm)
5210 MHz	11.66	11.63	14.65	18.25

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 3.6 dBi

Frequency	PPSD/MHz Chain A (dBm)	PPSD/MHz Chain B (dBm)	Total PPSD/MHz Chain A (dBm) ¹	Total PPSD/MHz Chain B (dBm) ¹	Total PPSD/MHz Chain A e.i.r.p. (dBm)	Total PPSD/MHz Chain B e.i.r.p. (dBm)
5210 MHz	-5.04	-5.20	-2.03	-2.19	1.57	1.41


 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB


Verdict: PASS

802.11a mode CHAIN A


Lowest Channel

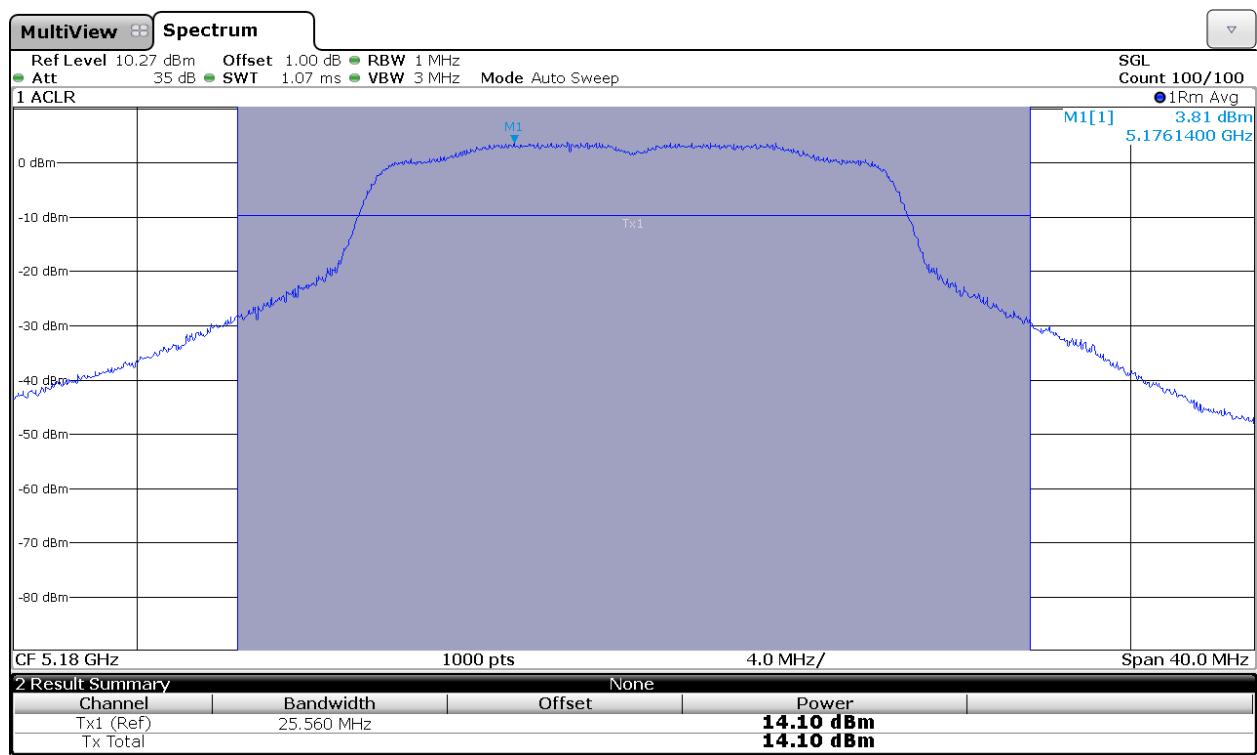

Middle Channel

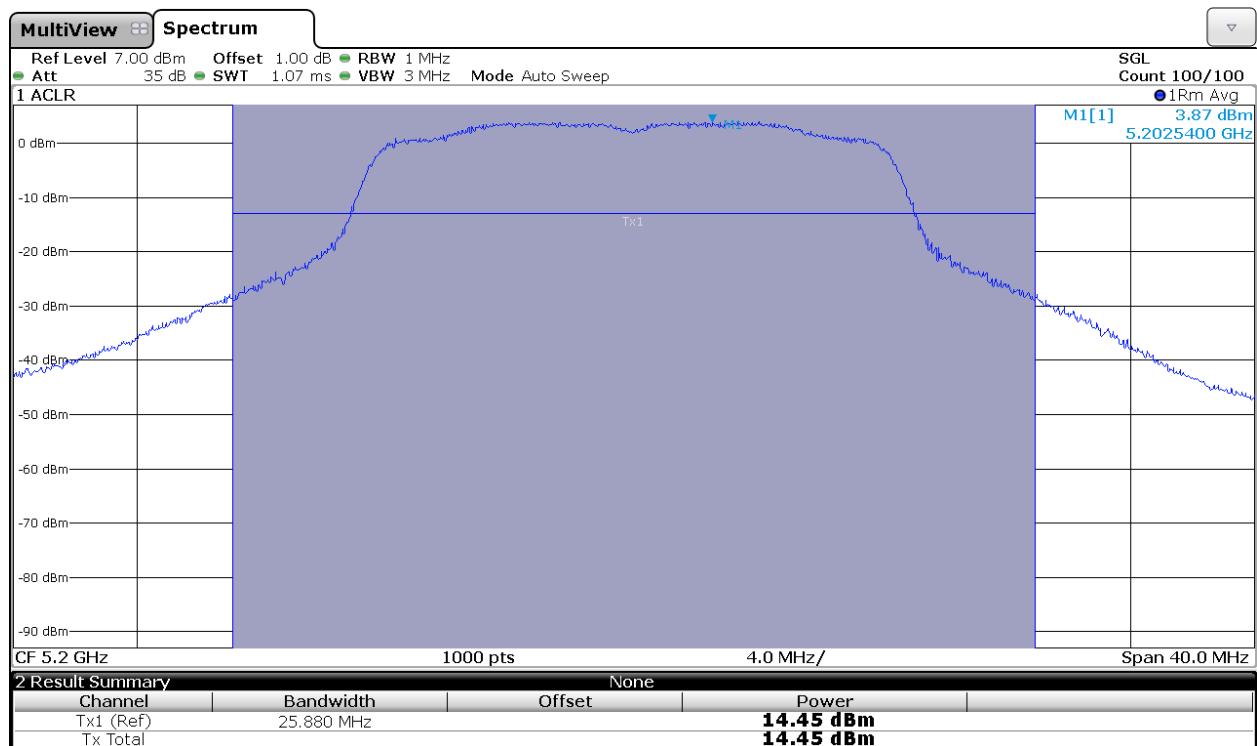


Highest Channel

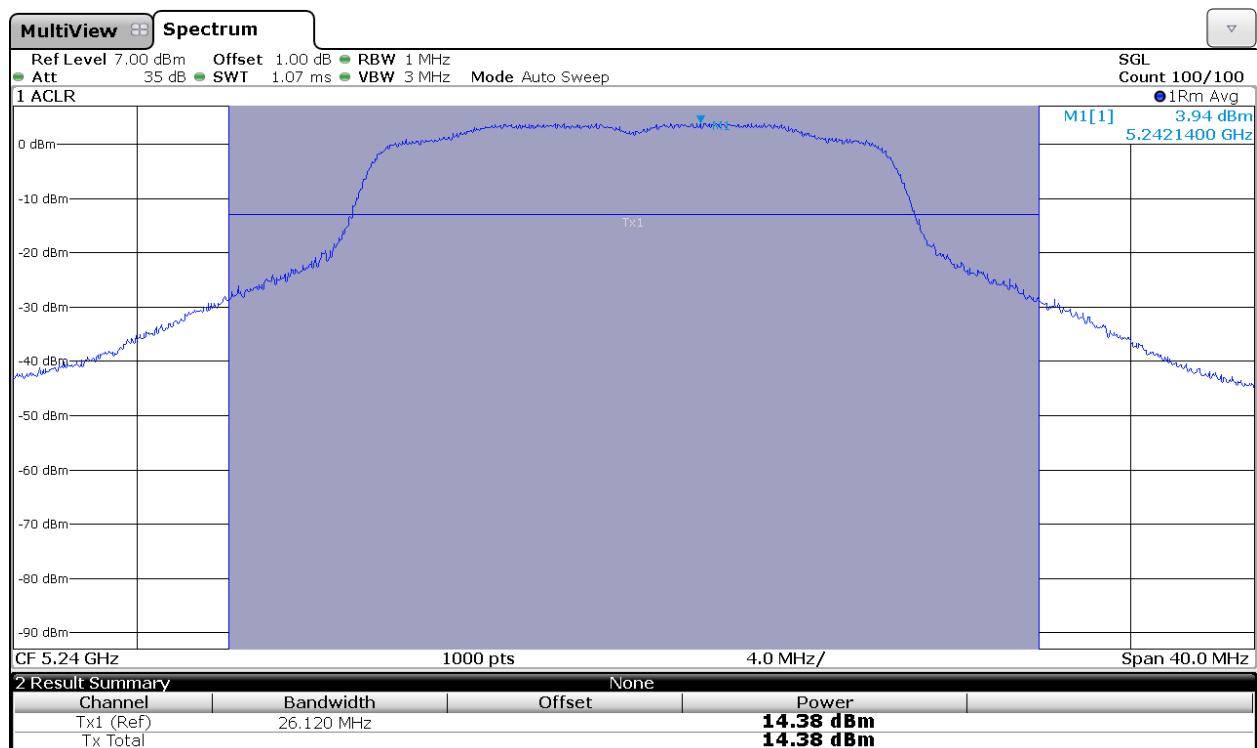


802.11a mode CHAIN B


Lowest Channel

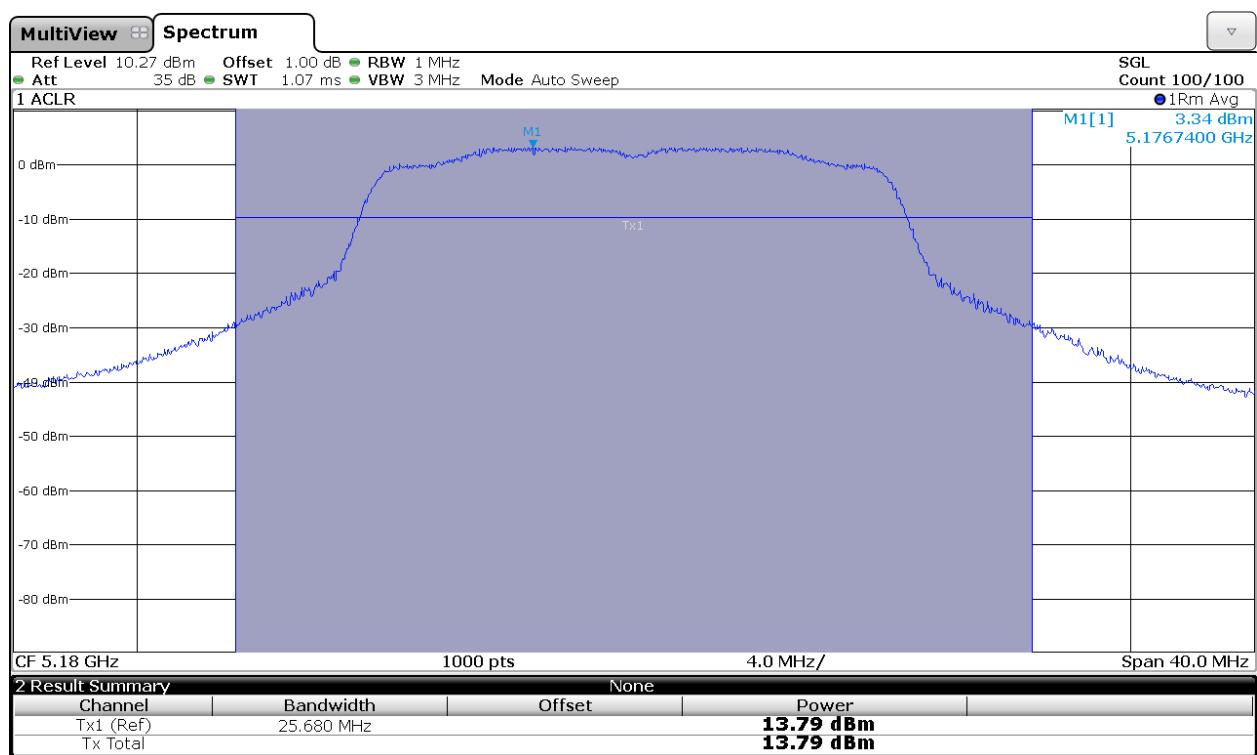

Middle Channel

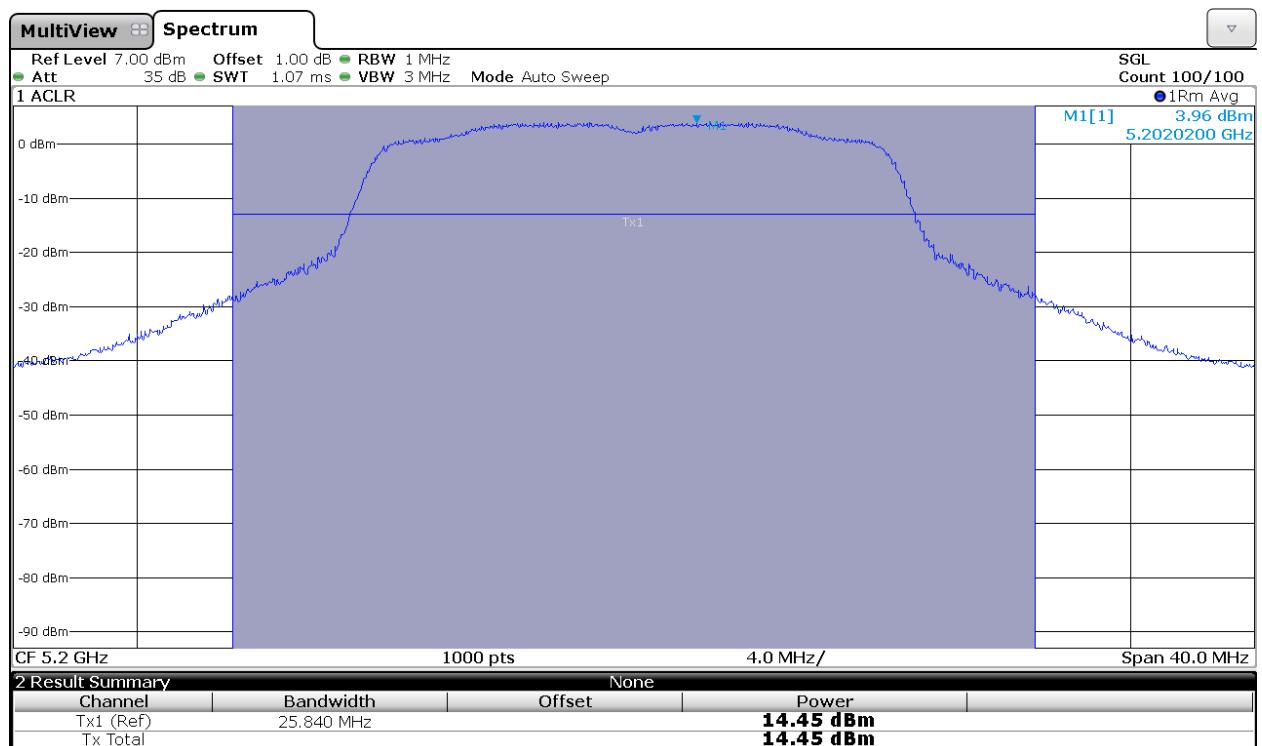


Highest Channel

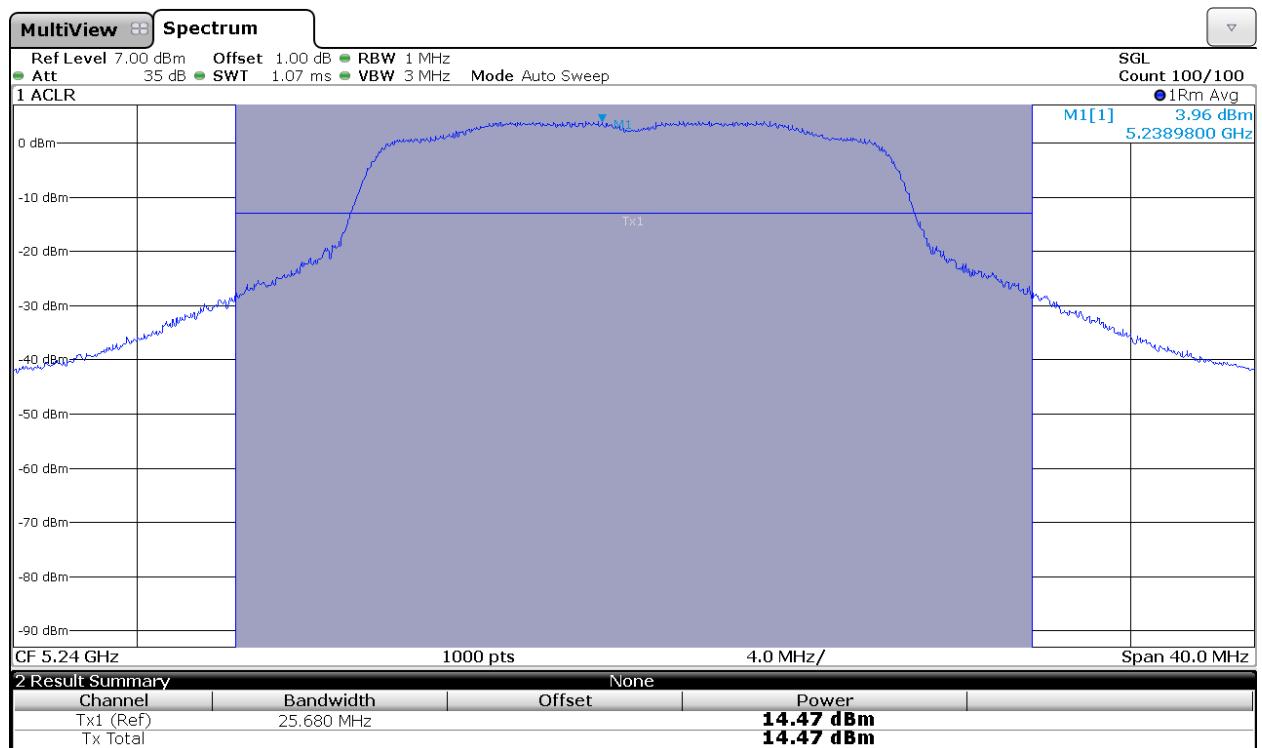


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN A


Lowest Channel

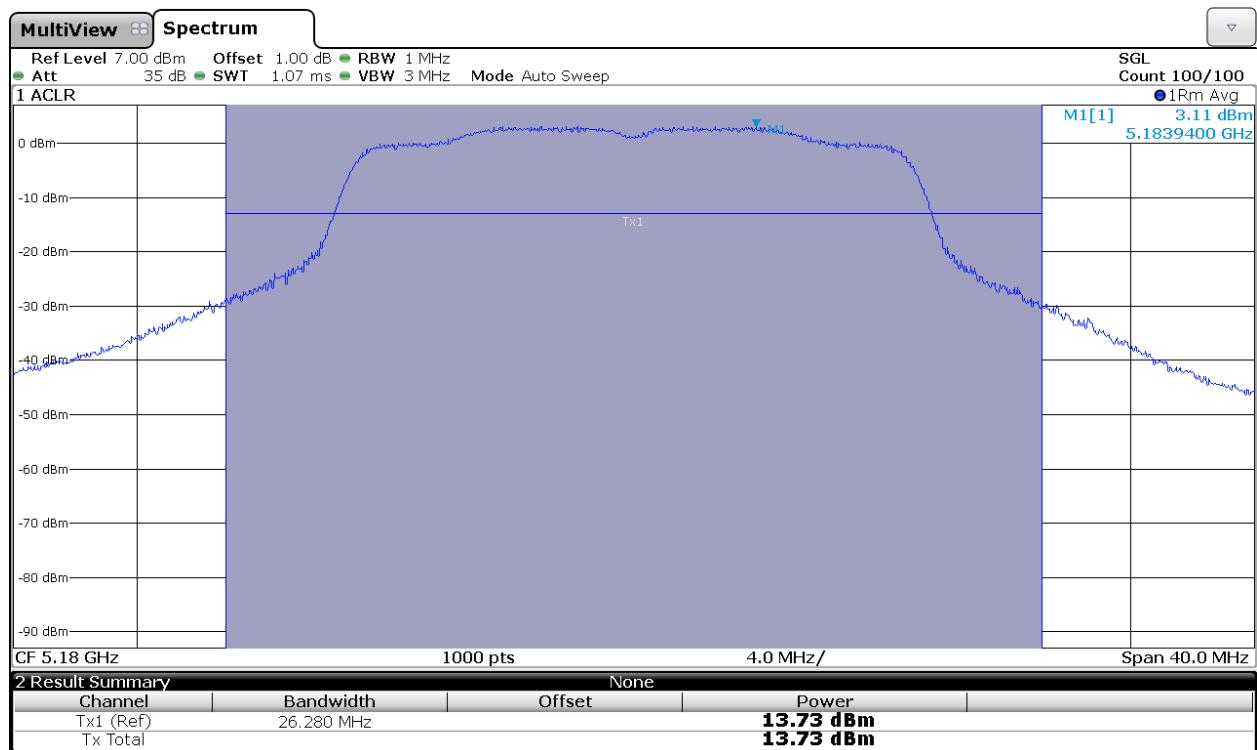

Middle Channel

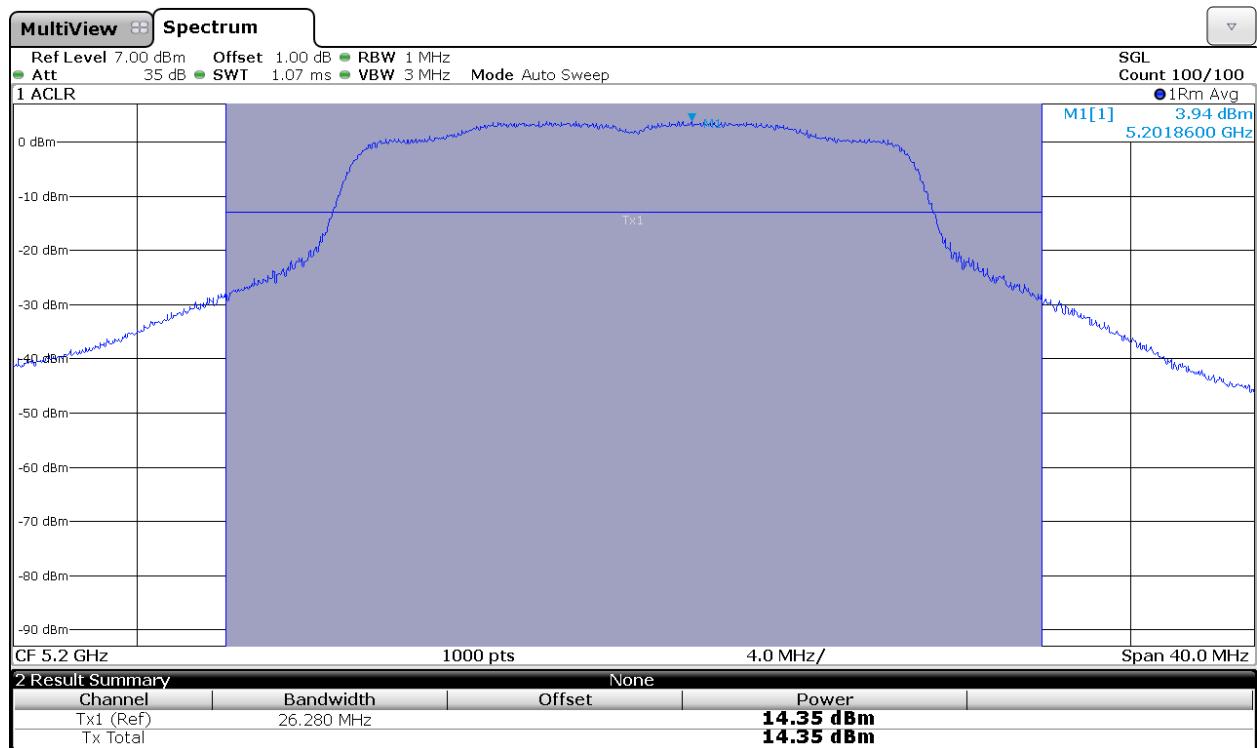


Highest Channel

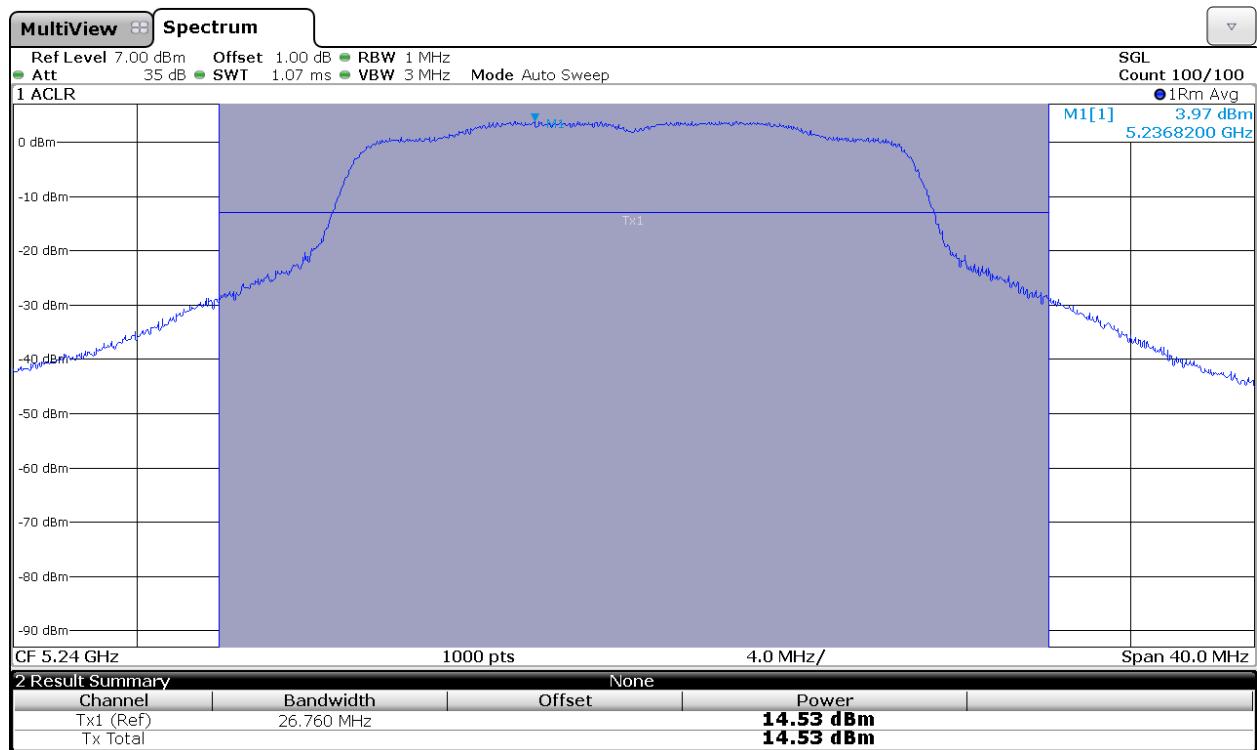


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN B


Lowest Channel

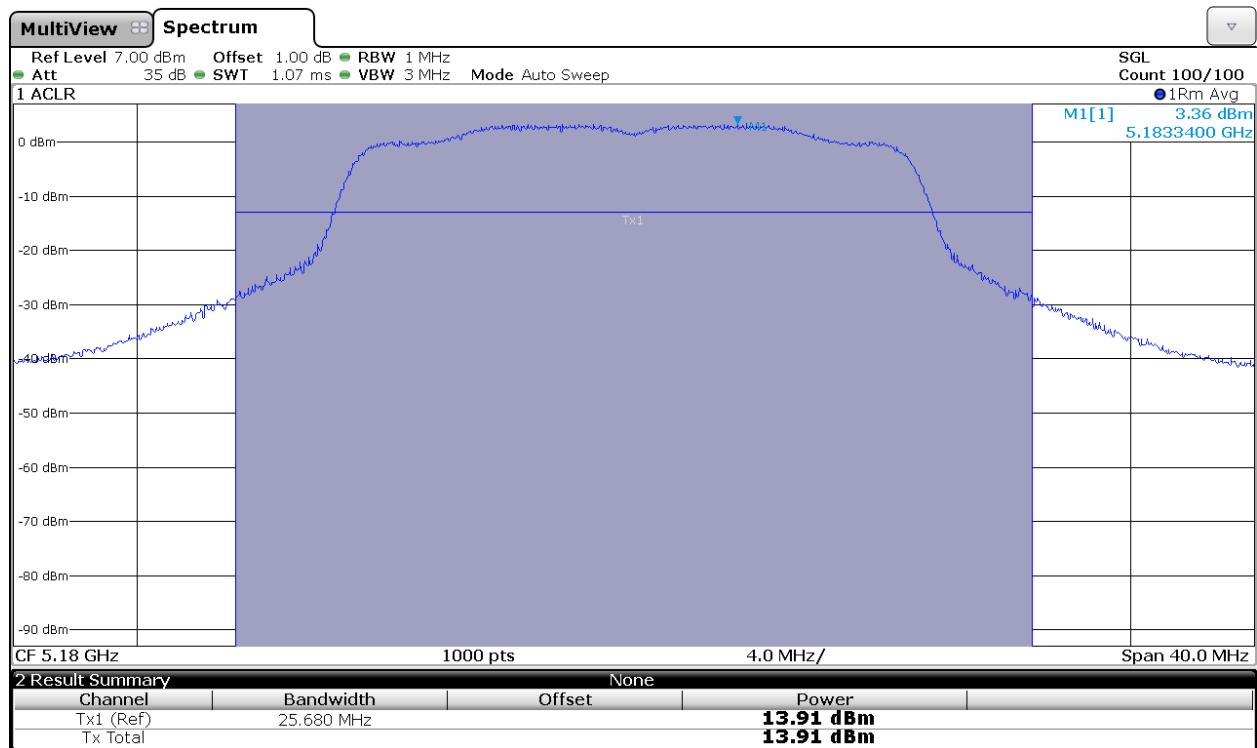

Middle Channel

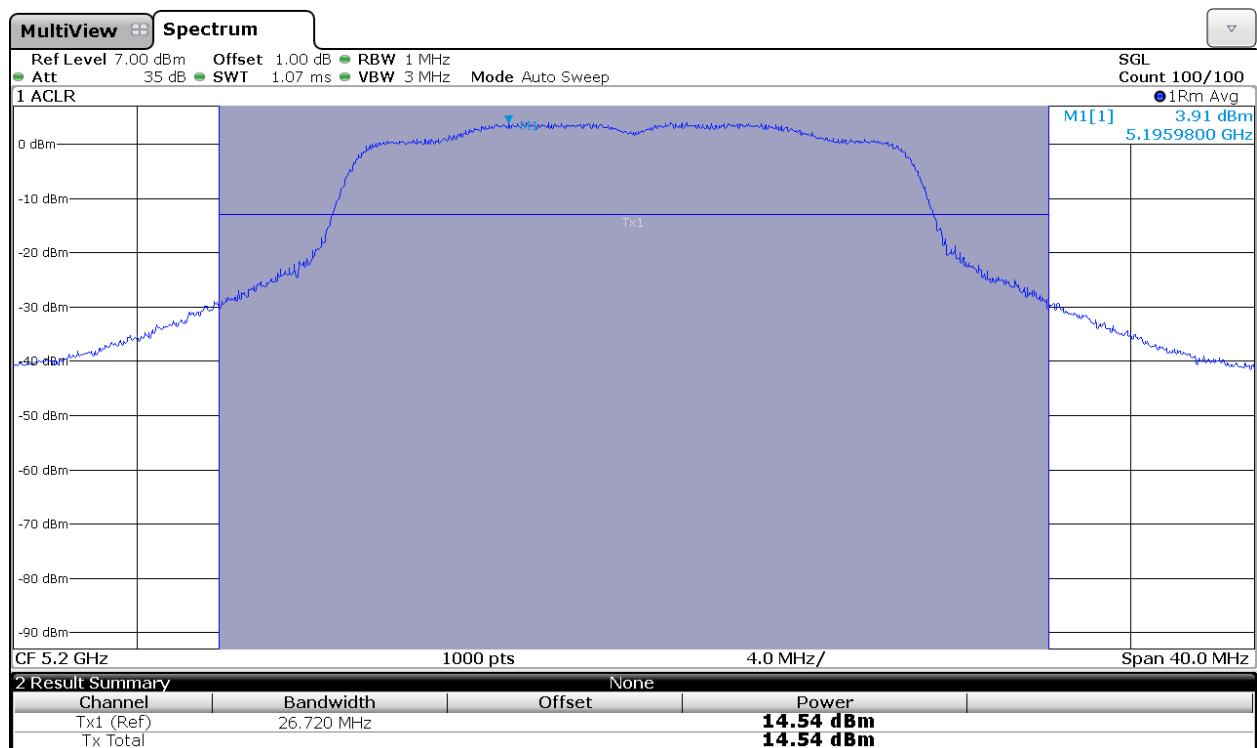


Highest Channel

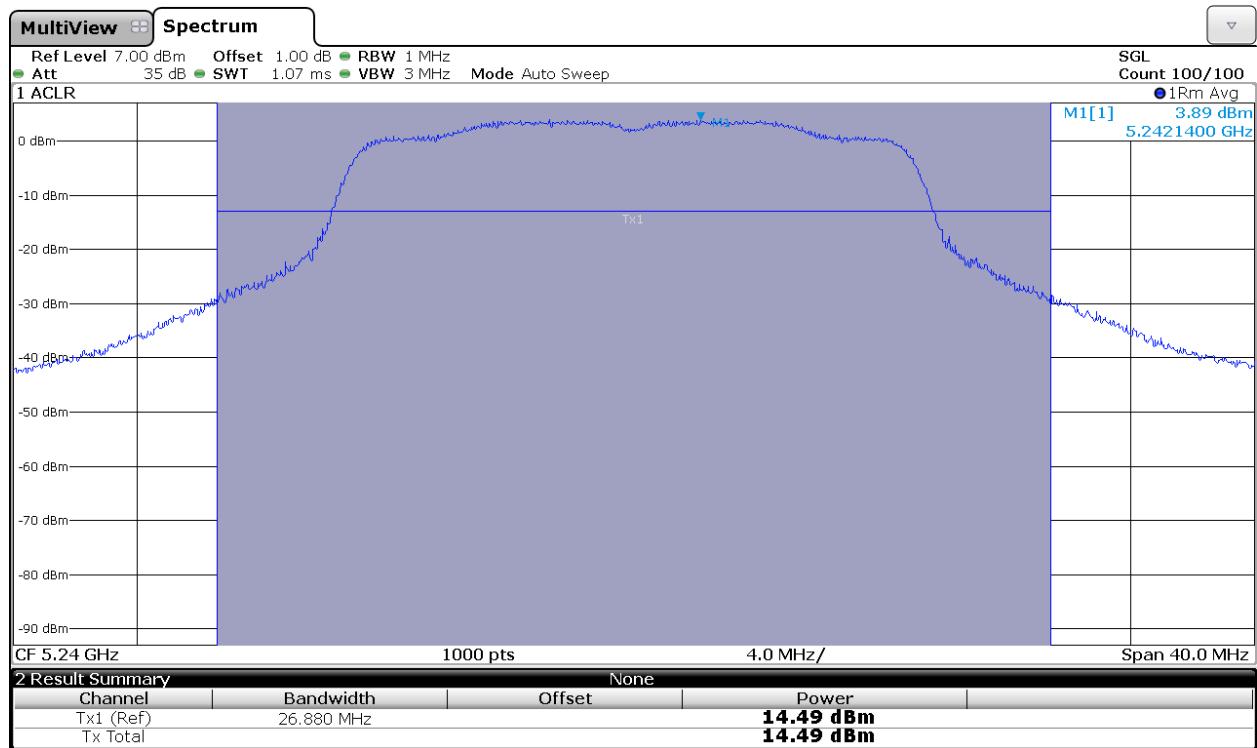


802.11 n20 MHz and 802.11 ac 20 MHz modes MIMO CHAIN A+B


Lowest Channel. Chain A

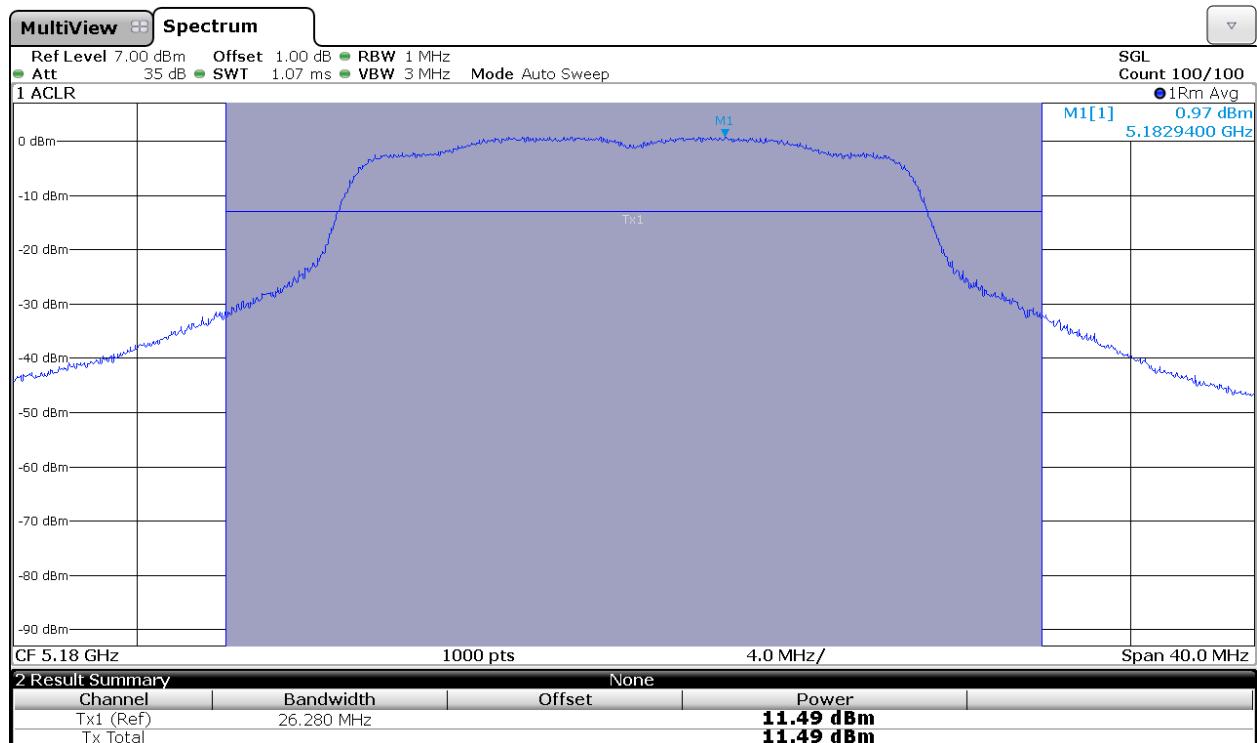


Lowest Channel. Chain B

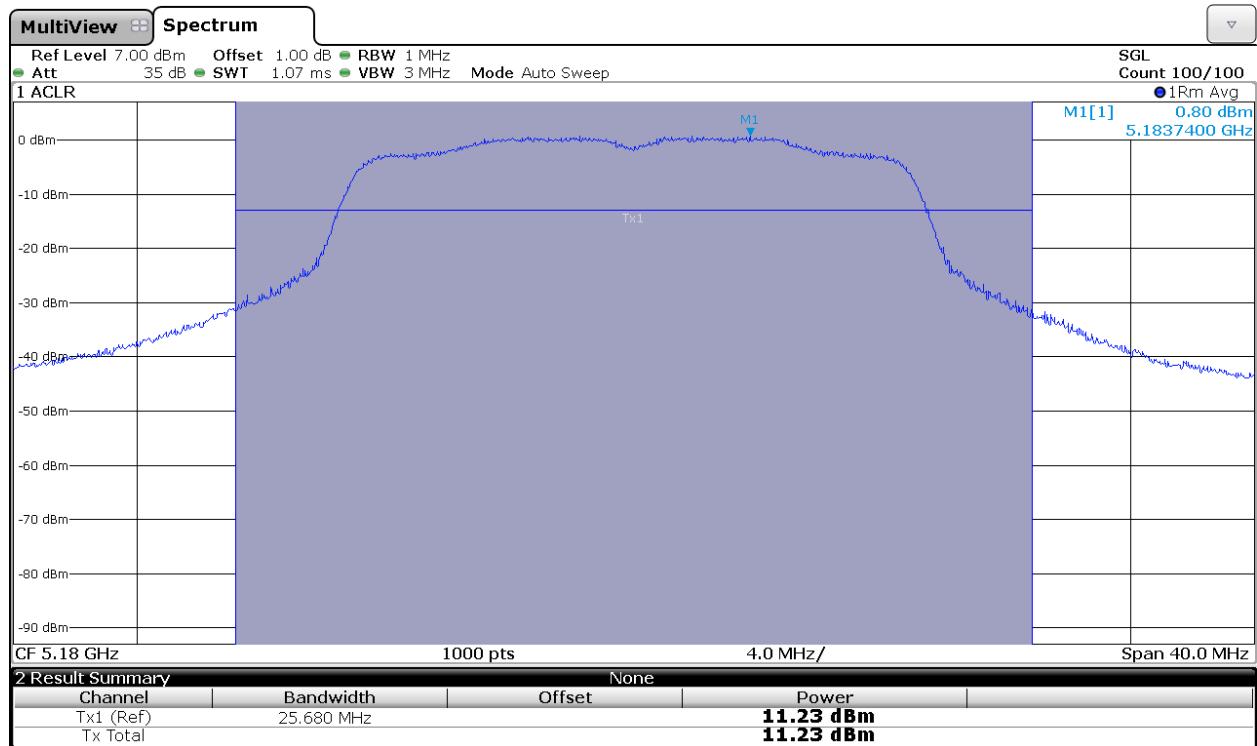


Middle Channel. Chain A.

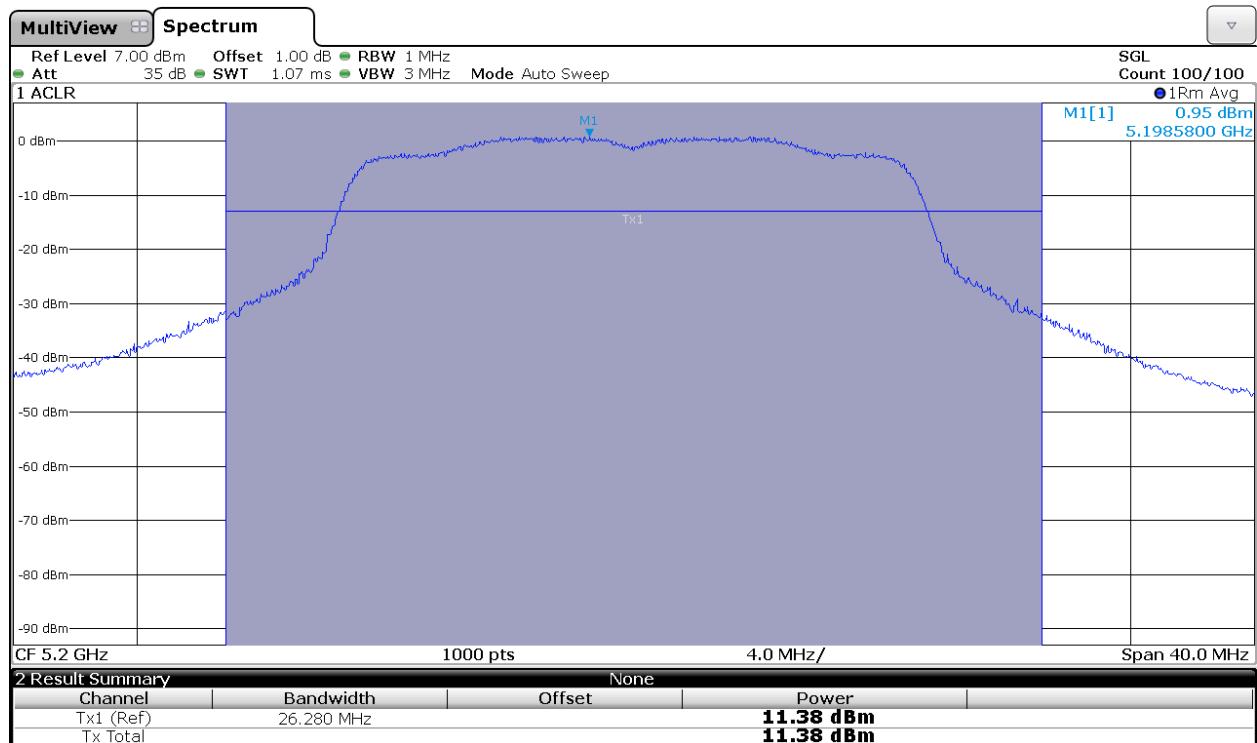


Middle Channel. Chain B.

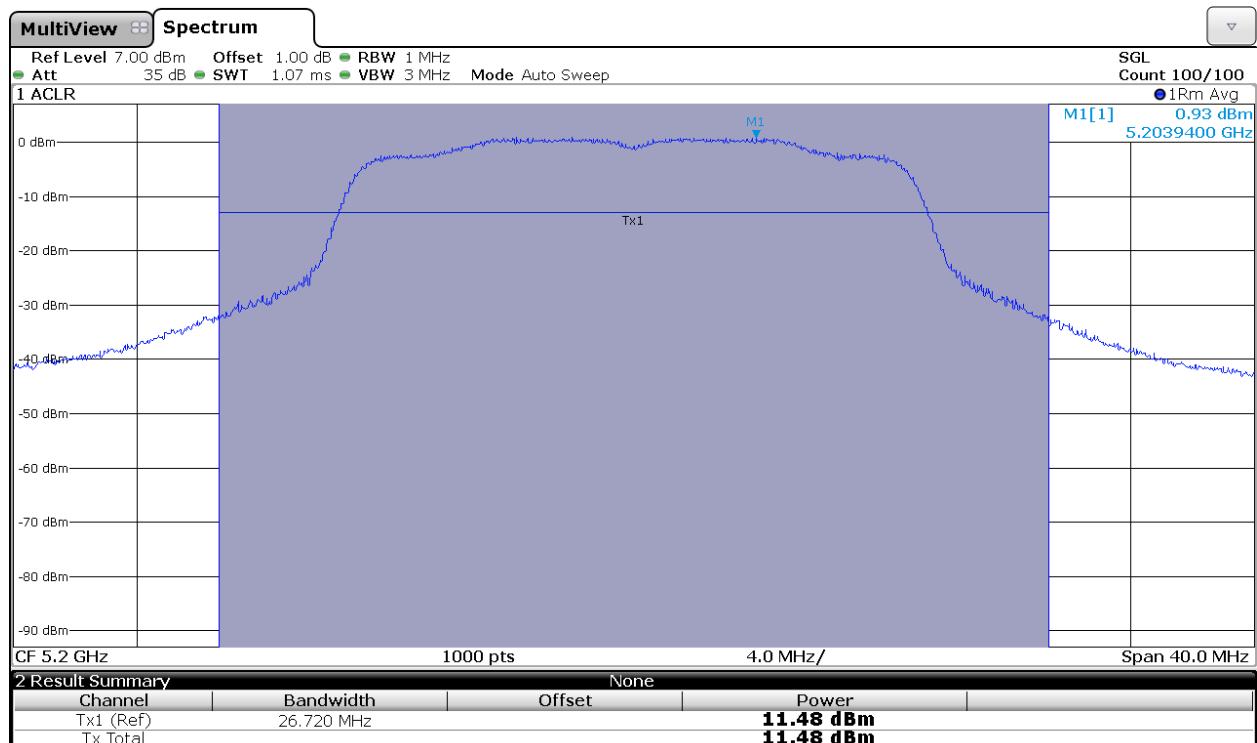

Highest Channel. Chain A.

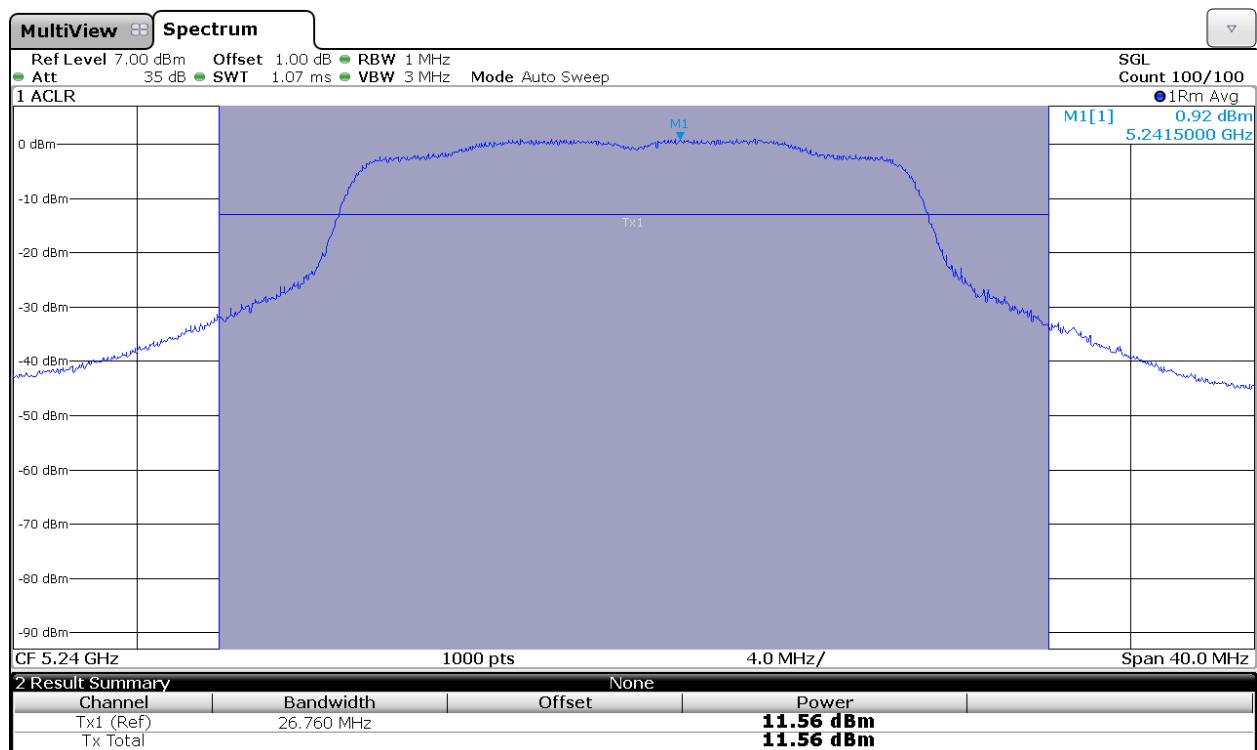


Highest Channel. Chain B.

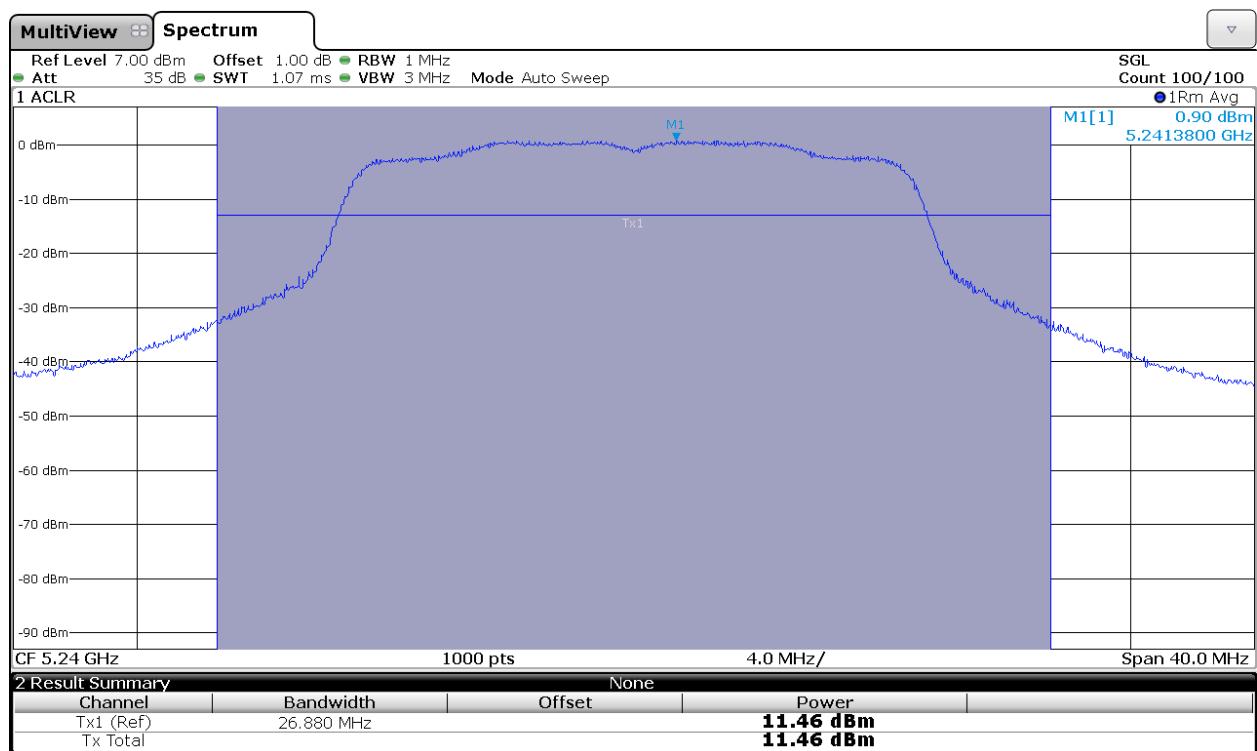


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN A

Lowest Channel

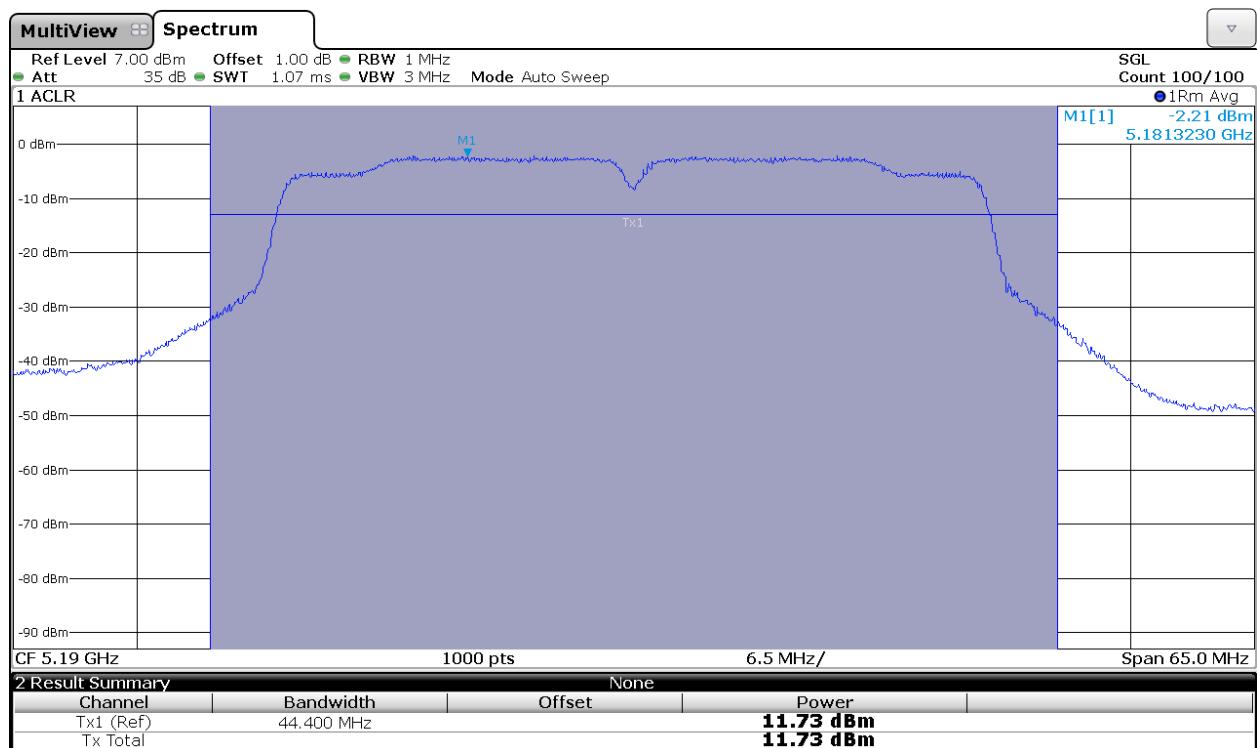


Highest Channel

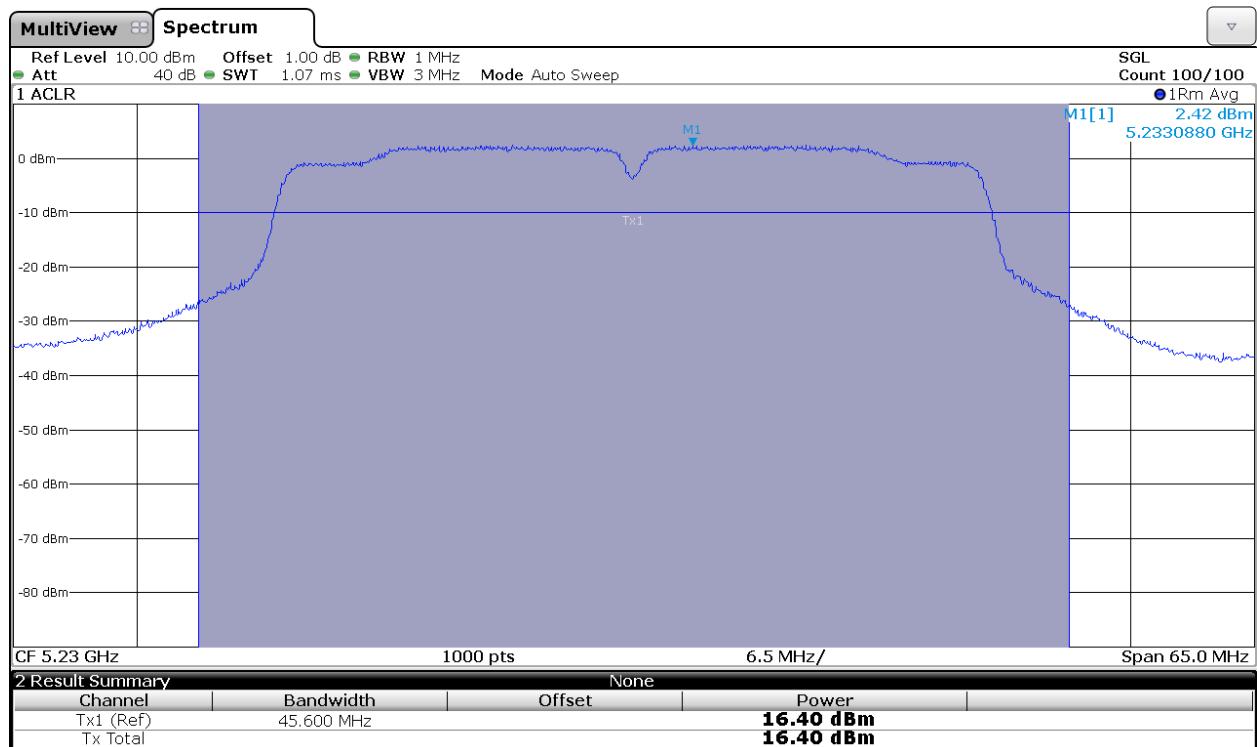


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN B

Lowest Channel

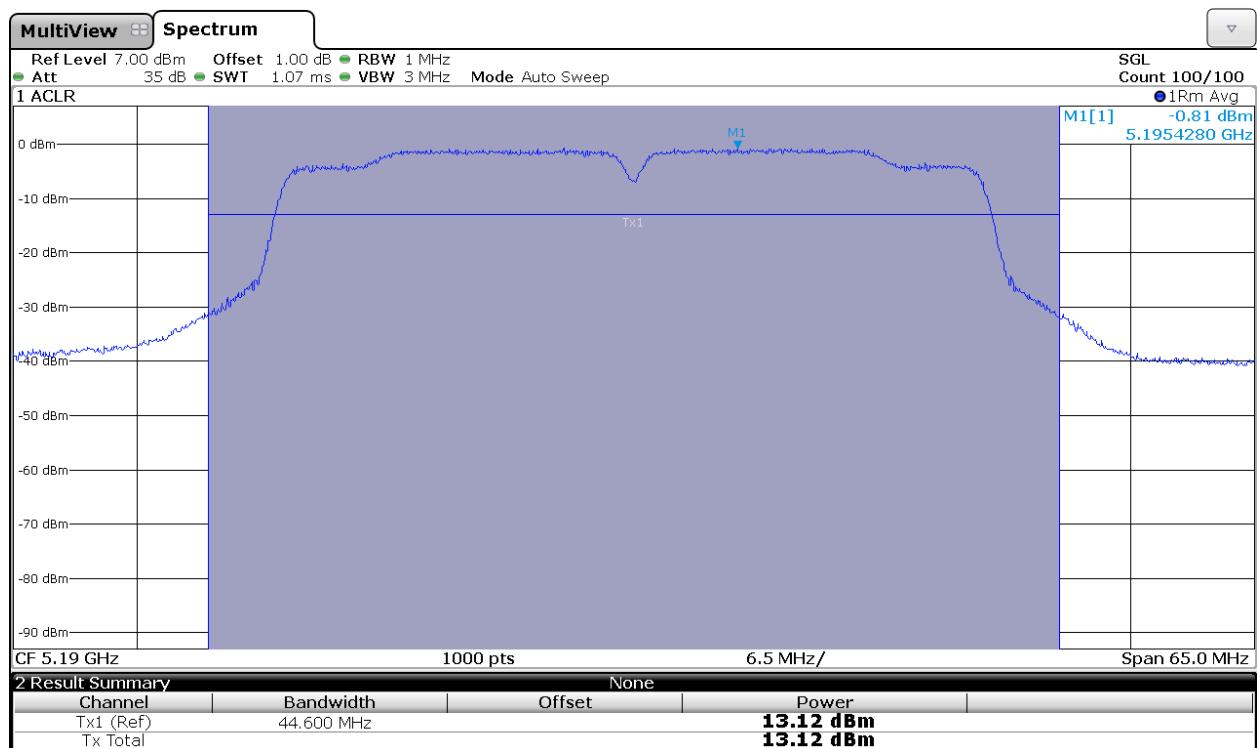


Highest Channel

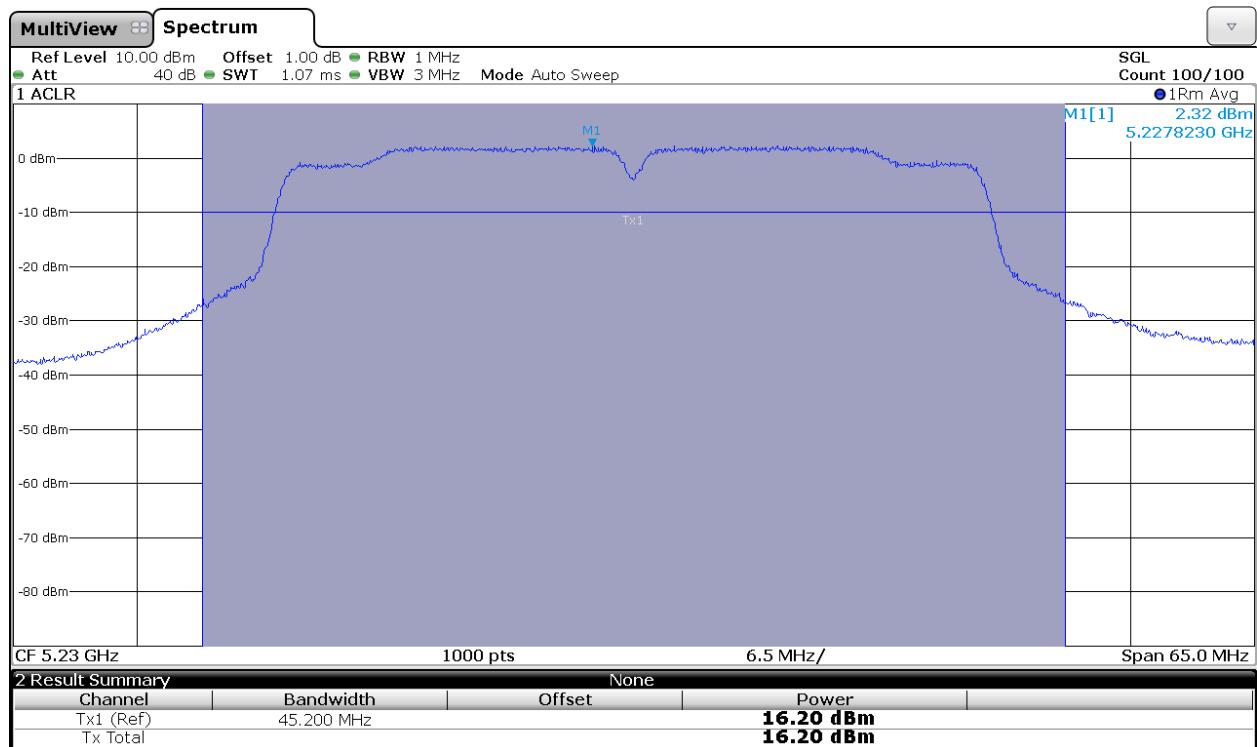


802.11 n40 MHz and 802.11 ac 40 MHz modes MIMO CHAIN A+B


Lowest Channel. Chain A

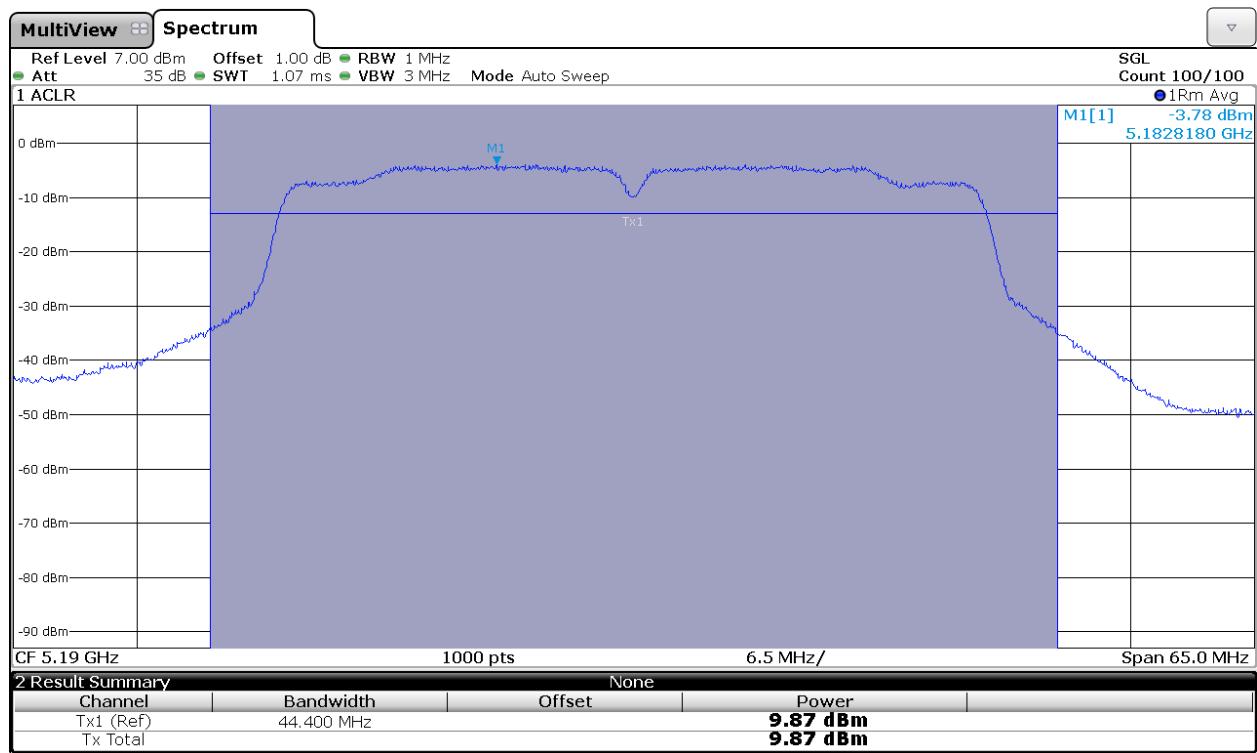


Lowest Channel. Chain B.

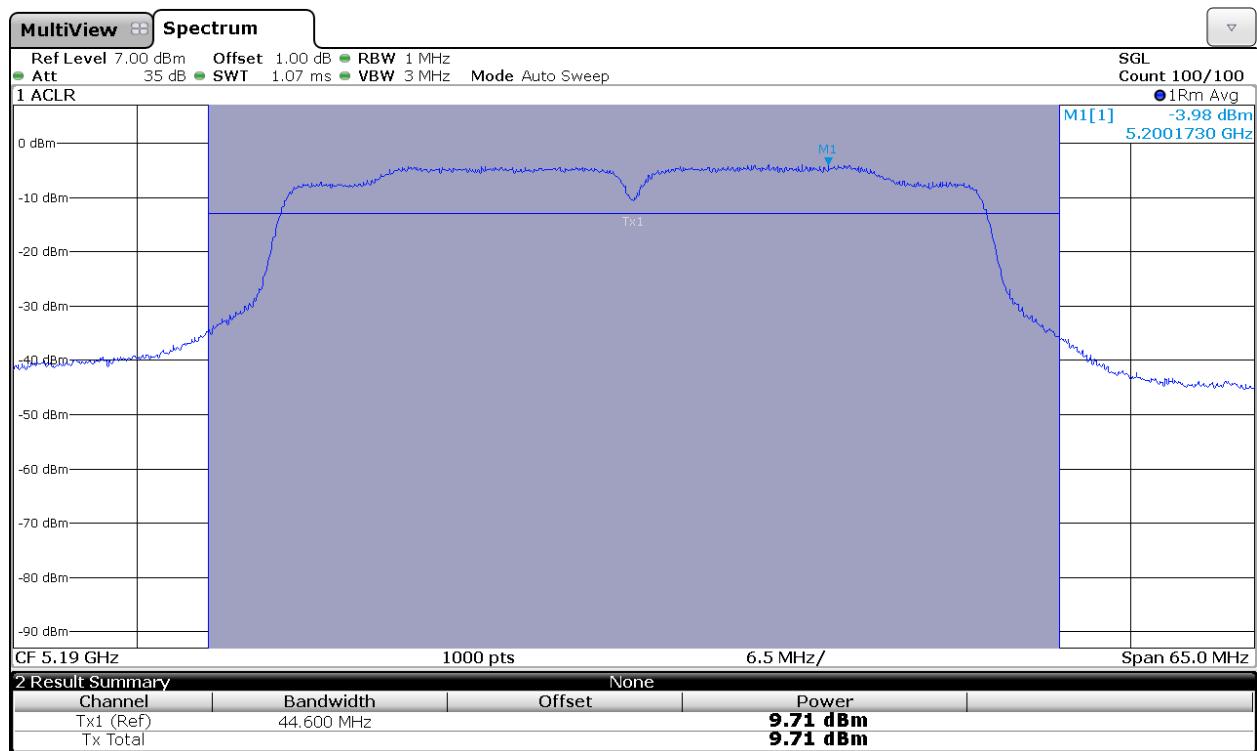


Highest Channel. Chain A.

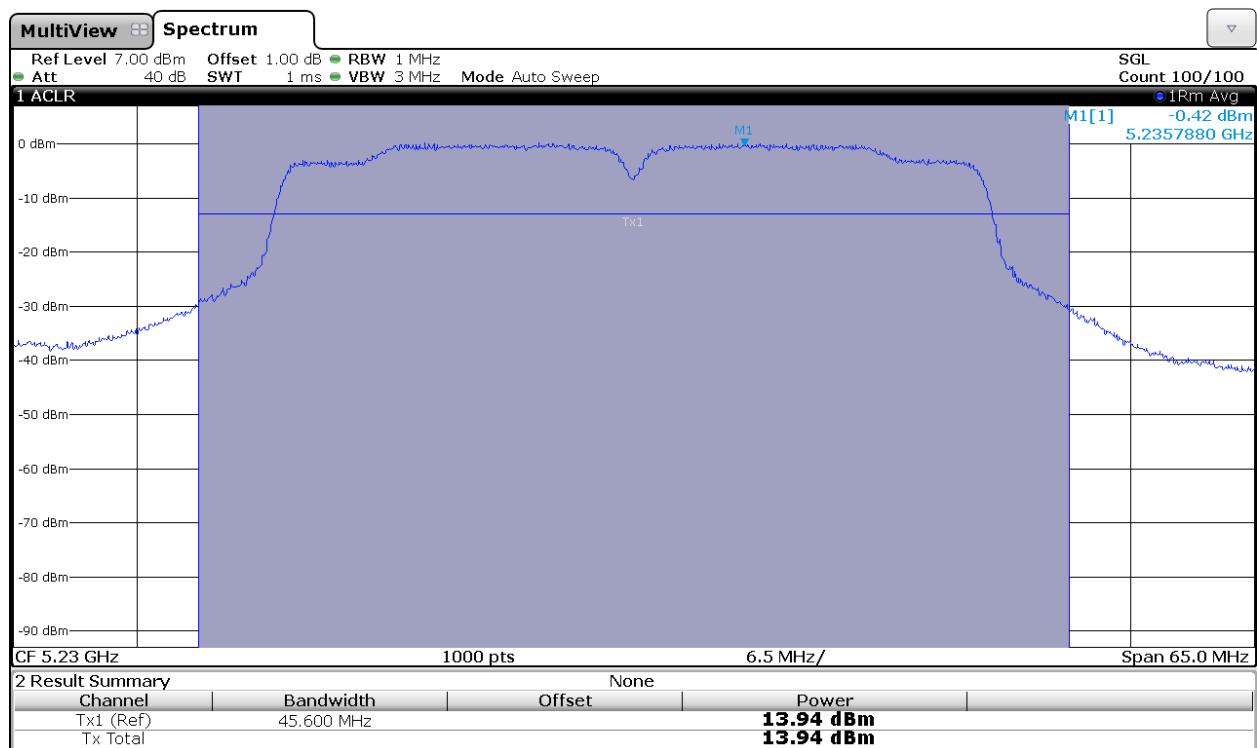


Highest Channel. Chain B.

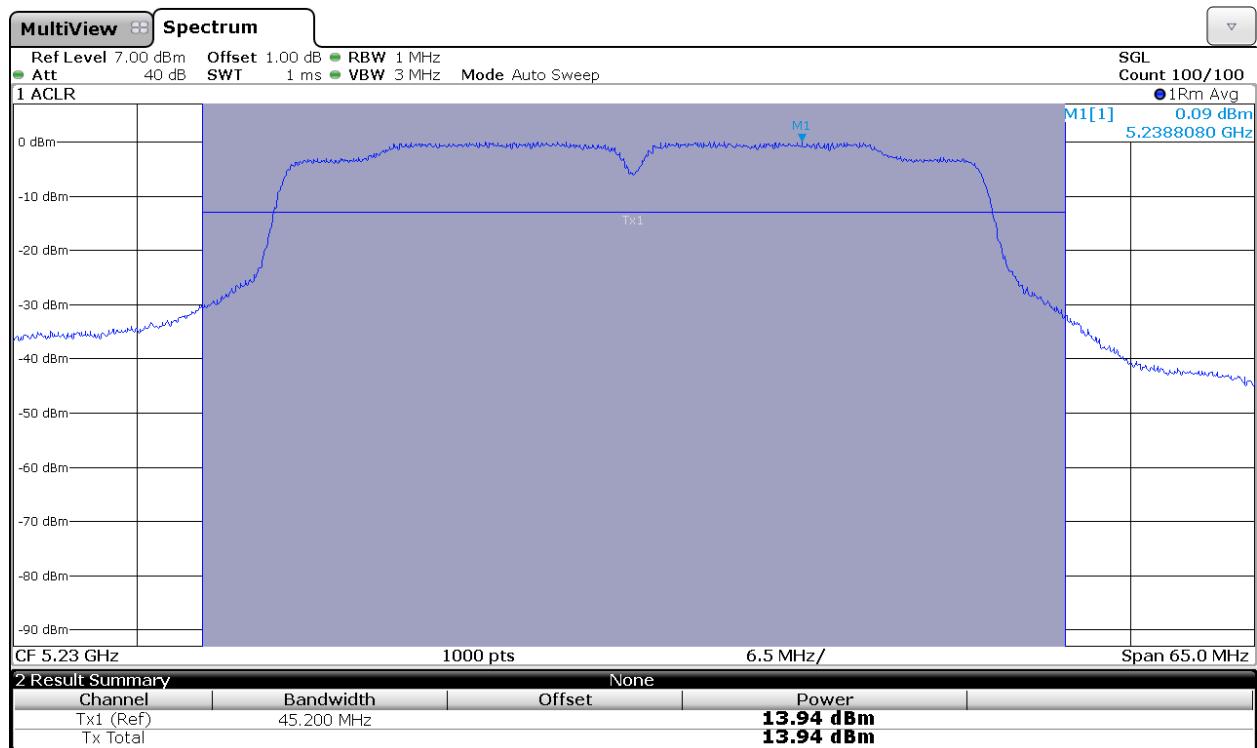

802.11 ac 80 MHz mode CHAIN A

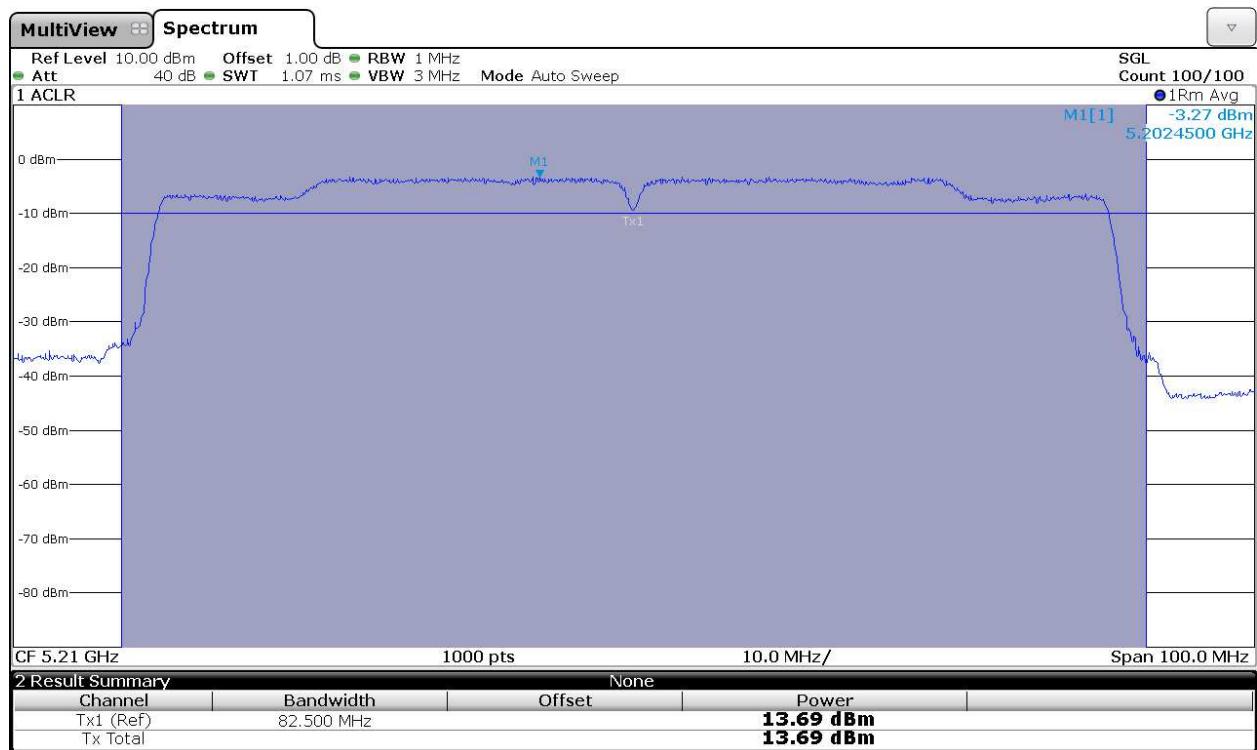


802.11 ac 80 MHz mode CHAIN B

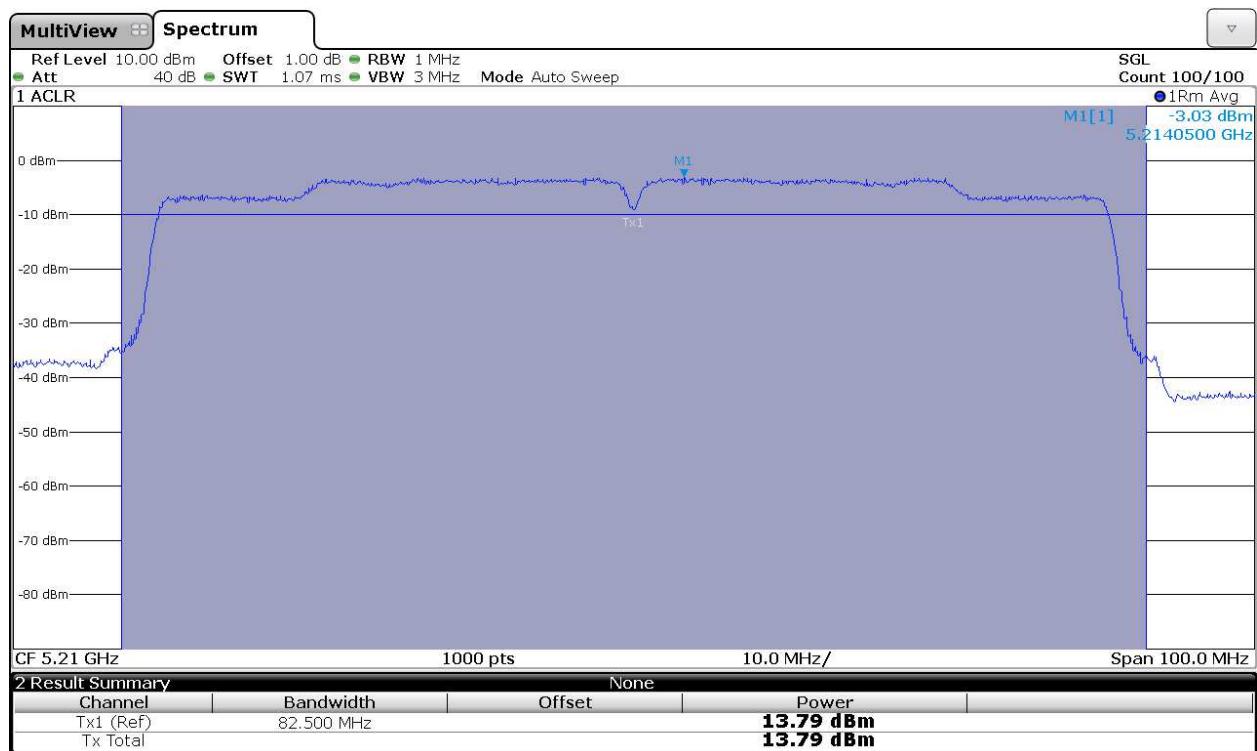


802.11 ac 80 MHz mode MIMO CHAIN A+B

Chain A

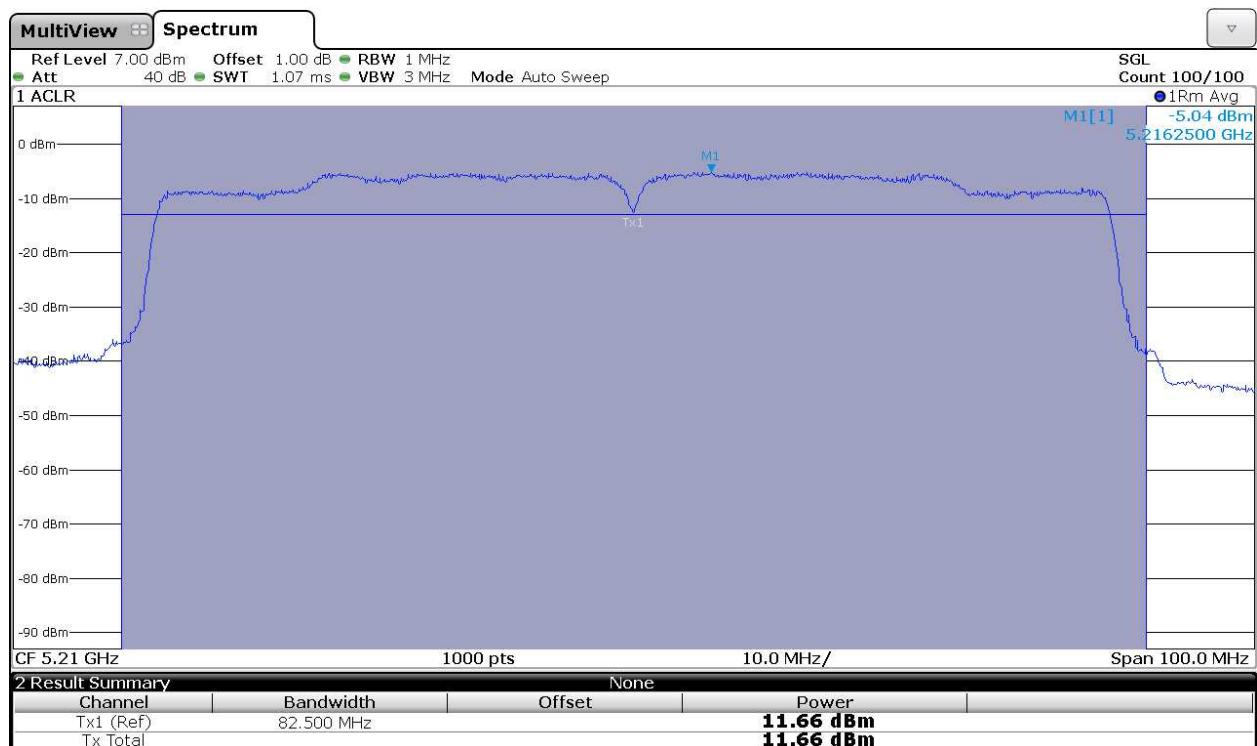

Chain B.

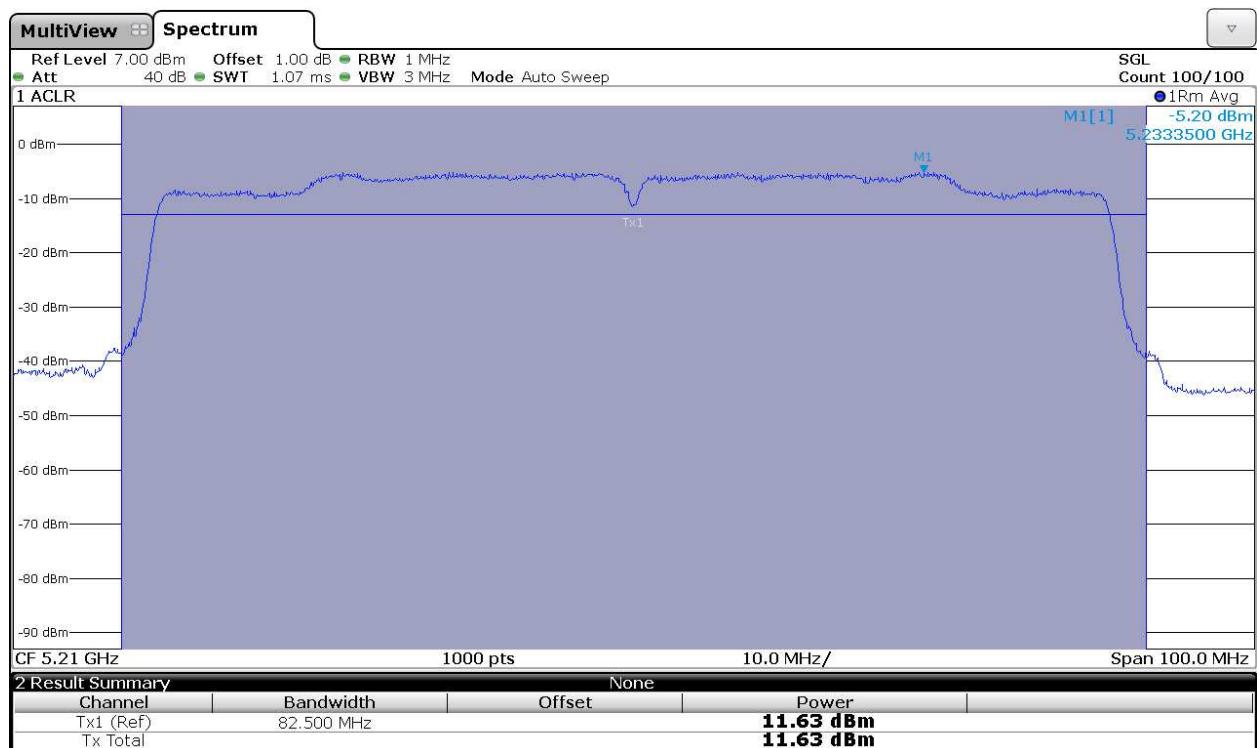

Section 15.407 Subclause (a) (6). Peak excursion ratio of the modulation envelope

SPECIFICATION

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

The peak excursion was measured using the method according to point F) of Guidance 789033 D01.

1. 802.11a mode (see next plots).

CHAIN A

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5200 MHz	13.02	3.87	9.15

CHAIN B

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5200 MHz	13.51	3.96	9.55

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

2. 802.11 n20 MHz and 802.11 ac 20 MHz modes. (see next plots).

Note: the test was performed with 802.11 n20 MHz mode which is the same modulation scheme as 802.11 ac 20 MHz.

CHAIN A

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5200 MHz	12.67	3.94	8.73

CHAIN B

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5200 MHz	13.54	3.91	9.63

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

3. 802.11 n40 MHz and 802.11 ac 40 MHz modes. (see next plots).

Note: the test was performed with 802.11 n40 MHz mode which is the same modulation scheme as 802.11 ac 40 MHz.

CHAIN A

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5230 MHz	11.69	2.42	9.27

CHAIN B

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5230 MHz	11.52	2.32	9.20

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

4. 802.11 ac 80 MHz mode. (see next plots).

CHAIN A

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5210 MHz	6.38	-3.27	9.65


CHAIN B

Frequency	Peak of spectrum (dBm)	Measured PPSD/MHz (dBm)	Peak excursion (dB)
5210 MHz	6.81	-3.03	9.84


Measurement uncertainty = ± 1.2 dB

Verdict: PASS


802.11a mode CHAIN A

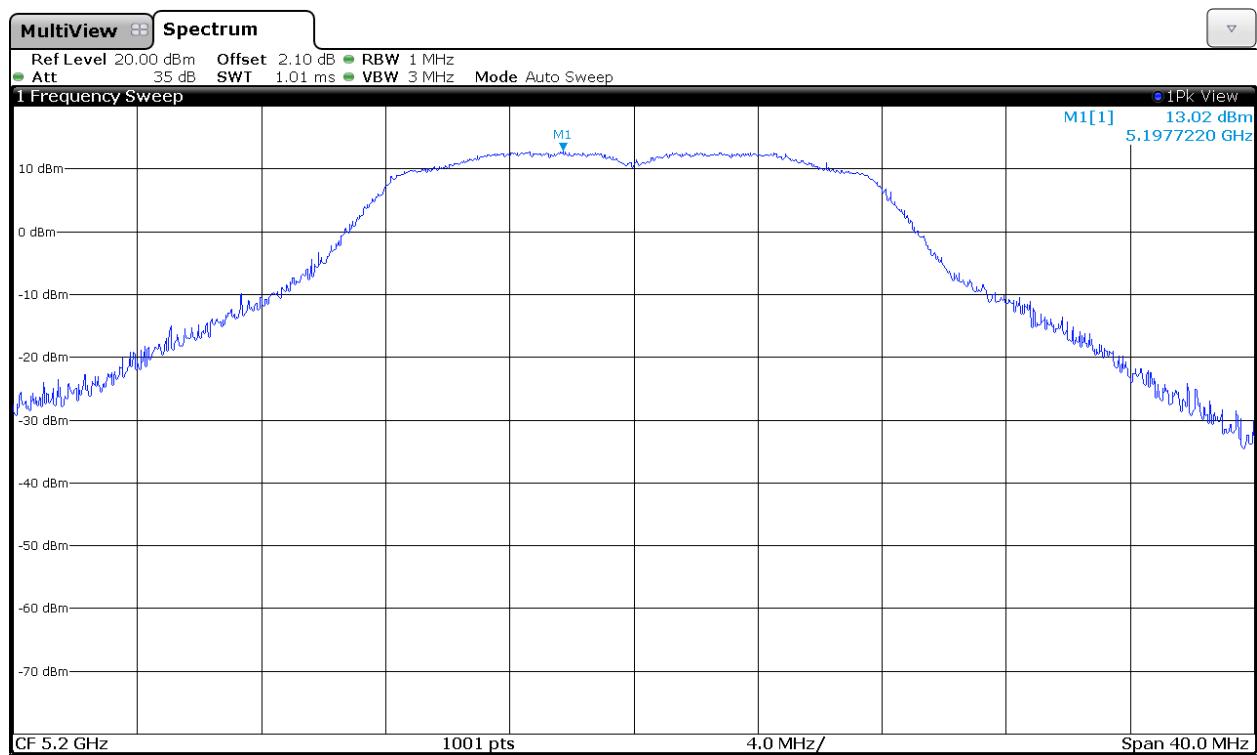


802.11a mode CHAIN B

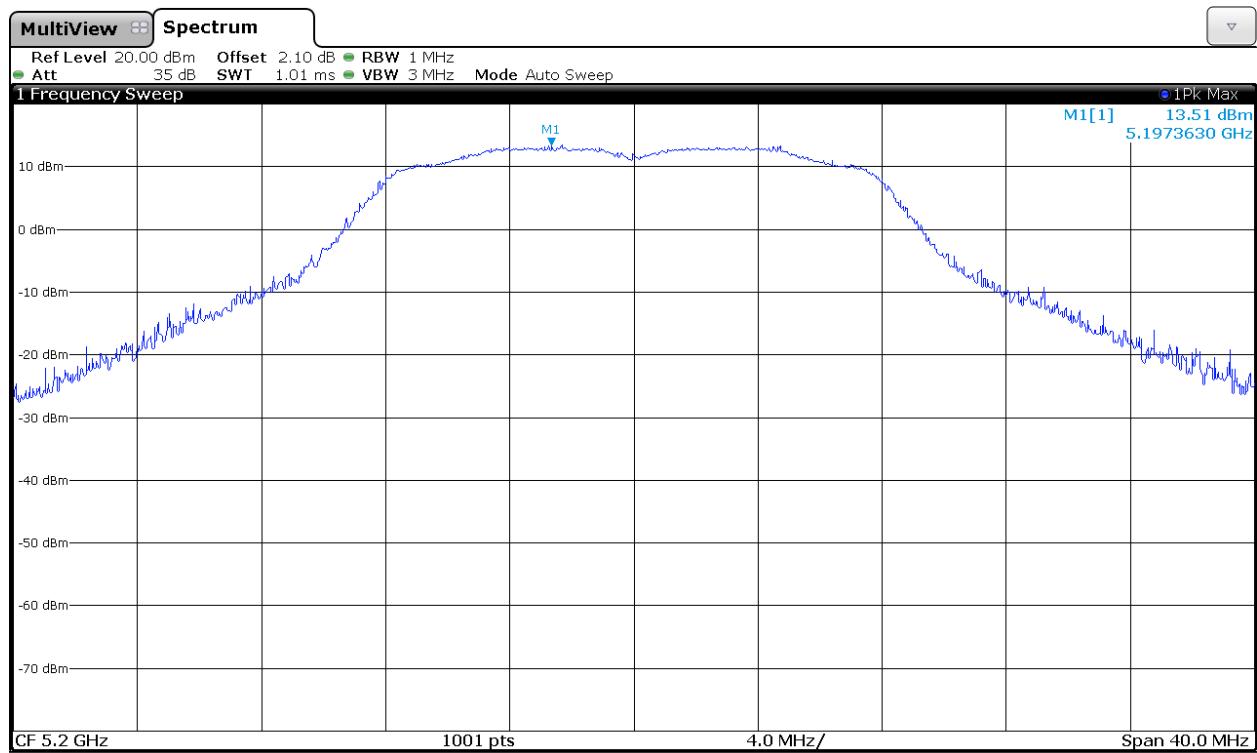


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN A

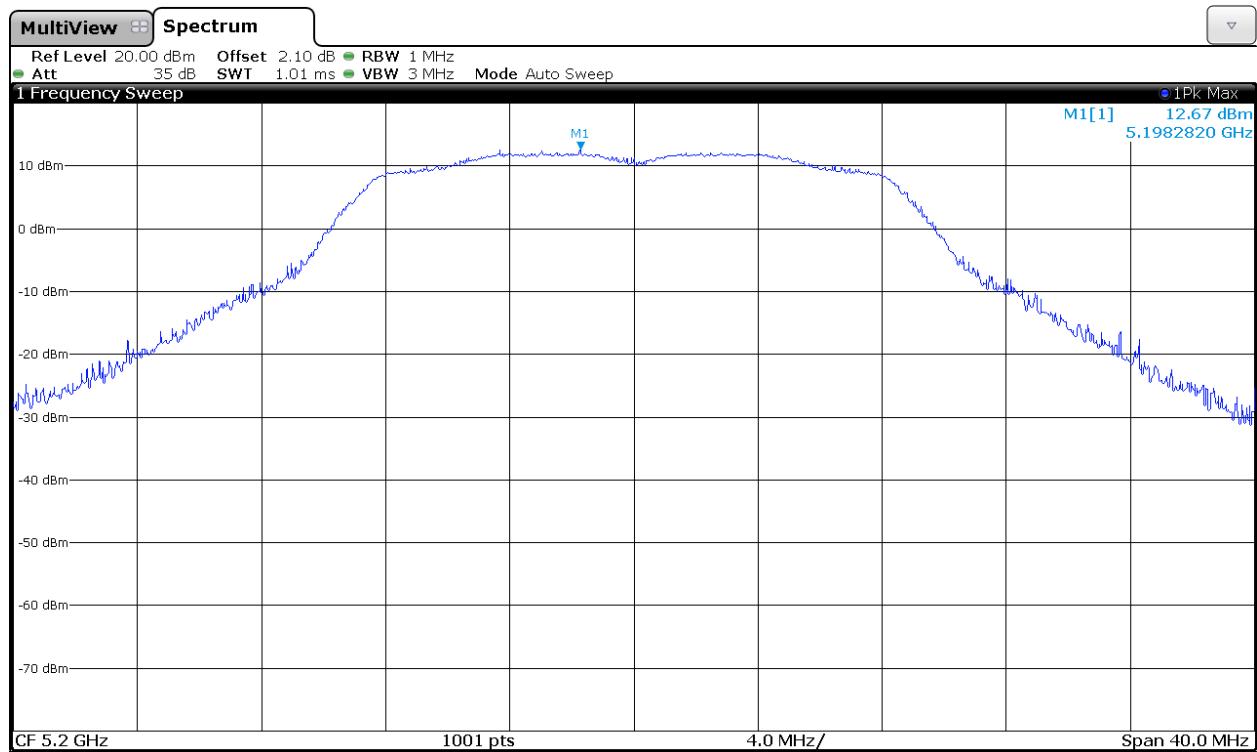


802.11 n20 MHz and 802.11 ac 20 MHz modes CHAIN B

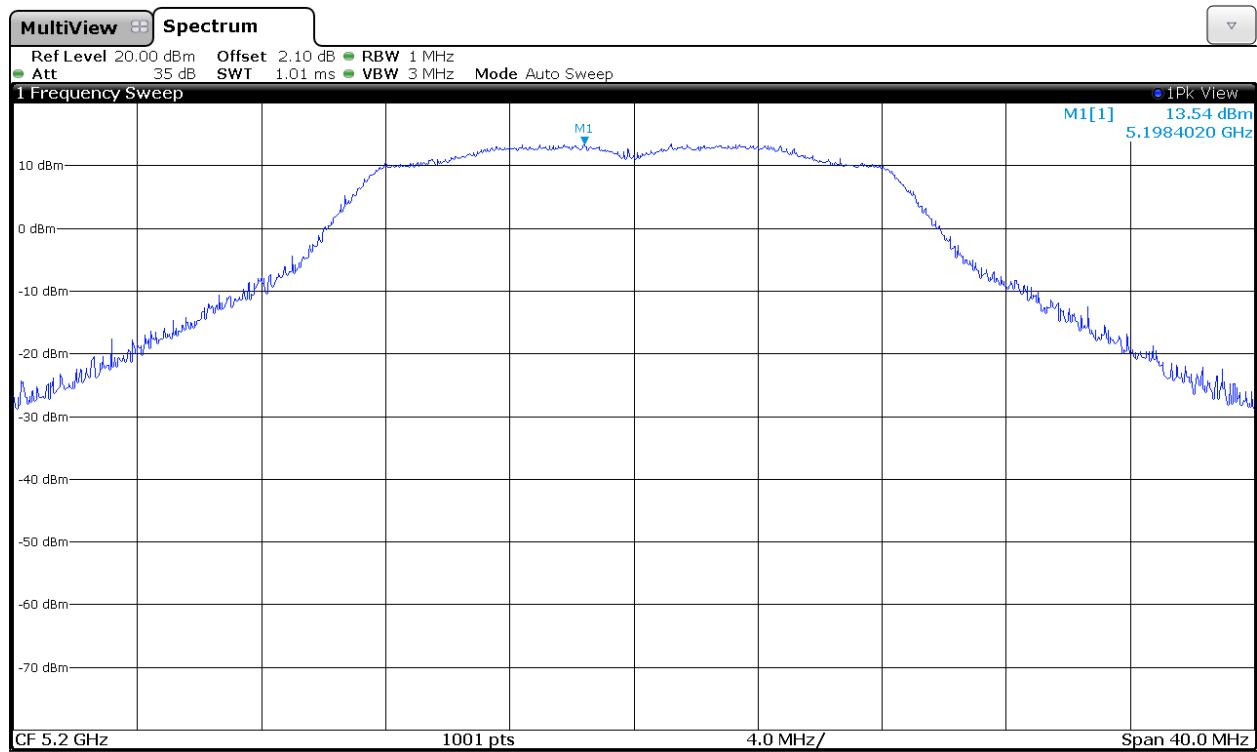


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN A

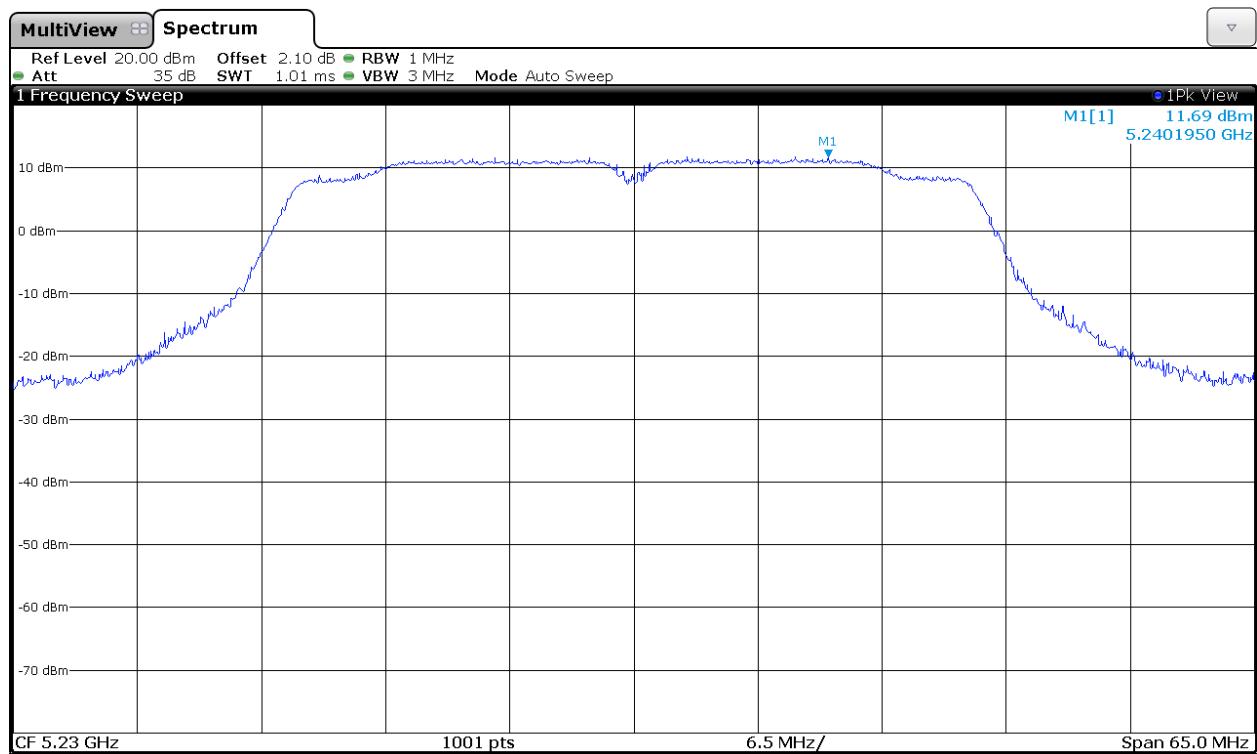


802.11 n40 MHz and 802.11 ac 40 MHz modes CHAIN B

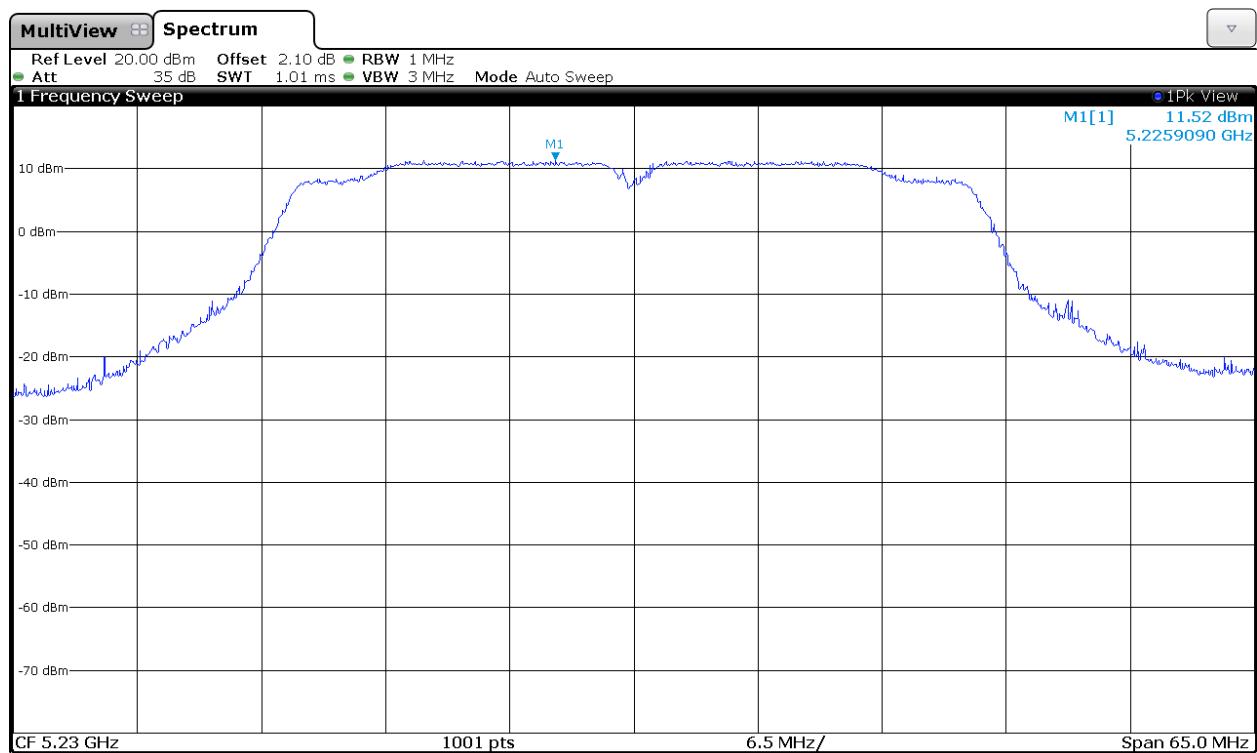

802.11 ac 80 MHz mode CHAIN A

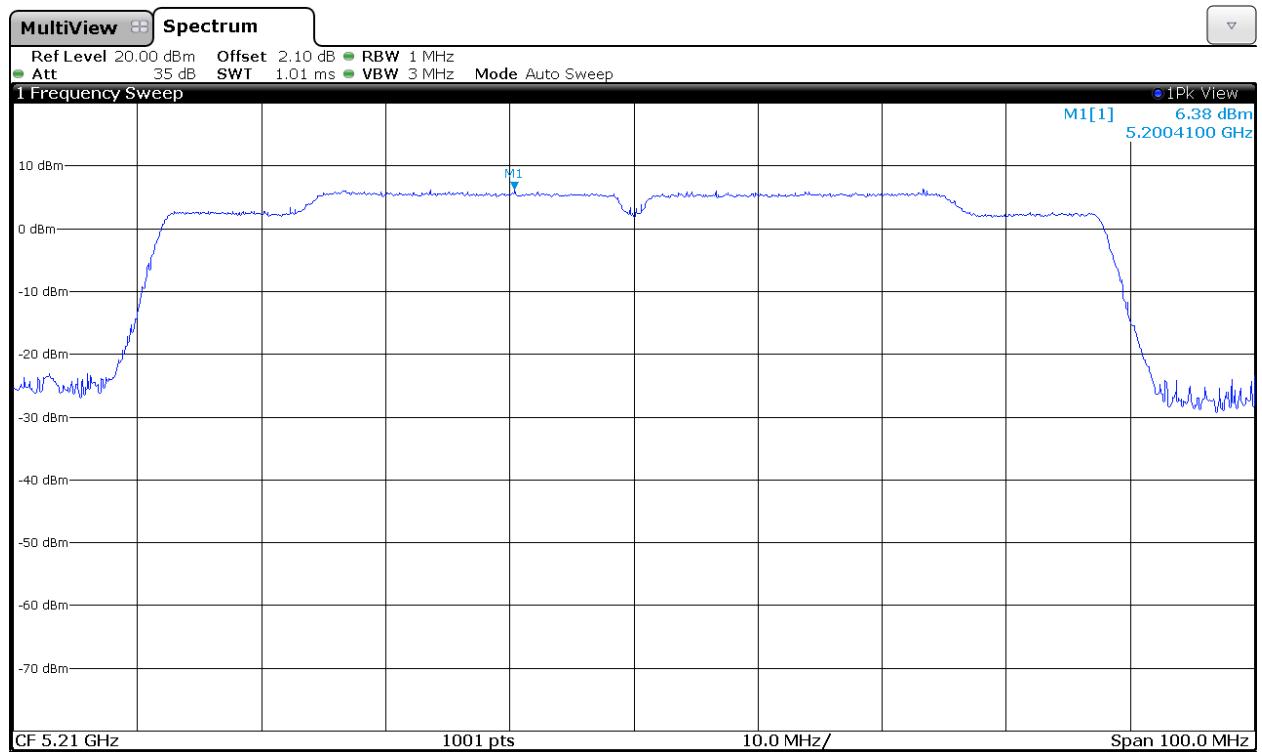

802.11 ac 80 MHz mode CHAIN B

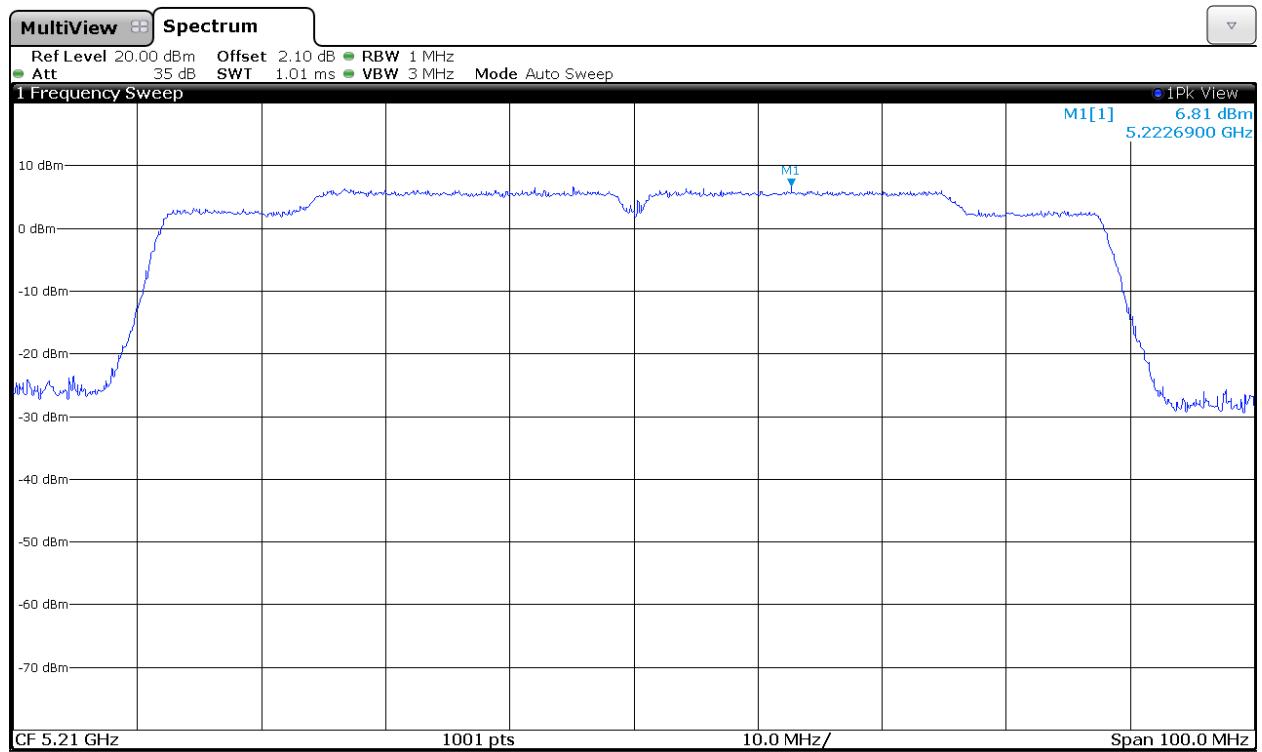

**Section 15.407 Subclause (b) (1) / RSS-210 A.9.2. (1). Undesirable radiated emissions
(Transmitter) 1 to 40 GHz**

SPECIFICATION

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.23 dB μ V/m at 3 m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 1m for the frequency range 1 GHz-40 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

Frequency range 30 MHz-1 GHz

The spurious signals detected do not depend on either the operating channel or the modulation mode.

Spurious levels closest to limit:

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
158.04	PV	Quasi-Peak	28.16	\pm 4.12
257.95	PV	Quasi-Peak	25.83	\pm 4.12
340.40	PV	Quasi-Peak	32.06	\pm 4.12
484.93	PV	Quasi-Peak	30.53	\pm 4.12

Frequency range 1 GHz-40 GHz

The results in the next tables show the maximum measured levels in the 1-40 GHz range including the restricted band 4.5-5.15 GHz (see next plots).

For OFDM modulation modes (802.11a, 802.11n20, 802.11n40 and 802.11ac80), a preliminary measurement in the central channel in the range 1-18 GHz was performed to determine the worst case. The lowest and highest channels were measured for out-of-band emissions for the worst case (802.11a).

The field strength at the band edges was evaluated for each mode and on each chain individually on the lowest and highest channels at the rated power for the channel under test. Where the power at the edge channels was lower than the power at the center channels additional measurements were made at the adjacent channels. Single transmission at each chain and simultaneous transmission at both chains modes were fully evaluated.

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

1. WiFi 5GHz 802.11 a mode

Lowest frequency 5180 MHz. Out-of-band spurious emissions in the 1-40 GHz range and inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14939	V	Peak	55.01	\pm 4.00
		Average	44.26	\pm 4.00
10.36024	V	Peak	49.31	\pm 4.00
15.53920	V	Peak	58.19	\pm 4.00
		Average	48.69	\pm 4.00
20.71950	V	Peak	51.96	\pm 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14874	V	Peak	56.19	\pm 4.00
		Average	44.84	\pm 4.00
15.54084	V	Peak	54.73	\pm 4.00
		Average	45.29	\pm 4.00
20.72050	V	Peak	51.32	\pm 4.00

Middle frequency 5200 MHz. Out-of-band spurious emissions in the 1-40 GHz range and inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14663	V	Peak	53.85	\pm 4.00
10.39981	V	Peak	48.62	\pm 4.00
15.60006	V	Peak	63.55	\pm 4.00
		Average	53.01	\pm 4.00
20.79950	V	Peak	52.41	\pm 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14858	V	Peak	54.77	± 4.00
		Average	44.92	± 4.00
15.59991	V	Peak	60.76	± 4.00
		Average	49.53	± 4.00
20.7995	V	Peak	51.93	± 4.00

Highest frequency 5240 MHz. Out-of-band spurious emissions in the 1-40 GHz range.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
10.47996	V	Peak	50.49	± 4.00
15.71786	V	Peak	65.11	± 4.00
		Average	53.42	± 4.00
20.95950	V	Peak	51.46	± 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
15.72092	V	Peak	60.32	± 4.00
		Average	49.83	± 4.00
20.95950	V	Peak	50.53	± 4.00

Verdict: PASS

2. WiFi 5GHz 802.11 n20 mode

Lowest frequency 5180 MHz. Spurious emissions inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14907	V	Peak	54.77	± 4.00
		Average	44.33	± 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14915	V	Peak	55.10	± 4.00
		Average	45.14	± 4.00

Chain A+B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14703	V	Peak	56.74	± 4.00
		Average	44.51	± 4.00

Middle frequency 5200 MHz. Out-of-band spurious emissions in the 1-40 GHz range and inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14996	V	Peak	55.22	± 4.00
		Average	44.23	± 4.00
10.40025	V	Peak	48.77	± 4.00
15.60072	V	Peak	61.21	± 4.00
		Average	52.68	± 4.00
20.79950	V	Peak	52.36	± 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14638	V	Peak	54.98	± 4.00
		Average	44.94	± 4.00
15.60037	V	Peak	59.61	± 4.00
		Average	49.42	± 4.00
20.80050	V	Peak	51.61	± 4.00

Chain A+B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14671	V	Peak	56.50	± 4.00
		Average	44.31	± 4.00
15.59902	V	Peak	59.36	± 4.00
		Average	49.52	± 4.00
20.7995	V	Peak	52.08	± 4.00

Verdict: PASS

3. WiFi 5GHz 802.11 n40 mode

Lowest frequency 5190 MHz. Spurious emissions inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14955	V	Peak	57.42	± 4.00
		Average	47.18	± 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14866	V	Peak	56.98	± 4.00
		Average	48.66	± 4.00

Chain A+B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14963	V	Peak	55.23	± 4.00
		Average	45.27	± 4.00

Highest frequency 5230 MHz. Out-of-band spurious emissions in the 1-40 GHz range and inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14907	V	Peak	56.91	\pm 4.00
		Average	47.17	\pm 4.00
15.69495	V	Peak	61.61	\pm 4.00
		Average	52.15	\pm 4.00
20.91950	V	Peak	51.75	\pm 4.00

Chain B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14996	V	Peak	56.93	\pm 4.00
		Average	46.49	\pm 4.00
15.69977	V	Peak	57.70	\pm 4.00
		Average	47.34	\pm 4.00
20.91950	V	Peak	51.04	\pm 4.00

Chain A+B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14809	V	Peak	55.37	\pm 4.00
		Average	43.52	\pm 4.00
10.46020	V	Peak	49.01	\pm 4.00
15.69070	V	Peak	58.43	\pm 4.00
		Average	47.44	\pm 4.00
20.92050	V	Peak	52.10	\pm 4.00

Verdict: PASS

4. WiFi 5GHz 802.11 ac80 mode

Middle frequency 5210 MHz. Out-of-band spurious emissions in the 1-40 GHz range and inside restricted band 4.5-5.15 GHz.

Chain A

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14809	V	Peak	64.90	\pm 4.00
		Average	52.05	\pm 4.00
15.65629	V	Peak	52.33	\pm 4.00
20.83950	V	Peak	51.00	\pm 4.00

Chain B


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14598	V	Peak	63.12	\pm 4.00
		Average	49.58	\pm 4.00
20.84050	V	Peak	50.54	\pm 4.00

Chain A+B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
5.14200	V	Peak	58.09	\pm 4.00
		Average	47.34	\pm 4.00
20.83950	V	Peak	50.87	\pm 4.00

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

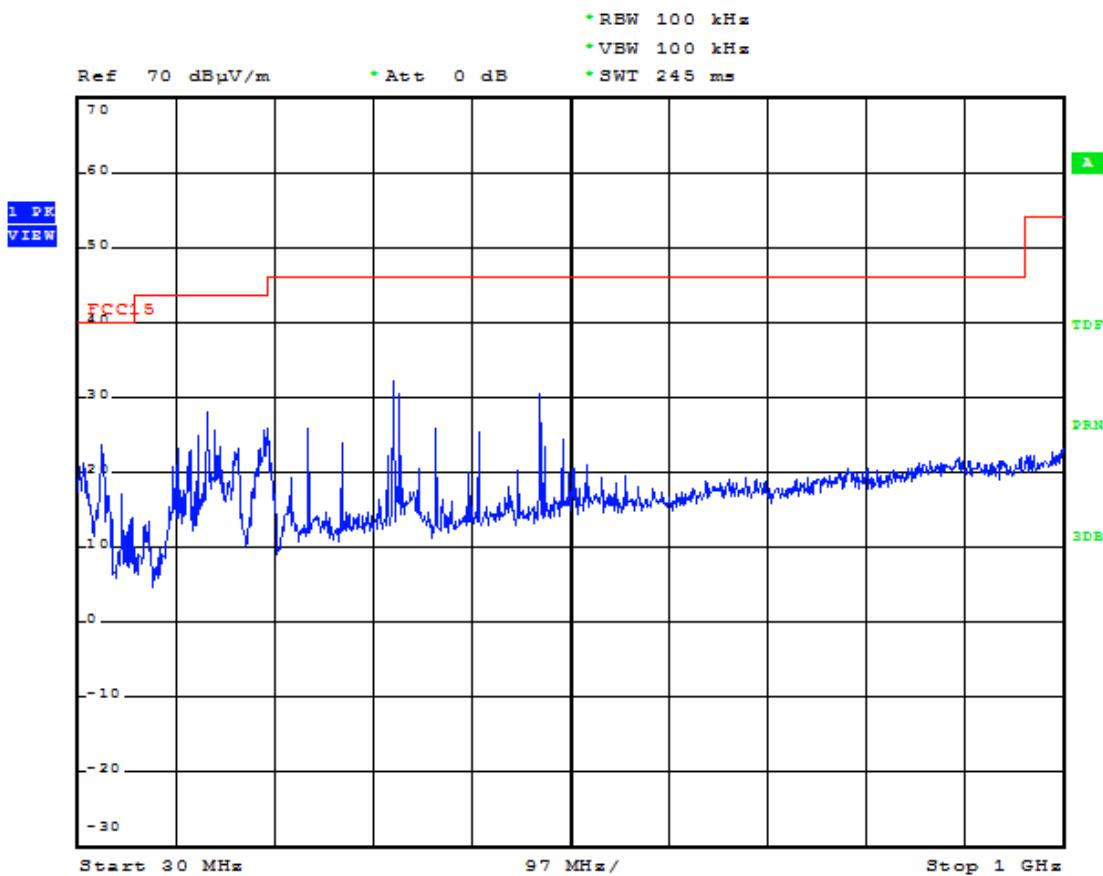


(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 1 GHz to 7 GHz.


1. WiFi 5GHz 802.11 a mode

Lowest frequency 5180 MHz.

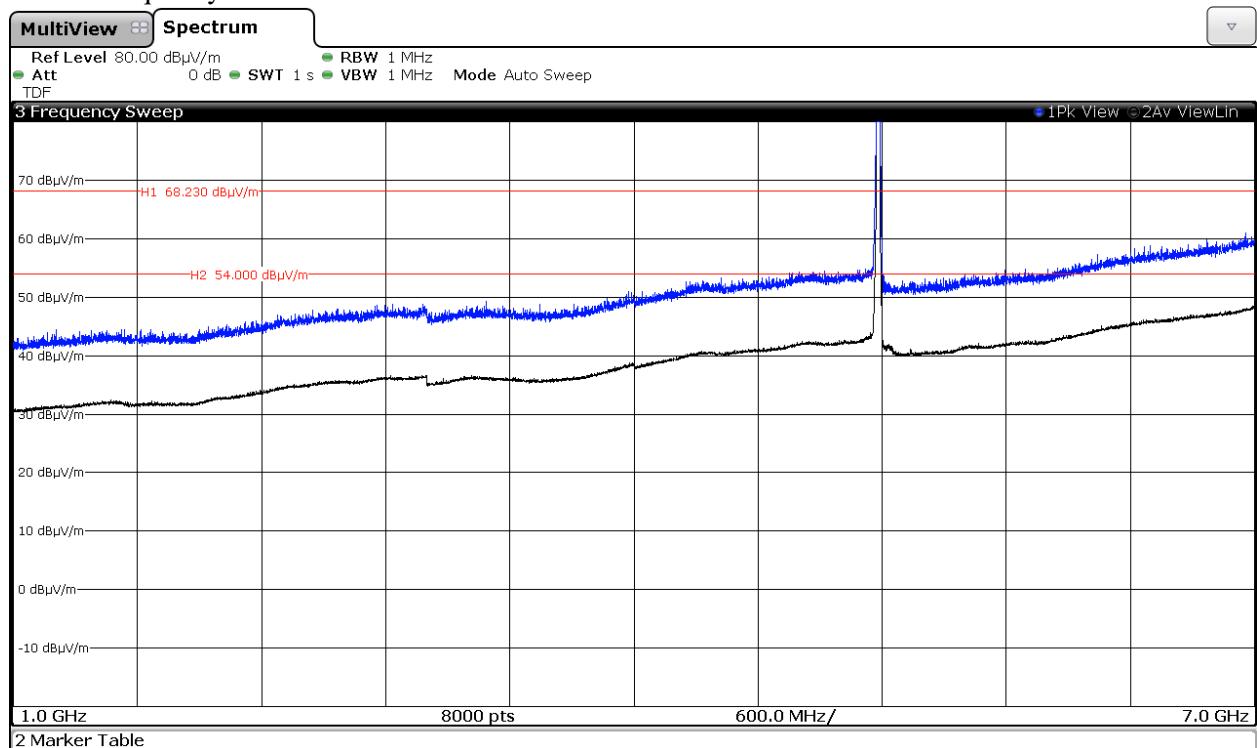


Note: The peak above the limit is the carrier frequency. This plot is valid for both Chain A and Chain B.

Middle frequency 5200 MHz.

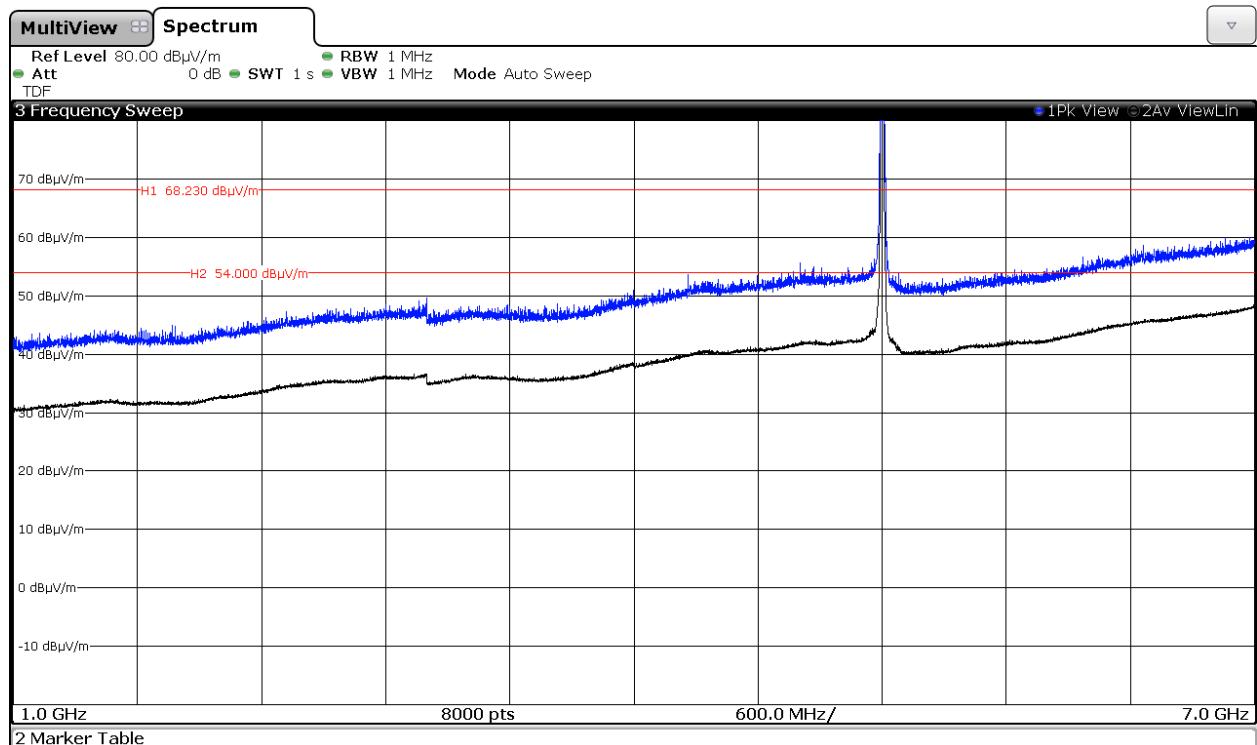

Note: The peak above the limit is the carrier frequency. This plot is valid for both Chain A and Chain B.


Highest frequency 5240 MHz.

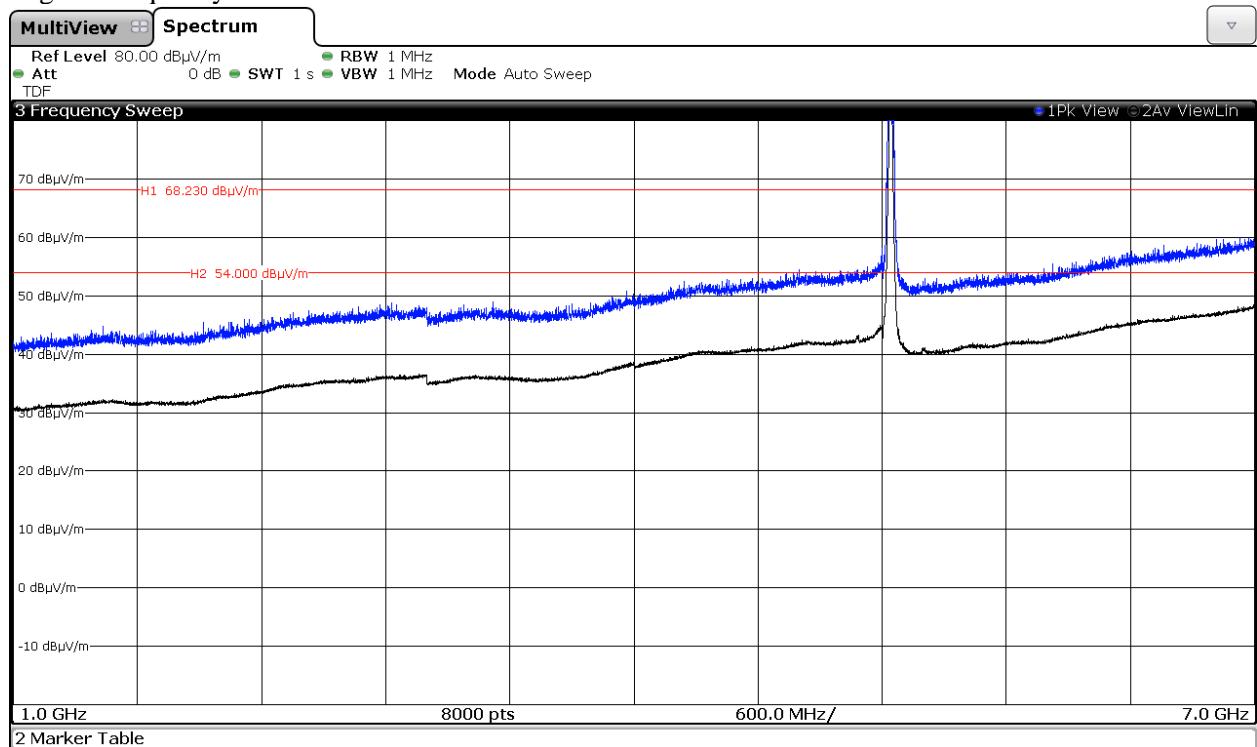

Note: The peak above the limit is the carrier frequency. This plot is valid for both Chain A and Chain B.

2. WiFi 5GHz 802.11 n20 mode


Middle frequency 5200 MHz.

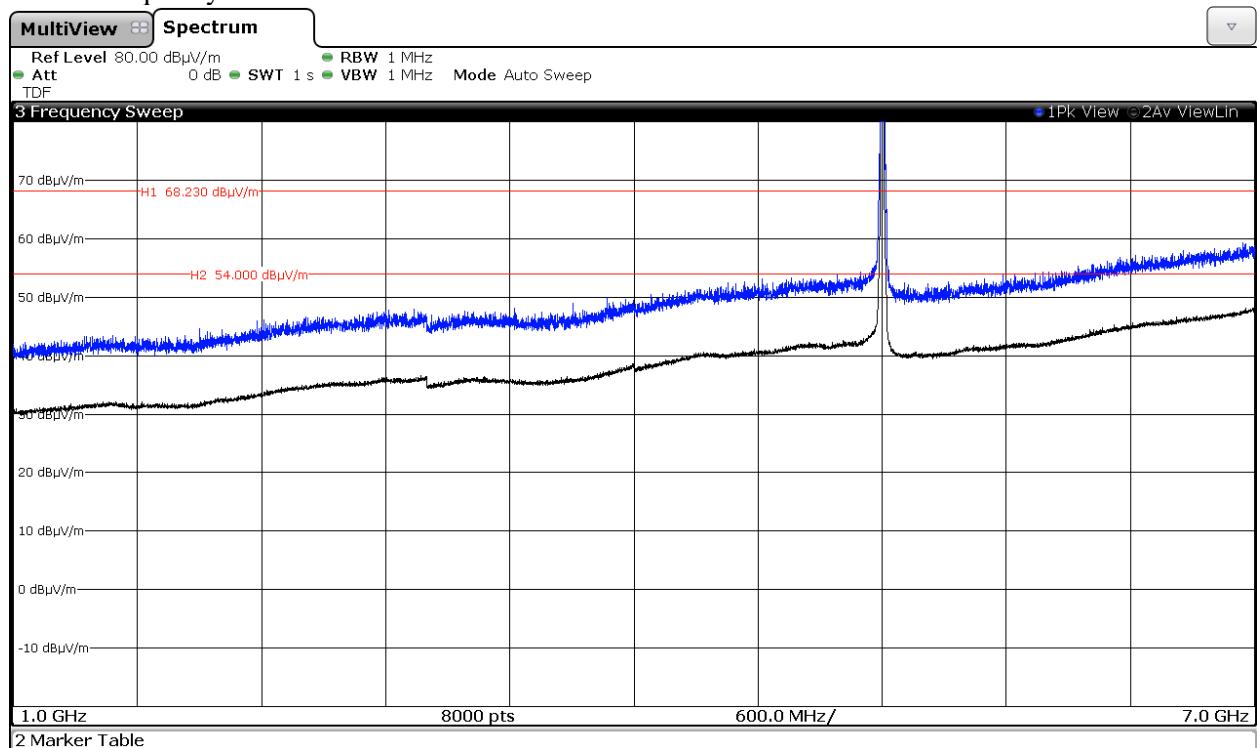

The peak above the limit is the carrier frequency. This plot is valid for Chain A, Chain B, Chain A+B.

3. WiFi 5GHz 802.11 n40 mode


Highest frequency 5230 MHz.

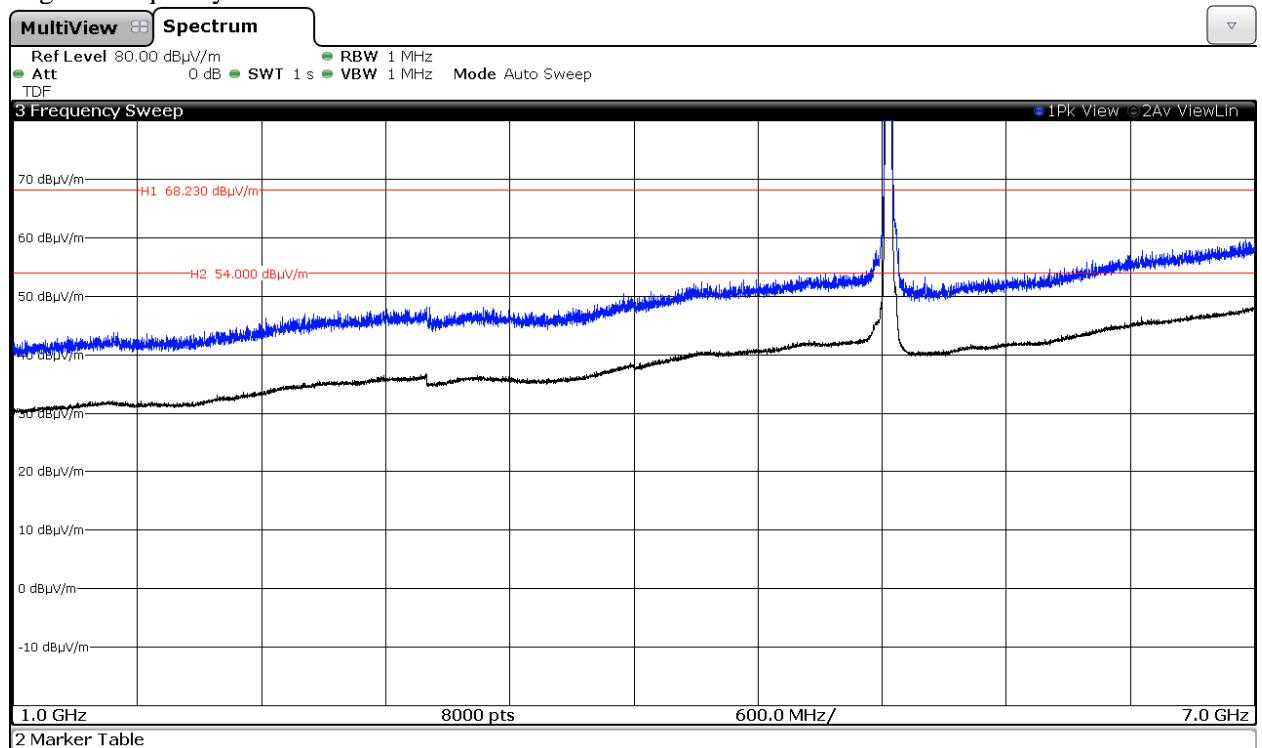

The peak above the limit is the carrier frequency. This plot is valid for Chain A, Chain B, Chain A+B.

4. WiFi 5GHz 802.11 ac80 mode

Middle frequency 5210 MHz.

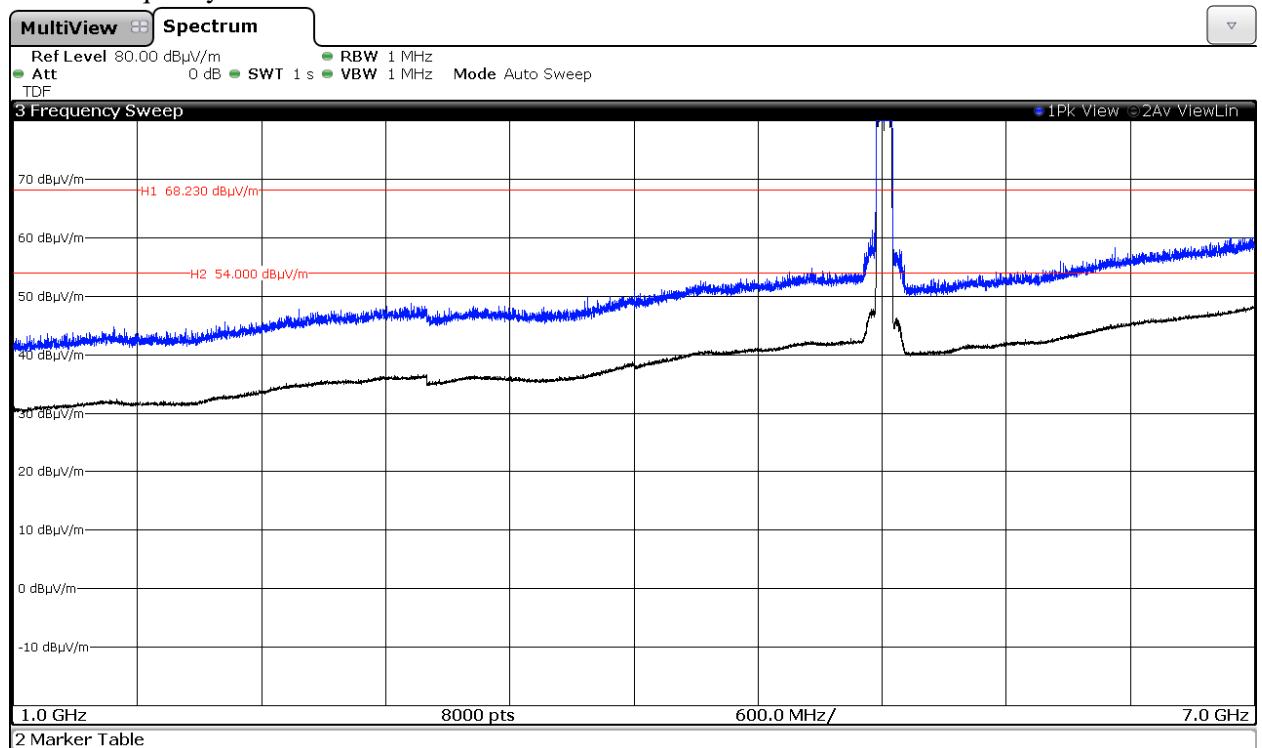


The peak above the limit is the carrier frequency. This plot is valid for Chain A, Chain B, Chain A+B.

FREQUENCY RANGE 7 GHz to 18 GHz.


1. WiFi 5GHz 802.11 a mode

Lowest frequency 5180 MHz.

Chain A

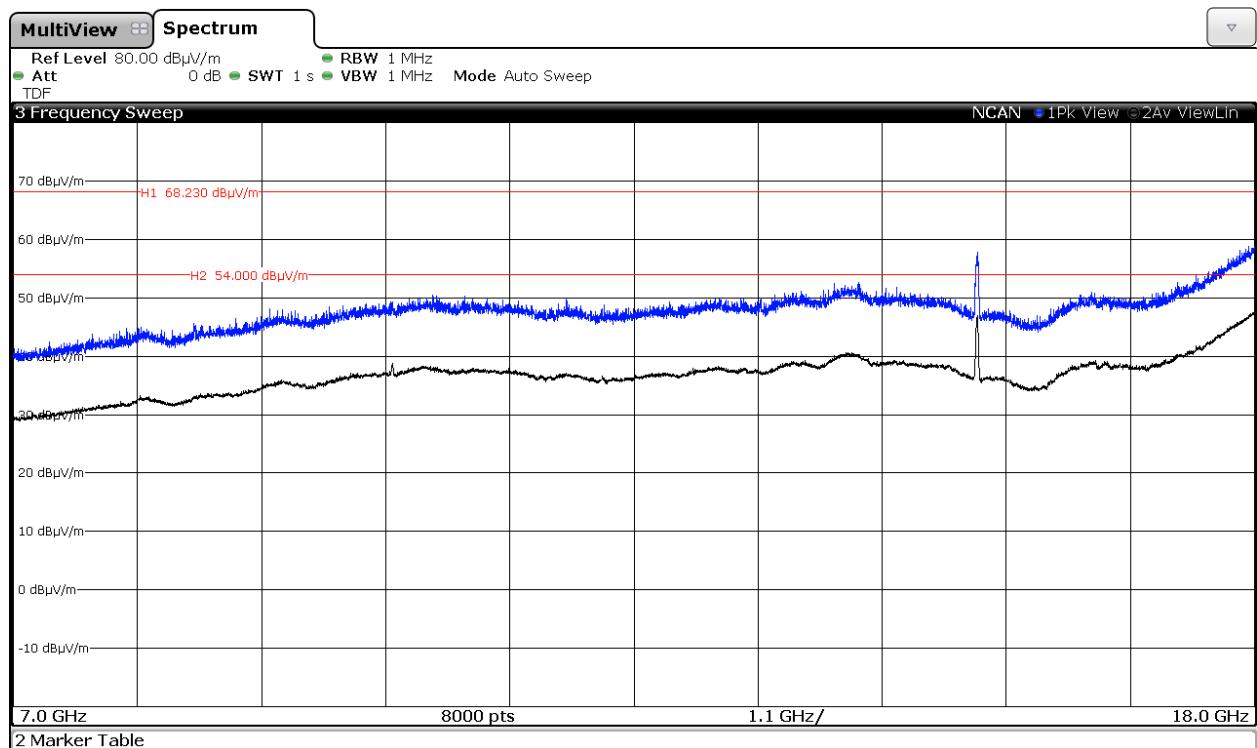


Chain B

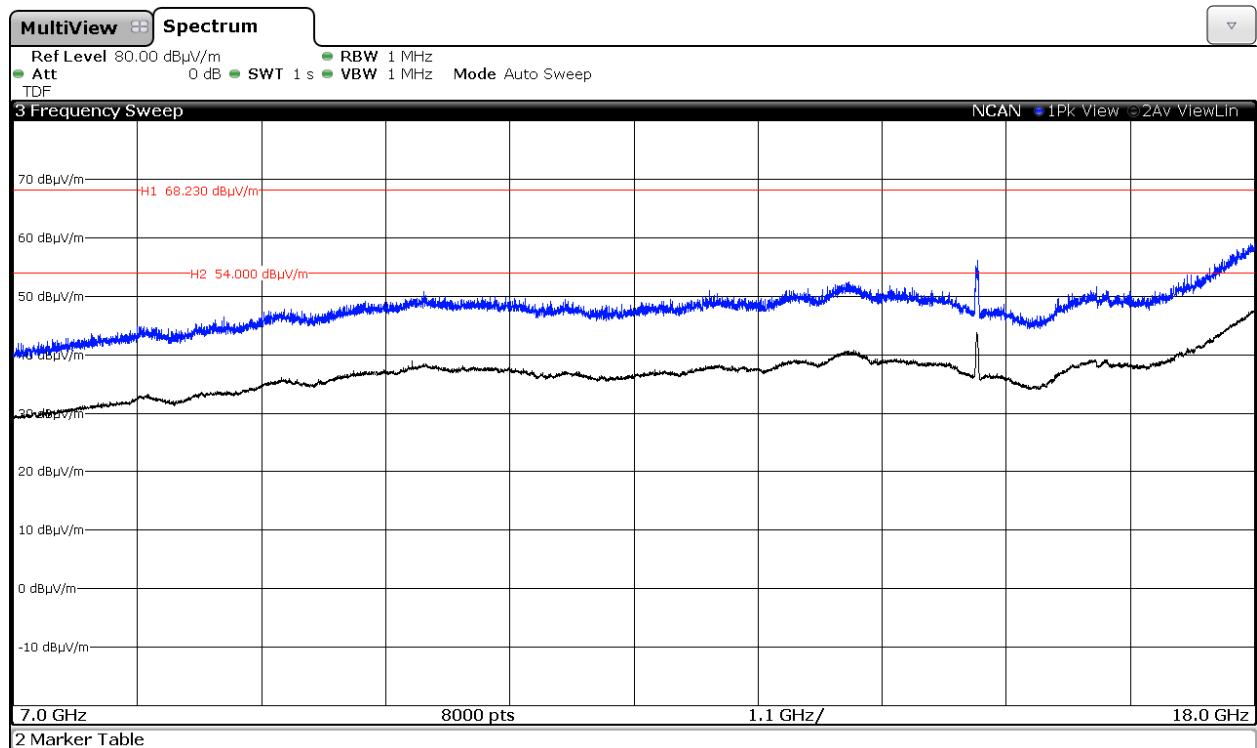


Middle frequency 5200 MHz.

Chain A

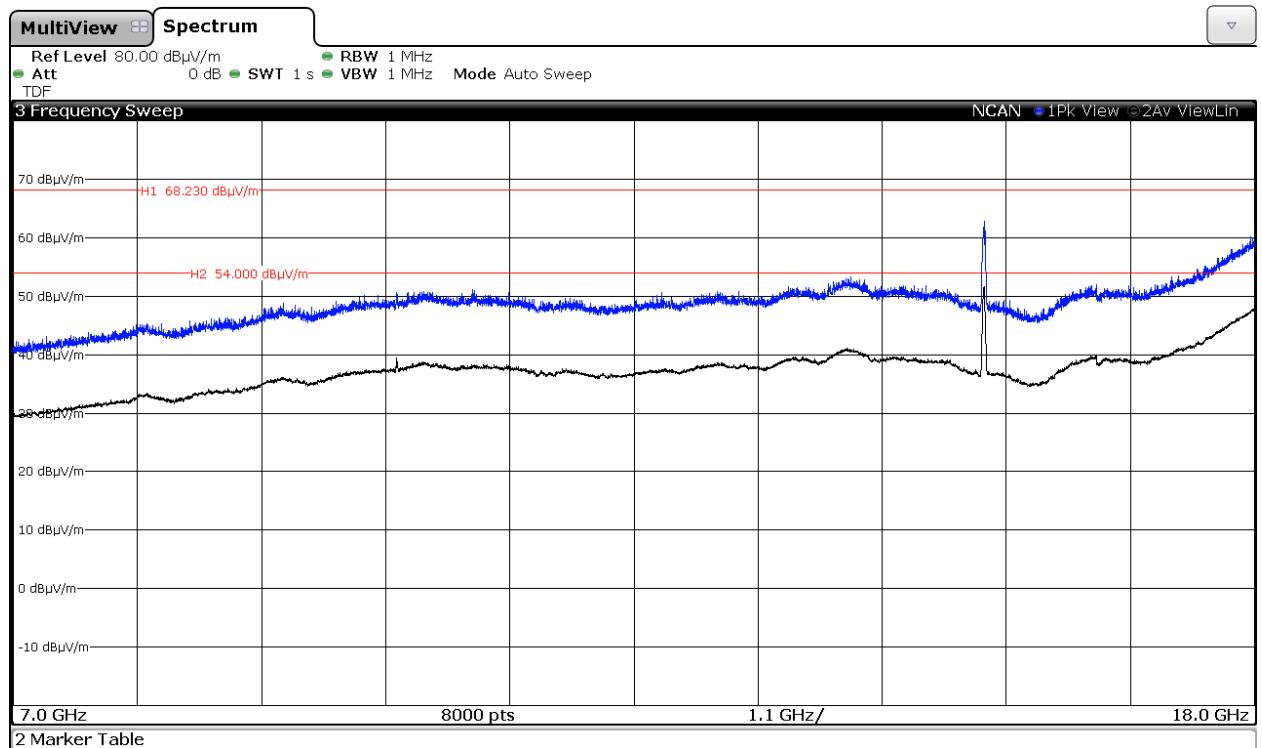


Chain B

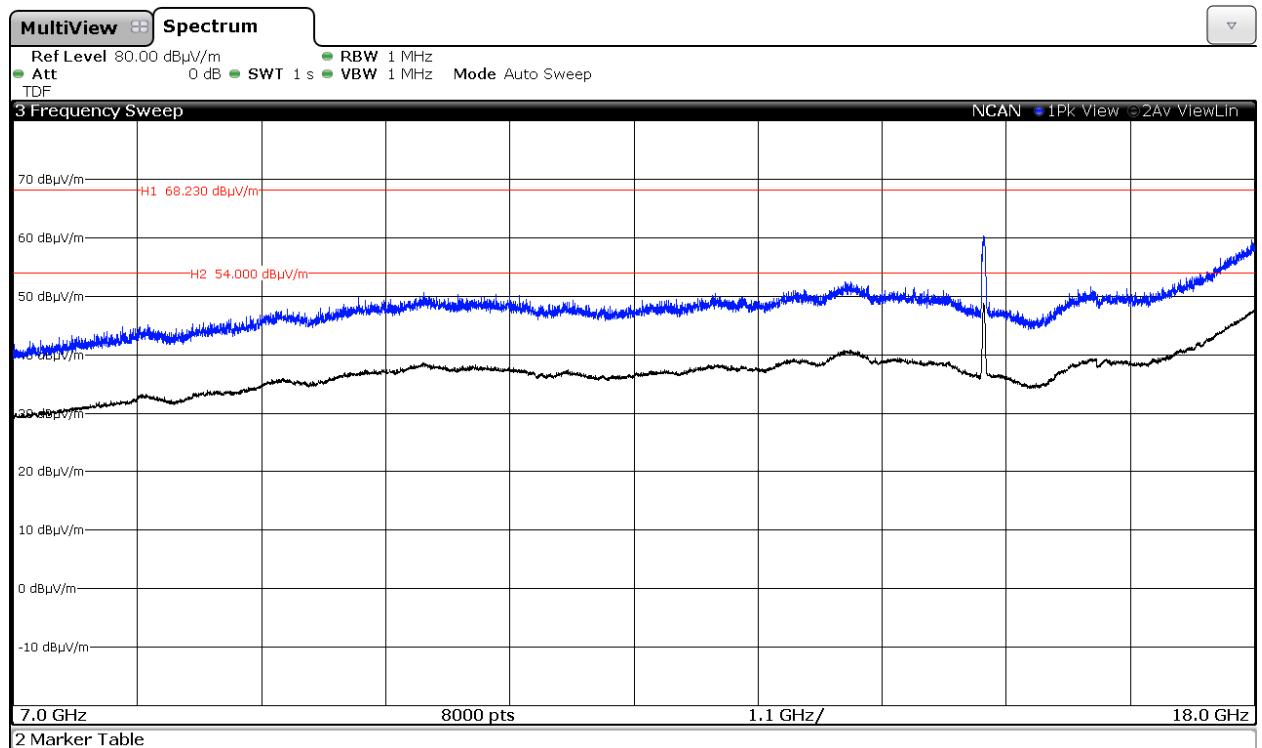


Highest frequency 5240 MHz.

Chain A

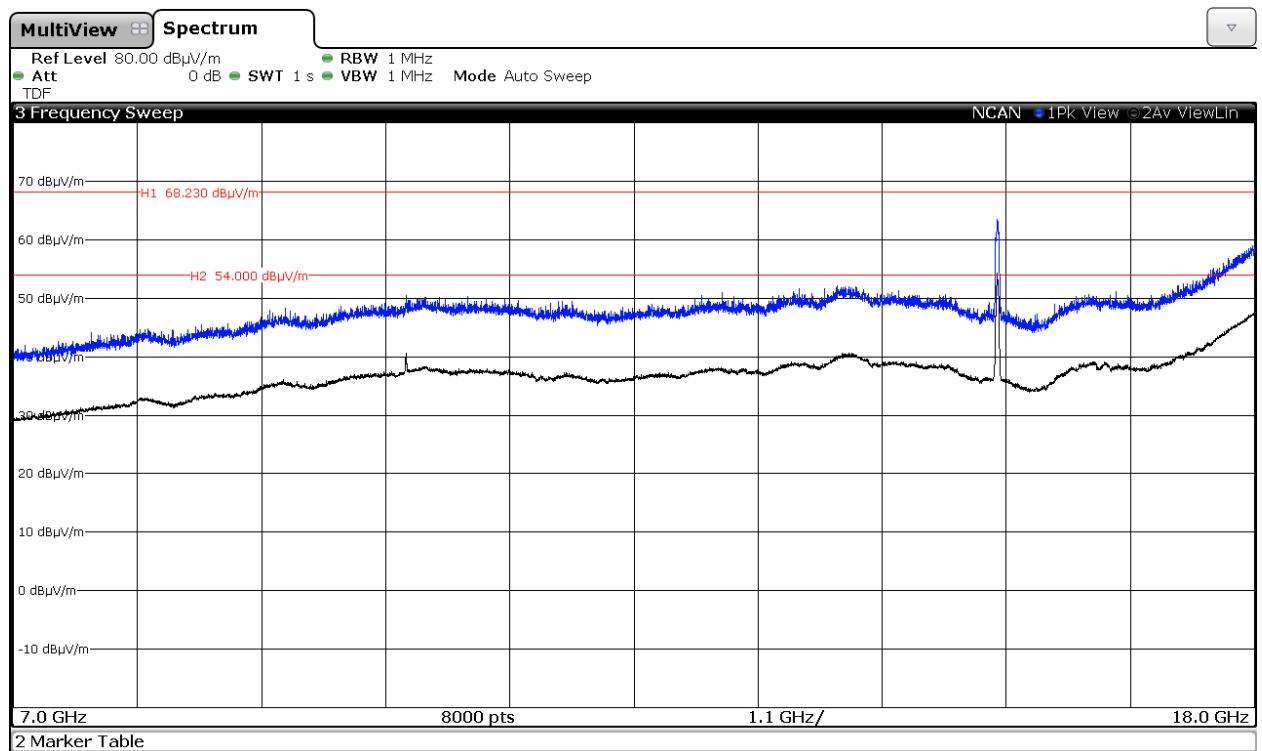


Chain B

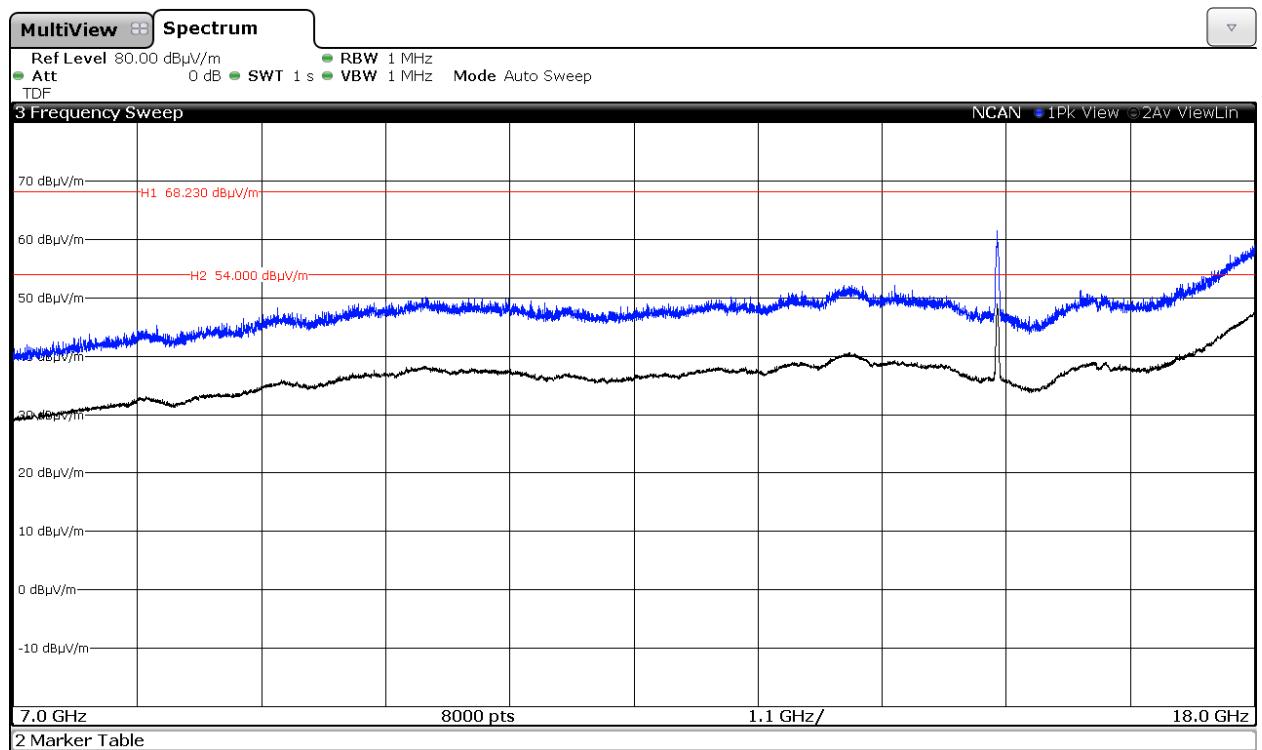


2. WiFi 5GHz 802.11 n20 mode

Middle frequency 5200 MHz.


Chain A

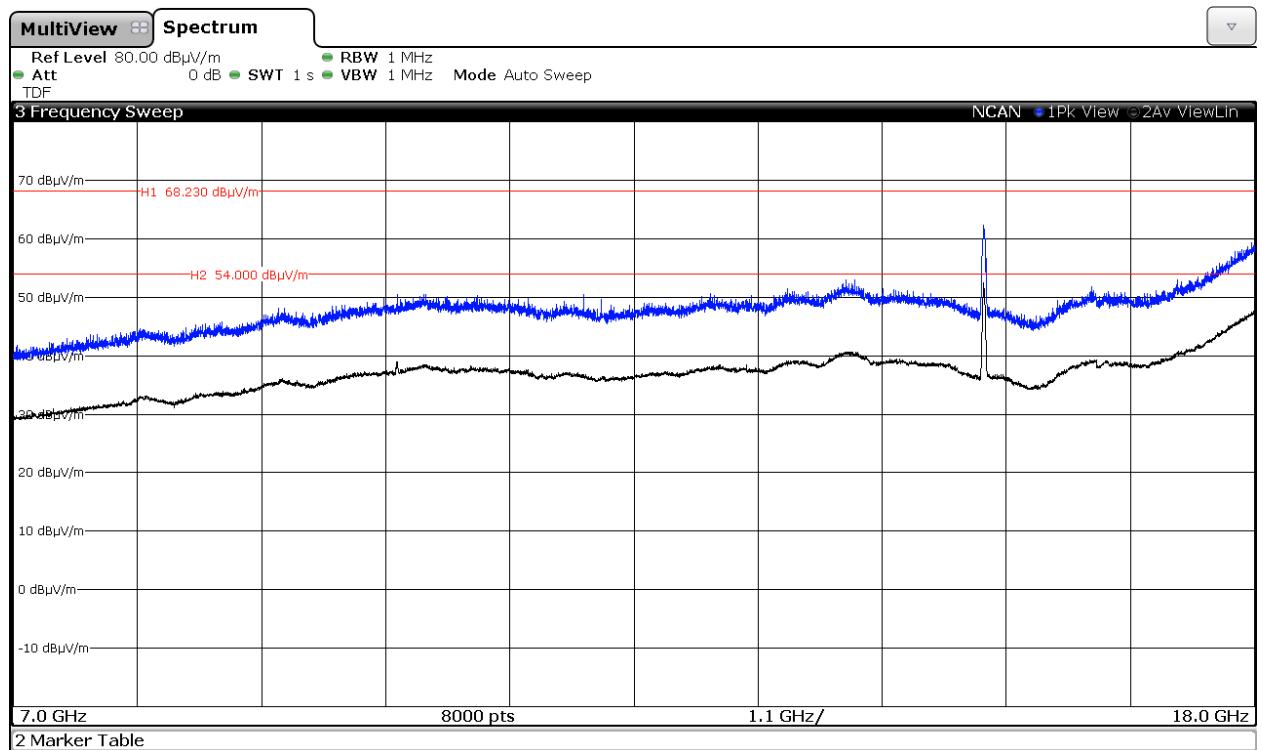

Chain B

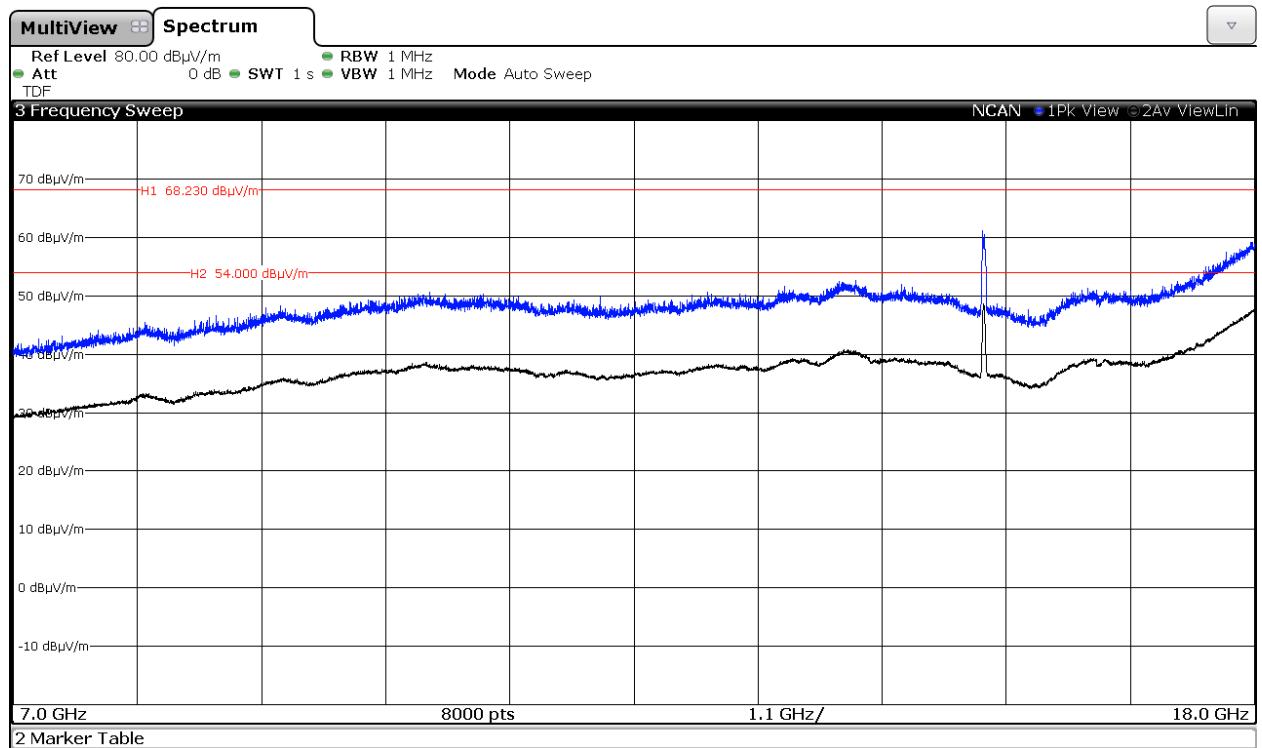


Chain A+B

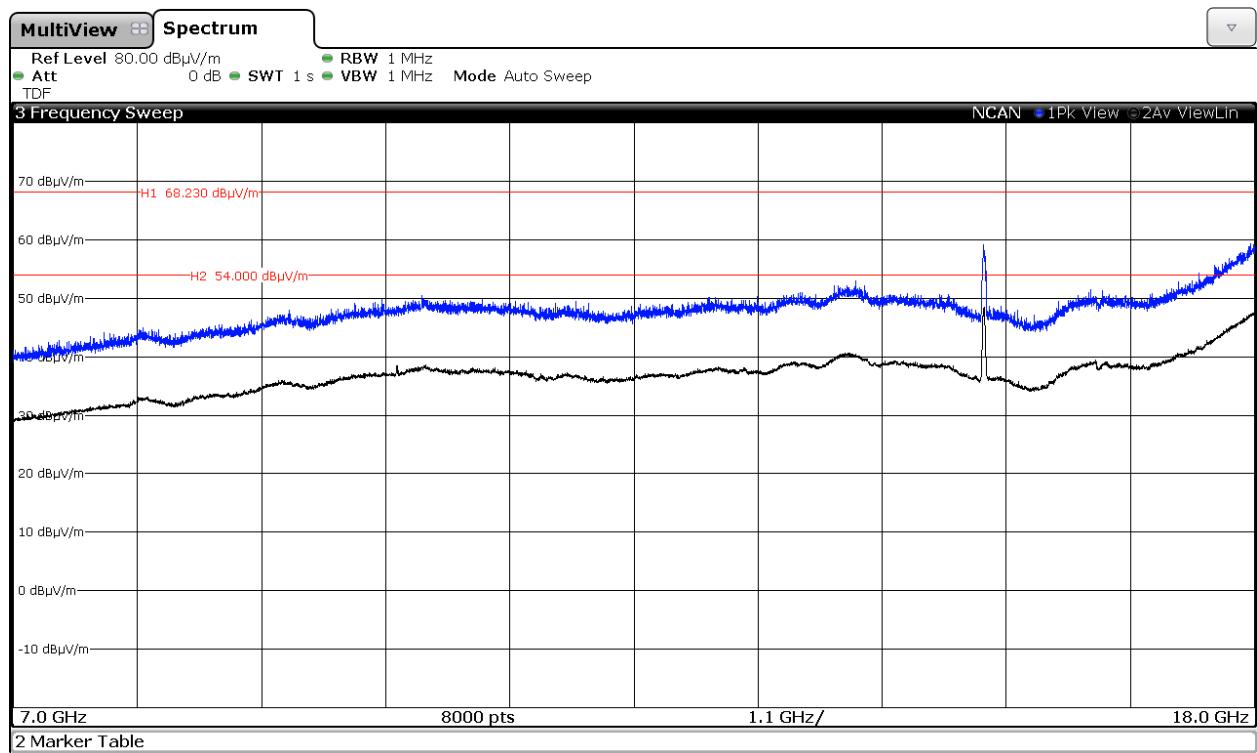


3. WiFi 5GHz 802.11 n40 mode

Highest frequency 5230 MHz.


Chain A

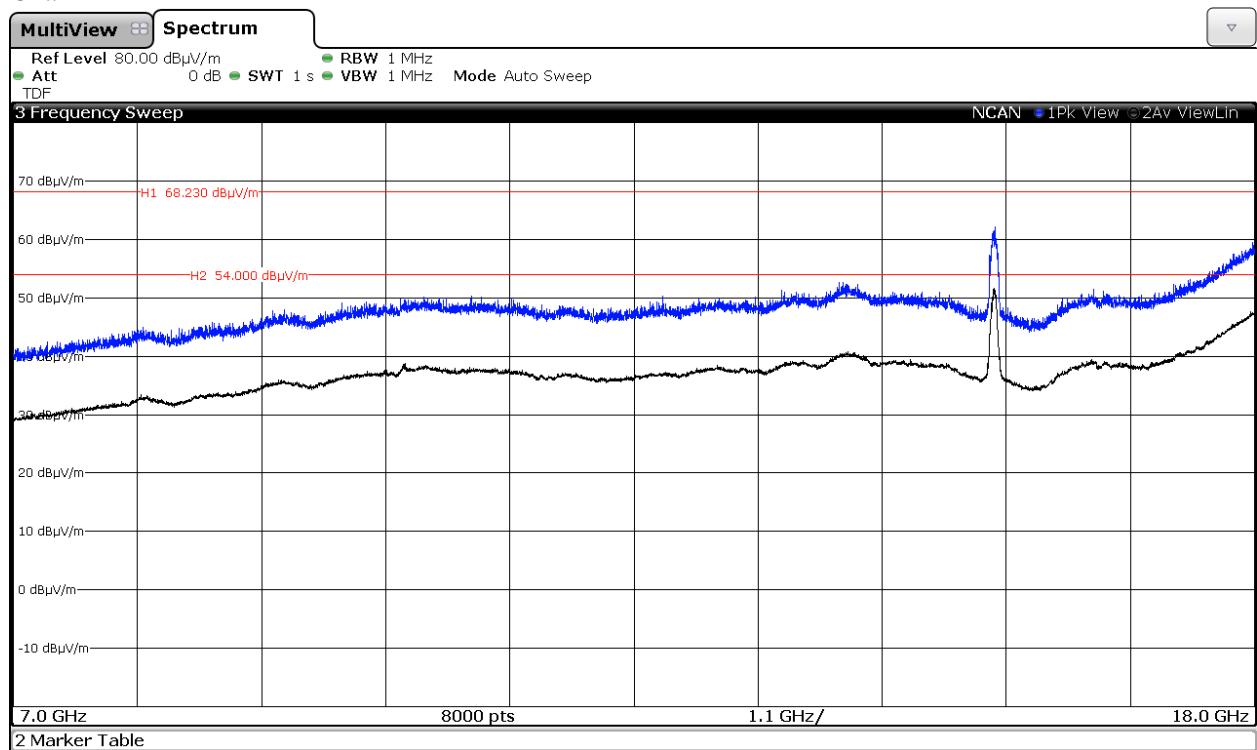

Chain B

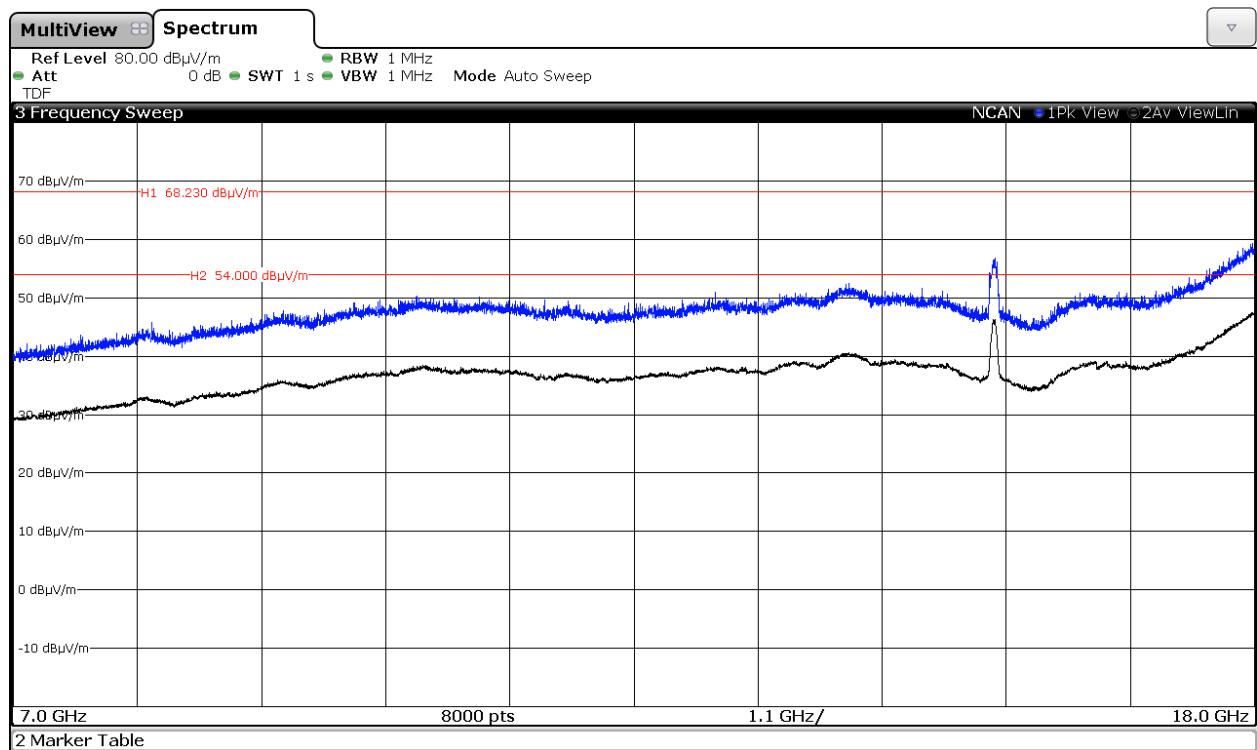


Chain A+B

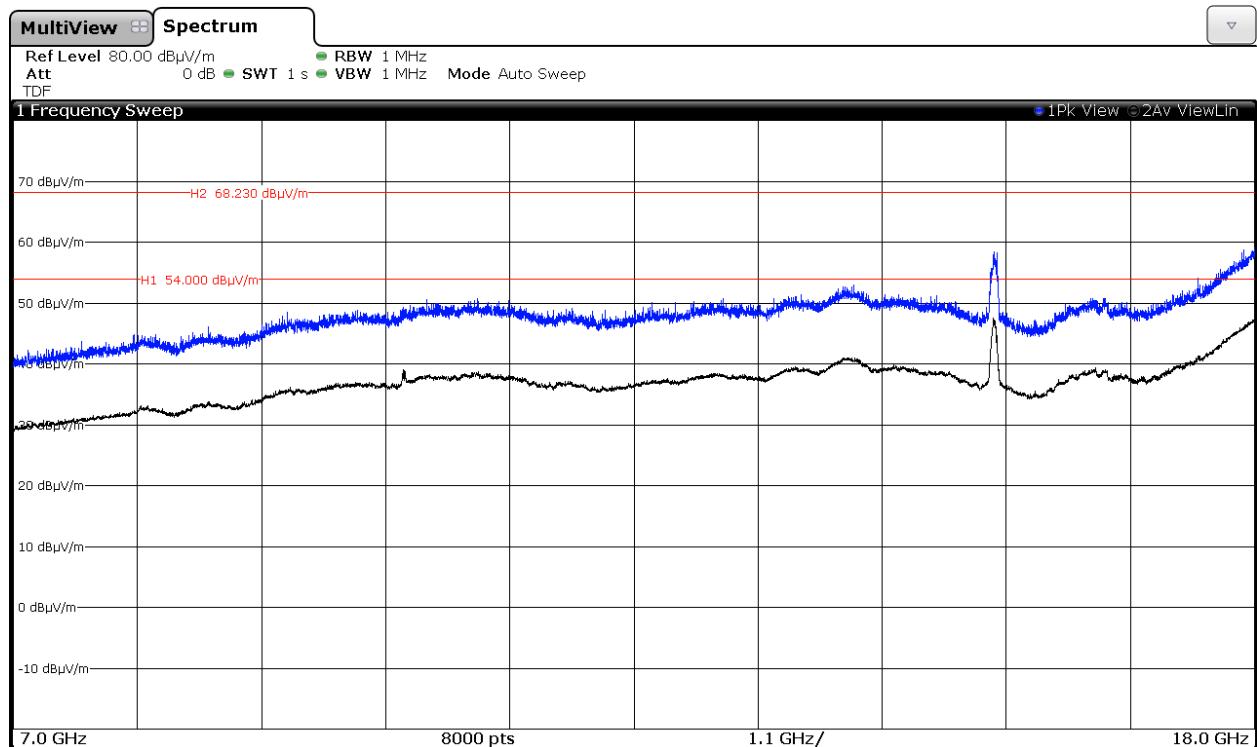


4. WiFi 5GHz 802.11 ac80 mode

Middle frequency 5210 MHz.


Chain A

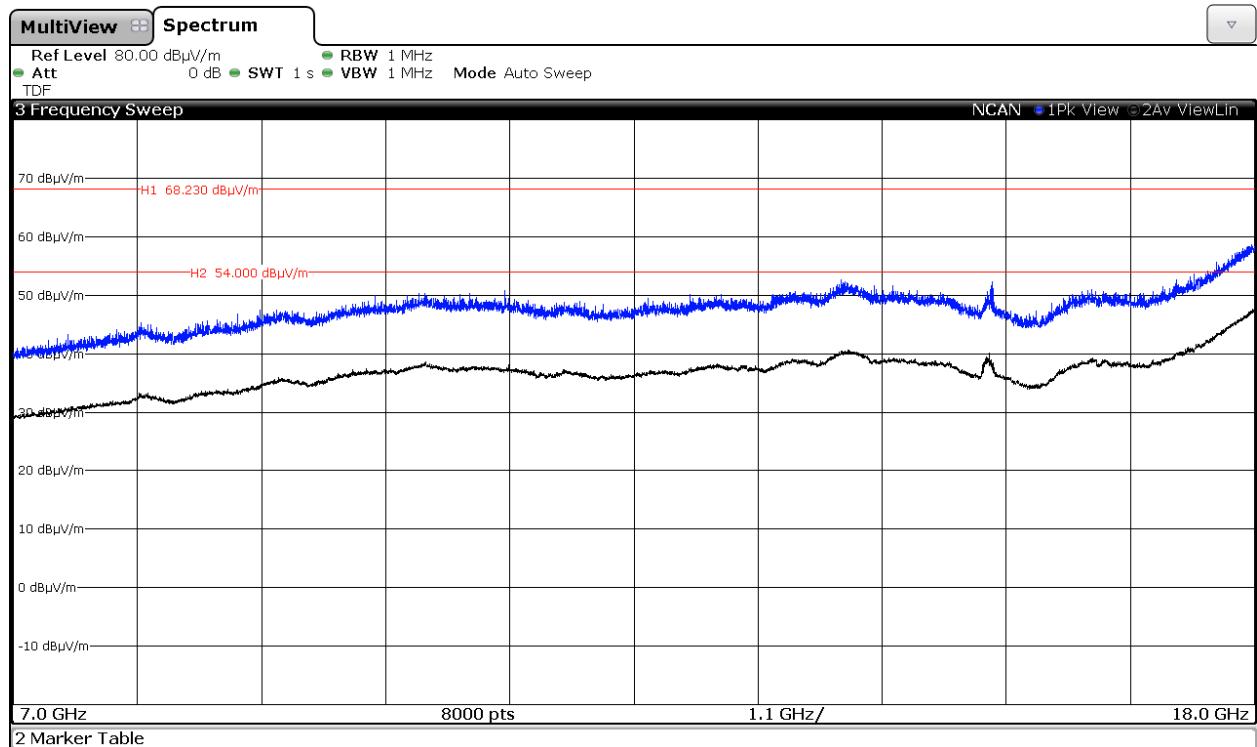

Chain B

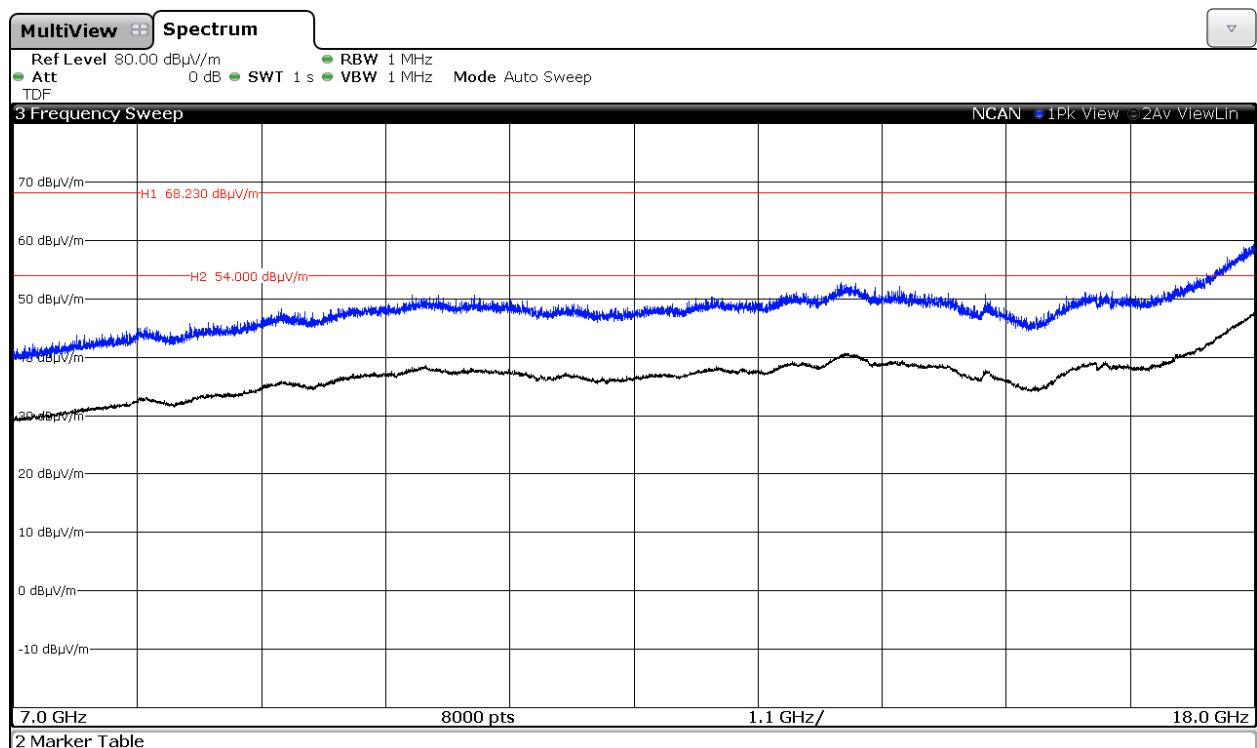

Chain A+B

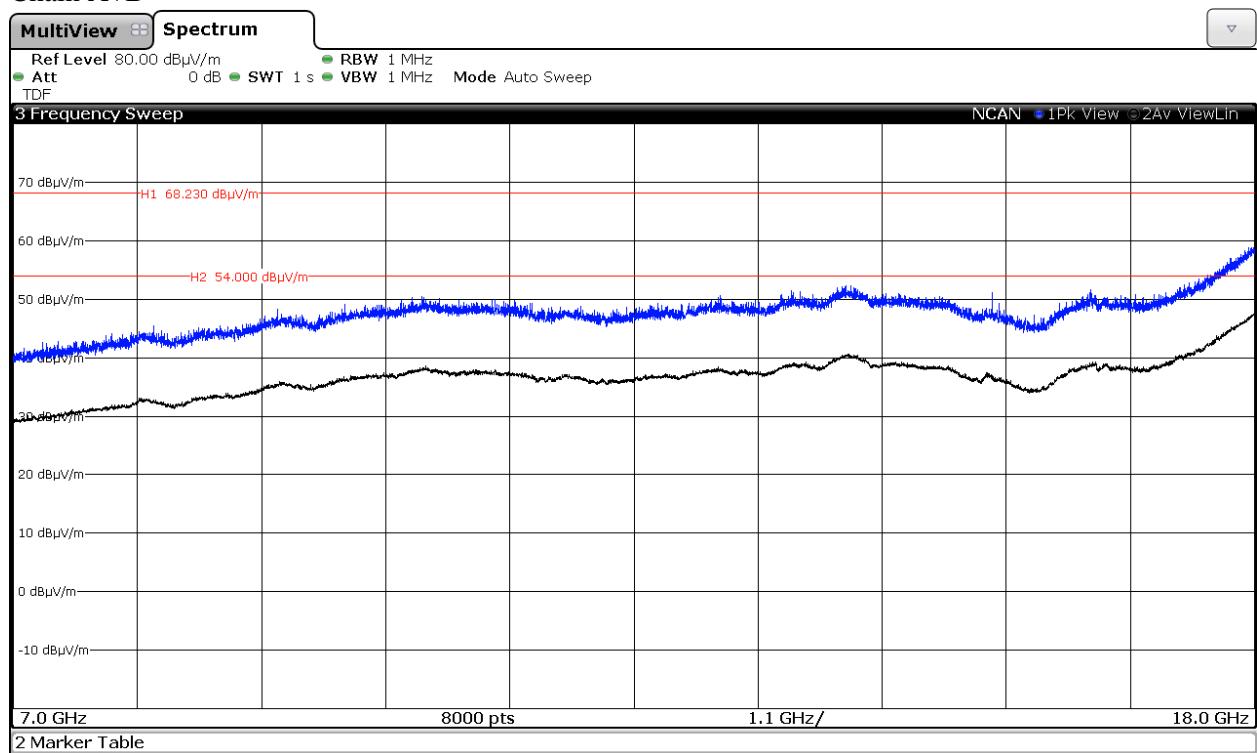


FREQUENCY RANGE 18 GHz to 26 GHz.


1. WiFi 5GHz 802.11 a mode

Lowest frequency 5180 MHz.

Chain A

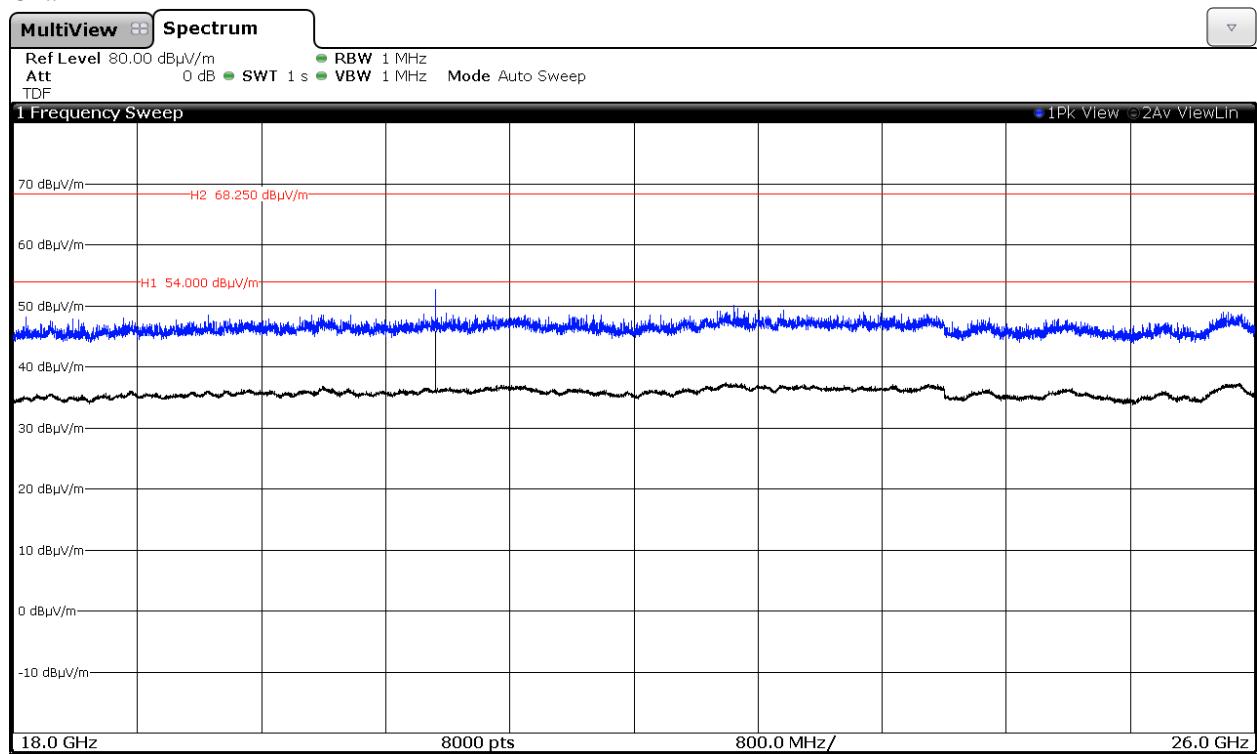


Chain B

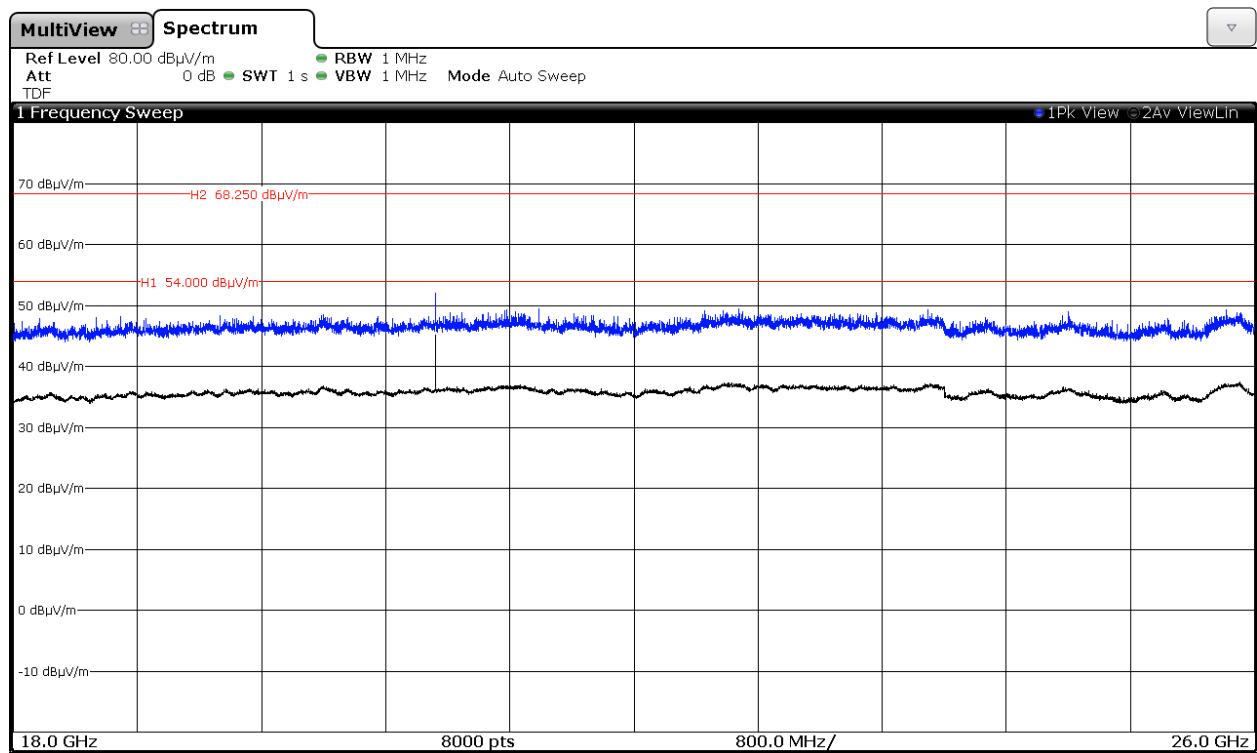


Middle frequency 5200 MHz.

Chain A

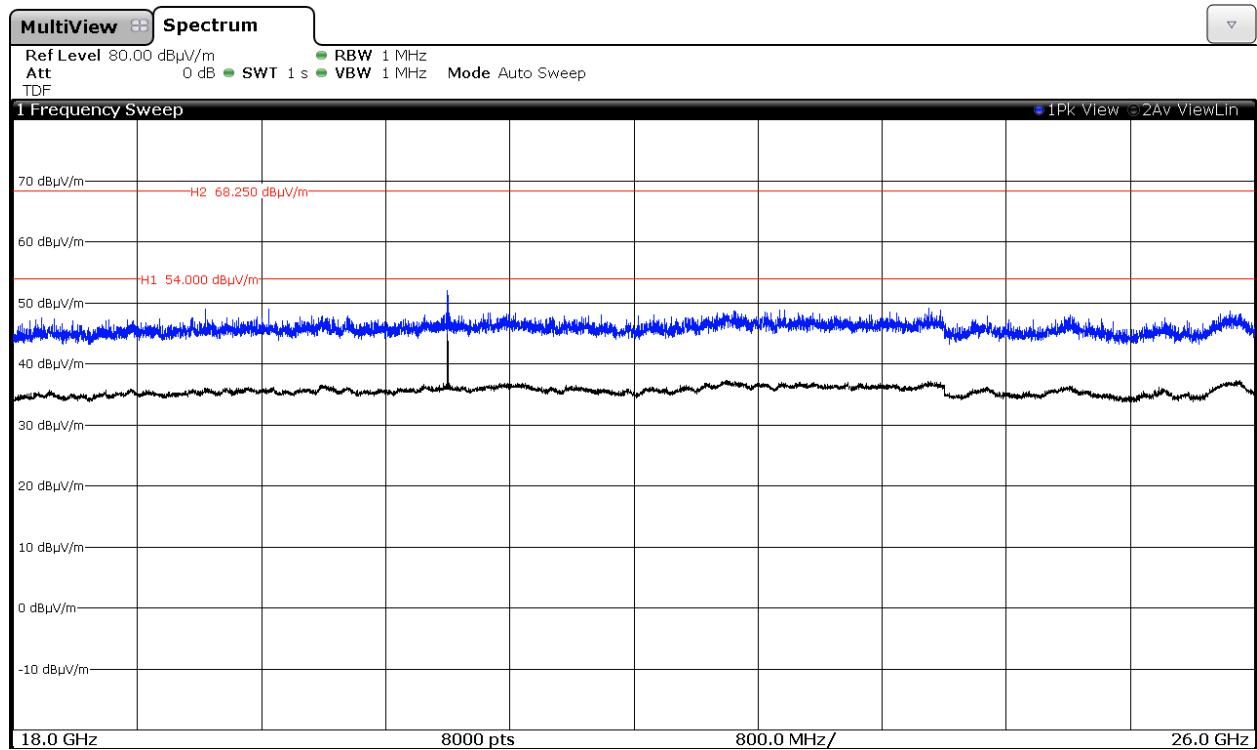


Chain B

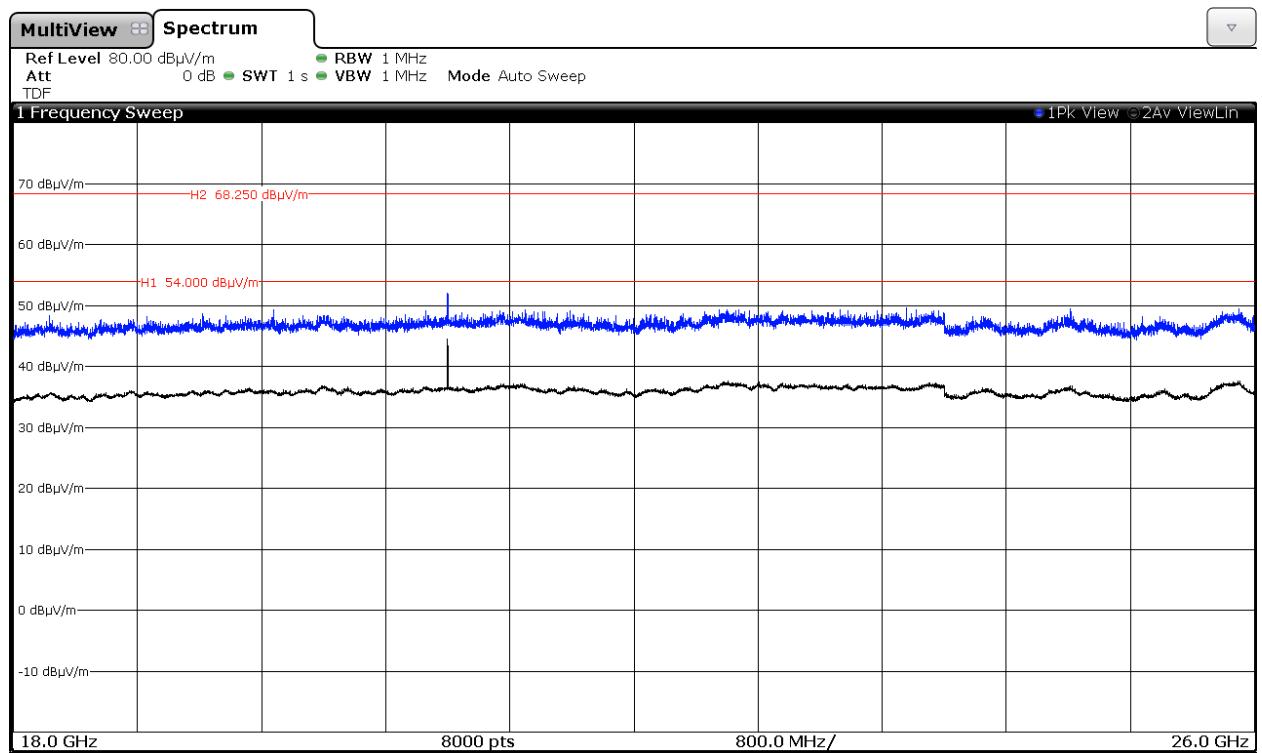


Highest frequency 5240 MHz.

Chain A

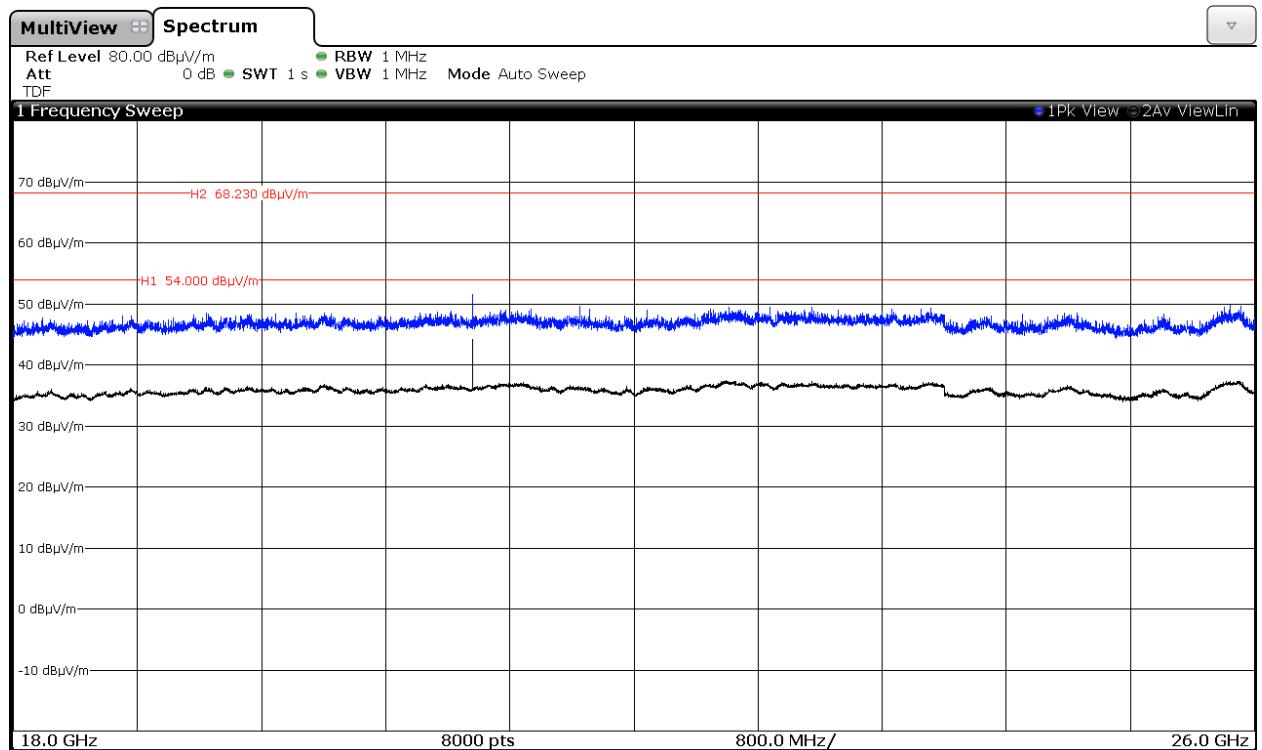


Chain B

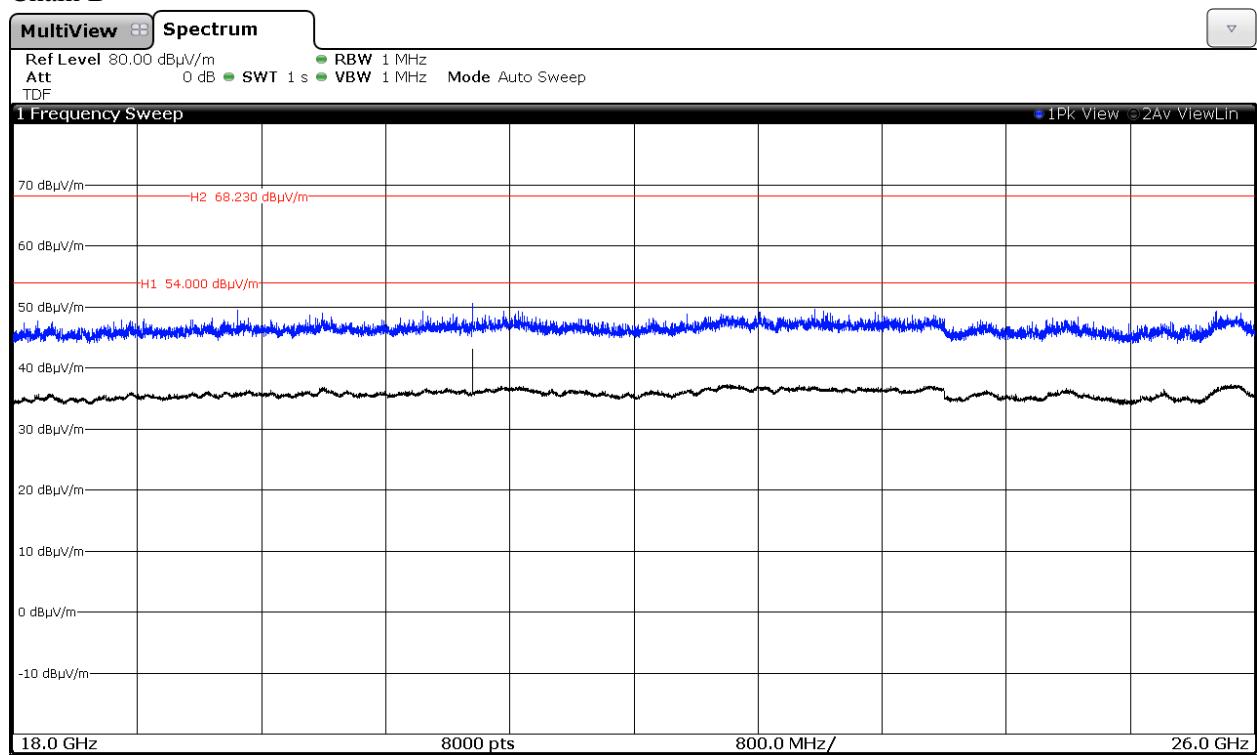


2. WiFi 5GHz 802.11 n20 mode

Middle frequency 5200 MHz.


Chain A

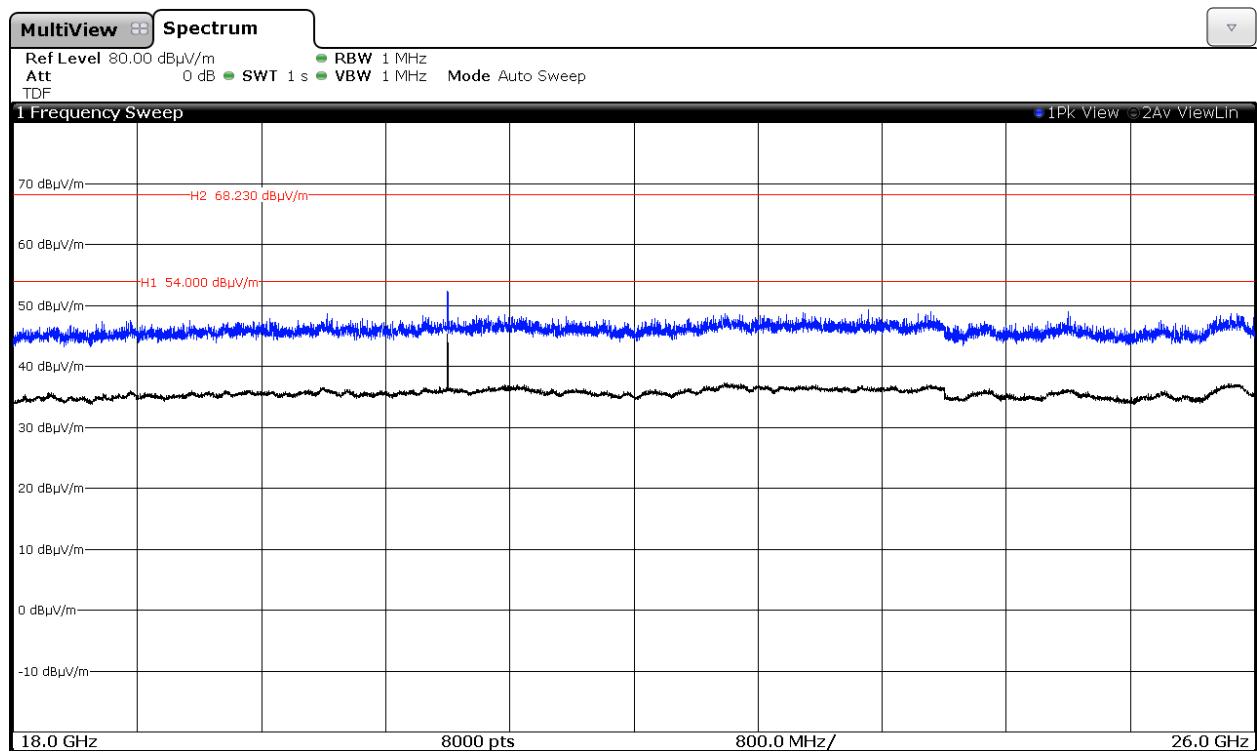

Chain B

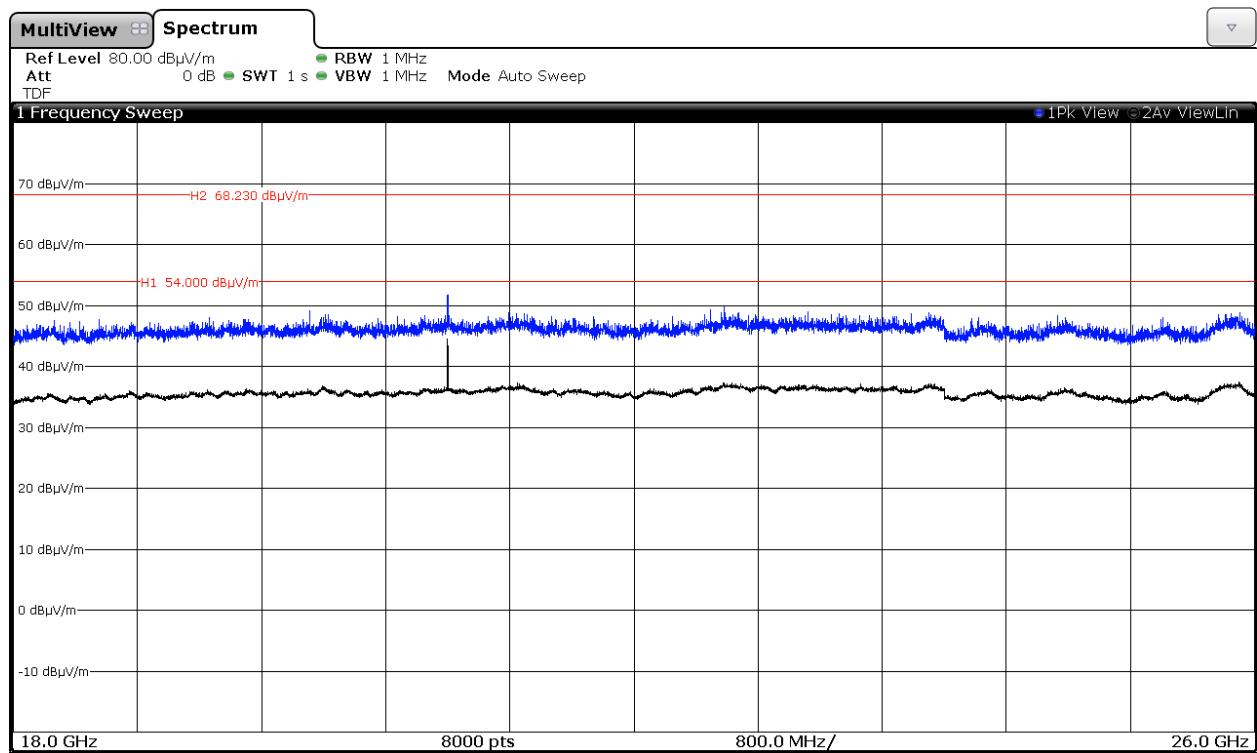


Chain A+B

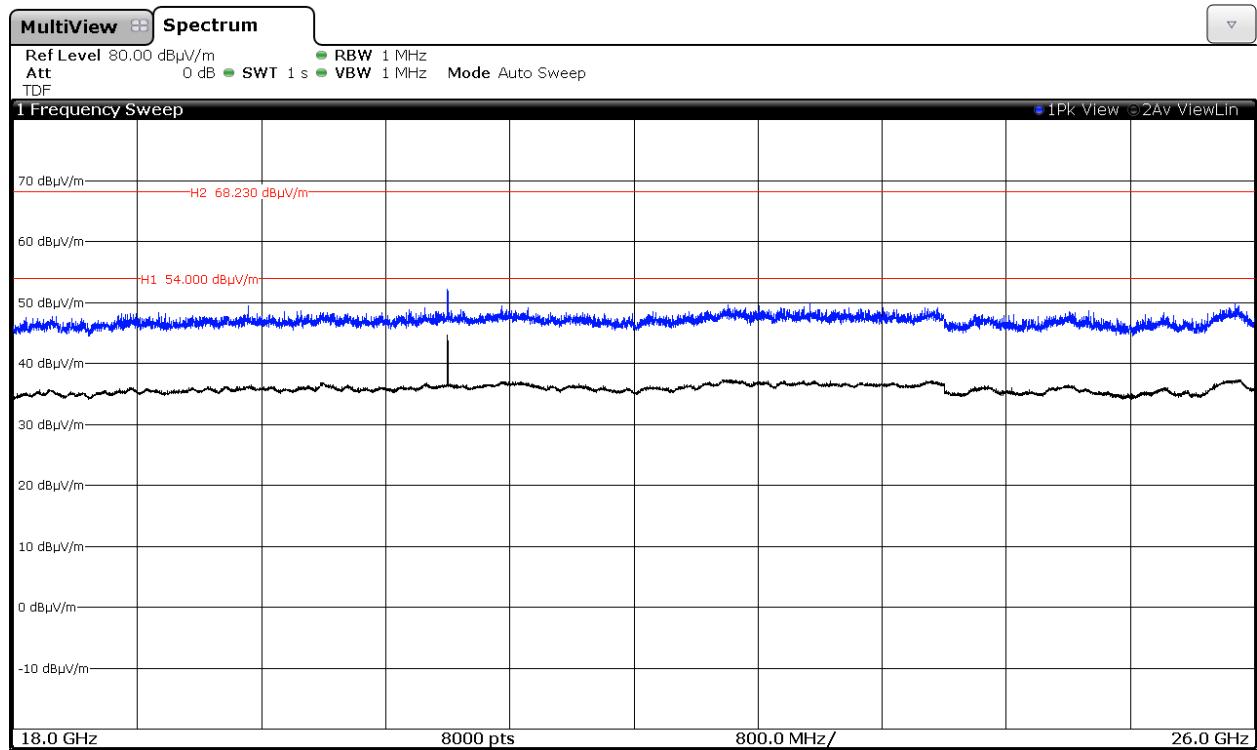


3. WiFi 5GHz 802.11 n40 mode

Highest frequency 5230 MHz.


Chain A

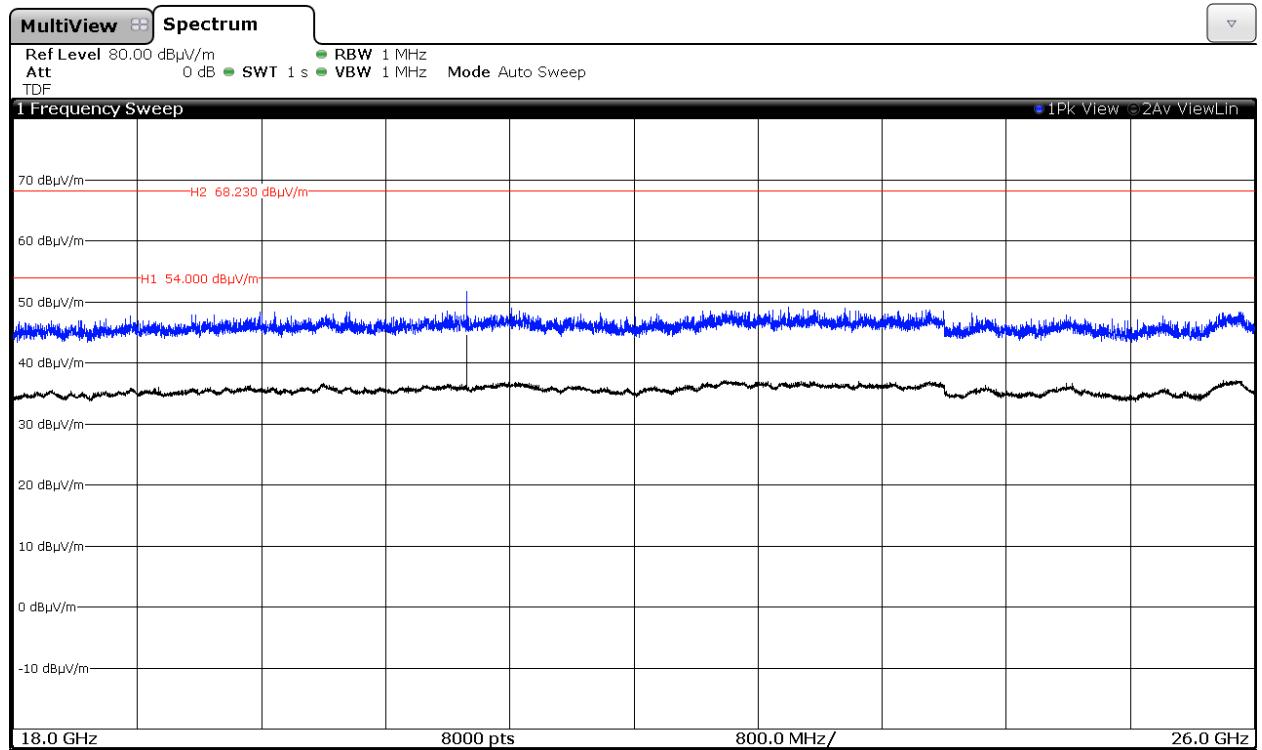

Chain B

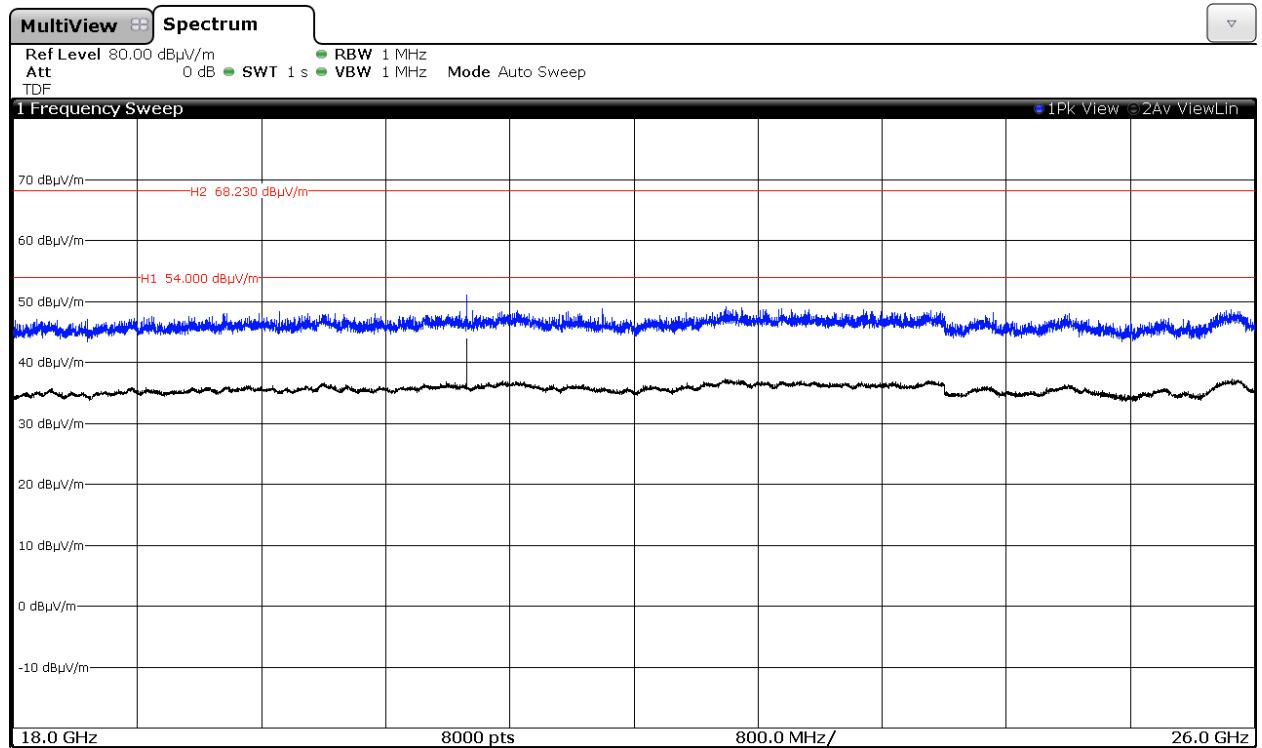


Chain A+B

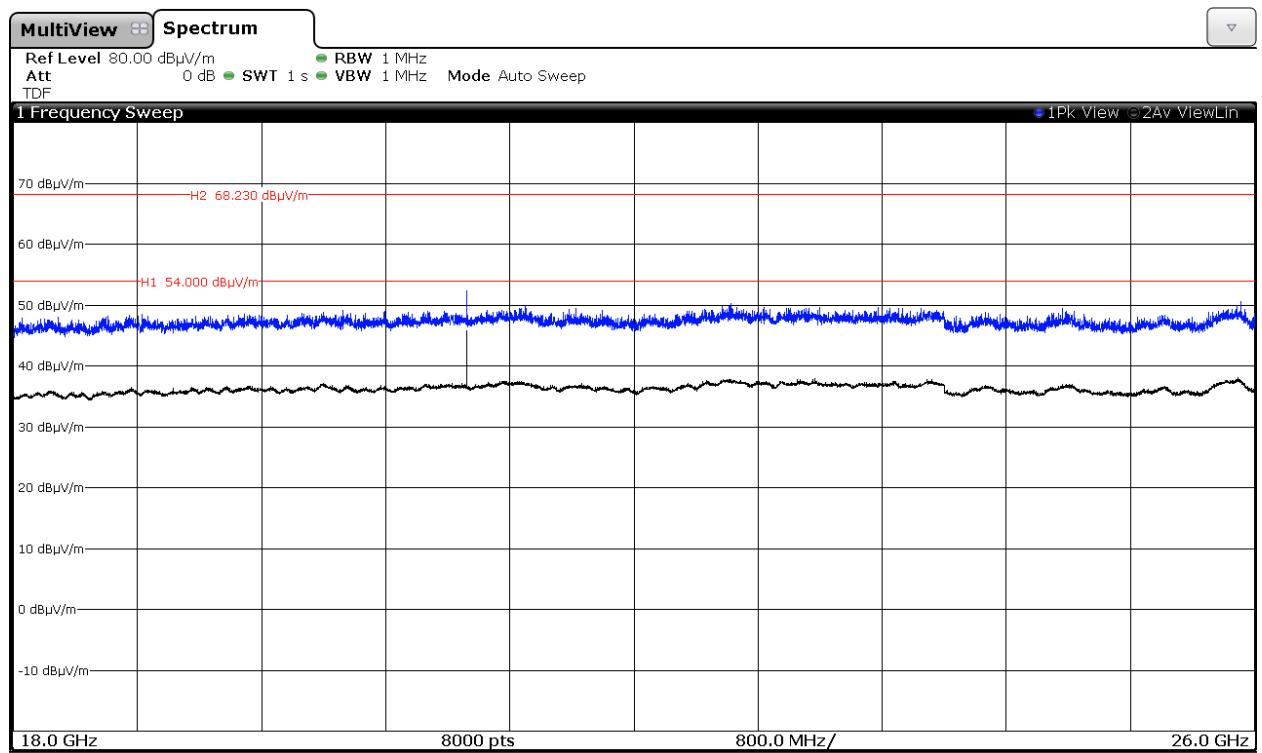


4. WiFi 5GHz 802.11 ac80 mode

Middle frequency 5210 MHz.


Chain A

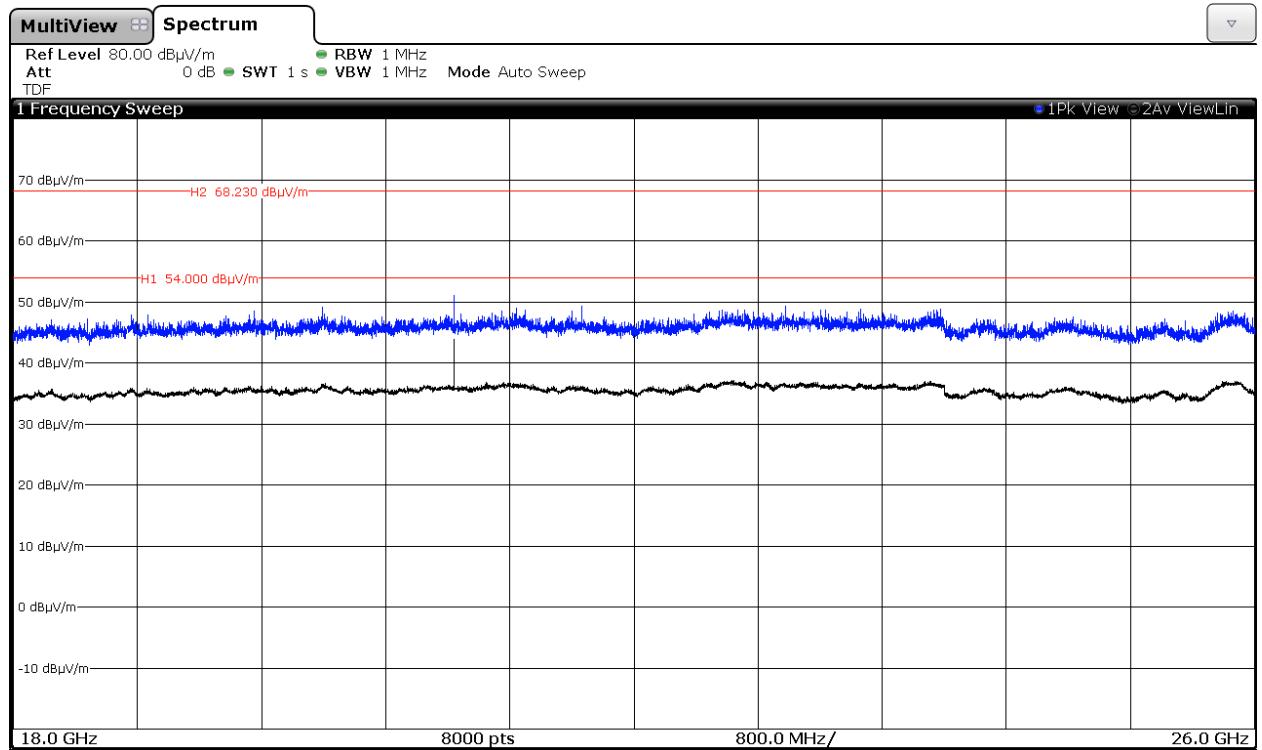

Chain B

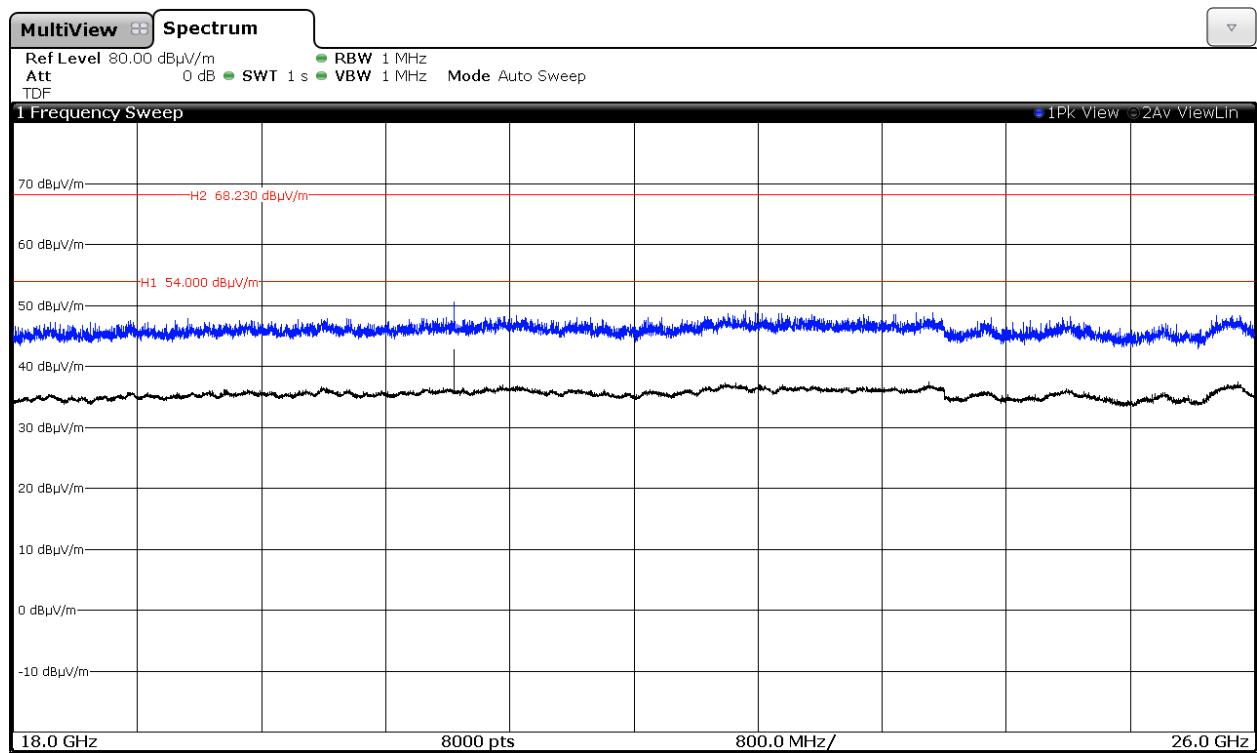


Chain A+B

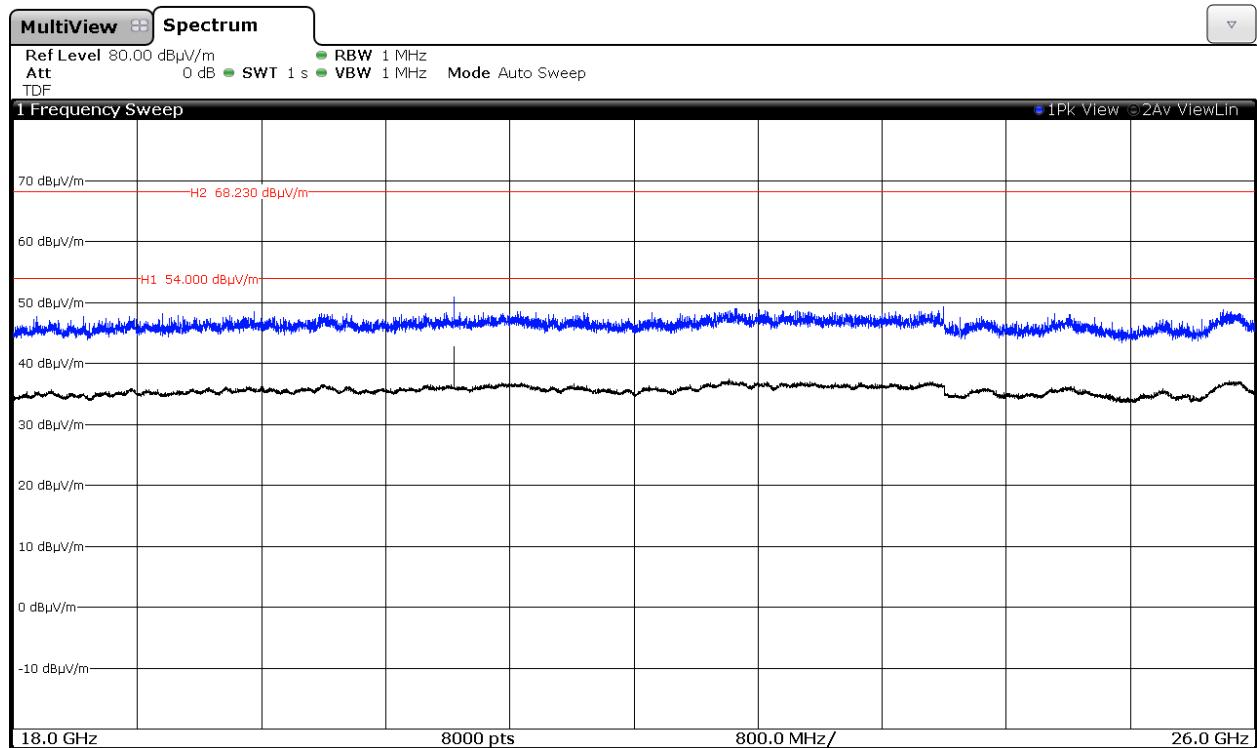

FREQUENCY RANGE 26 GHz 40GHz.

No spurious signals were found in all modulations and channels tested.

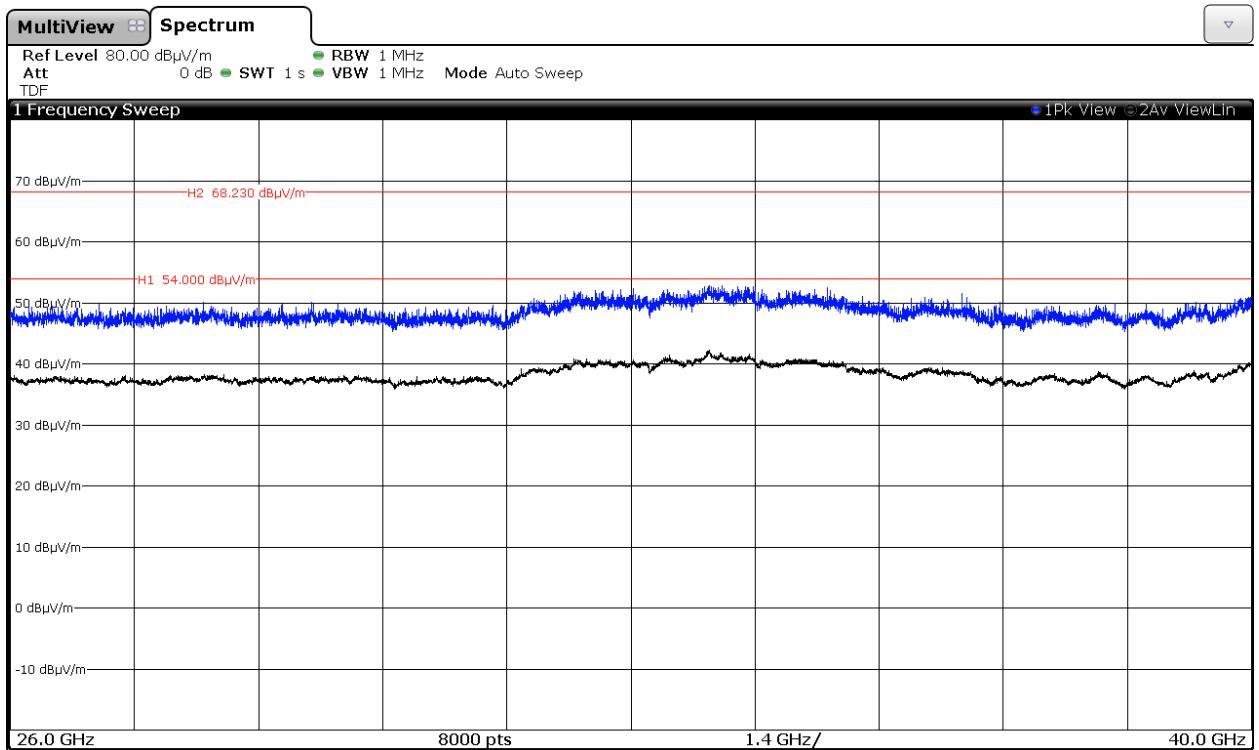


(This plot is valid for both SISO modes and MIMO mode).

Radiated spurious emissions at band-edges and inside restricted band 4.5 – 5.15 GHz.


1. WiFi 5GHz 802.11 a mode

Lowest frequency 5180 MHz.

Chain A

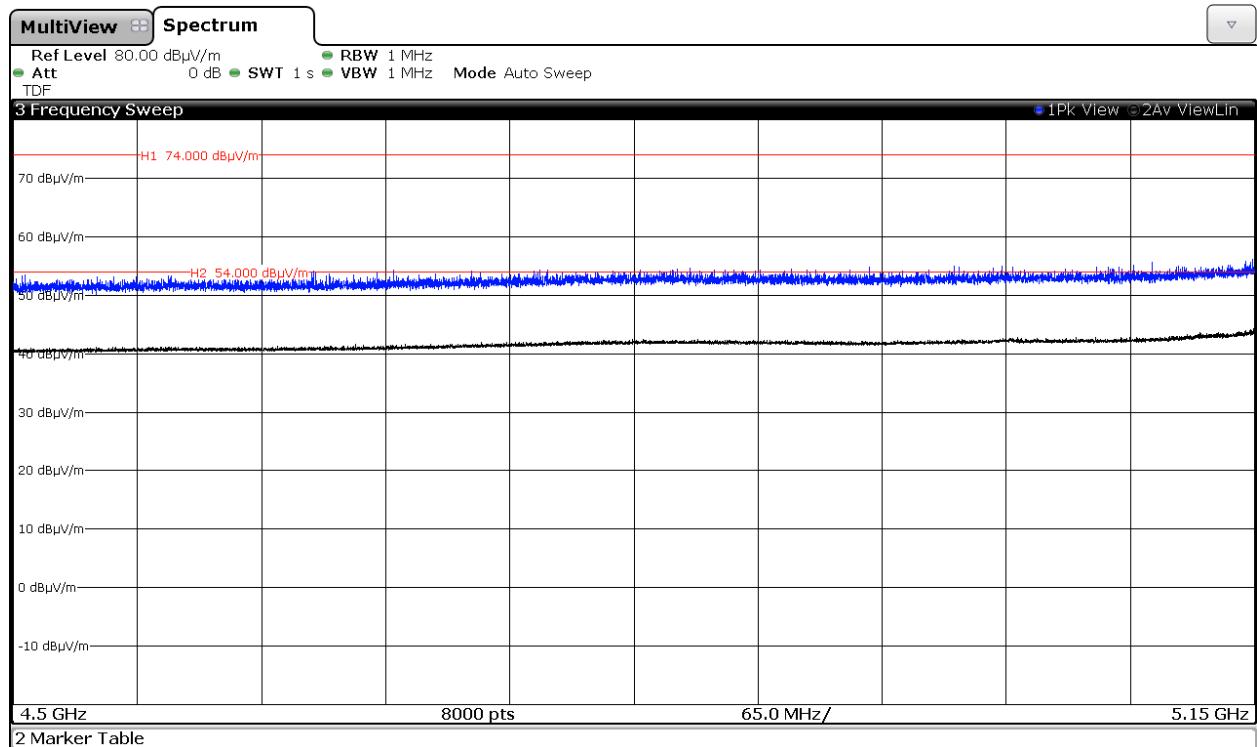


Chain B

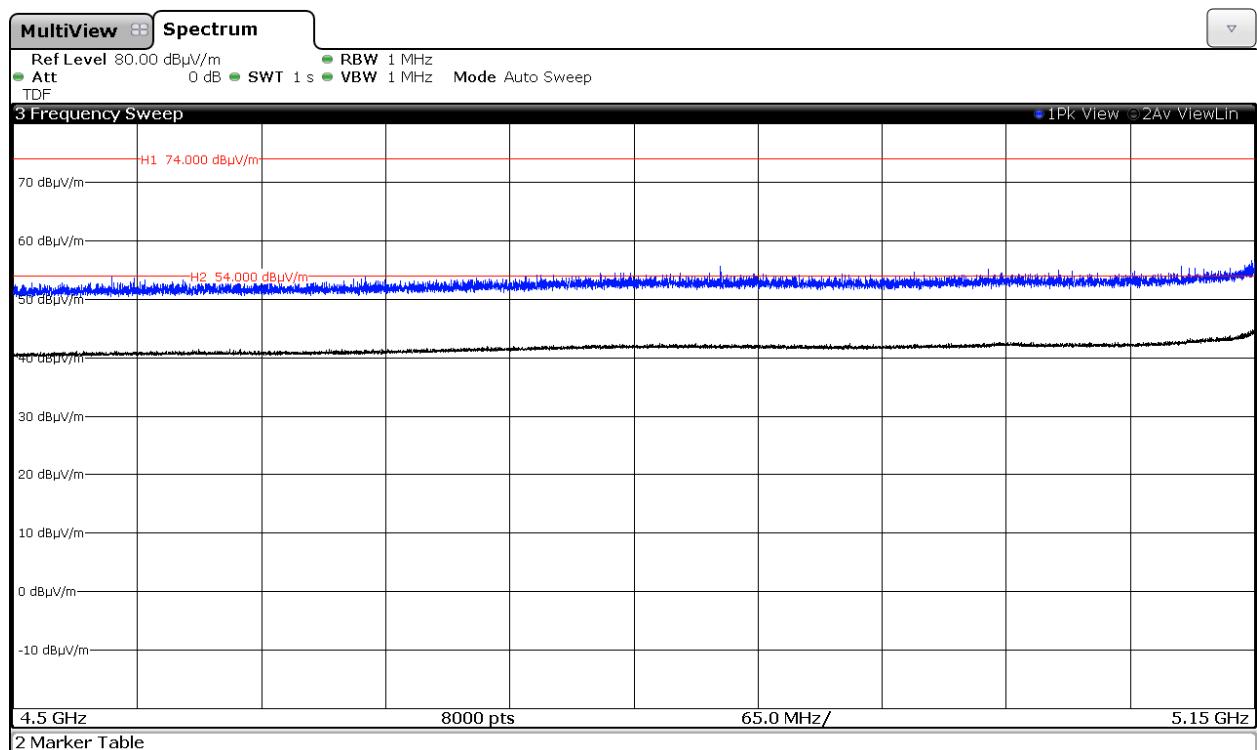


Middle frequency 5200 MHz.

Chain A

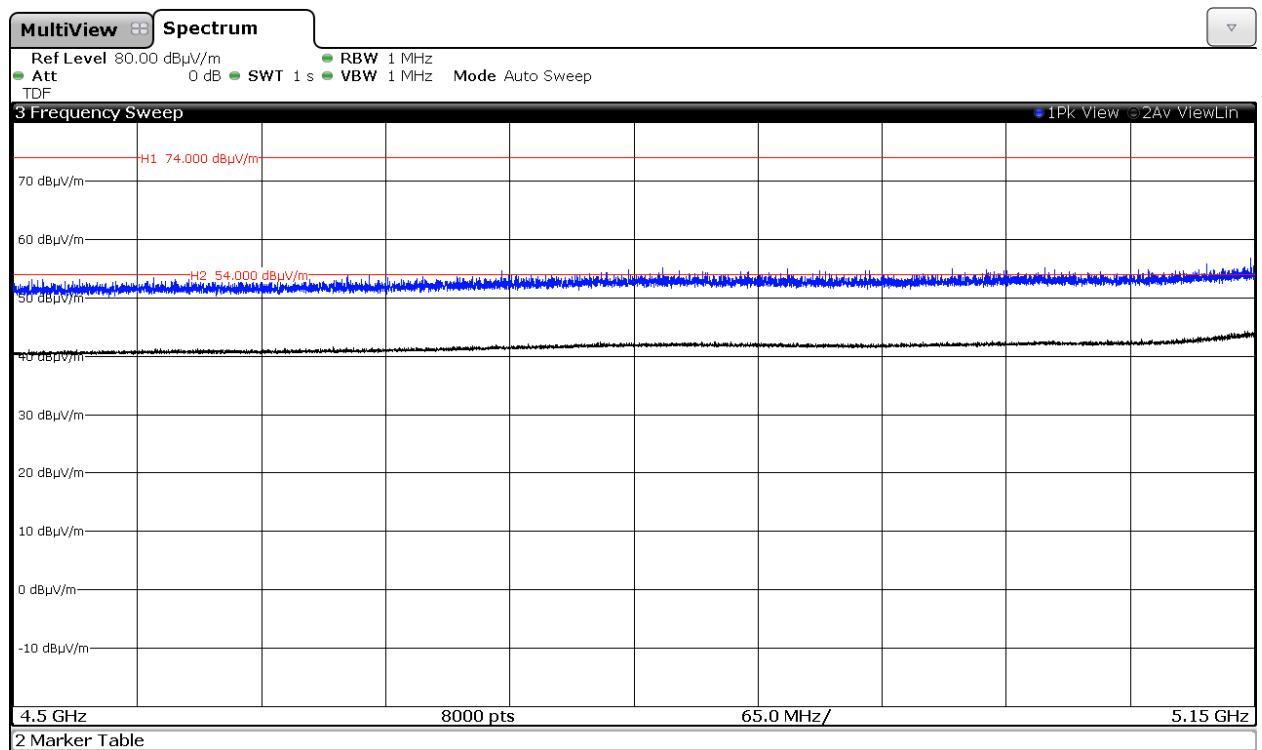


Chain B

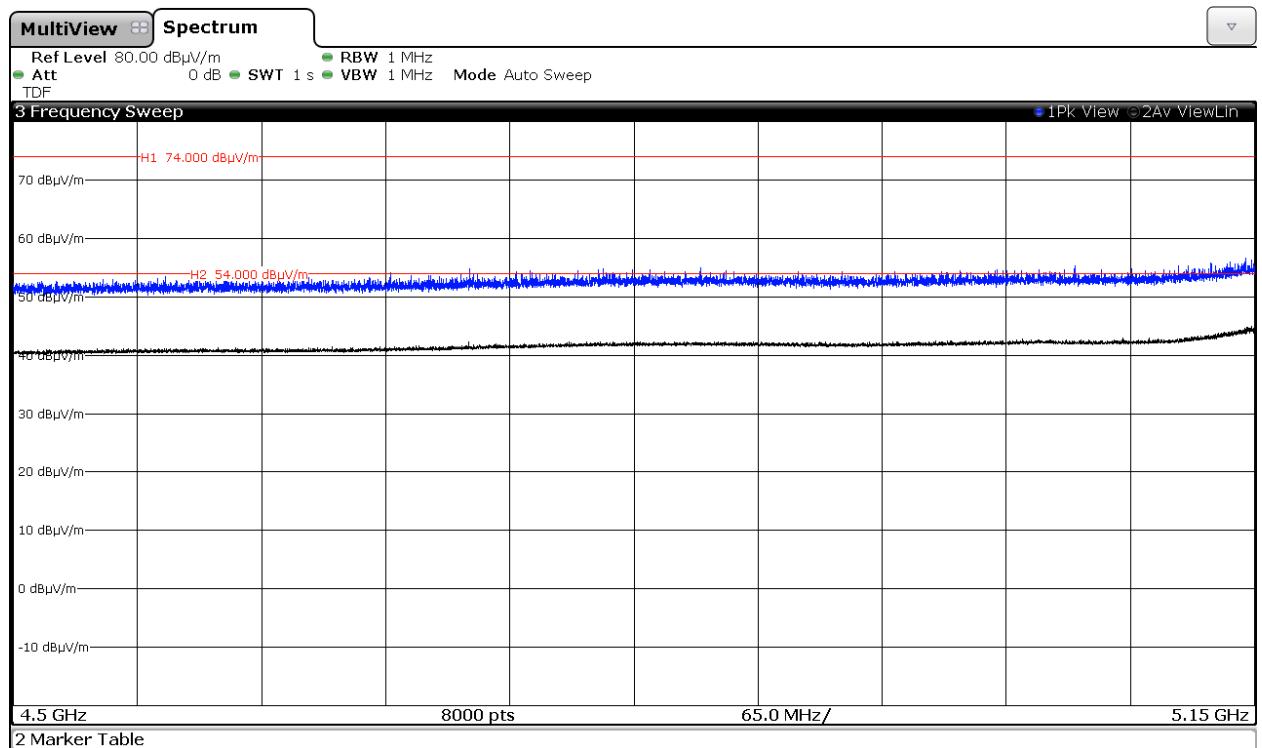


2. WiFi 5GHz 802.11 n20 mode


Lowest frequency 5180 MHz.
Chain A

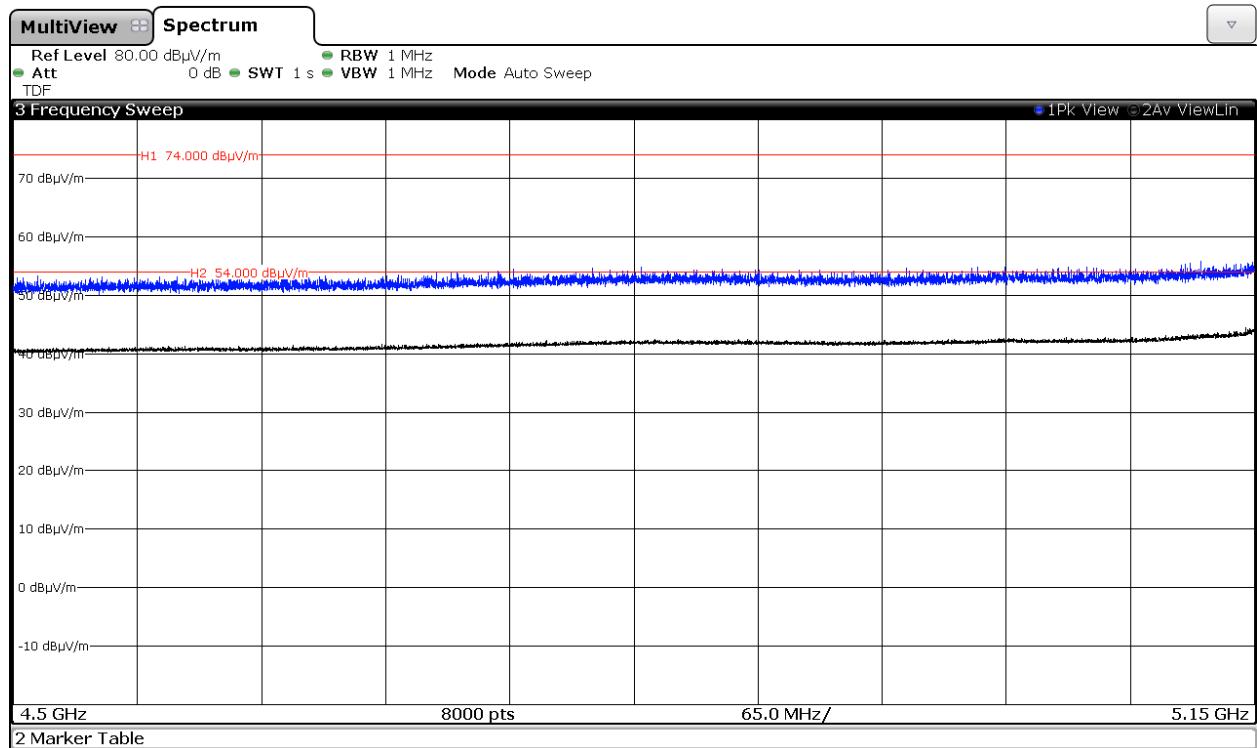

Chain B

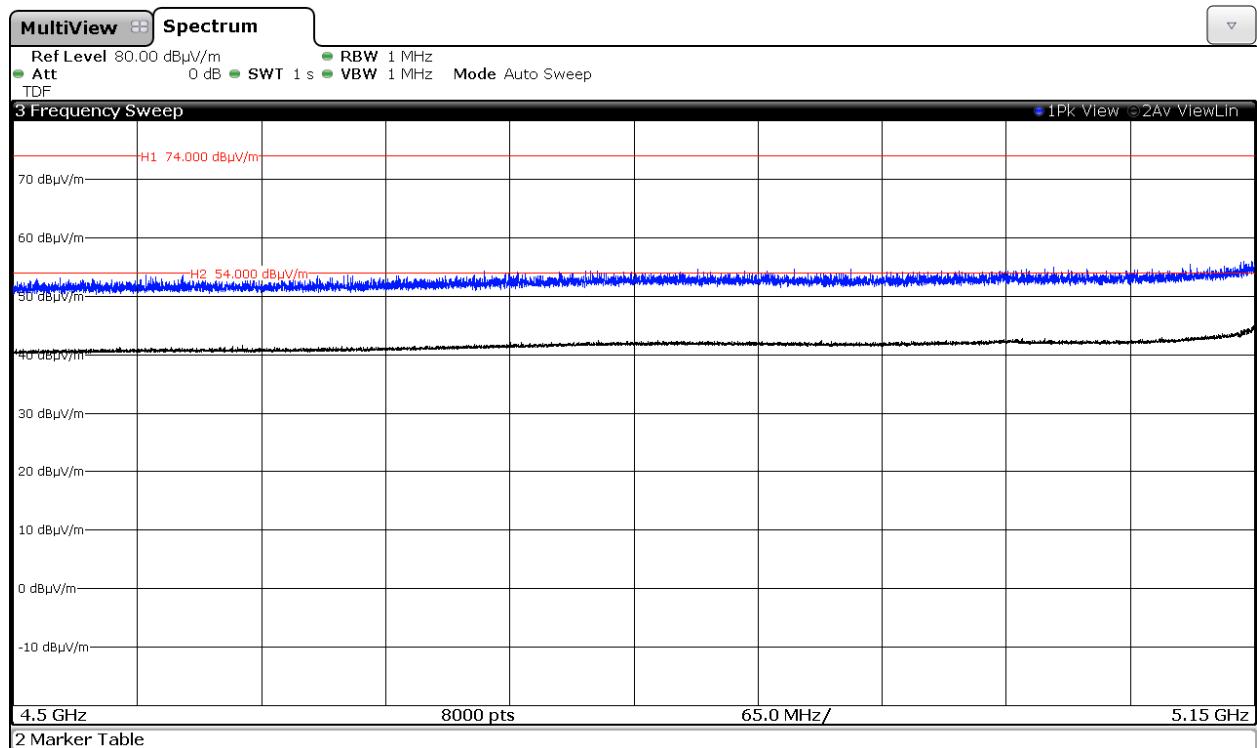


Chain A+B

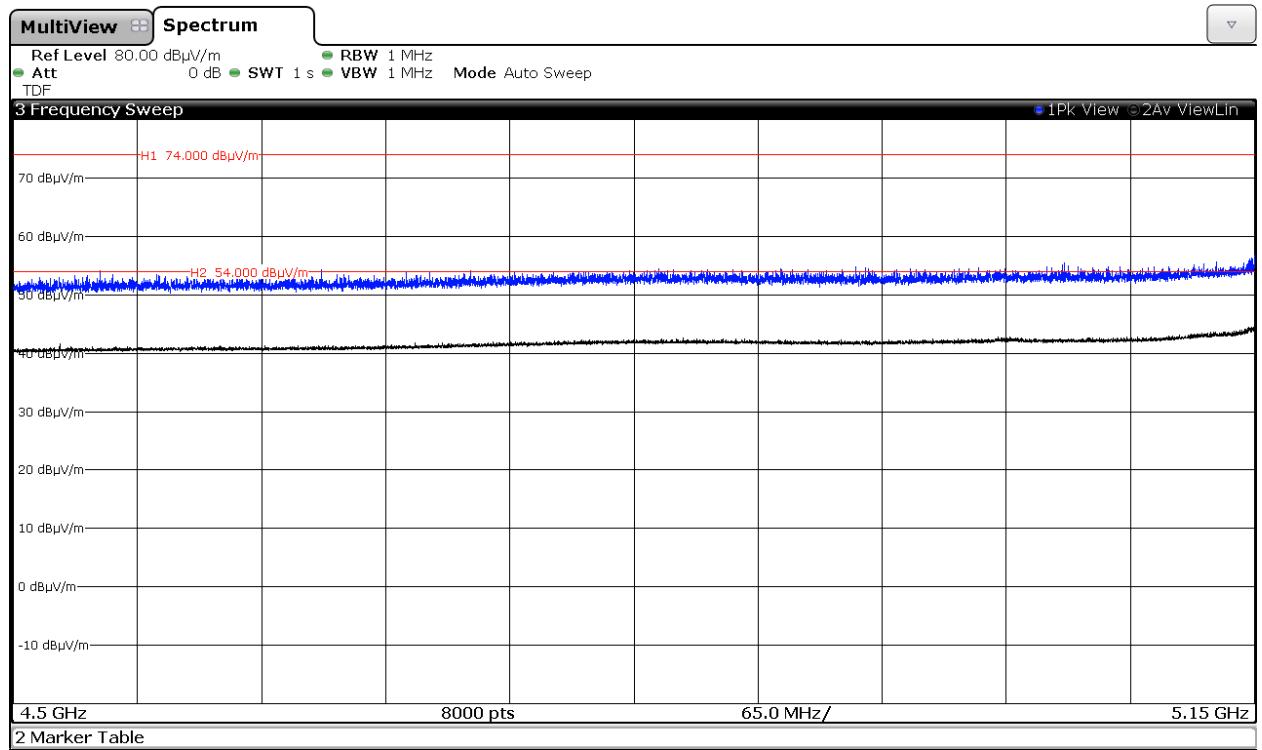


Middle frequency 5200 MHz.


Chain A

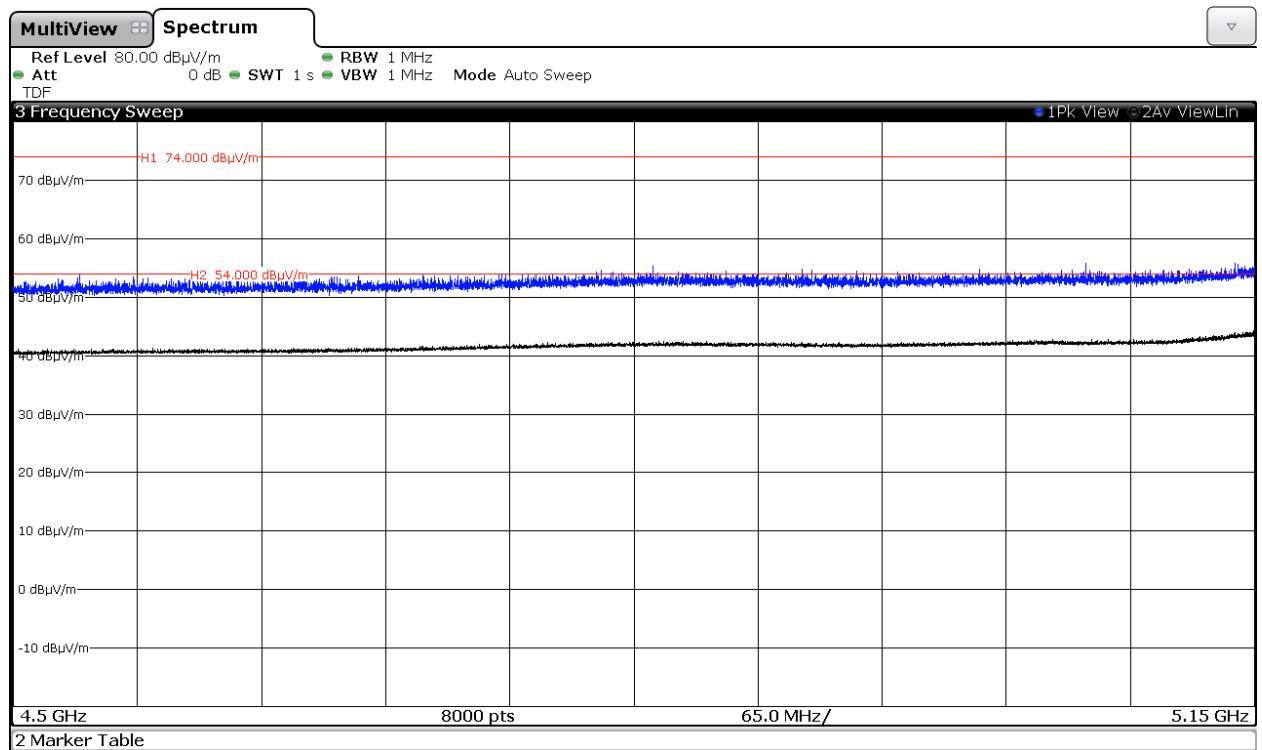

Chain B

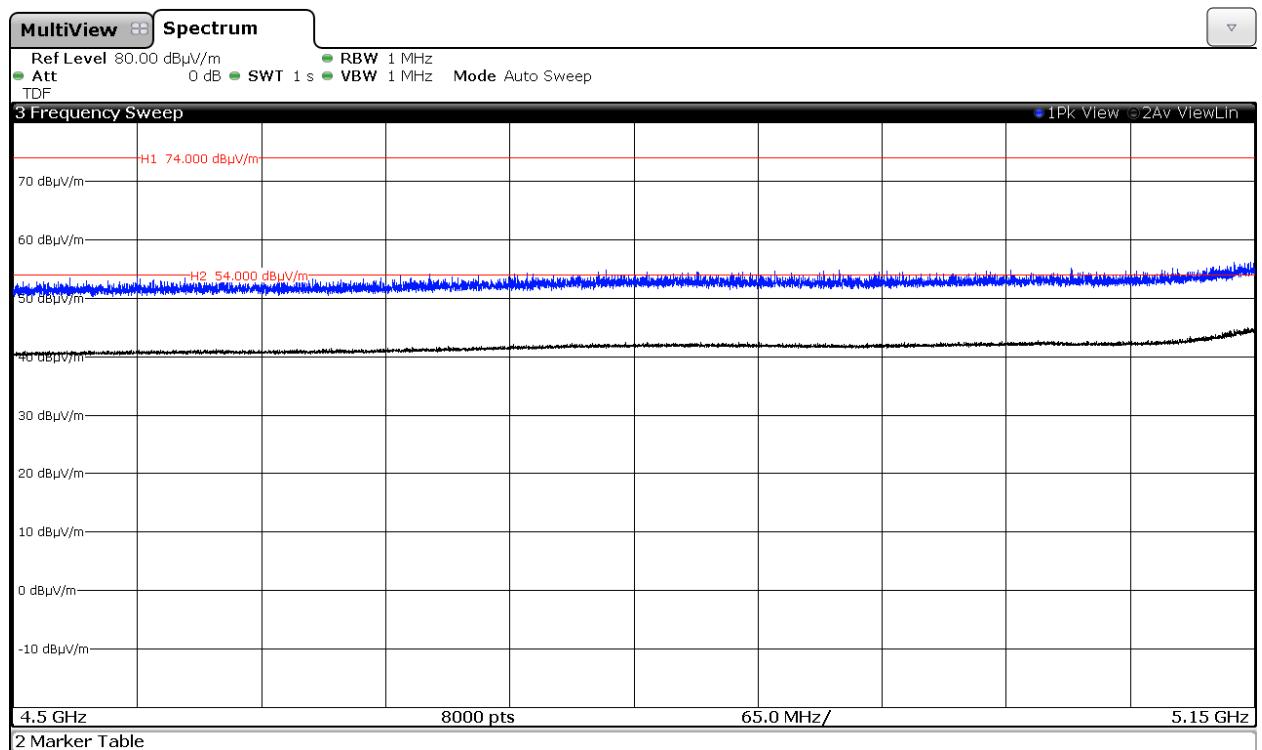


Chain A+B

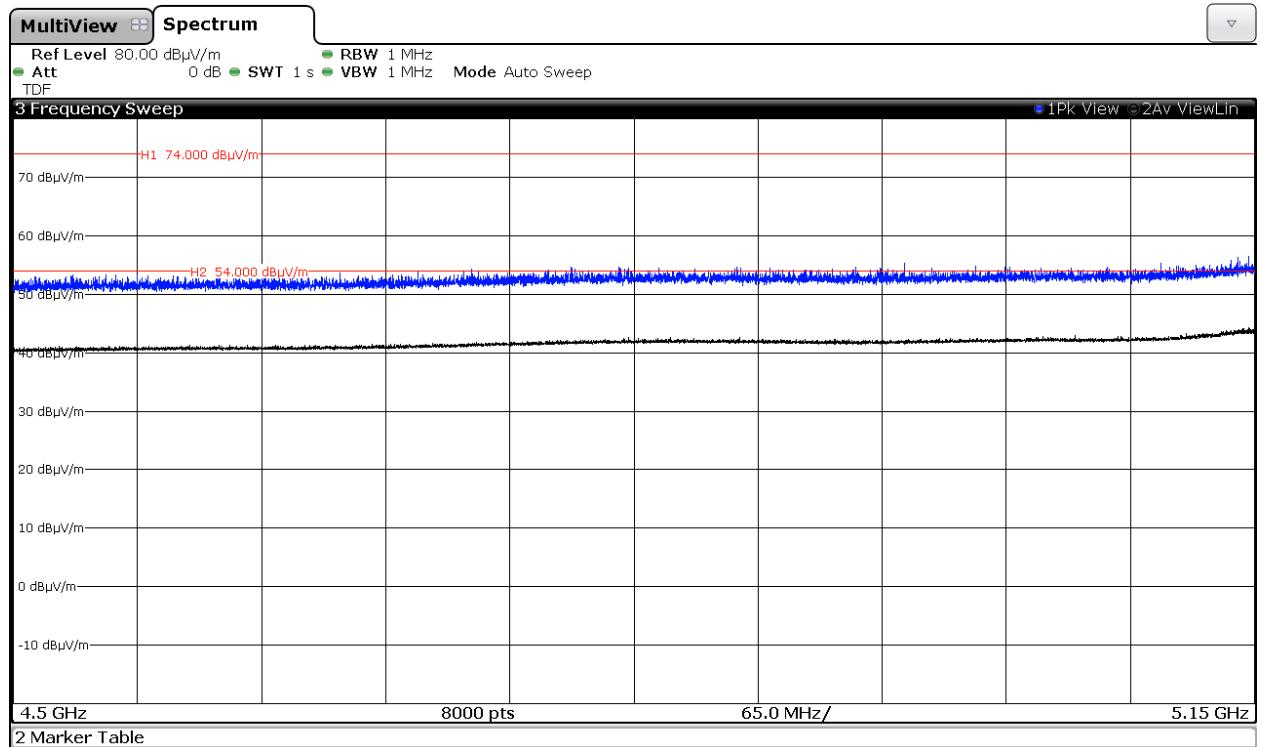


3. WiFi 5GHz 802.11 n40 mode


Lowest frequency 5190 MHz.
Chain A

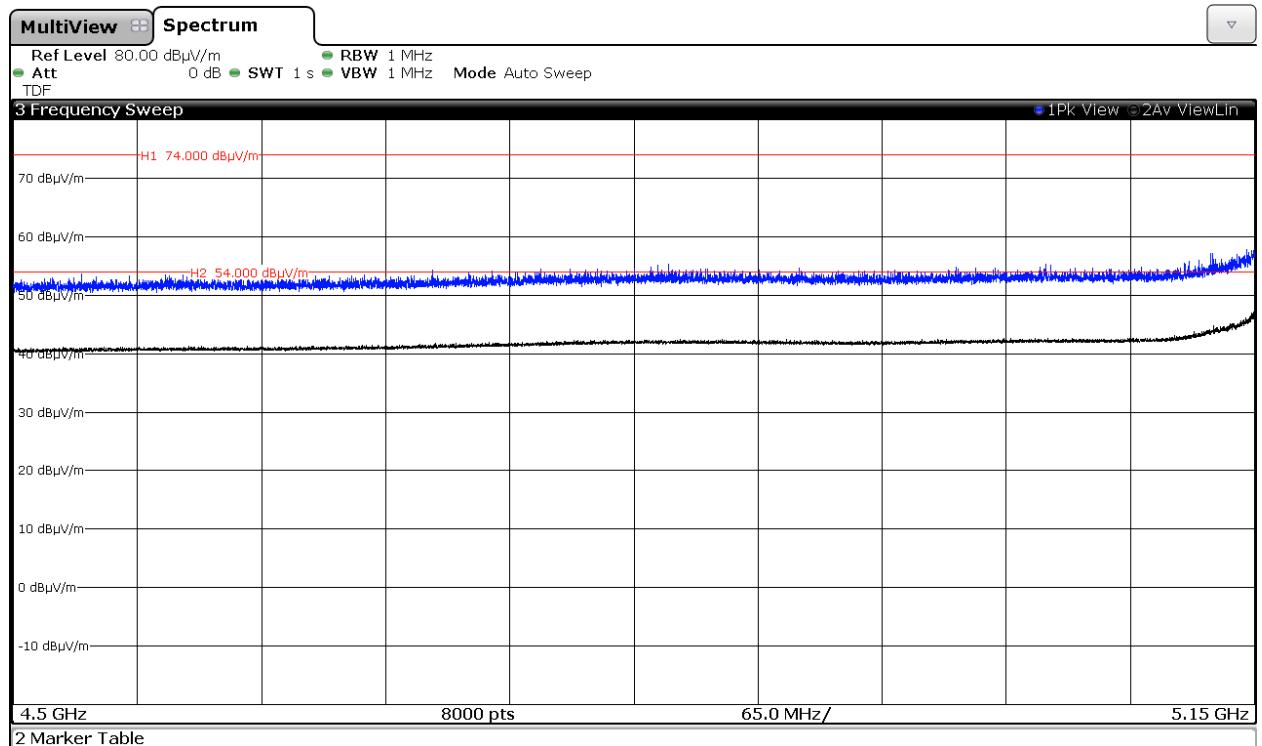

Chain B

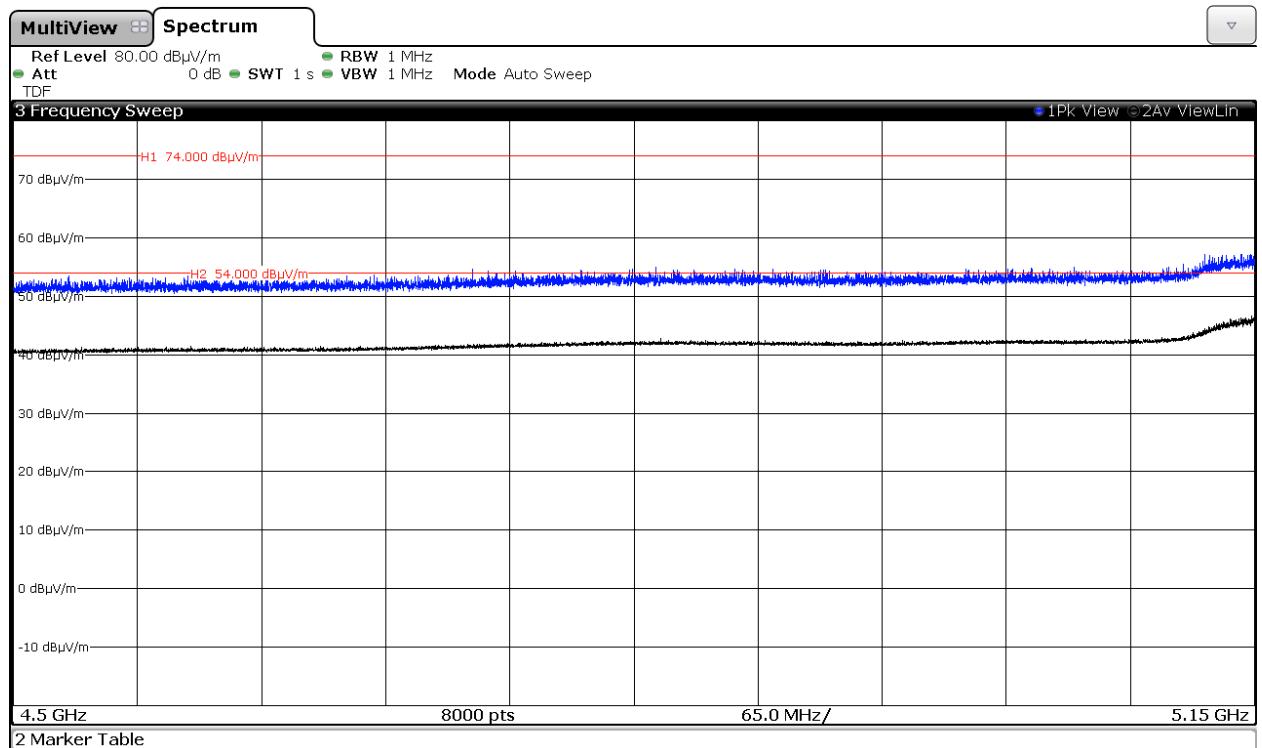


Chain A+B

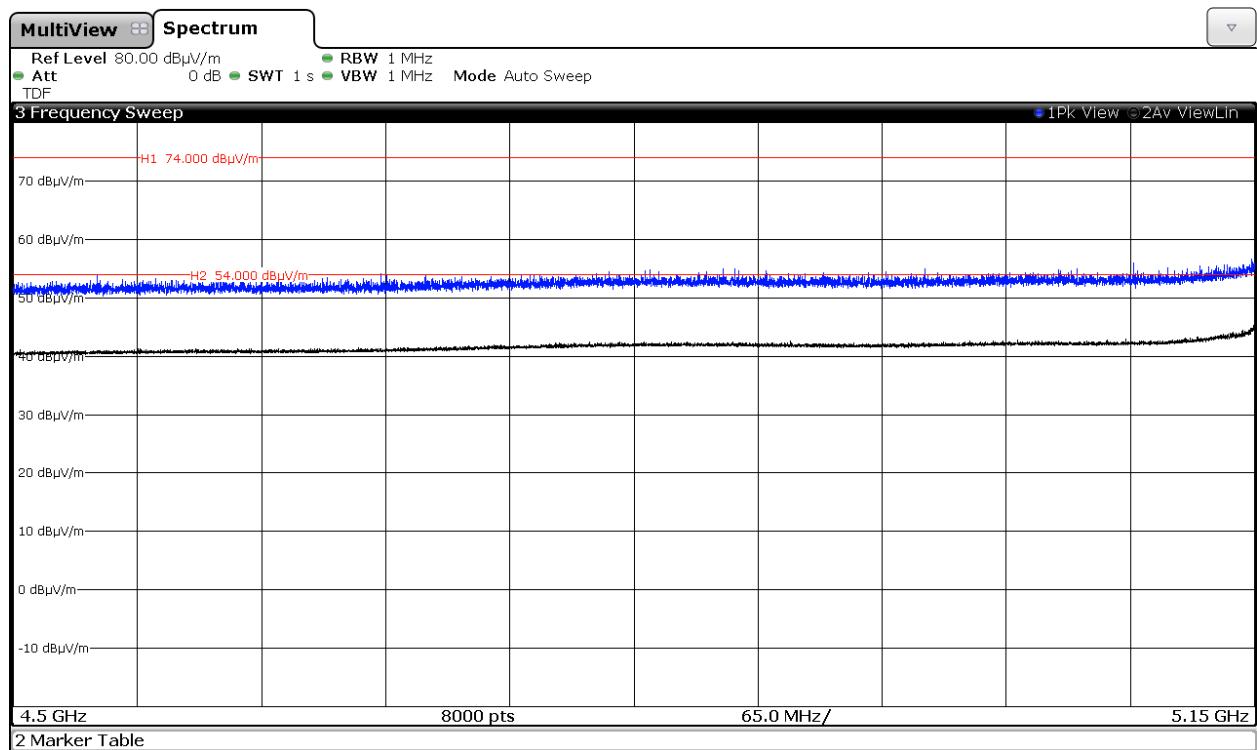


Highest Channel 5230MHz


Chain A

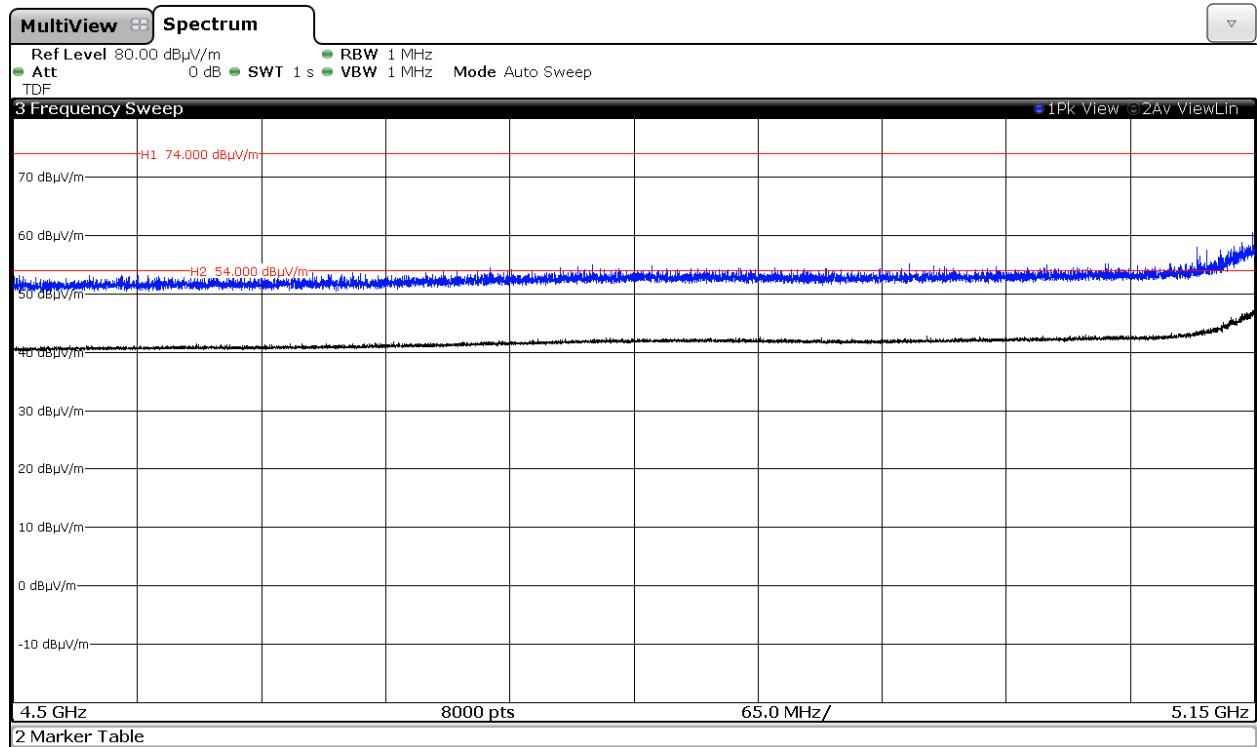

Chain B

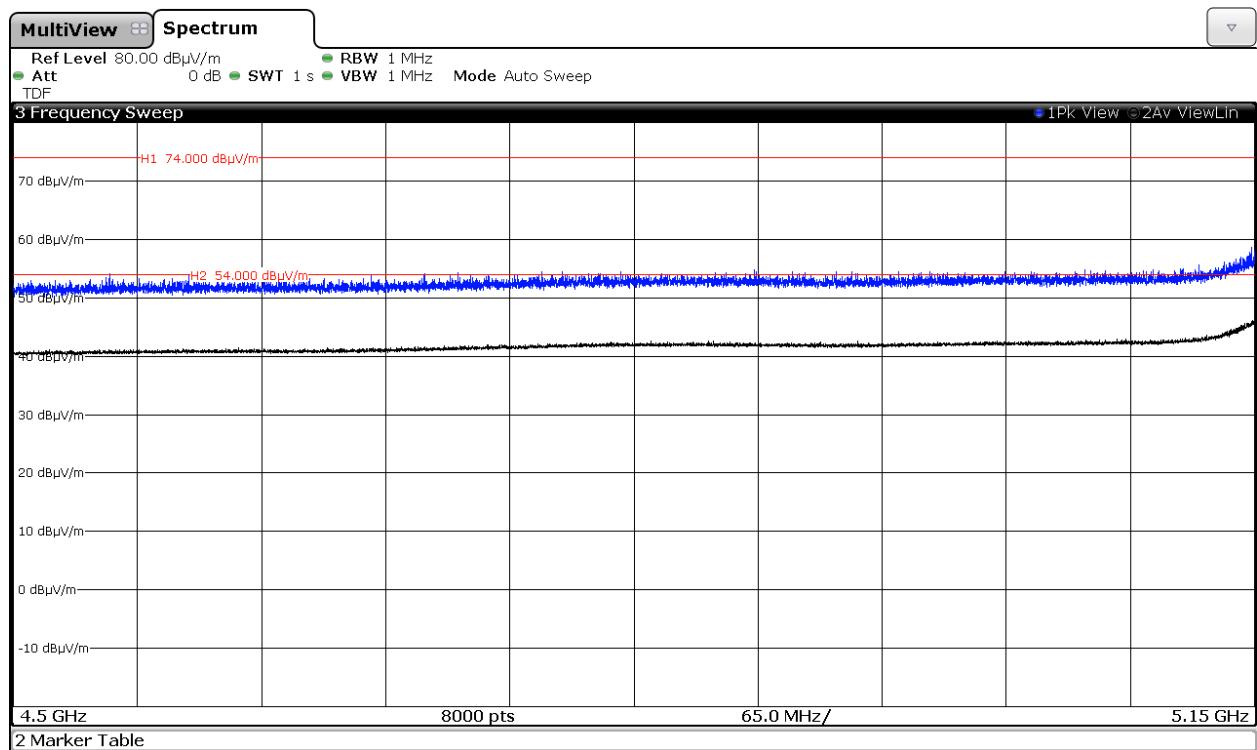


Chain A+B

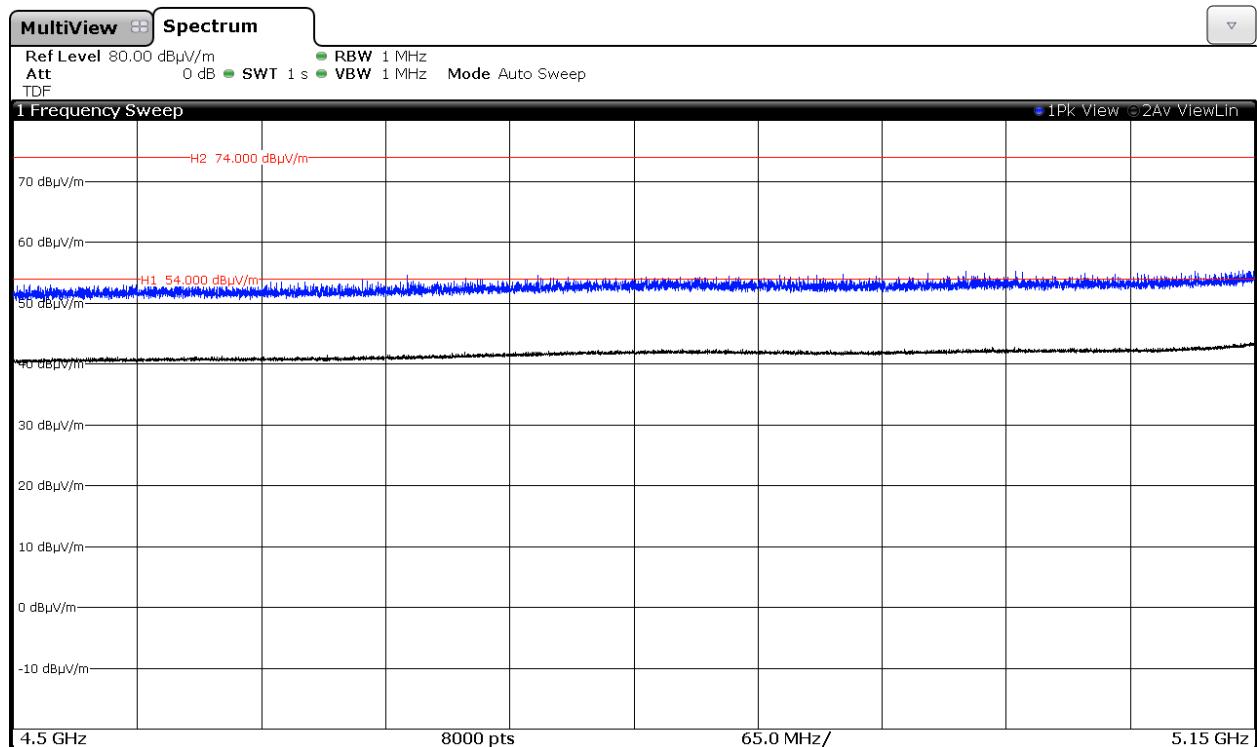


4. WiFi 5GHz 802.11 ac80 mode

Chain A

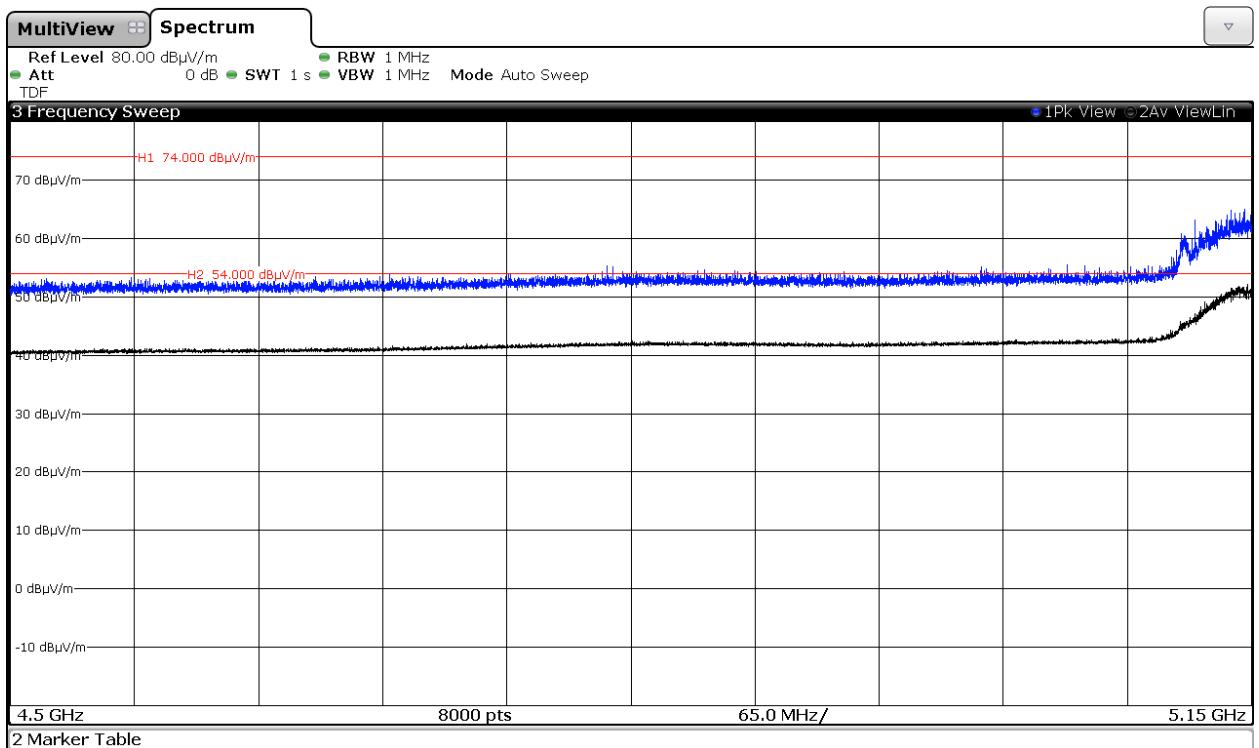

Chain B

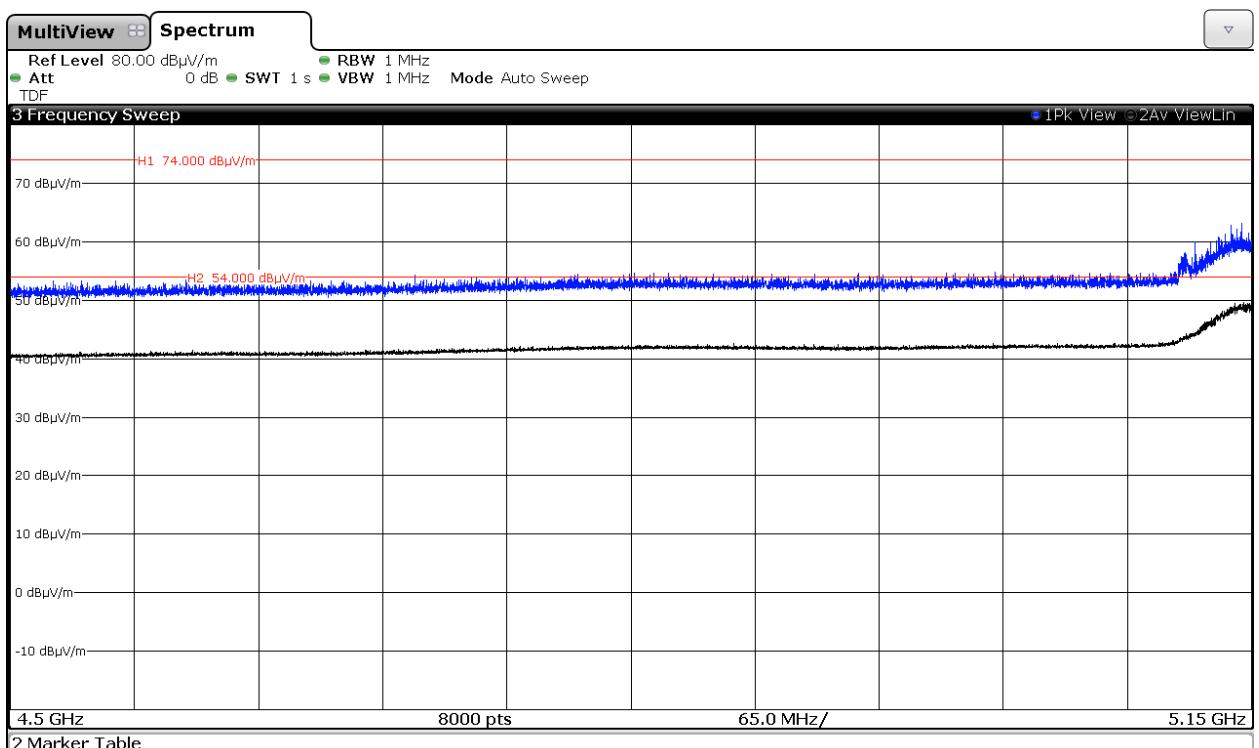

Chain A+B

