

Regulatory WLAN Antenna Information (Template)

(English Language Required for Intel Regulatory Review / Approval)

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand	ODM	Platform model name	Platform type (ex: regular NB, convertible PC, AIO...etc)	SAR minimum separation (mm)						
Lenovo	Quanta	Compliance ID: TP00066C ; Marketing Name: ThinkPad Yoga 11e 3 rd Gen ; ThinkPad Yoga 11e Chromebook 3 rd Gen;	convertible PC	6.21						
Antenna information								Peak gain w/ cable loss (dBi)		
Vendor	Type	Antenna Part number (Main)	Antenna Part number (Aux)	2.4GHz	5.2GHz	5.5GHz	5.8GHz			
WNC	PIFA	DQ6G15G9100	DQ6G15G9200	-1.09	0.51	0.03	-0.56			
Module information (Pls check with "x" when applies, or to fill-in proper model in empty column)										
Model	Form factor and suffixes									
7265 (StP 2)	x	NGW		D2W				17265NGW (Maple Peak)		
		AN		NB		BN		18260NGW (Douglas Peak)		
3165 (StP 1)	x	NGW								
7260 (WP 2)		SDW								
3160 (WP 1)		SDW								
8260 (SfP)		NGW		D2W		NB				
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)				Distance to the end user (mm)					
	2.4GHz	5.2GHz	5.5GHz	5.8GHz						
PIFA	3.24	3.64	4.77	4.97	>8 (generic sku) >5 (low power sku)					
Notes (marked with •)										

- SAR minimum separation (mm)

- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
Main Antenna Antenna P/N : DQ6G15G9100 (81.EKG15.G91)	Wistron Neweb Corporation	PIFA	50 ohm Coaxial. length: 408 mm diameter: 1.13 mm Connector: RF	2400 - 2500 MHz -1.57 dBi (peak)	2400 - 2500 MHz -0.01 dBi (peak)	2400 - 2500 MHz 2.5 max	2400 - 2500 MHz 1.56 dBi (peak)
				5150 - 5350 MHz 0.51 dBi (peak)	5150 - 5350 MHz 2.76 dBi (peak)	5150 - 5350 MHz 2.5 max	5150 - 5350 MHz 2.25 dBi (peak)
				5470 - 5725 MHz 0.03 dBi (peak)	5470 - 5725 MHz 2.35 dBi (peak)	5470 - 5725 MHz 2.5 max	5470 - 5725 MHz 2.32 dBi (peak)
				5725 - 5850 MHz -0.56 dBi (peak)	5725 - 5850 MHz 1.81 dBi (peak)	5725 - 5850 MHz 2.5 max	5725 - 5850 MHz 2.37 dBi (peak)
Aux Antenna Antenna P/N : DQ6G15G9200 (81.EKG15.G92)	Wistron Neweb Corporation	PIFA	50 ohm Coaxial. length: 515 mm diameter: 1.13 mm Connector: RF	2400 - 2500 MHz -1.09 dBi (peak)	2400 - 2500 MHz 0.82 dBi (peak)	2400 - 2500 MHz 2.5 max	2400 - 2500 MHz 1.91 dBi (peak)
				5150 - 5350 MHz -1.53 dBi (peak)	5150 - 5350 MHz 1.25 dBi (peak)	5150 - 5350 MHz 2.5 max	5150 - 5350 MHz 2.78 dBi (peak)
				5470 - 5725 MHz -1.20 dBi (peak)	5470 - 5725 MHz 1.67 dBi (peak)	5470 - 5725 MHz 2.5 max	5470 - 5725 MHz 2.87 dBi (peak)
				5725 - 5850 MHz -1.36 dBi (peak)	5725 - 5850 MHz 1.56 dBi (peak)	5725 - 5850 MHz 2.5 max	5725 - 5850 MHz 2.92 dBi (peak)

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V


Antenna Peak Gain Table:

	Tx1 antenna		Tx2 (or Rx2) Antenna	
Frequency (MHz)	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)
2400	-2.75	-2.17	-2.13	-1.09
2450	-3.03	-1.62	-2.03	-1.75
2500	-2.89	-1.57	-1.83	-2.37
5150	0.37	-3.69	-2.45	-2.46
5250	0.51	-3.86	-1.53	-1.95
5350	0.28	-2.34	-1.55	-1.70
5470	0.03	-1.78	-1.53	-1.50
5600	-0.85	-1.40	-1.20	-1.25
5725	-1.09	-1.92	-1.78	-1.73
5785	-0.92	-1.74	-1.63	-1.76
5850	-0.56	-1.65	-1.60	-1.36

Section 2. Dimensioned Photos or Drawings of Antennas


Include a dimensioned photo and dimensioned drawing of Tx1 antenna here.

Tx1 Antenna Dimensioned Drawing:

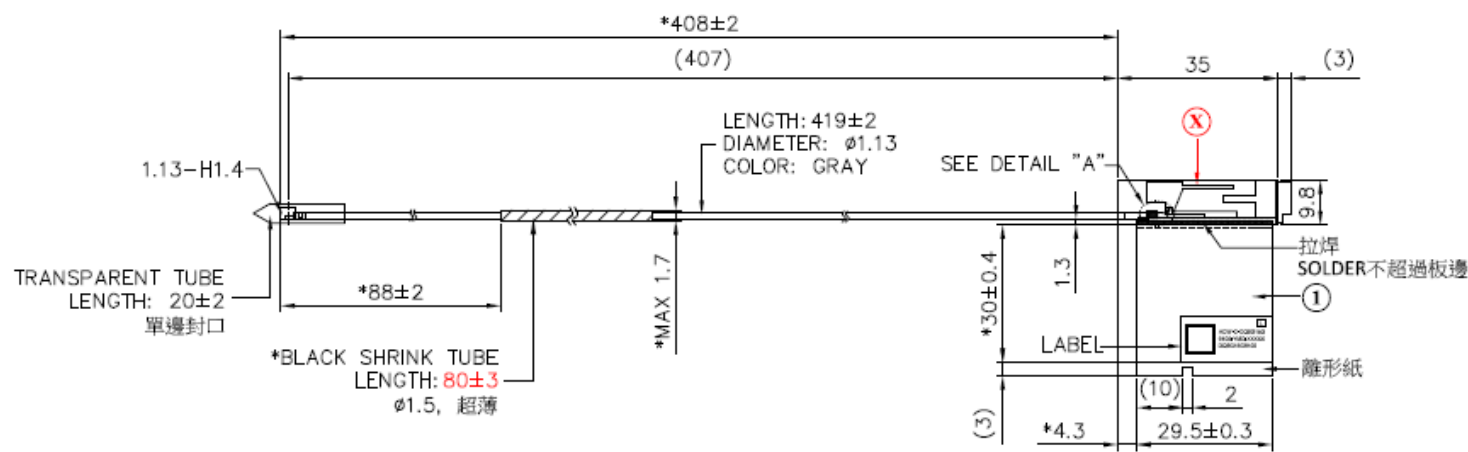


Tx1 Antenna Photo:

Main Front (Near & Far)

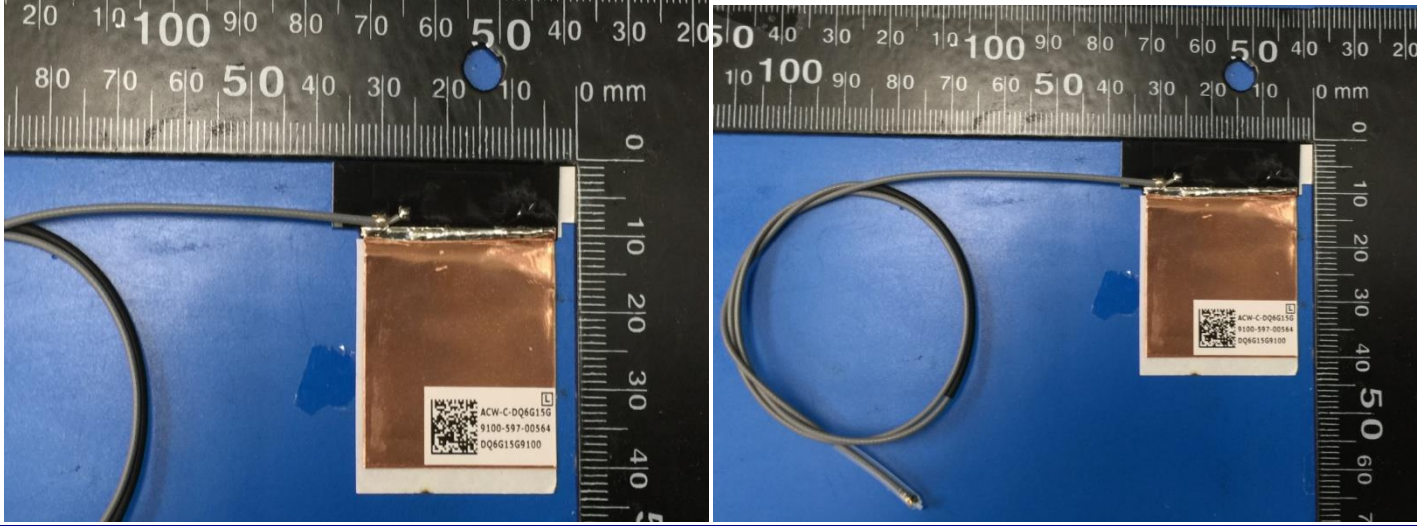

Main Back (Near & Far)

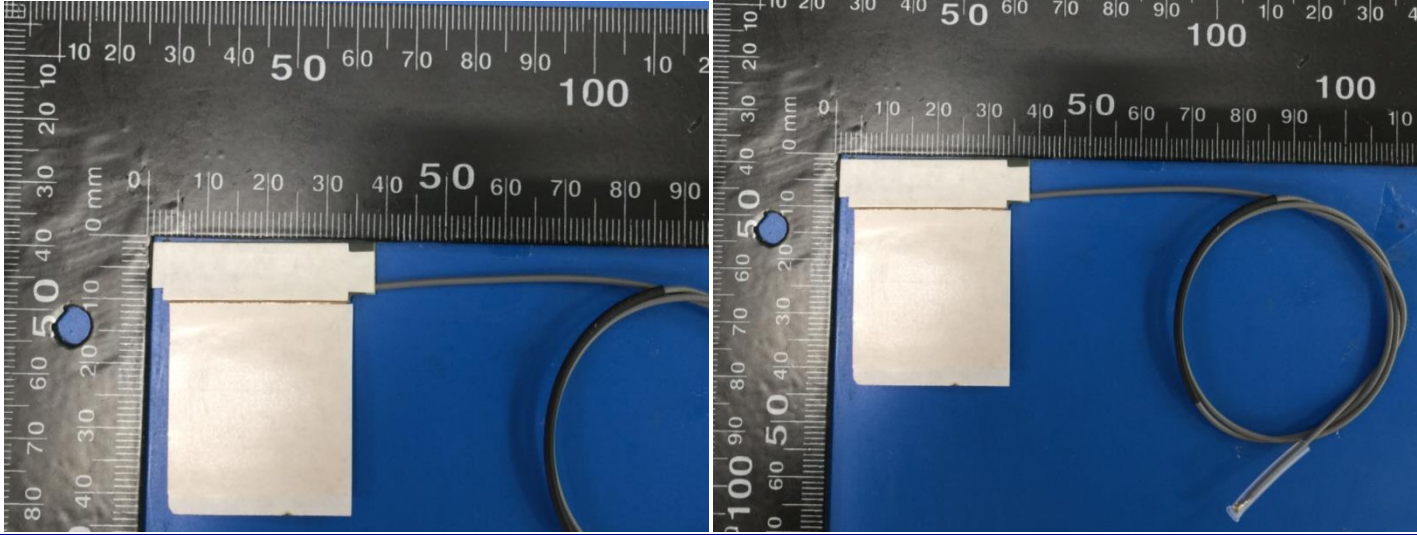


Technical drawing of a cable assembly with dimensions and labels:

- Overall length: 515 ± 2
- Section (3) dimensions:
 - 35
 - 9.8
 - 1.3
 - 30 ± 0.4
 - 29.5 $\pm$ 0.3
 - 2
 - 4.3 (3)
- Labels:
 - SEE DETAIL "A"
 - 拉焊 (Solder)
 - SOLDER 不超過板邊 (Solder not exceeding board edge)
 - ①
 - 離形紙 (Release paper)
 - LABEL
- Black shrink tube:
 - LENGTH: 526 ± 2
 - DIAMETER: $\phi 1.13$
 - COLOR: BLACK
 - *BLACK SHRINK TUBE LENGTH: 80 ± 3
 - $\phi 1.5$, 超薄 (Ultra-thin)
- Transparent tube:
 - LENGTH: 20 ± 2
 - 單邊封口 (Single edge sealing)
- Other dimensions:
 - 202 $\pm$ 2
 - 1.13-H1.4
 - MAX 1.7

Include front view photo of all 2 antennas here.

Antenna Manufacturer: WNC


Antenna Part Number: DQ6G15G9100 (Tx1), DQ6G15G9200 (Tx2 or Rx2)

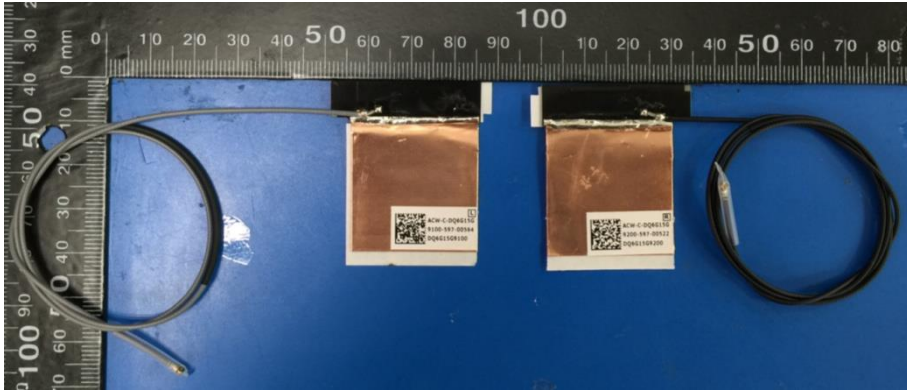

Include back view photo of all 2 antennas here.

Antenna Manufacturer: WNC


Antenna Part Number: DQ6G15G9100 (Tx1), DQ6G15G9200 (Tx2 or Rx2)

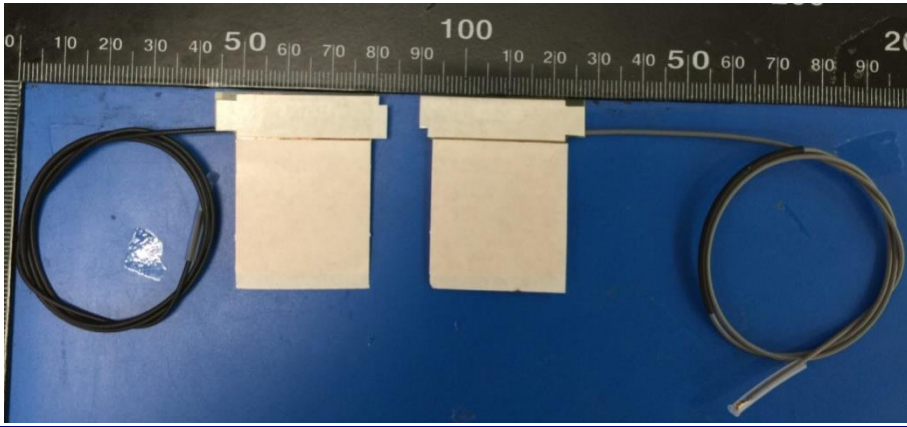


Section 3. Radiation characteristics of antennae Loaded in Host Platform

2400-2500MHz radiation characteristic


Tx1 antenna: 2400 MHz

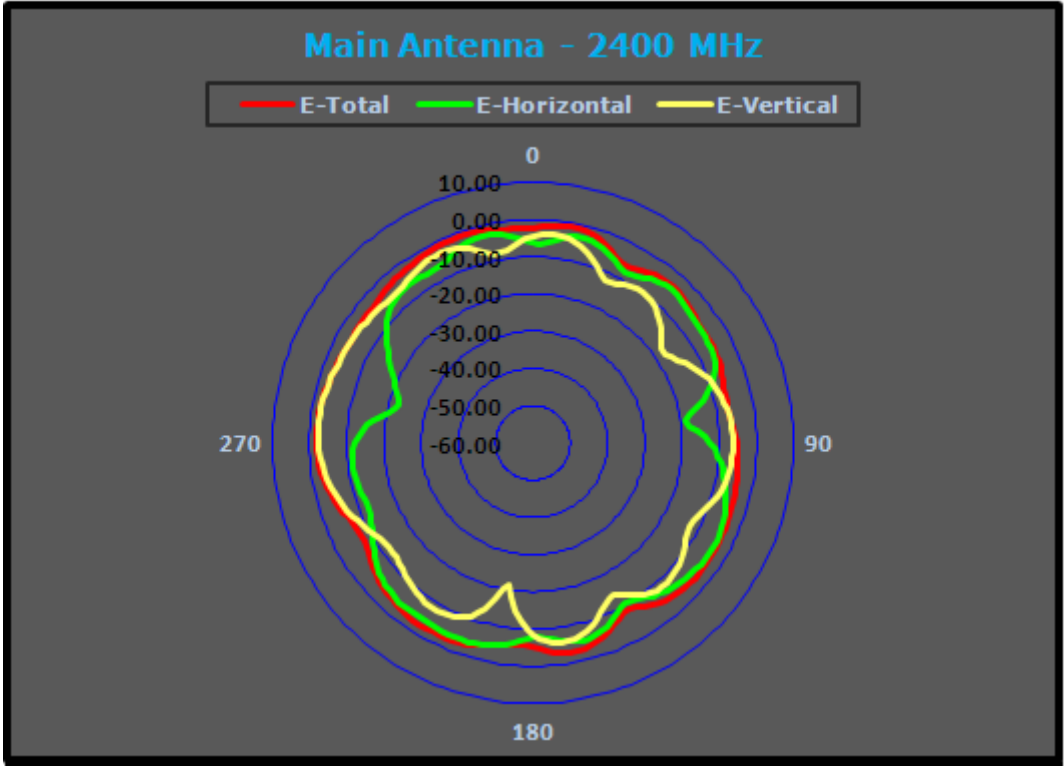

Center Frequency	2400 MHz
Horizontal (dBi) peak	-2.75
Vertical (dBi) peak	-2.17

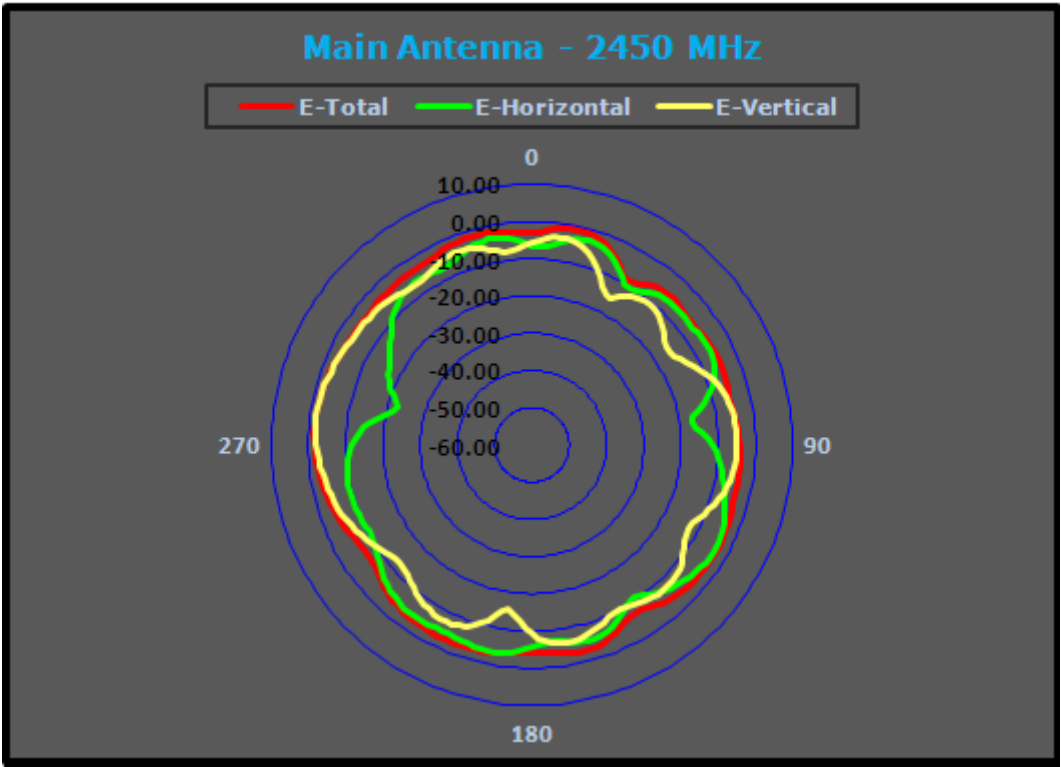


Center Frequency	2450 MHz
Horizontal (dBi) peak	-3.03
Vertical (dBi) peak	-1.62

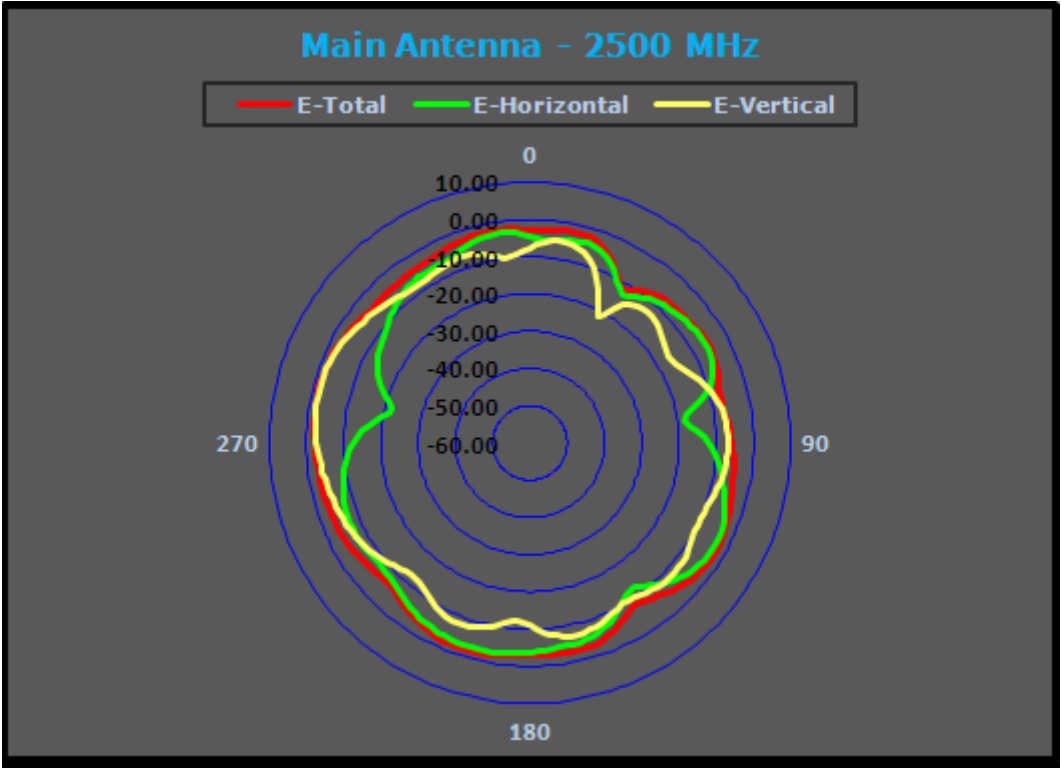


Center Frequency	2500 MHz
Horizontal (dBi) peak	-2.89
Vertical (dBi) peak	-1.57

Tx2 (or Rx2) antenna: 2400 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

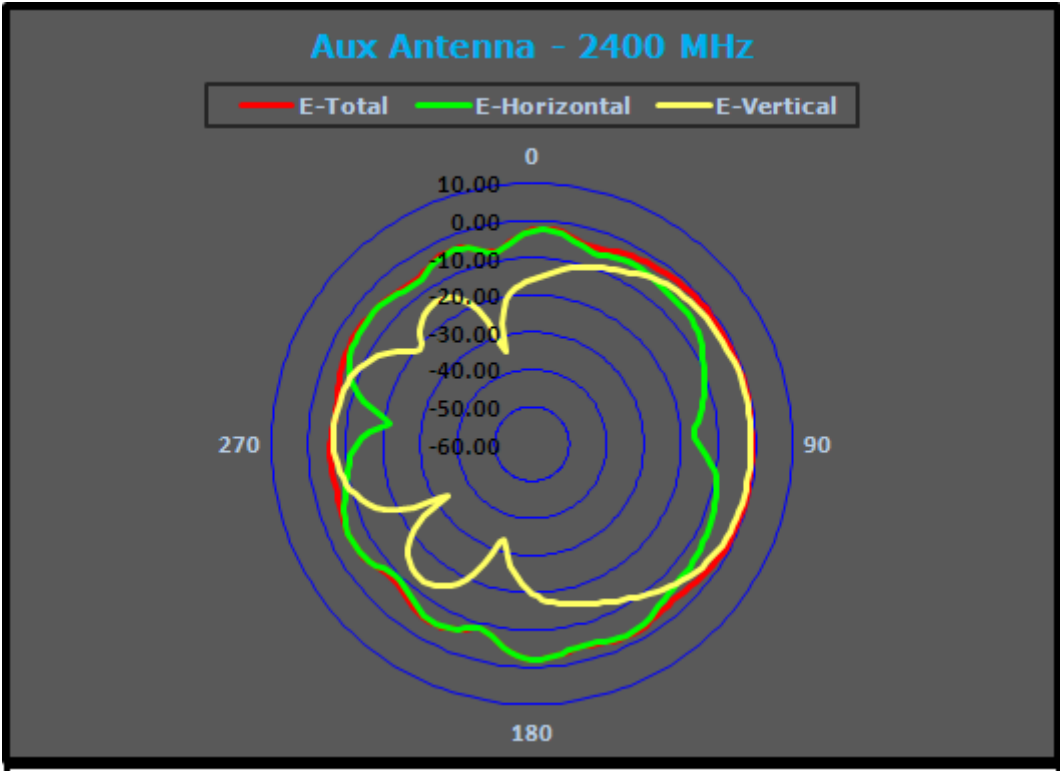


Center Frequency	2400 MHz
Horizontal (dBi) peak	-2.13
Vertical (dBi) peak	-1.09

Tx2 (or Rx2) antenna: 2450 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

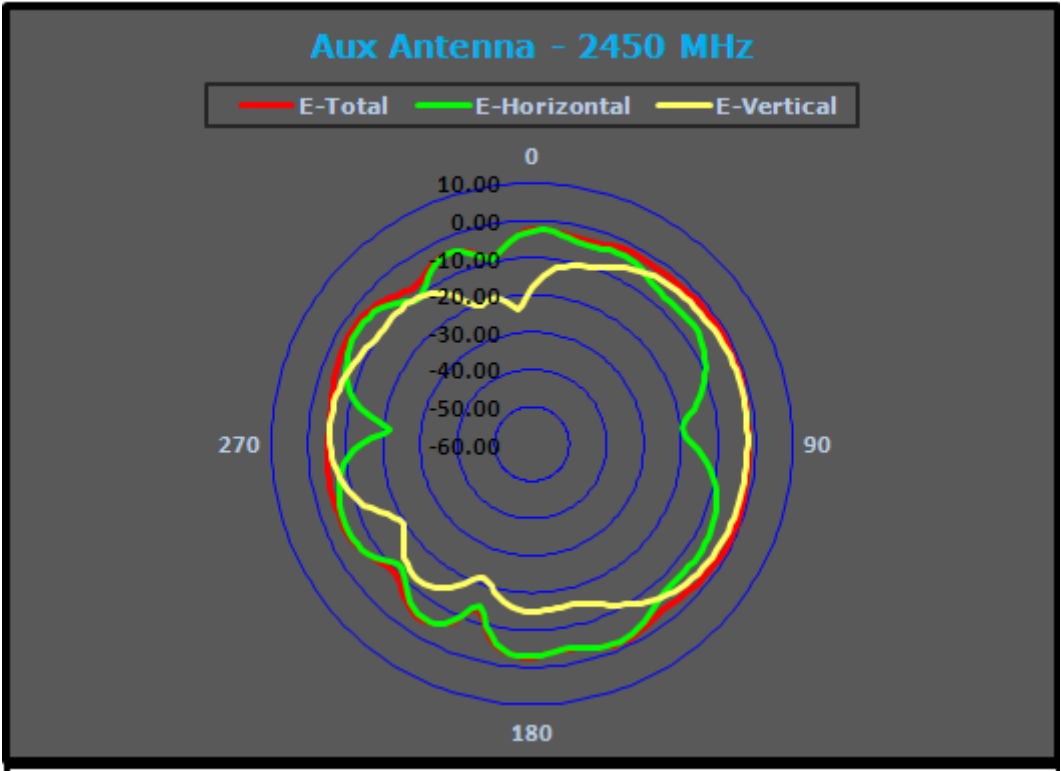

Center Frequency	2450 MHz
Horizontal (dBi) peak	-2.03
Vertical (dBi) peak	-1.75


Tx2 (or Rx2) antenna: 2500 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

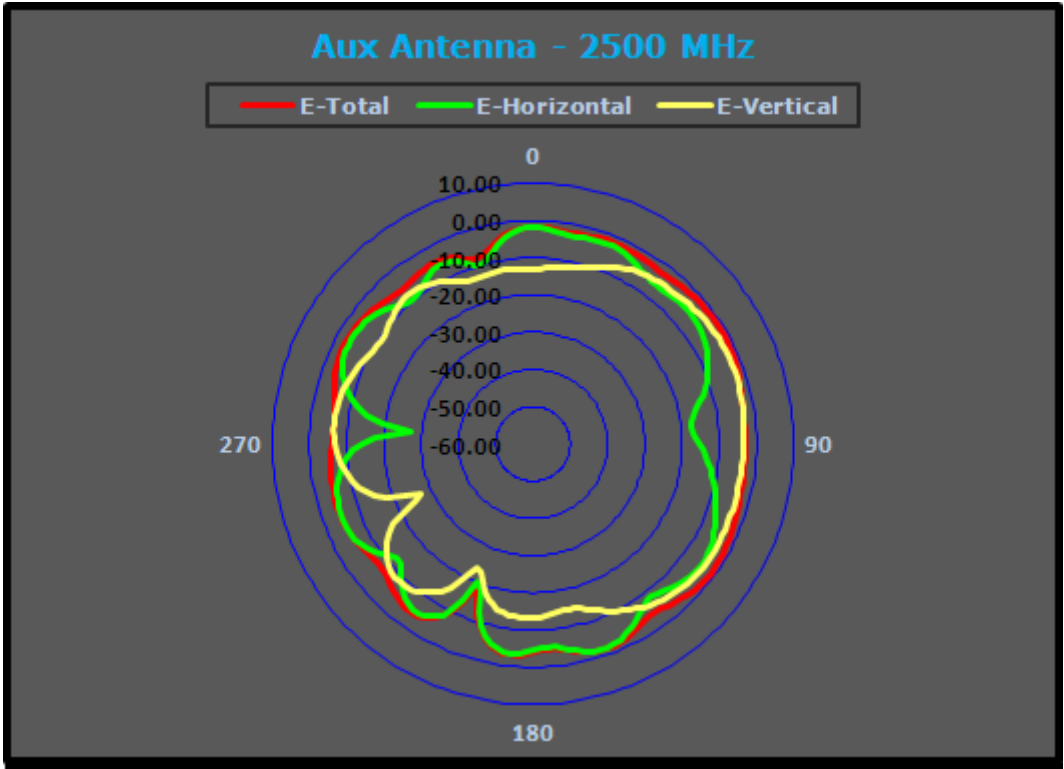


Center Frequency	2500 MHz
Horizontal (dBi) peak	-1.83
Vertical (dBi) peak	-2.37

5150-5350 MHz radiation characteristic


Tx1 antenna: 5150 MHz

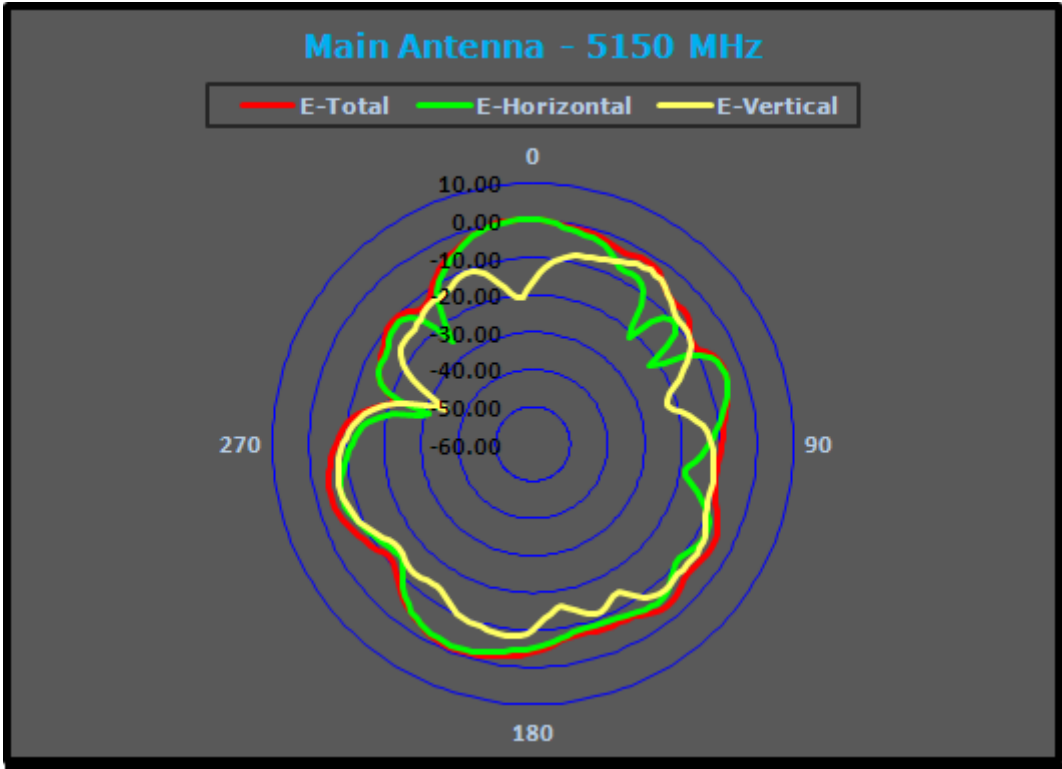

Center Frequency	5150 MHz
Horizontal (dBi) peak	0.37
Vertical (dBi) peak	-3.69

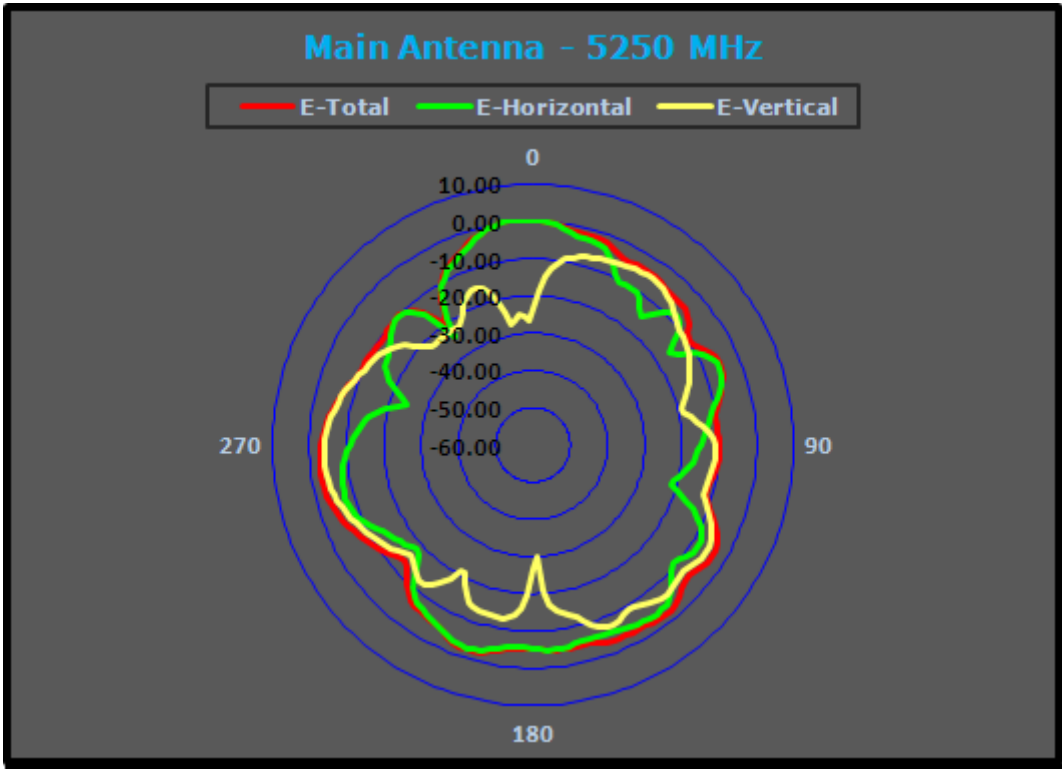


Center Frequency	5250 MHz
Horizontal (dBi) peak	0.51
Vertical (dBi) peak	-3.86

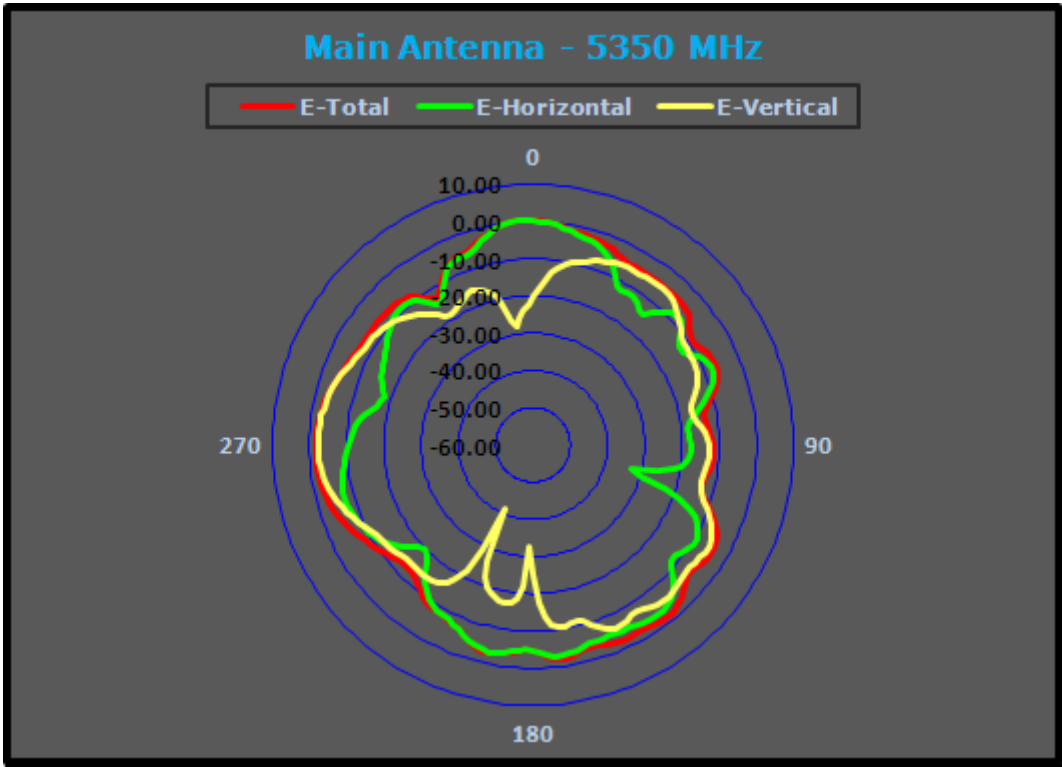


Center Frequency	5350 MHz
Horizontal (dBi) peak	0.28
Vertical (dBi) peak	-2.34

Tx2 (or Rx2) antenna: 5150 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

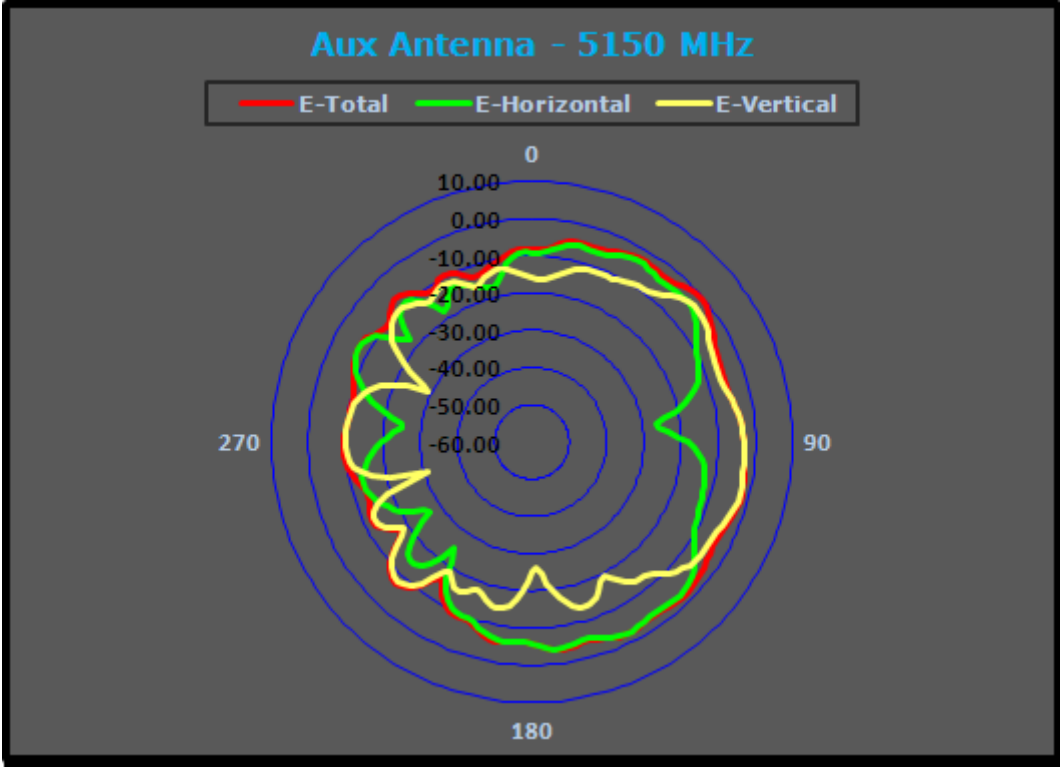


Center Frequency	5150 MHz
Horizontal (dBi) peak	-2.45
Vertical (dBi) peak	-2.46

Tx2 (or Rx2) antenna: 5250 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

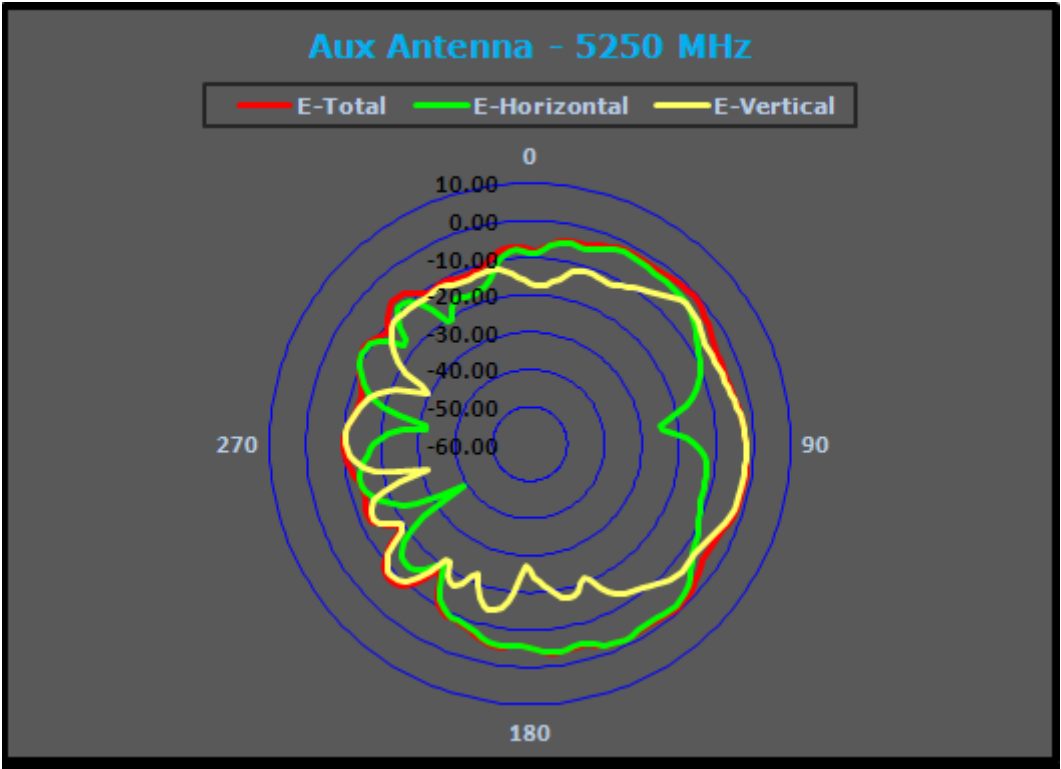

Center Frequency	5250 MHz
Horizontal (dBi) peak	-1.53
Vertical (dBi) peak	-1.95


Tx2 (or Rx2) antenna: 5350 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

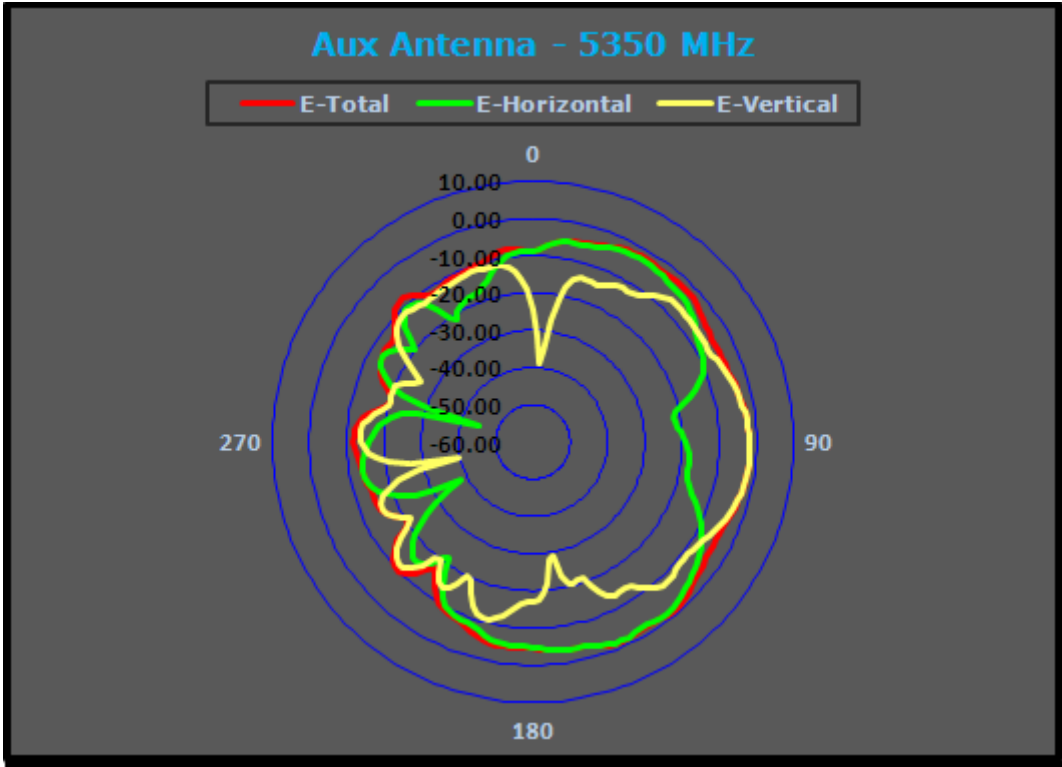


Center Frequency	5350 MHz
Horizontal (dBi) peak	-1.55
Vertical (dBi) peak	-1.70

5470-5725MHz radiation characteristic


Tx1 antenna: 5470 MHz

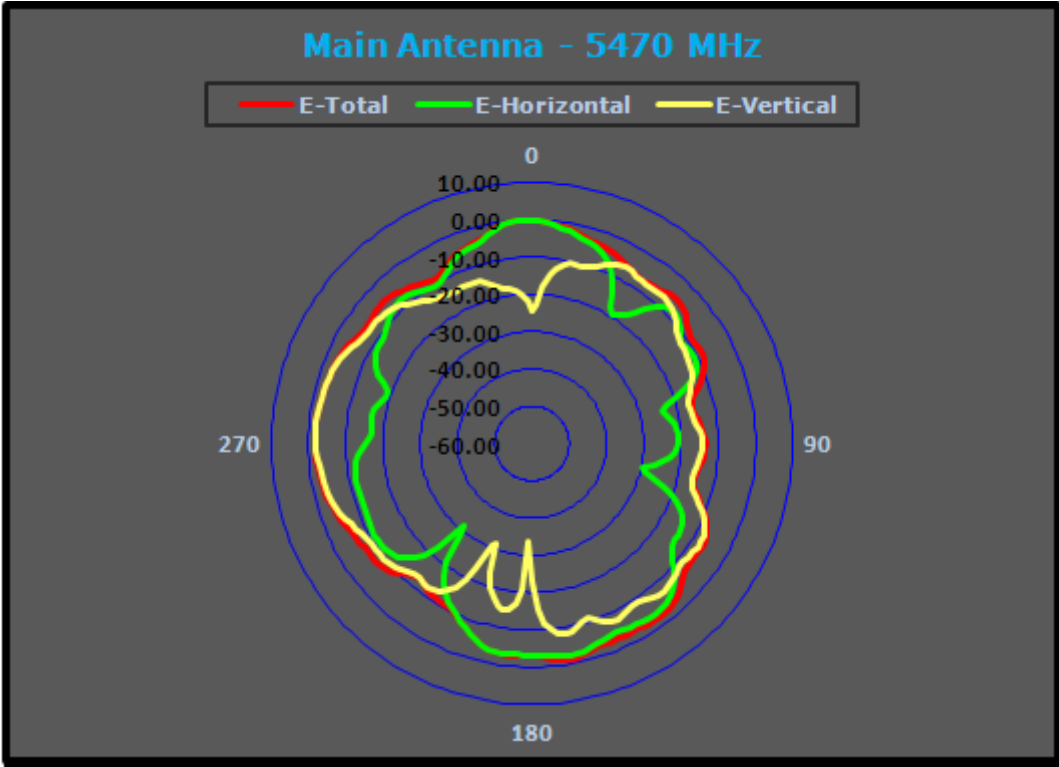

Center Frequency	5470 MHz
Horizontal (dBi) peak	0.03
Vertical (dBi) peak	-1.78

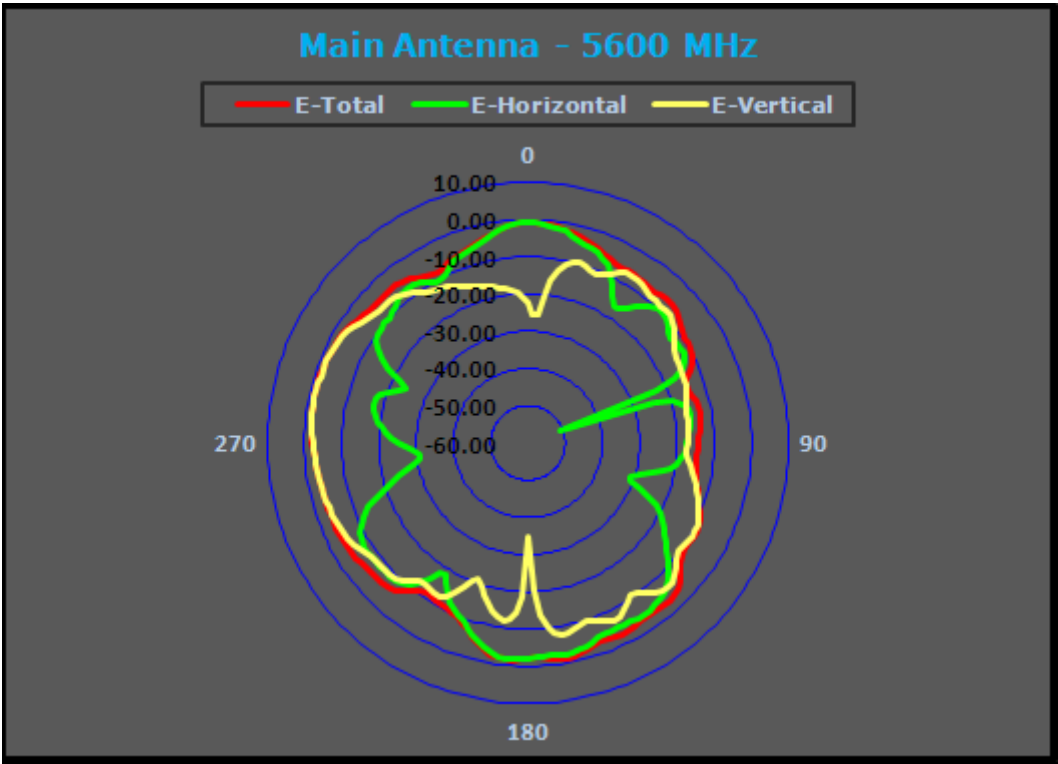


Center Frequency	5600 MHz
Horizontal (dBi) peak	-0.85
Vertical (dBi) peak	-1.40

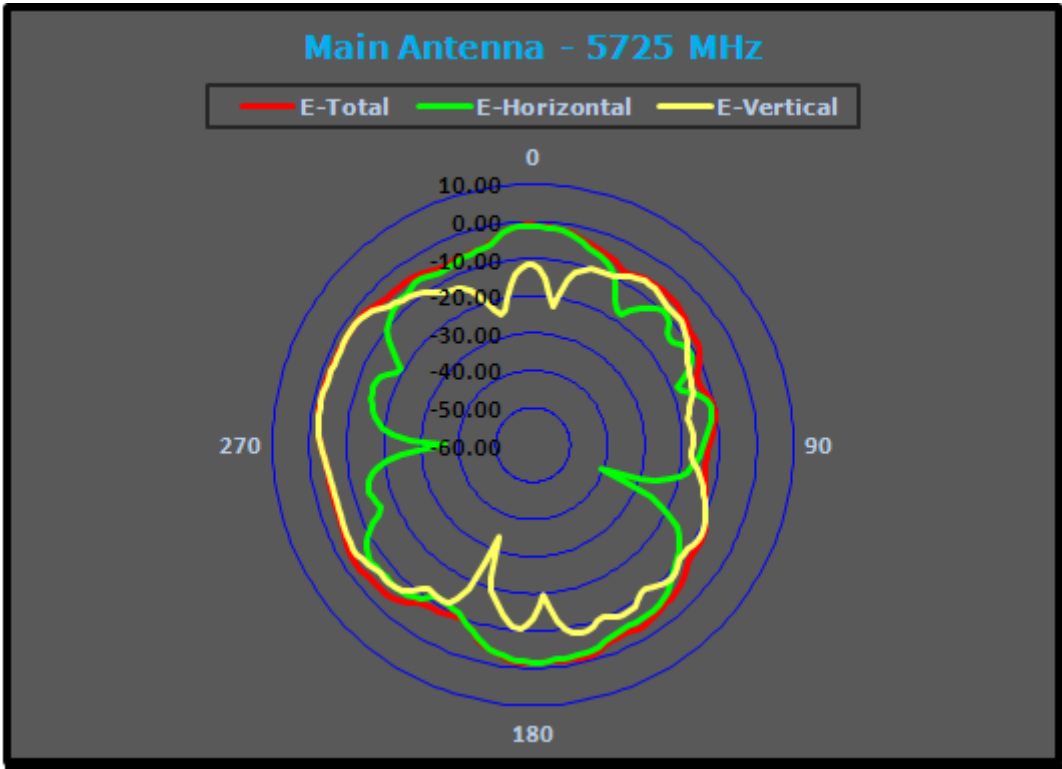


Center Frequency	5725 MHz
Horizontal (dBi) peak	-1.09
Vertical (dBi) peak	-1.92

Tx2 (or Rx2) antenna: 5470 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

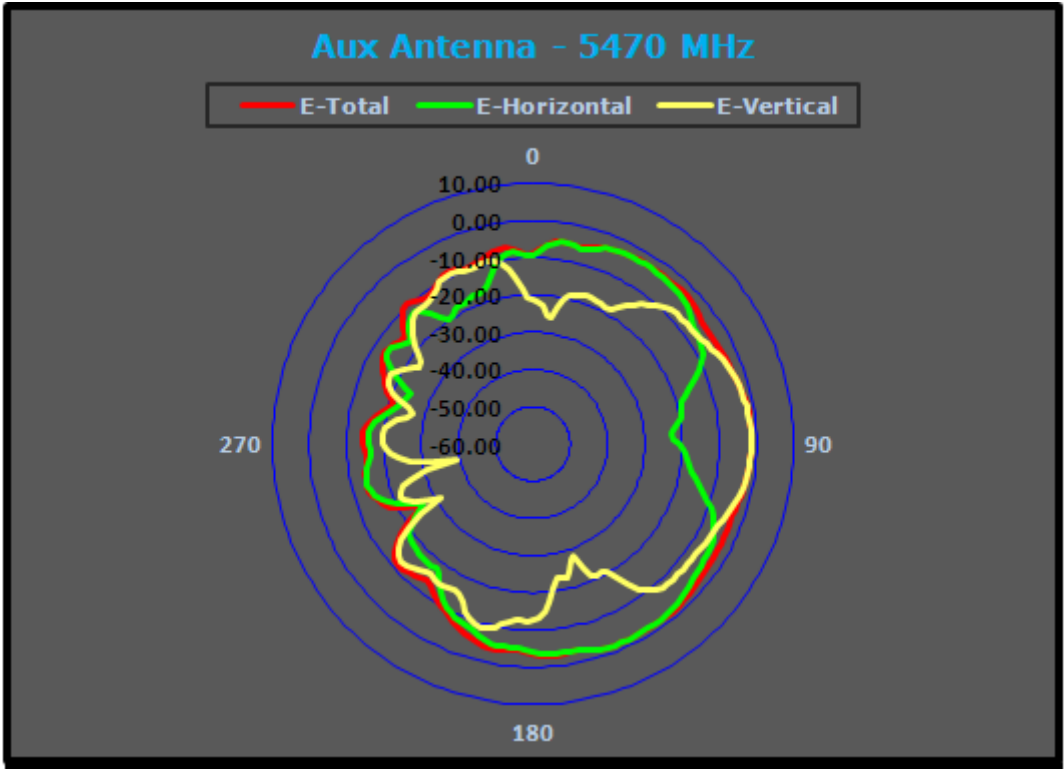


Center Frequency	5470 MHz
Horizontal (dBi) peak	-1.53
Vertical (dBi) peak	-1.50

Tx2 (or Rx2) antenna: 5600 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

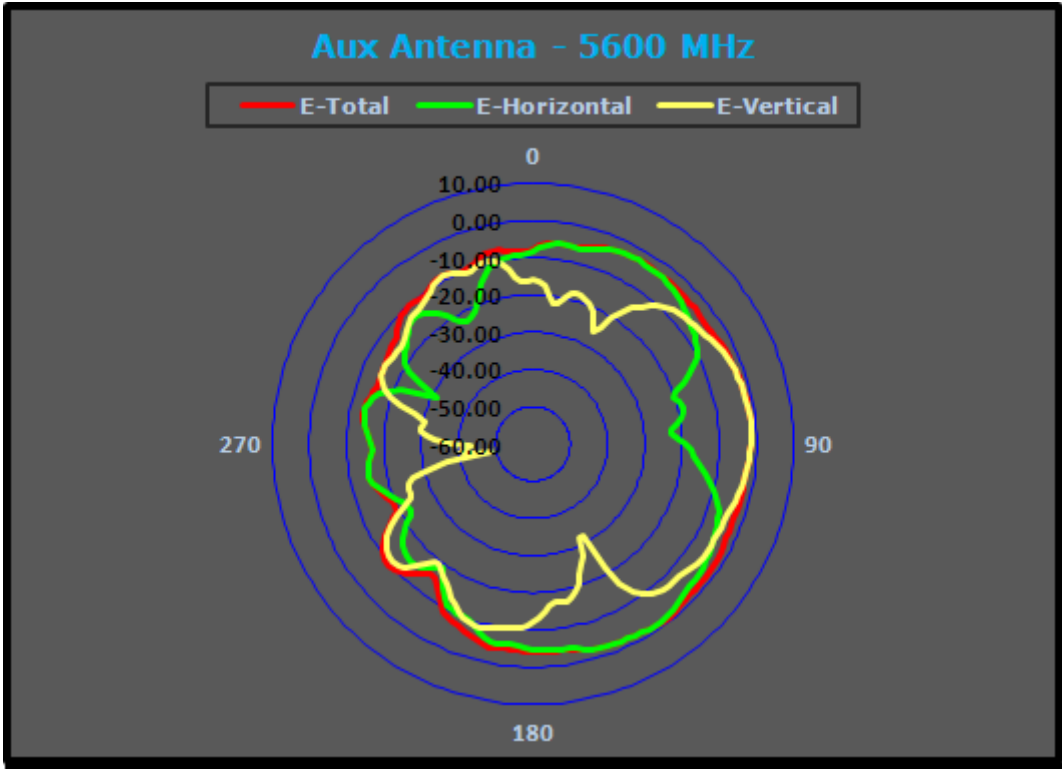

Center Frequency	5600 MHz
Horizontal (dBi) peak	-1.20
Vertical (dBi) peak	-1.25


Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

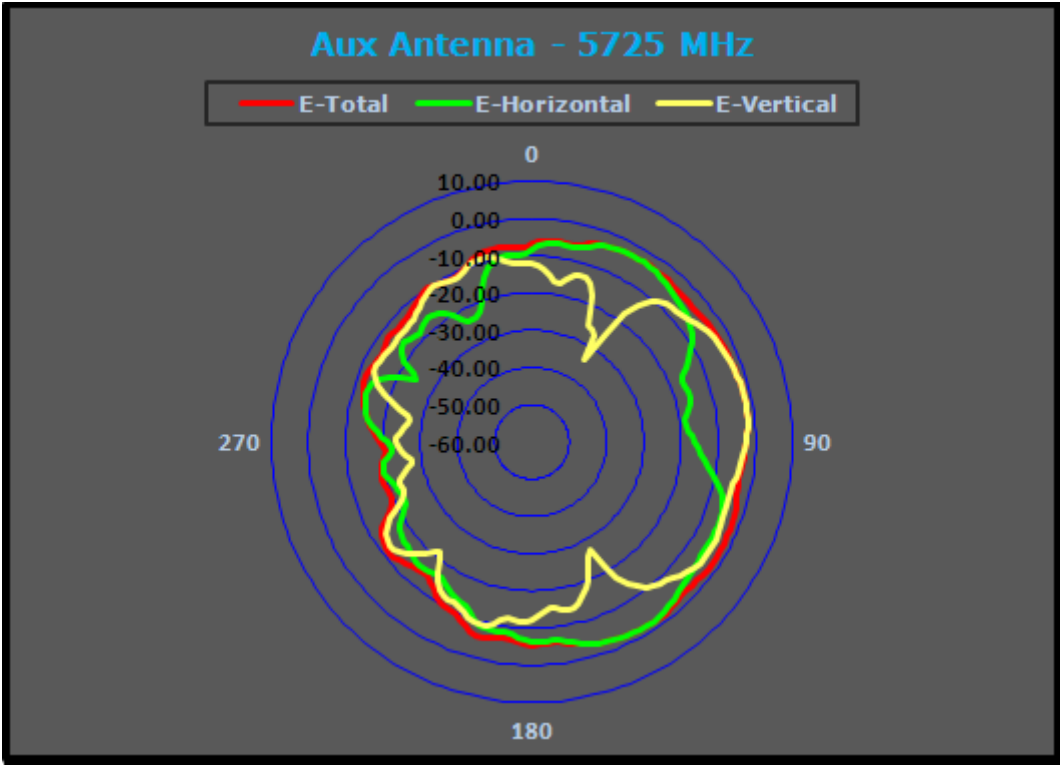


Center Frequency	5725 MHz
Horizontal (dBi) peak	-1.78
Vertical (dBi) peak	-1.73

5725-5850 MHz radiation characteristic


Tx1 antenna: 5725 MHz

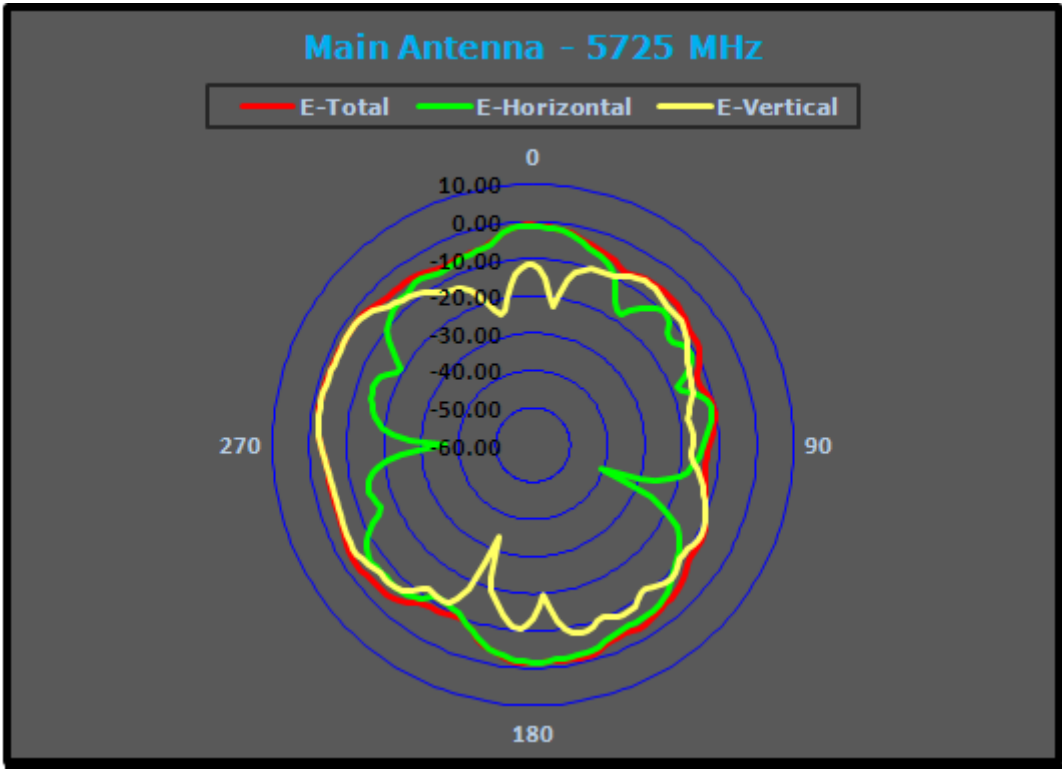

Center Frequency	5725 MHz
Horizontal (dBi) peak	-1.09
Vertical (dBi) peak	-1.92

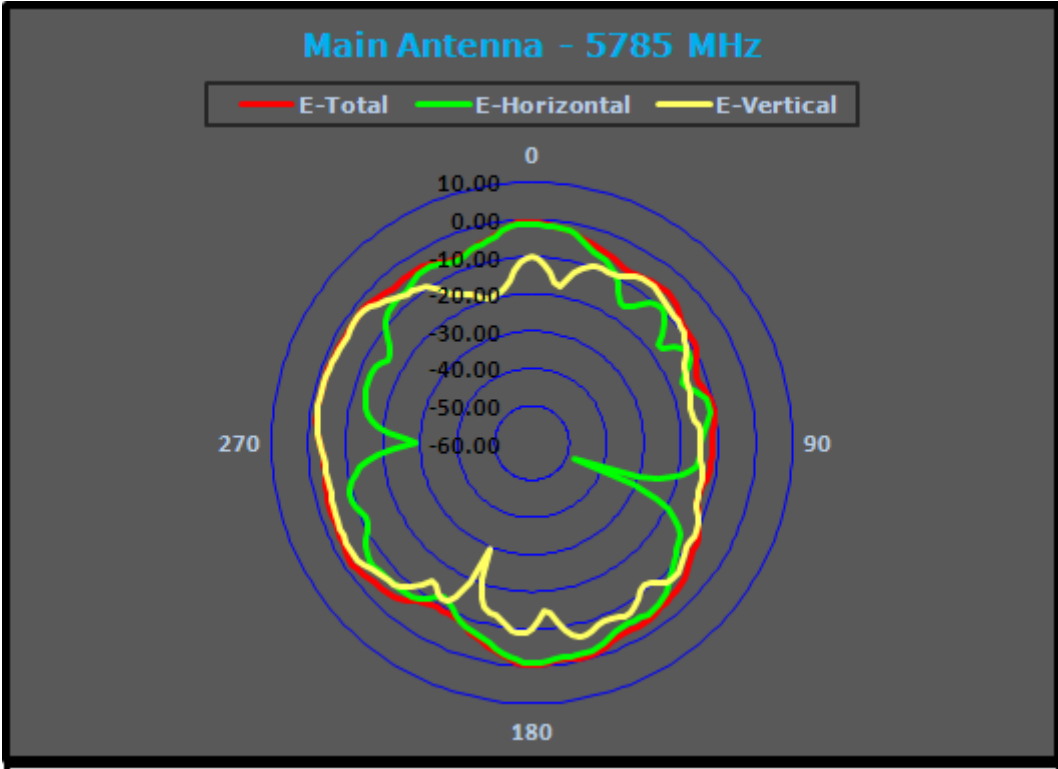


Center Frequency	5785 MHz
Horizontal (dBi) peak	-0.92
Vertical (dBi) peak	-1.74

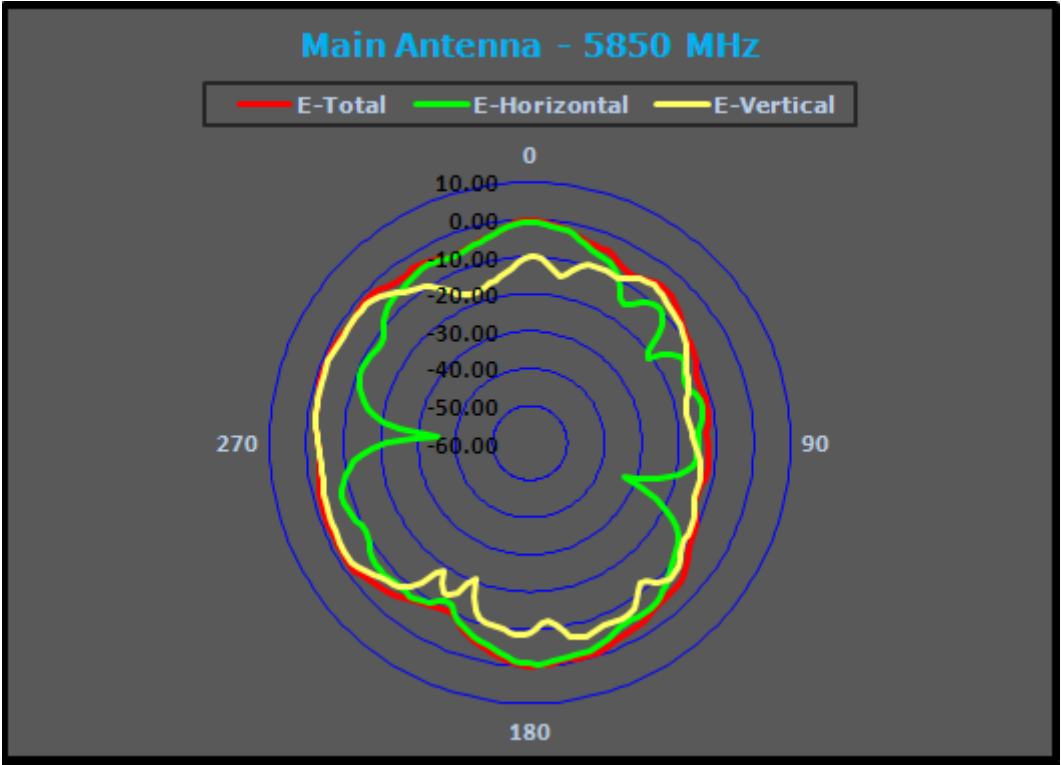


Center Frequency	5850 MHz
Horizontal (dBi) peak	-0.56
Vertical (dBi) peak	-1.65

Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

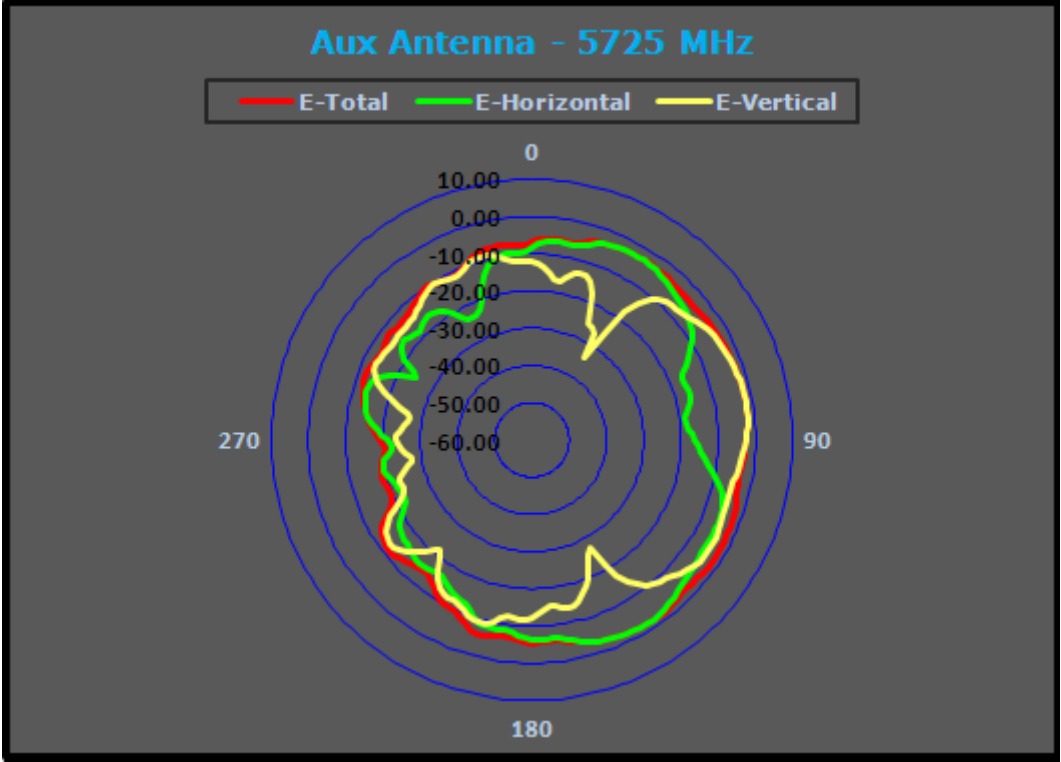


Center Frequency	5725 MHz
Horizontal (dBi) peak	-1.78
Vertical (dBi) peak	-1.73

Tx2 (or Rx2) antenna: 5785 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

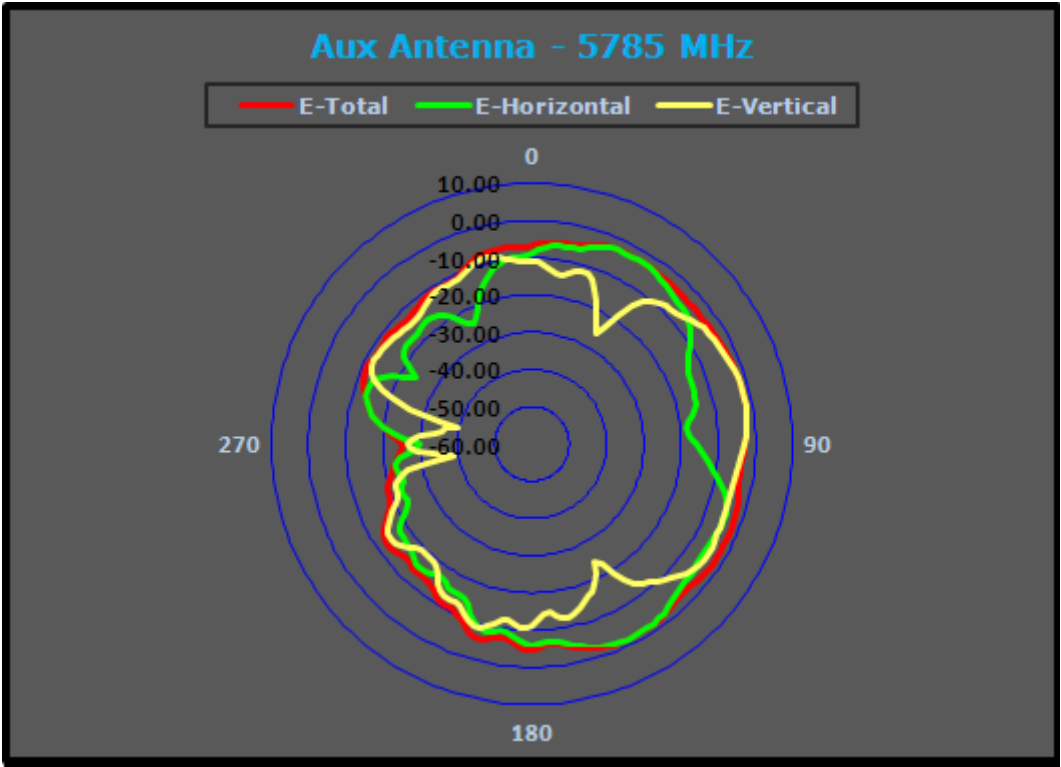

Center Frequency	5785 MHz
Horizontal (dBi) peak	-1.63
Vertical (dBi) peak	-1.76

Tx2 (or Rx2) antenna: 5850 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

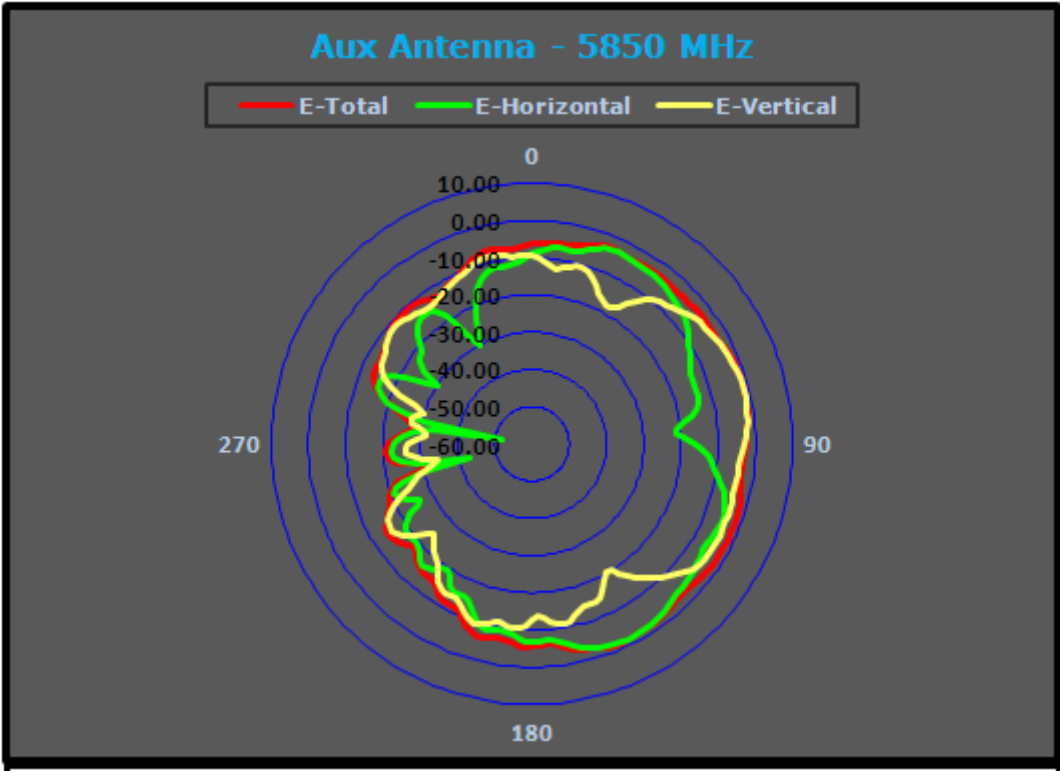


Center Frequency	5850 MHz
Horizontal (dBi) peak	-1.60
Vertical (dBi) peak	-1.36

Section 4. Host Platform Information



OEM / ODM Host platform: (Quanta / Compliance ID: TP00066C ; Marketing Name: ThinkPad Yoga 11e 3rd Gen ; ThinkPad Yoga 11e Chromebook 3rd Gen;) platform correlated to antenna data

Rating Label Photo:

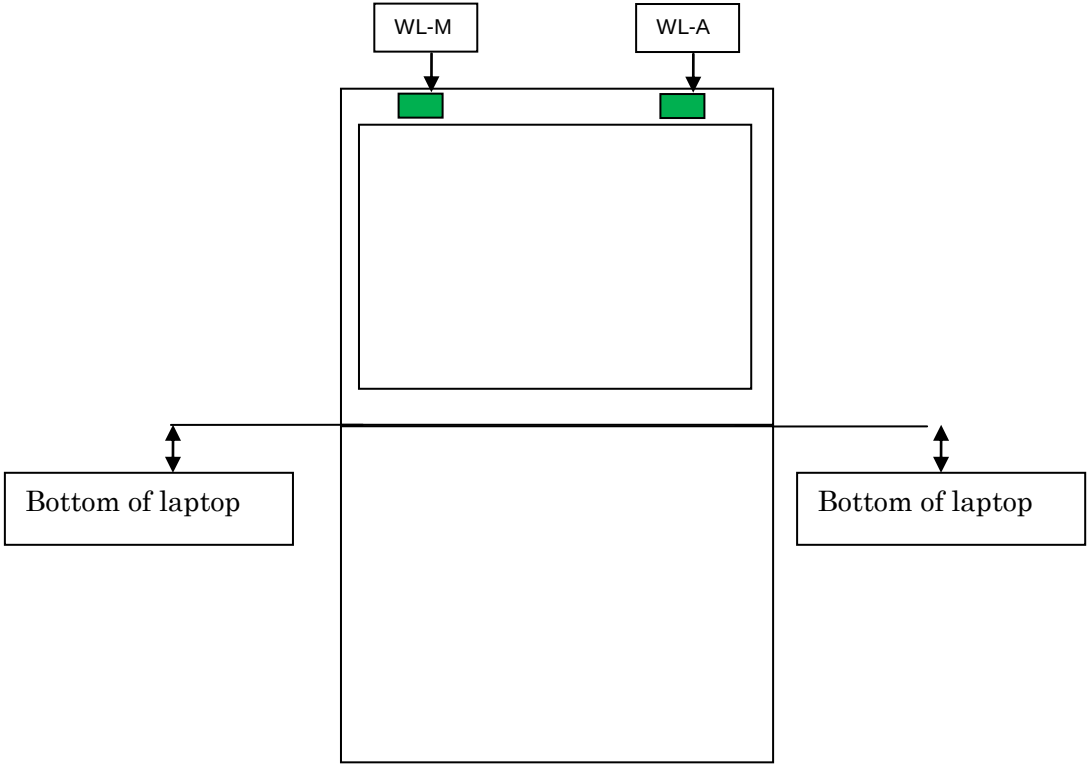

Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo(s) or dimensioned drawing(s)** of Tx1, Tx2 and Tx3 antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

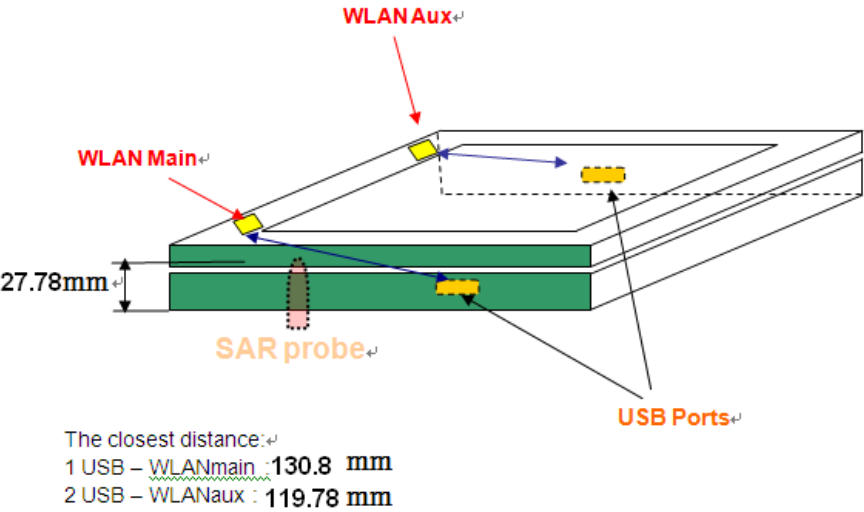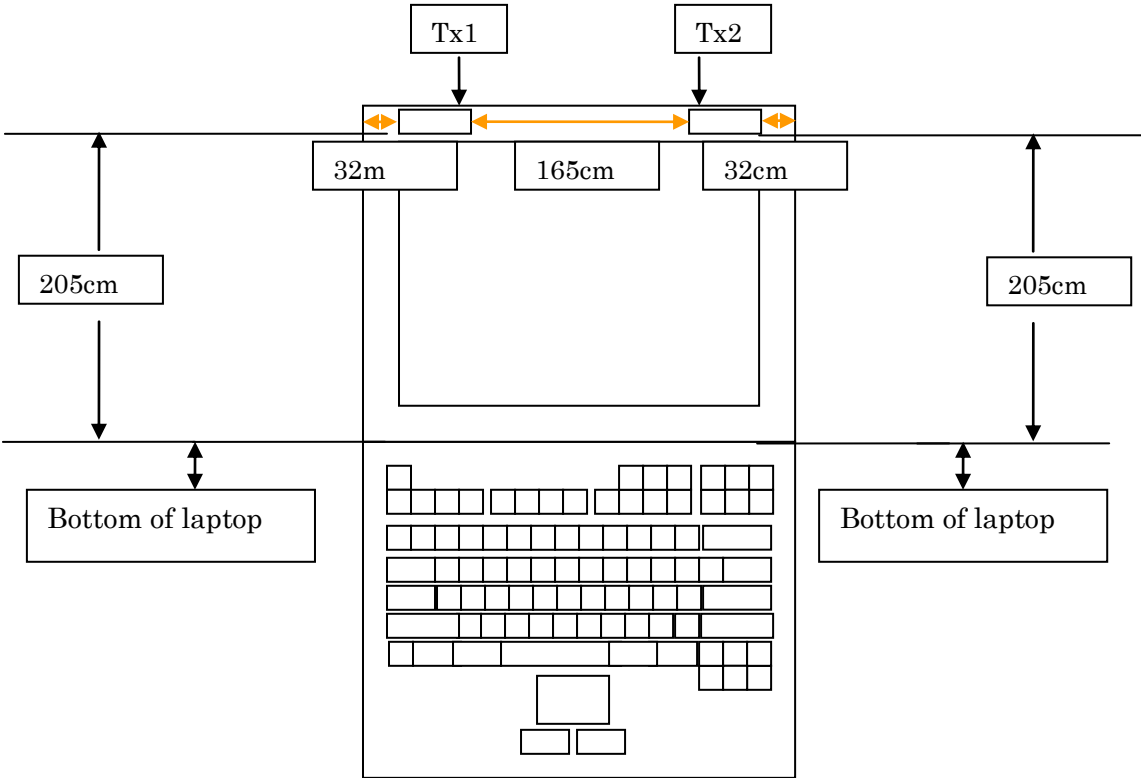

Section 6. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, and ankle). For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

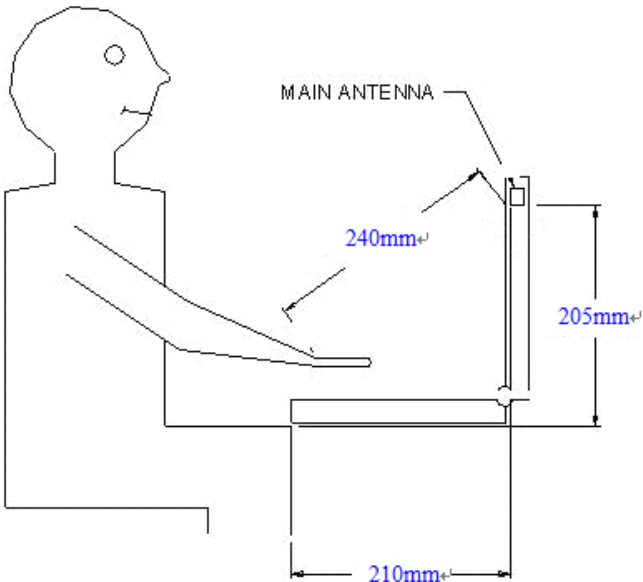


Figure-3:
Tablet PL (Primary Landscape)

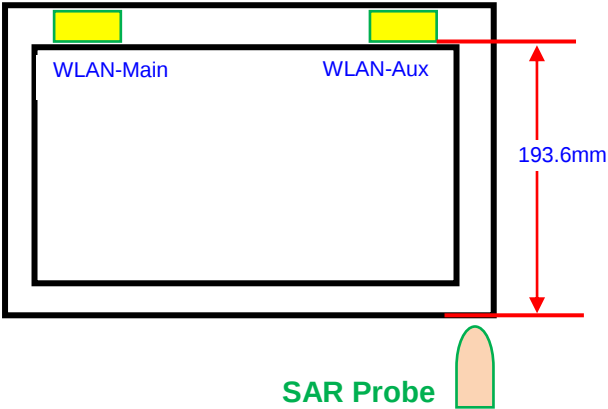


Figure-5:
Tablet SL (Secondary Landscape)

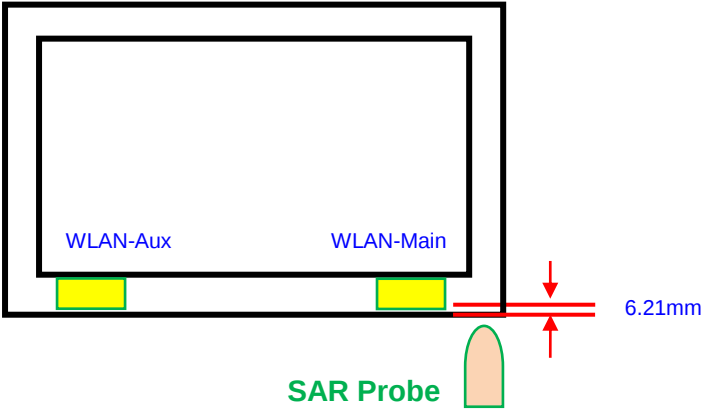


Figure-4:
Tablet PP (Primary Portrait)


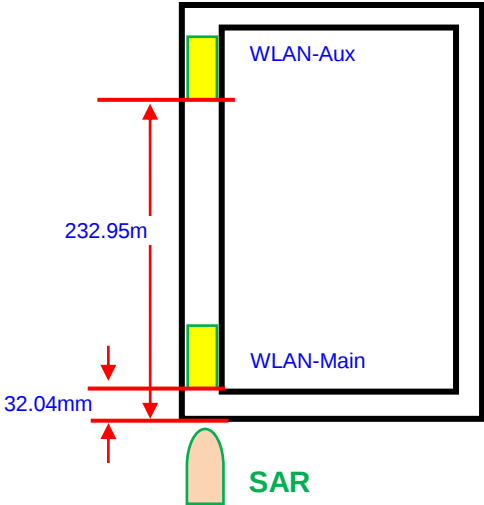




Figure-6:
Tablet SP (Secondary Portrait)

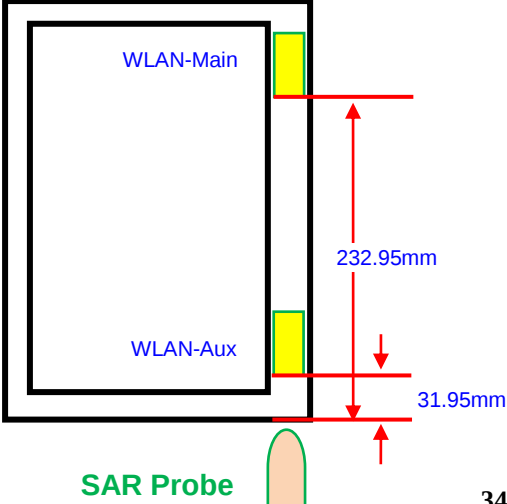

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

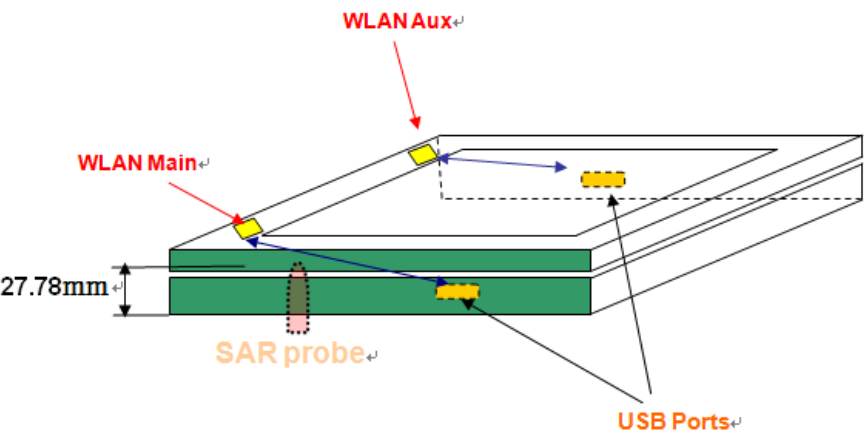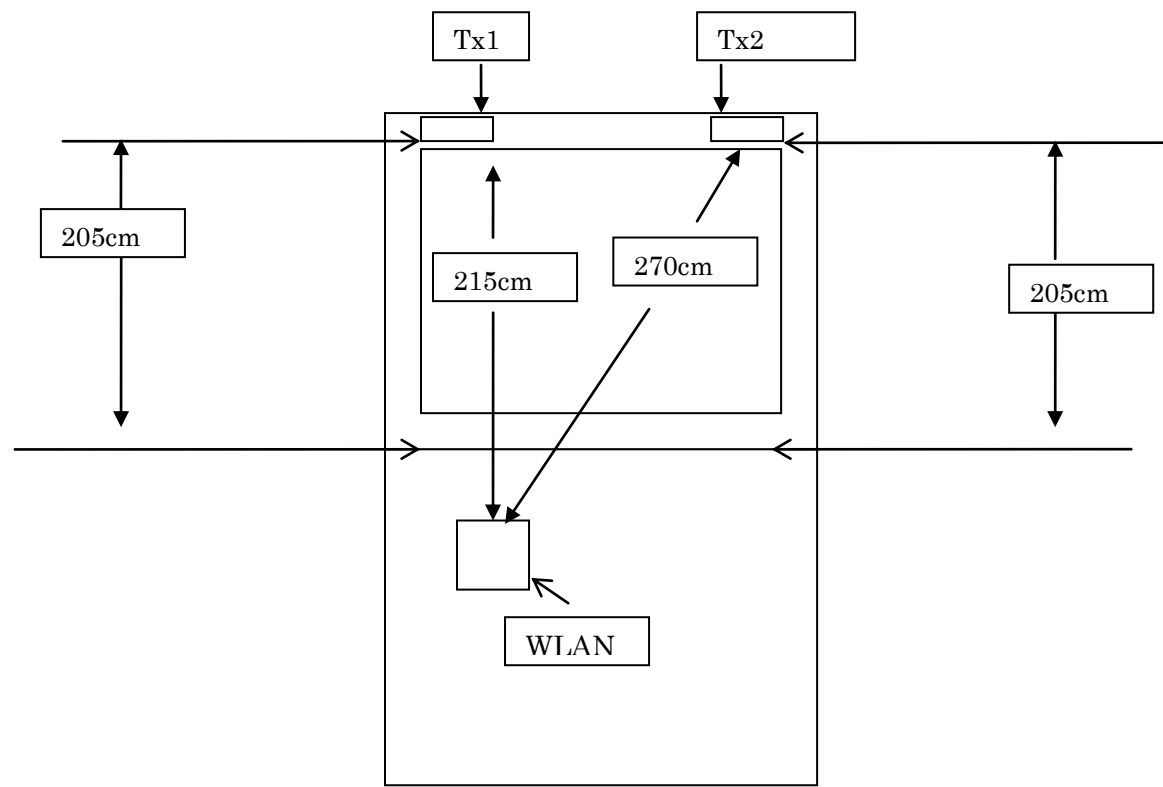

The closest distance: 1
1 USB – WLANmain : 130.8 mm
2 USB – WLANaux : 119.78 mm