



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7
CLASS II PERMISSIVE CHANGE**

CERTIFICATION TEST REPORT

FOR

**Intel® Centrino® Advanced-N 6200
(Tested Inside Of Lenovo ThinkPad X200/X201 Tablet Series)**

**FCC MODEL NUMBER: 622ANHMW
IC MODEL NUMBER: 622ANHU**

**FCC ID: PD9622ANHU
IC: 1000M-9622ANHU**

REPORT NUMBER: 09U12796-1

ISSUE DATE: NOVEMBER 25, 2009

Prepared for
**INTEL CORPORATION
2111 N. E. 25TH AVENUE
HILLSBORO, OR 97124, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/25/09	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	7
5.3. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....</i>	7
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.5. <i>SOFTWARE AND FIRMWARE.....</i>	8
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i>	8
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. RADIATED TEST RESULTS	12
7.1. <i>LIMITS AND PROCEDURE</i>	12
WISTRON ANTENNA	13
7.2. <i>TRANSMITTER ABOVE 1 GHz</i>	13
7.2.1. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN A	13
7.2.2. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN B	17
7.2.3. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN A	22
7.2.4. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN B	26
7.2.5. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A	31
7.2.6. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN B	35
7.2.7. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A+B	39
7.2.8. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A	44
7.2.9. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN B	48
7.2.10. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A+B	52
ACON ANTENNA	57
7.3. <i>TRANSMITTER ABOVE 1 GHz</i>	57
7.3.1. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN A	57
7.3.2. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN B	61
7.3.3. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN A	65
7.3.4. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN B	69
7.3.5. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A	73

7.3.6.	802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN B	77
7.3.7.	802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A+B	81
7.3.8.	802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A	85
7.3.9.	802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN B	89
7.3.10.	802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A+B	93
7.3.11.	802.11a MODE IN THE 5.8 GHz BAND_CHAIN A & B	97
7.3.12.	802.11n HT20 MODE IN THE 5.8 GHz BAND_CHAIN A&B.....	98
7.3.13.	802.11n HT40 MODE IN THE 5.8 GHz BAND_CHAIN A&B.....	99
7.4.	RECEIVER ABOVE 1 GHz	100
7.4.1.	RECEIVER ABOVE 1 GHz IN THE 2.4 GHz BAND.....	100
7.4.2.	RECEIVER ABOVE 1 GHz IN THE 5.8 GHz BAND.....	101
7.5.	WORST CASE BELOW 1 GHz	102
8.	AC POWER LINE CONDUCTED EMISSIONS	108
9.	SETUP PHOTOS.....	111

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: INTEL CORPORATION
2111 N. E. 25TH AVENUE
HILLSBORO, OR 97124, U.S.A.

EUT DESCRIPTION: Intel® Centrino® Advanced-N 6200 (Tested Inside Of Lenovo ThinkPad X200/X201 Tablet Series)

FCC MODEL NUMBER: 622ANHMW
IC MODEL NUMBER: 622ANHU

SERIAL NUMBER: Z1ZHJ769P0UX & Z1ZHJ769P00V

DATE TESTED: SEPTEMBER 24 – NOVEMBER 20, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a 2x2 WLAN 802.11 a/b/g/n Intel® Centrino® Advanced-N 6200 card.

The radio module is manufactured by Intel Corporation.

5.2. MAXIMUM OUTPUT POWER

The test measurement passed within $\pm 0.5\text{dBm}$ of the original output power.

5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding portable tablet Lenovo ThinkPad X200/X201Tablet Series.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

ACON Antenna

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain with Cable loss (dBi)	
Main antenna 25.90675.001	Advanced Connectek Inc.	PIFA	25.90675.001	2400-2500MHz	-0.39 dBi (peak)
			50 ohm Coaxial. length: 550mm diameter: 1.13mm Connector: U.FL	5150-5350MHz	1.45 dBi (peak)
			5470-5725MHz	1.47 dBi (peak)	
			5725-5850MHz	0.92 dBi (peak)	
Auxiliary antenna 25.90676.001	Advanced Connectek Inc.	PIFA	25.90676.001	2400-2500MHz	0.64 dBi (peak)
			5150-5350MHz	-0.88 dBi (peak)	
			5470-5725MHz	-1.3 dBi (peak)	
			5725-5850MHz	0.22 dBi (peak)	

Wistron NeWeb Antenna

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain with Cable loss (dBi)
Main antenna (WNC P/N: 81.EG915.014 (customer P/N:25.90669.001)	WNC Corporation	PIFA	Low Loss 50 ohm Coaxial. length: 555mm diameter: 1.13mm Connector: IPEX	2400-2500MHz -1.53 dBi (peak)
				5150-5350MHz 0.92 dBi (peak)
				5470-5725MHz 0.03 dBi (peak)
				5725-5850MHz -0.76 dBi (peak)
AUX Antenna (WNC P/N: 81.EG915.013) (Customer P/N: 25.90670.001)	WNC Corporation	PIFA	Low Loss 50 ohm Coaxial. length: 718mm diameter: 1.13mm Connector: IPEX	2400-2500MHz 1.32 dBi (peak)
				5150-5350MHz -1.41 dBi (peak)
				5470-5725MHz 0.69 dBi (peak)
				5725-5850MHz 0.14 dBi (peak)

5.5. SOFTWARE AND FIRMWARE

The test utility software used during testing was CRTU version 5.10.25.0.

5.6. WORST-CASE CONFIGURATION AND MODE

The tests were performed on full test worst-case channel with higher antennas gain of Wistron @ 2.4GHz and ACON @ 5GHz installed, also spot check with the rest of lower antennas gain.

The worst-case channel is determined as the channel with the highest output power.

The worst-case also investigated for X, Y, Z, and mobile orientation of the support laptop. Mobile position was turned out as worst-case orientation.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	LENOVO	X200 TABLET	R9-09BIX 09/07	DoC
AC/DC Adaptor	LENOVO	42T4416	11S42T4416Z1ZF3A97D88V	DoC
LAPTOP	LENOVO	X200 TABLET	R9-09B1M 09/07	DoC
AC/DC Adaptor	LENOVO	42T5283	11S92P1154Z1ZDXP964HRV	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Un-Shielded	1.0 m	N/A
2	DC	1	DC	Un-Shielded	2.0 m	Ferrite at one End

TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

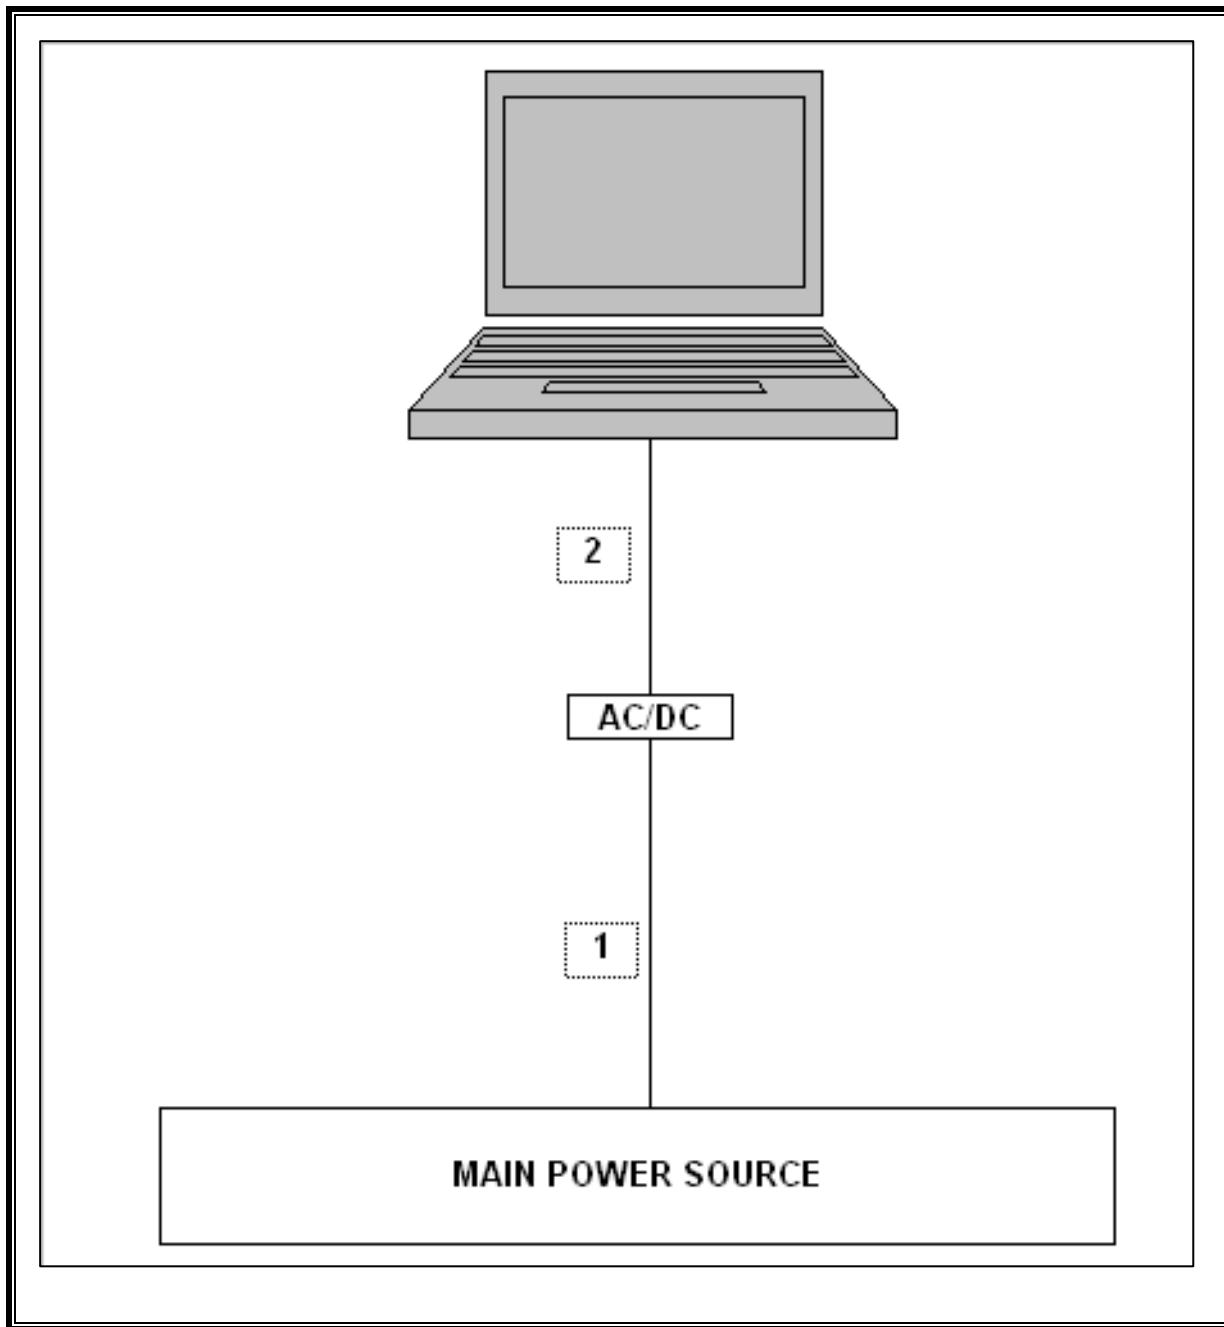

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	08/24/10
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	12/16/09
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	02/04/10
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/29/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	01/14/10
Peak Power Meter	Boonton	4541	N/A	01/15/10
Peak / Average Power Sensor	Boonton	57318	N/A	02/02/10
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
Highpass Filter, 4.0 GHz	Micro-Tronics	HPM13351	N02708	N/A
Highpass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	N/A

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

WISTRON ANTENNA



7.2. TRANSMITTER ABOVE 1 GHz

7.2.1. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN A



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

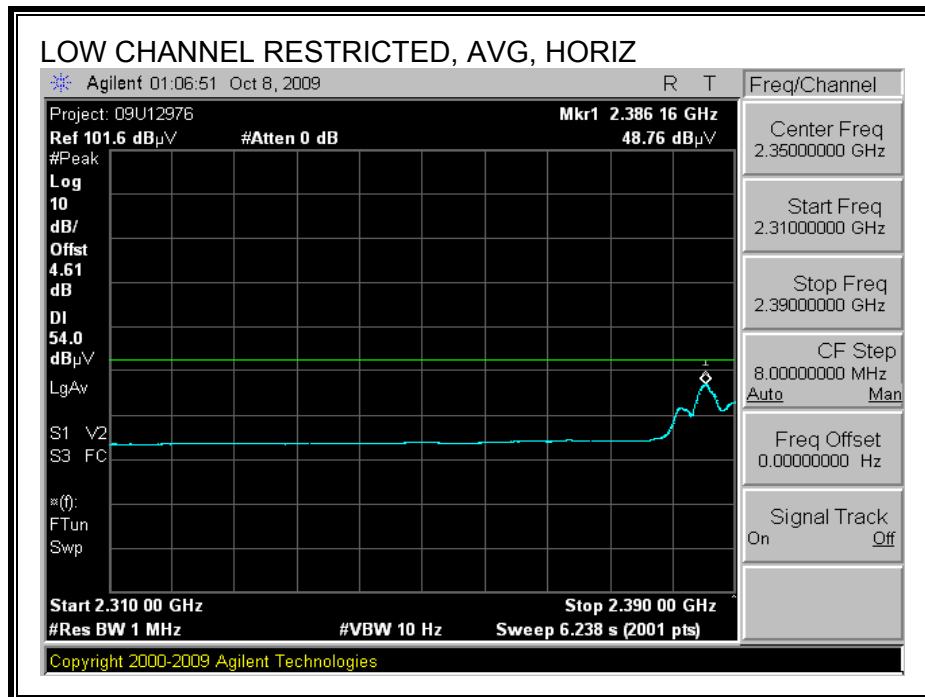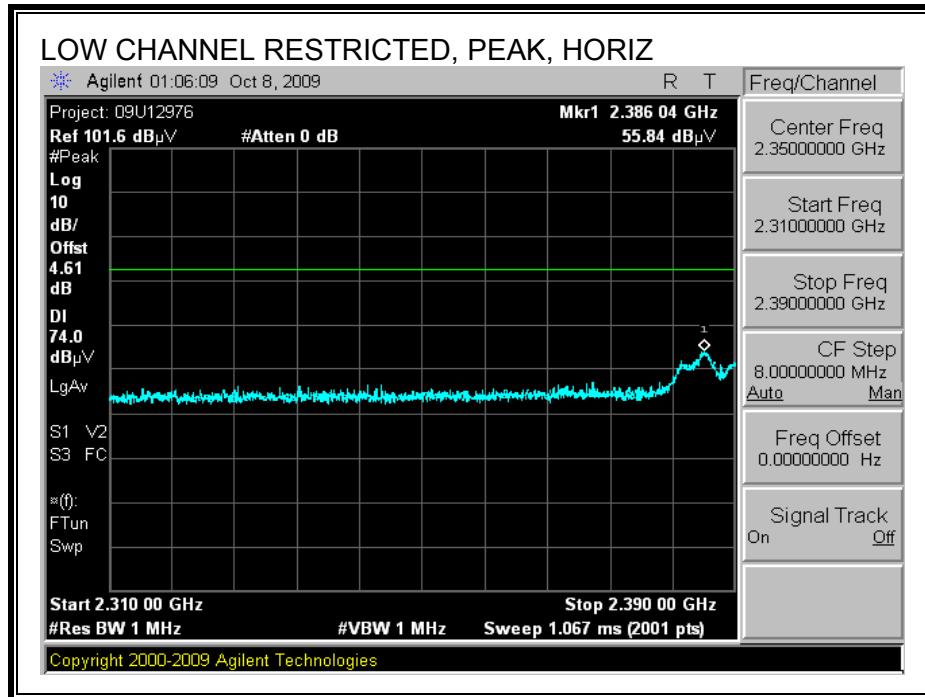



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

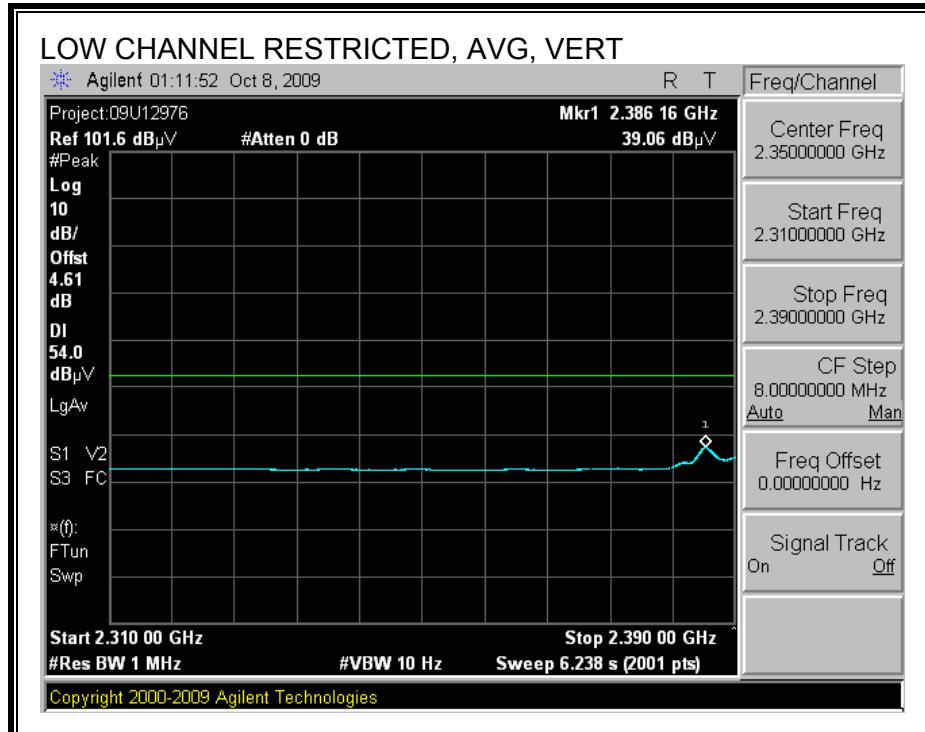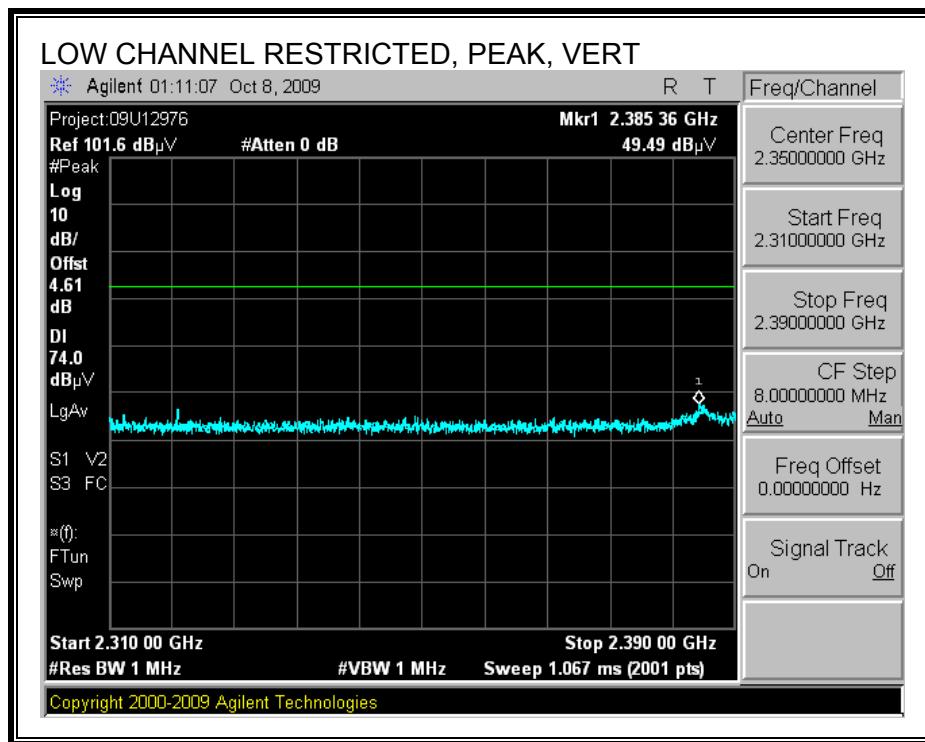



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

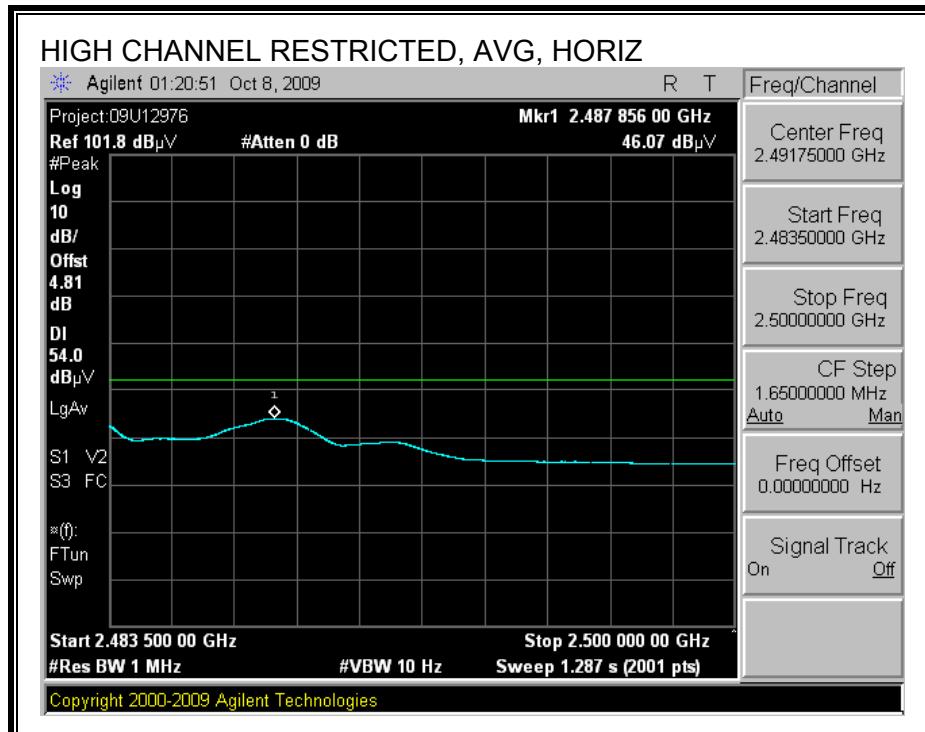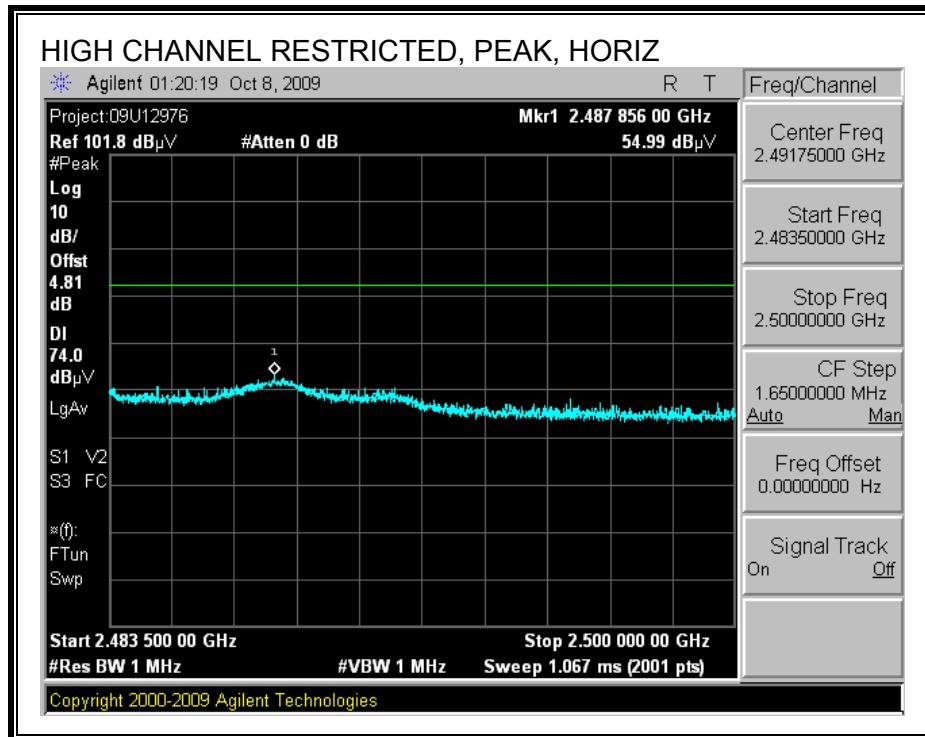



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

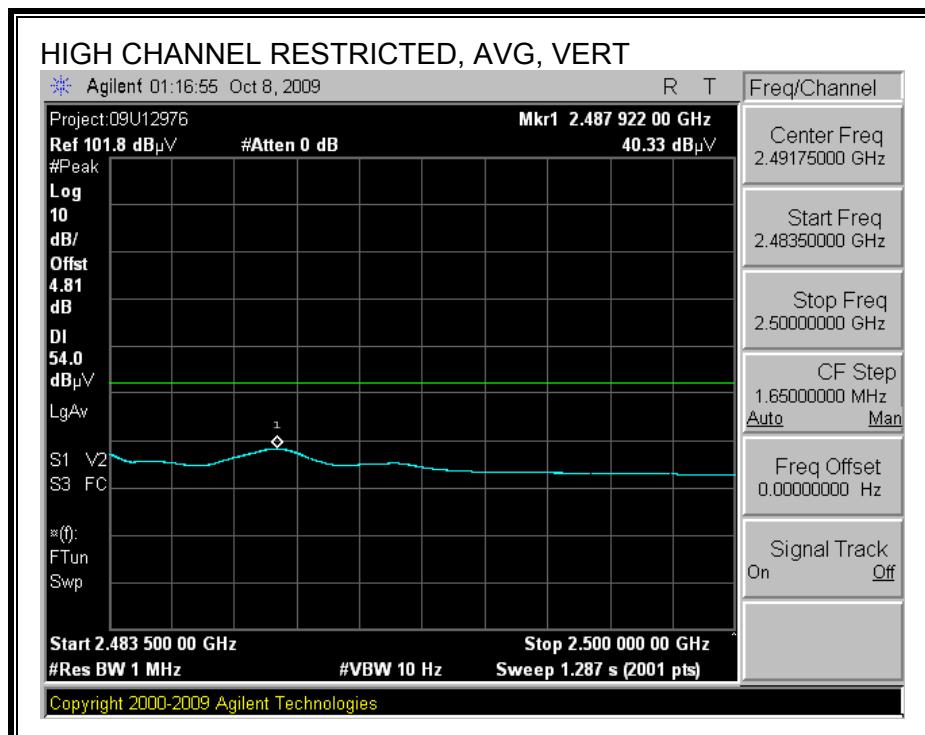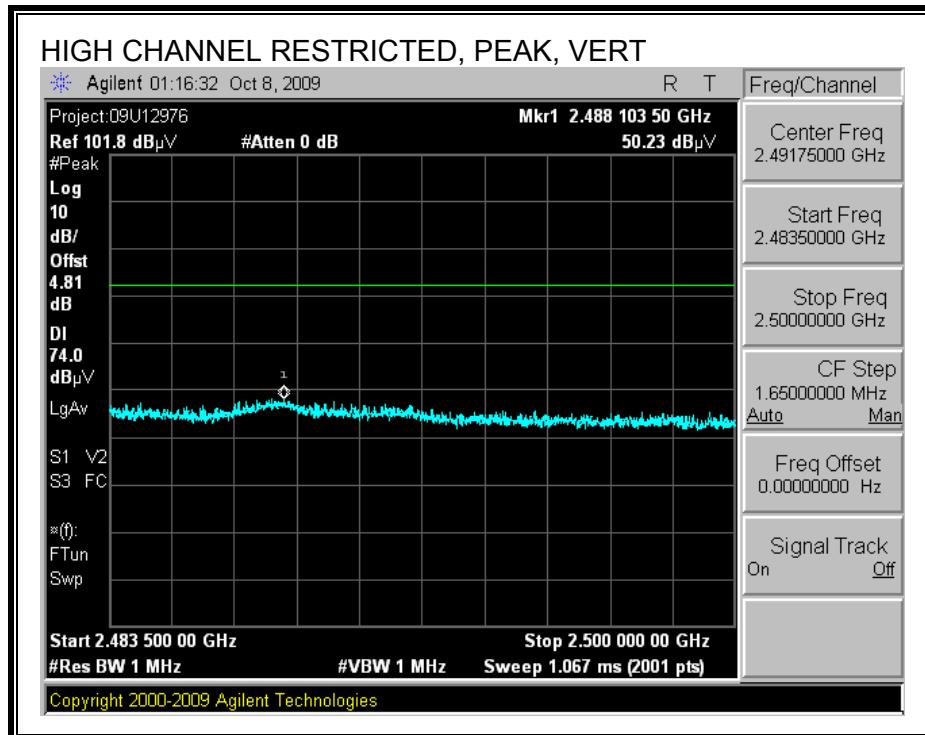



**7.2.2. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

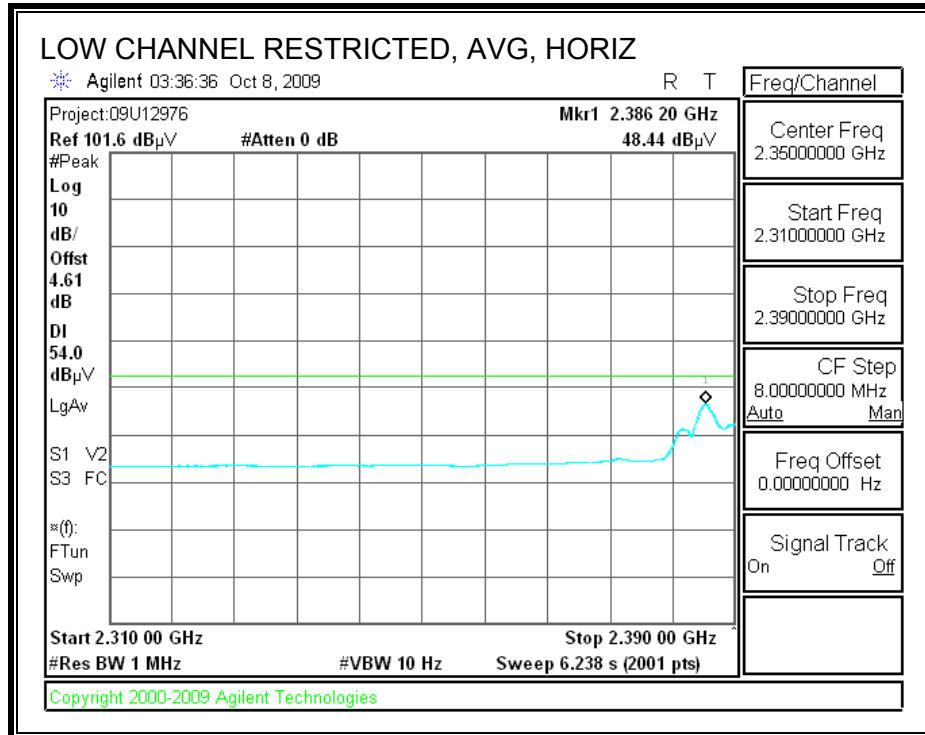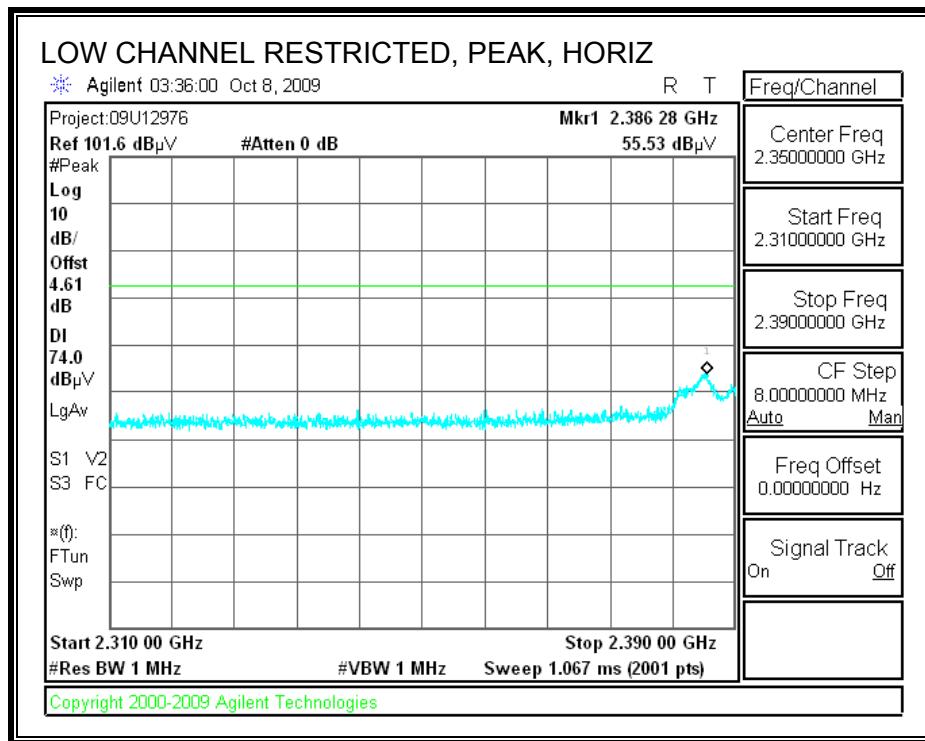



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

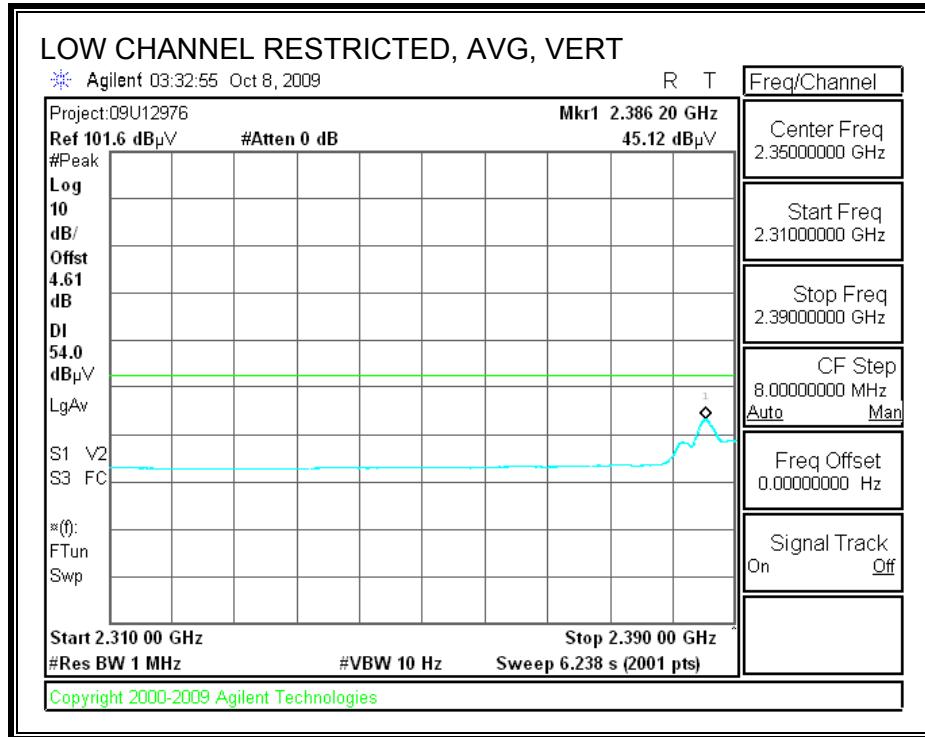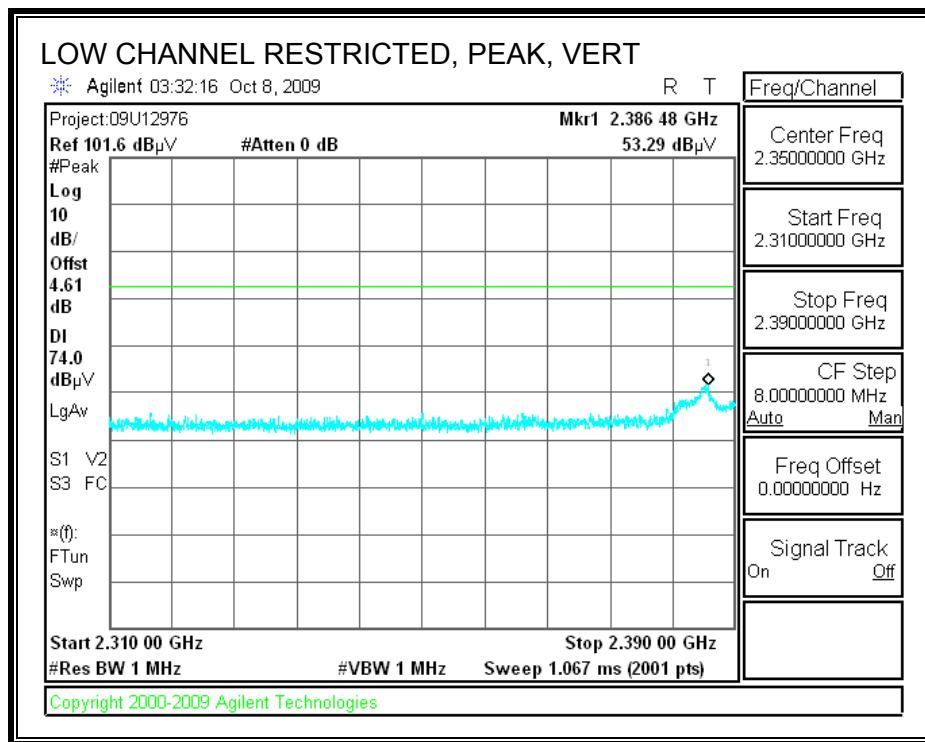

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

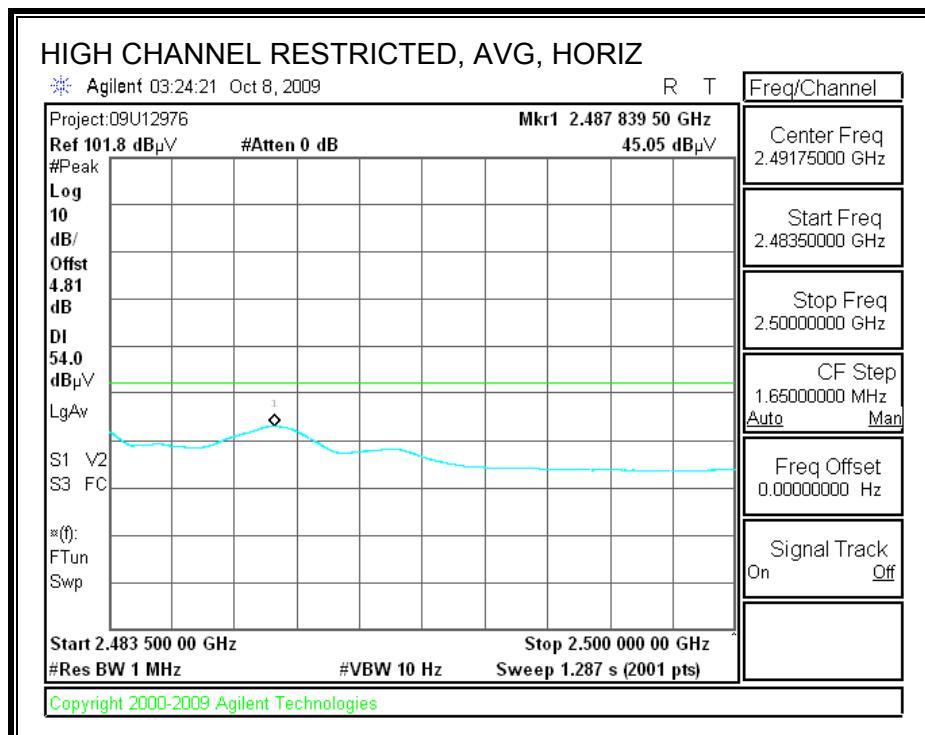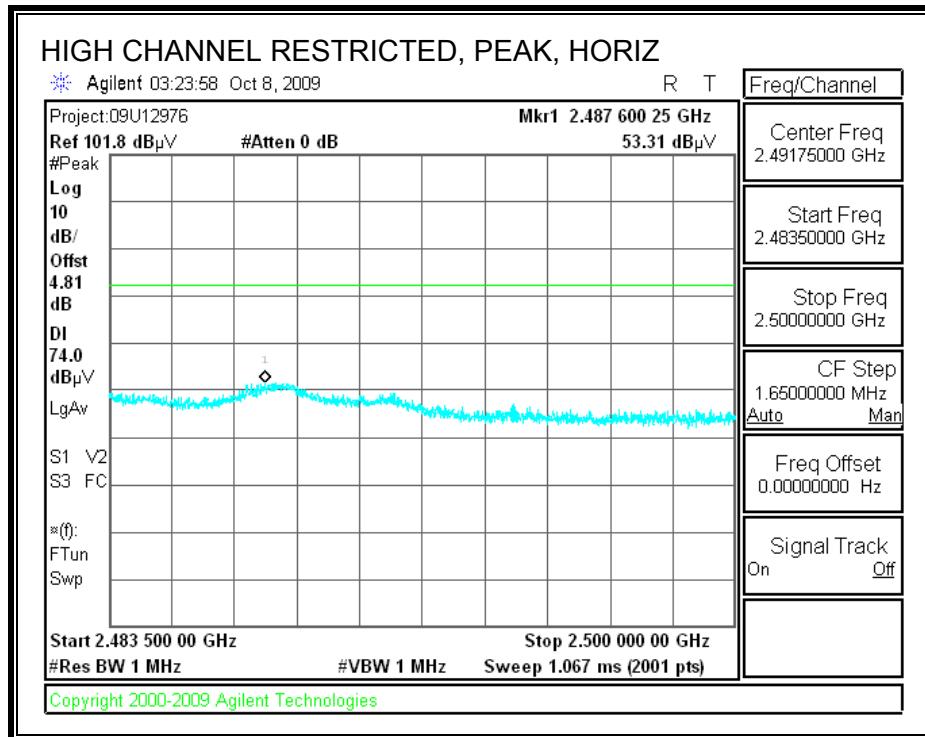



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

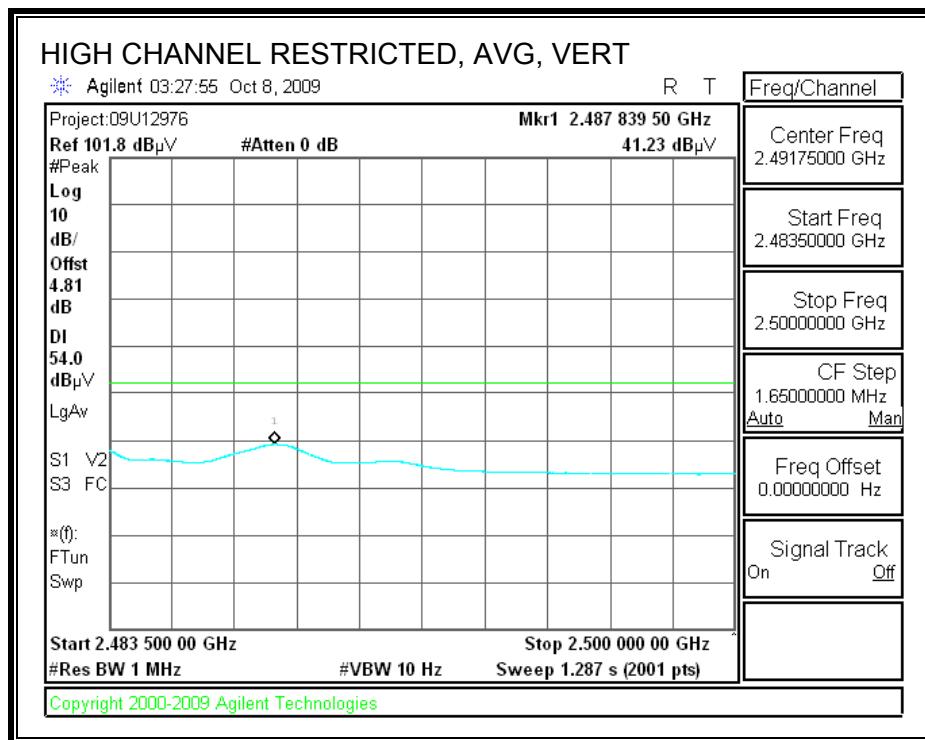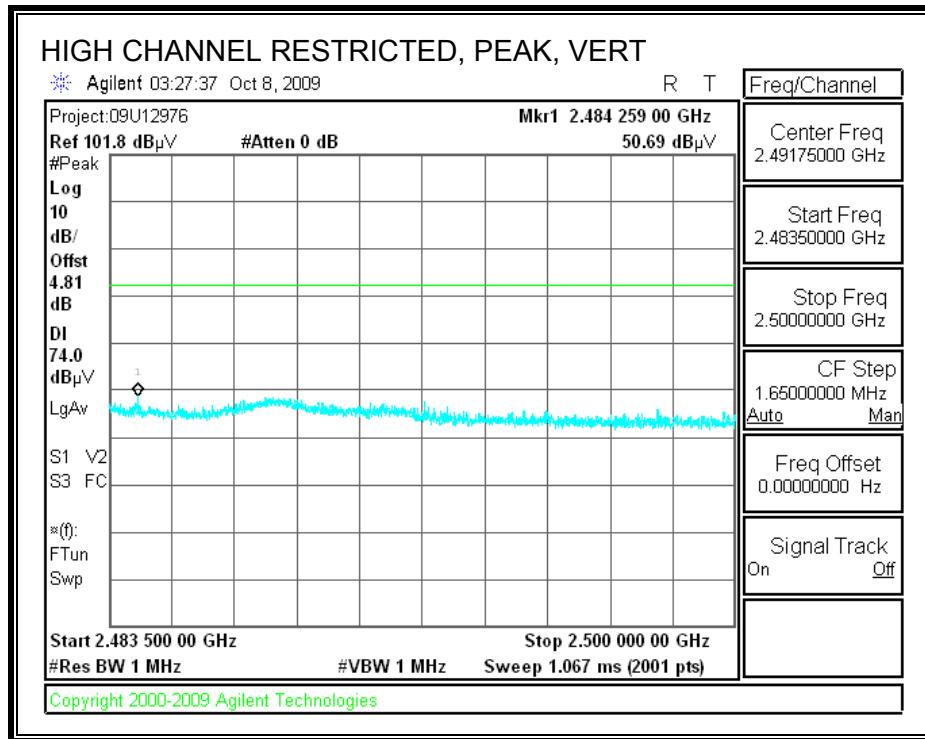



HARMONICS AND SPURIOUS EMISSIONS (WORST CASE)

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	INTEL CORPORATIONS														
Project #:	09U12796														
Date:	10/8/2009														
Test Engineer:	MENGISTU MEKURIA														
Configuration:	EUT AND AC ADAPTER														
Mode:	TX b MODE														
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									FCC 15.205			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz, VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CHANNEL (2412.00 MHz)															
4.824	3.0	41.8	32.1	33.0	5.8	-36.5	0.0	0.0	44.2	34.5	74	54	-29.8	-19.5	V
4.824	3.0	40.0	31.1	33.0	5.8	-36.5	0.0	0.0	42.4	33.5	74	54	-31.6	-20.5	H
MID CHANNEL (2437.00 MHz)															
4.874	3.0	42.9	35.4	33.1	5.8	-36.5	0.0	0.0	45.4	37.9	74	54	-28.6	-16.1	V
4.874	3.0	41.5	32.0	33.1	5.8	-36.5	0.0	0.0	44.0	34.5	74	54	-30.0	-19.5	H
HI CHANNEL (2462.00 MHz)															
4.924	3.0	44.1	36.0	33.1	5.9	-36.5	0.0	0.0	46.7	40.6	74	54	-27.3	-13.4	V
4.924	3.0	41.4	32.5	33.1	5.9	-36.5	0.0	0.0	44.0	35.0	74	54	-30.0	-19.0	H
Rev. 11.10.08															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										



**7.2.3. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

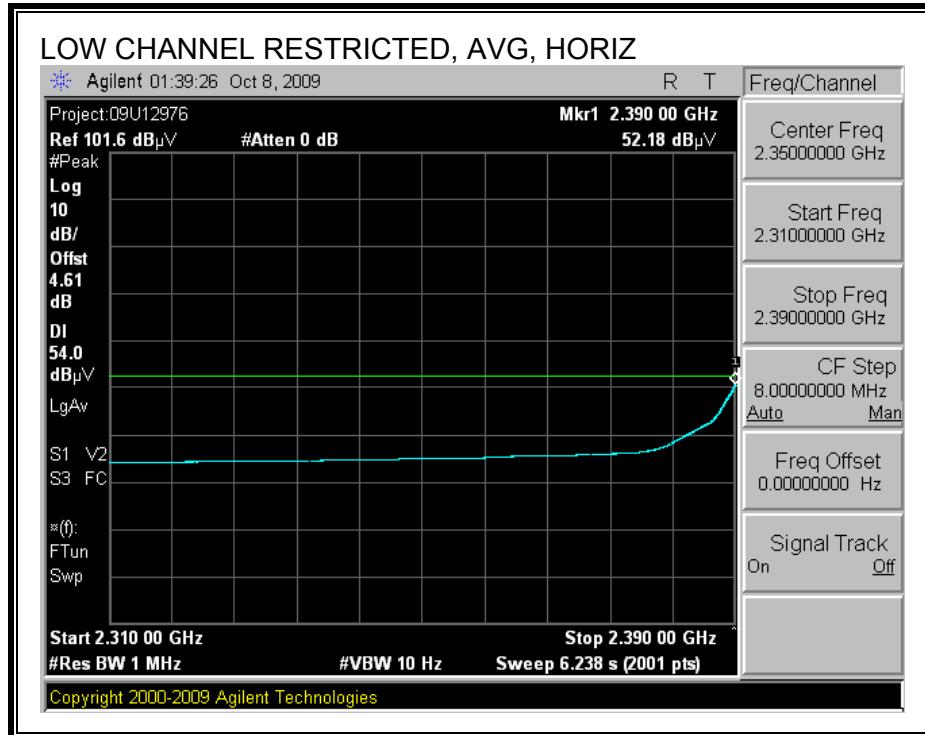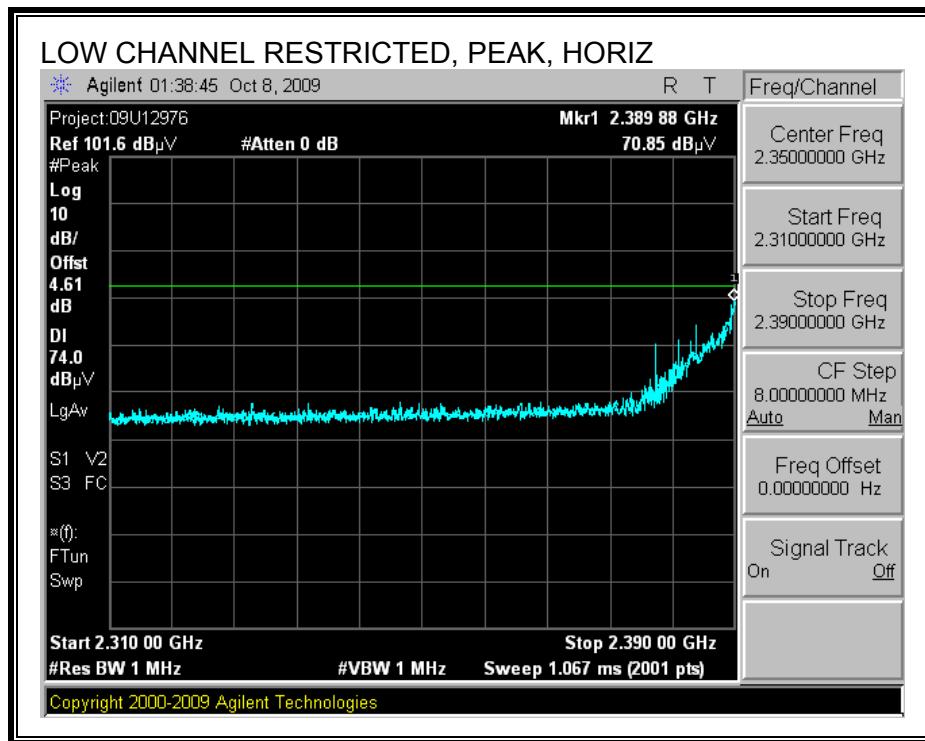



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

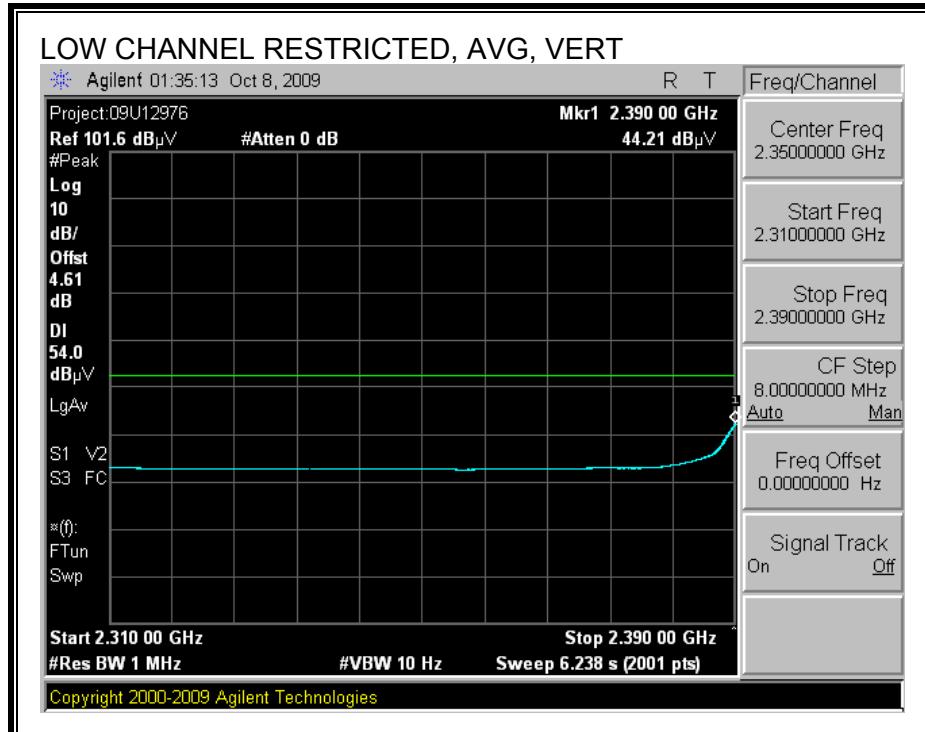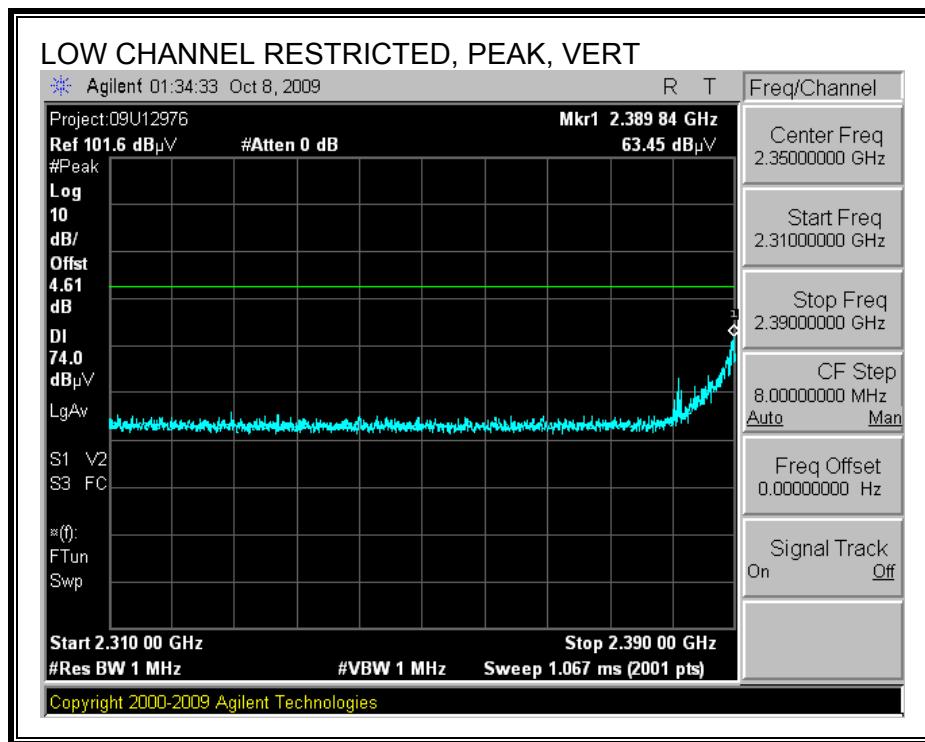



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

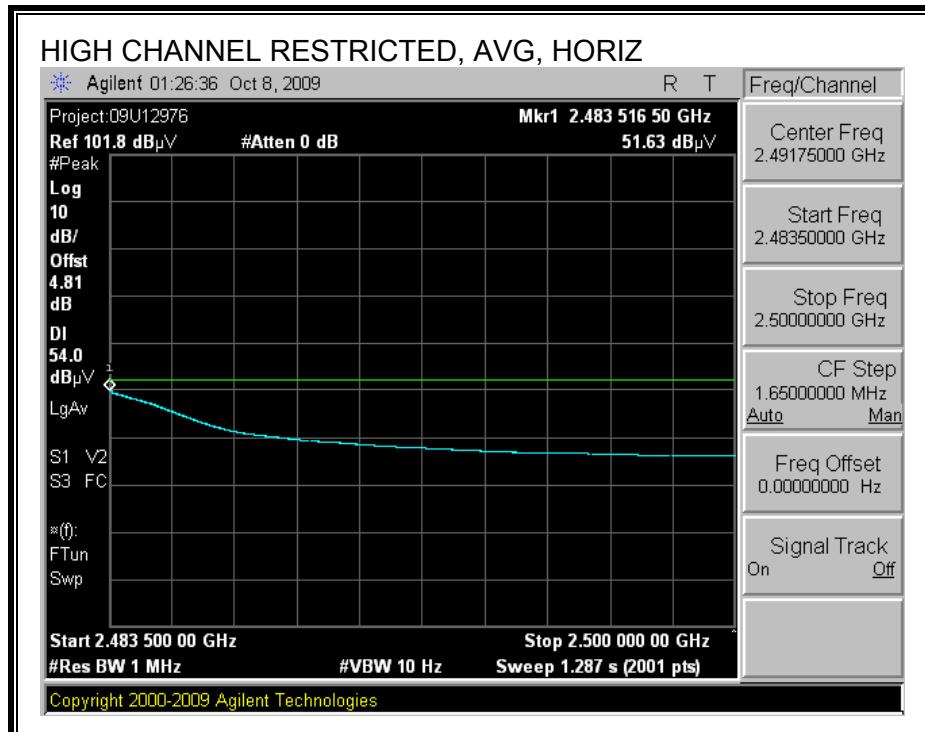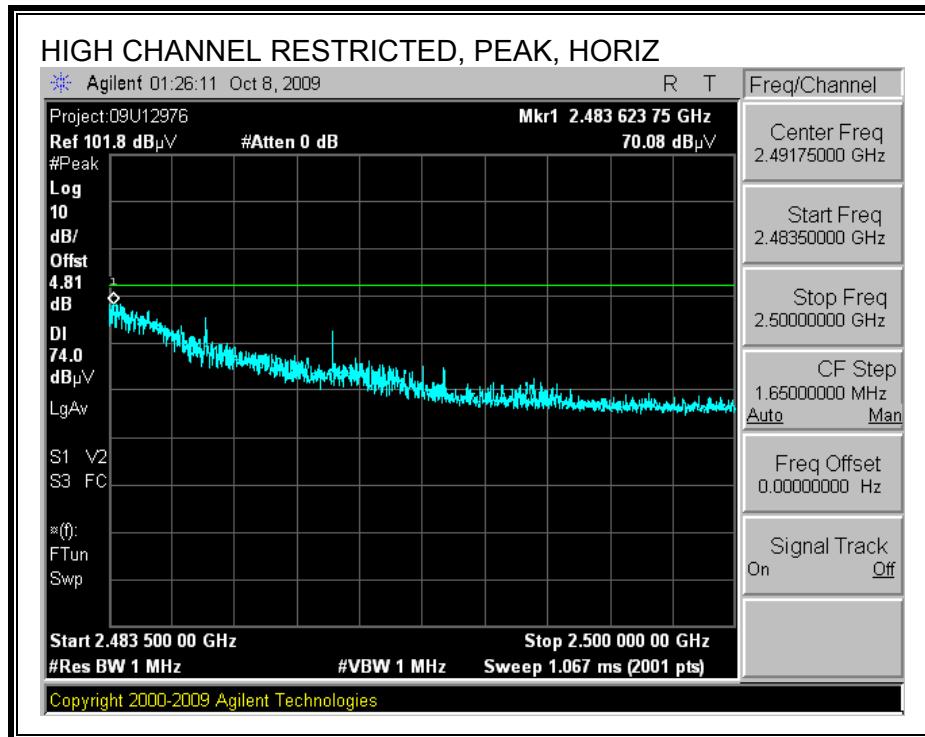



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

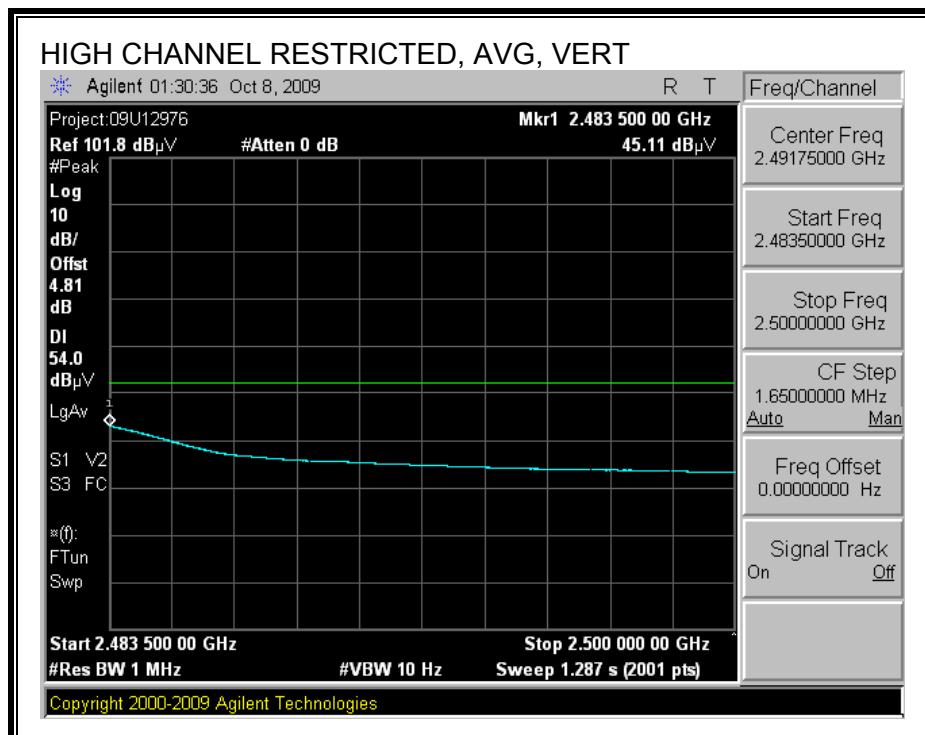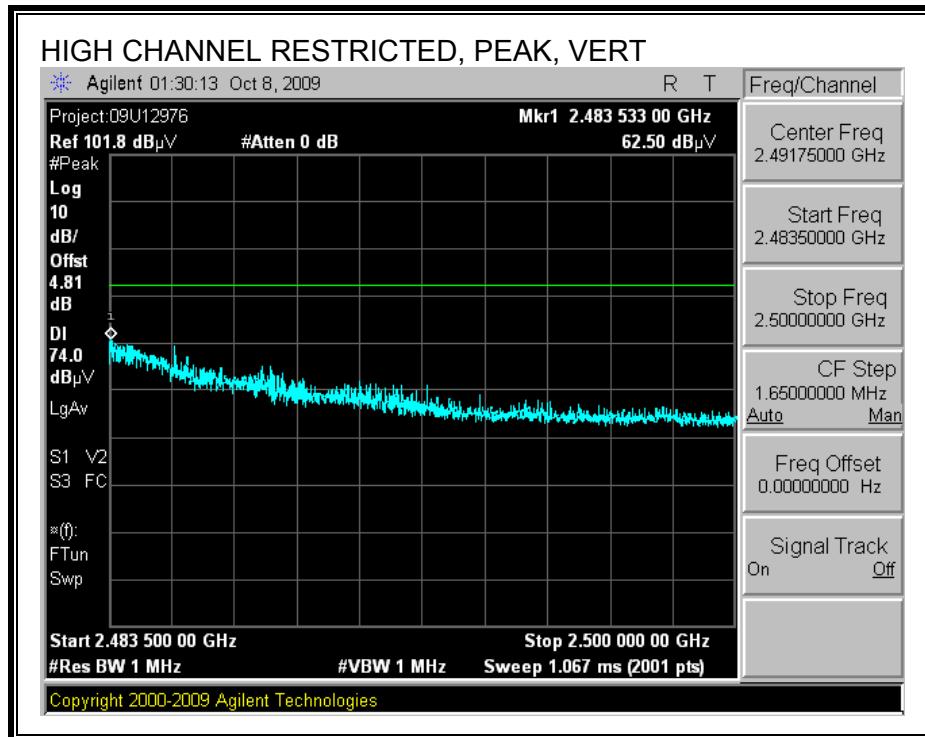



**7.2.4. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

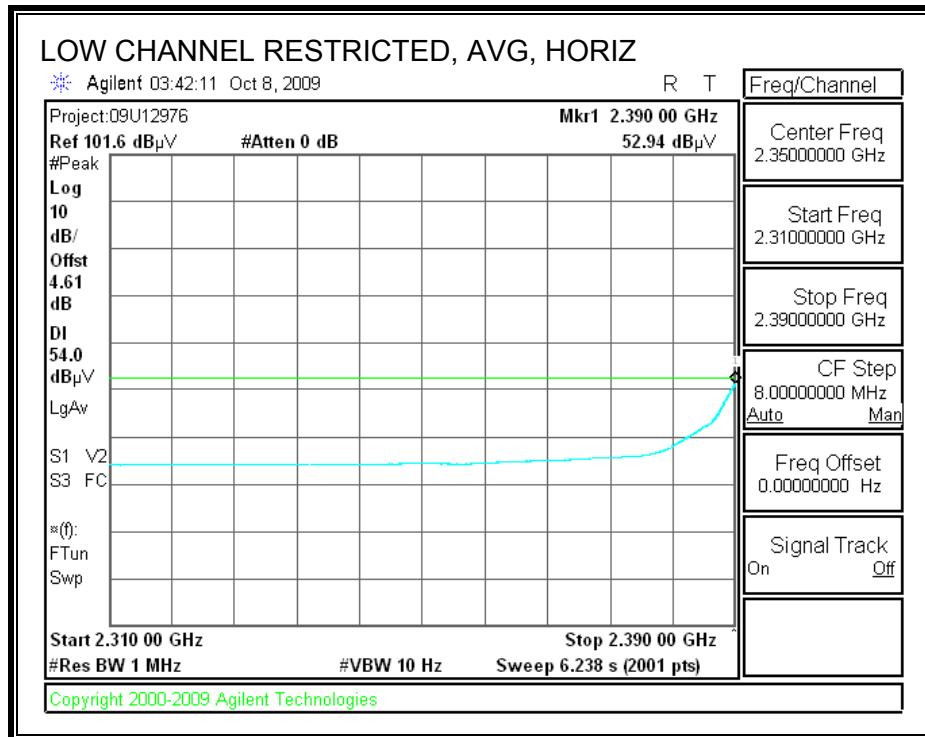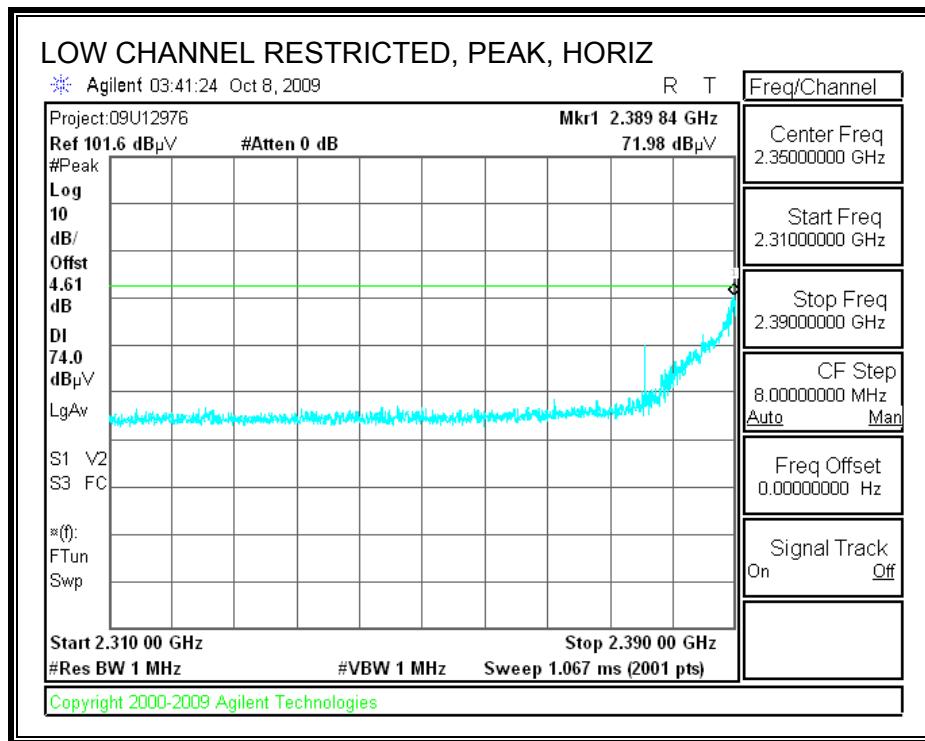



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

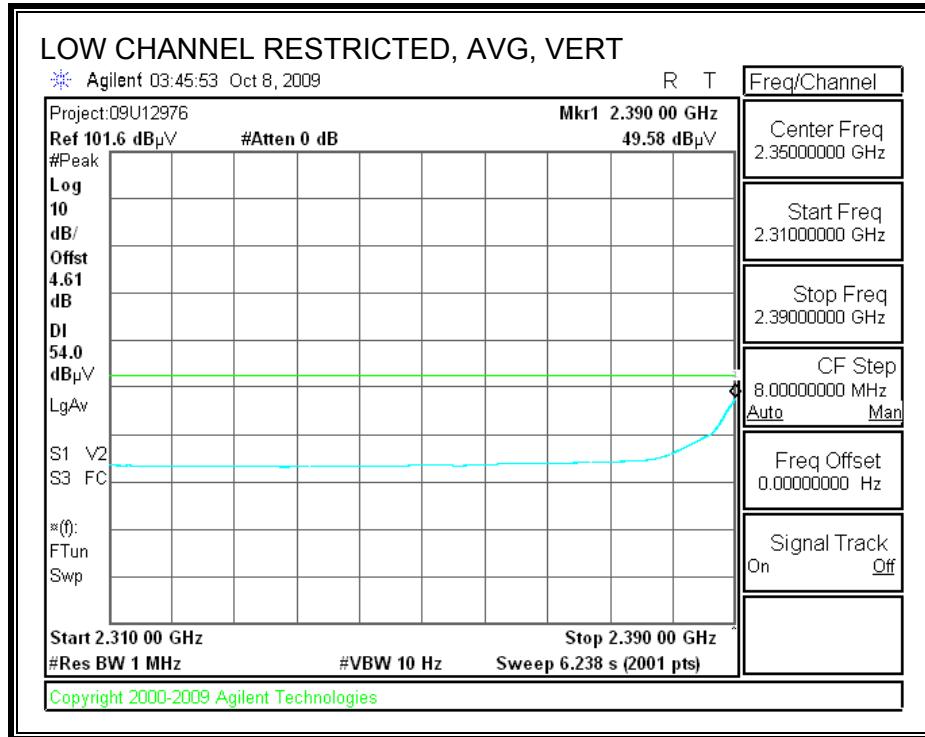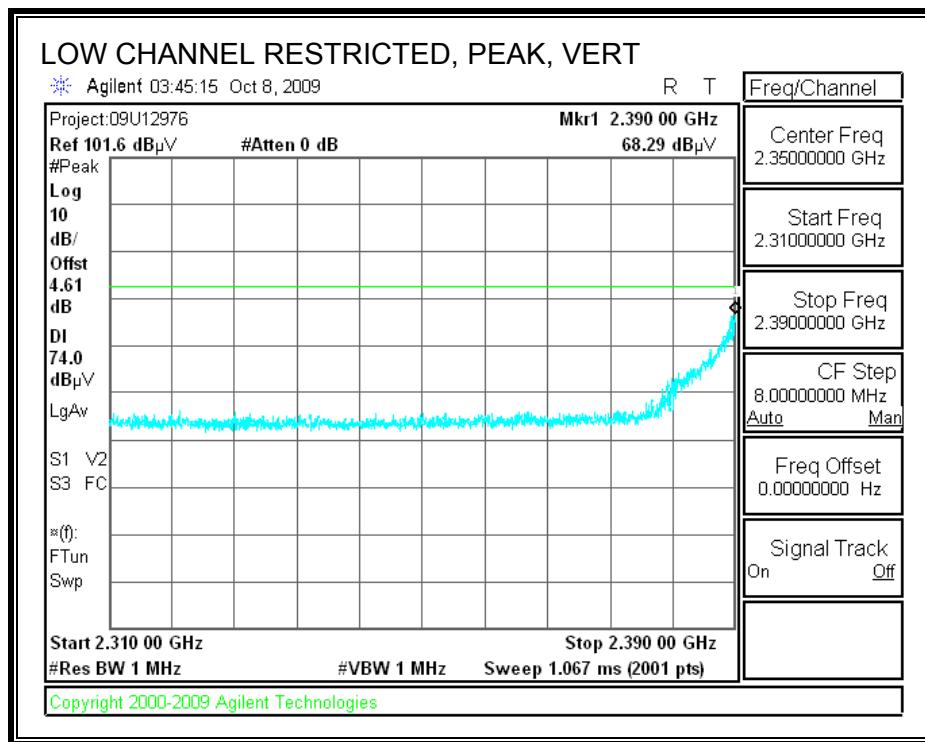

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

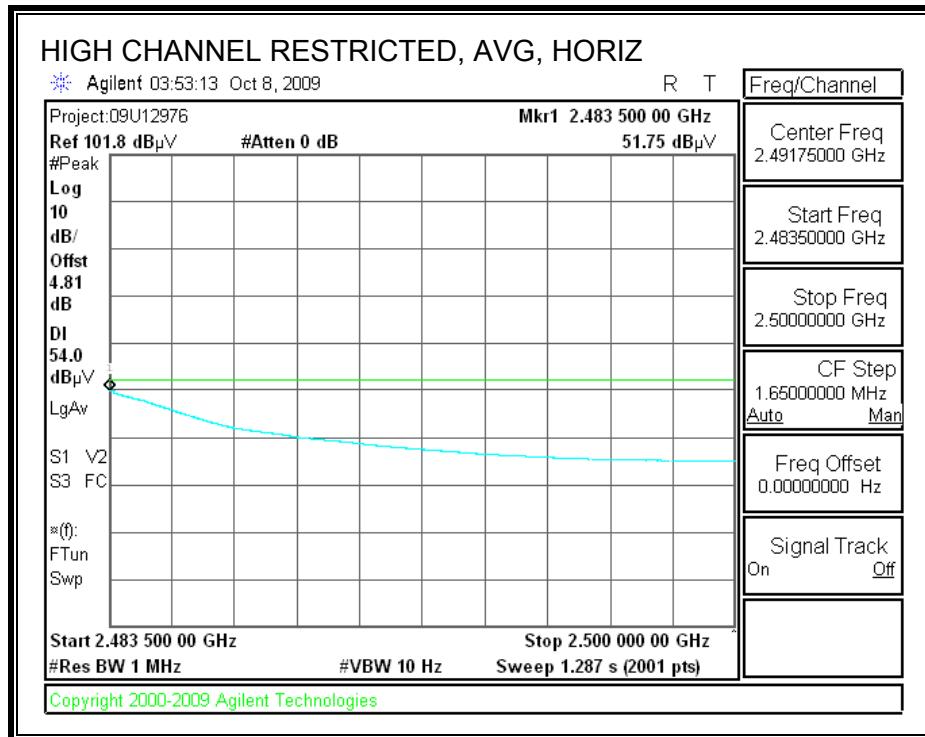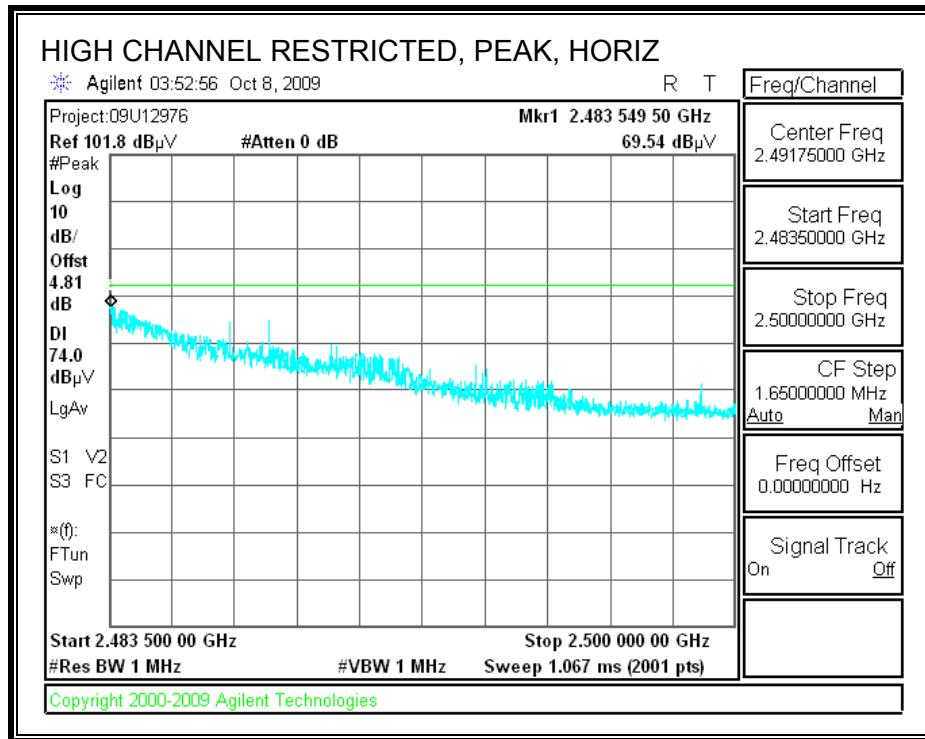



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

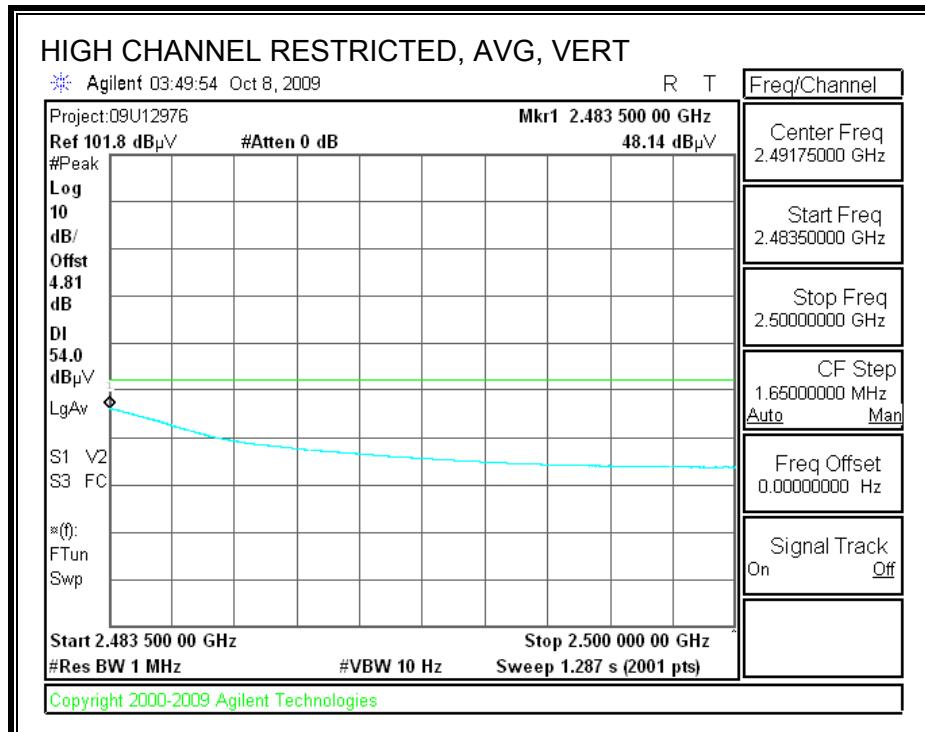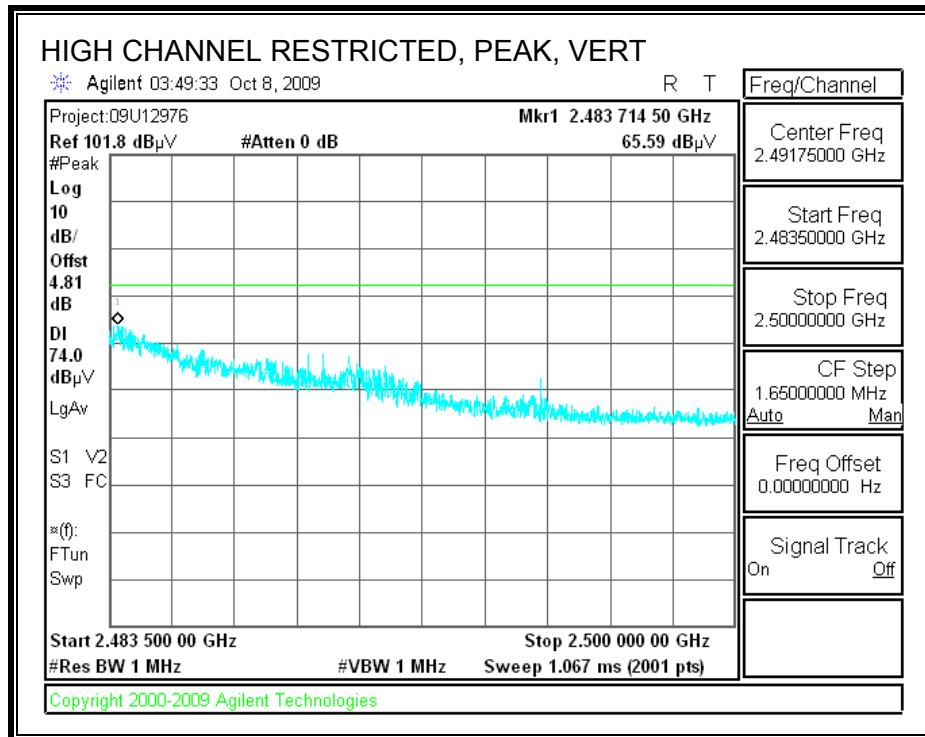



HARMONICS AND SPURIOUS EMISSIONS (WORST-CASE)

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																												
<p>Company: INTEL CORPORATIONS Project #: 09U12796 Date: 10/8/2009 Test Engineer: MENGISTU MEKURIA Configuration: EUT AND AC ADAPTER Mode: TX g MODE</p> <p>Test Equipment:</p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="3">Horn > 18GHz</td><td>Limit</td></tr><tr><td>T73; S/N: 6717 @3m</td><td>T144 Miteq 3008A00931</td><td></td><td></td><td></td><td></td><td>FCC 15.205</td></tr><tr><td colspan="7">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td>HPF</td><td>Reject Filter</td><td colspan="2">Peak Measurements RBW=VBW=1MHz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td></td><td>R_001</td><td colspan="2">Average Measurements RBW=1MHz ; VBW=10Hz</td></tr></table> <p>Measurement Data:</p> <table border="1"><thead><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg. dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Fltr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr></thead><tbody><tr><td colspan="15">LOW CHANNEL (2412.00 MHz)</td></tr><tr><td>4.824</td><td>3.0</td><td>40.2</td><td>27.5</td><td>33.0</td><td>5.8</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>42.6</td><td>29.9</td><td>74</td><td>54</td><td>-31.4</td><td>-24.1</td><td>V</td></tr><tr><td>4.824</td><td>3.0</td><td>39.7</td><td>27.1</td><td>33.0</td><td>5.8</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>42.1</td><td>29.5</td><td>74</td><td>54</td><td>-31.9</td><td>-24.5</td><td>H</td></tr><tr><td colspan="15">MID CHANNEL (2437.00 MHz)</td></tr><tr><td>4.874</td><td>3.0</td><td>40.1</td><td>27.4</td><td>33.1</td><td>5.8</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>42.6</td><td>29.9</td><td>74</td><td>54</td><td>-31.4</td><td>-24.1</td><td>V</td></tr><tr><td>4.874</td><td>3.0</td><td>39.4</td><td>27.1</td><td>33.1</td><td>5.8</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>41.9</td><td>29.5</td><td>74</td><td>54</td><td>-32.1</td><td>-24.5</td><td>H</td></tr><tr><td colspan="15">HI CHANNEL (2462.00 MHz)</td></tr><tr><td>4.924</td><td>3.0</td><td>41.4</td><td>28.9</td><td>33.1</td><td>5.9</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>43.9</td><td>31.4</td><td>74</td><td>54</td><td>-30.1</td><td>-22.6</td><td>V</td></tr><tr><td>4.924</td><td>3.0</td><td>39.4</td><td>27.4</td><td>33.1</td><td>5.9</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>42.0</td><td>29.9</td><td>74</td><td>54</td><td>-32.0</td><td>-24.1</td><td>H</td></tr></tbody></table> <p>Rev. 11.10.08</p> <p>Definitions:</p> <table><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit	T73; S/N: 6717 @3m	T144 Miteq 3008A00931					FCC 15.205	Hi Frequency Cables							3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz		3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	Average Measurements RBW=1MHz ; VBW=10Hz		f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	LOW CHANNEL (2412.00 MHz)															4.824	3.0	40.2	27.5	33.0	5.8	-36.5	0.0	0.0	42.6	29.9	74	54	-31.4	-24.1	V	4.824	3.0	39.7	27.1	33.0	5.8	-36.5	0.0	0.0	42.1	29.5	74	54	-31.9	-24.5	H	MID CHANNEL (2437.00 MHz)															4.874	3.0	40.1	27.4	33.1	5.8	-36.5	0.0	0.0	42.6	29.9	74	54	-31.4	-24.1	V	4.874	3.0	39.4	27.1	33.1	5.8	-36.5	0.0	0.0	41.9	29.5	74	54	-32.1	-24.5	H	HI CHANNEL (2462.00 MHz)															4.924	3.0	41.4	28.9	33.1	5.9	-36.5	0.0	0.0	43.9	31.4	74	54	-30.1	-22.6	V	4.924	3.0	39.4	27.4	33.1	5.9	-36.5	0.0	0.0	42.0	29.9	74	54	-32.0	-24.1	H	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit																																																																																																																																																																																																																																						
T73; S/N: 6717 @3m	T144 Miteq 3008A00931					FCC 15.205																																																																																																																																																																																																																																						
Hi Frequency Cables																																																																																																																																																																																																																																												
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																							
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																													
LOW CHANNEL (2412.00 MHz)																																																																																																																																																																																																																																												
4.824	3.0	40.2	27.5	33.0	5.8	-36.5	0.0	0.0	42.6	29.9	74	54	-31.4	-24.1	V																																																																																																																																																																																																																													
4.824	3.0	39.7	27.1	33.0	5.8	-36.5	0.0	0.0	42.1	29.5	74	54	-31.9	-24.5	H																																																																																																																																																																																																																													
MID CHANNEL (2437.00 MHz)																																																																																																																																																																																																																																												
4.874	3.0	40.1	27.4	33.1	5.8	-36.5	0.0	0.0	42.6	29.9	74	54	-31.4	-24.1	V																																																																																																																																																																																																																													
4.874	3.0	39.4	27.1	33.1	5.8	-36.5	0.0	0.0	41.9	29.5	74	54	-32.1	-24.5	H																																																																																																																																																																																																																													
HI CHANNEL (2462.00 MHz)																																																																																																																																																																																																																																												
4.924	3.0	41.4	28.9	33.1	5.9	-36.5	0.0	0.0	43.9	31.4	74	54	-30.1	-22.6	V																																																																																																																																																																																																																													
4.924	3.0	39.4	27.4	33.1	5.9	-36.5	0.0	0.0	42.0	29.9	74	54	-32.0	-24.1	H																																																																																																																																																																																																																													
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																							
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																							
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																							
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																							
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																									



7.2.5. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

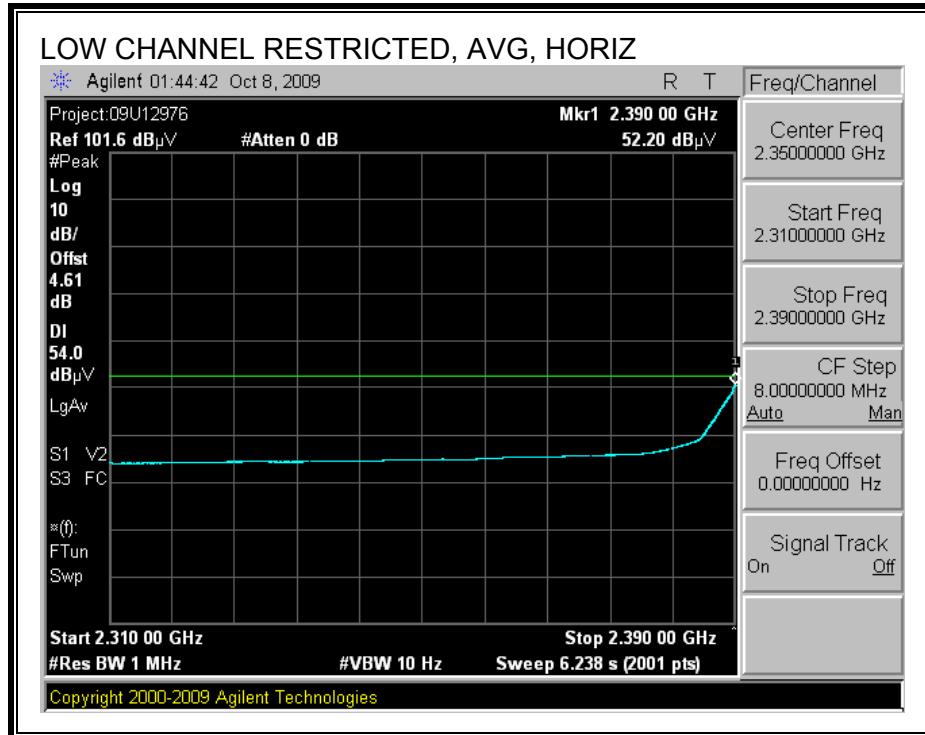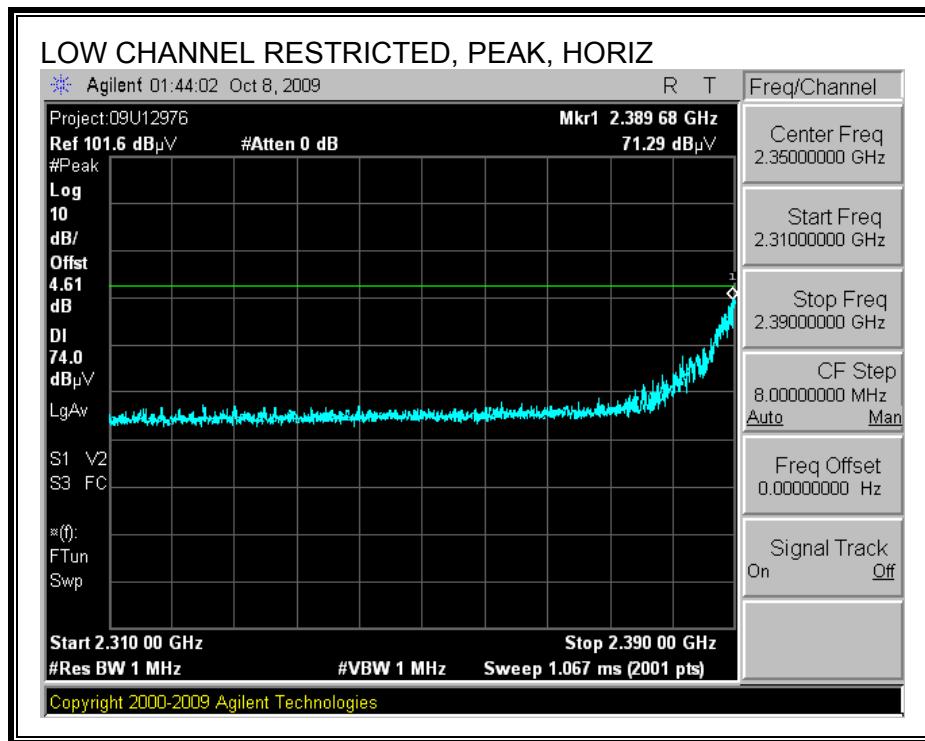



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

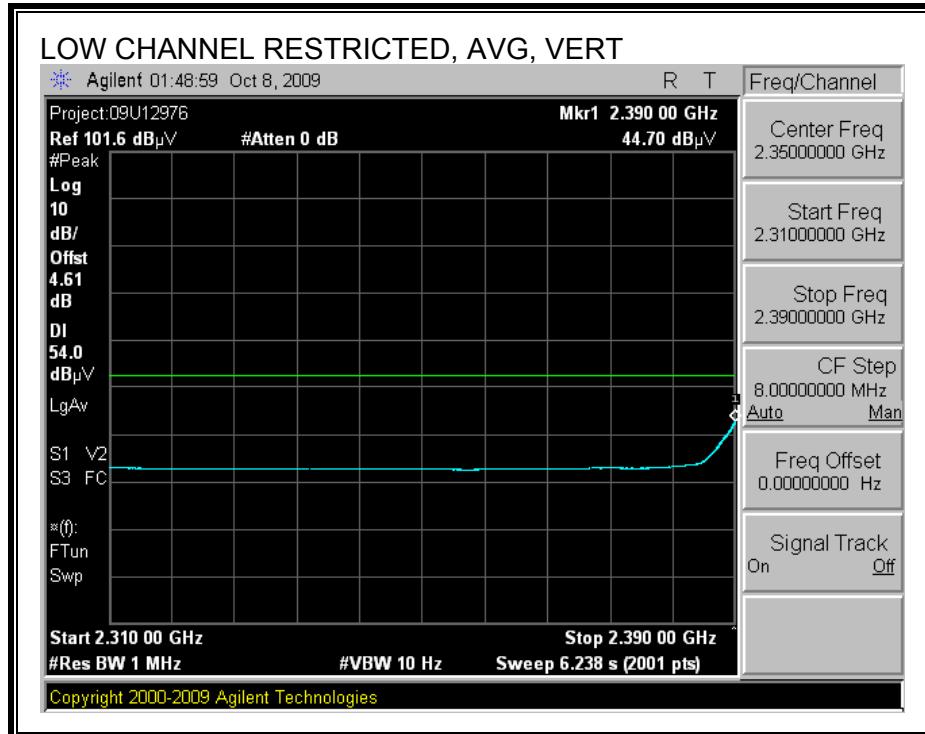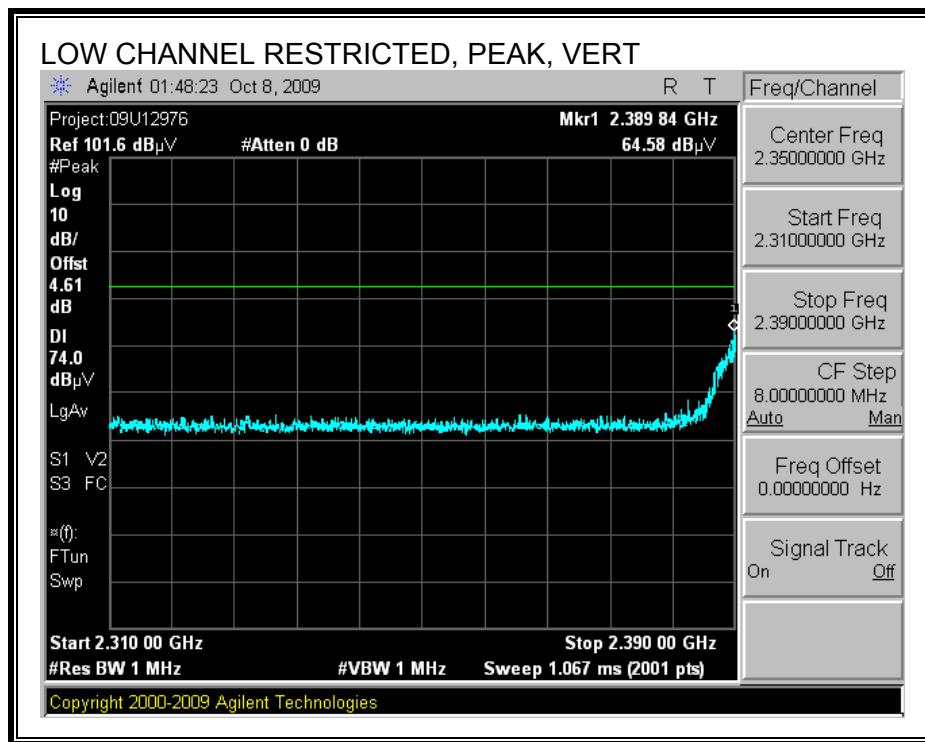



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

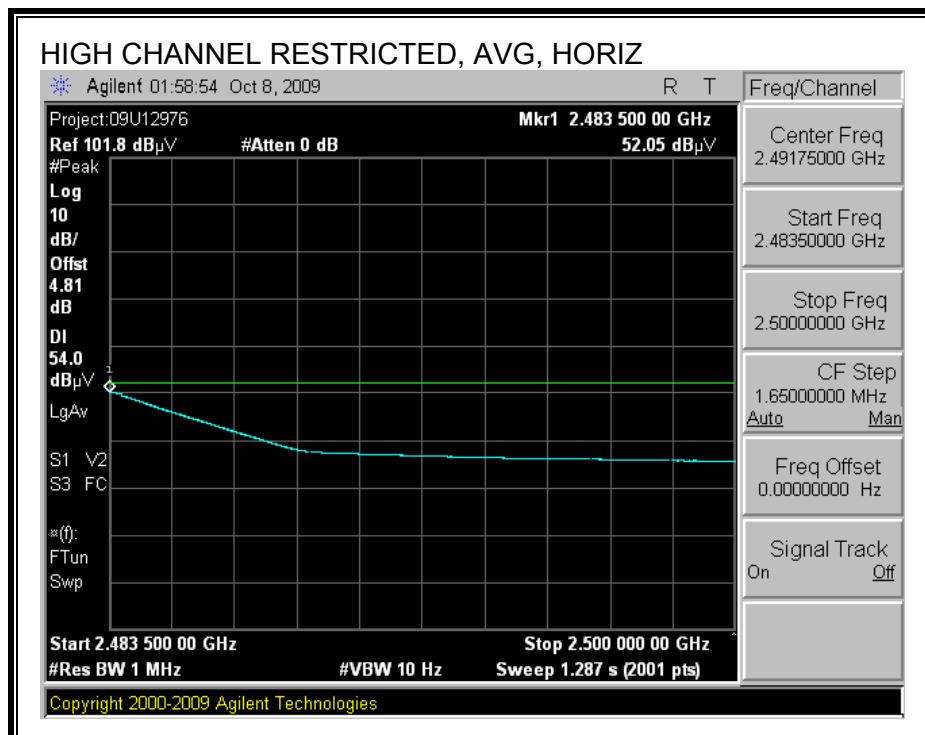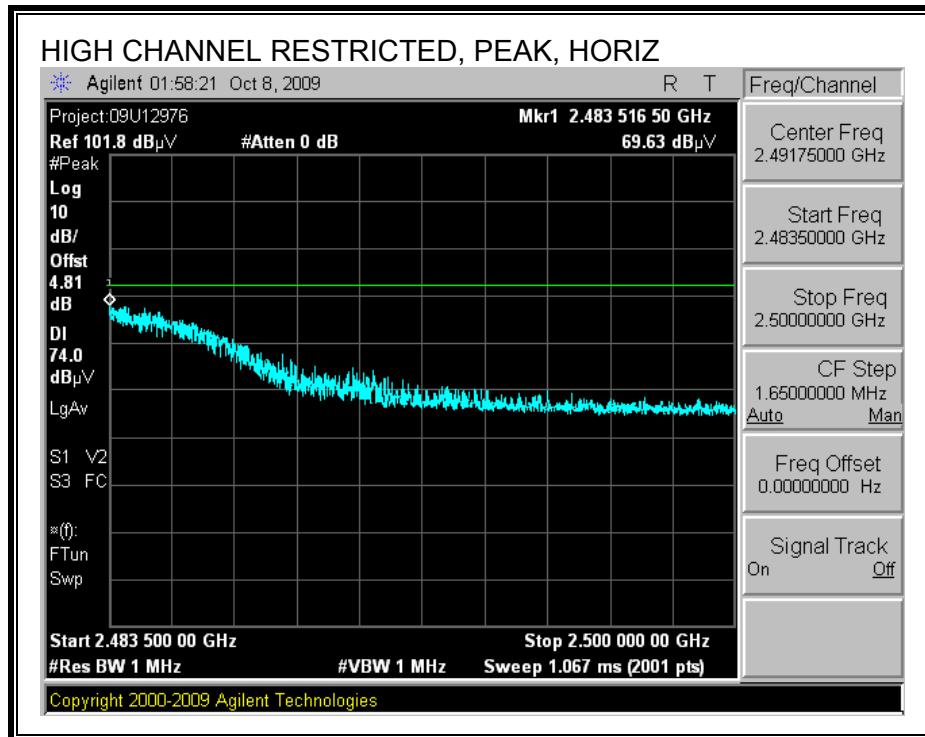



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

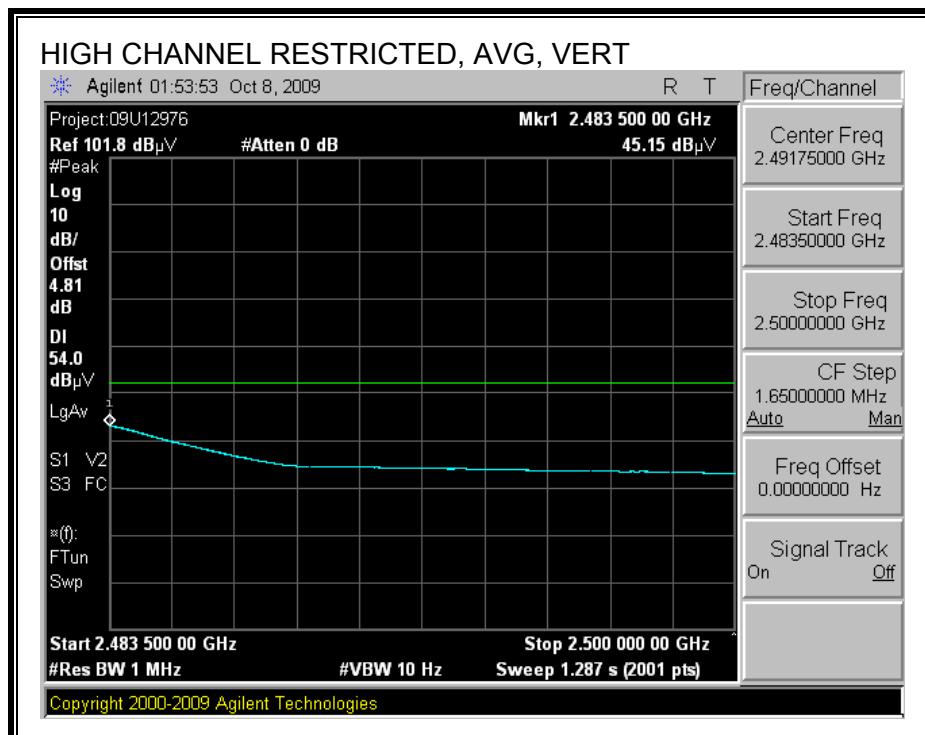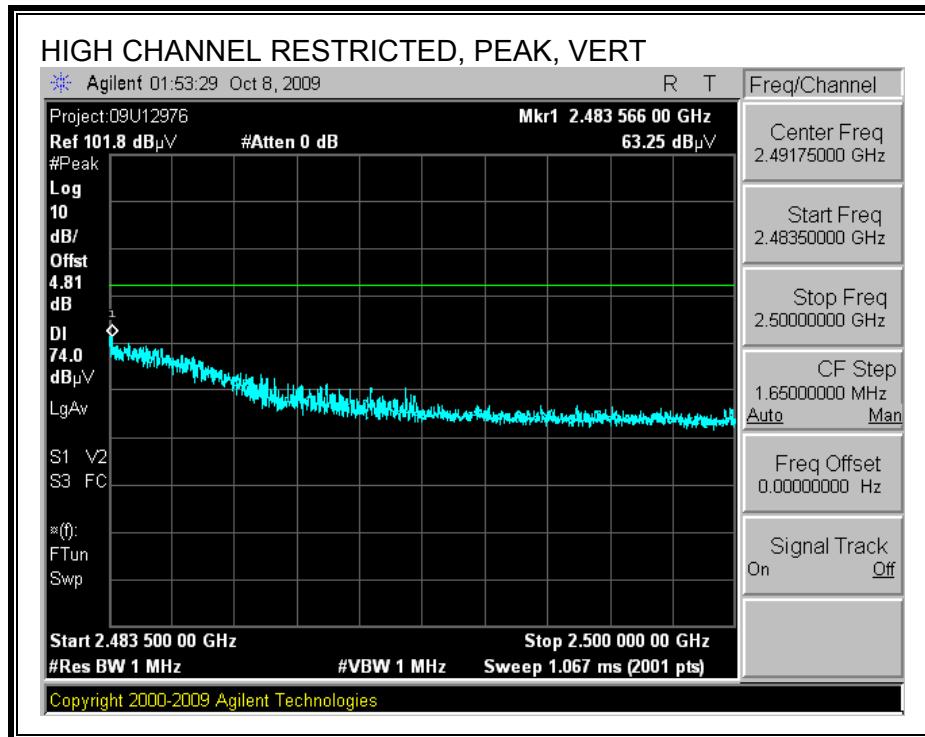



7.2.6. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

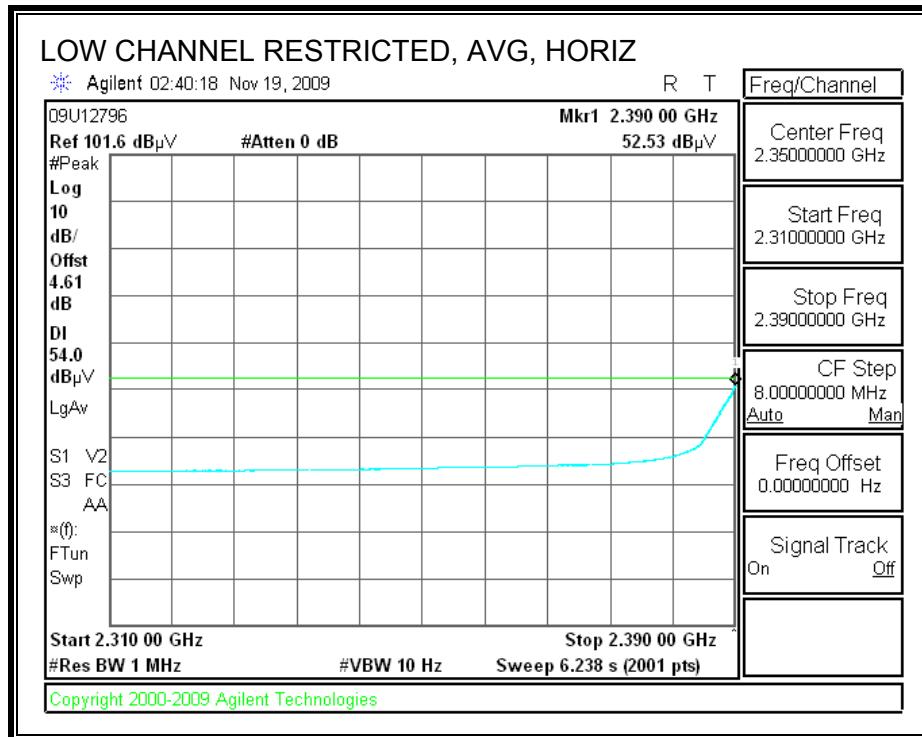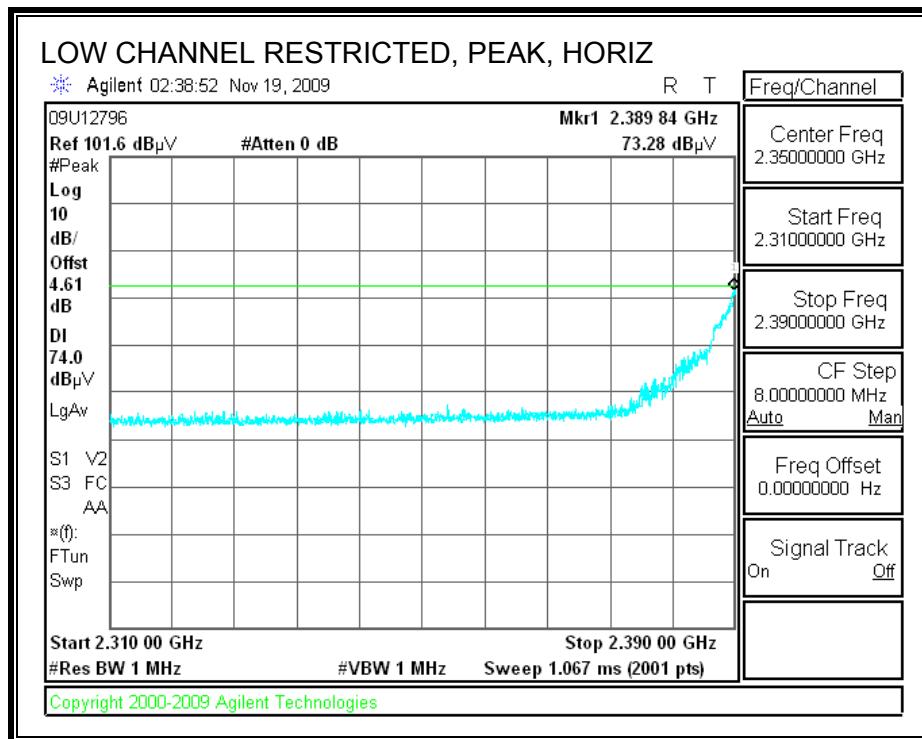



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

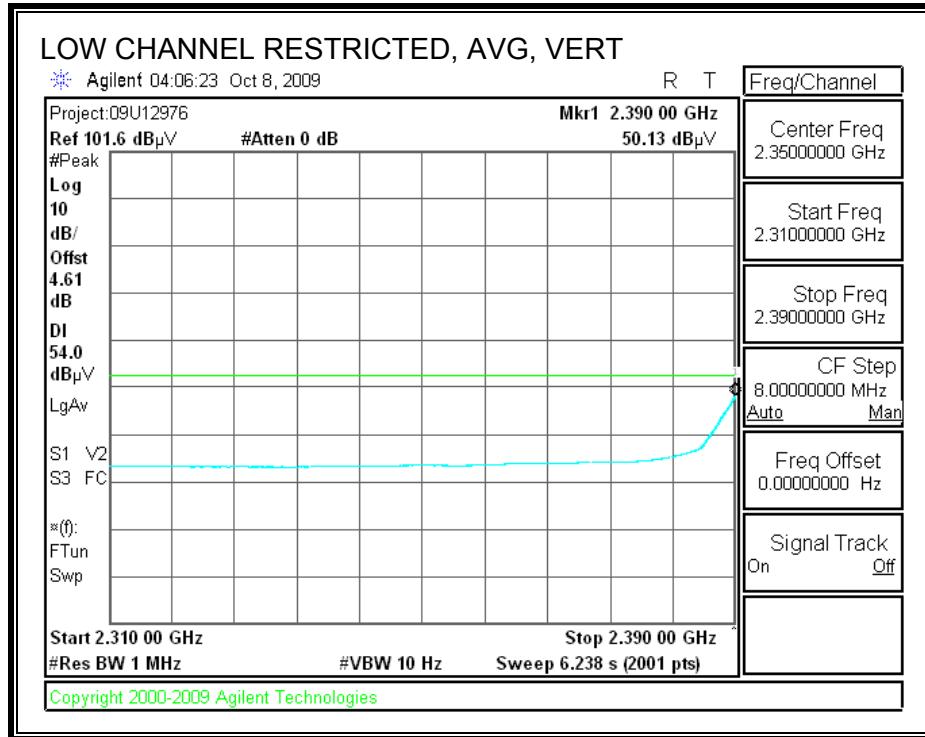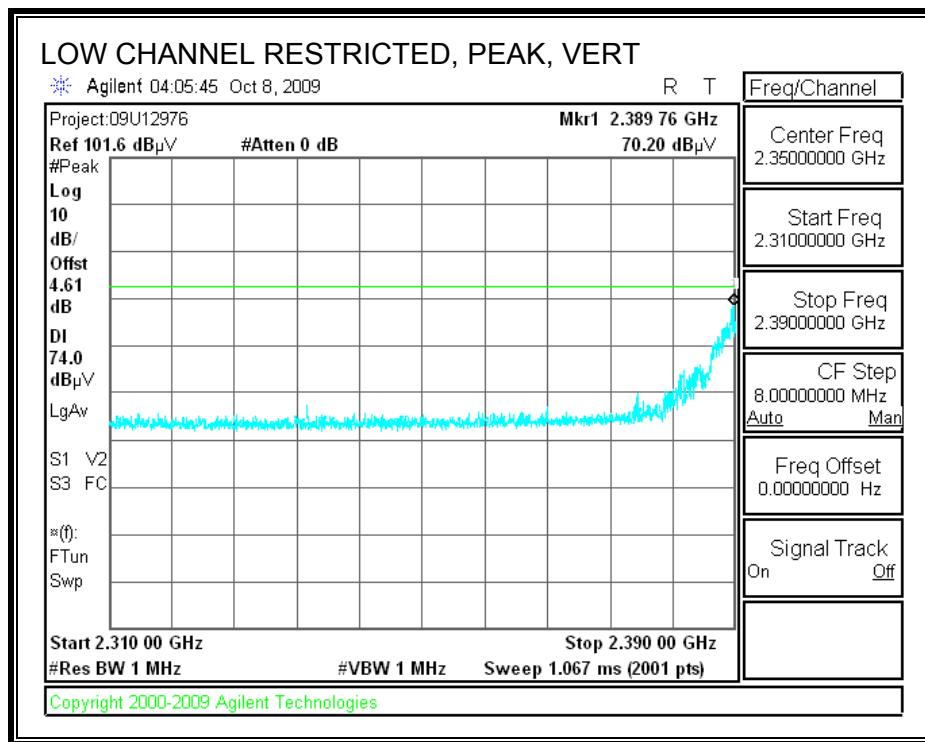



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

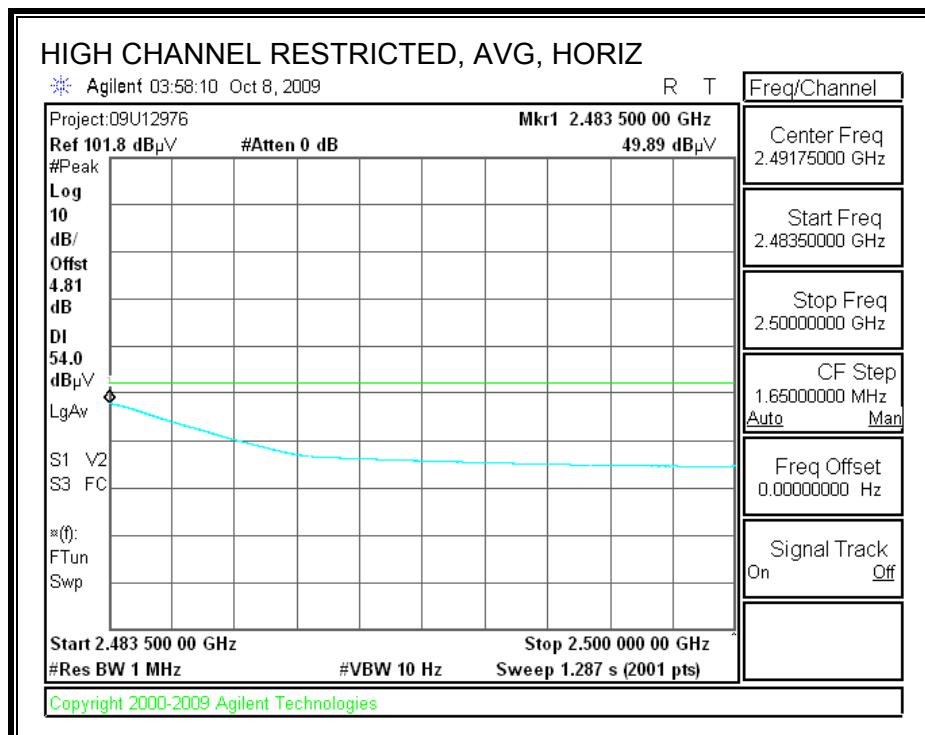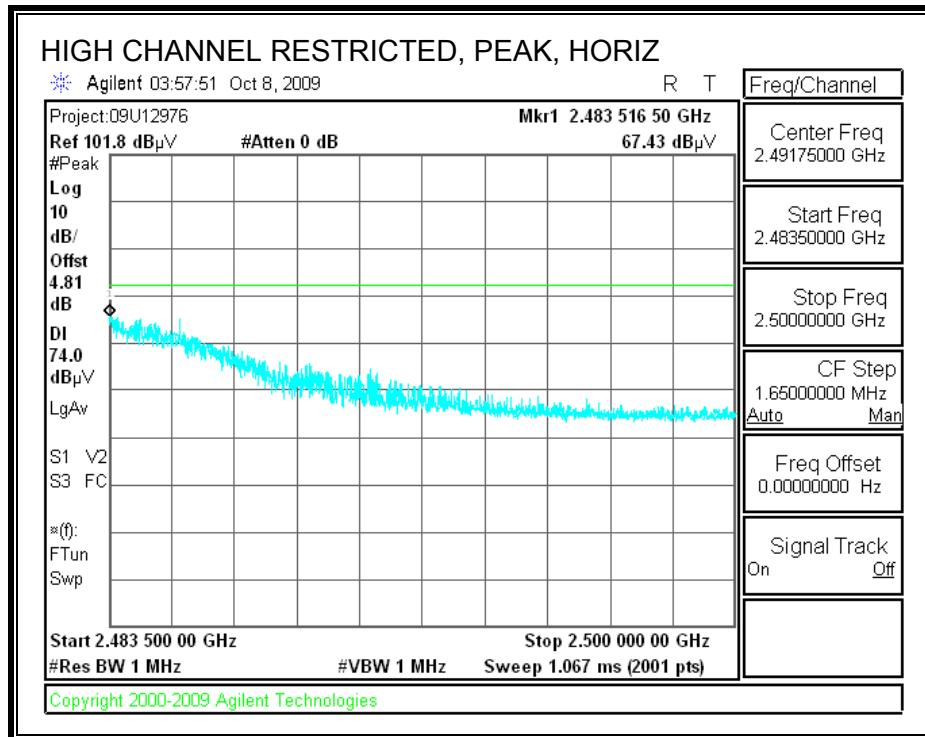



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

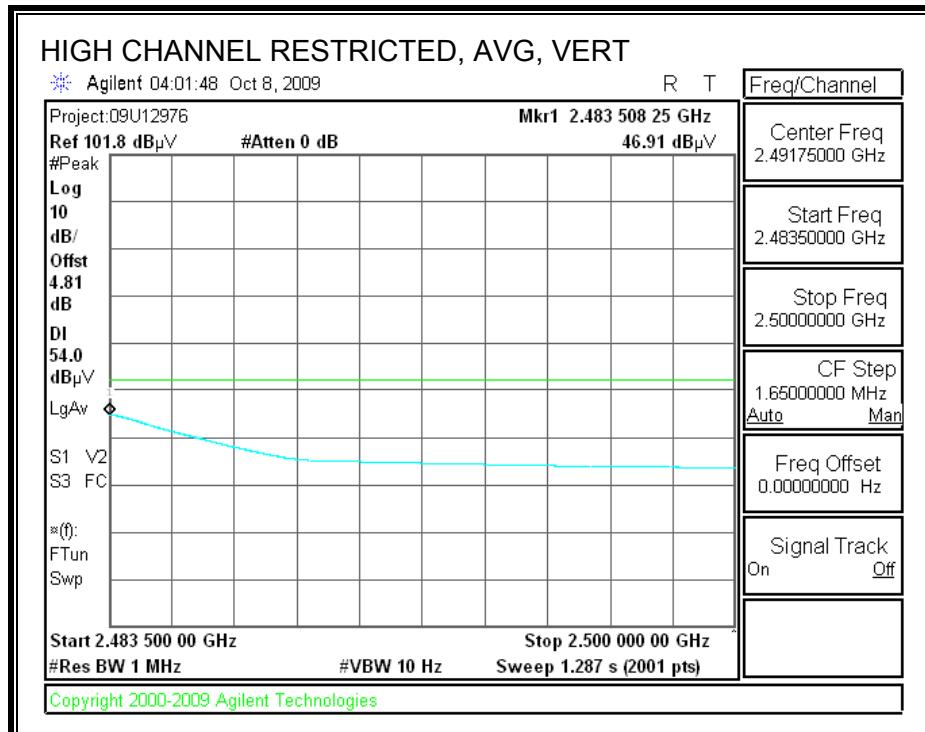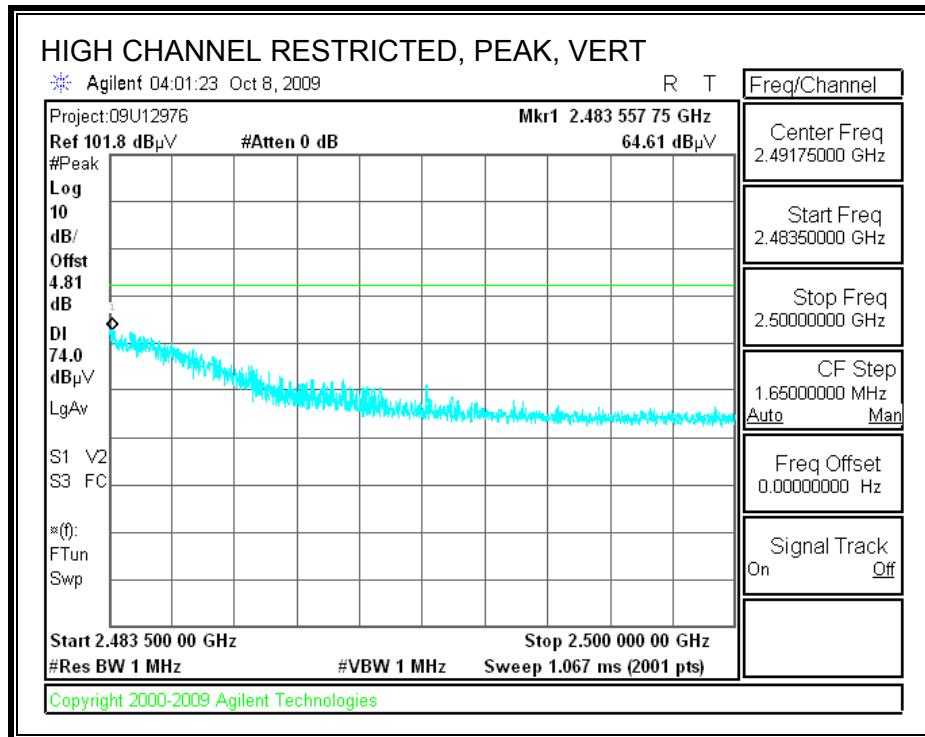



**7.2.7. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A+B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

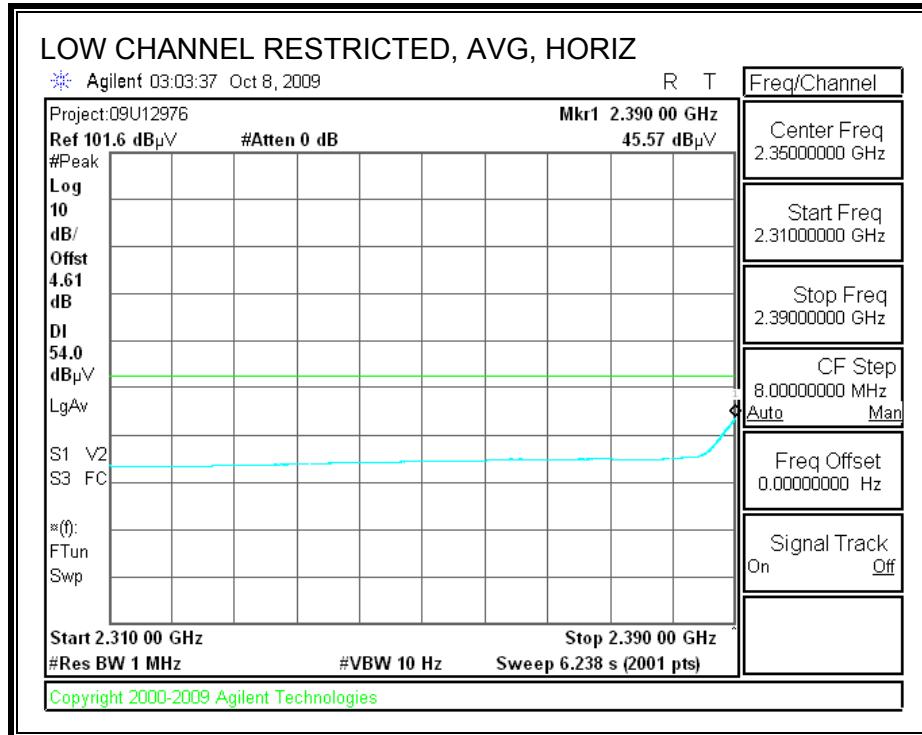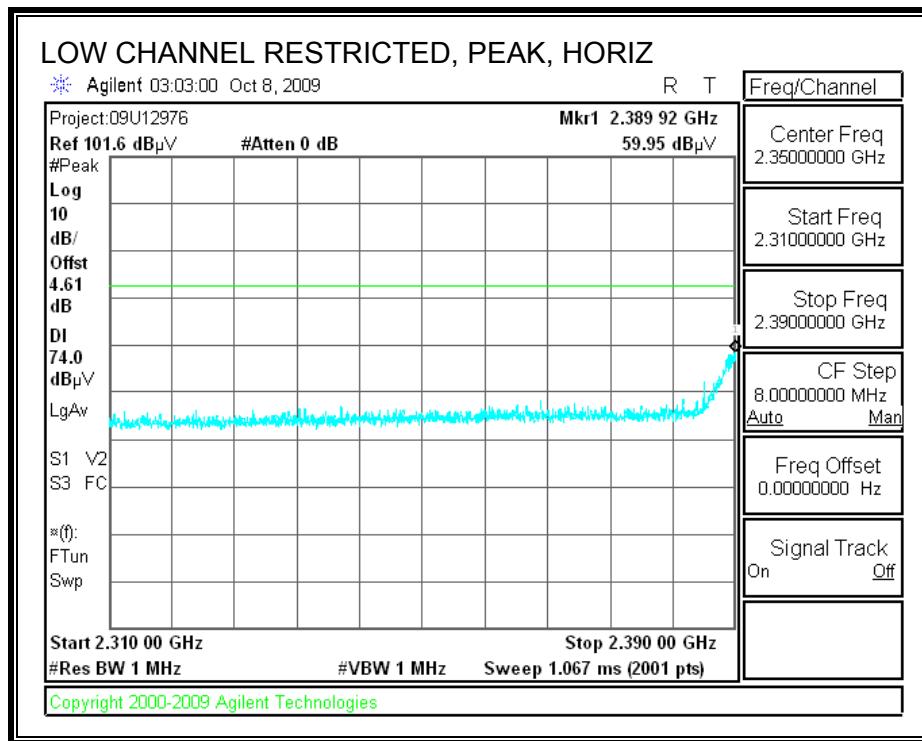



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

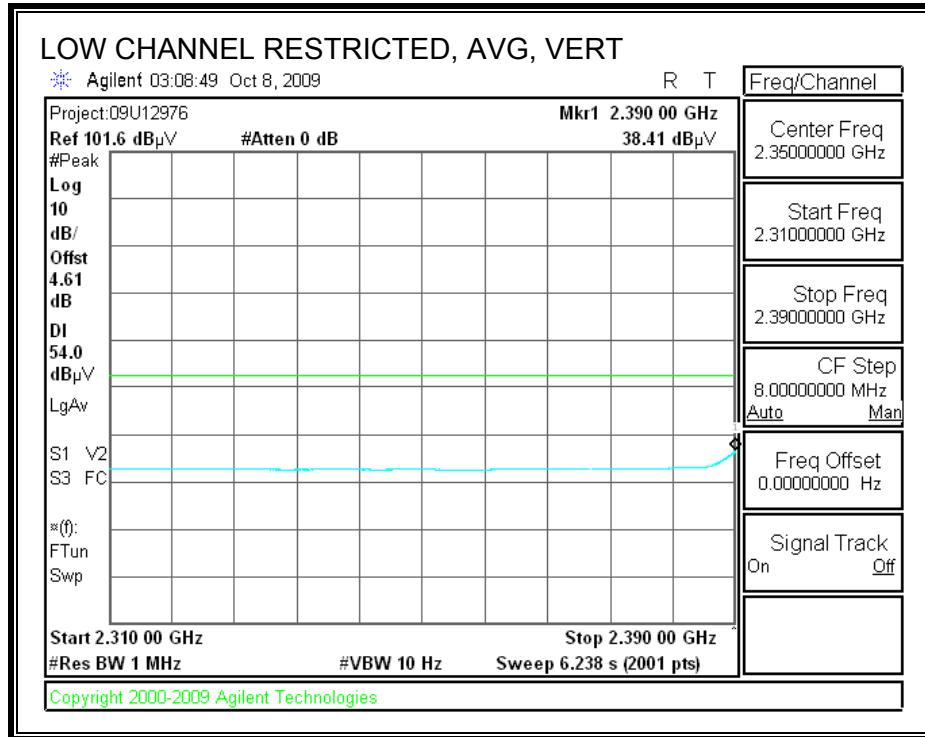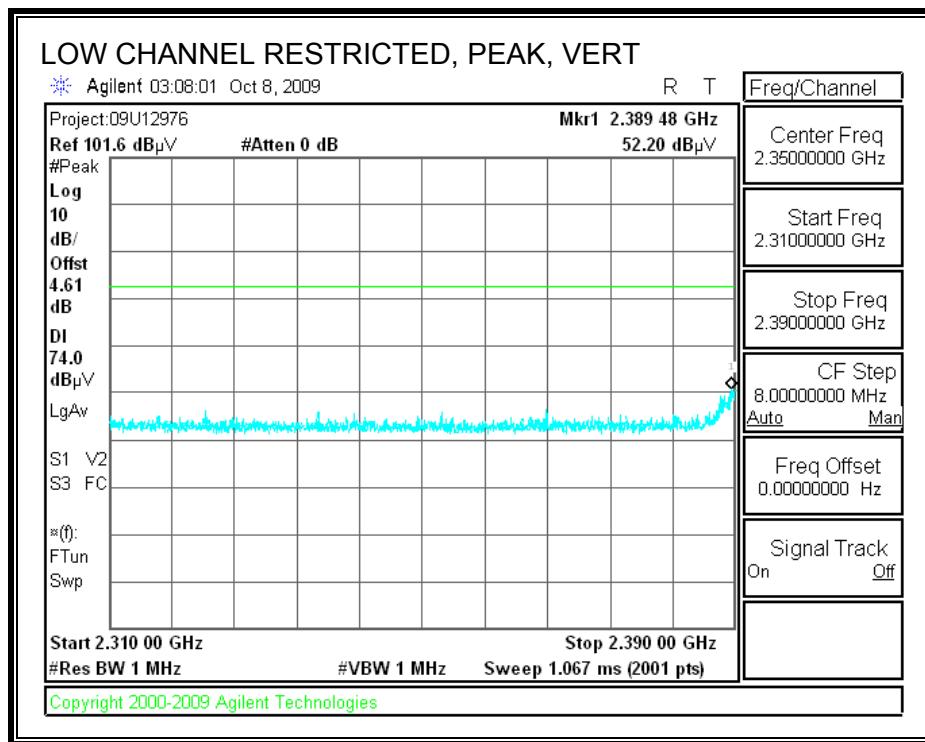

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

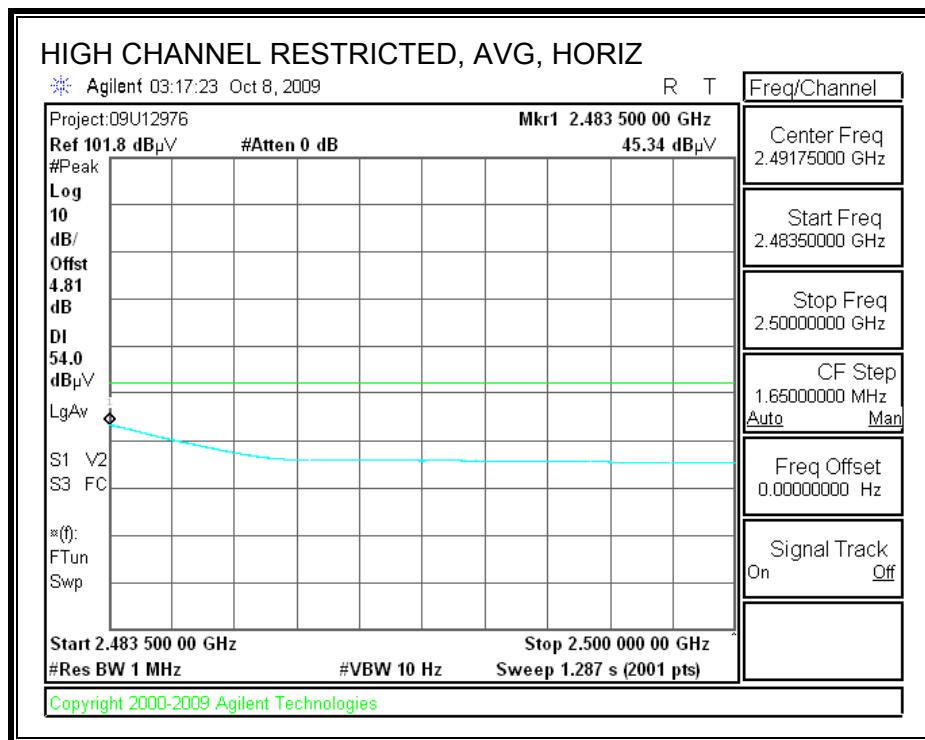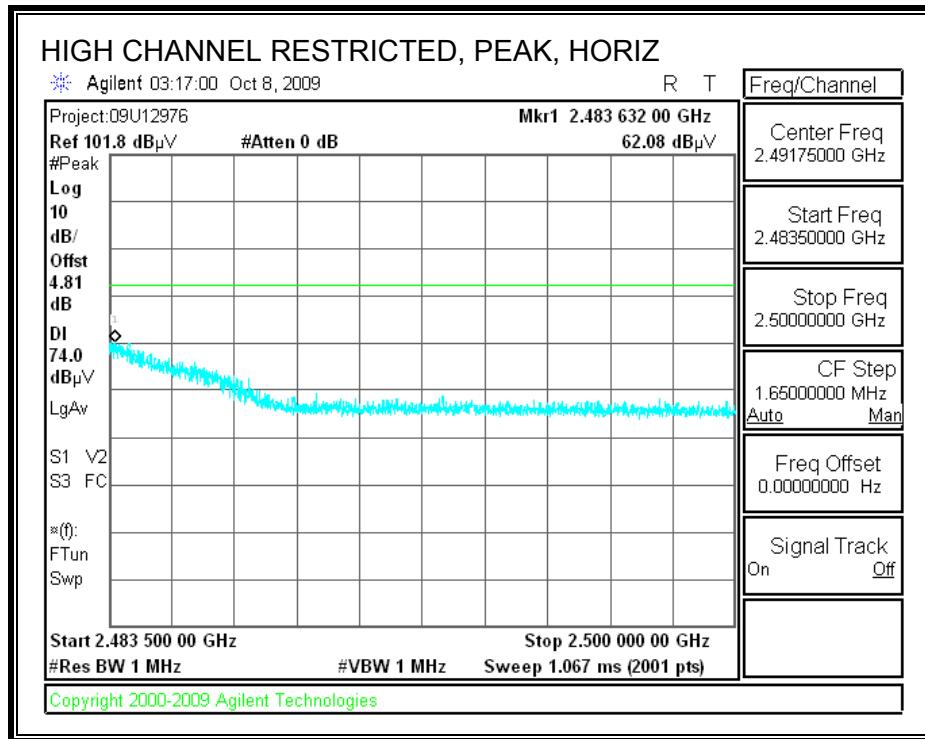



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

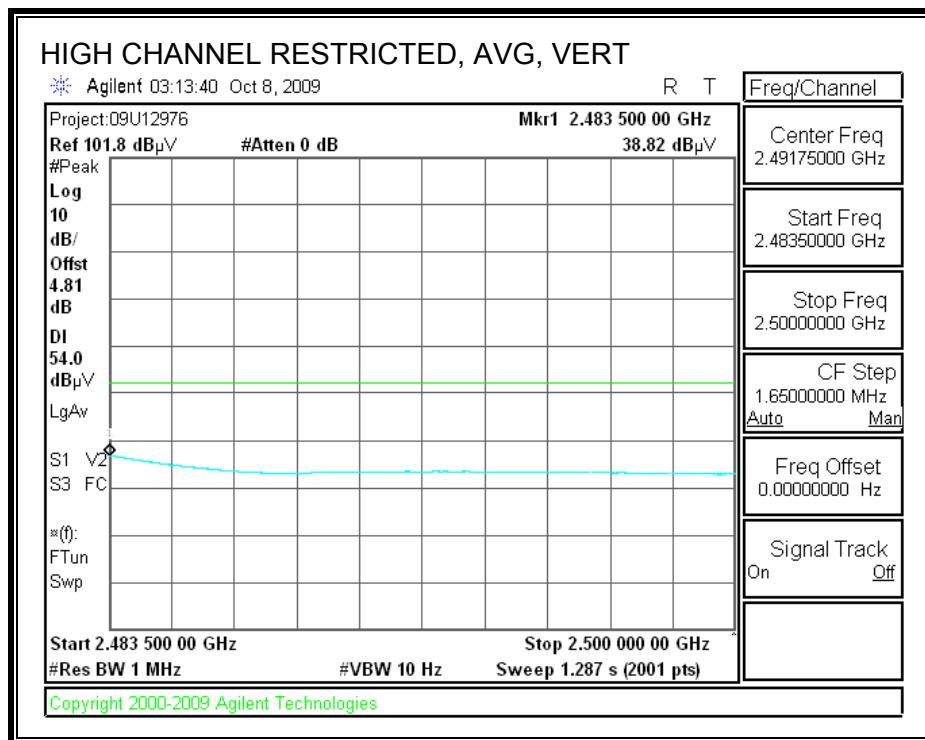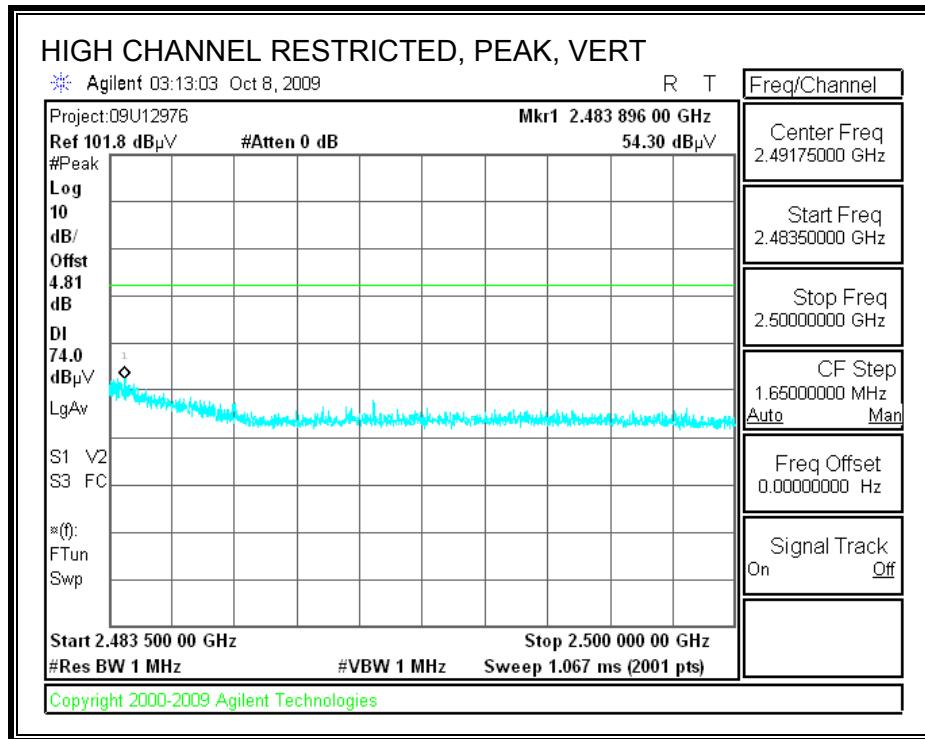



HARMONICS AND SPURIOUS EMISSIONS (WORST-CASE)

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																
<p>Company: INTEL CORPORATIONS Project #: 09U12796 Date: 10/5/2009 Test Engineer: MENGISTU MEKURIA Configuration: EUT AND AC ADAPTER Mode: TX HT20 MODE</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T144 Miteq 3008A00931</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="6">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td>R_001</td> <td colspan="6">Average Measurements RBW=1MHz, VBW=10Hz</td> </tr> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> <tr> <td colspan="15">LOW CHANNEL (2412.00 MHz)</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>40.0</td> <td>26.5</td> <td>33.0</td> <td>5.8</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>42.4</td> <td>28.9</td> <td>74</td> <td>54</td> <td>-31.6</td> <td>-25.1</td> <td>V</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>39.8</td> <td>26.7</td> <td>33.0</td> <td>5.8</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>42.2</td> <td>29.1</td> <td>74</td> <td>54</td> <td>-31.8</td> <td>-24.9</td> <td>H</td> </tr> <tr> <td colspan="15">MID CHANNEL (2437.00 MHz)</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>39.3</td> <td>26.2</td> <td>33.1</td> <td>5.8</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>41.8</td> <td>28.7</td> <td>74</td> <td>54</td> <td>-32.2</td> <td>-25.3</td> <td>V</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>39.3</td> <td>26.7</td> <td>33.1</td> <td>5.8</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>41.7</td> <td>29.1</td> <td>74</td> <td>54</td> <td>-32.3</td> <td>-24.9</td> <td>H</td> </tr> <tr> <td colspan="15">HI CHANNEL (2462.00 MHz)</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>39.2</td> <td>26.7</td> <td>33.1</td> <td>5.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>41.7</td> <td>29.3</td> <td>74</td> <td>54</td> <td>-32.3</td> <td>-24.7</td> <td>V</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>39.9</td> <td>27.7</td> <td>33.1</td> <td>5.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>42.4</td> <td>30.2</td> <td>74</td> <td>54</td> <td>-31.6</td> <td>-23.8</td> <td>H</td> </tr> <tr> <td colspan="15">Rev. 11.10.08</td> </tr> <tr> <td>f</td> <td colspan="3">Measurement Frequency</td> <td>Amp</td> <td colspan="3">Preamp Gain</td> <td colspan="3"></td> <td>Avg Lim</td> <td colspan="3">Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td colspan="3">Distance to Antenna</td> <td>D Corr</td> <td colspan="3">Distance Correct to 3 meters</td> <td colspan="3"></td> <td>Pk Lim</td> <td colspan="3">Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td colspan="3">Analyzer Reading</td> <td>Avg</td> <td colspan="3">Average Field Strength @ 3 m</td> <td colspan="3"></td> <td>Avg Mar</td> <td colspan="3">Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td colspan="3">Antenna Factor</td> <td>Peak</td> <td colspan="3">Calculated Peak Field Strength</td> <td colspan="3"></td> <td>Pk Mar</td> <td colspan="3">Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td colspan="3">Cable Loss</td> <td>HPF</td> <td colspan="3"></td> <td colspan="3"></td> <td></td> <td colspan="3"></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T73; S/N: 6717 @3m	T144 Miteq 3008A00931						FCC 15.205	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz						3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz, VBW=10Hz						f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	LOW CHANNEL (2412.00 MHz)															4.824	3.0	40.0	26.5	33.0	5.8	-36.5	0.0	0.0	42.4	28.9	74	54	-31.6	-25.1	V	4.824	3.0	39.8	26.7	33.0	5.8	-36.5	0.0	0.0	42.2	29.1	74	54	-31.8	-24.9	H	MID CHANNEL (2437.00 MHz)															4.874	3.0	39.3	26.2	33.1	5.8	-36.5	0.0	0.0	41.8	28.7	74	54	-32.2	-25.3	V	4.874	3.0	39.3	26.7	33.1	5.8	-36.5	0.0	0.0	41.7	29.1	74	54	-32.3	-24.9	H	HI CHANNEL (2462.00 MHz)															4.924	3.0	39.2	26.7	33.1	5.9	-36.5	0.0	0.0	41.7	29.3	74	54	-32.3	-24.7	V	4.924	3.0	39.9	27.7	33.1	5.9	-36.5	0.0	0.0	42.4	30.2	74	54	-31.6	-23.8	H	Rev. 11.10.08															f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			CL	Cable Loss			HPF										
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																									
T73; S/N: 6717 @3m	T144 Miteq 3008A00931						FCC 15.205																																																																																																																																																																																																																																																																																																																									
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																								
3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz, VBW=10Hz																																																																																																																																																																																																																																																																																																																								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																	
LOW CHANNEL (2412.00 MHz)																																																																																																																																																																																																																																																																																																																																
4.824	3.0	40.0	26.5	33.0	5.8	-36.5	0.0	0.0	42.4	28.9	74	54	-31.6	-25.1	V																																																																																																																																																																																																																																																																																																																	
4.824	3.0	39.8	26.7	33.0	5.8	-36.5	0.0	0.0	42.2	29.1	74	54	-31.8	-24.9	H																																																																																																																																																																																																																																																																																																																	
MID CHANNEL (2437.00 MHz)																																																																																																																																																																																																																																																																																																																																
4.874	3.0	39.3	26.2	33.1	5.8	-36.5	0.0	0.0	41.8	28.7	74	54	-32.2	-25.3	V																																																																																																																																																																																																																																																																																																																	
4.874	3.0	39.3	26.7	33.1	5.8	-36.5	0.0	0.0	41.7	29.1	74	54	-32.3	-24.9	H																																																																																																																																																																																																																																																																																																																	
HI CHANNEL (2462.00 MHz)																																																																																																																																																																																																																																																																																																																																
4.924	3.0	39.2	26.7	33.1	5.9	-36.5	0.0	0.0	41.7	29.3	74	54	-32.3	-24.7	V																																																																																																																																																																																																																																																																																																																	
4.924	3.0	39.9	27.7	33.1	5.9	-36.5	0.0	0.0	42.4	30.2	74	54	-31.6	-23.8	H																																																																																																																																																																																																																																																																																																																	
Rev. 11.10.08																																																																																																																																																																																																																																																																																																																																
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																				
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																				
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																				
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																				
CL	Cable Loss			HPF																																																																																																																																																																																																																																																																																																																												



7.2.8. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

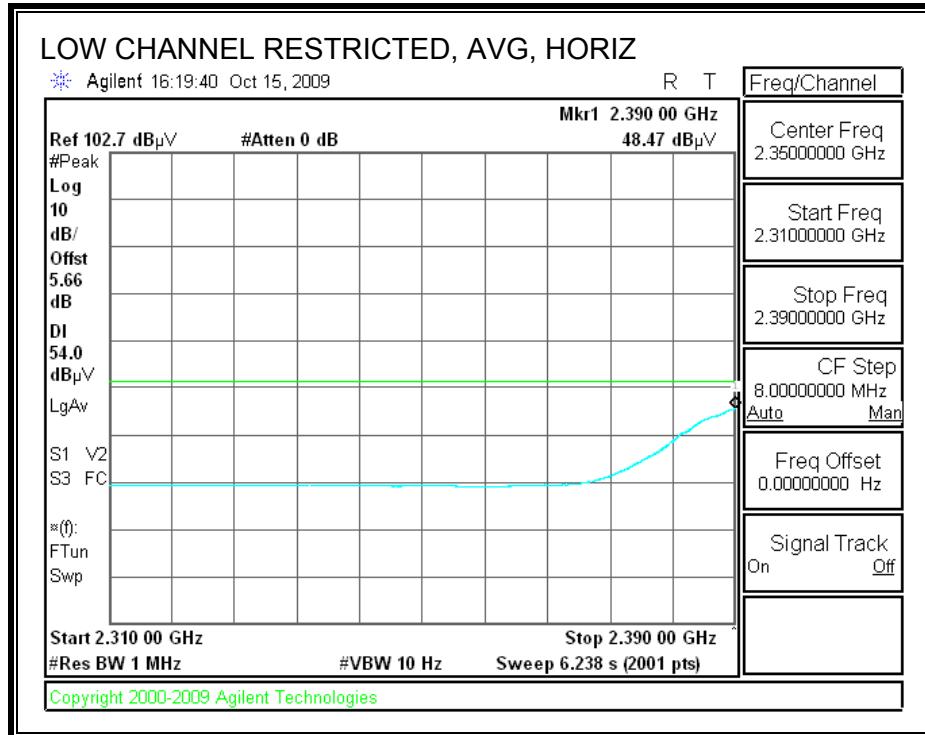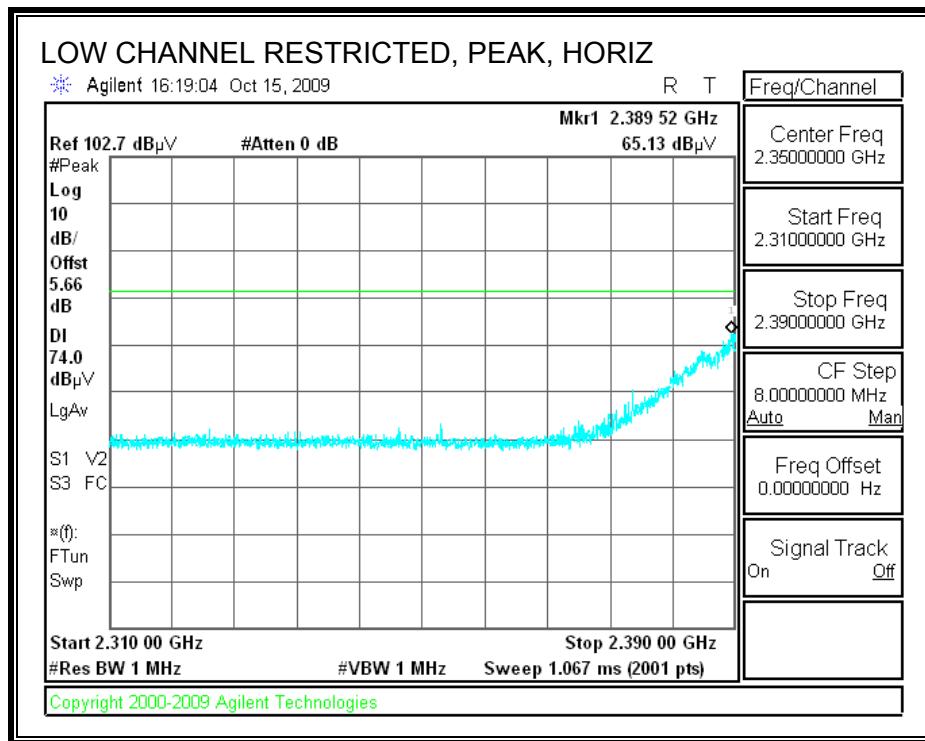



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

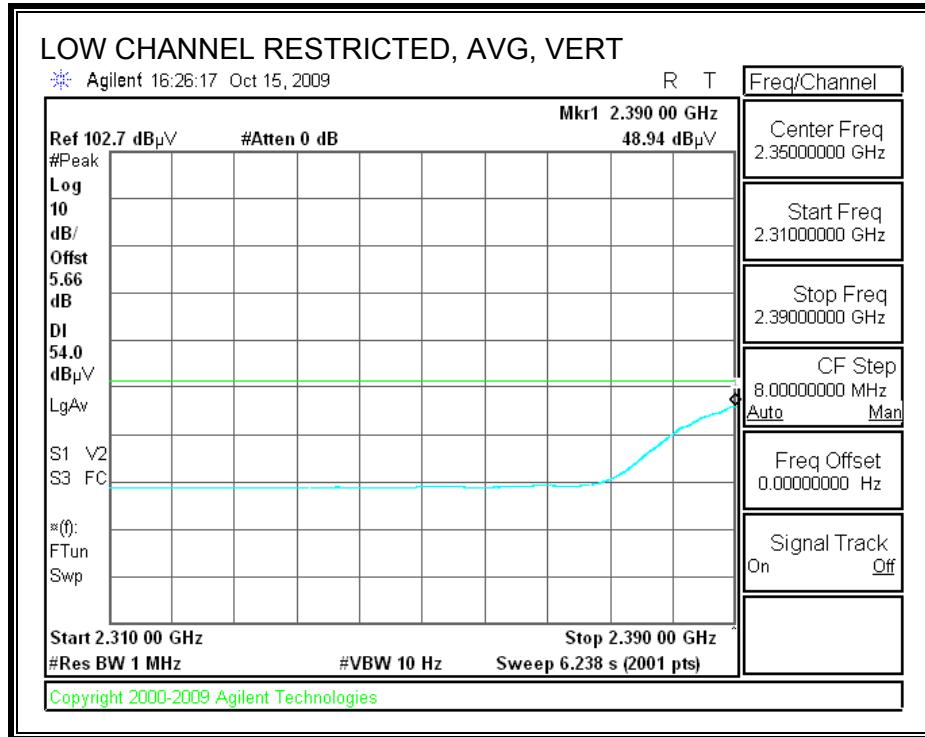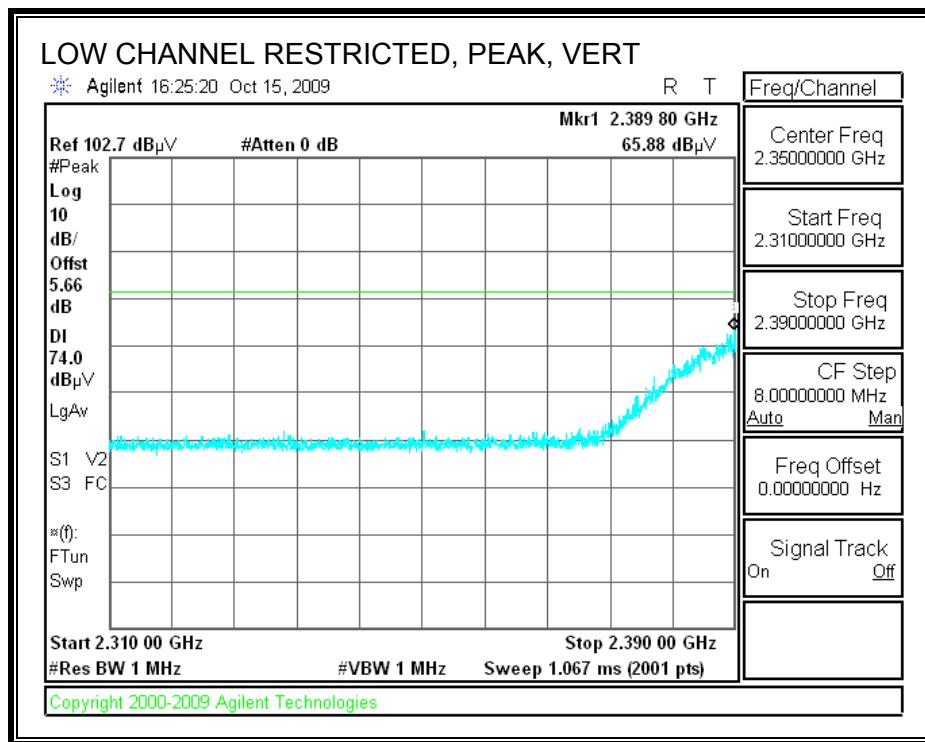



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

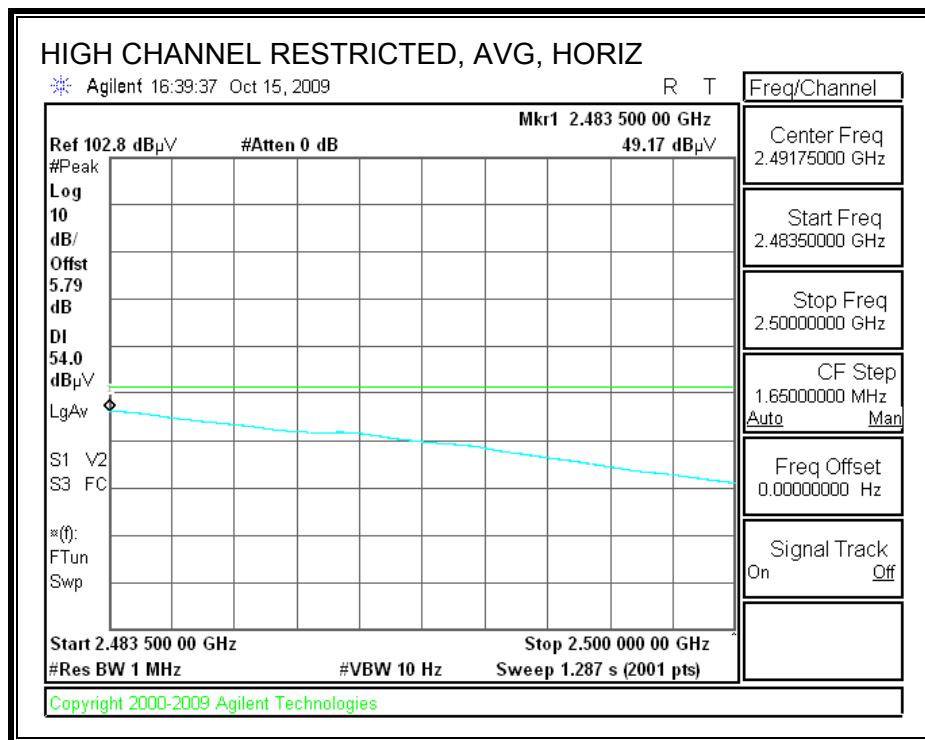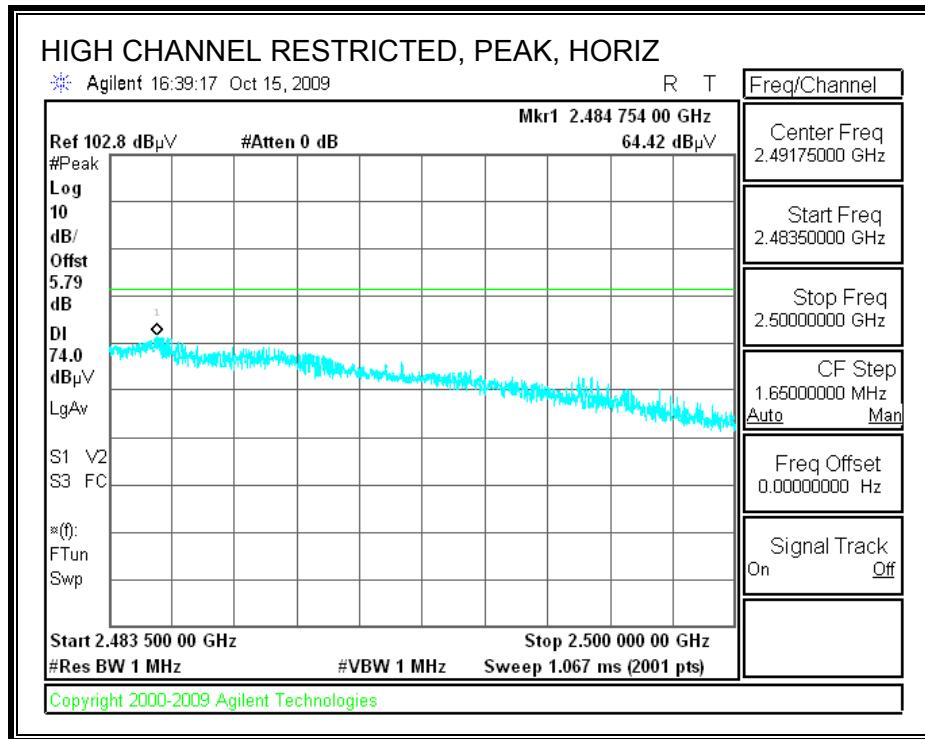



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

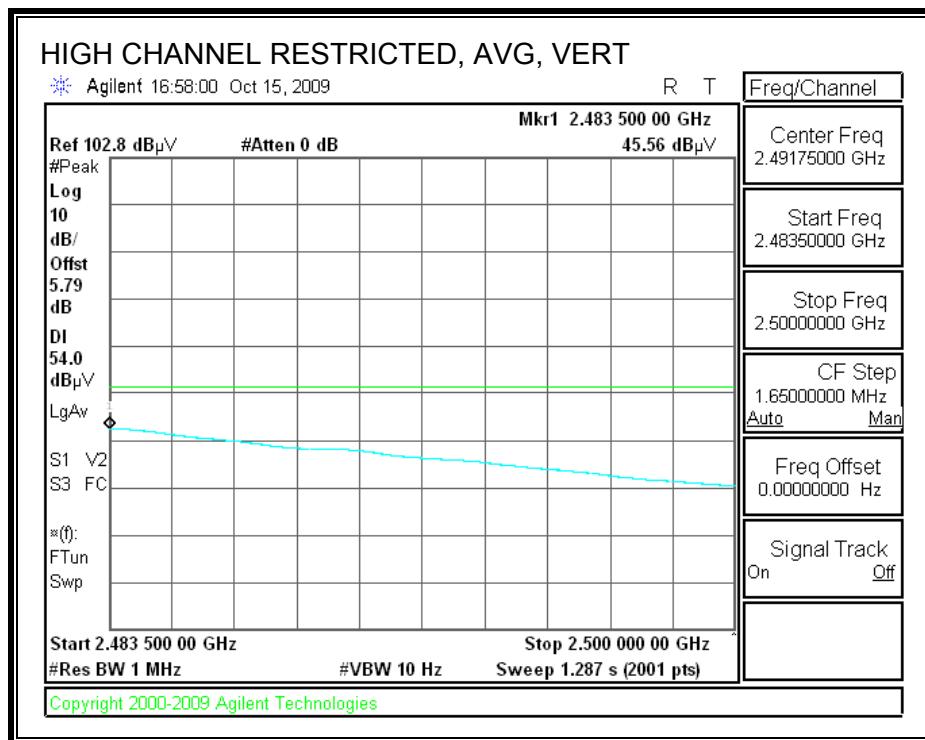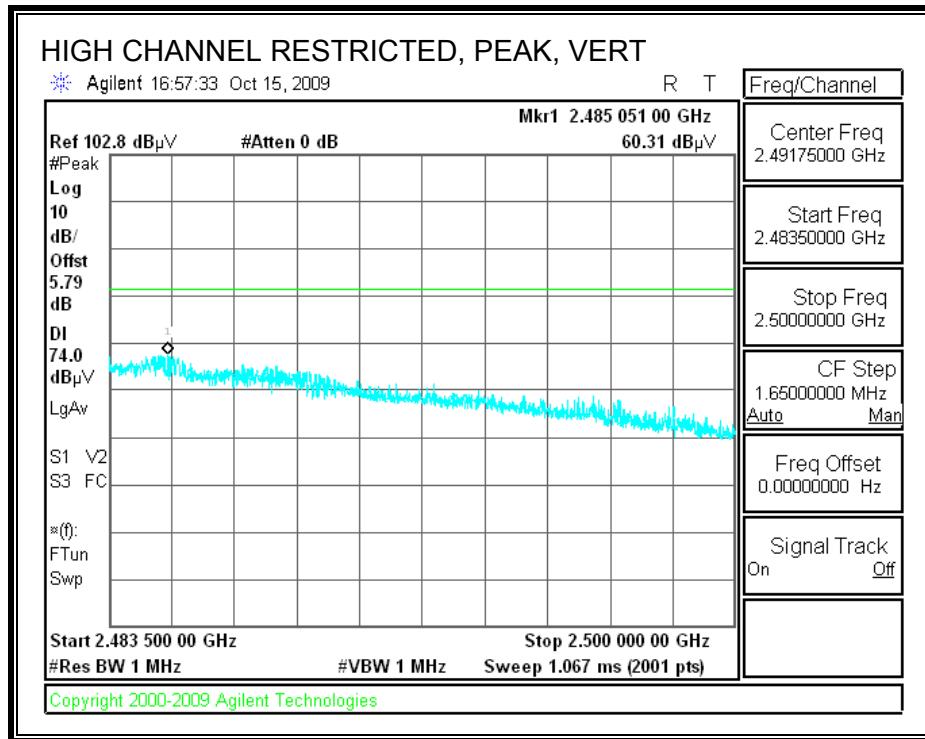



7.2.9. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

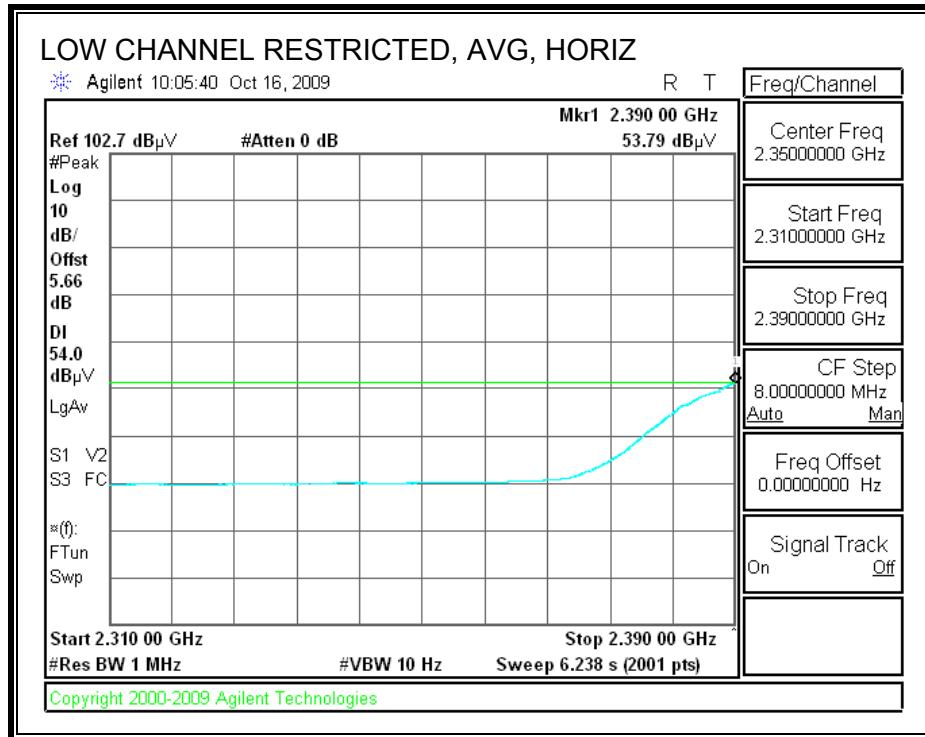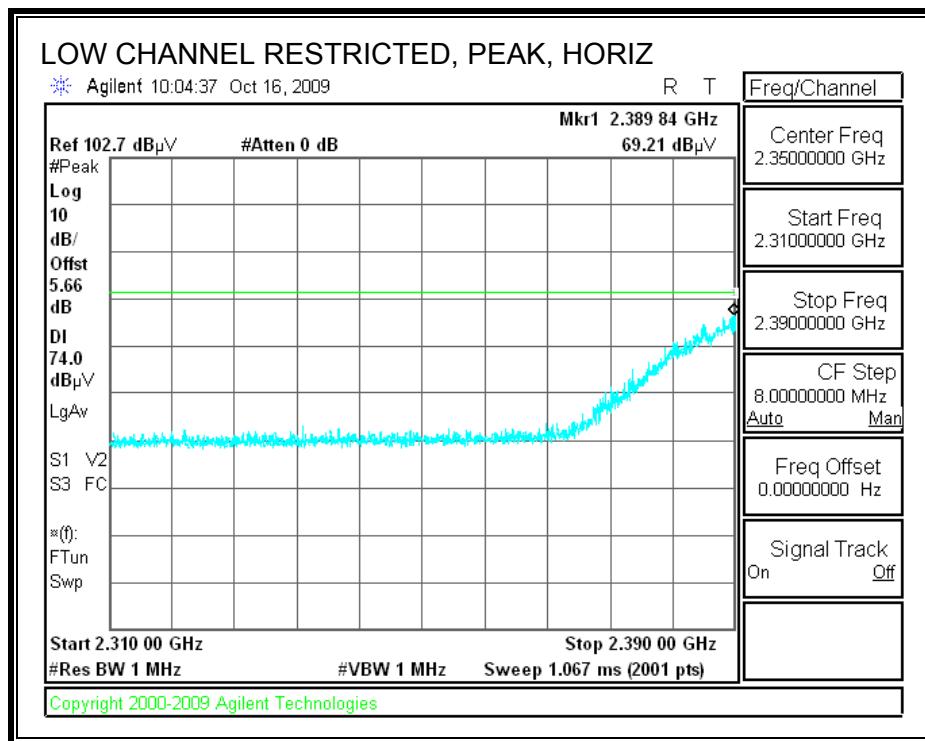



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

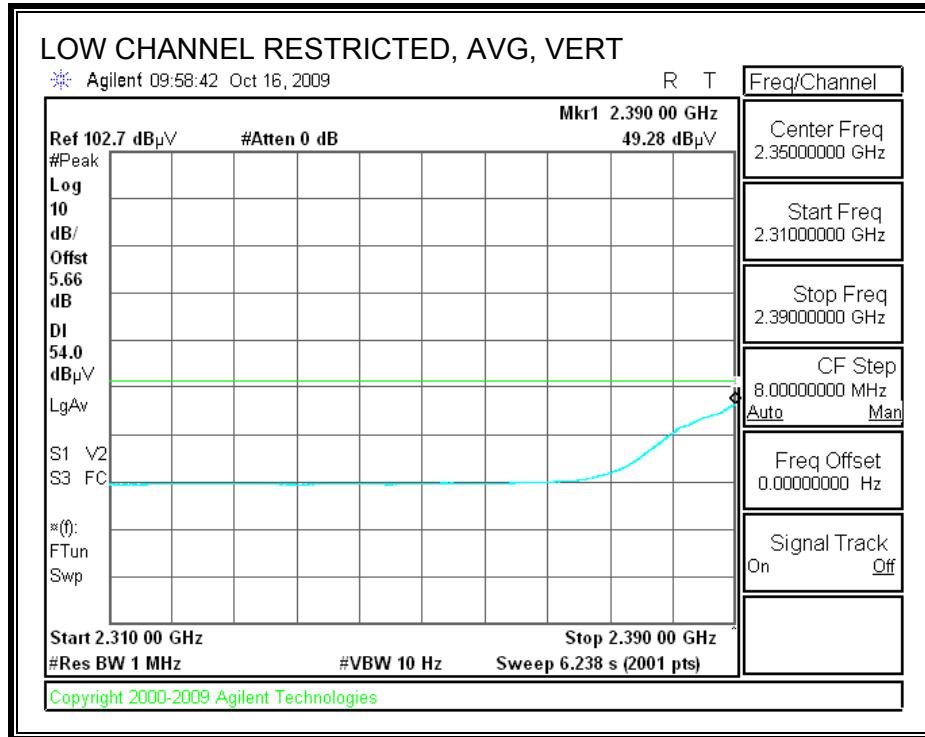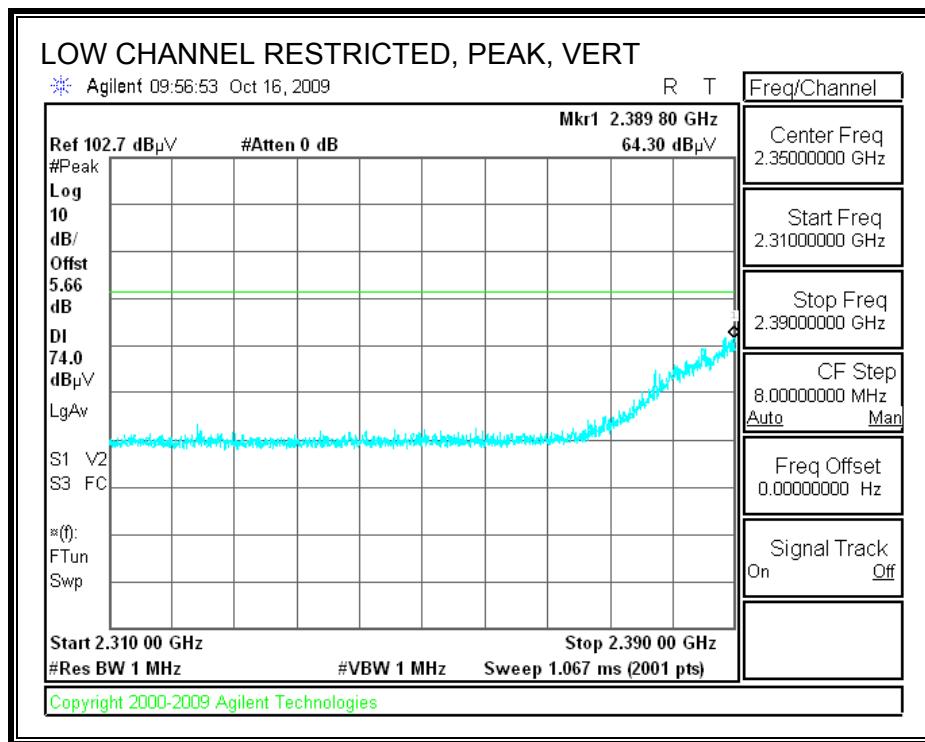



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

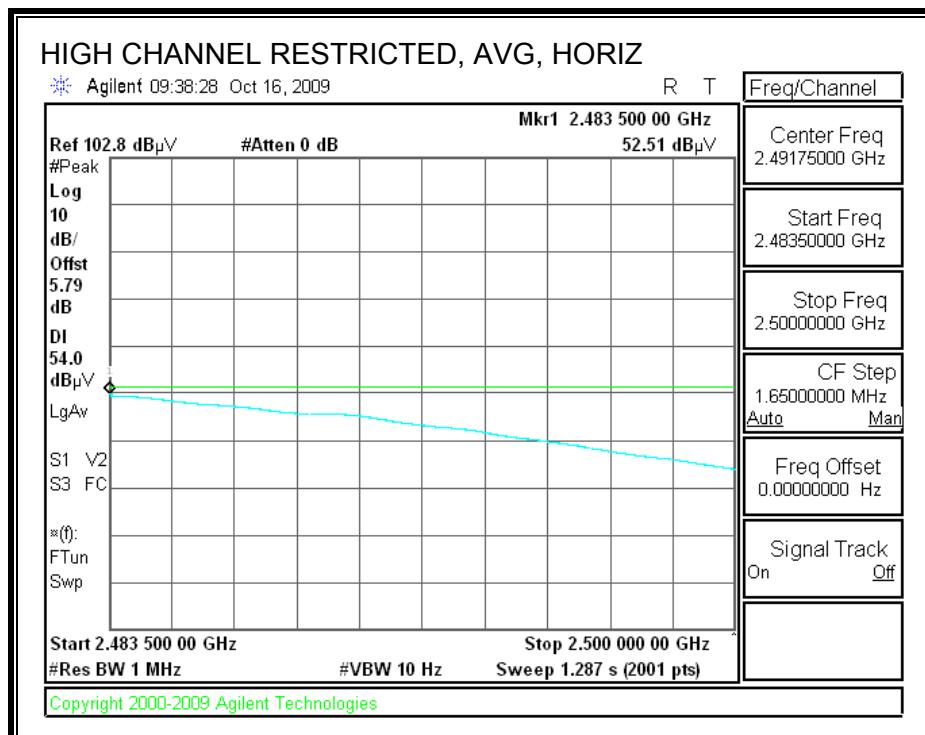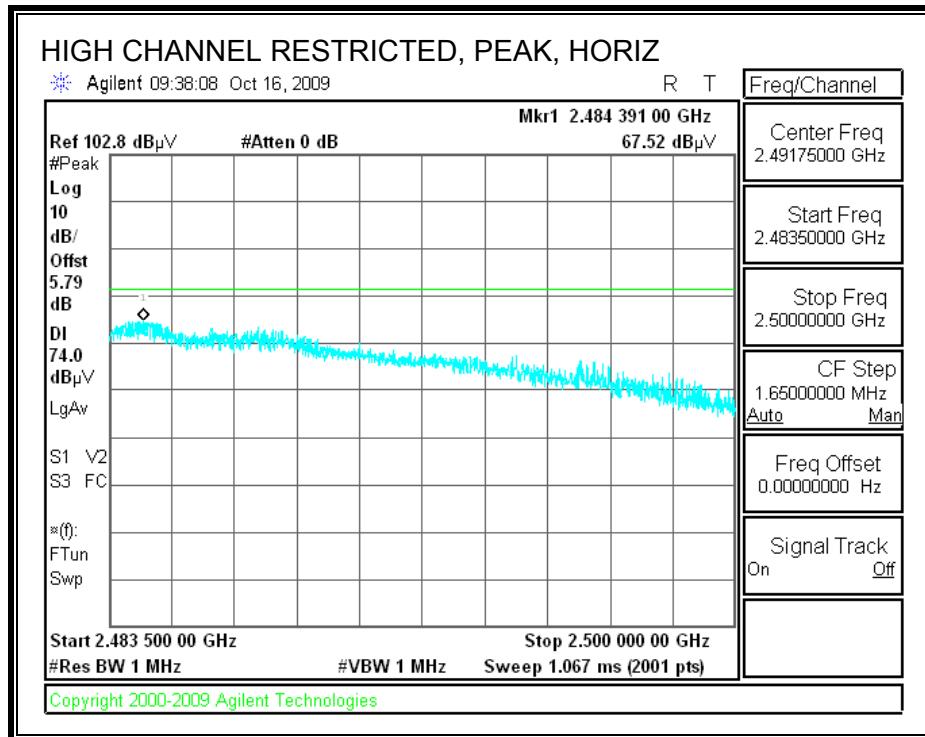



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

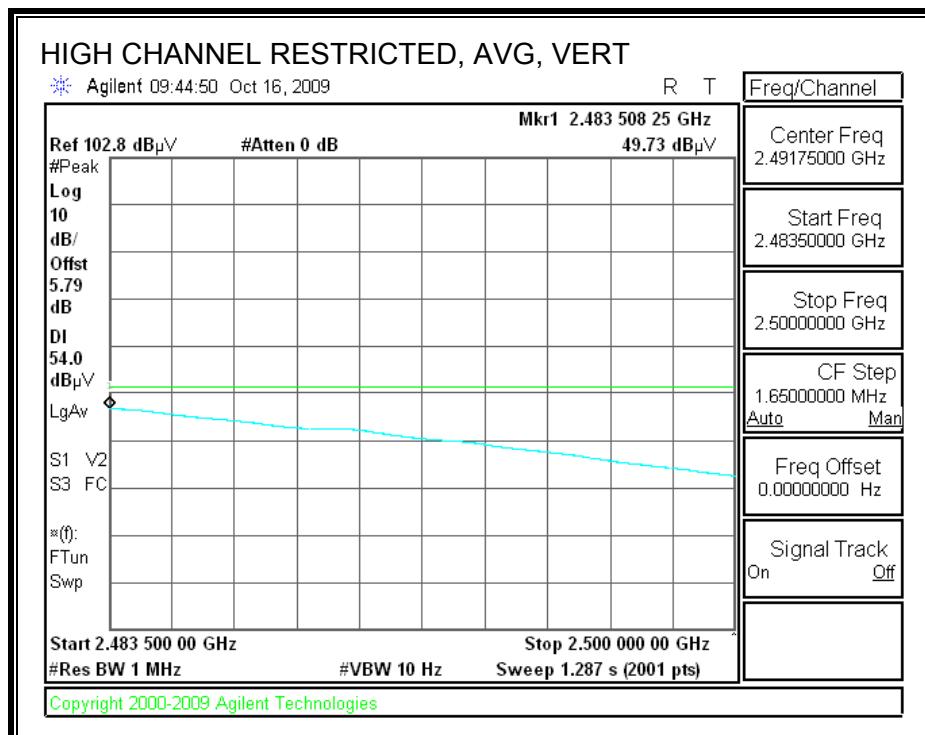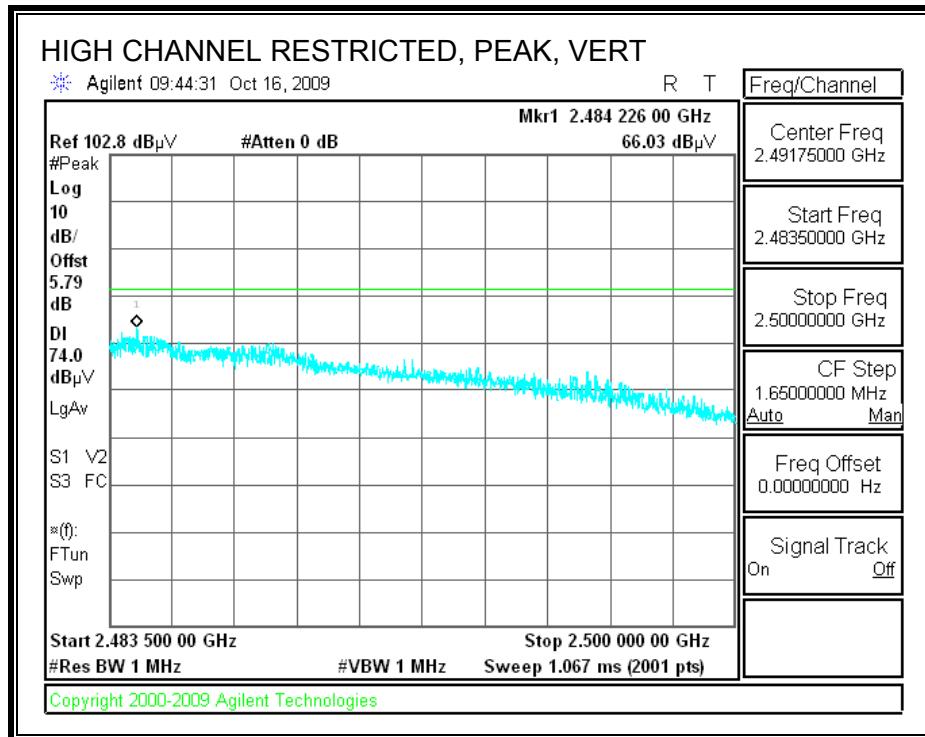



**7.2.10. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A+B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

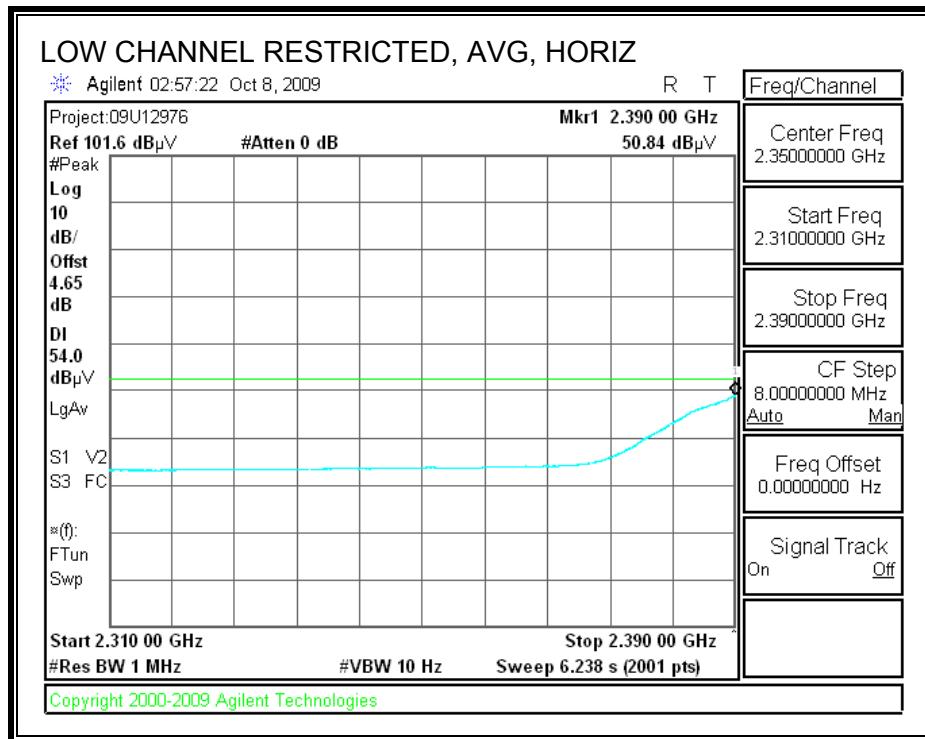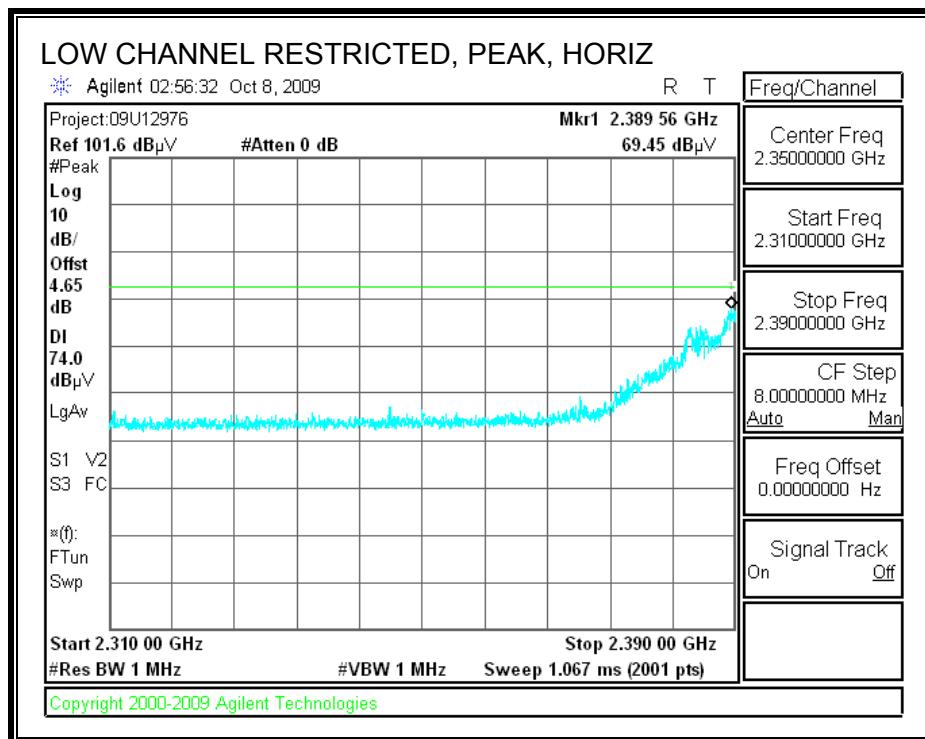



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

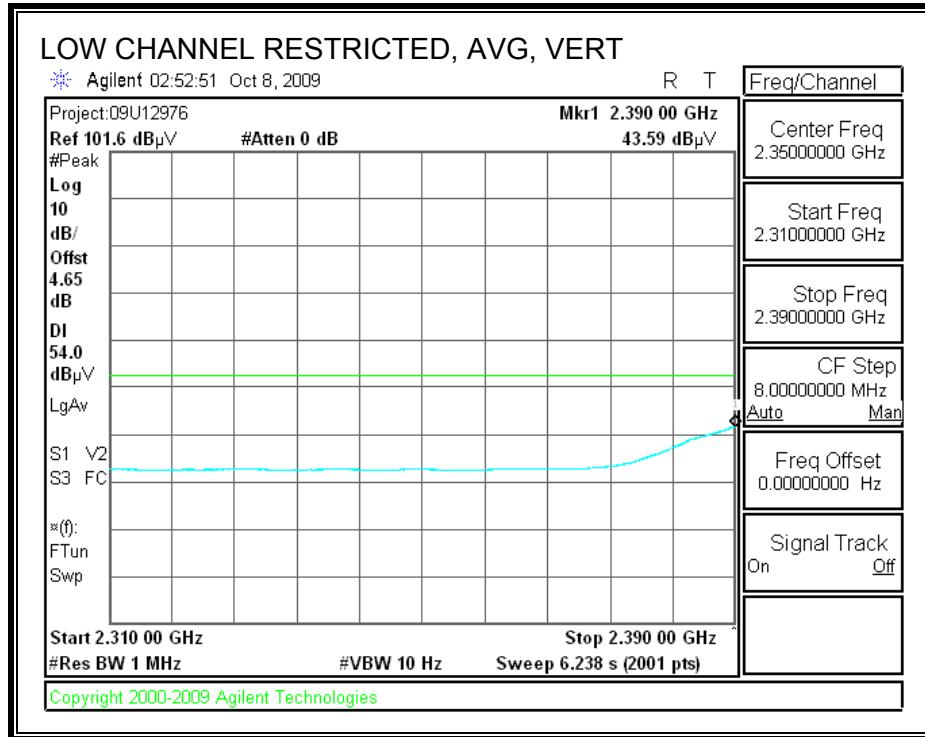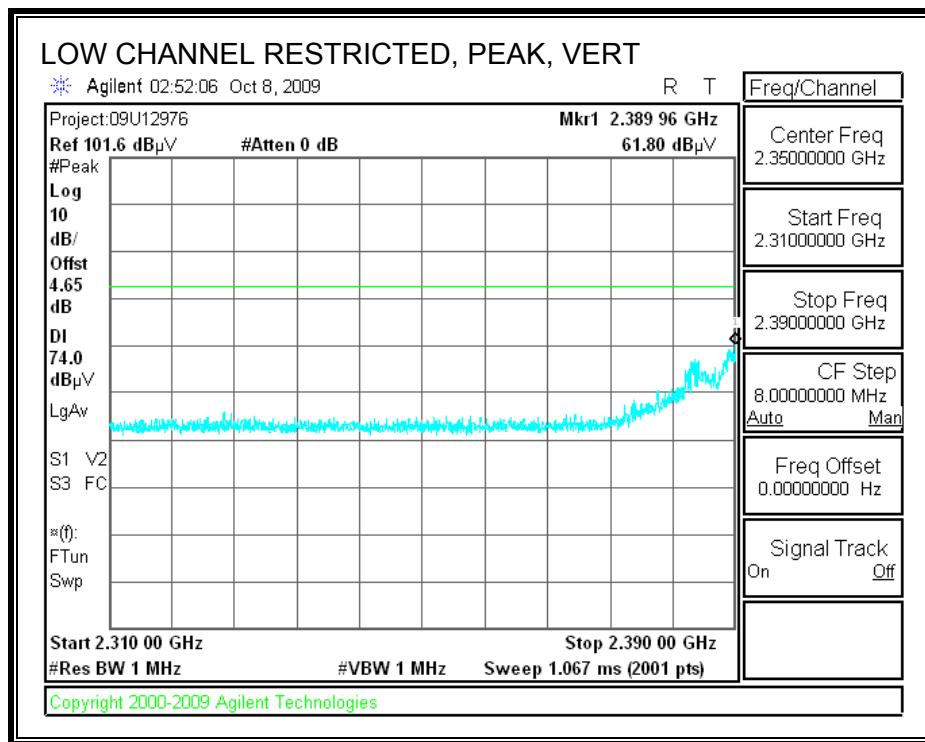

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

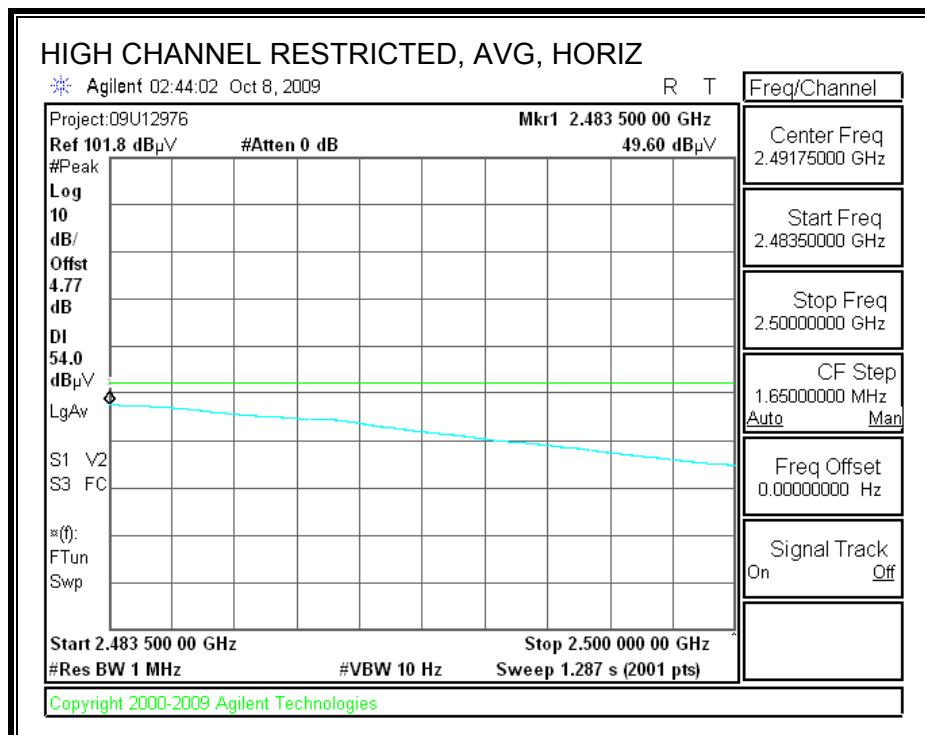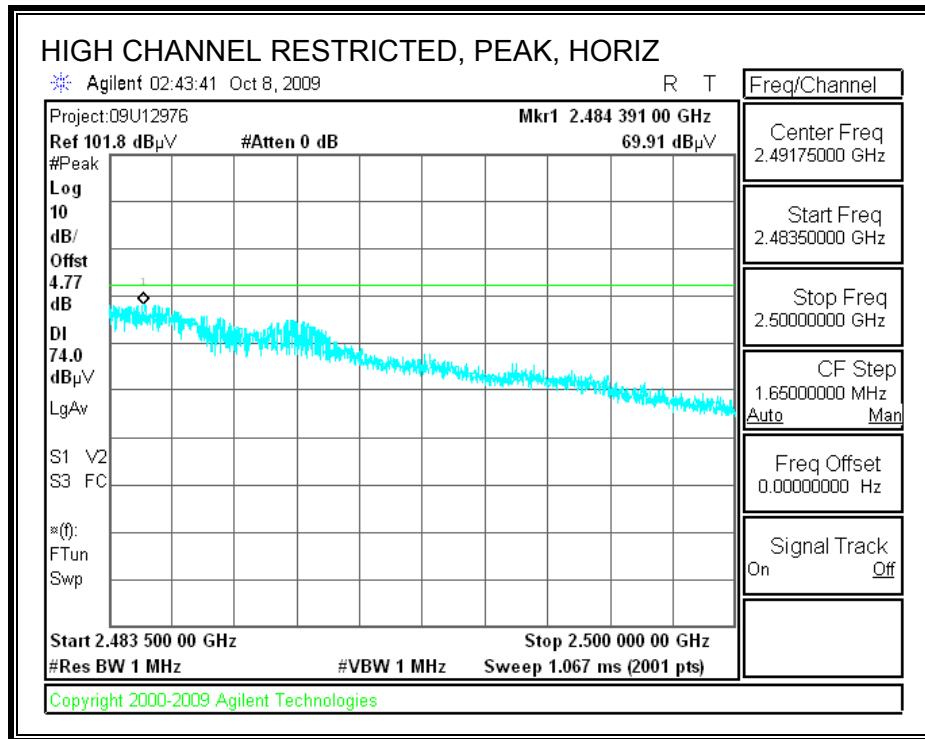

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

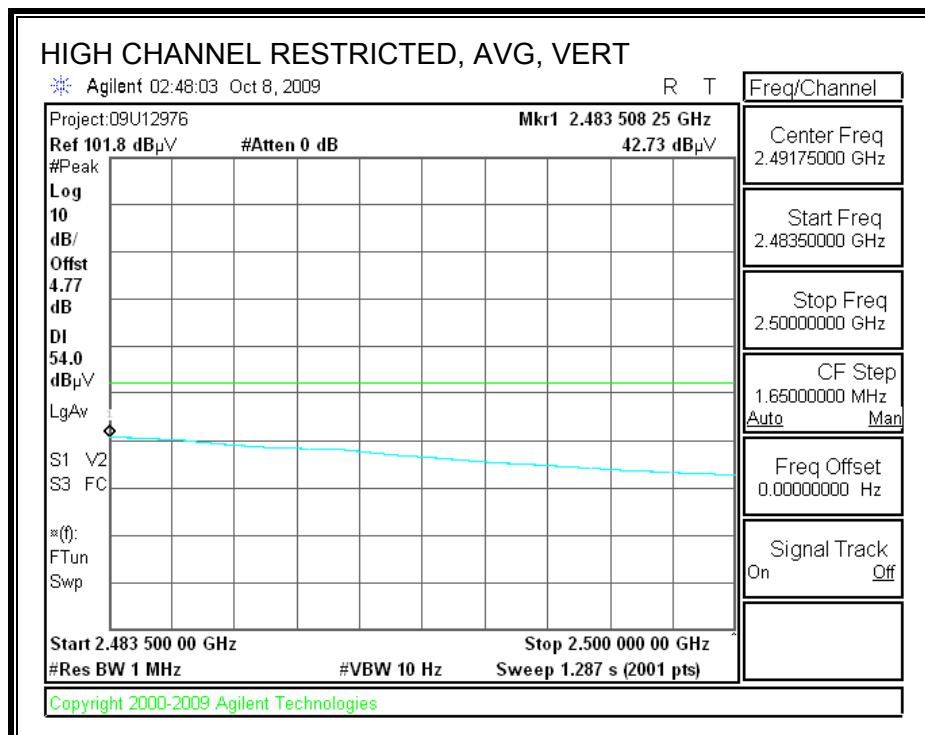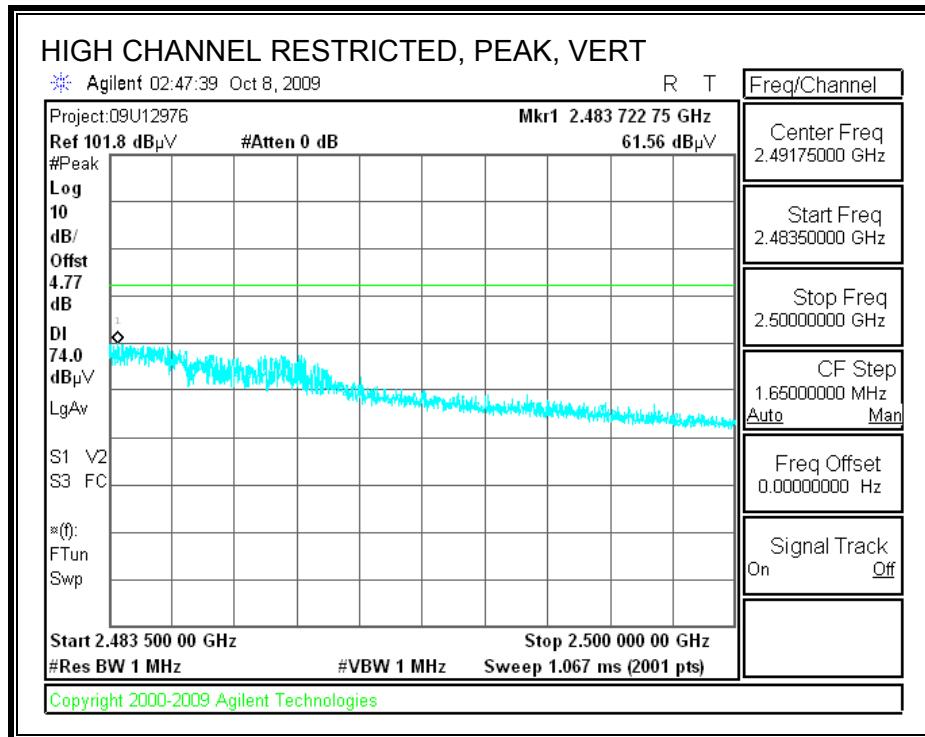

HARMONICS AND SPURIOUS EMISSIONS (WORST-CASE)



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																	
Company:	INTEL CORPORATIONS																
Project #:	09U12796																
Date:	10/28/2009																
Test Engineer:	MENGISTU MEKURIA																
Configuration:	EUT AND AC ADAPTER																
Mode:	TX HT40 MODE																
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									FCC 15.205					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz		
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz; VBW=10Hz		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
LOW CHANNEL (2422.00 MHz)																	
4.844	3.0	39.2	26.2	33.1	5.8	-36.5	0.0	0.0	41.6	28.6	74	54	-32.4	-25.4	V		
4.844	3.0	40.0	26.4	33.1	5.8	-36.5	0.0	0.0	42.4	28.8	74	54	-31.6	-25.2	H		
MID CHANNEL (2437.00 MHz)																	
4.874	3.0	36.8	26.0	33.1	5.8	-36.5	0.0	0.0	41.2	28.5	74	54	-32.8	-25.5	V		
4.874	3.0	39.3	26.6	33.1	5.8	-36.5	0.0	0.0	41.7	29.0	74	54	-32.3	-25.0	H		
HII CHANNEL (2452.00 MHz)																	
4.904	3.0	39.0	26.3	33.1	5.9	-36.5	0.0	0.0	41.5	28.8	74	54	-32.5	-25.2	V		
4.904	3.0	39.7	26.4	33.1	5.9	-36.5	0.0	0.0	42.2	28.9	74	54	-31.8	-25.1	H		
Rev. 11.10.08																	
f	Measurement Frequency				Amp	Preamp Gain				Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss				HPF	High Pass Filter											

ACON ANTENNA



7.3. TRANSMITTER ABOVE 1 GHz

7.3.1. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN A



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

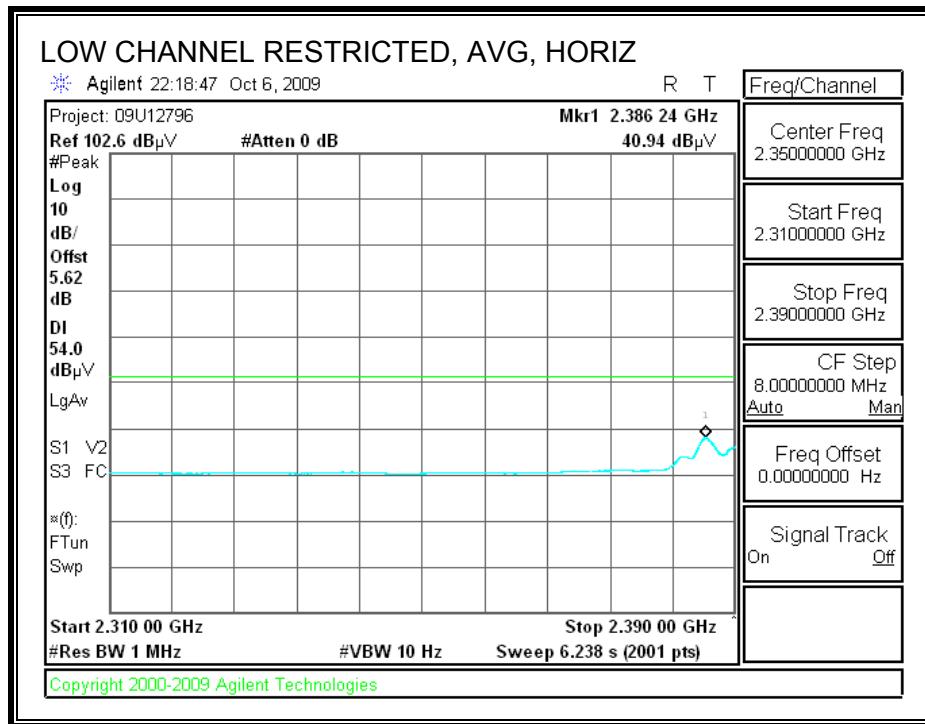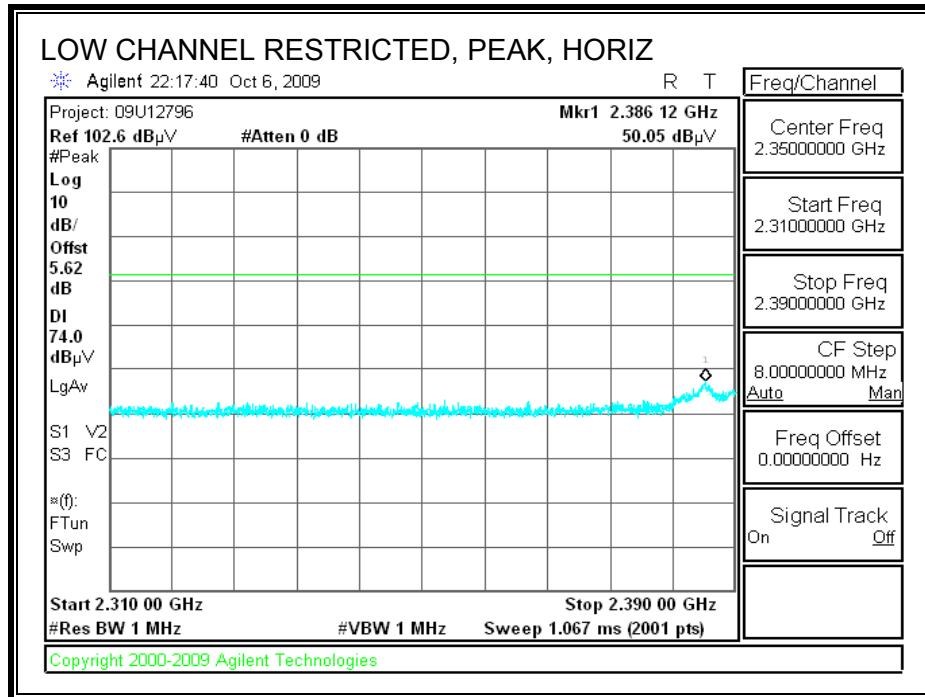



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

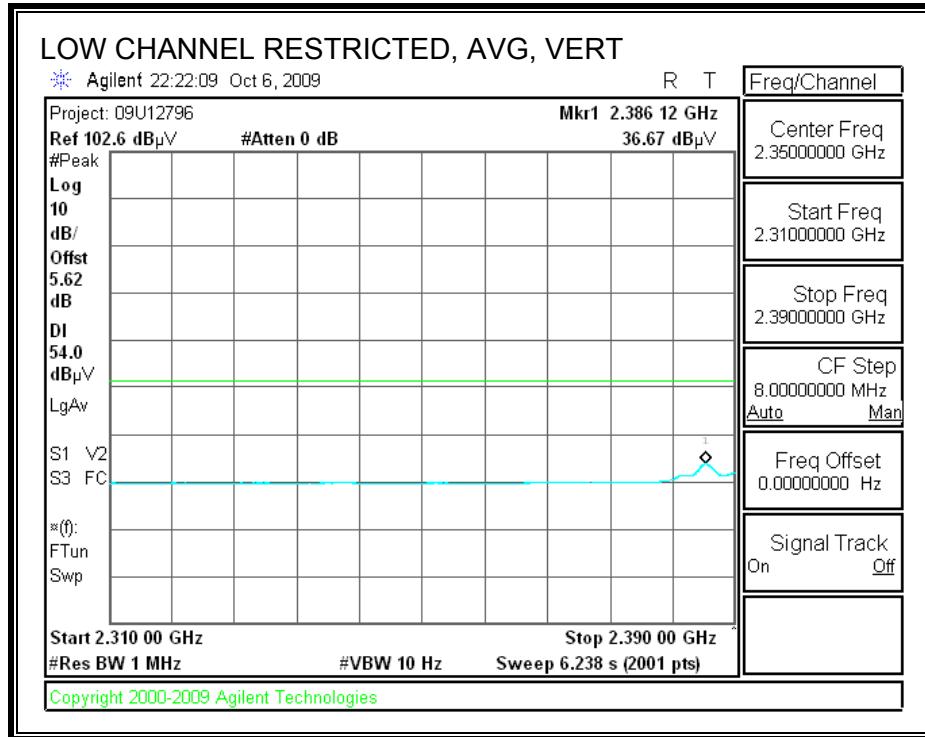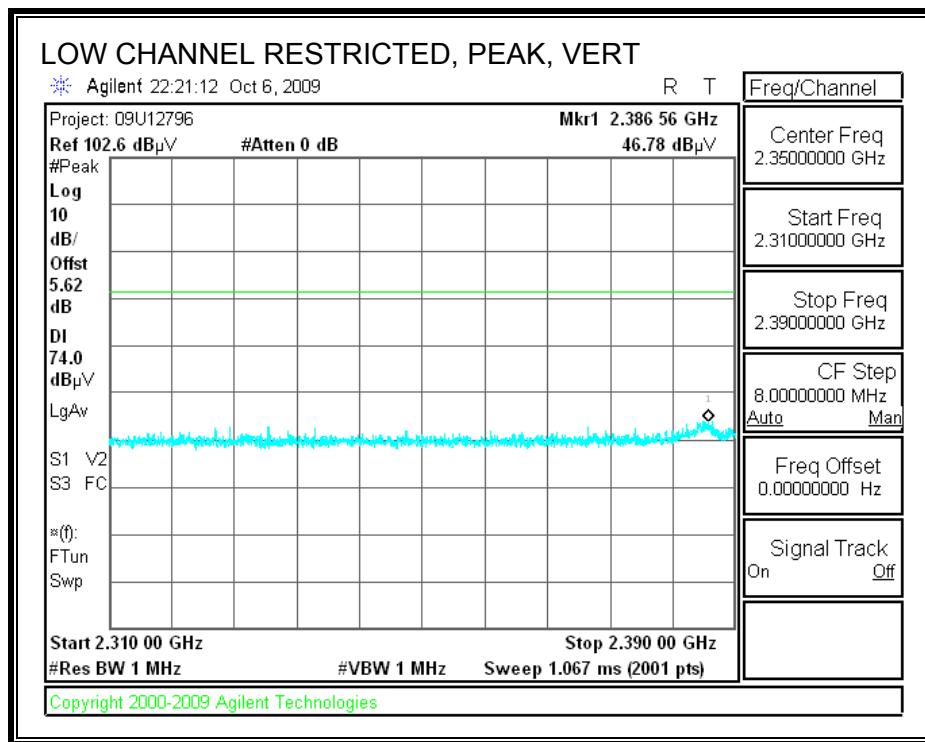



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

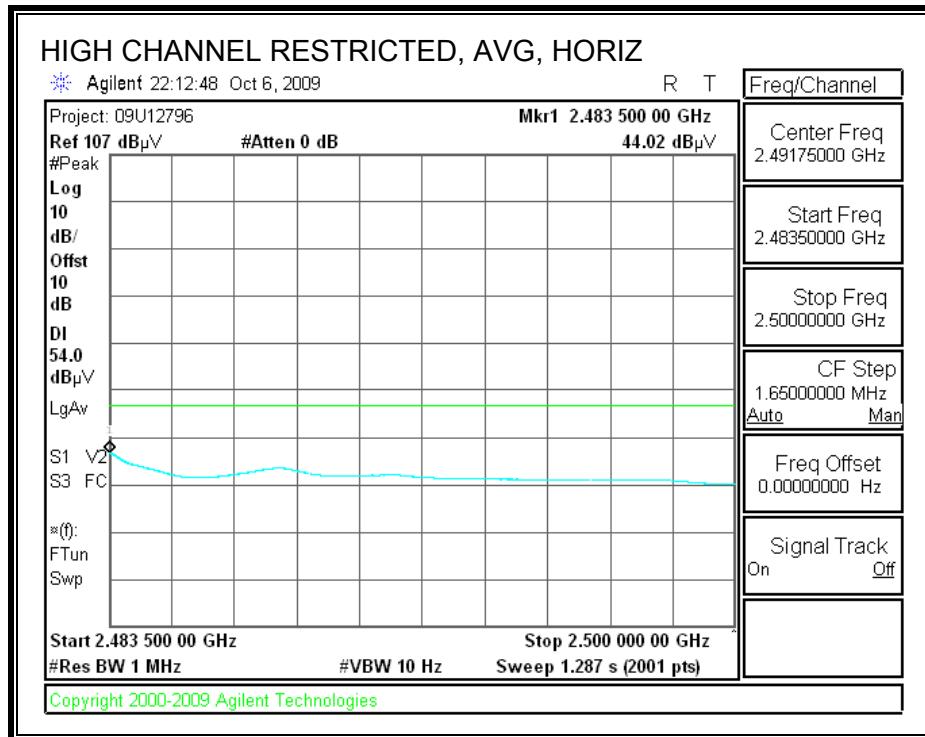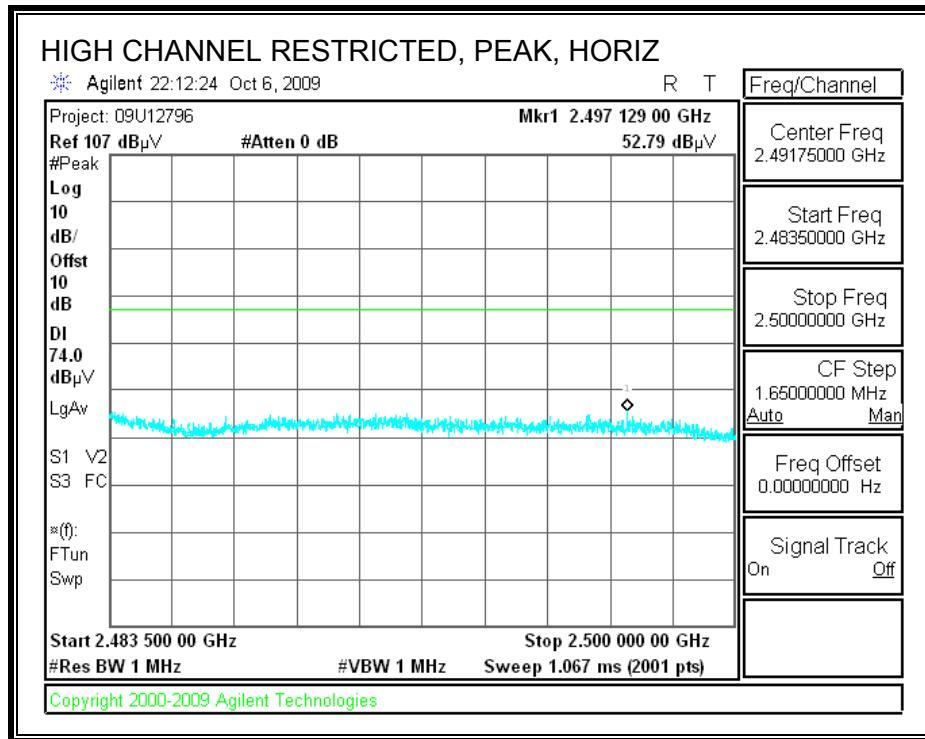



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

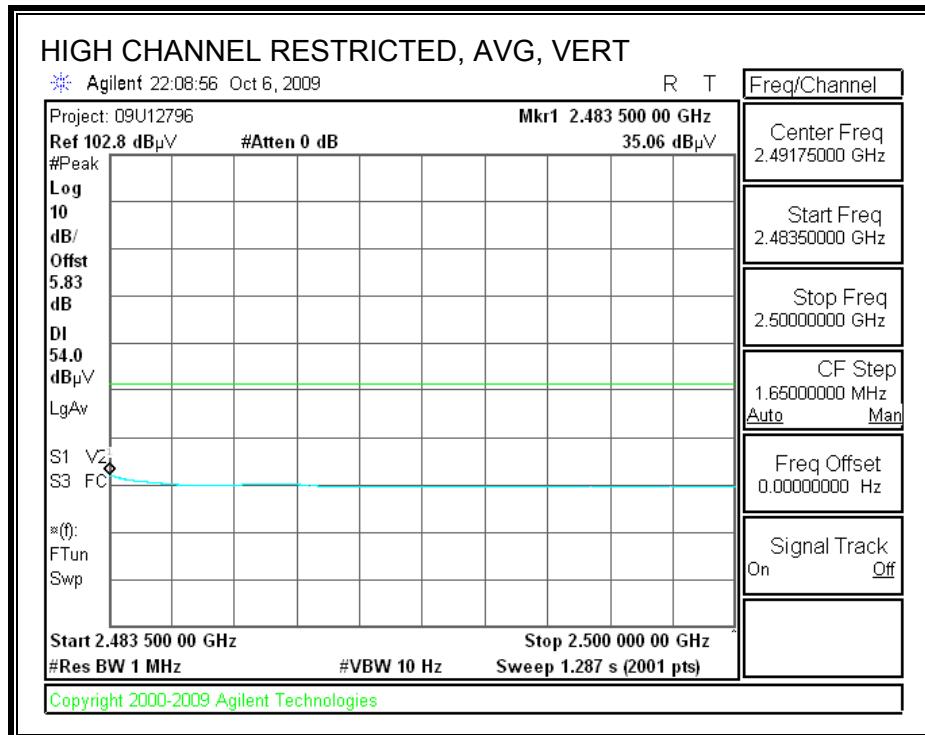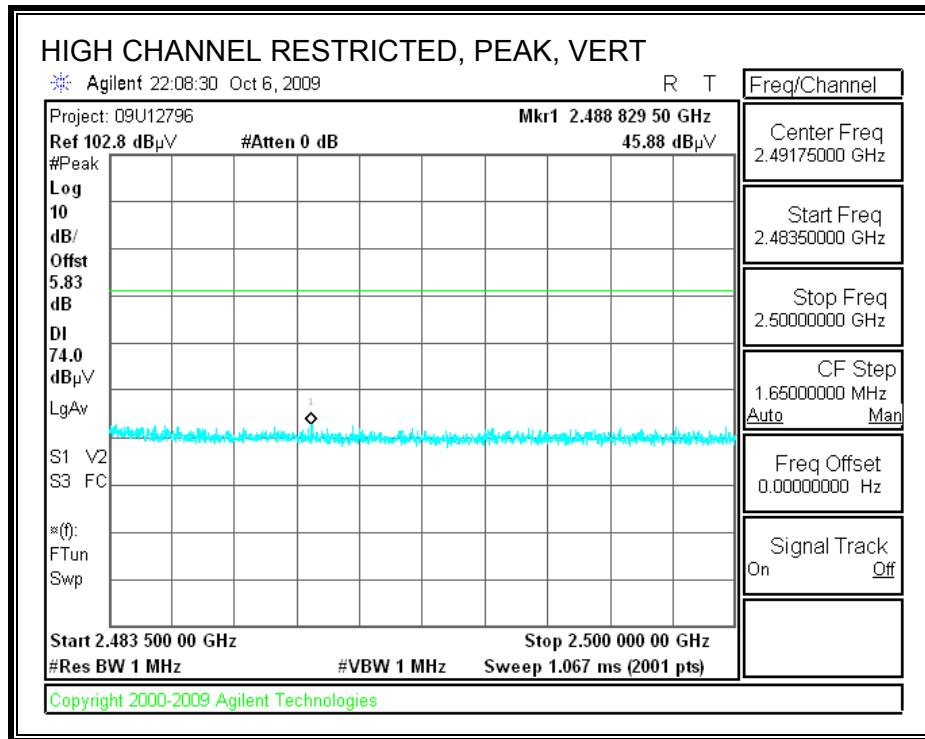



7.3.2. 802.11b MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

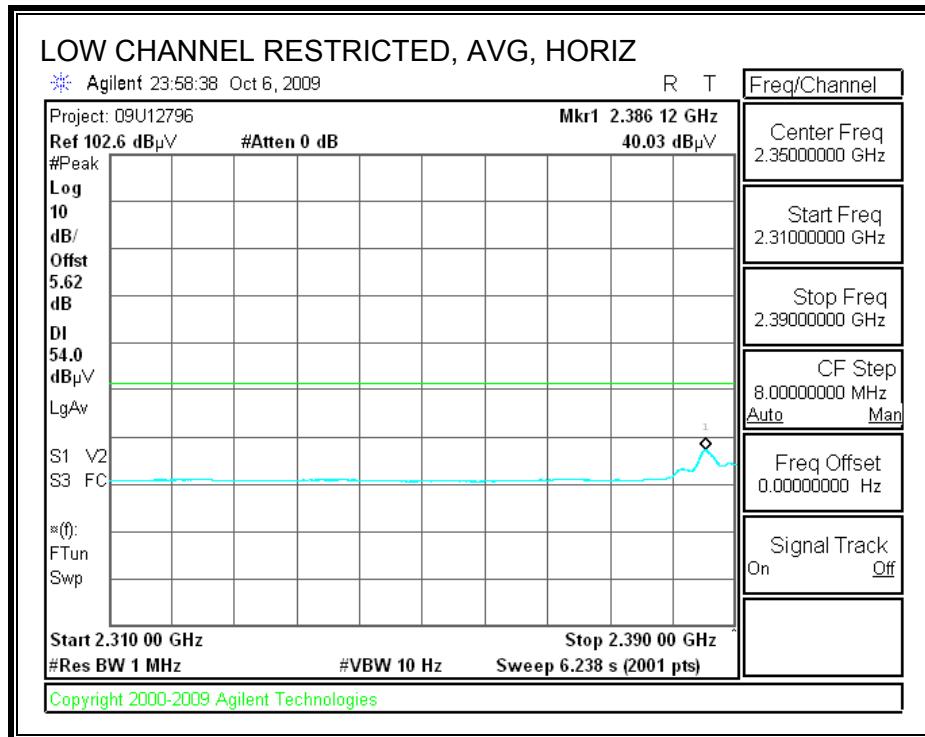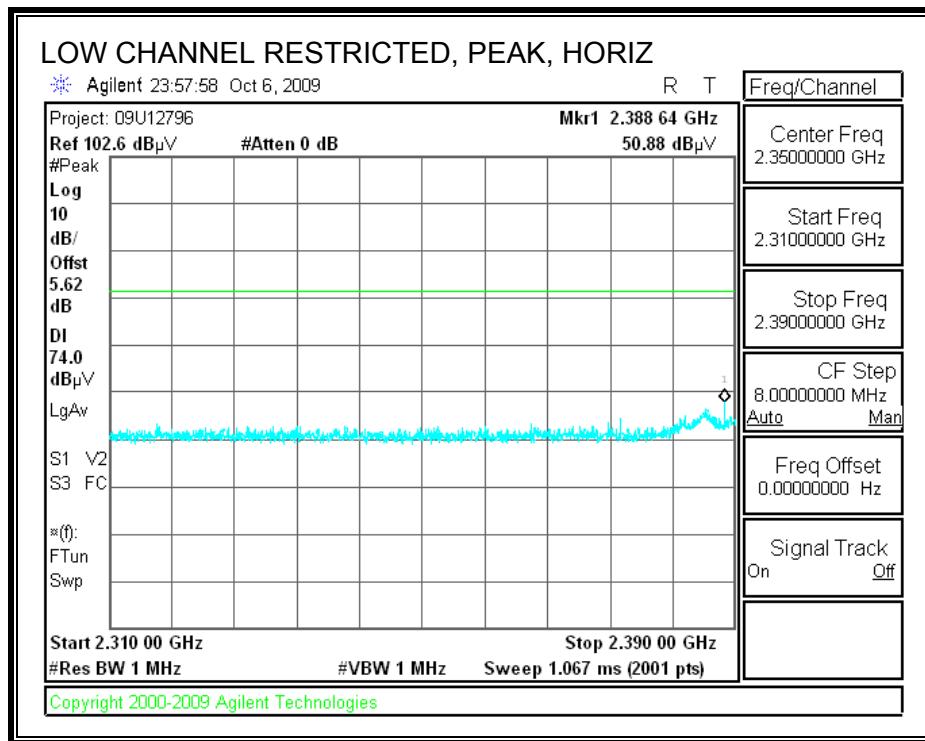



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

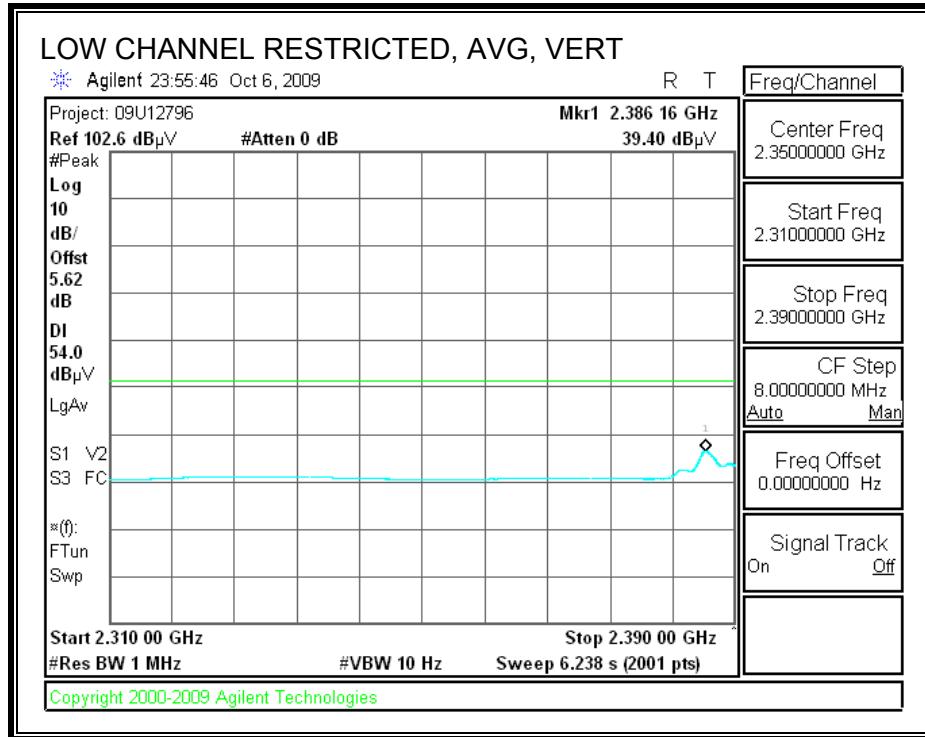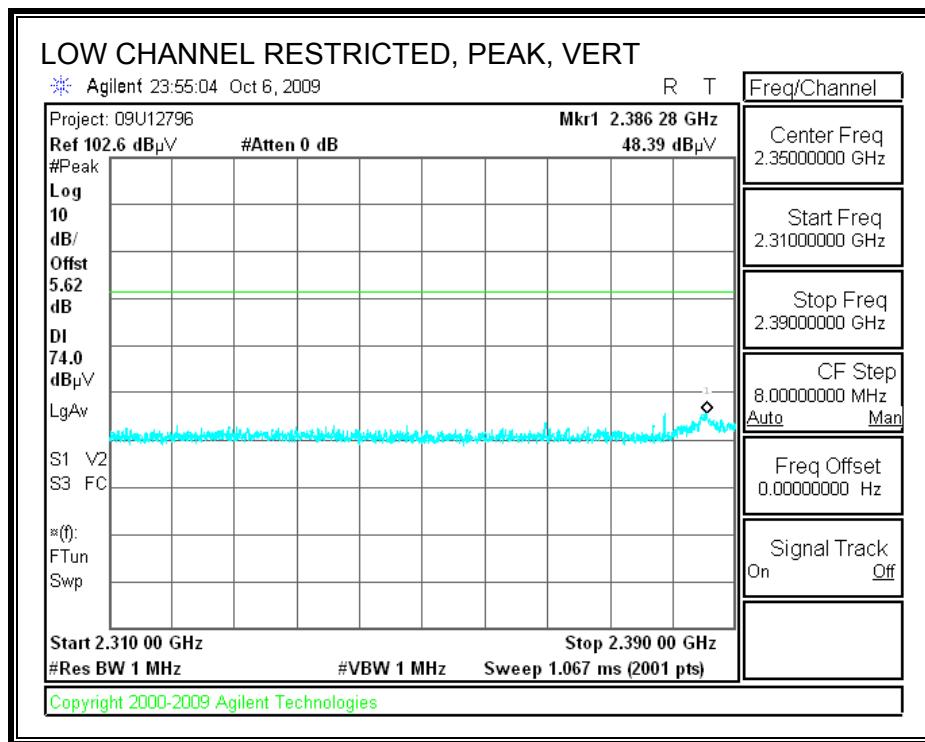



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

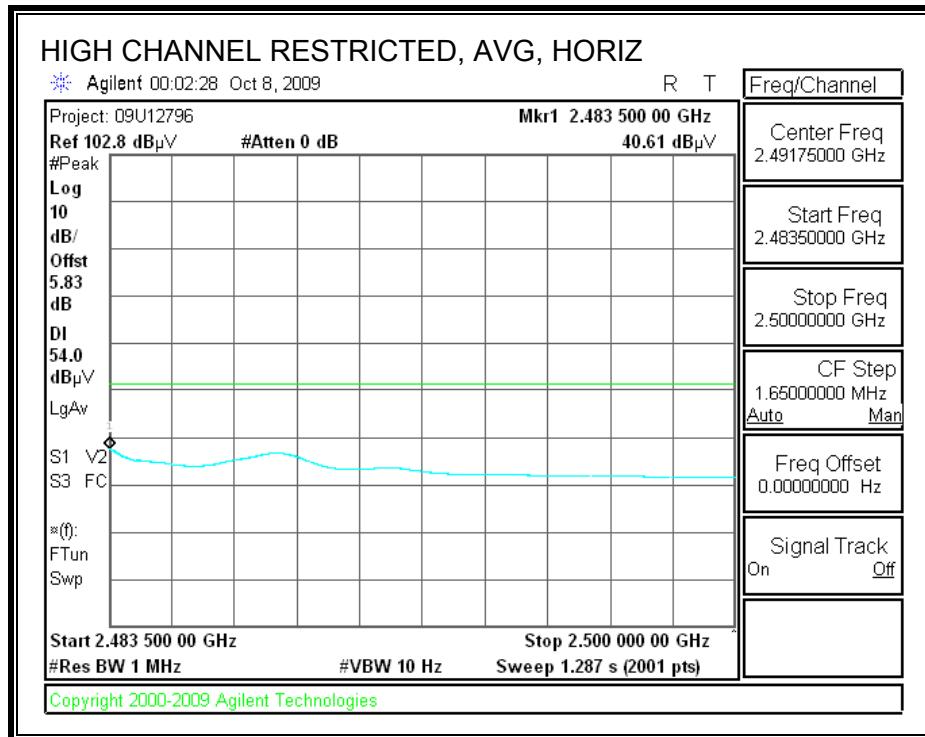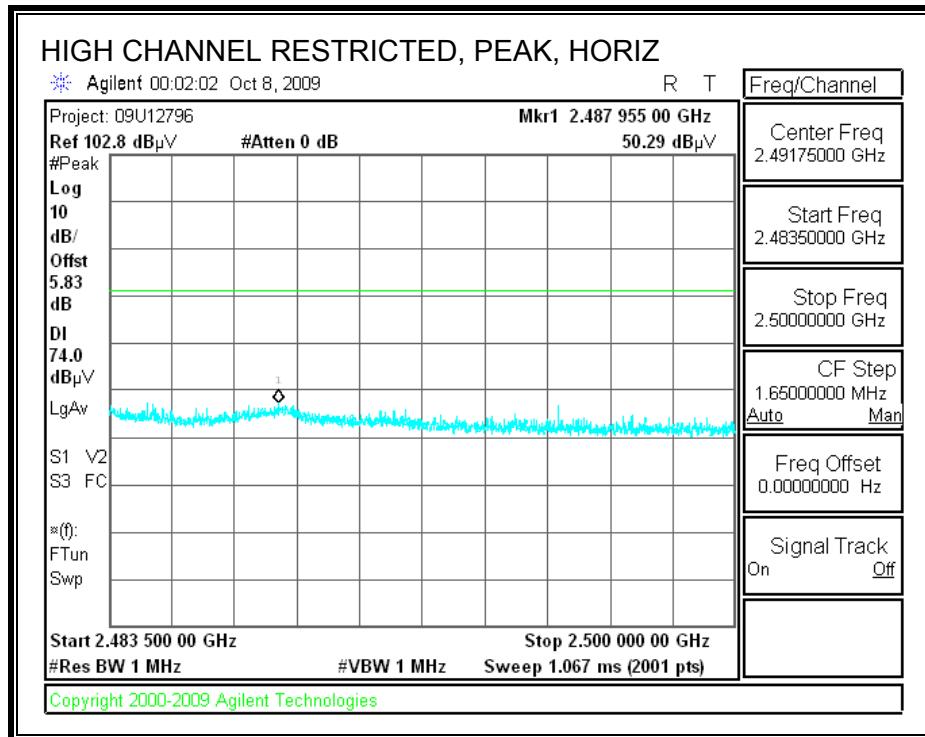



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

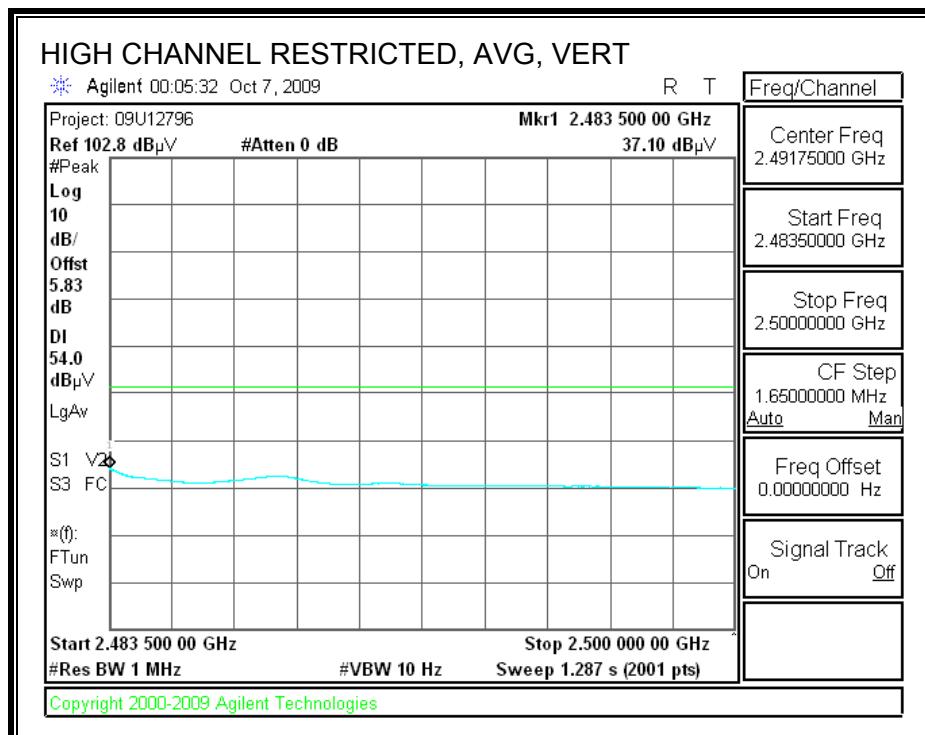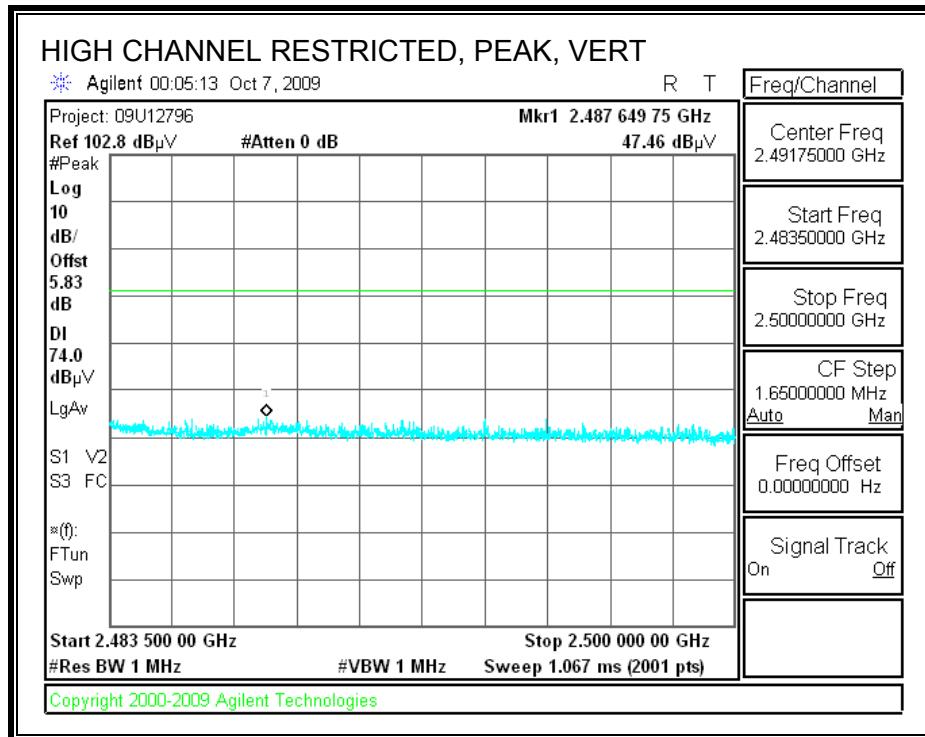



7.3.3. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

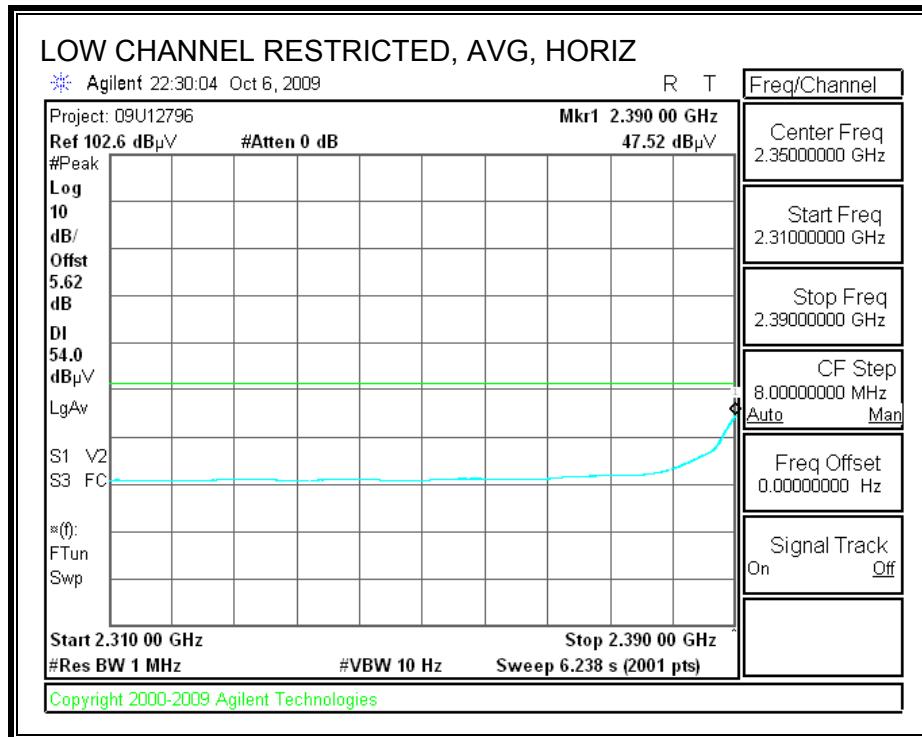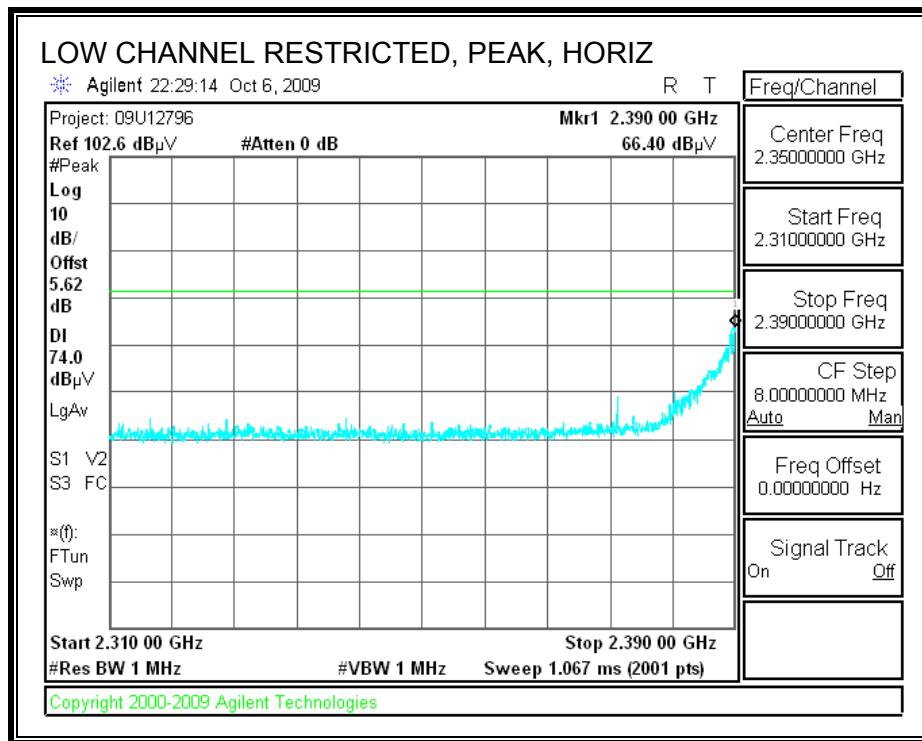



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

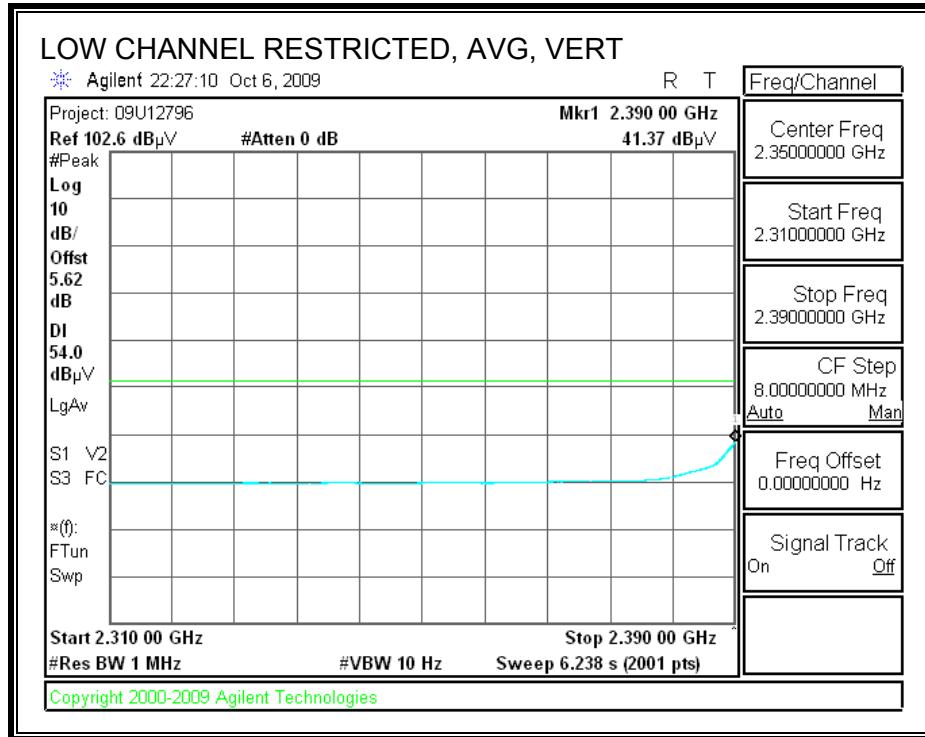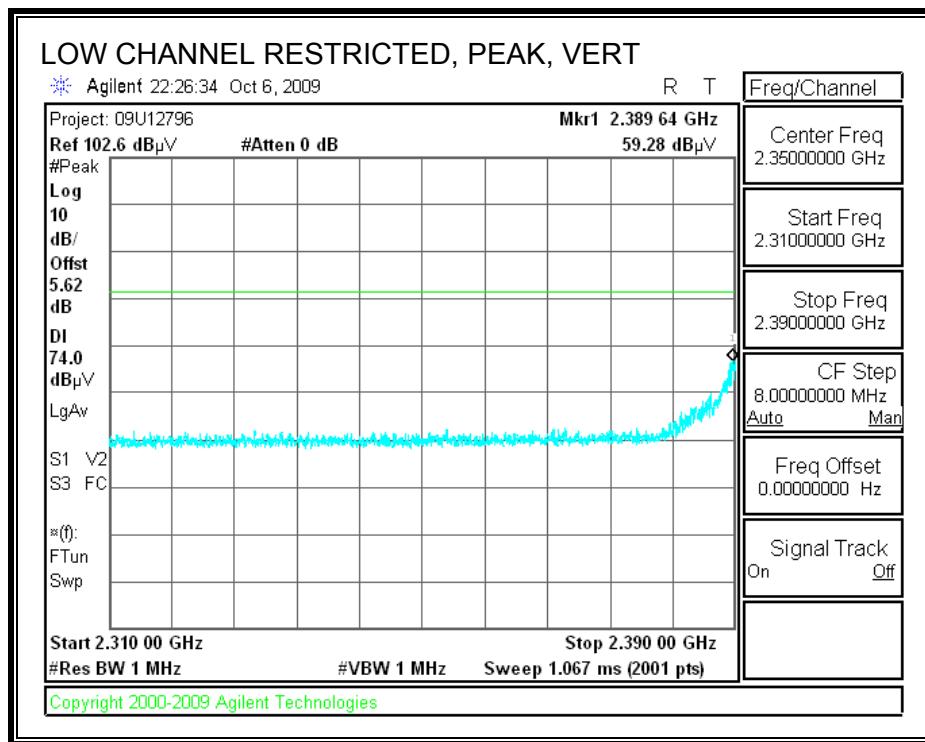



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

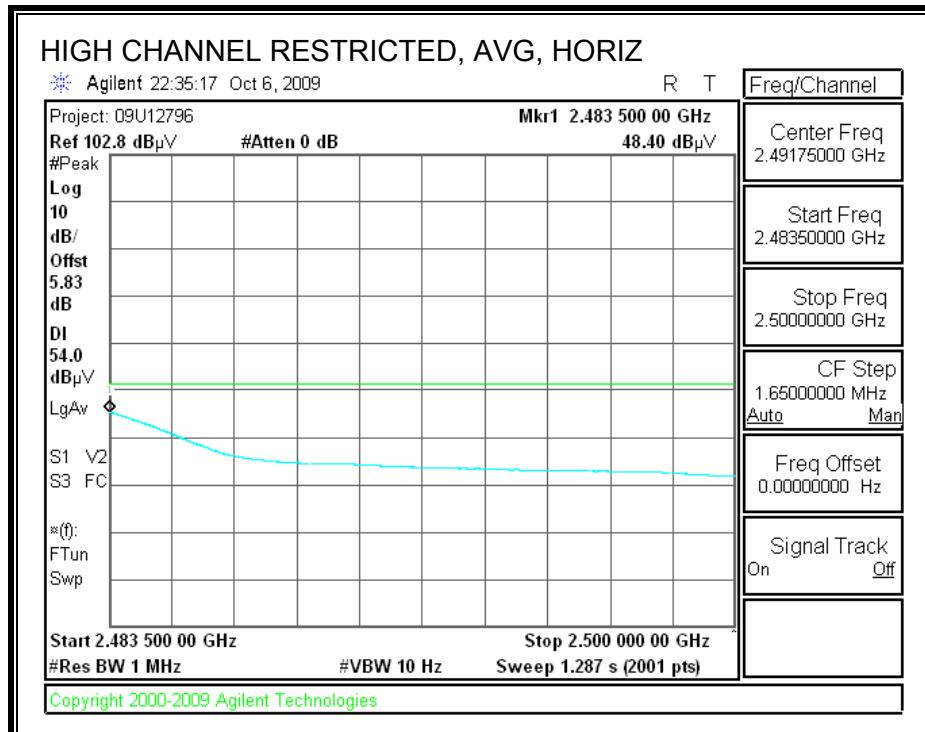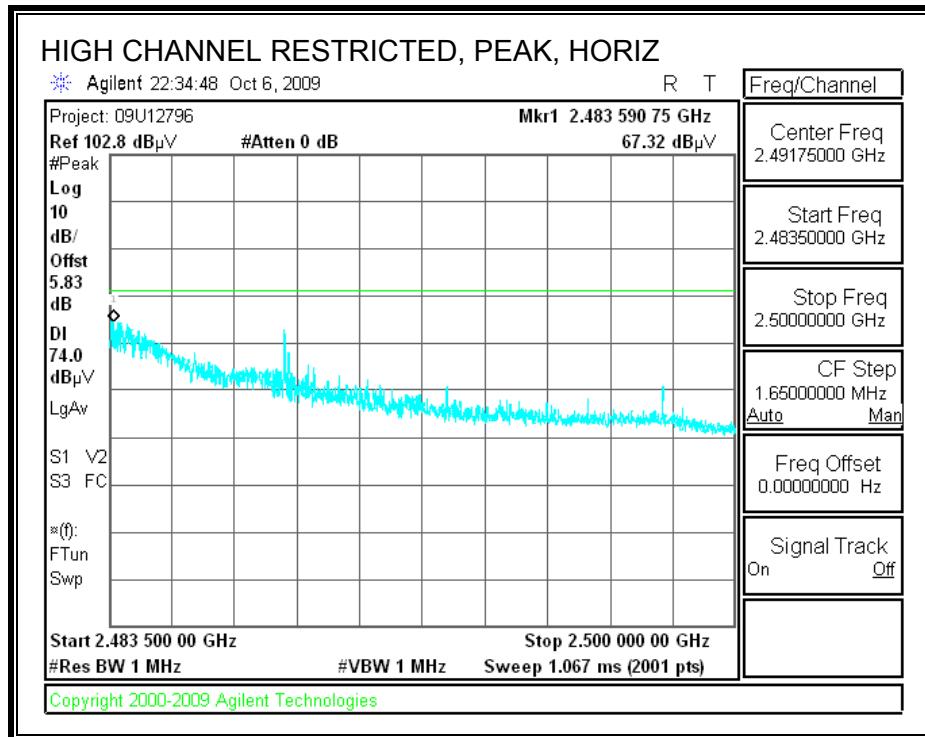



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

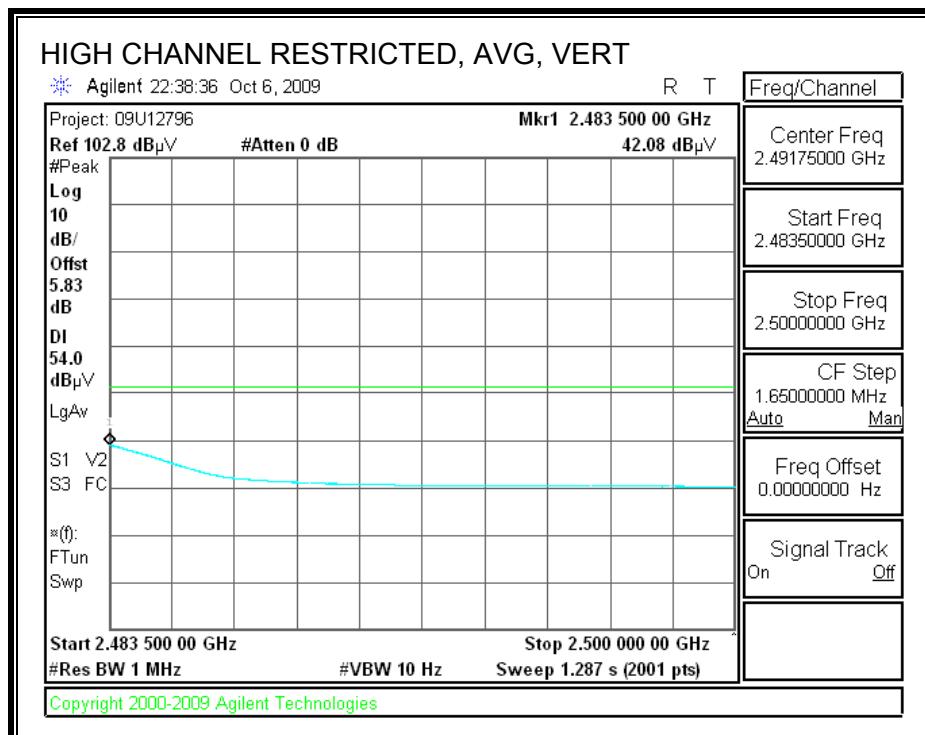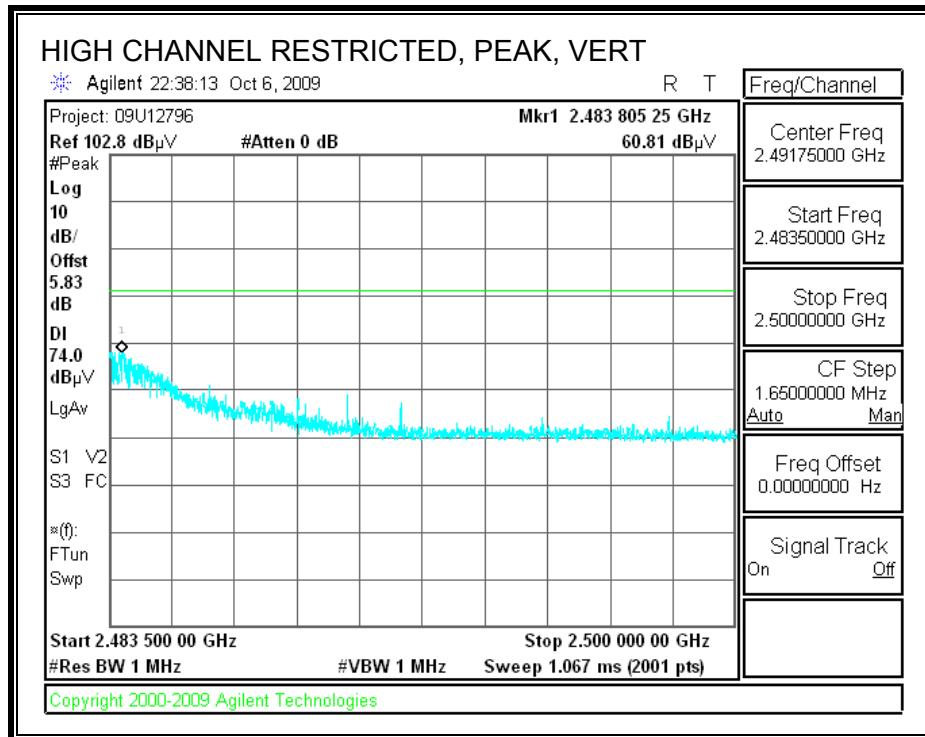



7.3.4. 802.11g MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

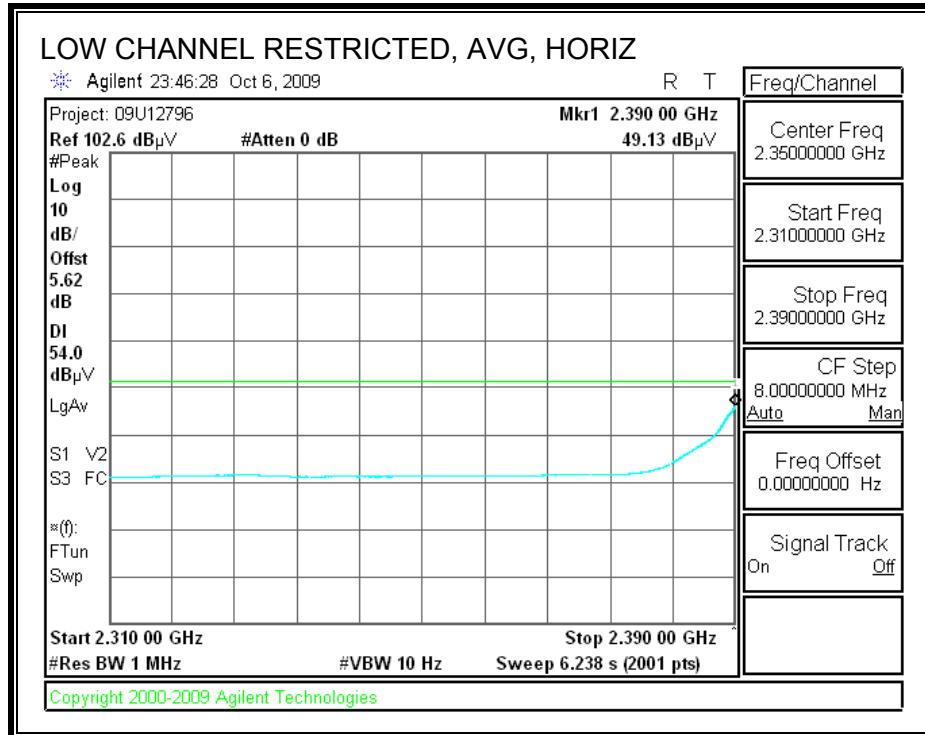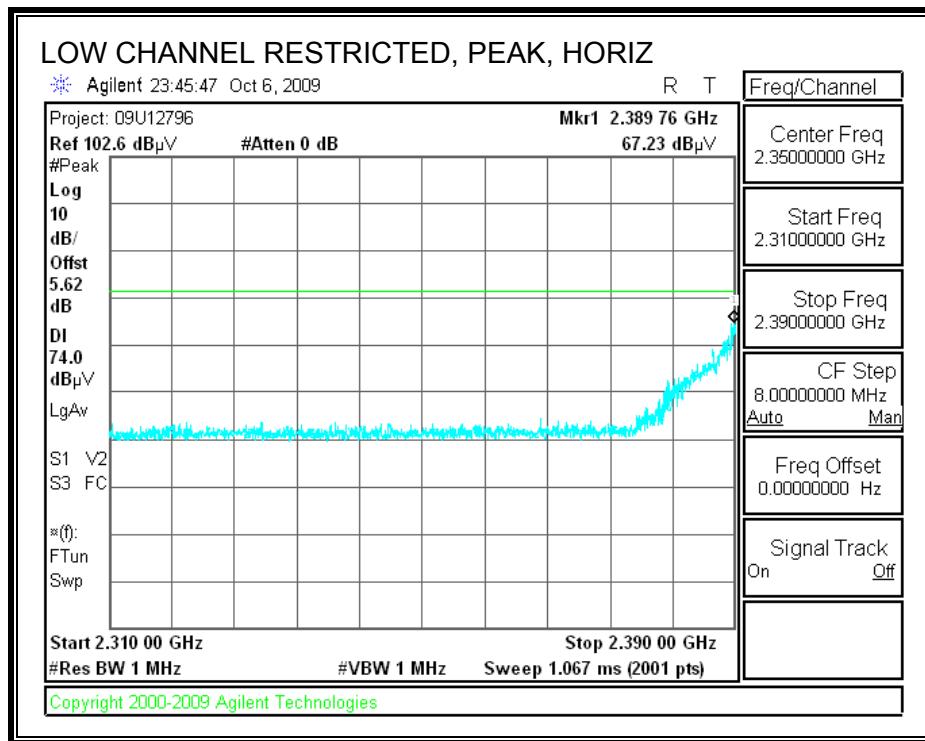



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

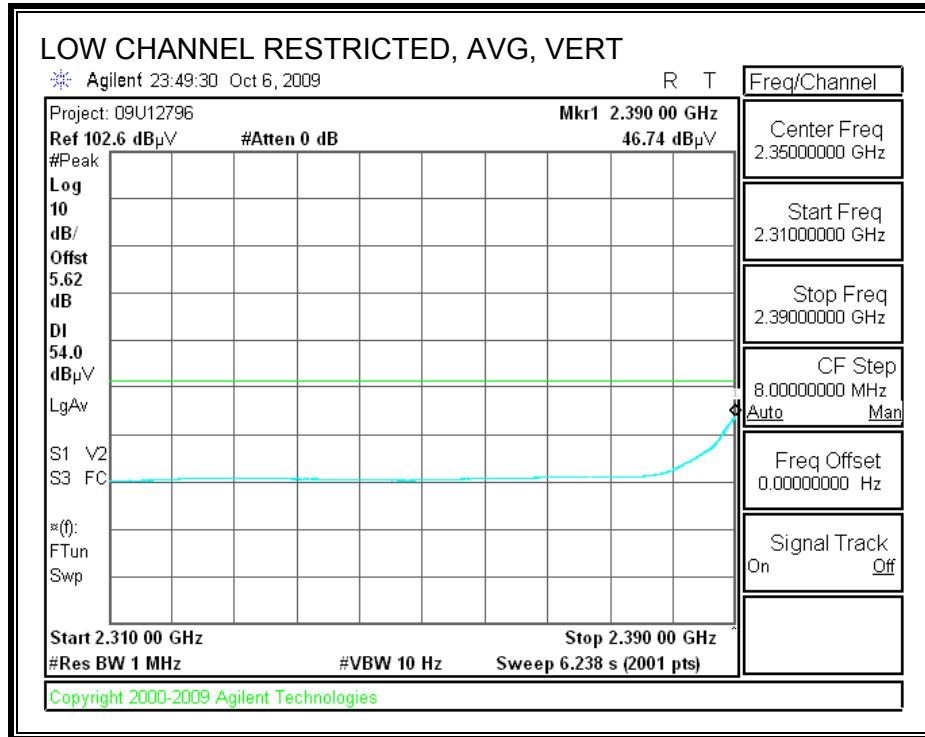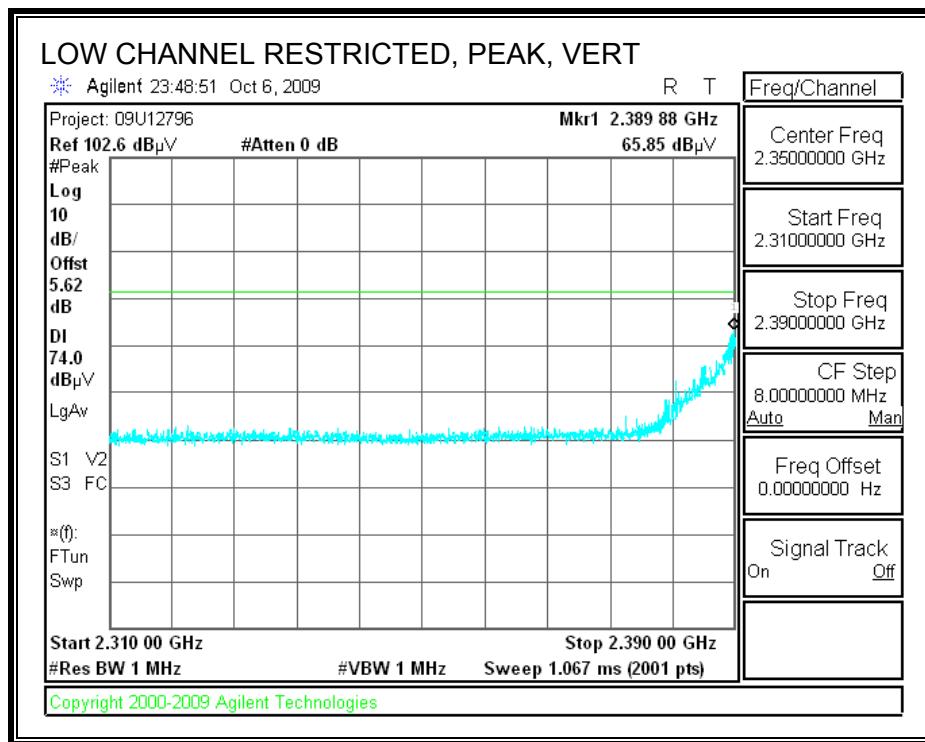



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

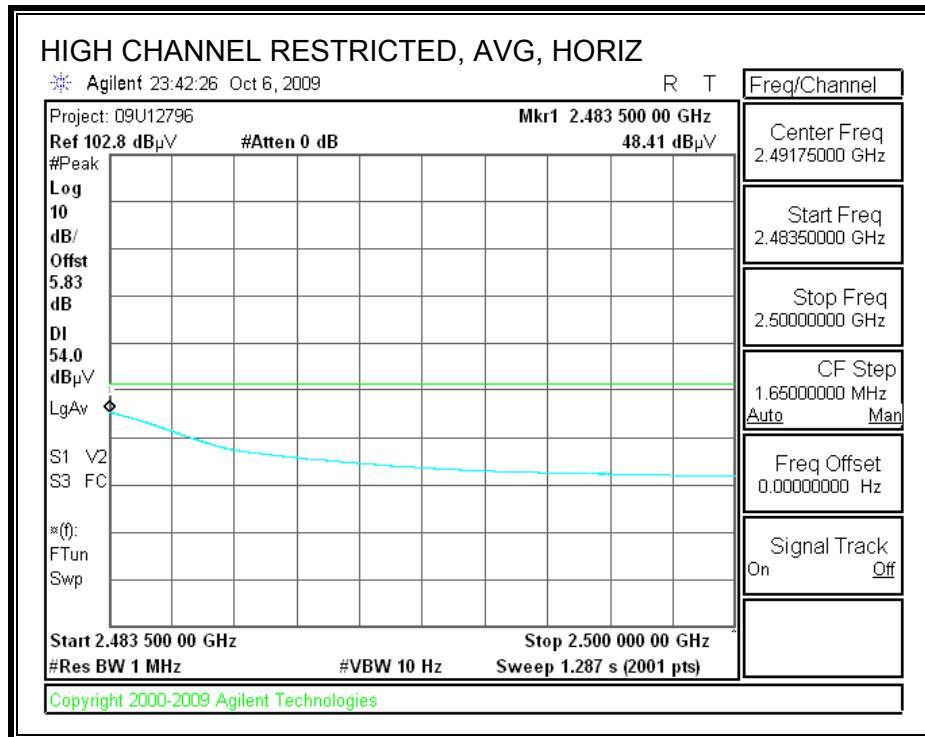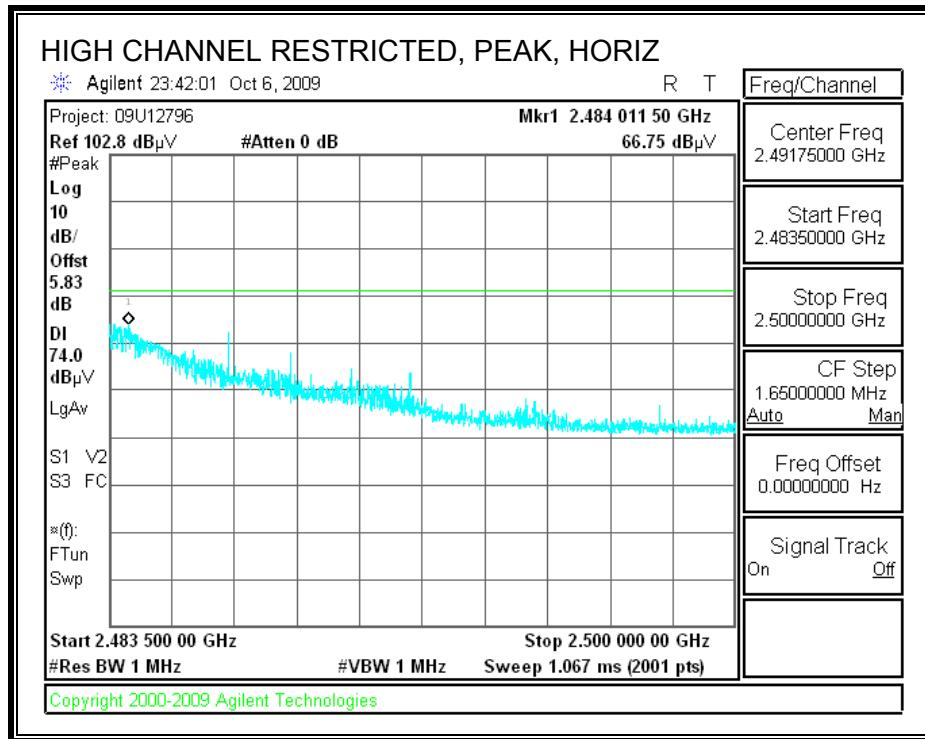



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

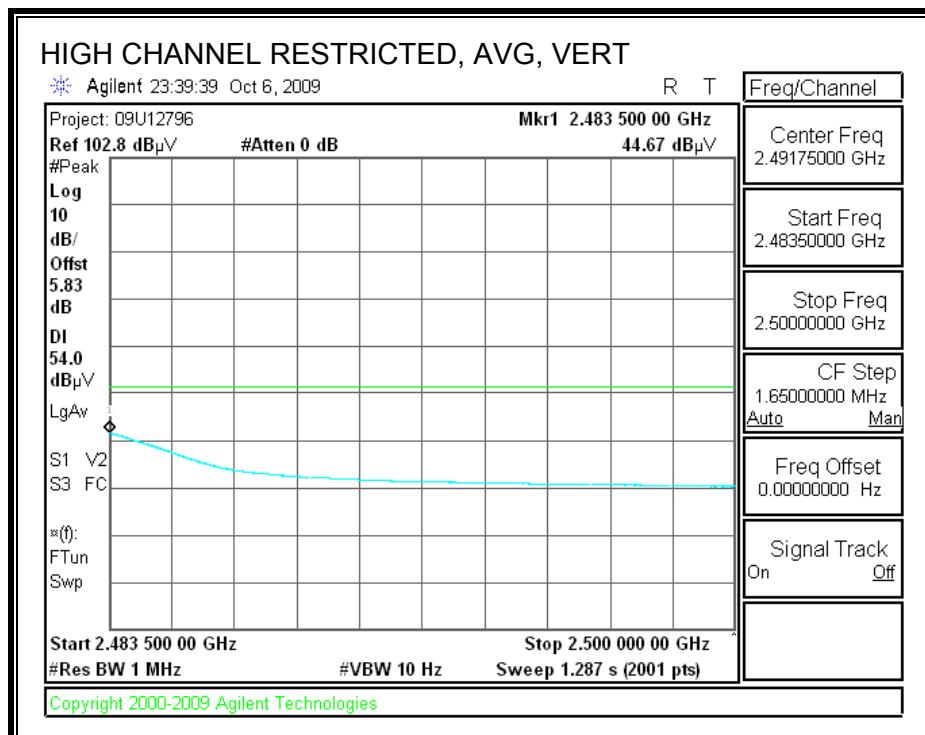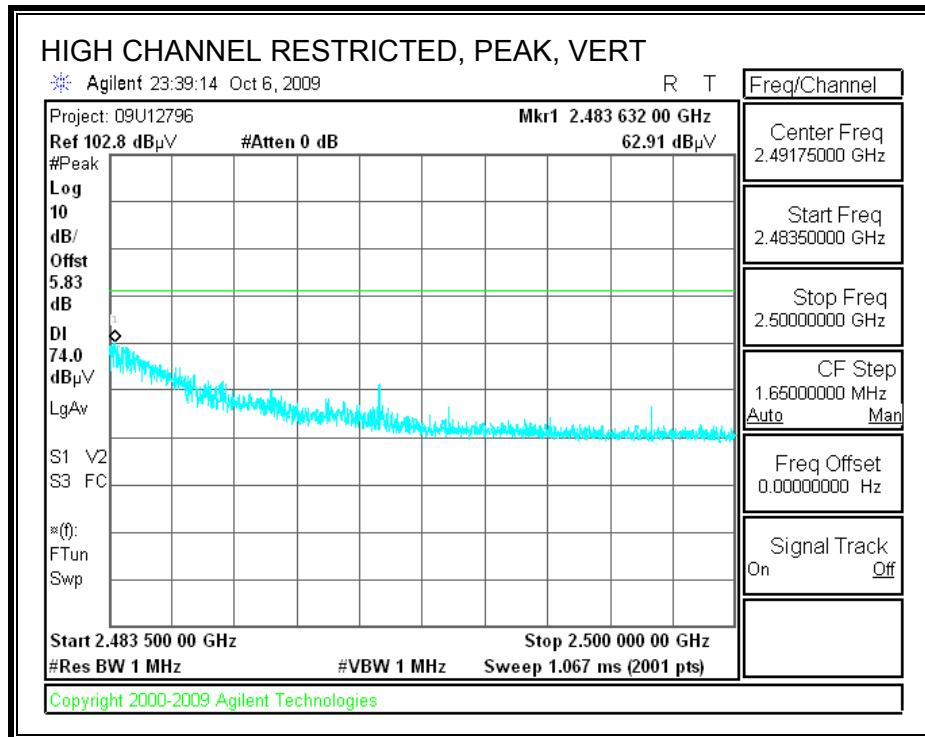



7.3.5. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

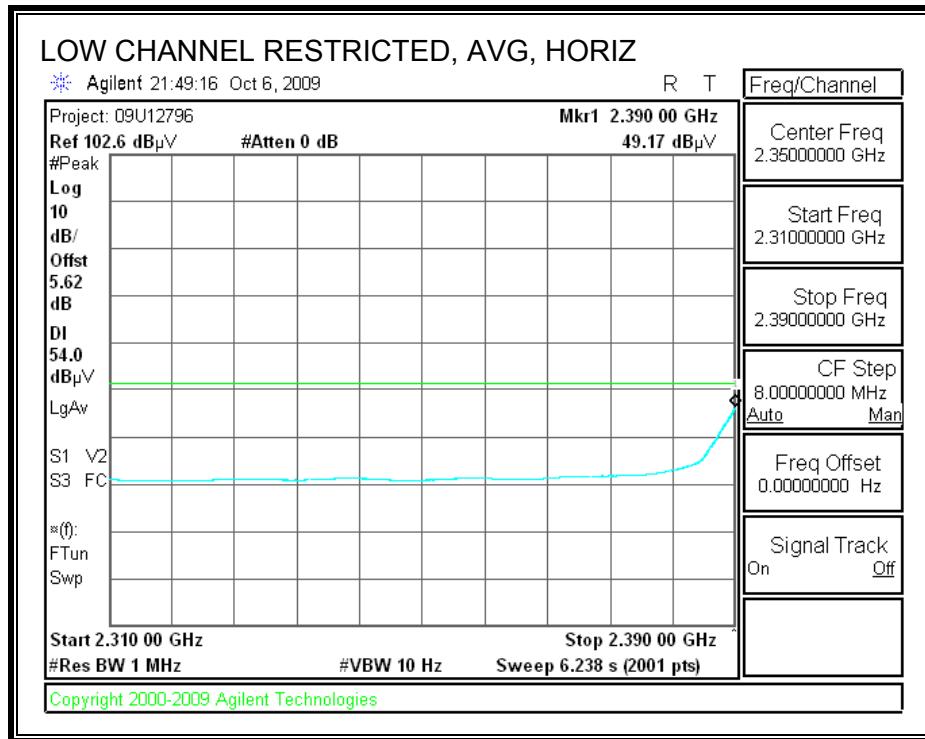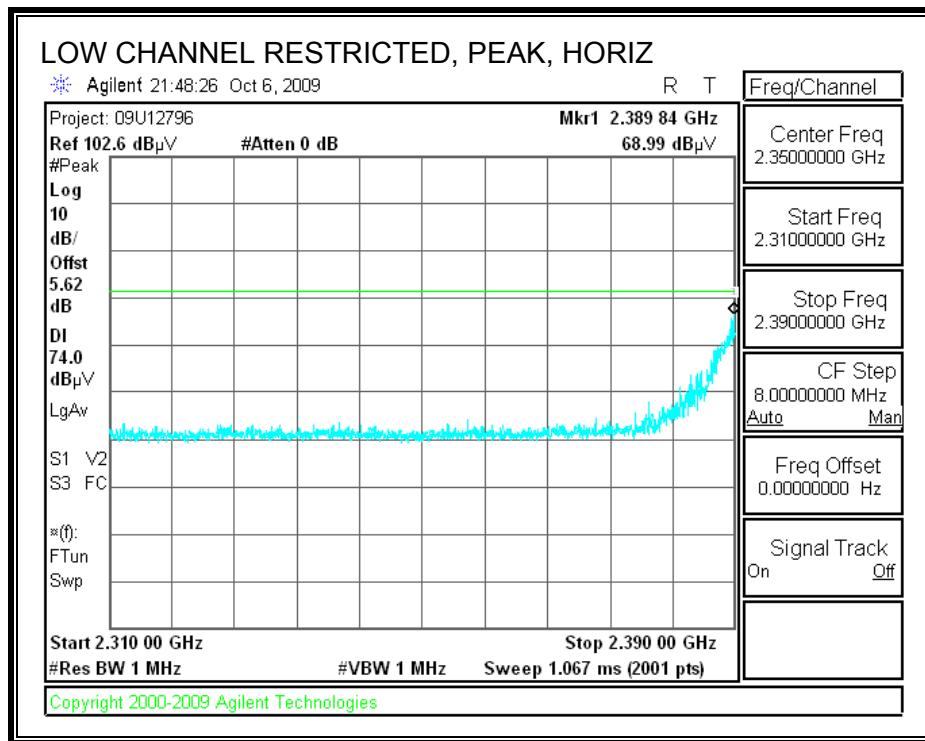



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

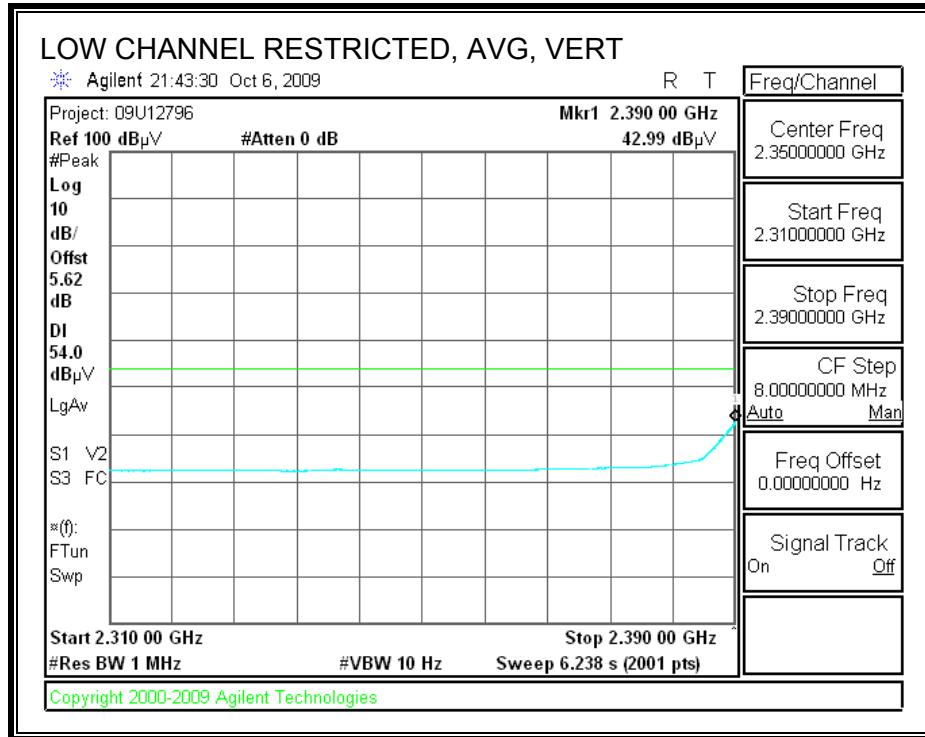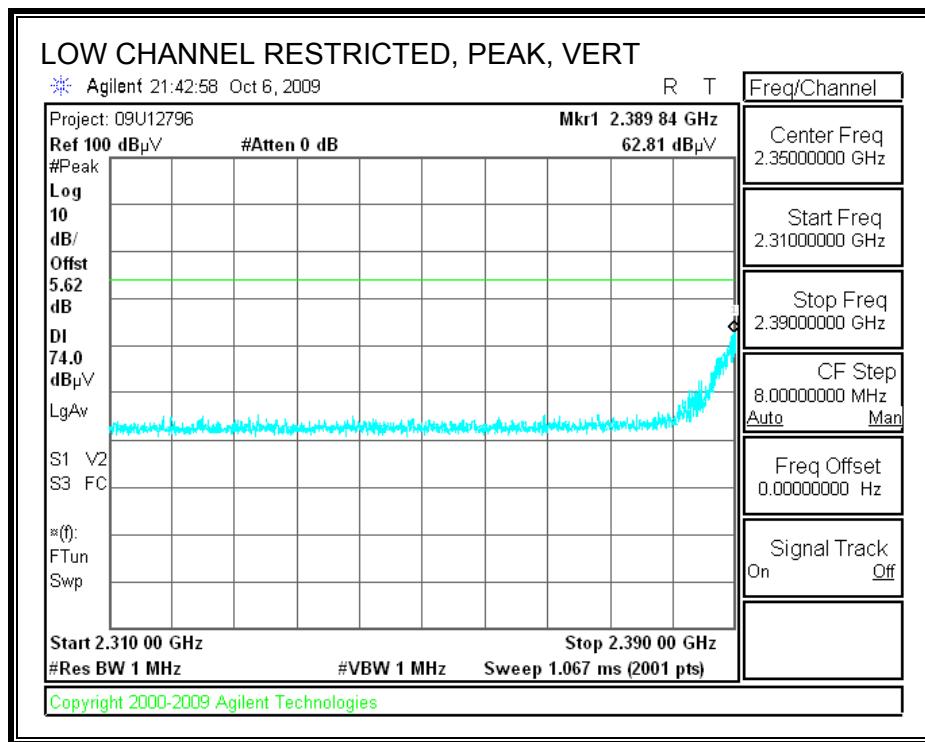



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

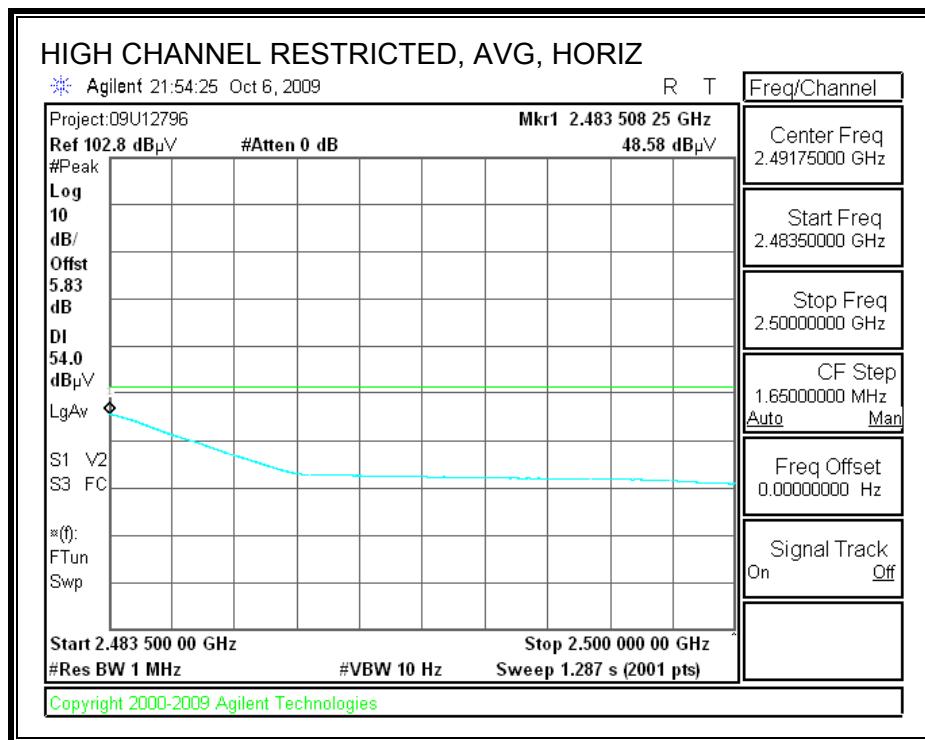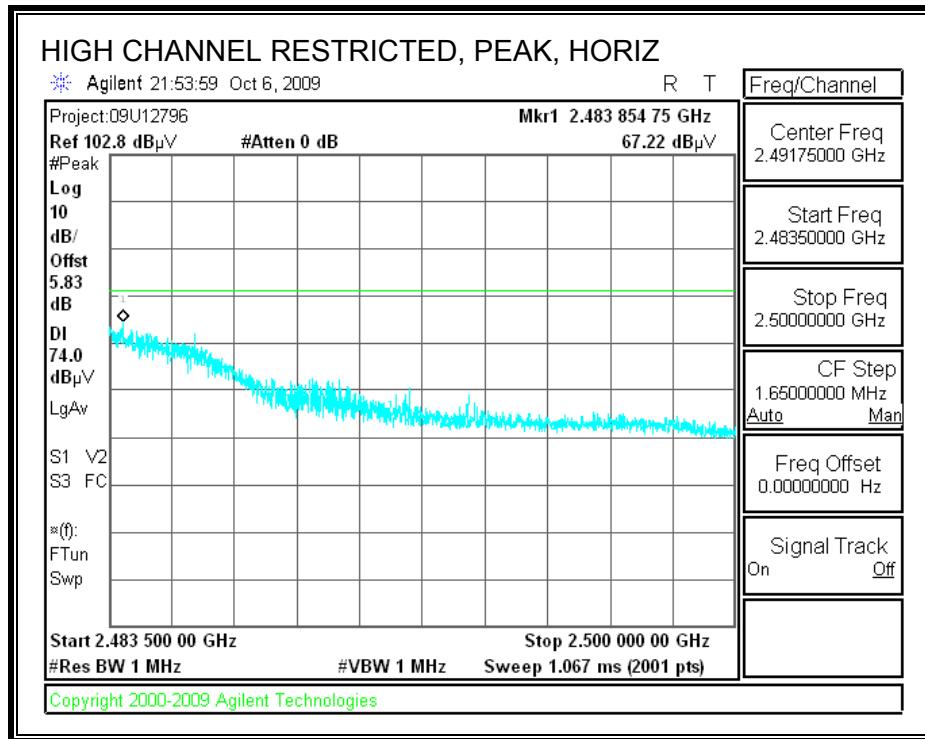



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

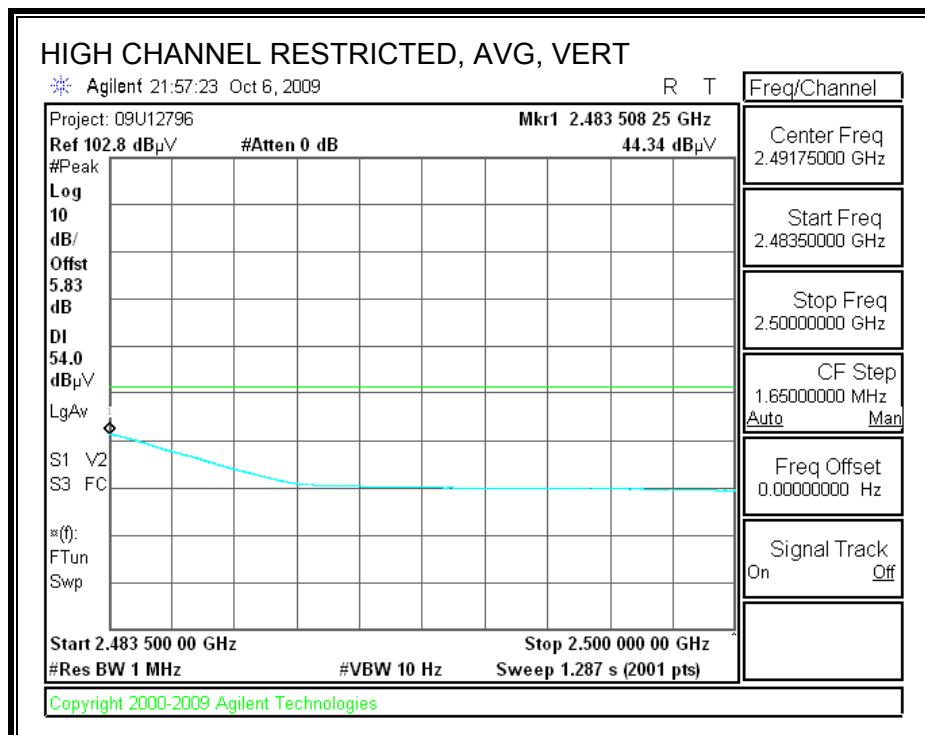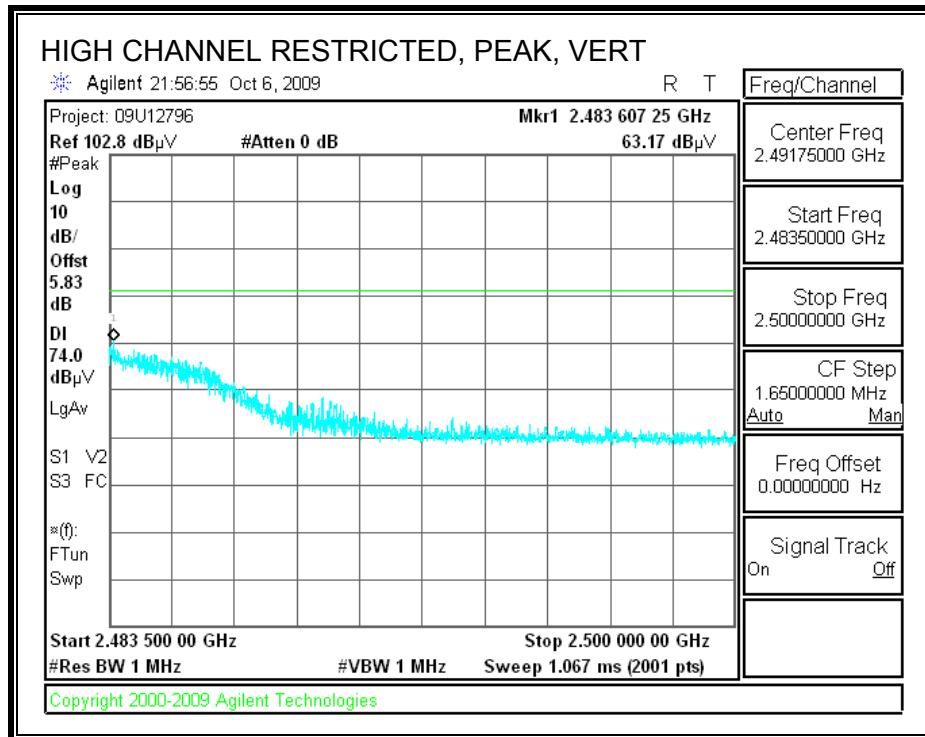



7.3.6. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

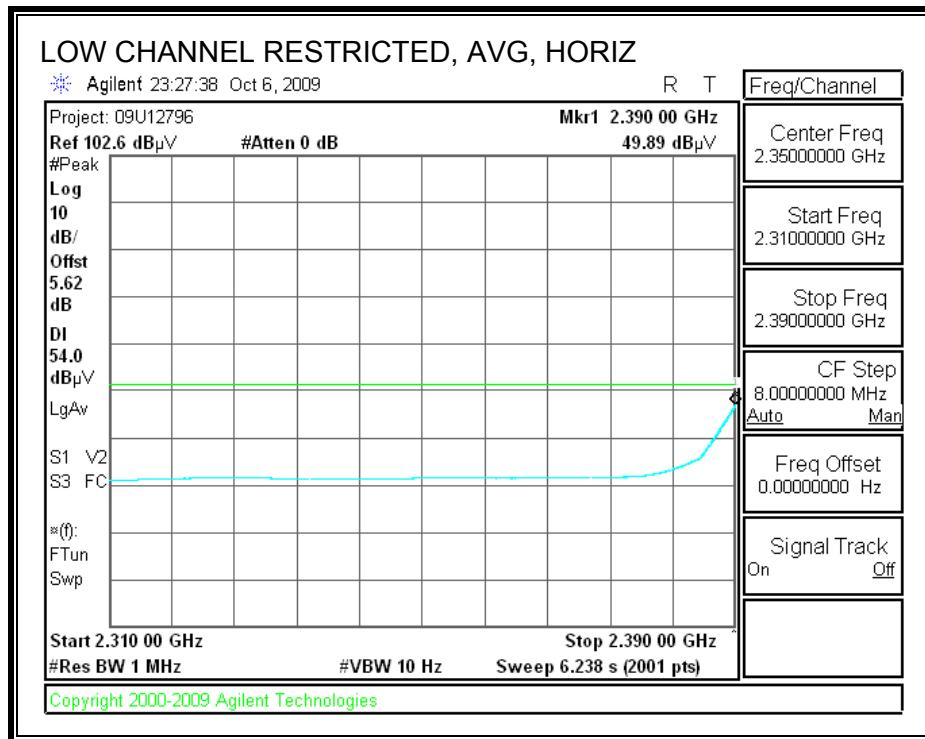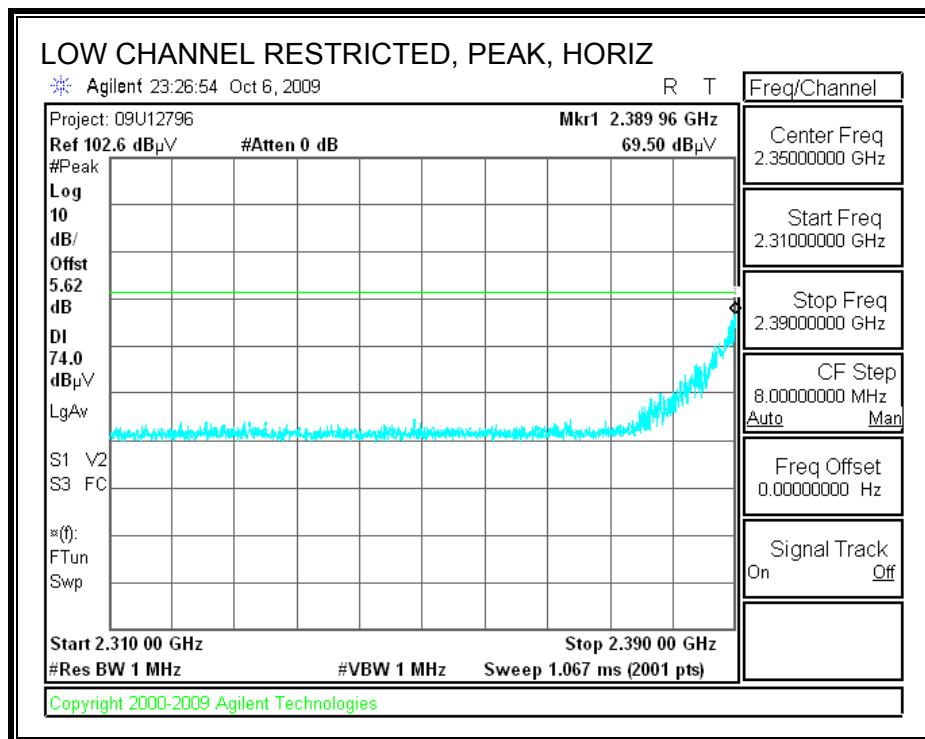



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

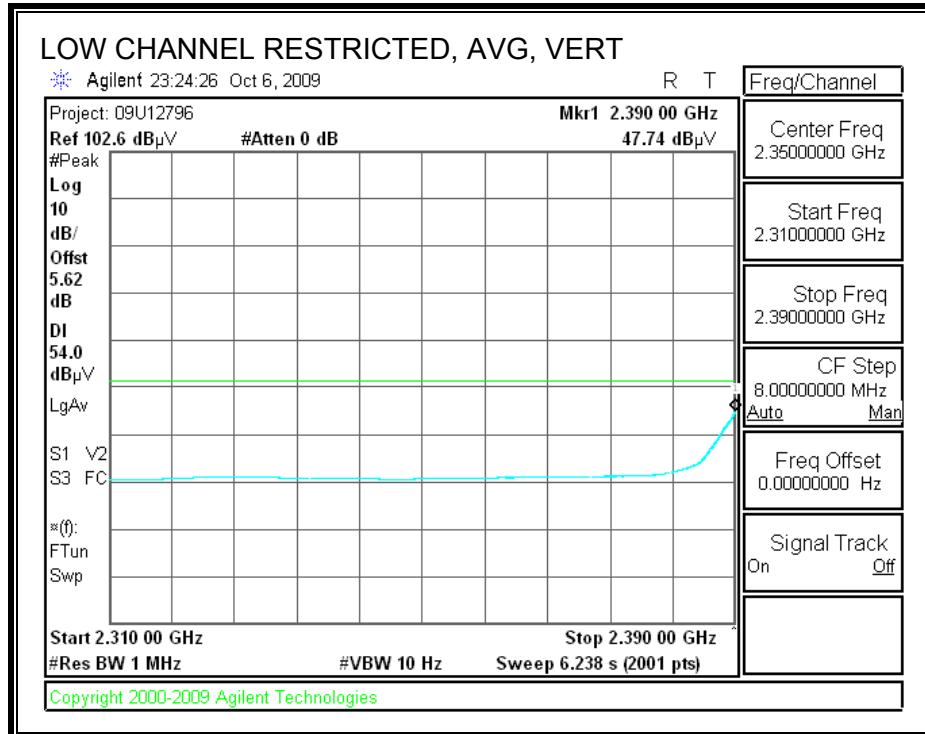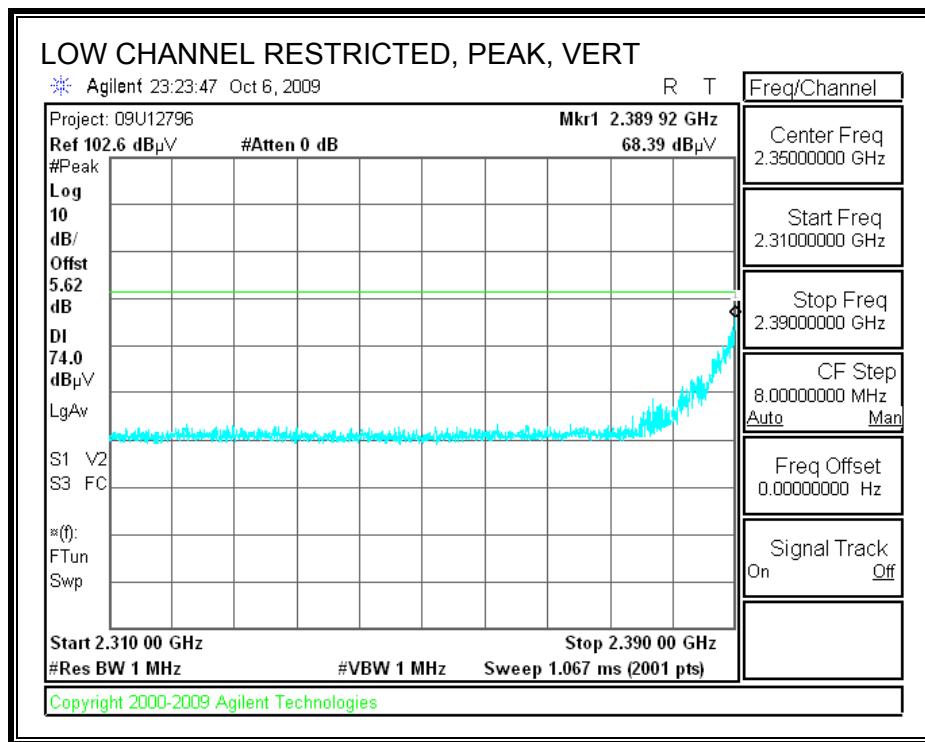



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

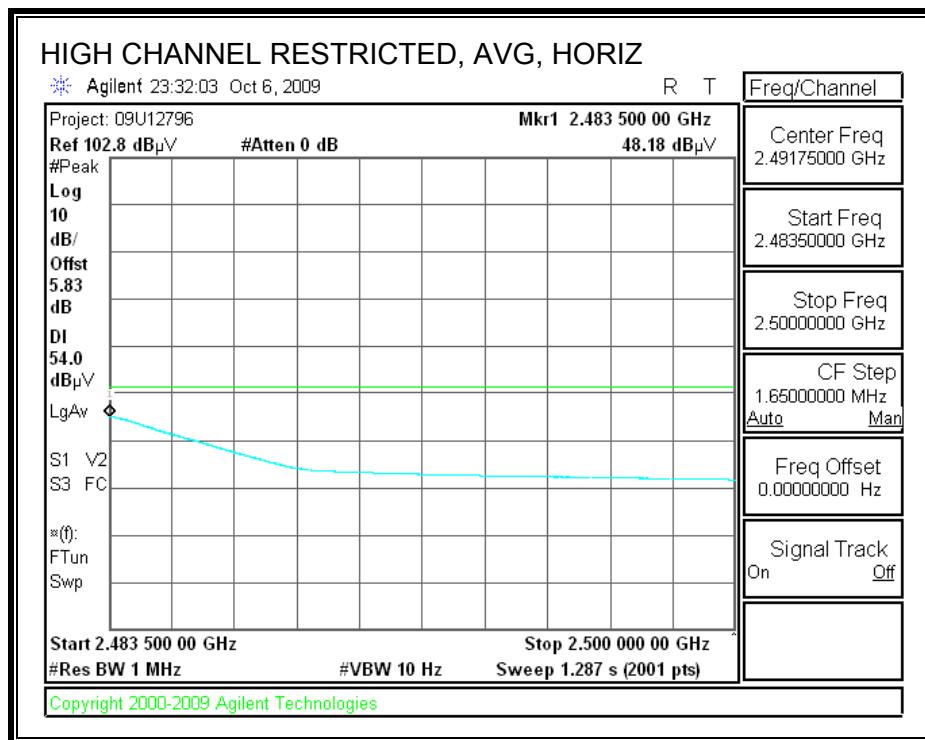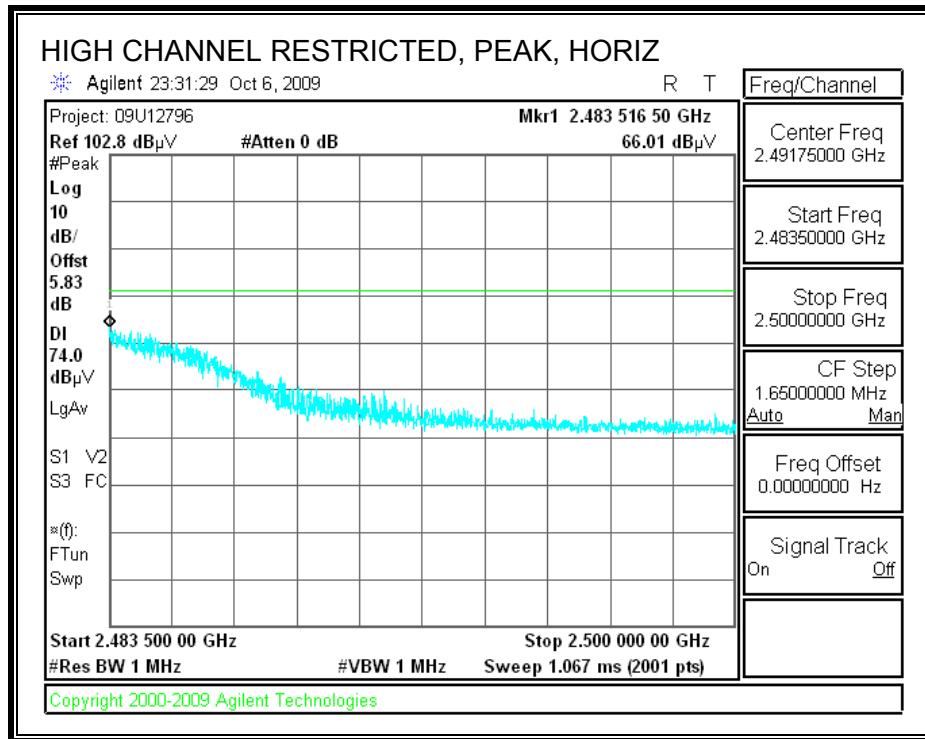



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

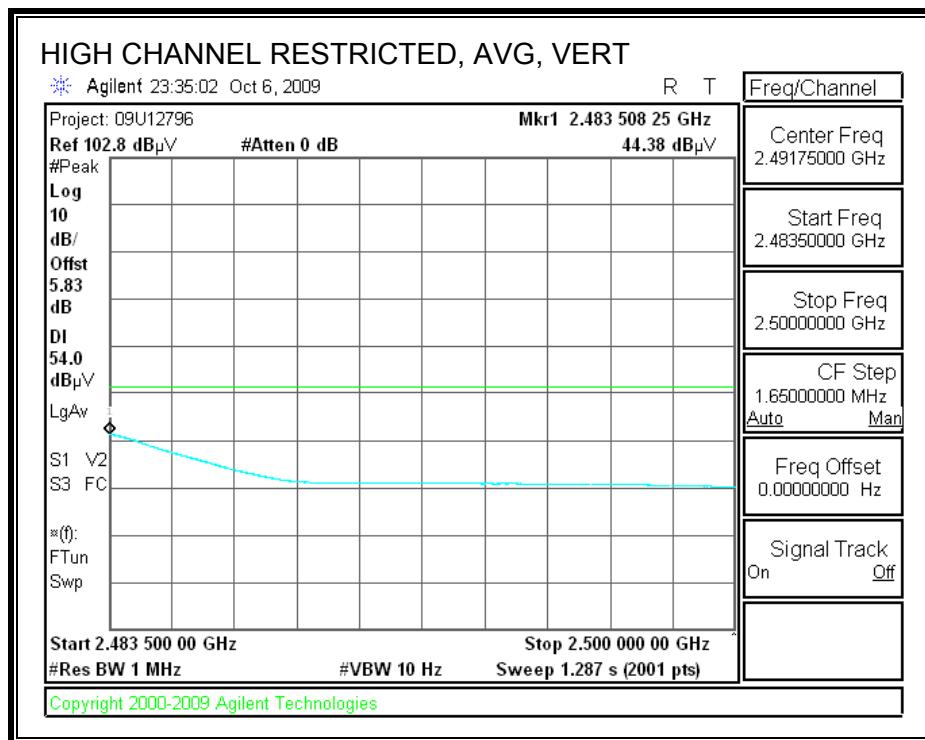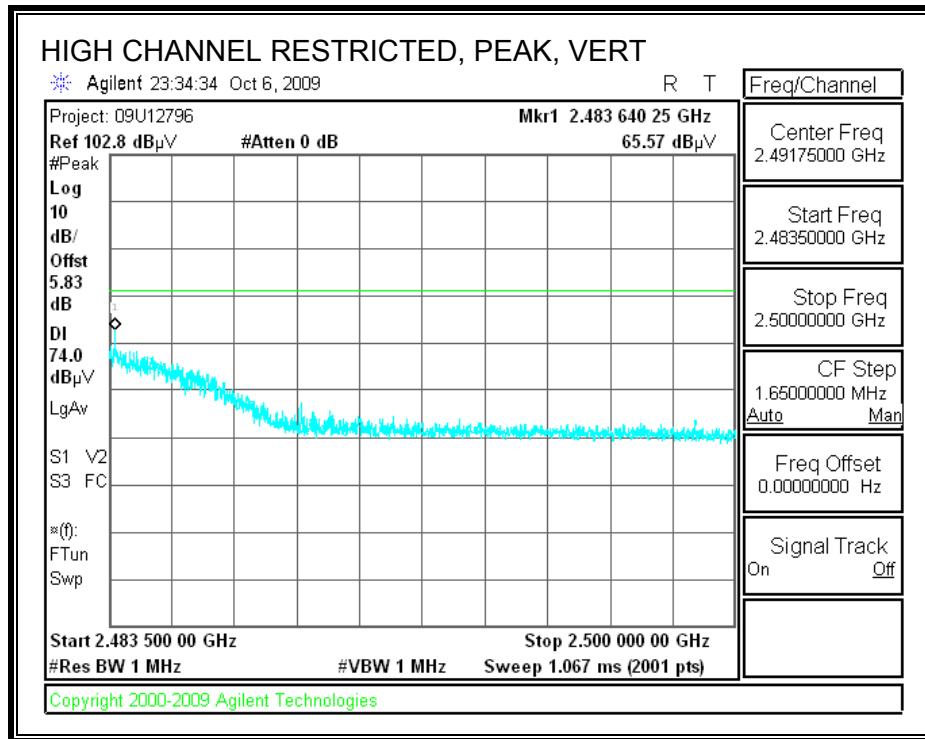



7.3.7. 802.11n HT20 MODE IN THE 2.4 GHz BAND_CHAIN A+B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

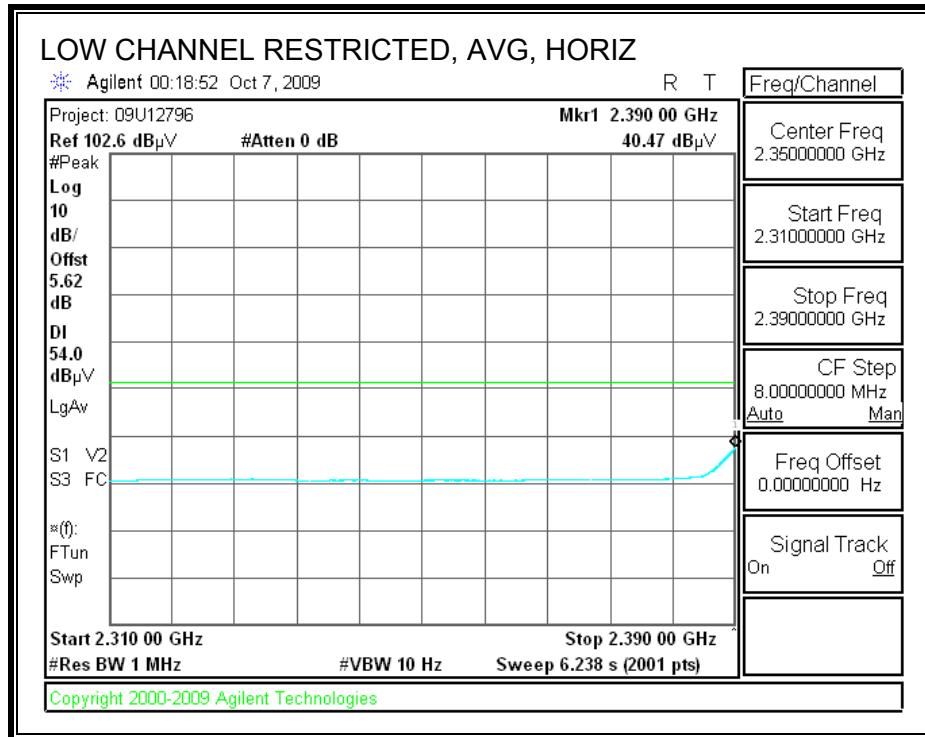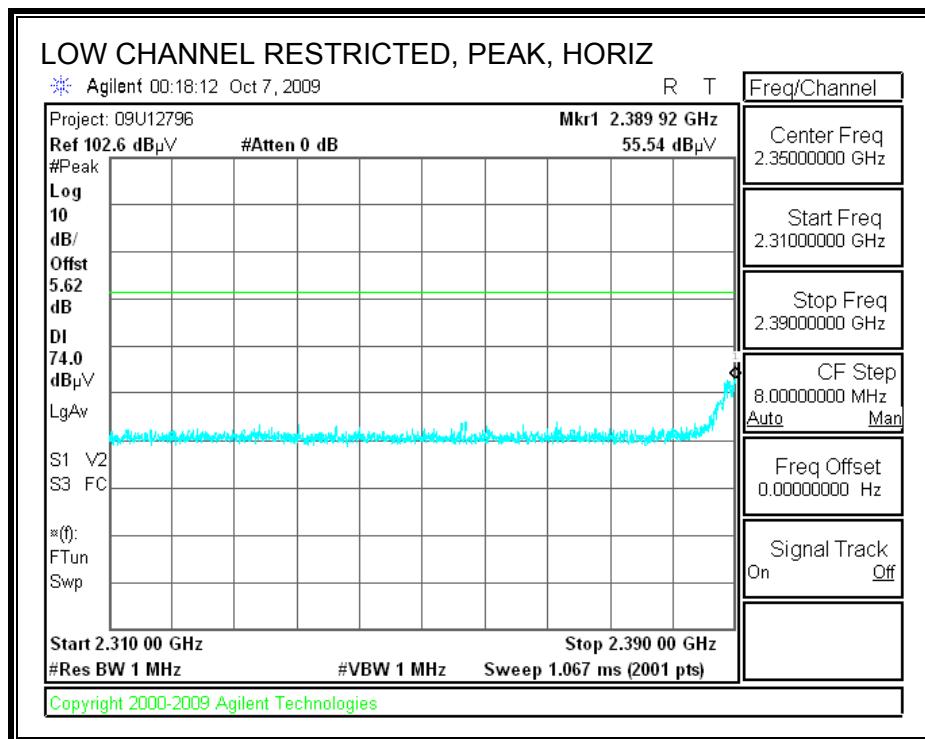



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

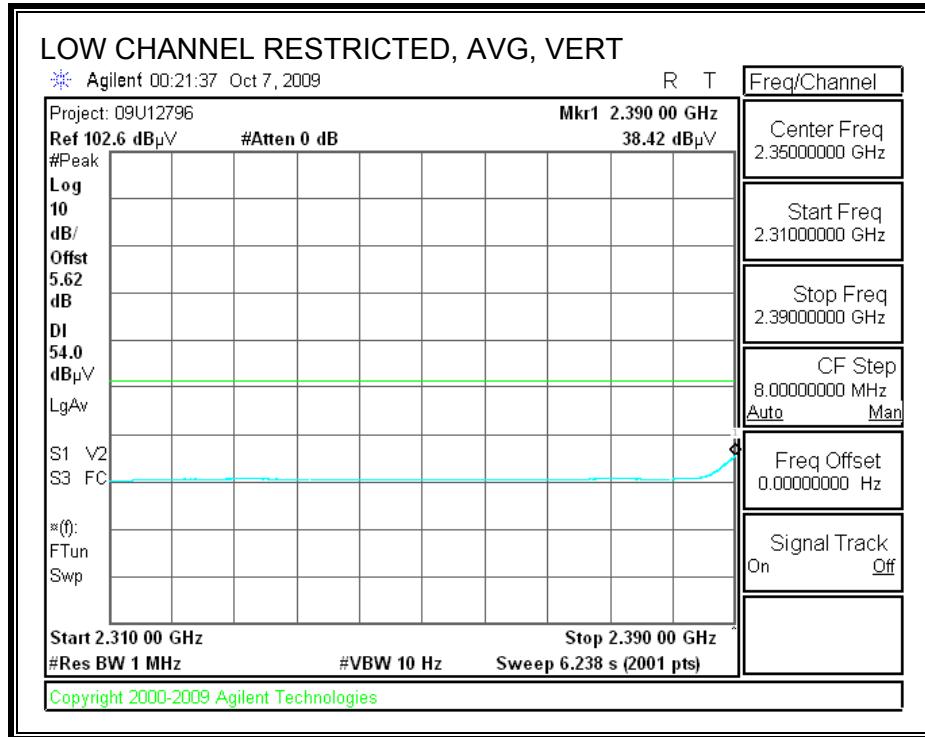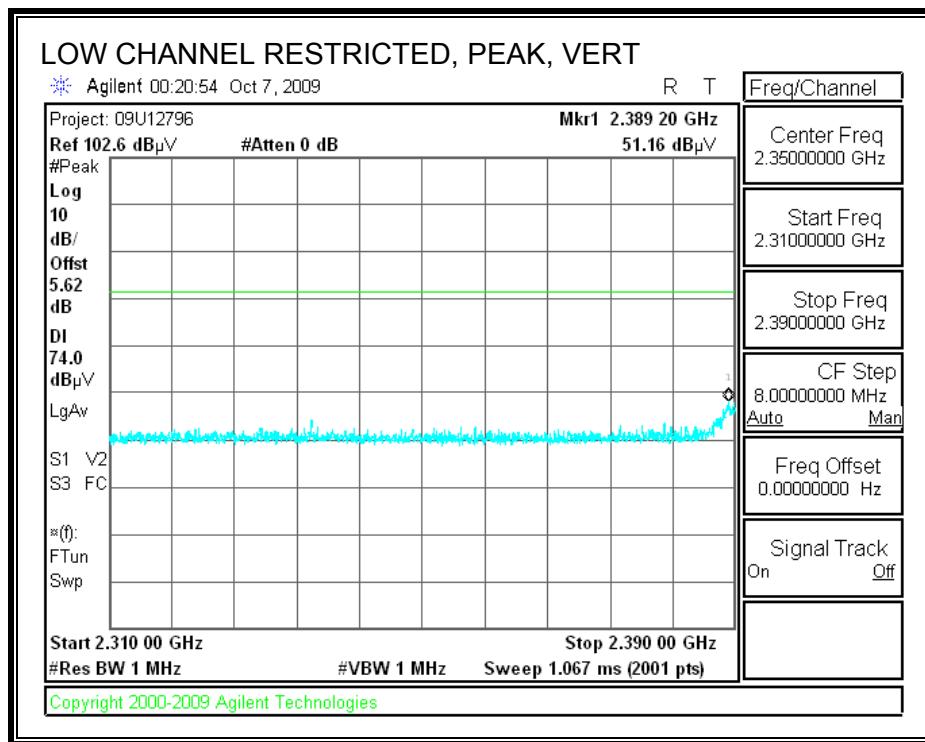



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

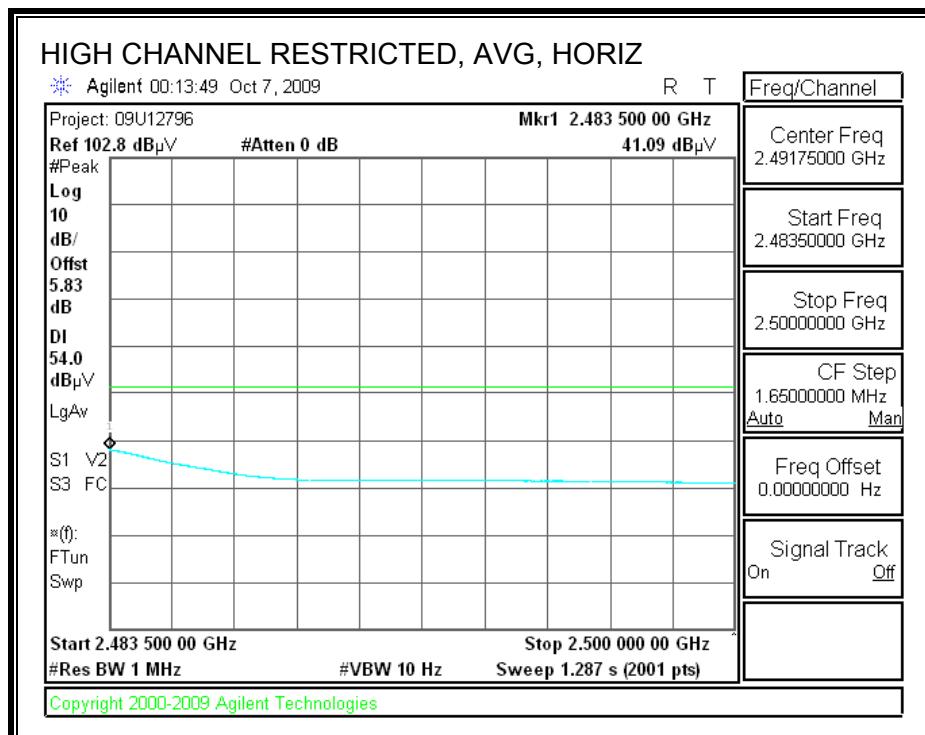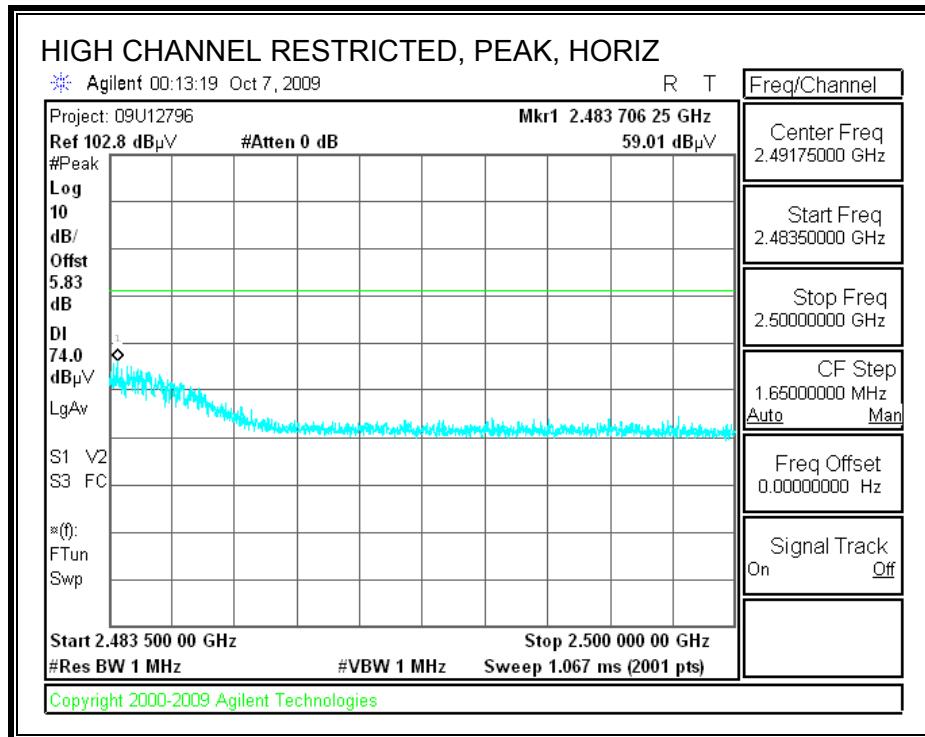



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

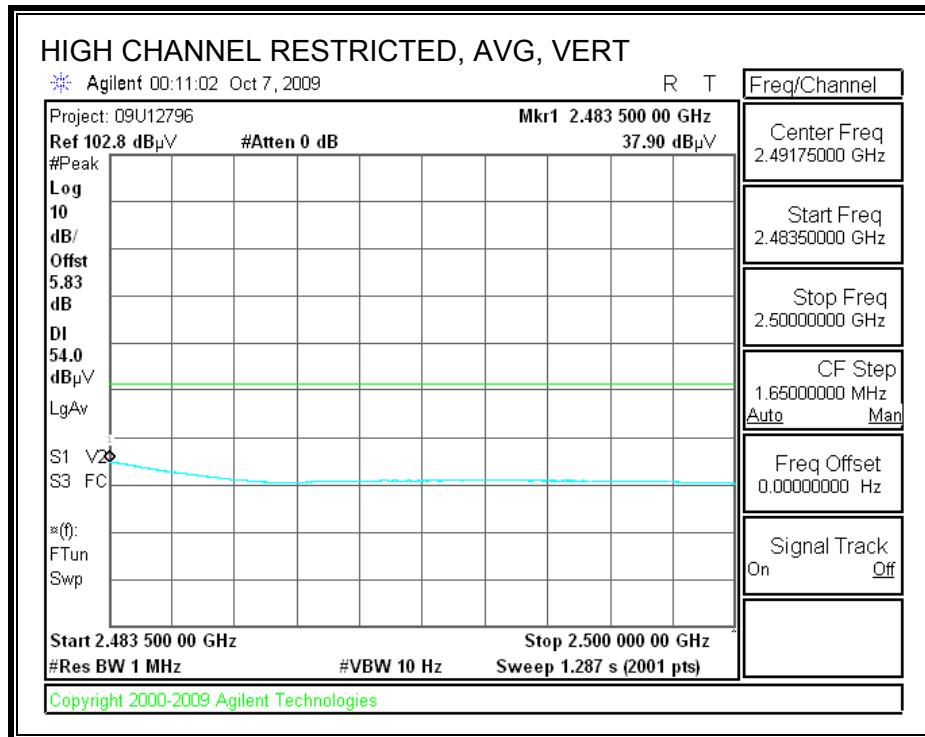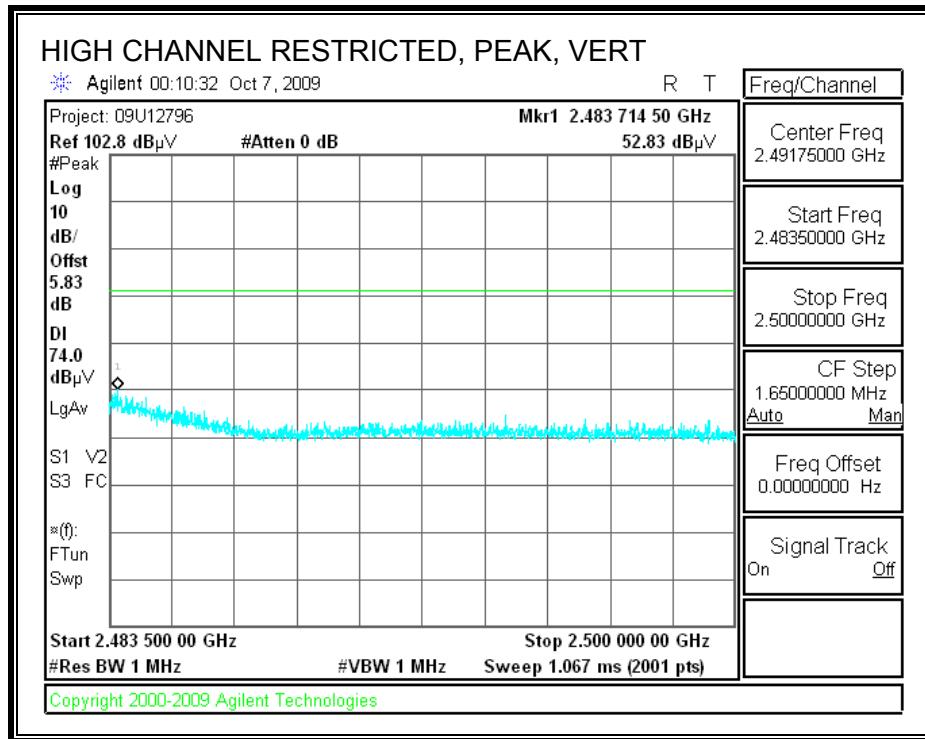



7.3.8. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

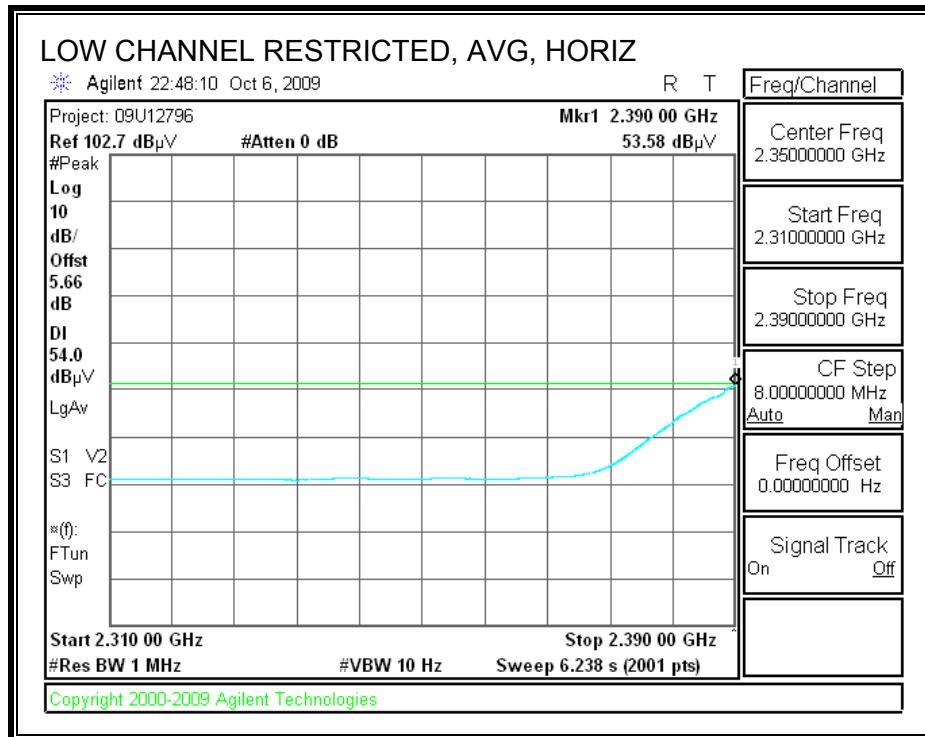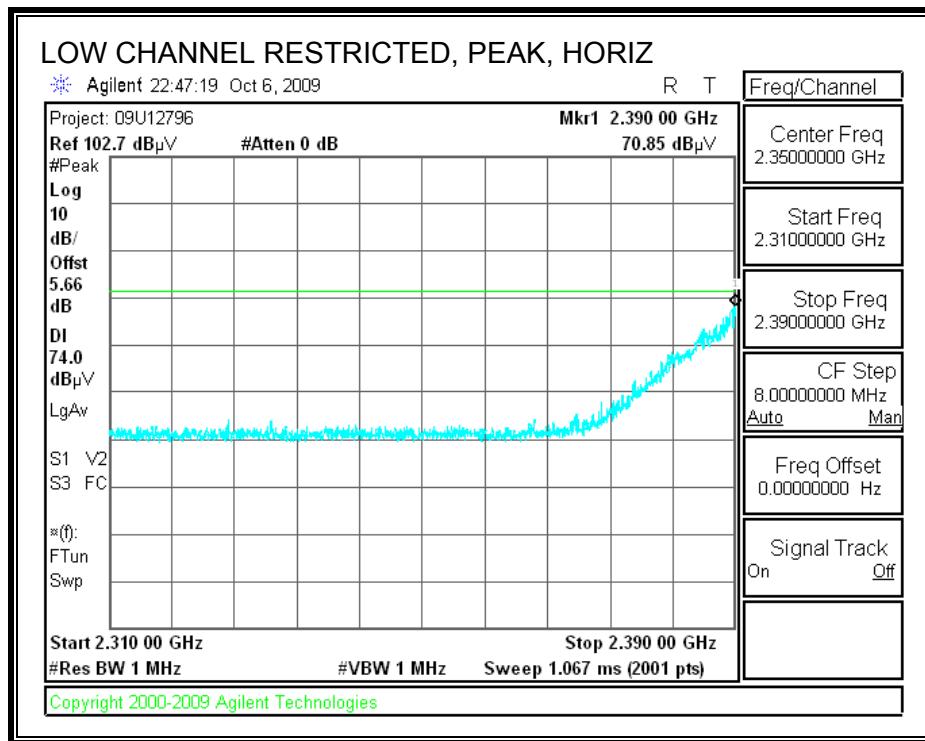



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

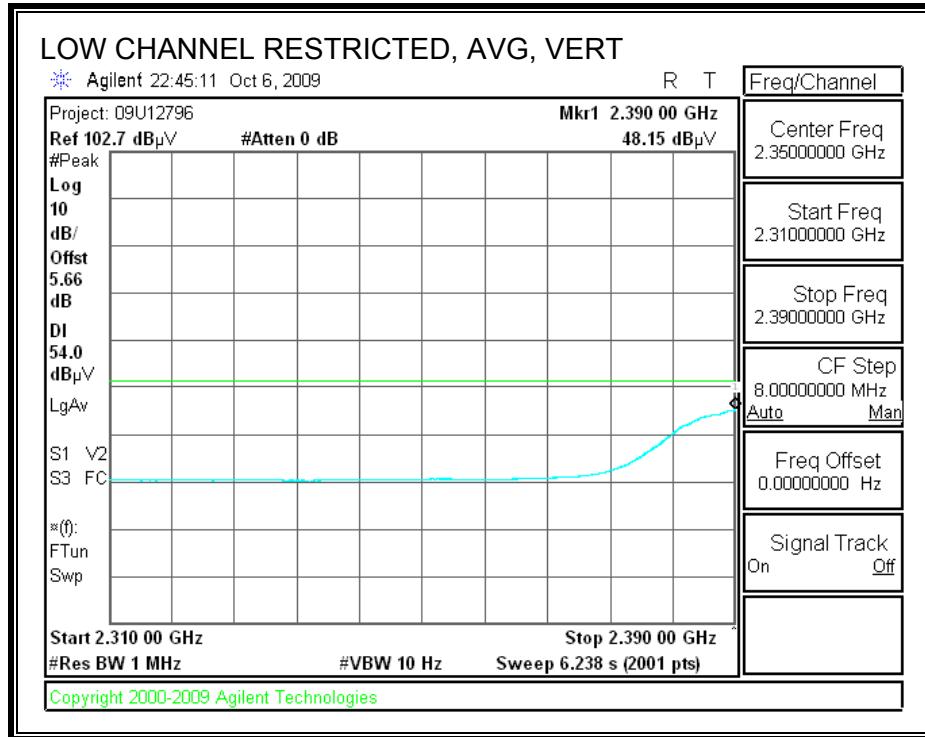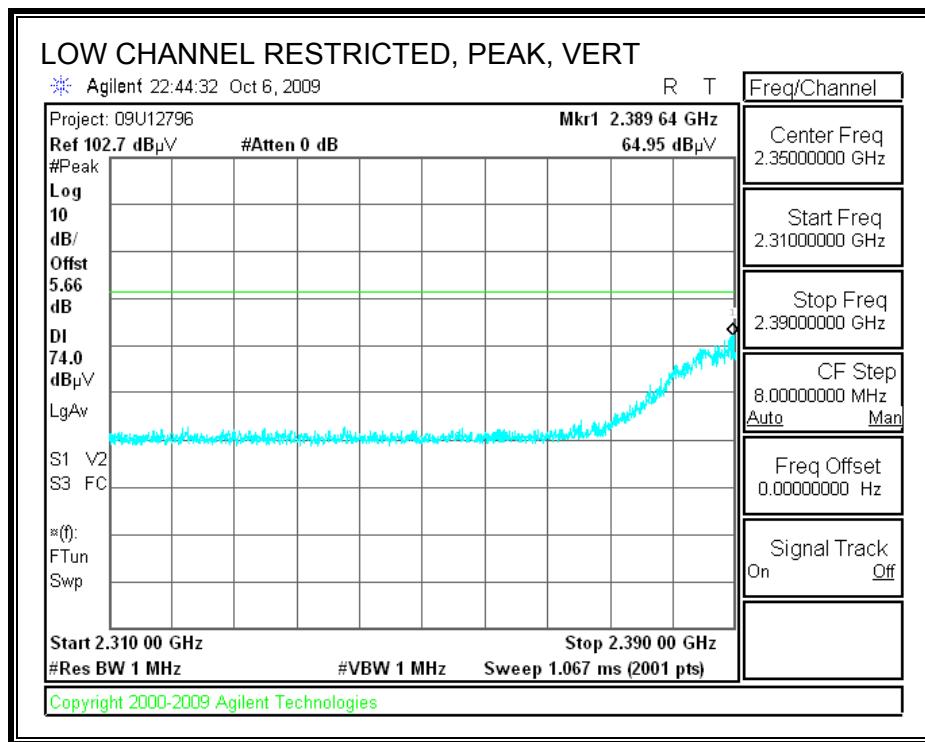



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

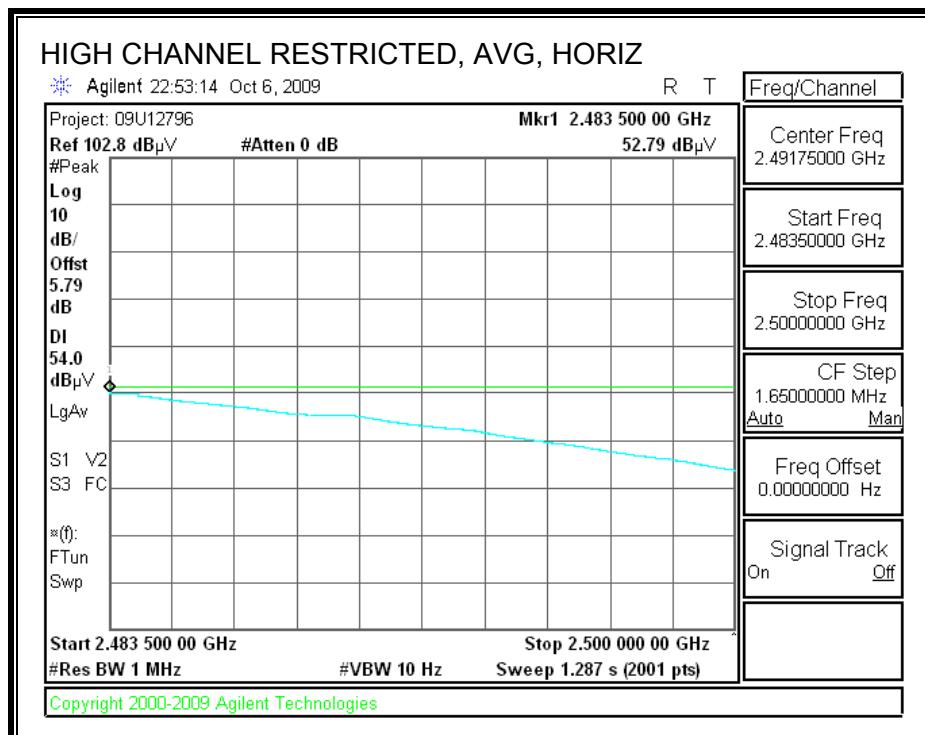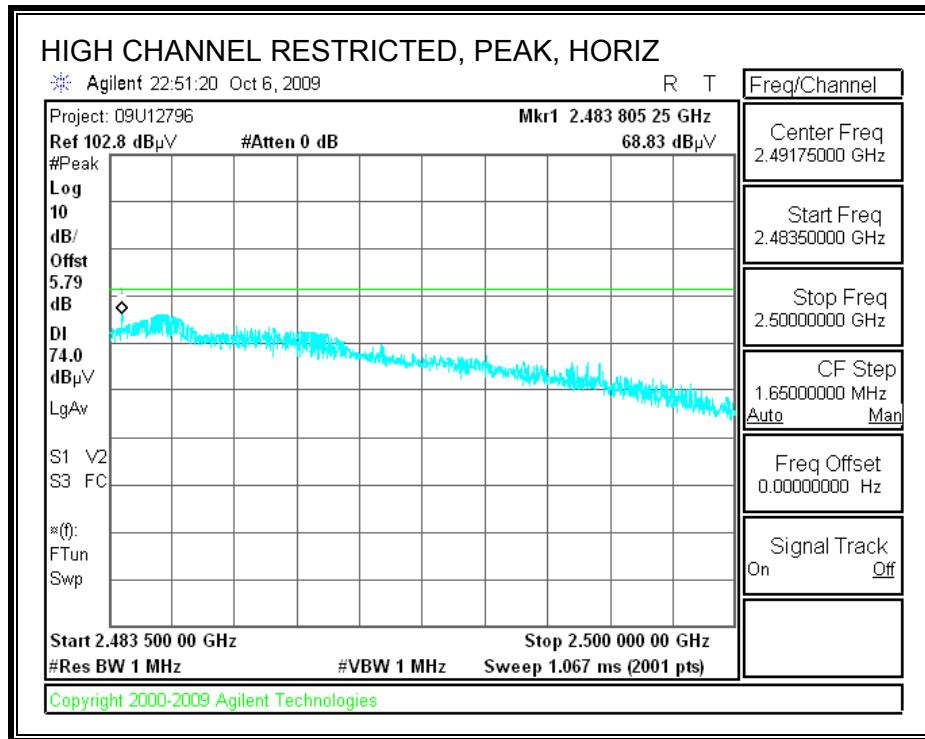



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

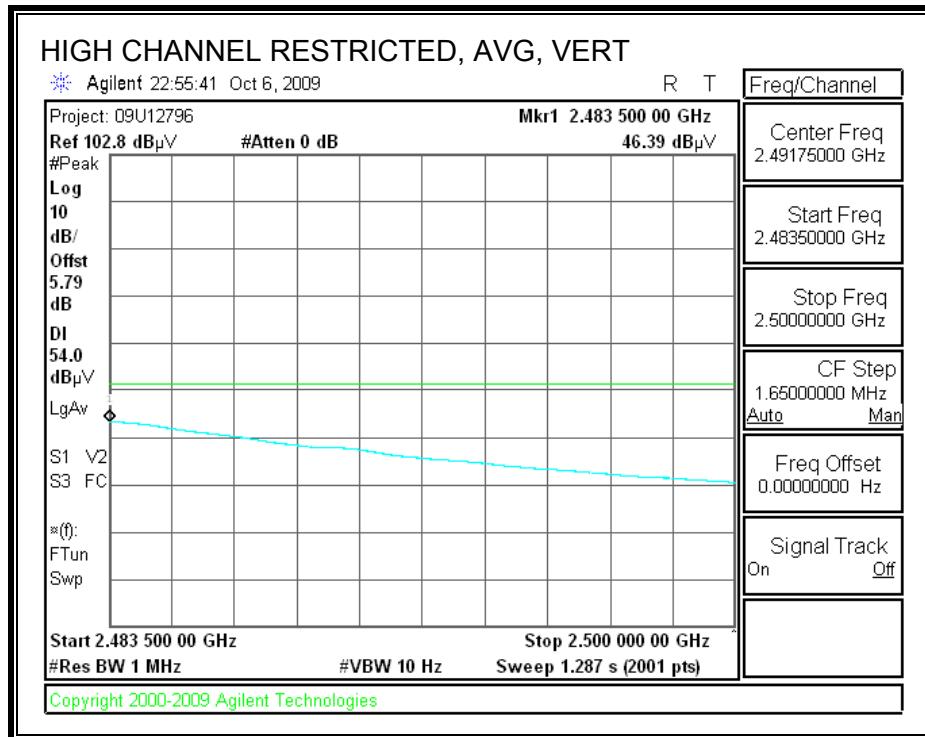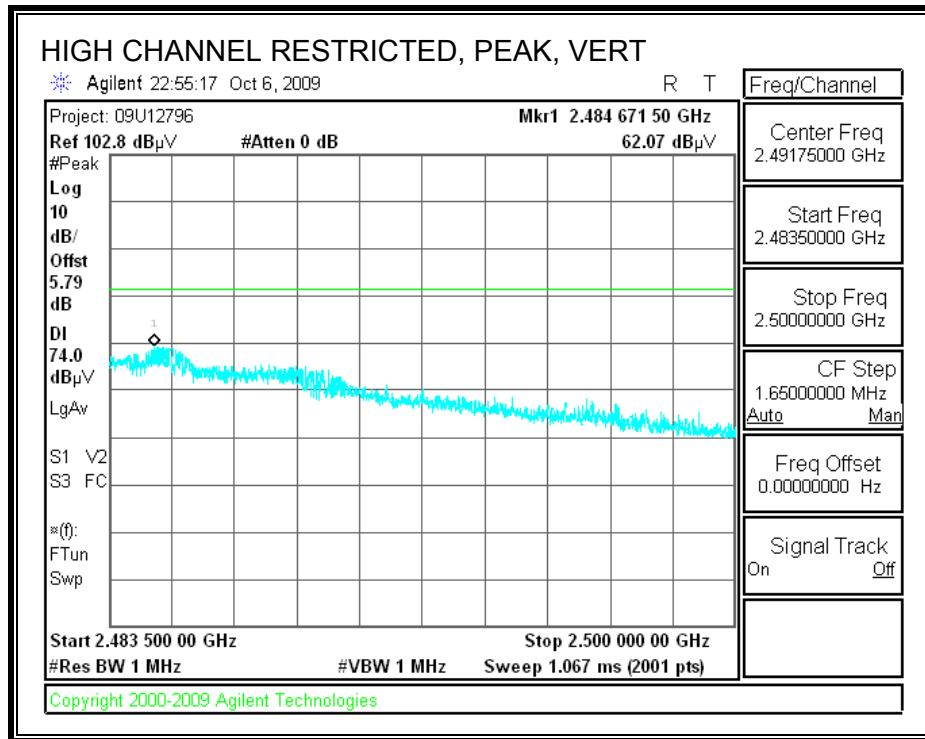



7.3.9. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

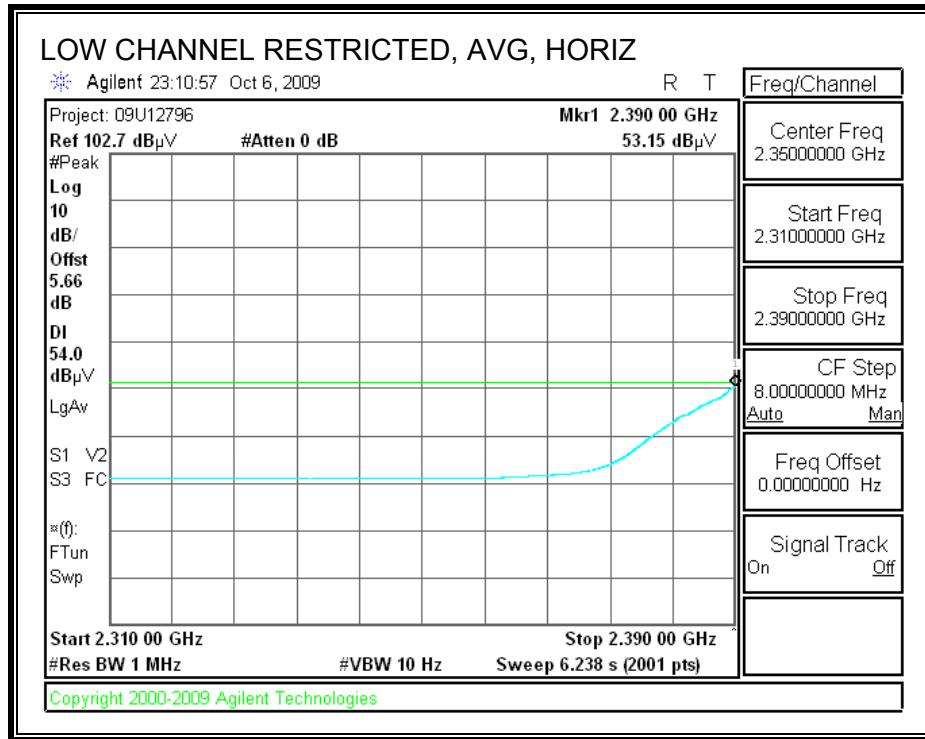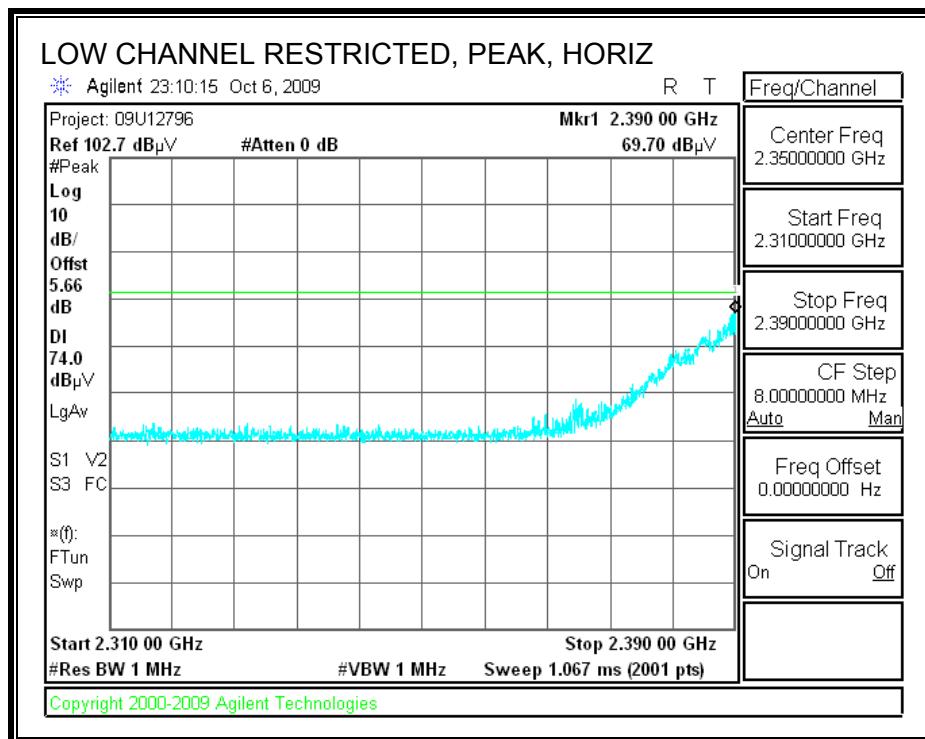



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

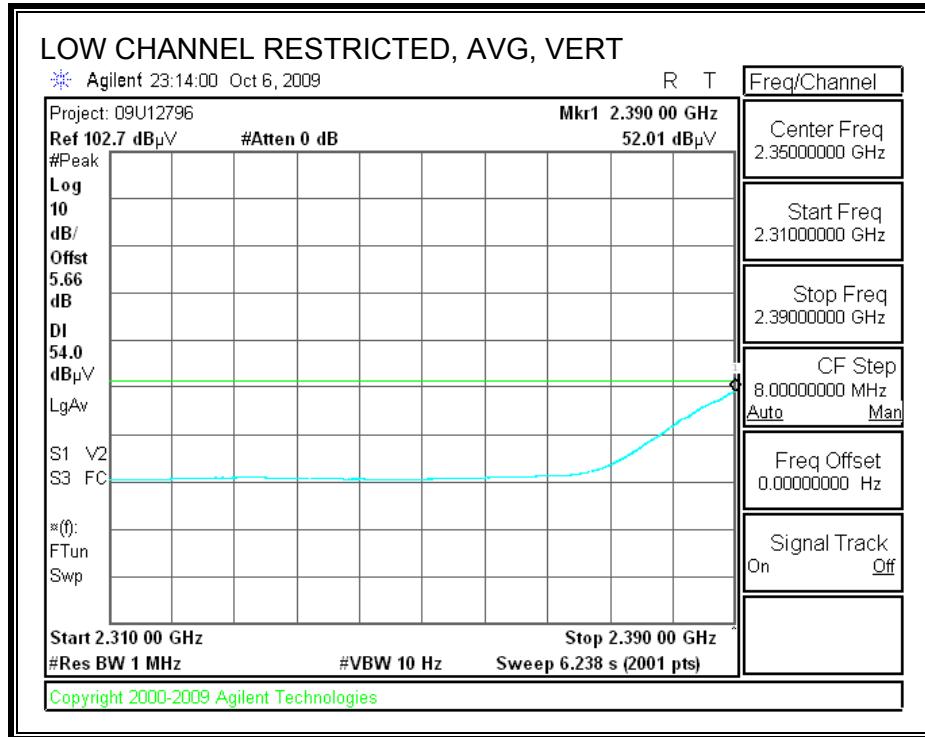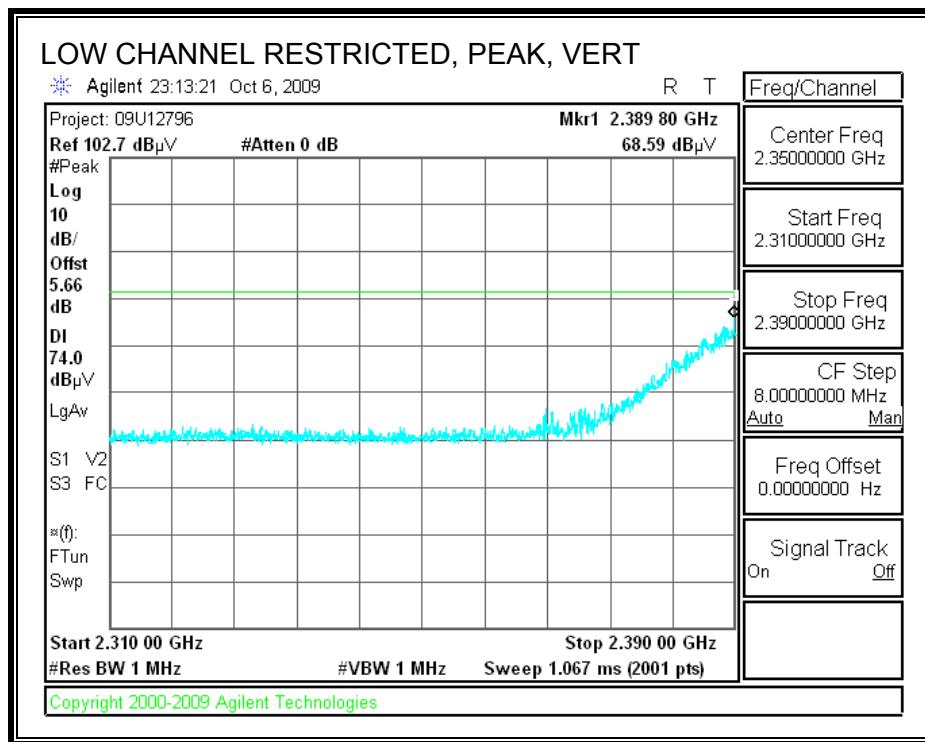



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

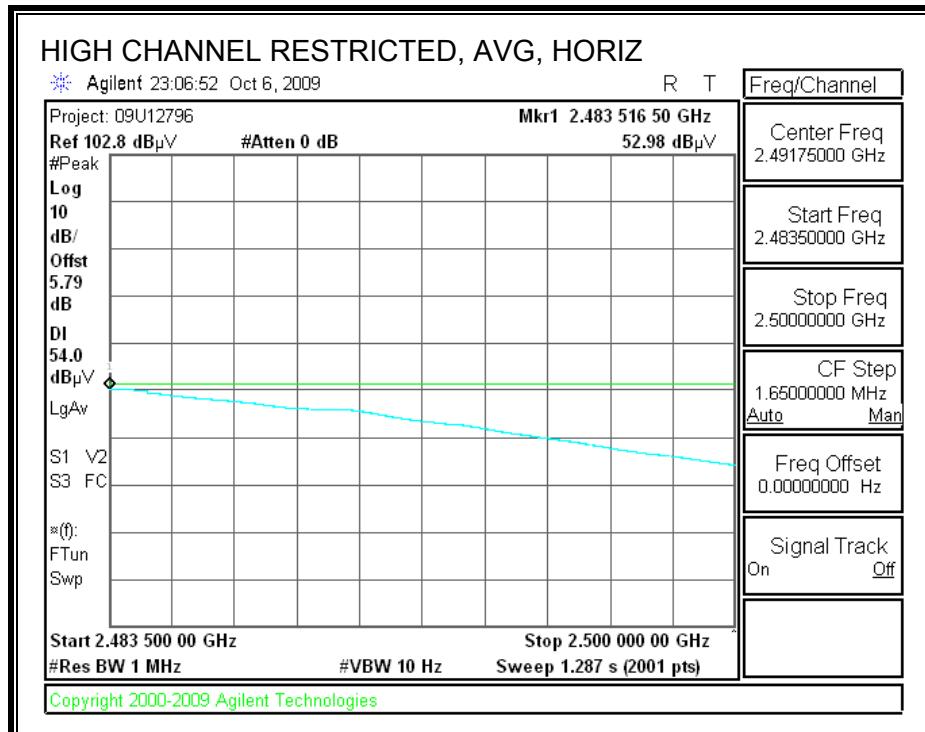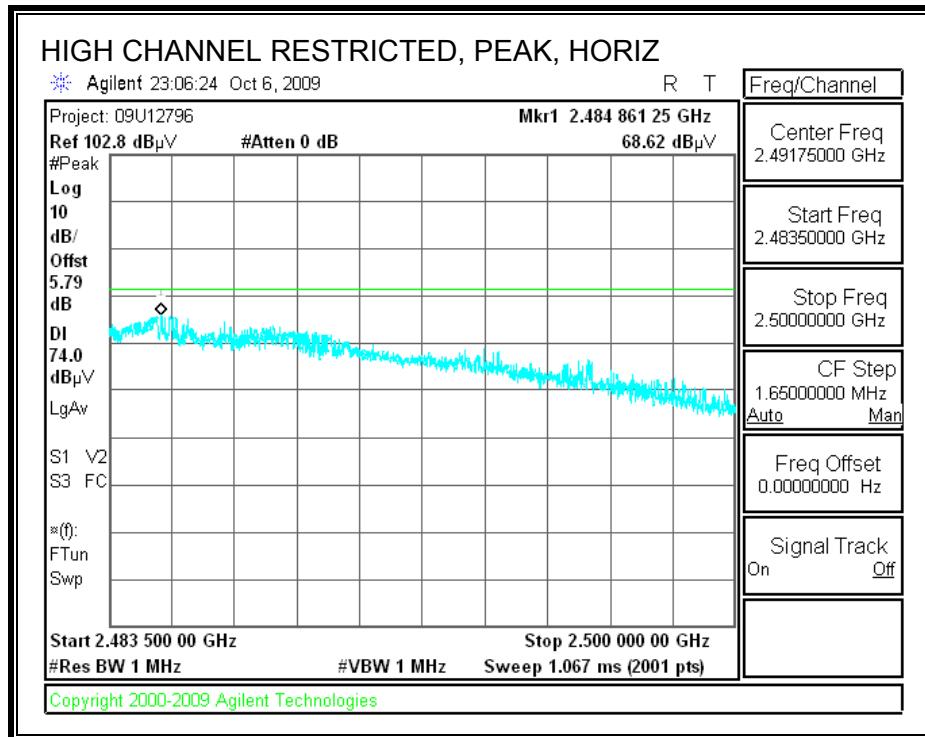



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

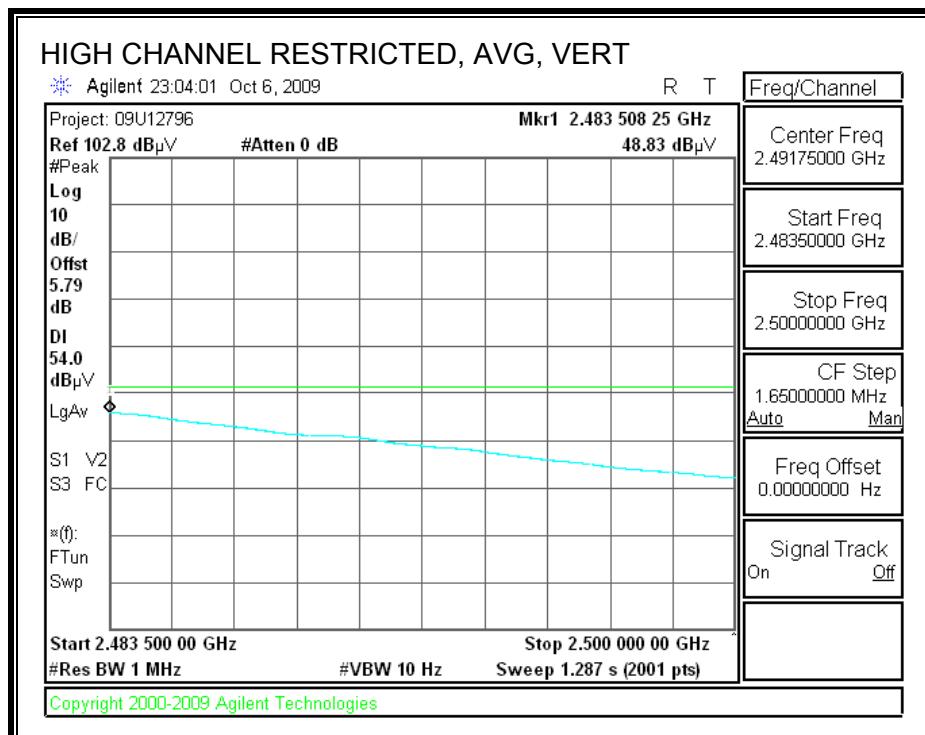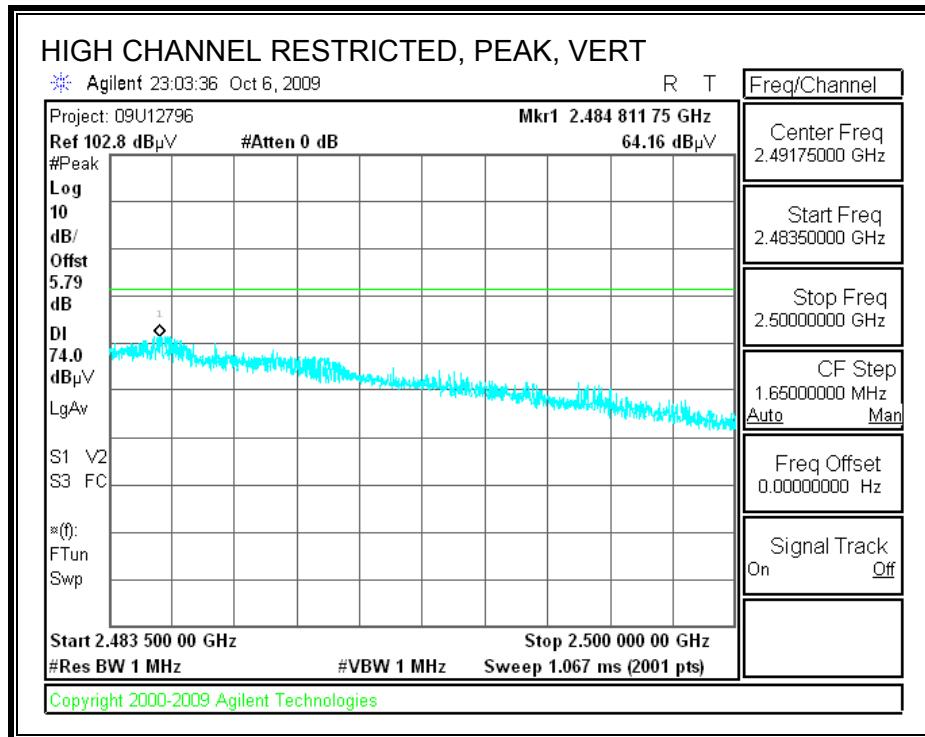



7.3.10. 802.11n HT40 MODE IN THE 2.4 GHz BAND_CHAIN A+B
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

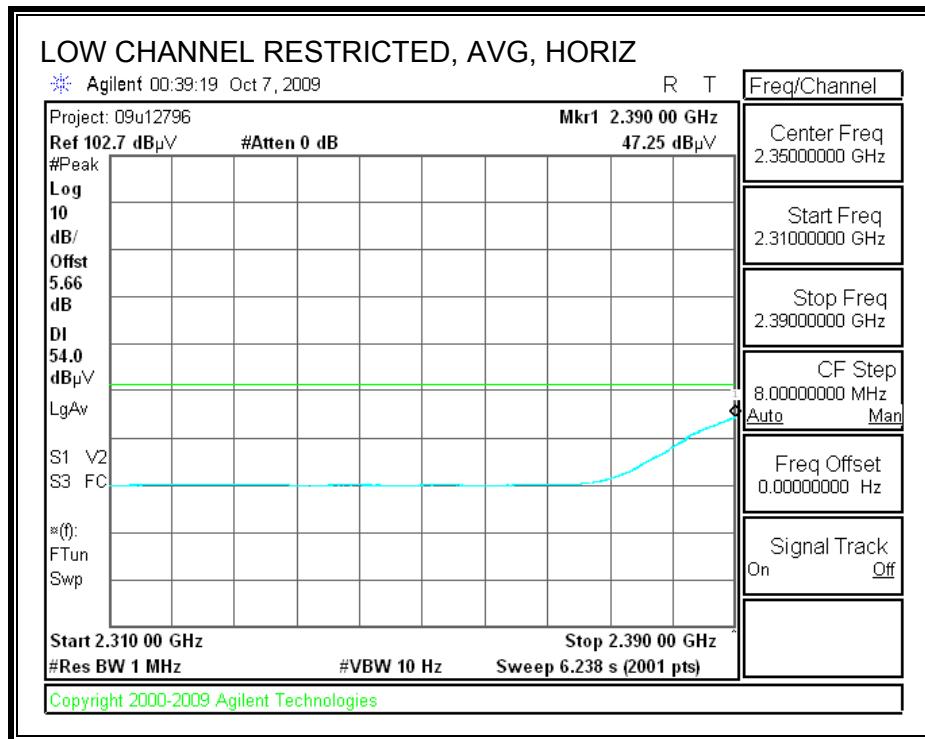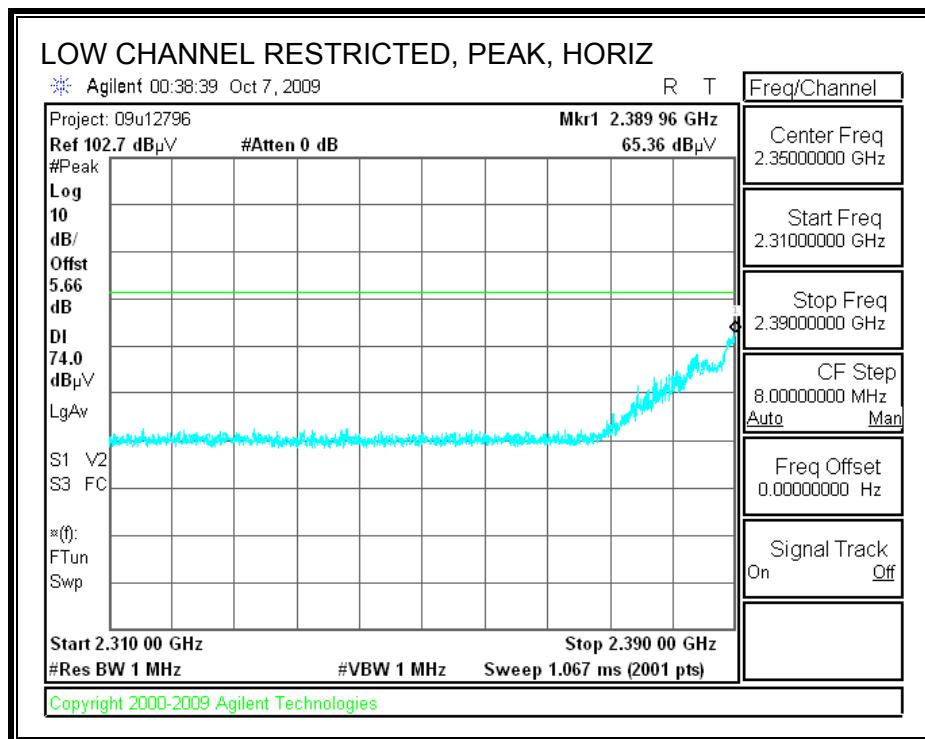



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

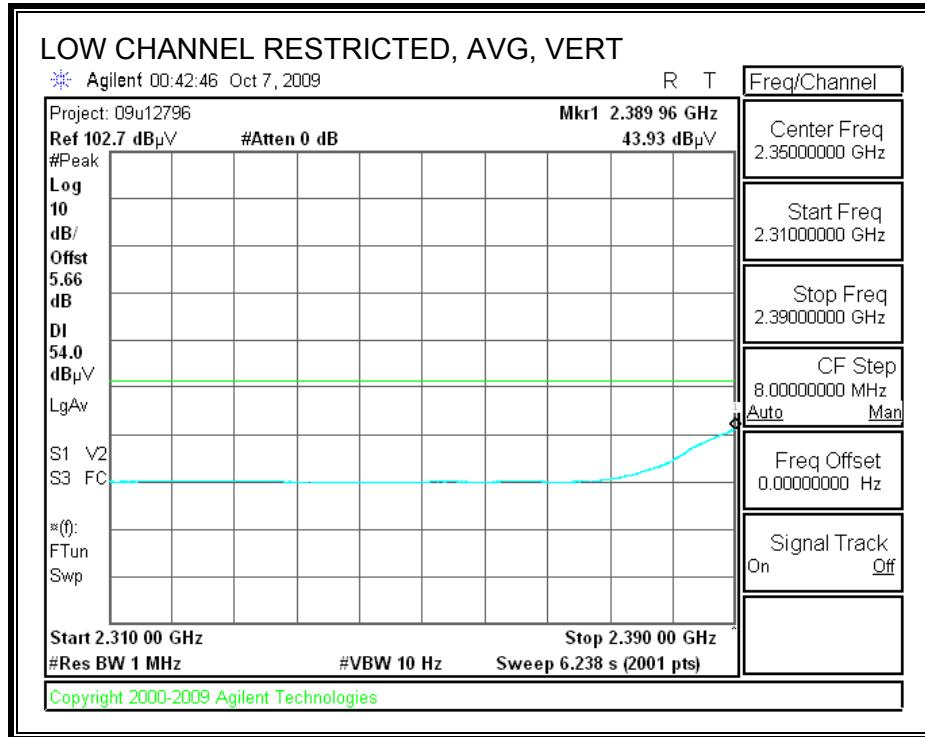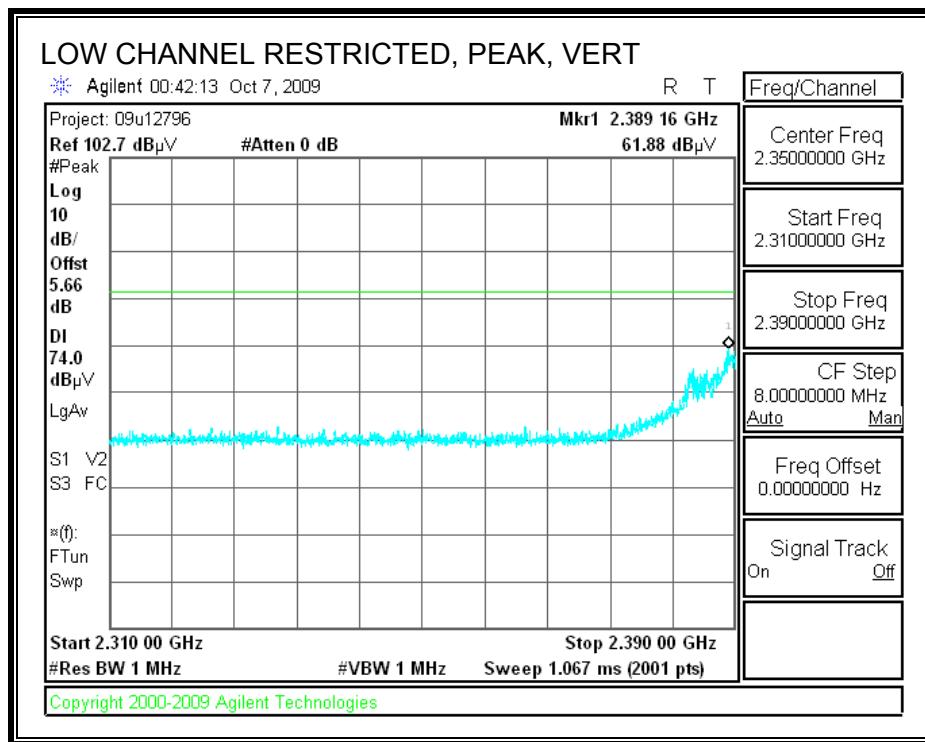

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

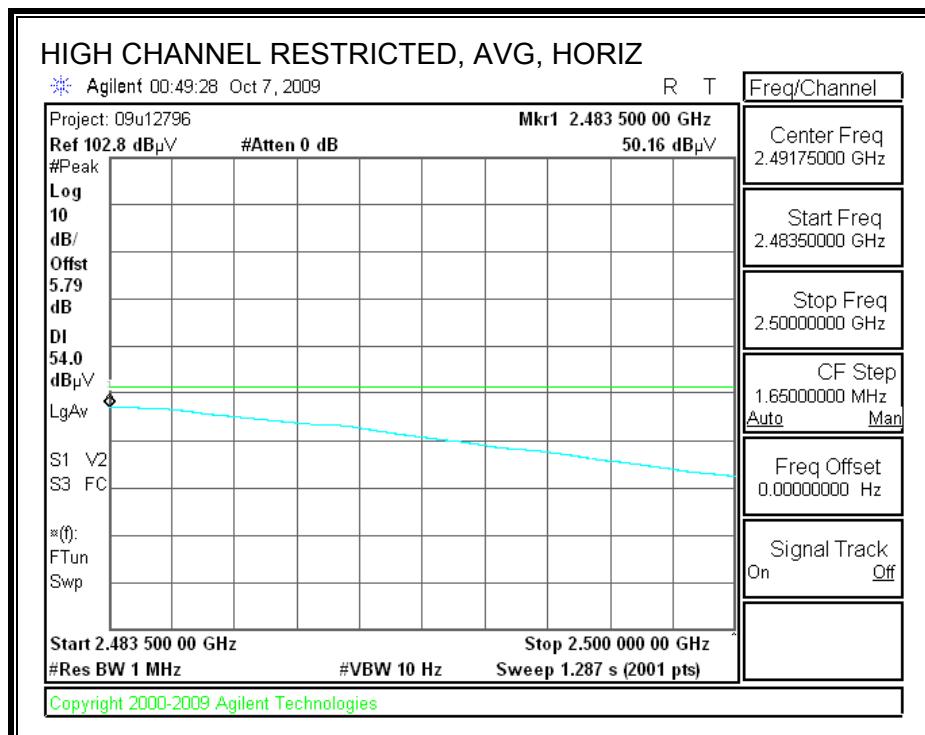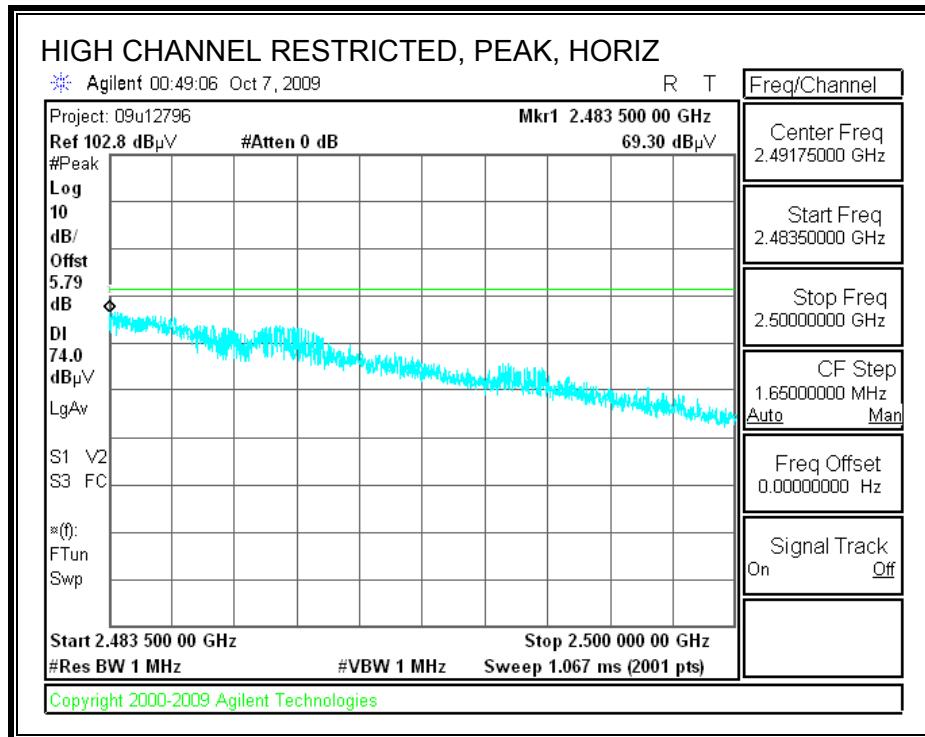

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

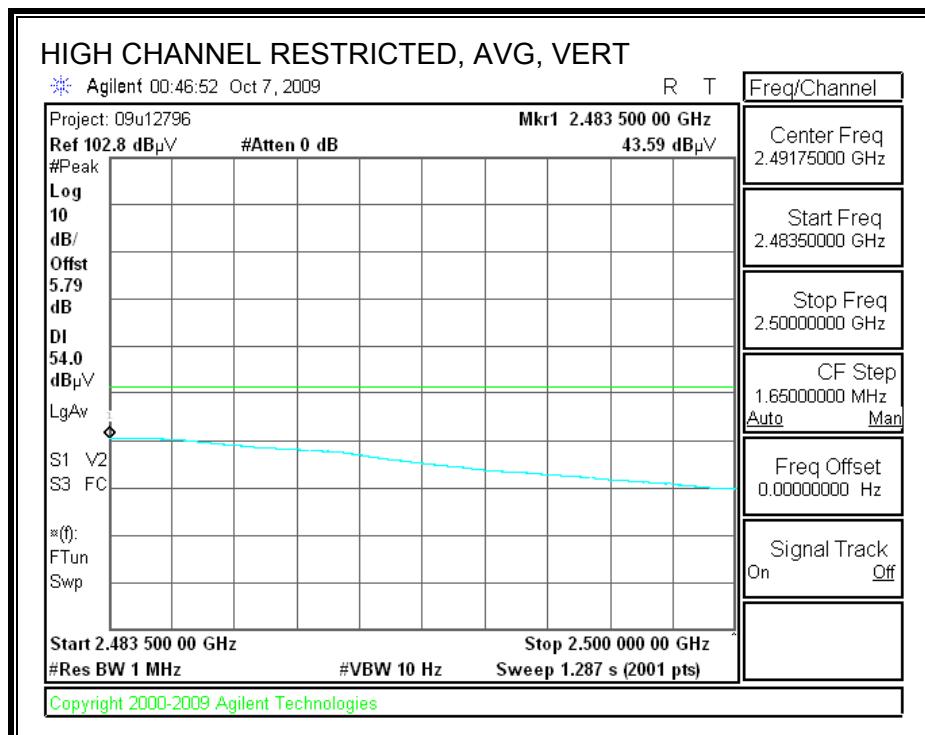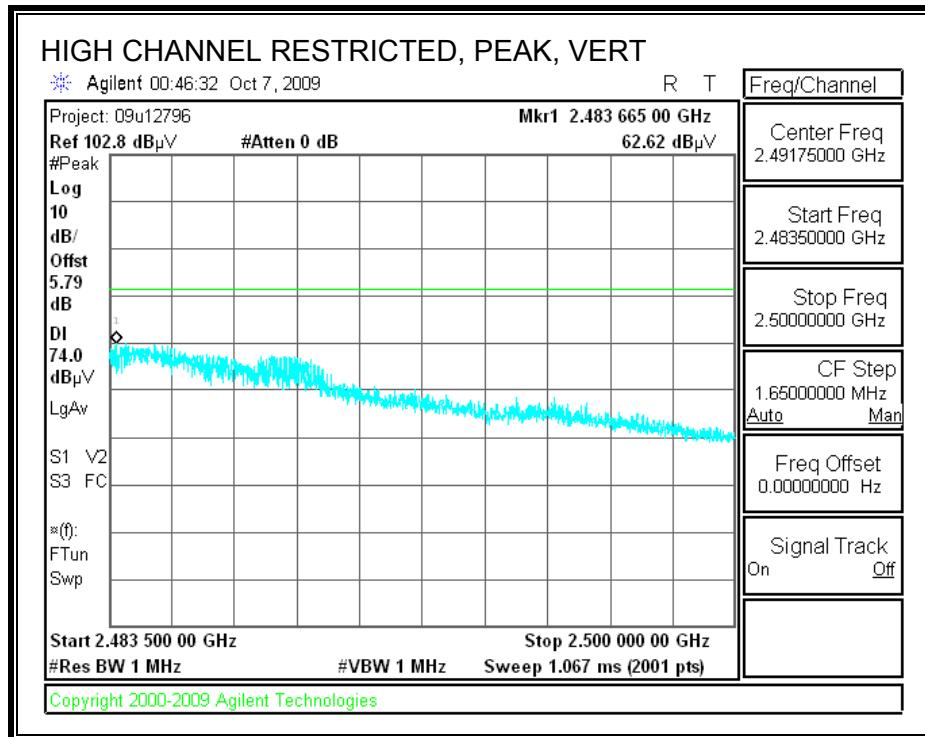

7.3.11. 802.11a MODE IN THE 5.8 GHz BAND_CHAIN A & B

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber															
Test Engr:	Vien Tran														
Date:	11/20/09														
Project #:	09U12796														
Company:	Intel														
EUT Description:	EUT inside Laptop with ACON Antenna														
Test Target:	FCC B_Harmonic														
Mode Oper:	Tx in 5.8GHz_11a Mode_Chain & Chain B														
f	Measurement Frequency														
Dist	Amp														
Read	Preamp Gain														
Read	Distance to Antenna														
Read	D Corr														
Read	Distance Correct to 3 meters														
Read	Average Field Strength @ 3 m														
AF	Margin vs. Average Limit														
AF	Margin vs. Peak Limit														
CL	Margin														
CL	Ant. Pol.														
CL	V/H														
CL	P/A/QP														
CL	Ant.High														
CL	cm														
CL	Table Angle														
CL	Degree														
CL	Notes														
f	Dist	Read	AF	CL	Amp	D Corr	Ftr	Corr.	Limit	Margin	Ant. Pol.	Det.	Ant.High	Table Angle	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	cm	Degree	
11a_5745MHz Chain A															
11.570	3.0	31.6	38.0	9.5	-32.5	0.0	0.0	46.5	74.0	-27.5	H	P	101.0	188.0	
11.570	3.0	18.9	38.0	9.5	-32.5	0.0	0.0	33.9	54.0	-20.1	H	A	101.0	188.0	
11.570	3.0	31.0	38.0	9.5	-32.5	0.0	0.0	45.9	74.0	-28.1	V	P	100.0	142.0	
11.570	3.0	19.0	38.0	9.5	-32.5	0.0	0.0	34.0	54.0	-20.0	V	A	100.0	142.0	
11a_5745MHz Chain B															
11.570	3.0	33.7	38.0	9.5	-32.5	0.0	0.0	48.6	74.0	-25.4	H	P	100.0	337.0	
11.570	3.0	20.6	38.0	9.5	-32.5	0.0	0.0	35.6	54.0	-18.4	H	A	100.0	337.0	
11.570	3.0	34.0	38.0	9.5	-32.5	0.0	0.0	48.9	74.0	-25.1	V	P	193.0	269.0	
11.570	3.0	21.9	38.0	9.5	-32.5	0.0	0.0	36.9	54.0	-17.1	V	A	193.0	269.0	
Rev. 4.1.2.7															
Note: No other emissions were detected above the system noise floor.															

7.3.12. 802.11n HT20 MODE IN THE 5.8 GHz BAND_CHAIN A&B

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber															
Test Engr:	Vien Tran														
Date:	11/20/09														
Project #:	09U12796														
Company:	Intel														
EUT Description:	EUT inside Laptop with ACON Antenna														
Test Target:	FCC B_Harmonic														
Mode Oper:	Tx in 5.8GHz_HT20 Mode_Chain & Chain B														
f	Measurement Frequency	Amp	Preamp Gain											Average Field Strength Limit	
Dist	Distance to Antenna	D	Corr	Distance	Correct to 3 meters									Peak Field Strength Limit	
Read	Analyzer Reading	Avg		Average	Field Strength @ 3 m									Margin vs. Average Limit	
AF	Antenna Factor	Peak		Calculated	Peak Field Strength									Margin vs. Peak Limit	
CL	Cable Loss	HPF		High Pass	Filter										
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
HT20_5785MHz_Chain A															
11.570	3.0	30.9	38.1	9.5	-32.5	0.0	0.0	46.0	74.0	-28.0	H	P	100.0	59.0	
11.570	3.0	18.6	38.1	9.5	-32.5	0.0	0.0	33.8	54.0	-20.2	H	A	100.0	59.0	
11.570	3.0	30.9	38.1	9.5	-32.5	0.0	0.0	46.0	74.0	-28.0	V	P	100.0	322.0	
11.570	3.0	18.9	38.1	9.5	-32.5	0.0	0.0	34.0	54.0	-20.0	V	A	100.0	322.0	
HT20_5785MHz_Chain B															
11.570	3.0	32.2	38.1	9.5	-32.5	0.0	0.0	47.3	74.0	-26.7	H	P	100.0	46.0	
11.570	3.0	19.0	38.1	9.5	-32.5	0.0	0.0	34.1	54.0	-19.9	H	A	100.0	46.0	
11.570	3.0	31.5	38.1	9.5	-32.5	0.0	0.0	46.6	74.0	-27.4	V	P	99.0	142.0	
11.570	3.0	19.0	38.1	9.5	-32.5	0.0	0.0	34.1	54.0	-19.9	V	A	99.0	142.0	
Rev. 4.1.2.7															
Note: No other emissions were detected above the system noise floor.															

7.3.13. 802.11n HT40 MODE IN THE 5.8 GHz BAND_CHAIN A&B

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber															
Test Engr:	Vien Tran														
Date:	11/20/09														
Project #:	09U12796														
Company:	Intel														
EUT Description:	EUT inside Laptop with ACON Antenna														
Test Target:	FCC B_Harmonic														
Mode Oper:	Tx in 5.8GHz_HT40 Mode_Chain & Chain B														
f	Measurement Frequency	Amp	Preamp Gain											Average Field Strength Limit	
Dist	Distance to Antenna	D	Corr	Distance	Correct to 3 meters									Peak Field Strength Limit	
Read	Analyzer Reading	Avg		Average	Field Strength @ 3 m									Margin vs. Average Limit	
AF	Antenna Factor	Peak		Calculated	Peak Field Strength									Margin vs. Peak Limit	
CL	Cable Loss	HPF		High Pass Filter											
f	Dist	Read	AF	CL	Amp	D	Corr	Fltr	Corr.	Limit	Margin	Ant.	Pol.	Det.	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	Ant.High	Table Angle
HT20 5795MHz Chain A															
11.590	3.0	31.1	38.1	9.5	-32.5	0.0	0.0	46.2	74.0	-27.8	H	P	100.0	349.0	
11.590	3.0	18.4	38.1	9.5	-32.5	0.0	0.0	33.6	54.0	-20.4	H	A	100.0	349.0	
11.590	3.0	30.9	38.1	9.5	-32.5	0.0	0.0	46.0	74.0	-28.0	V	P	100.0	209.0	
11.590	3.0	18.5	38.1	9.5	-32.5	0.0	0.0	33.6	54.0	-20.4	V	A	100.0	209.0	
HT40 5795MHz Chain B															
11.590	3.0	31.9	38.1	9.5	-32.5	0.0	0.0	47.1	74.0	-26.9	H	P	100.0	33.0	
11.590	3.0	18.6	38.1	9.5	-32.5	0.0	0.0	33.7	54.0	-20.3	H	A	100.0	33.0	
11.590	3.0	31.8	38.1	9.5	-32.5	0.0	0.0	47.0	74.0	-27.0	V	P	100.0	293.0	
11.590	3.0	18.3	38.1	9.5	-32.5	0.0	0.0	33.5	54.0	-20.5	V	A	100.0	293.0	
Rev. 4.1.2.7 Note: No other emissions were detected above the system noise floor.															

7.4. RECEIVER ABOVE 1 GHz

7.4.1. RECEIVER ABOVE 1 GHz IN THE 2.4 GHz BAND

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																															
<p>Test Engr: Vien Tran Date: 10/13/09 Project #: 09U12796 Company: Intel EUT Description: Intel® Centrino® Advanced-N 6200 (Tested Inside Of Lenovo ThinkPad X200/X201 Tablet Series) EUT M/N: 622ANHMW Test Target: FCC B Mode Oper: Rx in 2.4GHz Band_Worst-Case</p>																																																															
<p><u>Test Equipment:</u></p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="3">Horn > 18GHz</td><td>Limit</td></tr><tr><td>T60; S/N: 2238 @3m</td><td>T34 HP 8449B</td><td></td><td colspan="3"></td><td>RX RSS 210</td></tr><tr><td colspan="15">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="3">HPF</td><td>Reject Filter</td><td colspan="3">Peak Measurements RBW=VBW=1MHz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="3"></td><td></td><td colspan="3">Average Measurements RBW=1MHz, VBW=10Hz</td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit	T60; S/N: 2238 @3m	T34 HP 8449B					RX RSS 210	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF			Reject Filter	Peak Measurements RBW=VBW=1MHz			3' cable 22807700	12' cable 22807600	20' cable 22807500					Average Measurements RBW=1MHz, VBW=10Hz		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit																																																									
T60; S/N: 2238 @3m	T34 HP 8449B					RX RSS 210																																																									
Hi Frequency Cables																																																															
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF			Reject Filter	Peak Measurements RBW=VBW=1MHz																																																								
3' cable 22807700	12' cable 22807600	20' cable 22807500					Average Measurements RBW=1MHz, VBW=10Hz																																																								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																
1.600	3.0	51.0	36.3	26.5	3.0	-37.4	0.0	0.0	43.1	28.4	74	54	-30.9	-25.6	H																																																
2.495	3.0	45.6	32.0	28.3	3.9	-36.3	0.0	0.0	41.6	28.0	74	54	-32.4	-26.0	H																																																
1.600	3.0	52.2	38.0	26.5	3.0	-37.4	0.0	0.0	44.3	30.1	74	54	-29.7	-23.9	V																																																
2.495	3.0	47.9	32.3	28.3	3.9	-36.3	0.0	0.0	43.9	28.3	74	54	-30.1	-25.7	V																																																
No other emission were detected above system noise floor																																																															
f	Measurement Frequency				Amp	Preamp Gain				Avg Lim Average Field Strength Limit																																																					
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit																																																				
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit																																																				
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit																																																				
CL	Cable Loss				HPF																																																										


7.4.2. RECEIVER ABOVE 1 GHz IN THE 5.8 GHz BAND

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																												
Test Engr: Vien Tran Date: 10/13/09 Project #: 09U12796 Company: Intel EUT Description: Intel® Centrino® Advanced-N 6200 (Tested Inside Of Lenovo ThinkPad X200/X201 Tablet Series) EUT M/N: 622ANHMW Test Target: FCC B Mode Oper: Rx in 5GHz Band_Worst-Case																																												
Test Equipment:																																												
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																
T60; S/N: 2238 @3m			T34 HP 8449B									RX RSS 210																																
Hi Frequency Cables																																												
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz																													
3' cable 22807700			12' cable 22807600			20' cable 22807500									Average Measurements RBW=1MHz ; VBW=10Hz																													
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																													
1.760	3.0	54.5	34.8	27.0	3.2	-37.2	0.0	0.0	47.5	27.8	74	54	-26.5	-26.2	V																													
2.400	3.0	48.6	30.9	28.0	3.8	-36.3	0.0	0.0	44.1	26.4	74	54	-29.9	-27.6	V																													
2.493	3.0	47.9	31.9	28.3	3.9	-36.3	0.0	0.0	43.8	27.8	74	54	-30.2	-26.2	V																													
1.440	3.0	57.2	36.3	25.9	2.9	-37.7	0.0	0.0	48.3	27.4	74	54	-25.7	-26.6	H																													
2.133	3.0	49.3	33.5	27.9	3.6	-36.7	0.0	0.0	44.1	28.3	74	54	-29.9	-25.7	H																													
2.493	3.0	49.0	32.2	28.3	3.9	-36.3	0.0	0.0	44.9	28.1	74	54	-29.1	-25.9	H																													
No other emission were detected above system noise floor																																												
<table><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																							
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																							
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																							
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																							
CL	Cable Loss	HPF	High Pass Filter																																									


7.5. WORST CASE BELOW 1 GHz

WISTRON ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

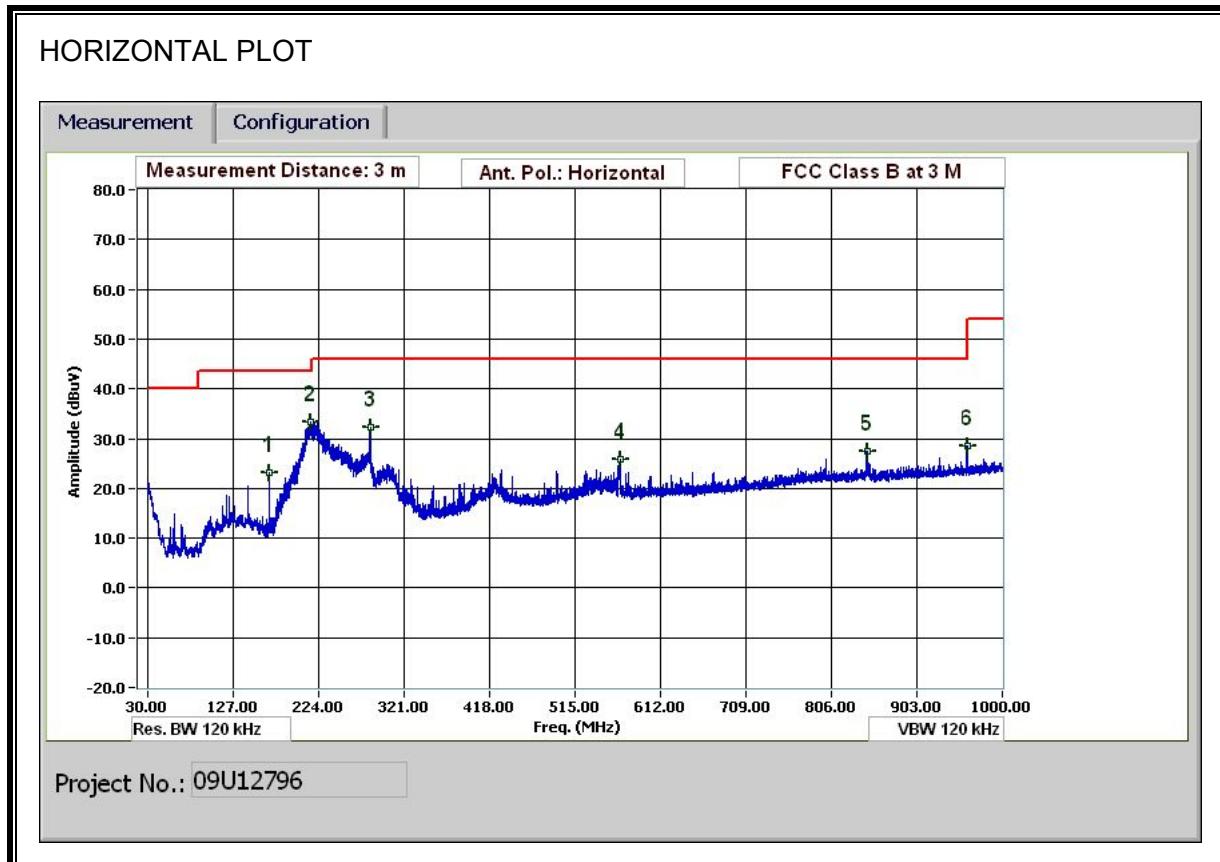

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

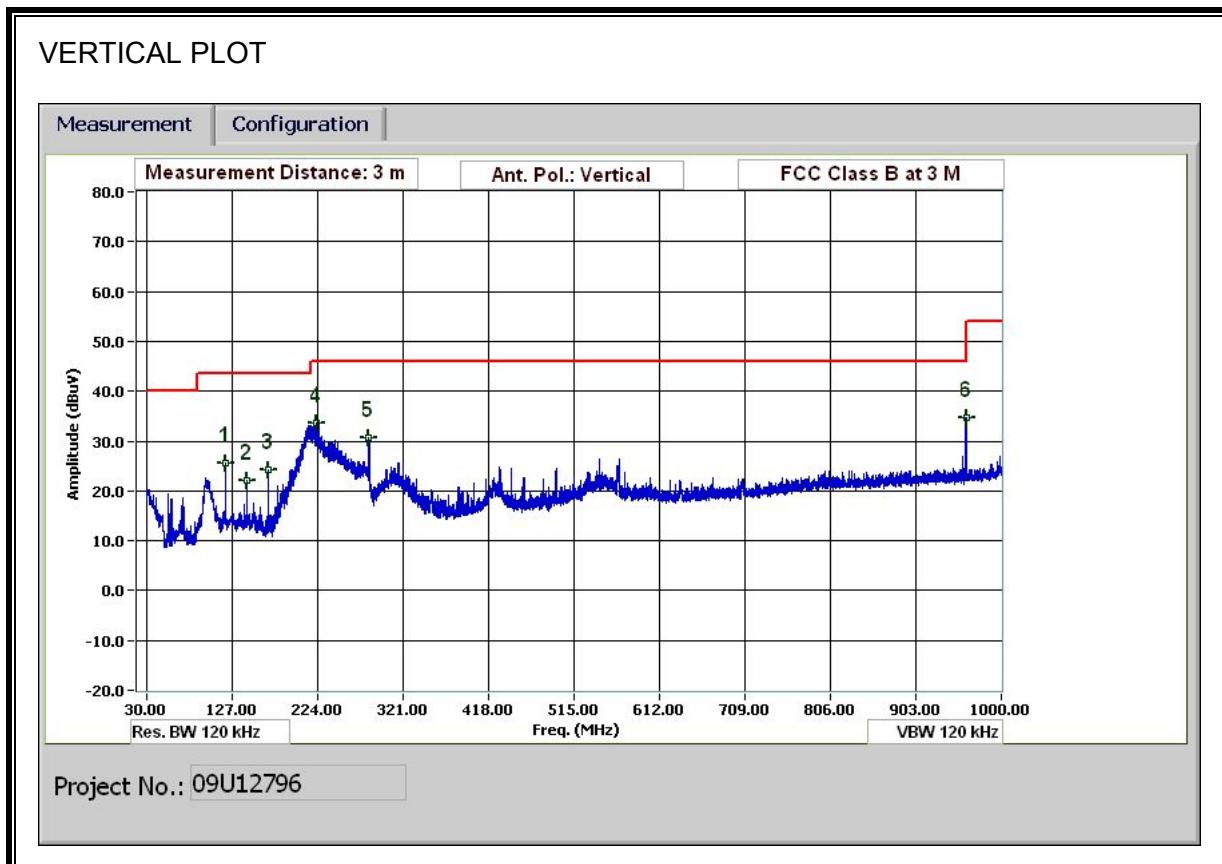


HORIZONTAL AND VERTICAL DATA


30-1000MHz Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																		
Test Engr:	MENGISTU MEKURIA																	
Date:	11/18/09																	
Project #:	09U12796																	
Company:	INTEL																	
EUT Description:	2x2 WLAN CARD N 6200 INSTALLED INSIDE LENOVO LAPTOP																	
EUT M/N:	WISTRON ANTENNA																	
Test Target:	FCC CLASS B																	
Mode Oper:	TX IN 2.4 GHz BAND																	
f	Measurement Frequency	Amp	Preamp Gain							Margin	Margin vs. Limit							
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters														
Read	Analyzer Reading	Filter		Filter Insert Loss														
AF	Antenna Factor	Corr.		Calculated Field Strength														
CL	Cable Loss	Limit		Field Strength Limit														
f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes					
120.004	3.0	40.3	13.7	1.0	29.5	0.0	0.0	25.5	43.5	-18.0	V	P						
144.005	3.0	37.4	13.0	1.1	29.3	0.0	0.0	22.1	43.5	-21.4	V	P						
168.006	3.0	42.0	10.3	1.2	29.3	0.0	0.0	24.2	43.5	-19.3	V	P						
221.888	3.0	49.2	11.9	1.4	28.9	0.0	0.0	33.6	46.0	-12.4	V	P						
282.130	3.0	45.0	12.8	1.5	28.8	0.0	0.0	30.5	46.0	-15.5	V	P						
959.918	3.0	37.9	22.2	3.1	28.5	0.0	0.0	34.8	46.0	-11.2	V	P						
168.006	3.0	41.0	10.3	1.2	29.3	0.0	0.0	23.2	43.5	-20.3	H	P						
215.648	3.0	48.8	11.9	1.3	28.9	0.0	0.0	33.3	43.5	-10.2	H	P						
283.090	3.0	46.7	12.8	1.5	28.8	0.0	0.0	32.2	46.0	-13.8	H	P						
566.182	3.0	35.4	17.8	2.3	29.7	0.0	0.0	25.8	46.0	-20.2	H	P						
846.274	3.0	32.2	21.2	2.9	28.9	0.0	0.0	27.5	46.0	-18.5	H	P						
959.918	3.0	31.7	22.2	3.1	28.5	0.0	0.0	28.6	46.0	-17.4	H	P						
Rev. 1.27.09																		
Note: No other emissions were detected above the system noise floor.																		

ACON ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

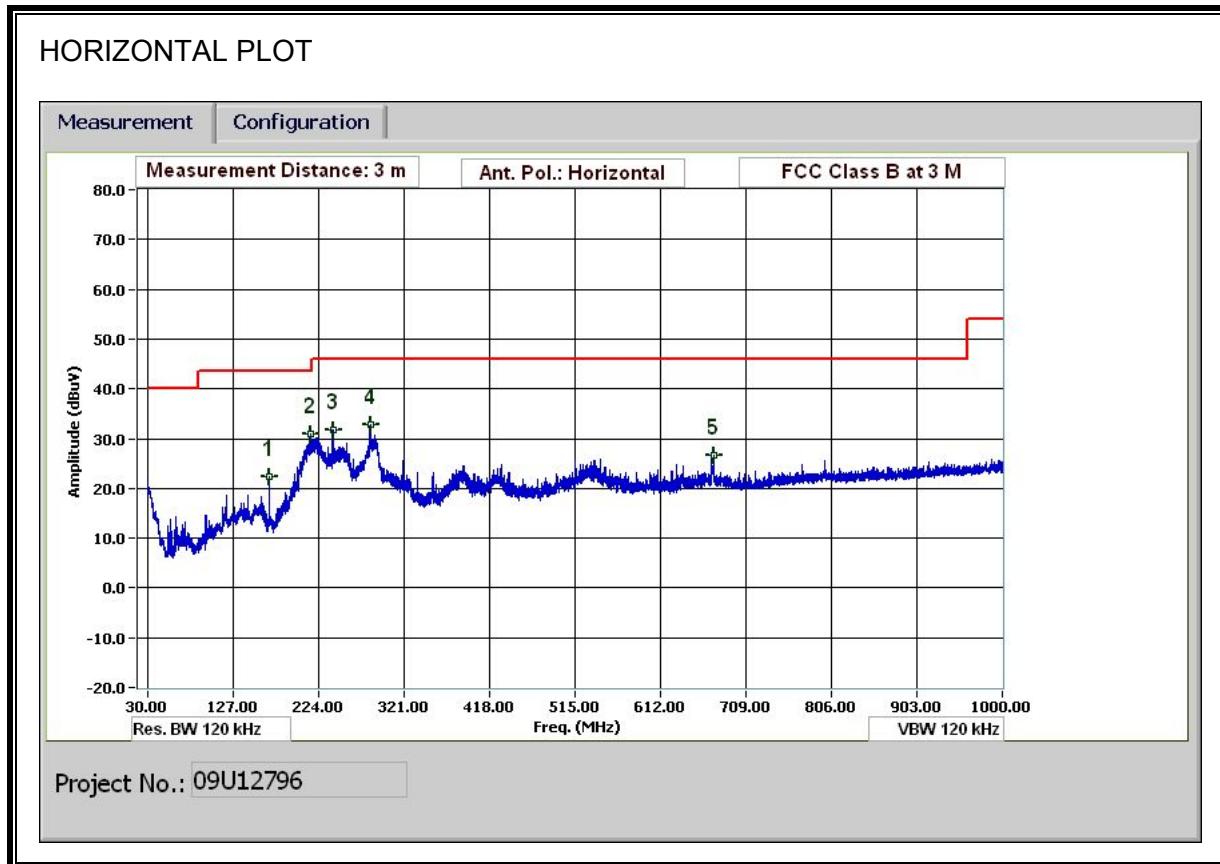

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

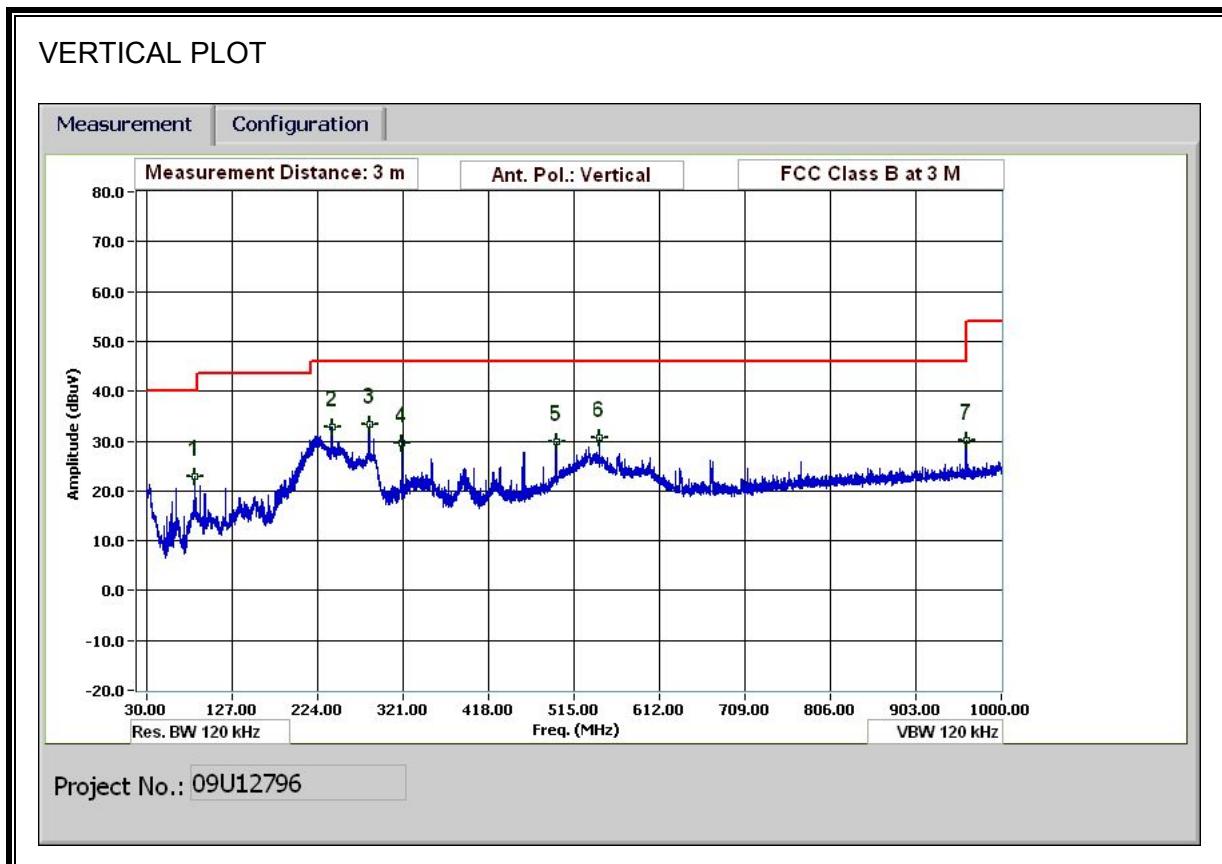

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																
Test Engr:	MENGISTU MEKURIA															
Date:	11/18/09															
Project #:	09U12796															
Company:	INTEL															
EUT Description:	2x2 WLAN CARD N 6200 INSTALLED INSIDE LENOVO LAPTOP															
EUT M/N:	ACON ANTENNA															
Test Target:	FCC CLASS B															
Mode Oper:	TX IN 5.8 GHz BAND															
f	Measurement Frequency	Amp	Preamp Gain							Margin	Margin vs. Limit					
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters												
Read	Analyzer Reading	Filter		Filter Insert Loss												
AF	Antenna Factor	Corr.		Calculated Field Strength												
CL	Cable Loss	Limit		Field Strength Limit												
f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes			
168.006	3.0	40.0	10.3	1.2	29.3	0.0	0.0	22.3	43.5	-21.2	H	P				
214.808	3.0	46.5	11.9	1.3	28.9	0.0	0.0	30.9	43.5	-12.6	H	P				
240.009	3.0	47.4	11.8	1.4	28.8	0.0	0.0	31.8	46.0	-14.2	H	P				
282.730	3.0	47.4	12.8	1.5	28.8	0.0	0.0	32.9	46.0	-13.1	H	P				
672.386	3.0	34.6	19.0	2.5	29.6	0.0	0.0	26.5	46.0	-19.5	H	P				
84.362	3.0	44.2	7.5	0.8	29.6	0.0	0.0	23.0	40.0	-17.0	V	P				
240.009	3.0	48.5	11.8	1.4	28.8	0.0	0.0	32.9	46.0	-13.1	V	P				
283.090	3.0	47.7	12.8	1.5	28.8	0.0	0.0	33.3	46.0	-12.7	V	P				
320.052	3.0	43.3	13.6	1.7	28.9	0.0	0.0	29.7	46.0	-16.3	V	P				
495.499	3.0	40.7	16.7	2.1	29.7	0.0	0.0	29.9	46.0	-16.1	V	P				
544.101	3.0	40.6	17.4	2.2	29.7	0.0	0.0	30.6	46.0	-15.4	V	P				
960.038	3.0	33.3	22.2	3.1	28.5	0.0	0.0	30.1	54.0	-23.9	V	P				
Rev. 1.27.09																
Note: No other emissions were detected above the system noise floor.																

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN_B AV	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.20	51.25	--	38.28	0.00	63.61	53.61	-12.36	-15.33	L1
0.27	45.58	--	33.85	0.00	61.15	51.15	-15.57	-17.30	L1
0.47	40.64	--	34.40	0.00	56.44	46.44	-15.80	-12.04	L1
0.20	52.67	--	37.85	0.00	63.57	53.57	-10.90	-15.72	L2
0.27	46.36	--	32.77	0.00	61.21	51.21	-14.85	-18.44	L2
0.47	39.99	--	31.50	0.00	56.44	46.44	-16.45	-14.94	L2
6 Worst Data									

LINE 1 RESULTS

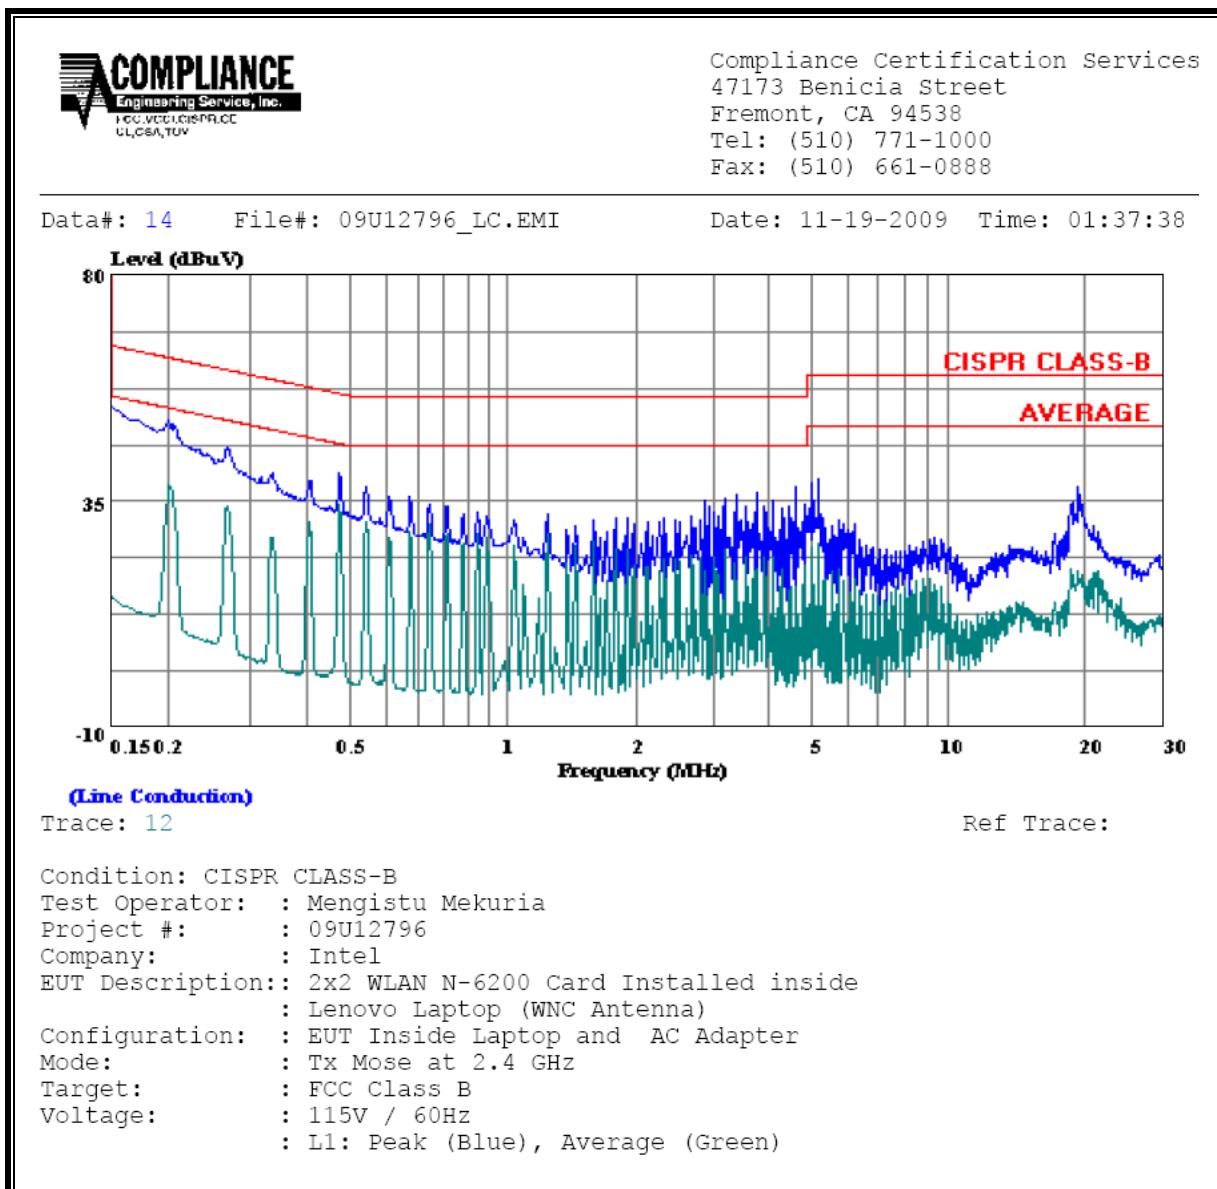

LINE 2 RESULTS

