



**AT4 wireless, S.A.**

Parque Tecnológico de Andalucía,  
c/ Severo Ochoa nº 2

29590 Campanillas/ Málaga/ España  
Tel. 952 61 91 00 - Fax 952 61 91 13

MÁLAGA, C.I.F. A29 507 456

Registro Mercantil de Málaga, Tomo 1169,  
Libro 82, Folio 133, Hoja MA3729

## TEST REPORT (MODIFICATION 1)

### REFERENCE STANDARDS:

FCC 47CFR Part 2.1093 (10-1-11 Edition)

FCC OET Bulletin 65, Supplement C (Edition 01-01)

IC RSS-102 Issue 4 (2010-03)

|                                                    |                                                                                                                 |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| NIE..... :                                         | 37317RRF.001A1                                                                                                  |
| Approved by<br>(name / position & signature) ..... | A. Llamas / RF Lab Manager .....                                                                                |
| Elaboration date .....                             | 2012-10-24                                                                                                      |
| <b>Identification of item tested</b> .....         | Intel® Centrino® Advanced-N 6235 inside a host tablet                                                           |
| Trademark .....                                    | Intel                                                                                                           |
| Model and/or type reference .....                  | 6235ANHMW                                                                                                       |
| Serial number .....                                | MAC: C48508585A89                                                                                               |
| Other identification of the product .....          | FCC ID: PD96235ANHU / IC: 1000M-6235ANHU                                                                        |
| Features .....                                     | 802.11 a/b/g/n                                                                                                  |
| Description .....                                  | Wireless Module: Intel® Centrino® Advanced-N 6230<br>Antenna Type: WNC 81ELAG15.G02<br>Host platform: Dell P20S |
| <b>Applicant</b> .....                             | Intel Corporation                                                                                               |
| Address..... :                                     | 100 Center Point Circle, Suite 200, Columbia, SC 29210, USA                                                     |
| CIF/NIF/Passport..... :                            | ---                                                                                                             |
| Contact person:                                    | Steven C. Hackett (Wireless Regulatory Engineer)                                                                |
| Telephone / Fax .....                              | 803-216-2344                                                                                                    |
| e-mail: .....                                      | steven.c.hackett@intel.com                                                                                      |
| <b>Test samples supplier</b> .....                 | Same as applicant                                                                                               |
| <b>Manufacturer</b> .....                          | Same as applicant                                                                                               |

|                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test method requested</b> .....                                                                                                                                                               | See Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Standard</b> .....                                                                                                                                                                            | <ol style="list-style-type: none"> <li>1. FCC 47 CFR Part 2.1093 (10-1-11 Edition). Radiofrequency radiation exposure evaluation: portable devices.</li> <li>2. FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".</li> <li>3. IC RSS-102 Issue 4 (2010-03). Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)</li> </ol>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Application Notes</b> .....                                                                                                                                                                   | <ol style="list-style-type: none"> <li>1. FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised).</li> <li>2. FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers – Supplement to KDB 616217 (November 2009).</li> <li>3. FCC OET KDB 447498 D01 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009).</li> <li>4. FCC OET KDB 865664 – SAR Measurements Requirements for 3-6 GHz (October 2006).</li> <li>5. FCC OET KDB 450824 – SAR Probe Calibration and System Verification Considerations for measurements at 150 MHz – 3 GHz (January 2007).</li> <li>6. IC RSS-102 Supplementary Procedures (SPR)-001 (2011-01). SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (laptop mode/tablet mode).</li> </ol>                                                                                                                                                                                                                                                   |
| <b>Test procedure</b> .....                                                                                                                                                                      | PERF019                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Non-standardized test method</b> .....                                                                                                                                                        | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Used instrumentation</b> .....                                                                                                                                                                | <ol style="list-style-type: none"> <li>1. Dosimetric E-field probe SPEAG ES3DV3</li> <li>2. Dosimetric E-field probe SPEAG EX3DV4</li> <li>3. Data acquisition device SPEAG DAE4</li> <li>4. Electro-optical converter SPEAG EOC3</li> <li>5. 2450 MHz dipole validation kit SPEAG D2450V2</li> <li>6. 5GHz dipole validation kit SPEAG D5GHzV2</li> <li>7. Robot STÄUBLI RX60BL</li> <li>8. Robot controller STÄUBLI CM7MB</li> <li>9. Oval flat phantom SPEAG ELI 4</li> <li>10. SAR measurement software SPEAG DASY52 V52.8.2.969</li> <li>11. Measurement server SPEAG DASY5 SE UMS 011 BS</li> <li>12. Body Tissue Equivalent Liquids for 2450MHz and 5GHz bands</li> <li>13. Vector network analyzer Agilent E5071C</li> <li>14. Dielectric probe kit SPEAG DAK-3.5</li> <li>15. Power meter R&amp;S NRVD</li> <li>16. Power Sensor R&amp;S NRV-Z51</li> <li>17. Power Sensor R&amp;S NRV-Z1</li> <li>18. Vector signal analyzer R&amp;S FSQ8</li> <li>19. RF Generator Agilent ESG E4438C</li> <li>20. Dual directional coupler NARDA 4227-16</li> <li>21. Power amplifier MITEQ AMF-4D-00400600-50-30P</li> <li>22. Laptop positioning extension SPEAG Laptop Holder</li> </ol> |
| <b>Report template No.</b> .....                                                                                                                                                                 | FDT11_12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <p>IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## INDEX

|                                                 |    |
|-------------------------------------------------|----|
| Competences and guarantees .....                | 4  |
| General conditions .....                        | 4  |
| Uncertainty .....                               | 4  |
| Usage of samples.....                           | 5  |
| Testing period .....                            | 5  |
| Environmental conditions .....                  | 5  |
| Modifications to the reference test report..... | 5  |
| Summary .....                                   | 6  |
| Remarks and comments .....                      | 6  |
| Testing veredicts .....                         | 6  |
| APPENDIX A: Test Configuration.....             | 8  |
| APPENDIX B: Test results.....                   | 16 |
| APPENDIX C: Measurements Reports .....          | 28 |
| APPENDIX D: Calibration Data .....              | 45 |
| APPENDIX E: Photographs .....                   | 90 |

### **Competences and guarantees**

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 342.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

### **General conditions**

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

### **Uncertainty**

Uncertainty (factor  $k=2$ ) was calculated according to the following documents:

1. FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".
2. FCC OET KDB 865664 – SAR Measurements Requirements for 3-6 GHz (October 2006).

## Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

| <u>Control N°</u> | <u>Description</u>             | <u>Model</u>                                                           | <u>Serial N°</u>     | <u>Date of reception</u> |
|-------------------|--------------------------------|------------------------------------------------------------------------|----------------------|--------------------------|
| 37317/09          | WiFi module<br>inside a tablet | Intel® Centrino®<br>Advanced-N 6235 / Dell<br>P20S / WNC Slot Antennas | MAC:<br>C48508585A89 | 04/10/2012               |

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested".

## Testing period

The performed test started on 2012-10-04 and finished on 2012-10-16.

The tests have been performed at AT4 wireless.

## Environmental conditions

In the laboratory for measurements, the following limits were not exceeded during the test:

|                   |                                    |
|-------------------|------------------------------------|
| Temperature       | Min. = 22.27 °C<br>Max. = 25.96 °C |
| Relative humidity | Min. = 38.91 %<br>Max. = 60.05 %   |

## Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 37317RRF.001 related with the same samples, in the next clauses and sub-clauses:

| CLAUSES / SUB-CLAUSES | MODIFICATION                                                                                                             | JUSTIFICATION         |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Summary               | Included the reference to the minimum distance antenna to phantom for the maximum 1g averaged SAR found during this test | Data requested by TCB |

## Summary

Considering the results of the performed test according to FCC 47CFR Part 2.1093, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

The maximum 1g volume averaged SAR found during this test has been 0.854 W/kg, for the 5200 MHz band and 802.11n with 40MHz BW mode in Chain A with host device in secondary landscape position and direct contact to the phantom surface, providing an antenna to phantom distance of 10 mm.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, "USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS".

## Remarks and comments

1: 802.11n20 = 20MHz BW / 802.11n40 = 40MHz BW.

2: Testing of 802.11a, 802.11g, 802.11n20<sup>1</sup> or 802.11n40<sup>1</sup> is not required due to the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".

3: Testing of other channels in each band is optional when the maximum output channel SAR fulfills the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".

4: All the test positions of device relative to body were measured placing the device in direct contact with the phantom surface, so the requirements mentioned at RSS-102 Supplementary Procedures (SPR)-001 - SAR TESTING REQUIREMENTS WITH REGARD TO BYSTANDERS FOR LAPTOP TYPE COMPUTERS WITH ANTENNAS BUILT-IN ON DISPLAY SCREEN (LAPTOP MODE/TABLET MODE) are covered.

5: Only the plots of the highest SAR for each test configuration and each chain is included in appendix C, according to FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields", appendix B.

## Testing verdicts

Not applicable .....: NA

Pass.....: P

Fail: F

Not measured.....: NM

## 2450 MHz band

| FCC 47CFR Part 2.1093 Paragraph | VERDICT |   |   |                 |
|---------------------------------|---------|---|---|-----------------|
|                                 | NA      | P | F | NM              |
| (d)(2) 802.11b                  |         | P |   |                 |
| (d)(2) 802.11g                  |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n20 <sup>1</sup>   |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n40 <sup>1</sup>   |         |   |   | NM <sup>2</sup> |

1 and 2: See Remarks and Comments.

## 5.2 – 5.8 GHz band

| FCC 47CFR Part 2.1093 Paragraph | VERDICT |   |   |                 |
|---------------------------------|---------|---|---|-----------------|
|                                 | NA      | P | F | NM              |
| Lower Band (5.18 – 5.32 GHz)    |         |   |   |                 |
| (d)(2) 802.11a                  |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n20 <sup>1</sup>   |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n40 <sup>1</sup>   |         | P |   |                 |
| Middle Band (5.5 – 5.7 GHz)     |         |   |   |                 |
| (d)(2) 802.11a                  |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n20 <sup>1</sup>   |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n40 <sup>1</sup>   |         | P |   |                 |
| Higher Band (5.745 – 5.825 GHz) |         |   |   |                 |
| (d)(2) 802.11a                  |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n20 <sup>1</sup>   |         |   |   | NM <sup>2</sup> |
| (d)(2) 802.11n40 <sup>1</sup>   |         | P |   |                 |

1 and 2: See Remarks and Comments.

## **APPENDIX A: Test Configuration**



## INDEX

|                                                                   |    |
|-------------------------------------------------------------------|----|
| 1. GENERAL INTRODUCTION .....                                     | 10 |
| 1.1. Application Standard.....                                    | 10 |
| 1.2. General requirements .....                                   | 10 |
| 1.3. Measurement system and phantom requirements .....            | 10 |
| 1.4. Measurement Liquids requirements. ....                       | 10 |
| 2. MEASUREMENT SYSTEM.....                                        | 11 |
| 2.1. Measurement System.....                                      | 11 |
| 2.2. Test Positions of device relative to body <sup>4</sup> ..... | 12 |
| 2.3. Test to be performed .....                                   | 12 |
| 2.4. Description of interpolation/extrapolation scheme.....       | 12 |
| 2.5. Determination of the largest peak spatial-average SAR .....  | 12 |
| 2.6. System Validation .....                                      | 13 |
| 3. UNCERTAINTY .....                                              | 14 |
| 4. SAR LIMIT .....                                                | 15 |

## **1. GENERAL INTRODUCTION**

### **1.1. Application Standard**

The Federal Communications Commission (FCC) sets the limits for General Population / Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the user body under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

Specific requirements and procedure for SAR assessment are describe under FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields", and all the FCC OET Knowledge Database documents referred at the beginning of this document.

### **1.2. General requirements**

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/-2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

### **1.3. Measurement system and phantom requirements**

The measurement system used for SAR tests fulfils the procedural and technical requirements described at the reference standards used.

The phantom is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body.

### **1.4. Measurement Liquids requirements.**

The liquids used to simulate the human tissues, must fulfils the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 450824 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 2, of this document (the values for 5200 and 5600 MHz are linearly interpolated between the specified values for 3000 and 5800 MHz indicated in FCC OET Bulletin 65 – Supplement C, Appendix C, 'Tissue Dielectric Parameters').

As indicated in FCC OET KDB 450824, it is allowed a 5% variation of the above mentioned level at the 2450 MHz band. As indicated in FCC OET KDB 865664 – 'Measurements Requirements for 3-6 GHz', it is allowed a 10% and a 5% variation of permittivity and conductivity respectively at the 5200-5800 GHz band.

## 2. MEASUREMENT SYSTEM

### 2.1. Measurement System

| Manufacturer                    | Device                            | Type                       |
|---------------------------------|-----------------------------------|----------------------------|
| Schmid & Partner Engineering AG | Dosimetric E-Fiel Probe           | ES3DV3                     |
| Schmid & Partner Engineering AG | Dosimetric E-Fiel Probe           | EX3DV4                     |
| Schmid & Partner Engineering AG | Data Acquisition Electronics      | DAE4                       |
| Schmid & Partner Engineering AG | Electro-Optical Converter         | EOC5                       |
| Schmid & Partner Engineering AG | 2450 MHz System Validation Dipole | D2450V2                    |
| Schmid & Partner Engineering AG | 5GHz System Validation Dipole     | D5GHzV2                    |
| Stäubli                         | Robot                             | RX60BL                     |
| Stäubli                         | Robot controller                  | CM7MB                      |
| Schmid & Partner Engineering AG | Oval flat phantom                 | ELI 4                      |
| Schmid & Partner Engineering AG | Measurement Software              | DASY52<br>V52.8.2.969      |
| Schmid & Partner Engineering AG | Measurement Server                | DASY5 SE UMS<br>011 BS     |
| Agilent                         | Vector Network Analyser           | E5071C                     |
| Schmid & Partner Engineering AG | Dielectric Probe Kit              | DAK-3.5                    |
| Rohde & Schwarz                 | Power Meter                       | NRVD                       |
| Rohde & Schwarz                 | Power Sensor                      | NRV-Z51                    |
| Rohde & Schwarz                 | Power Sensor                      | NRV-Z1                     |
| Rohde & Schwarz                 | Vector Signal Analyzer            | FSQ8                       |
| Agilent                         | RF Generator                      | ESG E4438C                 |
| NARDA                           | Dual directional coupler          | 4227-16                    |
| MITEQ                           | Power amplifier                   | AMF-4D-00400600-<br>50-30P |
| Schmid & Partner Engineering AG | Laptop Holder                     | SM LH1 001 AC              |

**Table 1:** Measurement Equipment

## **2.2. Test Positions of device relative to body <sup>4</sup>**

The tablet device was tested in two different positions, as stated at FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009) paragraph 4) b):

- Lapheld: with the base in direct contact with the phantom, with the display folded on top of the keyboard section.
- Secondary Landscape: edge with the most conservative exposure condition for both the main and aux antenna at landscape configuration.

Further analysis was performed to determine the location which showed the highest SAR.

## **2.3. Test to be performed**

In all operating modes and bands the measurements have to be performed on the “default test channels” defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those channels defined as “required test channels” at the same document..

## **2.4. Description of interpolation/extrapolation scheme**

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantom’s surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with a proper spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning to within a 1mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5mm steps in both lateral directions, and 5mm in depth direction for the 2450MHz band. Over the 5GHz band, a 4mm lateral resolution is required, and 2.5mm in depth direction. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

## **2.5. Determination of the largest peak spatial-average SAR**

To determine the maximum value of the peak spatial-average SAR of a EUT, all device positions, configurations and operational modes should be tested for each frequency band.

According to FCC 47 CFR Part 2.1093, the averaging volume shall be chosen as 1 g of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the EUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

## **2.6. System Validation**

Prior to the SAR measurements, system verification is done daily to verify the system accuracy. As FCC OET Bulletin 65 – Supplement C, Appendix D “SAR measurement procedures” Paragraph “System Verification” specifies, a complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 100MHz of this channel.

The measured one-gram SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

### 3. UNCERTAINTY

#### Uncertainty for 300 MHz – 6 GHz

| ERROR SOURCES                                               | Uncertainty value (%)                         | Probability distribution | Divisor | (c <sub>i</sub> ) 1g | (c <sub>i</sub> ) 10g | Standard uncertainty (1g) (%) | Standard uncertainty (10g) (%) | V <sub>i</sub><br>V <sub>eff</sub> |
|-------------------------------------------------------------|-----------------------------------------------|--------------------------|---------|----------------------|-----------------------|-------------------------------|--------------------------------|------------------------------------|
| <b>Measurement Equipment</b>                                |                                               |                          |         |                      |                       |                               |                                |                                    |
| Probe Calibration                                           | ± 6.550                                       | Normal                   | 1       | 1                    | 1                     | ± 6.550                       | ± 6.550                        | ∞                                  |
| Isotropy                                                    | ± 7.558                                       | Rectangular              | √3      | 1                    | 1                     | ± 4.364                       | ± 4.364                        | ∞                                  |
| Boundary effect                                             | ± 2.000                                       | Rectangular              | √3      | 1                    | 1                     | ± 1.155                       | ± 1.155                        | ∞                                  |
| Linearity                                                   | ± 4.700                                       | Rectangular              | √3      | 1                    | 1                     | ± 2.714                       | ± 2.714                        | ∞                                  |
| System detection limits                                     | ± 0.250                                       | Rectangular              | √3      | 1                    | 1                     | ± 0.144                       | ± 0.144                        | ∞                                  |
| Readout electronics                                         | ± 0.300                                       | Normal                   | 1       | 1                    | 1                     | ± 0.300                       | ± 0.300                        | ∞                                  |
| Response time                                               | ± 0.000                                       | Rectangular              | √3      | 1                    | 1                     | ± 0.000                       | ± 0.000                        | ∞                                  |
| Integration time                                            | ± 1.900                                       | Rectangular              | √3      | 1                    | 1                     | ± 1.097                       | ± 1.097                        | ∞                                  |
| RF Ambient conditions – noise                               | ± 3.000                                       | Rectangular              | √3      | 1                    | 1                     | ± 1.732                       | ± 1.732                        | ∞                                  |
| RF Ambien conditions – reflections                          | ± 3.000                                       | Rectangular              | √3      | 1                    | 1                     | ± 1.732                       | ± 1.732                        | ∞                                  |
| Probe positioner mechanical tolerance                       | ± 0.400                                       | Rectangular              | √3      | 1                    | 1                     | ± 0.231                       | ± 0.231                        | ∞                                  |
| Probe positioning with respect to phantom shell             | ± 6.700                                       | Rectangular              | √3      | 1                    | 1                     | ± 3.868                       | ± 3.868                        | ∞                                  |
| Postprocessing                                              | ± 0.474                                       | Rectangular              | √3      | 1                    | 1                     | ± 0.273                       | ± 0.273                        | ∞                                  |
| <b>Test Sample Related</b>                                  |                                               |                          |         |                      |                       |                               |                                |                                    |
| Device positioning                                          | ± 2.900                                       | Normal                   | 1       | 1                    | 1                     | ± 2.900                       | ± 2.900                        | 11                                 |
| Device Holder                                               | ± 3.600                                       | Normal                   | 1       | 1                    | 1                     | ± 3.600                       | ± 3.600                        | 7                                  |
| Power Drift                                                 | ± 5.000                                       | Rectangular              | √3      | 1                    | 1                     | ± 2.887                       | ± 2.887                        | ∞                                  |
| <b>Phantom and Setup</b>                                    |                                               |                          |         |                      |                       |                               |                                |                                    |
| Phantom uncertainty                                         | ± 7.900                                       | Rectangular              | √3      | 1                    | 1                     | ± 4.561                       | ± 4.561                        | ∞                                  |
| Liquid conductivity (deviation from target)                 | ± 5.000                                       | Rectangular              | √3      | 0.64                 | 0.43                  | ± 1.848                       | ± 1.241                        | ∞                                  |
| Liquid conductivity (measurement error)                     | ± 3.350                                       | Normal                   | 1       | 0.64                 | 0.43                  | ± 2.144                       | ± 1.441                        | 5                                  |
| Liquid permittivity (deviation from target)                 | ± 5.000                                       | Rectangular              | √3      | 0.64                 | 0.43                  | ± 1.848                       | ± 1.241                        | ∞                                  |
| Liquid permittivity (measurement error)                     | ± 1.500                                       | Normal                   | 1       | 0.64                 | 0.43                  | ± 0.960                       | ± 0.645                        | 5                                  |
| <b>Combined standard uncertainty</b>                        | $u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$ |                          |         |                      |                       | ± 12.486                      | ± 12.212                       | 158                                |
| <b>Expanded uncertainty</b><br>(confidence interval of 95%) | $ue = 2.00 u_c$                               |                          |         |                      |                       | ± 24.972                      | ± 24.423                       |                                    |

**Table 2:** Uncertainty Assessment for 300 MHz - 6 GHz

## 4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR<sub>1 gr.</sub>) with the shape of a cube. This level couldn't exceed the values indicated in the application Standard:

| Standard                                   | SAR                  | SAR Limit (W/Kg) |
|--------------------------------------------|----------------------|------------------|
| FCC 47 CFR Part 2.1093<br>Paragraph (d)(2) | SAR <sub>1 gr.</sub> | 1.6              |

**Table 3:** SAR limit

## **APPENDIX B: Test results**



## INDEX

|        |                                                              |    |
|--------|--------------------------------------------------------------|----|
| 1.     | TEST CONDITIONS .....                                        | 18 |
| 1.1.   | Temperature (°C):.....                                       | 18 |
| 1.2.   | Test signal, Output Power and Frequencies.....               | 18 |
| 1.3.   | DUT information .....                                        | 18 |
| 2.     | TISSUE PARAMETERS MEASUREMENTS.....                          | 19 |
| 3.     | SYSTEM VALIDATION MEASUREMENTS .....                         | 19 |
| 3.1.   | Validation results in 2450 MHz Band for Body TSL.....        | 19 |
| 3.2.   | Validation results in 5200 MHz Band for Body TSL.....        | 19 |
| 3.3.   | Validation results in 5500 MHz Band for Body TSL.....        | 19 |
| 3.4.   | Validation results in 5800 MHz Band for Body TSL.....        | 19 |
| 4.     | CONDUCTED AVERAGE POWER MEASUREMENTS .....                   | 20 |
| 5.     | MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) ..... | 22 |
| 5.1.   | Summary maximum results.....                                 | 22 |
| 5.2.   | Results for 2450 MHz Band .....                              | 23 |
| 5.2.1. | Lapheld Mode.....                                            | 23 |
| 5.2.2. | Secondary Landscape Mode .....                               | 23 |
| 5.3.   | Results for 5200 MHz Band .....                              | 24 |
| 5.3.1. | Lapheld Mode.....                                            | 24 |
| 5.3.2. | Secondary Landscape Mode .....                               | 24 |
| 5.4.   | Results for 5600 MHz Band .....                              | 25 |
| 5.4.1. | Lapheld Mode.....                                            | 25 |
| 5.4.2. | Secondary Landscape Mode .....                               | 25 |
| 5.5.   | Results for 5800 MHz Band .....                              | 26 |
| 5.5.1. | Lapheld Mode.....                                            | 26 |
| 5.5.2. | Secondary Landscape Mode .....                               | 26 |
| 5.6.   | Simultaneous transmission considerations.....                | 27 |

## **1. TEST CONDITIONS**

### **1.1. Temperature (°C):**

$$T_n = +22.27 \text{ to } +25.96$$

The subscript n indicates normal test conditions.

### **1.2. Test signal, Output Power and Frequencies**

The device was put into operation by using an own control software to program the test mode required for select the continuous transmission with 100% duty cycle.

In all operating bands the measurements were performed on the “default test channels” defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those that fulfil the frequency channel selection criteria mentioned on paragraph “Frequency Channel Configuration” at the same document.

The output power of the device was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The maximum average conducted power of the device was measured with a Power meter R&S NRVD and a thermocoupled Power sensor NRV-Z51.

### **1.3. DUT information**

The device under test was the Intel® Centrino® Advanced-N 6235 card located inside a host laptop (Dell P20S) computer which utilises a set of WNC antennas (81ELAG15.G02). The card was operated utilizing proprietary software (DRTU version 1.5.7-0432) and each channel was measured using a broadband power meter to determine the maximum average power.

According to host device manufacturer, the source-based time-averaged output power of the Bluetooth device is far bellow the SAR threshold ( $60/f(\text{GHz})$  mW). Therefore, neither SAR testing nor co-transmission evaluation is required for the Bluetooth transmitter, following the guidelines stated at FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers – Supplement to KDB 616217 (November 2009), paragraph 4).

Collocation with WWAN transmitter has not been considered following grantee request because this collocation will be considered in the WWAN transmitter SAR testing.

## 2. TISSUE PARAMETERS MEASUREMENTS

| Frequency (MHz) | Target Body Tissue: Parameters used in Probe Calibration |                    | Target Body Tissue: Parameters used in Dipole Calibration |                    | Measured Body Tissue |                    | Measured Date |
|-----------------|----------------------------------------------------------|--------------------|-----------------------------------------------------------|--------------------|----------------------|--------------------|---------------|
|                 | Permittivity                                             | Conductivity [S/m] | Permittivity                                              | Conductivity [S/m] | Permittivity         | Conductivity [S/m] |               |
| 2450            | 52.7 ± 5%                                                | 1.95 ± 5%          | 51.8 ± 6%                                                 | 2.02 ± 6%          | 51.28                | 1.89               | 2012-10-15    |
| 5200            | 49.0 ± 10%                                               | 5.30 ± 5%          | 48.8 ± 6%                                                 | 5.45 ± 6%          | 49.20                | 5.11               | 2012-10-08    |
| 5500            | 48.6 ± 10%                                               | 5.65 ± 5%          | 48.2 ± 6%                                                 | 5.85 ± 6%          | 48.50                | 5.53               | 2012-10-08    |
| 5800            | 48.2 ± 10%                                               | 6.00 ± 5%          | 47.7 ± 6%                                                 | 6.27 ± 6%          | 47.86                | 5.97               | 2012-10-08    |

Note: The dielectric properties have been measured by the contact probe method at 24° C.

## 3. SYSTEM VALIDATION MEASUREMENTS

### 3.1. Validation results in 2450 MHz Band for Body TSL

| SAR    | Target SAR (W/kg) | Measured SAR (W/kg) | Drift (%) | Limit (%) |
|--------|-------------------|---------------------|-----------|-----------|
| 1 gr.  | 52.10             | 55.24               | 6.03      | ± 10      |
| 10 gr. | 24.40             | 25.00               | 2.46      | ± 10      |

### 3.2. Validation results in 5200 MHz Band for Body TSL

| SAR    | Target SAR (W/kg) | Measured SAR (W/kg) | Drift (%) | Limit (%) |
|--------|-------------------|---------------------|-----------|-----------|
| 1 gr.  | 76.40             | 71.10               | -6.94     | ± 10      |
| 10 gr. | 21.40             | 20.20               | -5.61     | ± 10      |

### 3.3. Validation results in 5500 MHz Band for Body TSL

| SAR    | Target SAR (W/kg) | Measured SAR (W/kg) | Drift (%) | Limit (%) |
|--------|-------------------|---------------------|-----------|-----------|
| 1 gr.  | 82.50             | 78.70               | -4.61     | ± 10      |
| 10 gr. | 23.00             | 22.10               | -3.91     | ± 10      |

### 3.4. Validation results in 5800 MHz Band for Body TSL

| SAR    | Target SAR (W/kg) | Measured SAR (W/kg) | Drift (%) | Limit (%) |
|--------|-------------------|---------------------|-----------|-----------|
| 1 gr.  | 77.10             | 71.92               | -6.72     | ± 10      |
| 10 gr. | 21.50             | 20.06               | -6.70     | ± 10      |

#### 4. CONDUCTED AVERAGE POWER MEASUREMENTS

| Band     | Mode                   | Channel | Frequency (MHz) | Conducted Power (dBm) |         |
|----------|------------------------|---------|-----------------|-----------------------|---------|
|          |                        |         |                 | Chain A               | Chain B |
| 2450 MHz | 802.11b                | 1       | 2412            | 16.63                 | 16.7    |
|          |                        | 6       | 2437            | 16.66                 | 14.98   |
|          |                        | 11      | 2462            | 16.60                 | 15.91   |
|          | 802.11g                | 1       | 2412            | 14.08                 | 14.02   |
|          |                        | 6       | 2437            | 16.61                 | 16.87   |
|          |                        | 11      | 2462            | 14.13                 | 13.37   |
|          | 802.11n20 <sup>1</sup> | 1       | 2417            | 13.18                 | 12.65   |
|          |                        | 6       | 2437            | 16.48                 | 16.68   |
|          |                        | 11      | 2457            | 12.68                 | 12.42   |
|          | 802.11n40 <sup>1</sup> | 3       | 2422            | 10.75                 | 9.35    |
|          |                        | 6       | 2437            | 13.74                 | 12.77   |
|          |                        | 9       | 2452            | 10.25                 | 10.11   |
| 5200 MHz | 802.11a                | 36      | 5180            | 16.07                 | 15.84   |
|          |                        | 48      | 5240            | 15.77                 | 15.87   |
|          |                        | 52      | 5260            | 15.70                 | 15.23   |
|          |                        | 64      | 5320            | 16.34                 | 15.73   |
|          | 802.11n20 <sup>1</sup> | 36      | 5180            | 15.99                 | 16.00   |
|          |                        | 48      | 5240            | 16.35                 | 15.73   |
|          |                        | 52      | 5260            | 15.91                 | 15.25   |
|          |                        | 64      | 5320            | 16.55                 | 15.58   |
|          | 802.11n40 <sup>1</sup> | 38      | 5190            | 12.70                 | 12.78   |
|          |                        | 46      | 5230            | 16.31                 | 15.85   |
|          |                        | 54      | 5270            | 15.82                 | 15.09   |
|          |                        | 62      | 5310            | 11.65                 | 12.27   |

1: See Remarks and Comments.

| Band     | Mode                   | Channel | Frequency (MHz) | Conducted Power (dBm) |         |
|----------|------------------------|---------|-----------------|-----------------------|---------|
|          |                        |         |                 | Chain A               | Chain B |
| 5600 MHz | 802.11a                | 100     | 5500            | 16.26                 | 15.41   |
|          |                        | 116     | 5580            | 16.50                 | 15.85   |
|          |                        | 140     | 5700            | 16.57                 | 15.66   |
|          | 802.11n20 <sup>1</sup> | 100     | 5500            | 16.45                 | 15.66   |
|          |                        | 116     | 5580            | 16.42                 | 15.71   |
|          |                        | 140     | 5700            | 16.16                 | 15.57   |
|          | 802.11n40 <sup>1</sup> | 102     | 5510            | 15.38                 | 14.88   |
|          |                        | 118     | 5590            | 16.63                 | 15.78   |
|          |                        | 134     | 5670            | 16.34                 | 15.54   |
| 5800 MHz | 802.11a                | 149     | 5745            | 16.60                 | 16.70   |
|          |                        | 157     | 5785            | 16.53                 | 16.76   |
|          |                        | 165     | 5825            | 16.47                 | 16.71   |
|          | 802.11n20 <sup>1</sup> | 149     | 5745            | 16.53                 | 16.67   |
|          |                        | 157     | 5785            | 16.46                 | 16.59   |
|          |                        | 165     | 5825            | 16.39                 | 16.64   |
|          | 802.11n40 <sup>1</sup> | 151     | 5755            | 16.44                 | 16.55   |
|          |                        | 159     | 5795            | 16.61                 | 16.49   |

1: See Remarks and Comments.

## 5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

### 5.1. Summary maximum results

| Band     | Chain | Mode                   | Channel | Frequency (MHz) | Measured SAR 1g (W/Kg) | SAR limit 1g (W/Kg) |
|----------|-------|------------------------|---------|-----------------|------------------------|---------------------|
| 2450 MHz | A     | 802.11b                | 11      | 2462            | 0.829                  | 1.6                 |
|          | B     | 802.11b                | 1       | 2412            | 0.750                  | 1.6                 |
| 5200 MHz | A     | 802.11n40 <sup>1</sup> | 46      | 5230            | 0.854                  | 1.6                 |
|          | B     | 802.11n40 <sup>1</sup> | 46      | 5230            | 0.680                  | 1.6                 |
| 5600 MHz | A     | 802.11n40 <sup>1</sup> | 102     | 5510            | 0.461                  | 1.6                 |
|          | B     | 802.11n40 <sup>1</sup> | 110     | 5550            | 0.622                  | 1.6                 |
| 5800 MHz | A     | 802.11n40 <sup>1</sup> | 159     | 5795            | 0.539                  | 1.6                 |
|          | B     | 802.11n40 <sup>1</sup> | 159     | 5795            | 0.340                  | 1.6                 |

1: See Remarks and Comments.

## 5.2. Results for 2450 MHz Band

### 5.2.1. Lapheld Mode

| Chain | Mode    | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|---------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11b | 1       | 2412            | NM <sup>3</sup>             | -               |
|       |         | 6       | 2437            | 0.121                       | 0.12            |
|       |         | 11      | 2462            | NM <sup>3</sup>             | -               |
| B     | 802.11b | 1       | 2412            | 0.125                       | 0.46            |
|       |         | 6       | 2437            | NM <sup>3</sup>             | -               |
|       |         | 11      | 2462            | NM <sup>3</sup>             | -               |

3: See Remarks and Comments.

### 5.2.2. Secondary Landscape Mode

| Chain | Mode    | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|---------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11b | 1       | 2412            | 0.562                       | -0.12           |
|       |         | 6       | 2437            | 0.746                       | 0.23            |
|       |         | 11      | 2462            | 0.829                       | -0.12           |
| B     | 802.11b | 1       | 2412            | 0.750                       | 0.46            |
|       |         | 6       | 2437            | 0.474                       | 0.12            |
|       |         | 11      | 2462            | 0.644                       | 0.81            |

### 5.3. Results for 5200 MHz Band

#### 5.3.1. Lapheld Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 38      | 5190            | NM <sup>3</sup>             | -               |
|       |                        | 46      | 5230            | 0.217                       | 0.35            |
|       |                        | 54      | 5270            | NM <sup>3</sup>             | -               |
|       |                        | 62      | 5310            | NM <sup>3</sup>             | -               |
| B     | 802.11n40 <sup>1</sup> | 38      | 5190            | NM <sup>3</sup>             | -               |
|       |                        | 46      | 5230            | 0.143                       | -1.49           |
|       |                        | 54      | 5270            | NM <sup>3</sup>             | -               |
|       |                        | 62      | 5310            | NM <sup>3</sup>             | -               |

1 and 3: See Remarks and Comments.

#### 5.3.2. Secondary Landscape Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 38      | 5190            | 0.468                       | 2.33            |
|       |                        | 46      | 5230            | 0.854                       | 0.23            |
|       |                        | 54      | 5270            | 0.676                       | 0.00            |
|       |                        | 62      | 5310            | 0.207                       | 3.28            |
| B     | 802.11n40 <sup>1</sup> | 38      | 5190            | 0.331                       | 1.86            |
|       |                        | 46      | 5230            | 0.680                       | 1.98            |
|       |                        | 54      | 5270            | 0.435                       | 4.59            |
|       |                        | 62      | 5310            | 0.168                       | 1.04            |

1: See Remarks and Comments.



## 5.4. Results for 5600 MHz Band

### 5.4.1. Lapheld Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 102     | 5510            | NM <sup>3</sup>             | -               |
|       |                        | 110     | 5550            | 0.0965                      | 1.86            |
|       |                        | 134     | 5670            | NM <sup>3</sup>             | -               |
| B     | 802.11n40 <sup>1</sup> | 102     | 5510            | NM <sup>3</sup>             | -               |
|       |                        | 110     | 5550            | 0.154                       | -1.03           |
|       |                        | 134     | 5670            | NM <sup>3</sup>             | -               |

1 and 3: See Remarks and Comments.

### 5.4.2. Secondary Landscape Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 102     | 5510            | 0.461                       | 3.87            |
|       |                        | 110     | 5550            | 0.431                       | 0.00            |
|       |                        | 134     | 5670            | 0.230                       | 1.16            |
| B     | 802.11n40 <sup>1</sup> | 102     | 5510            | 0.398                       | 1.16            |
|       |                        | 110     | 5550            | 0.622                       | 2.09            |
|       |                        | 134     | 5670            | 0.264                       | -2.05           |

1: See Remarks and Comments.

## 5.5. Results for 5800 MHz Band

### 5.5.1. Lapheld Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 151     | 5755            | NM <sup>3</sup>             | -               |
|       |                        | 159     | 5795            | 0.151                       | -1.94           |
| B     | 802.11n40 <sup>1</sup> | 151     | 5755            | 0.0844                      | 3.16            |
|       |                        | 159     | 5795            | NM <sup>3</sup>             | -               |

1 and 3: See Remarks and Comments.

### 5.5.2. Secondary Landscape Mode

| Chain | Mode                   | Channel | Frequency (MHz) | SAR averaged over 1g (W/Kg) | Power Drift (%) |
|-------|------------------------|---------|-----------------|-----------------------------|-----------------|
| A     | 802.11n40 <sup>1</sup> | 151     | 5755            | 0.363                       | -2.50           |
|       |                        | 159     | 5795            | 0.539                       | -1.94           |
| B     | 802.11n40 <sup>1</sup> | 151     | 5755            | 0.291                       | 0.69            |
|       |                        | 159     | 5795            | 0.340                       | 4.71            |

1: See Remarks and Comments.

## 5.6. Simultaneous transmission considerations

As stated at FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers – Supplement to KDB 616217 (November 2009), paragraph 4), the simultaneous SAR transmission evaluation is not required when:

1. The sum of stand-alone 1-g SAR is < SAR limit
- or
2. The separation distance between each antenna is greater than  $5 \cdot [(SAR_1 + SAR_2) / 1.6]^{1.5}$ .

The WLAN operation only admits the simultaneous transmission between antennas when both of them use the same channel, so the sum of stand-alone SAR was evaluated considering the highest result for each antenna and the corresponding value of the other one with the same channel.

| Transmission Mode      | Band    | Channel | Frequency | Chain | Max. SAR averaged over 1g (W/kg) | $\sum$ SAR <sub>i</sub> 1g (W/Kg) | SAR limit 1g (W/Kg) |
|------------------------|---------|---------|-----------|-------|----------------------------------|-----------------------------------|---------------------|
| 802.11b                | 2.4 GHz | 1       | 2412 MHz  | A     | 0.562                            | 1.312                             | 1.6                 |
|                        |         |         |           | B     | 0.750                            |                                   |                     |
|                        |         |         |           |       |                                  |                                   |                     |
| 802.11n40 <sup>1</sup> | 5.2 GHz | 46      | 5230 MHz  | A     | 0.854                            | 1.534                             | 1.6                 |
|                        |         |         |           | B     | 0.680                            |                                   |                     |

According to host device manufacturer, the source-based time-averaged output power of the Bluetooth device is far bellow the SAR threshold (60/f(GHz) mW). Therefore, neither SAR testing nor co-transmission evaluation is required for the Bluetooth transmitter, following the guidelines stated at FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers – Supplement to KDB 616217 (November 2009). paragraph 4).

Collocation with WWAN transmitter has not been considered following grantee request because this collocation will be considered in the WWAN transmitter SAR testing.

## **APPENDIX C: Measurements Reports**

## 2450 MHz Band, Lapheld – 802.11b. Channel 6 – Chain A

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.874$  mho/m;  $\epsilon_r = 51.309$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.09, 4.09, 4.09); Calibrated: 27/08/2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 2.4GHz - Lapheld/Chain A, 802.11b, 1Mbps, CH6/Area Scan (61x241x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.160 W/kg

**802.11 2.4GHz - Lapheld/Chain A, 802.11b, 1Mbps, CH6/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.749 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.300 mW/g


**SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.056 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.162 W/kg

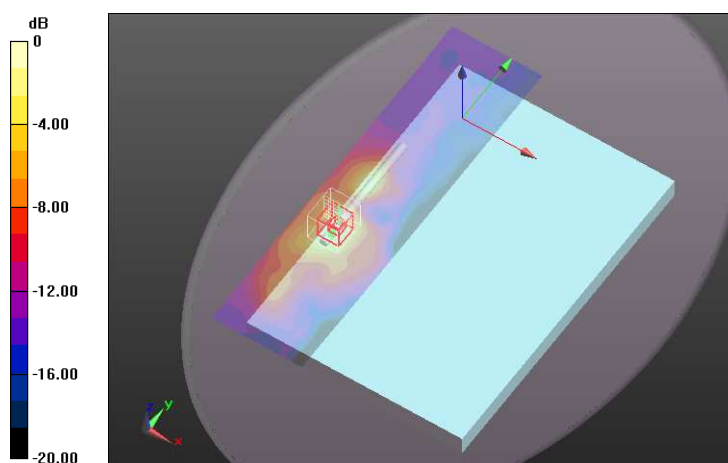

0 dB = 0.162 W/kg = -15.81 dB W/kg

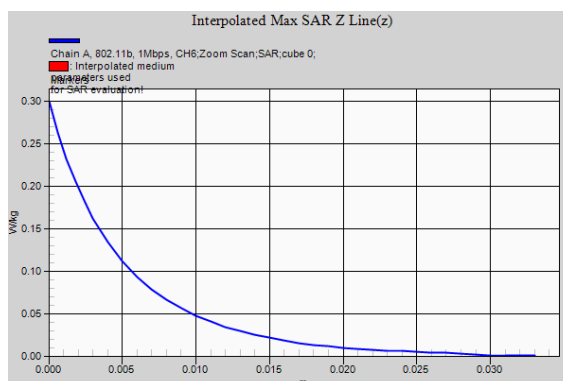

## 2450 MHz Band, Lapheld – 802.11b Channel 1 – Chain B

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.842$  mho/m;  $\epsilon_r = 51.374$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.09, 4.09, 4.09); Calibrated: 27/08/2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 2.4GHz - Lapheld/Chain B, 802.11b, 1Mbps, CH1/Area Scan (61x241x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.142 W/kg

**802.11 2.4GHz - Lapheld/Chain B, 802.11b, 1Mbps, CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.404 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.329 mW/g


**SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.056 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.172 W/kg

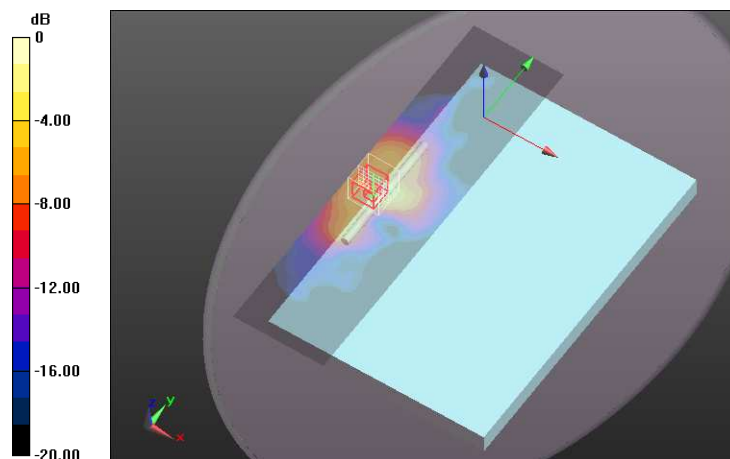

0 dB = 0.172 W/kg = -15.29 dB W/kg

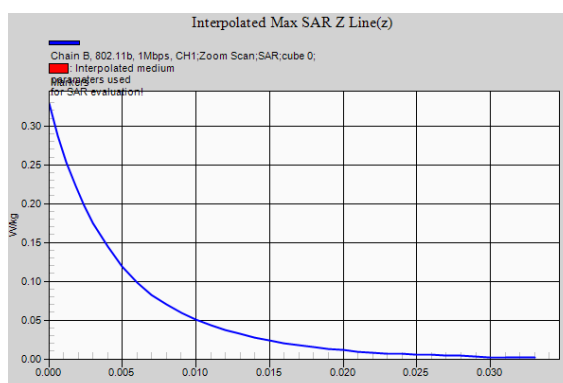

## 2450 MHz Band, Secondary Landscape – 802.11b. Channel 11 – Chain A

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.902$  mho/m;  $\epsilon_r = 51.254$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.09, 4.09, 4.09); Calibrated: 27/08/2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 2.4GHz - Secondary Landscape/Chain A, 802.11b, 1Mbps, CH11/Area Scan (41x241x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.32 W/kg

**802.11 2.4GHz - Secondary Landscape/Chain A, 802.11b, 1Mbps, CH11/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 23.970 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.989 mW/g


**SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.346 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 W/kg

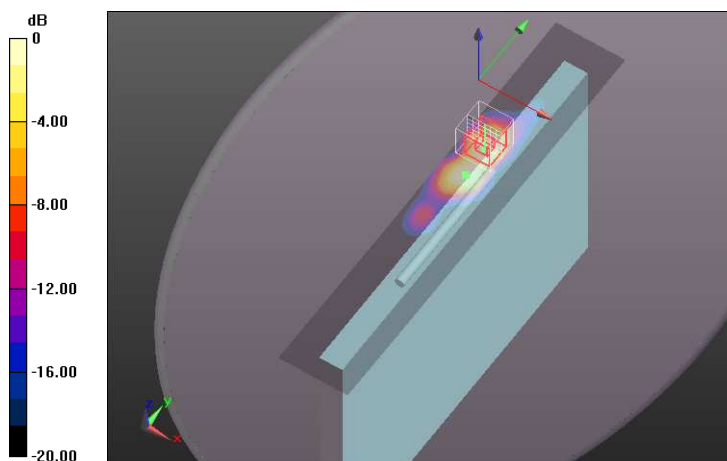

0 dB = 1.06 W/kg = 0.51 dB W/kg

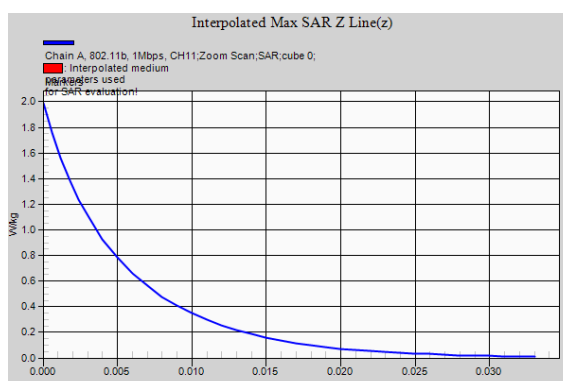

## **2450 MHz Band, Secondary Landscape – 802.11b. Channel 1 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.842$  mho/m;  $\epsilon_r = 51.374$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.09, 4.09, 4.09); Calibrated: 27/08/2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 2.4GHz - Secondary Landscape/Chain B, 802.11b, 1Mbps, CH1/Area Scan (41x241x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.42 W/kg

**802.11 2.4GHz - Secondary Landscape/Chain B, 802.11b, 1Mbps, CH1/Zoom Scan 2 (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.258 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.757 mW/g


**SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.326 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.937 W/kg

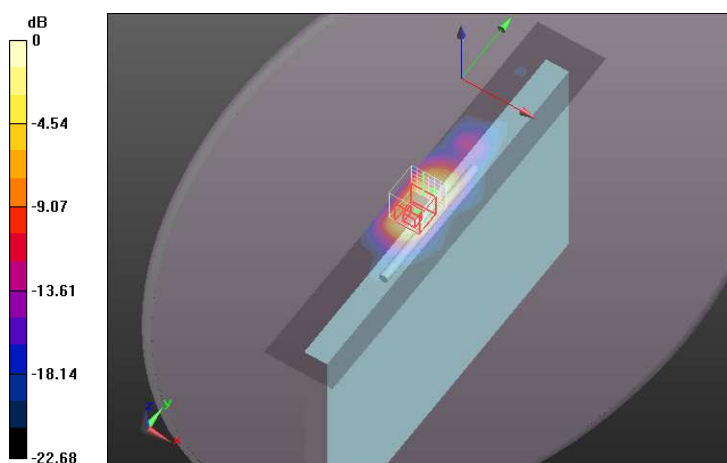

0 dB = 0.937 W/kg = -0.57 dB W/kg

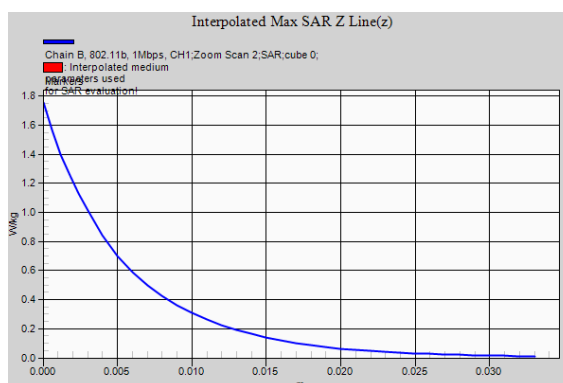



## **5200 MHz Band, Lapheld – 802.11n40 Channel 46 – Chain A**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.155$  mho/m;  $\epsilon_r = 49.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.37, 4.37, 4.37); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH46/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.429 W/kg

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH46/Zoom Scan (9x10x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.782 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.992 mW/g


**SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.071 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.462 W/kg

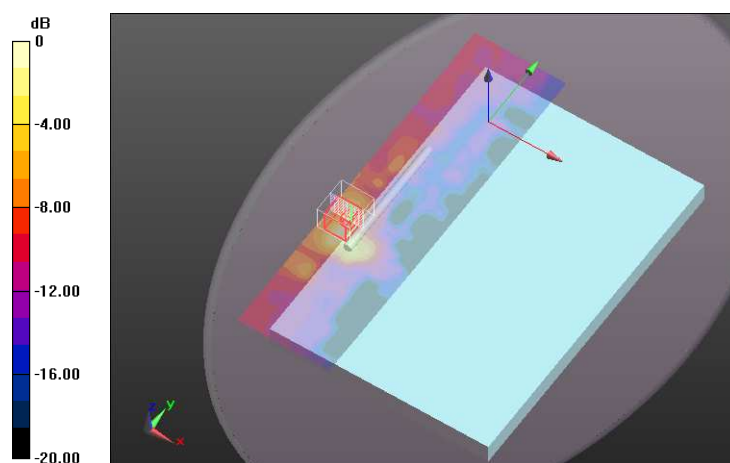

0 dB = 0.462 W/kg = -6.71 dB W/kg

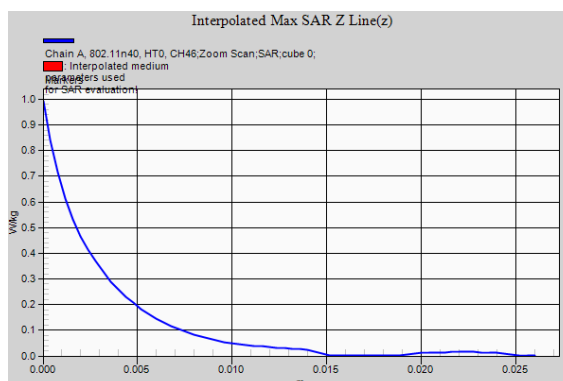

## 5200 MHz Band, Lapheld – 802.11n40 Channel 46 – Chain B

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.155$  mho/m;  $\epsilon_r = 49.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.37, 4.37, 4.37); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH46/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.292 W/kg

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH46/Zoom Scan (9x9x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.883 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.506 mW/g


**SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.060 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.248 W/kg

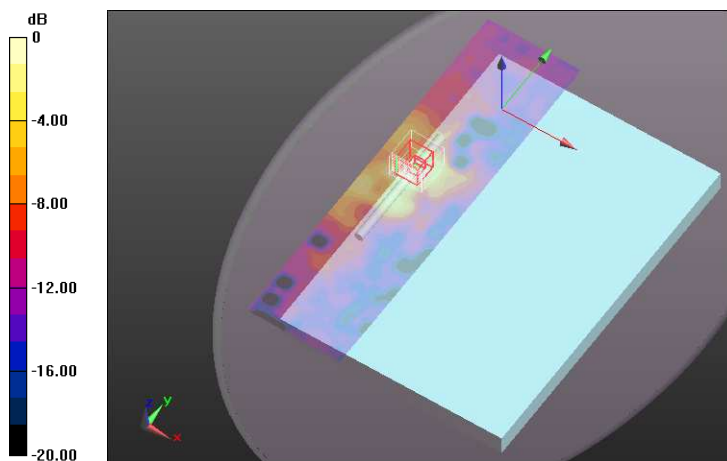

0 dB = 0.248 W/kg = -12.11 dB W/kg

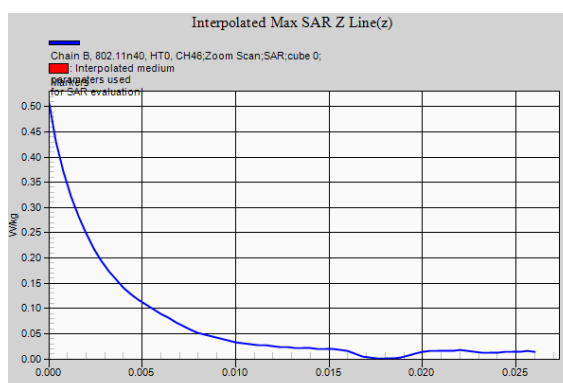

## 5200 MHz Band, Secondary Landscape – 802.11n40 Channel 46 – Chain A

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.155$  mho/m;  $\epsilon_r = 49.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.37, 4.37, 4.37); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH46/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.49 W/kg

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH46/Zoom Scan (8x8x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 17.34 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.940 mW/g


**SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.230 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.04 W/kg

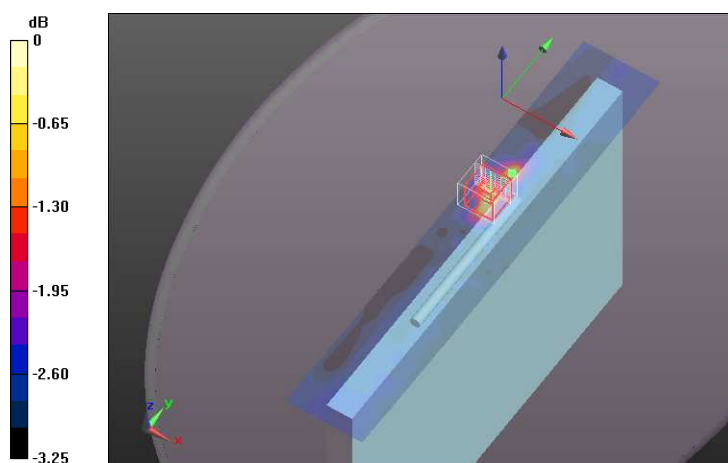

0 dB = 2.49 W/kg = 7.92 dB W/kg

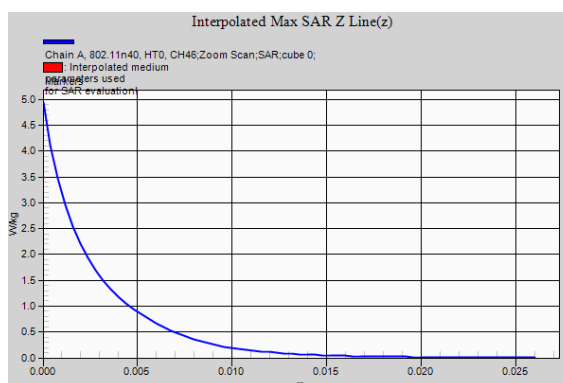

## **5200 MHz Band, Secondary Landscape – 802.11n40 Channel 46 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.155$  mho/m;  $\epsilon_r = 49.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.37, 4.37, 4.37); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH46/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.39 W/kg

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH46/Zoom Scan (8x9x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.883 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.740 mW/g


**SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.189 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 W/kg

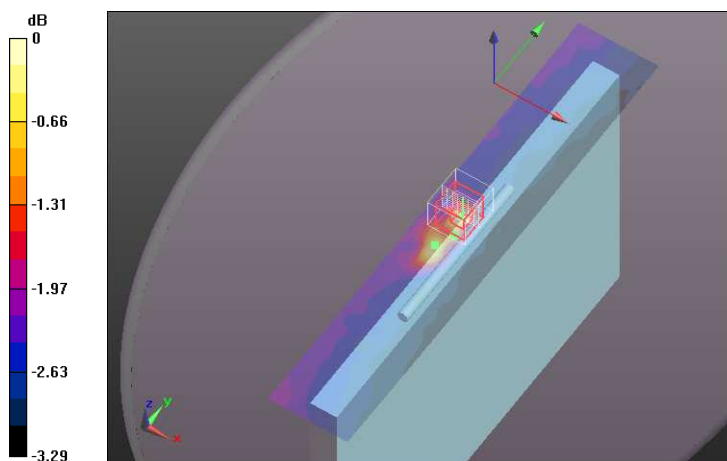

0 dB = 2.39 W/kg = 7.57 dB W/kg

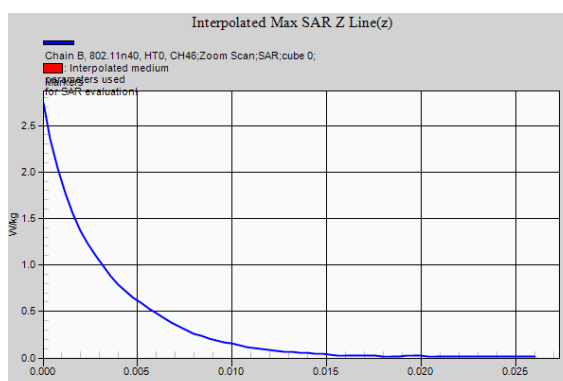

## **5600 MHz Band, Lapheld – 802.11n40 Channel 110 – Chain A**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5550$  MHz;  $\sigma = 5.605$  mho/m;  $\epsilon_r = 48.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.68, 3.68, 3.68); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH110/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.209 W/kg

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH110/Zoom Scan (9x11x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.068 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.315 mW/g


**SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.044 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.178 W/kg

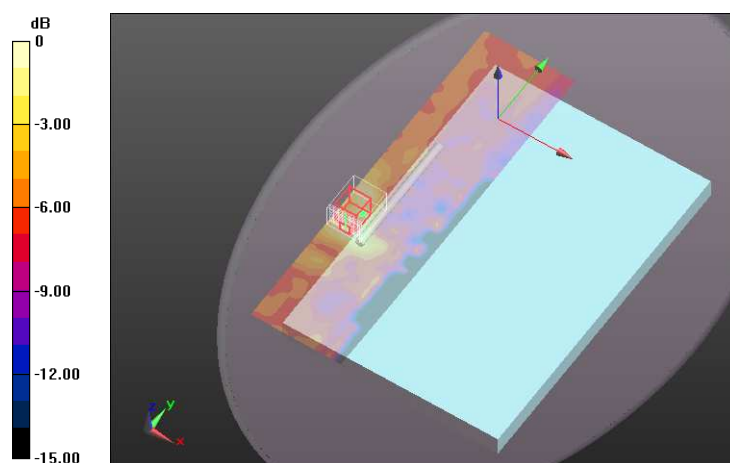

0 dB = 0.178 W/kg = -14.99 dB W/kg

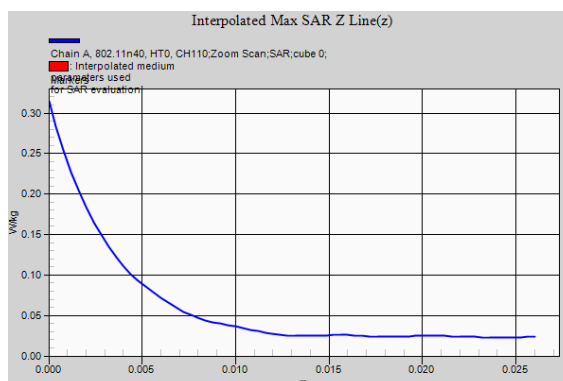

## **5600 MHz Band, Lapheld – 802.11n40 Channel 110 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5550$  MHz;  $\sigma = 5.605$  mho/m;  $\epsilon_r = 48.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.68, 3.68, 3.68); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH110/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.335 W/kg

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH110/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.123 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.488 mW/g


**SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.064 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.277 W/kg

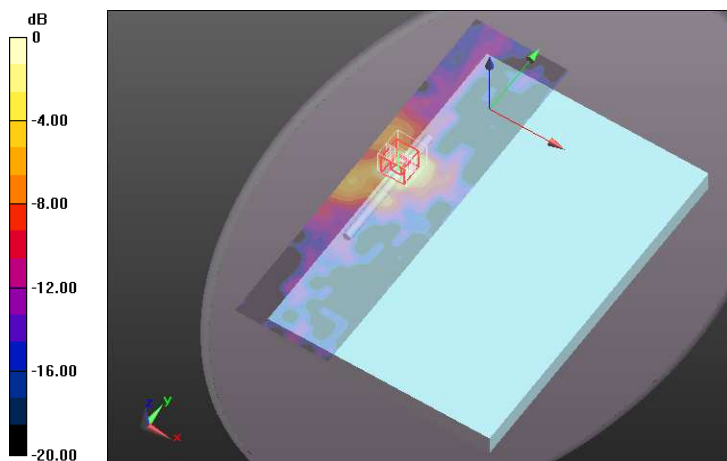

0 dB = 0.277 W/kg = -11.15 dB W/kg

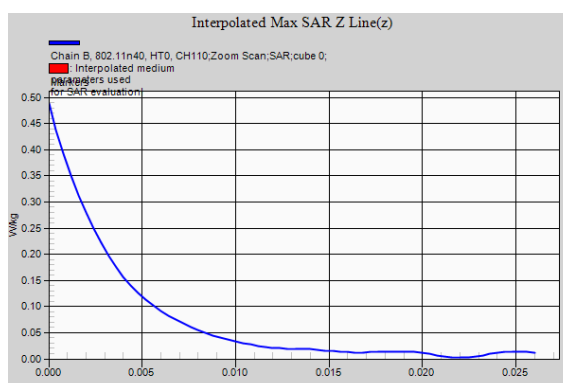

## 5600 MHz Band, Secondary Landscape – 802.11n40 Channel 102 – Chain A

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.545$  mho/m;  $\epsilon_r = 48.48$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.68, 3.68, 3.68); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH102/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.942 W/kg

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH102/Zoom Scan (9x9x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.459 V/m; Power Drift = 0.33 dB

Peak SAR (extrapolated) = 2.545 mW/g


**SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.140 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

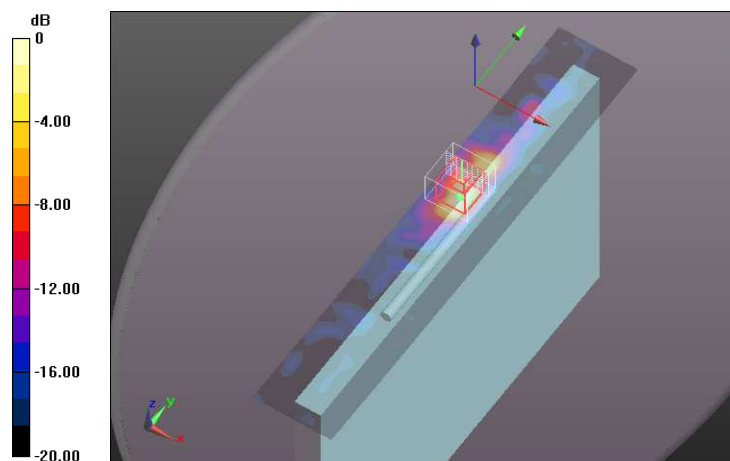

0 dB = 0.942 W/kg = -0.52 dB W/kg

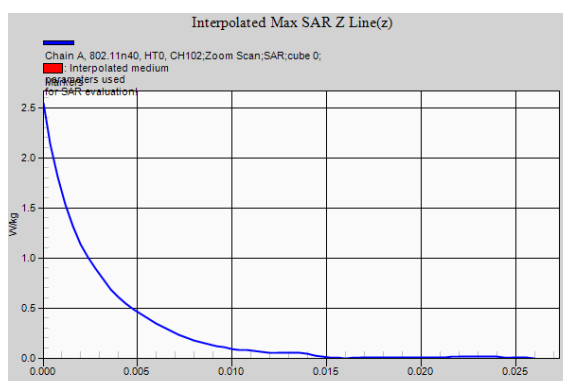



## **5600 MHz Band, Secondary Landscape – 802.11n40 Channel 110 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5550$  MHz;  $\sigma = 5.605$  mho/m;  $\epsilon_r = 48.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.68, 3.68, 3.68); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH110/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.13 W/kg

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH110/Zoom Scan (8x9x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.628 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.660 mW/g


**SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.183 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 W/kg

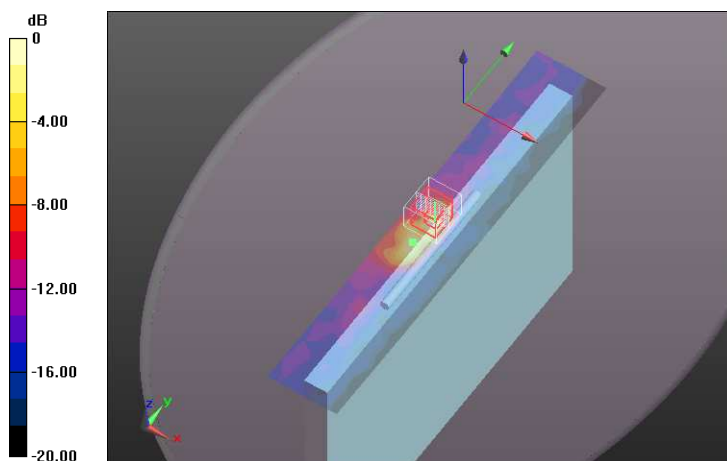

0 dB = 1.13 W/kg = 1.06 dB W/kg

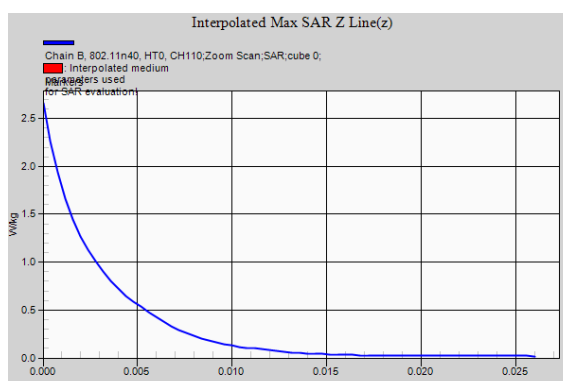



## **5800 MHz Band, Lapheld – 802.11n40 Channel 159 – Chain A**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 5.963$  mho/m;  $\epsilon_r = 47.867$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.88, 3.88, 3.88); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH159/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.263 W/kg

**802.11 5GHz - Lapheld/Chain A, 802.11n40, HT0, CH159/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.785 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.611 mW/g


**SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.061 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.284 W/kg

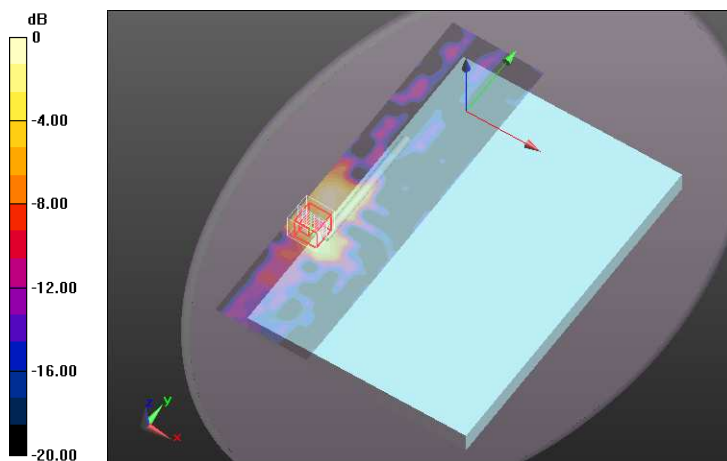

0 dB = 0.263 W/kg = -11.60 dB W/kg

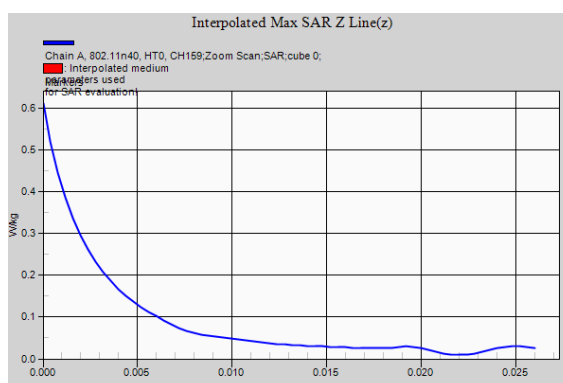

## **5800 MHz Band, Lapheld – 802.11n40 Channel 151 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5755$  MHz;  $\sigma = 5.903$  mho/m;  $\epsilon_r = 47.95$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.88, 3.88, 3.88); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH151/Area Scan (91x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.191 W/kg

**802.11 5GHz - Lapheld/Chain B, 802.11n40, HT0, CH151/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.516 V/m; Power Drift = 0.27 dB

Peak SAR (extrapolated) = 0.296 mW/g


**SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.030 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.158 W/kg

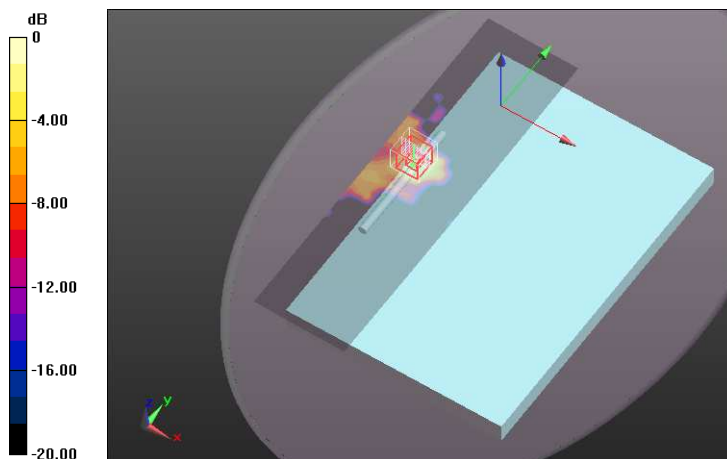

0 dB = 0.191 W/kg = -14.38 dB W/kg

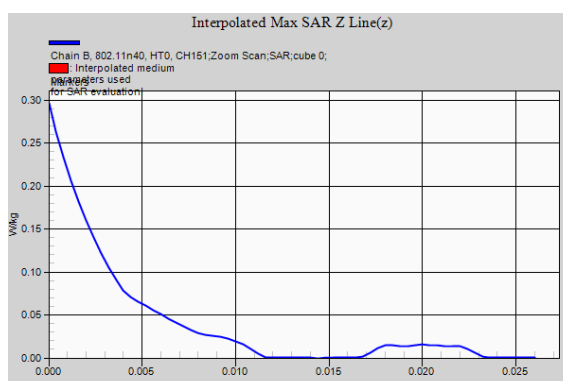

## **5800 MHz Band, Secondary Landscape – 802.11n40 Channel 159 – Chain A**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 5.963$  mho/m;  $\epsilon_r = 47.867$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.88, 3.88, 3.88); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH159/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.13 W/kg

**802.11 5GHz - Secondary Landscape/Chain A, 802.11n40, HT0, CH159/Zoom Scan (8x10x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.724 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.909 mW/g


**SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.168 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.24 W/kg

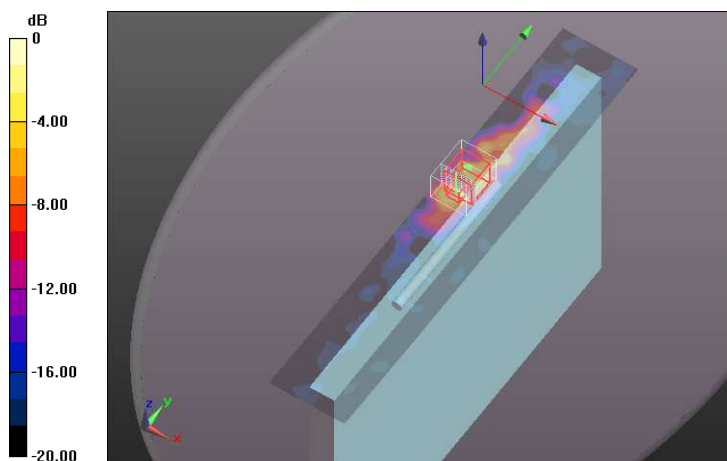

0 dB = 1.13 W/kg = 1.06 dB W/kg

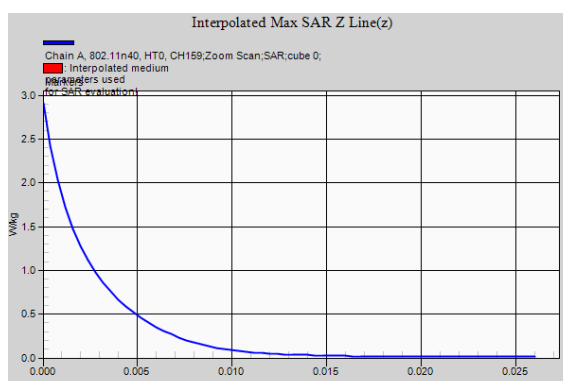

## **5800 MHz Band, Secondary Landscape – 802.11n40 Channel 159 – Chain B**

**DUT: Dell P20S + Intel 6235ANHMW + WNC Slot; Type: Tablet; Serial: -**

Communication System: IEEE 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 5.963$  mho/m;  $\epsilon_r = 47.867$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.88, 3.88, 3.88); Calibrated: 27/08/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 24/08/2012
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH159/Area Scan (61x351x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.689 W/kg

**802.11 5GHz - Secondary Landscape/Chain B, 802.11n40, HT0, CH159/Zoom Scan 2 (8x8x13)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.779 V/m; Power Drift = 0.4 dB

Peak SAR (extrapolated) = 1.774 mW/g


**SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.096 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.752 W/kg

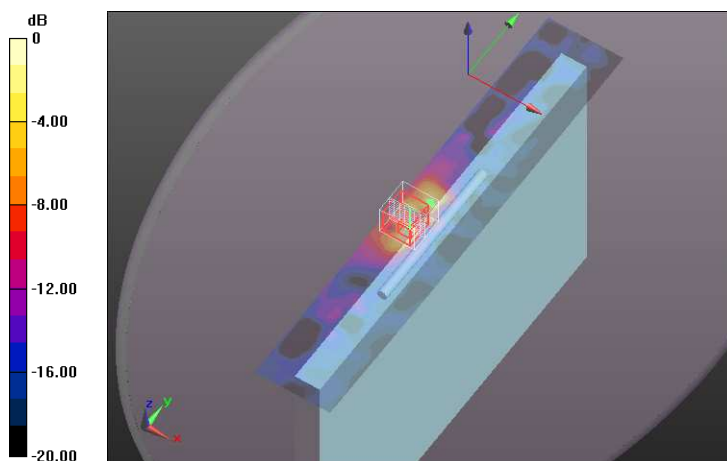

0 dB = 0.689 W/kg = -3.24 dB W/kg

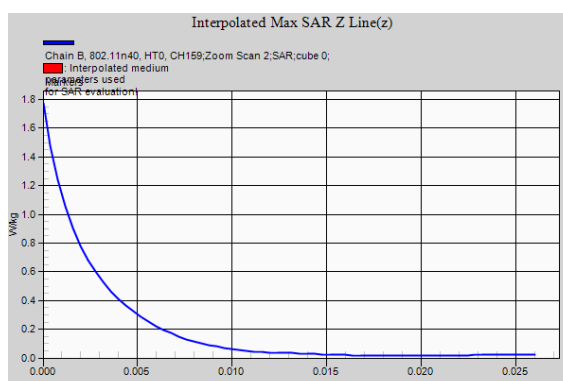

## **APPENDIX D: Calibration Data**

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 Wireless**

Certificate No: **ES3-3052\_Aug12**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3052**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4  
 Calibration procedure for dosimetric E-field probes**



Calibration date: **August 27, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 29-Mar-12 (No. 217-01508)         | Apr-13                 |
| Power sensor E4412A        | MY41498087      | 29-Mar-12 (No. 217-01508)         | Apr-13                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 27-Mar-12 (No. 217-01531)         | Apr-13                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 27-Mar-12 (No. 217-01529)         | Apr-13                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 27-Mar-12 (No. 217-01532)         | Apr-13                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-11 (No. ES3-3013_Dec11)    | Dec-12                 |
| DAE4                       | SN: 660         | 20-Jun-12 (No. DAE4-660_Jun12)    | Jun-13                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-11)  | In house check: Apr-13 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

|                                                                                                                 | Name           | Function              | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Jeton Kastrati | Laboratory Technician |  |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |  |
| Issued: August 27, 2012                                                                                         |                |                       |                                                                                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |                                                                                       |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C                  | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 – SN:3052

August 27, 2012

# Probe ES3DV3

## SN:3052

Manufactured: September 30, 2003  
Calibrated: August 27, 2012

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



ES3DV3- SN:3052

August 27, 2012

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3052

### Basic Calibration Parameters

|                                       | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|---------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu V/(V/m)^2$ ) <sup>A</sup> | 1.11     | 1.17     | 1.15     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                 | 104.3    | 100.9    | 105.1    |               |

### Modulation Calibration Parameters

| UID   | Communication System Name                     | PAR   |   | A<br>dB | B<br>dB | C<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|-----------------------------------------------|-------|---|---------|---------|---------|----------|---------------------------|
| 0     | CW                                            | 0.00  | X | 0.00    | 0.00    | 1.00    | 143.1    | $\pm 2.5 \%$              |
|       |                                               |       | Y | 0.00    | 0.00    | 1.00    | 146.4    |                           |
|       |                                               |       | Z | 0.00    | 0.00    | 1.00    | 141.4    |                           |
| 10011 | UMTS-FDD (WCDMA)                              | 2.91  | X | 3.37    | 67.4    | 18.7    | 111.5    | $\pm 0.5 \%$              |
|       |                                               |       | Y | 3.16    | 65.8    | 17.9    | 115.4    |                           |
|       |                                               |       | Z | 3.51    | 68.7    | 19.7    | 109.7    |                           |
| 10012 | IEEE 802.11g WiFi 2.4 GHz (DSSS, 1 Mbps)      | 1.87  | X | 3.33    | 70.6    | 19.5    | 112.2    | $\pm 0.7 \%$              |
|       |                                               |       | Y | 3.27    | 69.8    | 19.1    | 117.8    |                           |
|       |                                               |       | Z | 4.16    | 75.7    | 22.1    | 110.6    |                           |
| 10013 | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | 9.47  | X | 10.65   | 69.1    | 22.2    | 106.2    | $\pm 2.2 \%$              |
|       |                                               |       | Y | 11.32   | 71.0    | 23.6    | 112.1    |                           |
|       |                                               |       | Z | 10.50   | 68.9    | 22.3    | 102.9    |                           |
| 10021 | GSM-FDD (TDMA, GMSK)                          | 9.40  | X | 19.25   | 94.5    | 26.4    | 128.0    | $\pm 2.5 \%$              |
|       |                                               |       | Y | 26.28   | 99.5    | 28.5    | 149.6    |                           |
|       |                                               |       | Z | 14.79   | 90.8    | 24.9    | 118.8    |                           |
| 10023 | GPRS-FDD (TDMA, GMSK, TN 0)                   | 9.57  | X | 16.98   | 93.0    | 26.3    | 112.3    | $\pm 1.9 \%$              |
|       |                                               |       | Y | 26.67   | 99.6    | 28.6    | 142.2    |                           |
|       |                                               |       | Z | 24.68   | 99.8    | 27.9    | 146.8    |                           |
| 10024 | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | 6.56  | X | 38.53   | 99.7    | 25.2    | 149.8    | $\pm 1.7 \%$              |
|       |                                               |       | Y | 37.23   | 99.5    | 25.8    | 117.7    |                           |
|       |                                               |       | Z | 38.17   | 99.5    | 24.7    | 139.3    |                           |
| 10025 | EDGE-FDD (TDMA, 8PSK, TN 0)                   | 12.62 | X | 16.14   | 99.6    | 37.6    | 109.5    | $\pm 4.6 \%$              |
|       |                                               |       | Y | 17.18   | 99.5    | 37.5    | 141.3    |                           |
|       |                                               |       | Z | 13.02   | 95.0    | 36.0    | 101.1    |                           |
| 10026 | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | 9.55  | X | 11.85   | 89.0    | 30.4    | 101.6    | $\pm 2.5 \%$              |
|       |                                               |       | Y | 18.30   | 99.2    | 34.7    | 117.0    |                           |
|       |                                               |       | Z | 17.23   | 99.3    | 34.4    | 140.5    |                           |
| 10027 | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | 4.80  | X | 46.53   | 99.5    | 23.7    | 114.4    | $\pm 2.2 \%$              |
|       |                                               |       | Y | 46.34   | 100.0   | 24.3    | 128.9    |                           |
|       |                                               |       | Z | 35.52   | 99.4    | 24.1    | 105.7    |                           |
| 10028 | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | 3.55  | X | 50.85   | 99.7    | 22.9    | 120.5    | $\pm 2.2 \%$              |
|       |                                               |       | Y | 52.47   | 99.6    | 23.1    | 137.8    |                           |
|       |                                               |       | Z | 42.03   | 99.6    | 22.9    | 114.6    |                           |
| 10029 | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | 7.78  | X | 9.53    | 84.0    | 27.2    | 114.0    | $\pm 1.9 \%$              |
|       |                                               |       | Y | 20.00   | 100.0   | 33.3    | 132.0    |                           |
|       |                                               |       | Z | 10.32   | 87.5    | 29.0    | 107.9    |                           |

ES3DV3- SN:3052

August 27, 2012

|       |                                             |       |   |       |      |      |       |        |
|-------|---------------------------------------------|-------|---|-------|------|------|-------|--------|
| 10048 | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)   | 13.80 | X | 8.18  | 81.2 | 25.1 | 67.0  | ±1.7 % |
|       |                                             |       | Y | 18.50 | 99.3 | 32.7 | 117.7 |        |
|       |                                             |       | Z | 7.48  | 81.1 | 24.9 | 63.5  |        |
| 10049 | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | 10.79 | X | 14.91 | 90.2 | 25.9 | 144.3 | ±1.4 % |
|       |                                             |       | Y | 19.61 | 95.0 | 28.1 | 134.9 |        |
|       |                                             |       | Z | 19.58 | 96.5 | 27.8 | 134.5 |        |
| 10058 | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)           | 6.53  | X | 8.93  | 83.5 | 26.3 | 117.9 | ±1.4 % |
|       |                                             |       | Y | 19.65 | 99.7 | 32.3 | 138.0 |        |
|       |                                             |       | Z | 12.98 | 92.7 | 30.0 | 115.3 |        |
| 10098 | UMTS-FDD (HSUPA, Subtest 2)                 | 3.98  | X | 4.56  | 66.5 | 18.5 | 111.8 | ±0.7 % |
|       |                                             |       | Y | 4.56  | 66.3 | 18.5 | 124.3 |        |
|       |                                             |       | Z | 4.62  | 67.1 | 19.0 | 110.8 |        |
| 10100 | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)    | 5.66  | X | 6.24  | 66.8 | 19.3 | 116.1 | ±1.2 % |
|       |                                             |       | Y | 6.53  | 67.8 | 20.0 | 131.0 |        |
|       |                                             |       | Z | 6.27  | 67.1 | 19.6 | 115.7 |        |
| 10101 | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)  | 6.41  | X | 7.32  | 67.2 | 19.7 | 124.5 | ±1.2 % |
|       |                                             |       | Y | 7.65  | 68.2 | 20.5 | 140.3 |        |
|       |                                             |       | Z | 7.36  | 67.5 | 20.0 | 123.0 |        |
| 10102 | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)  | 6.59  | X | 7.61  | 67.4 | 20.0 | 126.4 | ±1.4 % |
|       |                                             |       | Y | 7.94  | 68.5 | 20.7 | 142.7 |        |
|       |                                             |       | Z | 7.64  | 67.7 | 20.2 | 125.1 |        |
| 10108 | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | 5.79  | X | 6.08  | 66.2 | 19.1 | 113.9 | ±1.2 % |
|       |                                             |       | Y | 6.40  | 67.4 | 19.9 | 129.1 |        |
|       |                                             |       | Z | 6.16  | 66.7 | 19.5 | 114.0 |        |
| 10109 | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | 6.42  | X | 7.07  | 66.8 | 19.6 | 121.8 | ±1.2 % |
|       |                                             |       | Y | 7.44  | 68.1 | 20.5 | 137.8 |        |
|       |                                             |       | Z | 7.16  | 67.3 | 20.0 | 120.5 |        |
| 10110 | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | 5.75  | X | 5.81  | 65.9 | 19.0 | 112.3 | ±0.9 % |
|       |                                             |       | Y | 6.11  | 66.9 | 19.7 | 127.2 |        |
|       |                                             |       | Z | 5.86  | 66.3 | 19.4 | 111.9 |        |
| 10111 | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | 6.44  | X | 6.86  | 66.7 | 19.6 | 118.8 | ±1.2 % |
|       |                                             |       | Y | 7.15  | 67.7 | 20.4 | 134.4 |        |
|       |                                             |       | Z | 6.92  | 67.1 | 20.0 | 117.7 |        |
| 10112 | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | 6.59  | X | 7.33  | 67.0 | 19.8 | 124.0 | ±1.4 % |
|       |                                             |       | Y | 7.69  | 68.3 | 20.7 | 140.7 |        |
|       |                                             |       | Z | 7.38  | 67.4 | 20.1 | 123.2 |        |
| 10113 | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | 6.61  | X | 7.11  | 67.0 | 19.8 | 120.8 | ±1.2 % |
|       |                                             |       | Y | 7.45  | 68.1 | 20.7 | 137.1 |        |
|       |                                             |       | Z | 7.12  | 67.2 | 20.1 | 119.7 |        |
| 10117 | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)    | 8.07  | X | 9.73  | 67.7 | 20.6 | 104.2 | ±1.4 % |
|       |                                             |       | Y | 10.35 | 69.3 | 21.7 | 122.0 |        |
|       |                                             |       | Z | 9.73  | 67.8 | 20.7 | 103.2 |        |
| 10148 | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)     | 5.83  | X | 6.21  | 66.5 | 19.3 | 117.6 | ±1.2 % |
|       |                                             |       | Y | 6.50  | 67.5 | 20.0 | 132.3 |        |
|       |                                             |       | Z | 6.28  | 66.9 | 19.7 | 116.5 |        |

ES3DV3— SN:3052

August 27, 2012

|       |                                           |      |   |      |      |      |       |        |
|-------|-------------------------------------------|------|---|------|------|------|-------|--------|
| 10149 | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | 6.42 | X | 7.14 | 67.0 | 19.7 | 124.5 | ±1.2 % |
|       |                                           |      | Y | 7.43 | 68.1 | 20.5 | 139.6 |        |
|       |                                           |      | Z | 7.18 | 67.4 | 20.1 | 123.2 |        |
| 10150 | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | 6.59 | X | 7.40 | 67.3 | 20.0 | 126.1 | ±1.4 % |
|       |                                           |      | Y | 7.70 | 68.3 | 20.8 | 141.7 |        |
|       |                                           |      | Z | 7.42 | 67.6 | 20.2 | 124.3 |        |
| 10154 | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)   | 5.76 | X | 5.92 | 66.2 | 19.2 | 114.8 | ±0.9 % |
|       |                                           |      | Y | 6.13 | 67.0 | 19.8 | 127.9 |        |
|       |                                           |      | Z | 5.96 | 66.6 | 19.6 | 113.6 |        |
| 10155 | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | 6.43 | X | 6.90 | 66.8 | 19.7 | 121.1 | ±1.2 % |
|       |                                           |      | Y | 7.17 | 67.8 | 20.4 | 134.9 |        |
|       |                                           |      | Z | 6.91 | 67.1 | 20.0 | 119.5 |        |
| 10156 | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)    | 5.79 | X | 5.66 | 65.8 | 19.0 | 111.7 | ±1.2 % |
|       |                                           |      | Y | 5.89 | 66.6 | 19.6 | 124.2 |        |
|       |                                           |      | Z | 5.69 | 66.1 | 19.4 | 109.9 |        |
| 10157 | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)  | 6.49 | X | 6.63 | 66.7 | 19.7 | 116.5 | ±1.2 % |
|       |                                           |      | Y | 6.92 | 67.7 | 20.4 | 129.6 |        |
|       |                                           |      | Z | 6.64 | 67.0 | 20.0 | 112.9 |        |
| 10158 | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | 6.62 | X | 7.12 | 67.0 | 19.9 | 121.7 | ±1.4 % |
|       |                                           |      | Y | 7.41 | 68.0 | 20.6 | 136.4 |        |
|       |                                           |      | Z | 7.14 | 67.3 | 20.1 | 118.8 |        |
| 10159 | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)  | 6.55 | X | 6.75 | 66.8 | 19.8 | 116.6 | ±1.2 % |
|       |                                           |      | Y | 7.07 | 67.9 | 20.5 | 131.1 |        |
|       |                                           |      | Z | 6.78 | 67.2 | 20.1 | 114.1 |        |
| 10169 | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)     | 5.73 | X | 5.09 | 67.3 | 20.0 | 138.6 | ±0.9 % |
|       |                                           |      | Y | 4.95 | 66.2 | 19.6 | 111.7 |        |
|       |                                           |      | Z | 5.15 | 67.9 | 20.5 | 136.0 |        |
| 10170 | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)   | 6.52 | X | 5.91 | 68.5 | 21.0 | 137.9 | ±1.2 % |
|       |                                           |      | Y | 5.73 | 67.3 | 20.4 | 111.6 |        |
|       |                                           |      | Z | 5.92 | 68.9 | 21.3 | 134.6 |        |
| 10175 | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | 5.73 | X | 5.05 | 67.1 | 19.9 | 136.9 | ±0.9 % |
|       |                                           |      | Y | 4.98 | 66.4 | 19.7 | 112.4 |        |
|       |                                           |      | Z | 5.10 | 67.7 | 20.4 | 134.4 |        |
| 10176 | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | 6.52 | X | 5.88 | 68.4 | 20.8 | 137.6 | ±1.2 % |
|       |                                           |      | Y | 5.75 | 67.4 | 20.6 | 112.0 |        |
|       |                                           |      | Z | 5.90 | 68.8 | 21.2 | 135.0 |        |
| 10177 | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | 5.73 | X | 5.06 | 67.1 | 19.8 | 137.2 | ±0.9 % |
|       |                                           |      | Y | 4.95 | 66.2 | 19.5 | 112.5 |        |
|       |                                           |      | Z | 5.07 | 67.5 | 20.3 | 133.9 |        |
| 10178 | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | 6.52 | X | 5.89 | 68.4 | 20.9 | 138.0 | ±1.4 % |
|       |                                           |      | Y | 5.72 | 67.3 | 20.4 | 112.3 |        |
|       |                                           |      | Z | 5.91 | 68.9 | 21.3 | 134.8 |        |
| 10179 | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | 6.50 | X | 5.89 | 68.5 | 20.9 | 137.8 | ±1.2 % |
|       |                                           |      | Y | 5.70 | 67.3 | 20.4 | 112.8 |        |
|       |                                           |      | Z | 5.93 | 69.1 | 21.3 | 135.0 |        |

Certificate No: ES3-3052\_Aug12

Page 6 of 14

ES3DV3– SN:3052

August 27, 2012

|       |                                         |      |   |       |      |      |       |        |
|-------|-----------------------------------------|------|---|-------|------|------|-------|--------|
| 10180 | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)  | 6.51 | X | 5.91  | 68.6 | 20.9 | 138.0 | ±1.2 % |
|       |                                         |      | Y | 5.73  | 67.4 | 20.5 | 112.5 |        |
|       |                                         |      | Z | 5.91  | 68.9 | 21.3 | 134.3 |        |
| 10196 | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | 8.10 | X | 9.39  | 67.3 | 20.5 | 100.0 | ±1.9 % |
|       |                                         |      | Y | 9.95  | 68.9 | 21.6 | 116.2 |        |
|       |                                         |      | Z | 10.22 | 69.6 | 21.8 | 146.0 |        |
| 10225 | UMTS-FDD (HSPA+)                        | 5.97 | X | 7.00  | 67.0 | 19.5 | 127.6 | ±1.2 % |
|       |                                         |      | Y | 7.25  | 67.8 | 20.0 | 143.1 |        |
|       |                                         |      | Z | 7.08  | 67.5 | 19.8 | 130.5 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3052

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.13    | 6.13    | 6.13    | 0.28  | 1.90       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 5.92    | 5.92    | 5.92    | 0.80  | 1.11       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 5.88    | 5.88    | 5.88    | 0.48  | 1.35       | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 4.96    | 4.96    | 4.96    | 0.34  | 1.77       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 4.78    | 4.78    | 4.78    | 0.48  | 1.47       | ± 12.0 %    |
| 2000                 | 40.0                               | 1.40                            | 4.73    | 4.73    | 4.73    | 0.45  | 1.55       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.19    | 4.19    | 4.19    | 0.62  | 1.37       | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.01    | 4.01    | 4.01    | 0.64  | 1.45       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3052


### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 55.5                               | 0.96                            | 5.97    | 5.97    | 5.97    | 0.38  | 1.60       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 5.83    | 5.83    | 5.83    | 0.25  | 2.29       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 5.82    | 5.82    | 5.82    | 0.68  | 1.21       | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.69    | 4.69    | 4.69    | 0.43  | 1.64       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.43    | 4.43    | 4.43    | 0.41  | 1.70       | ± 12.0 %    |
| 2000                 | 53.3                               | 1.52                            | 4.43    | 4.43    | 4.43    | 0.52  | 1.48       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.09    | 4.09    | 4.09    | 0.80  | 1.00       | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.05    | 4.05    | 4.05    | 0.64  | 0.96       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


# **Frequency Response of E-Field** (TEM-Cell:ifi110 EXX, Waveguide: R22)

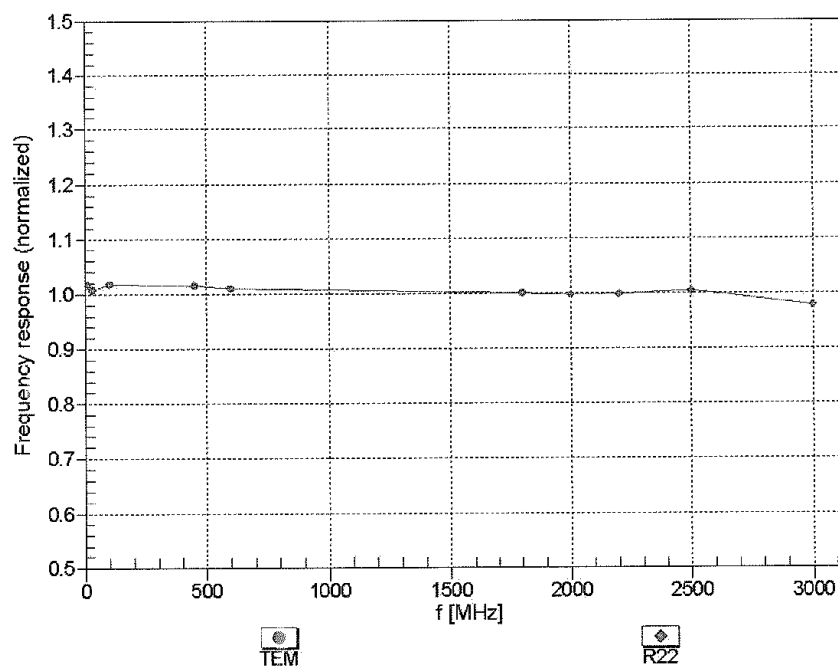



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

# Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

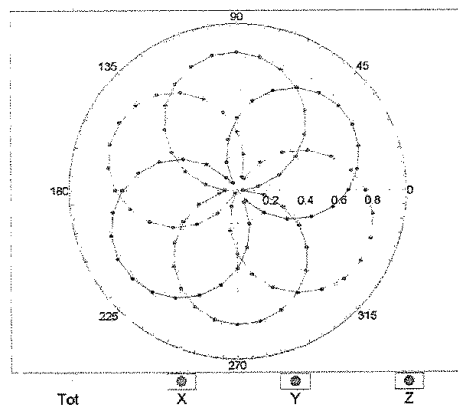



f=1800 MHz,R22

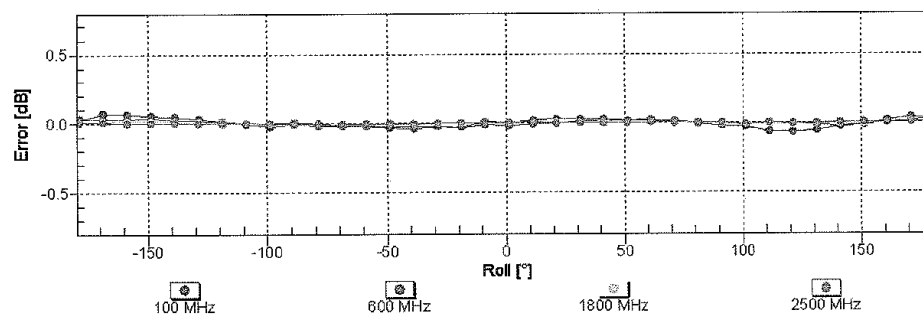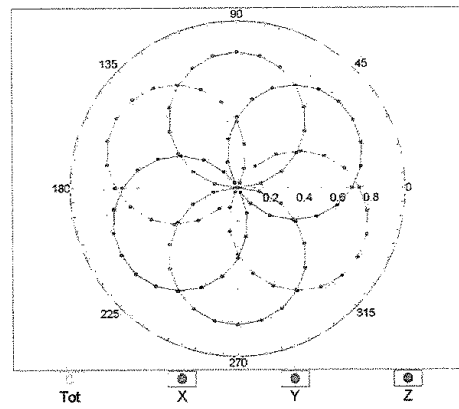

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)




# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

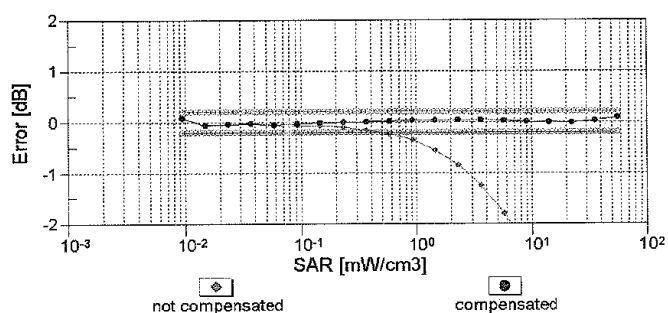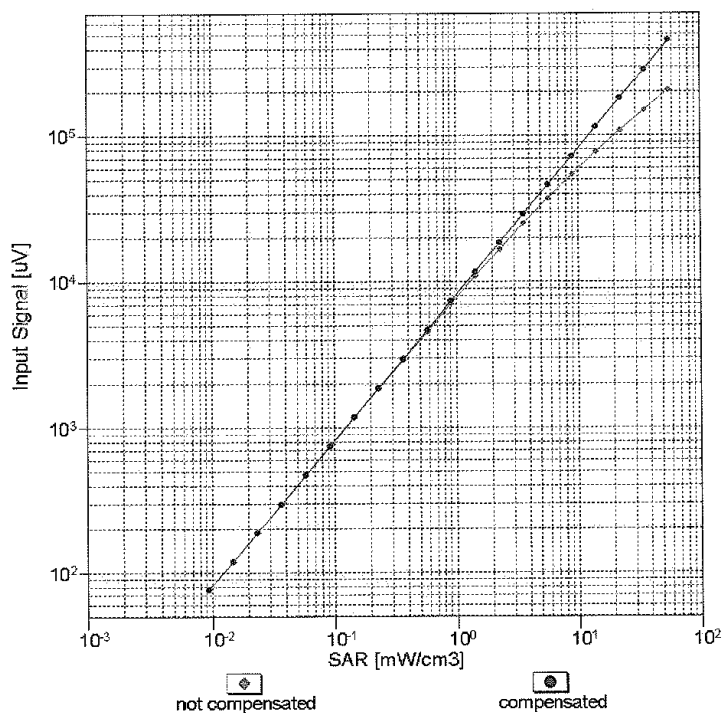


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

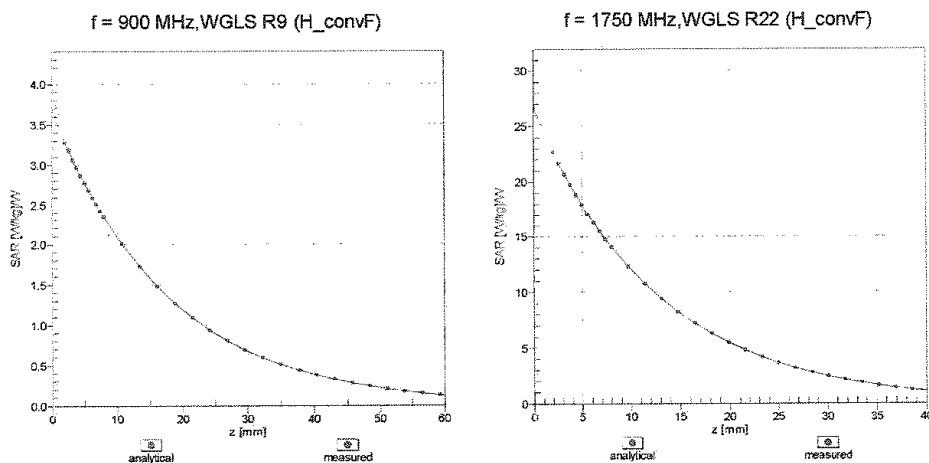

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$

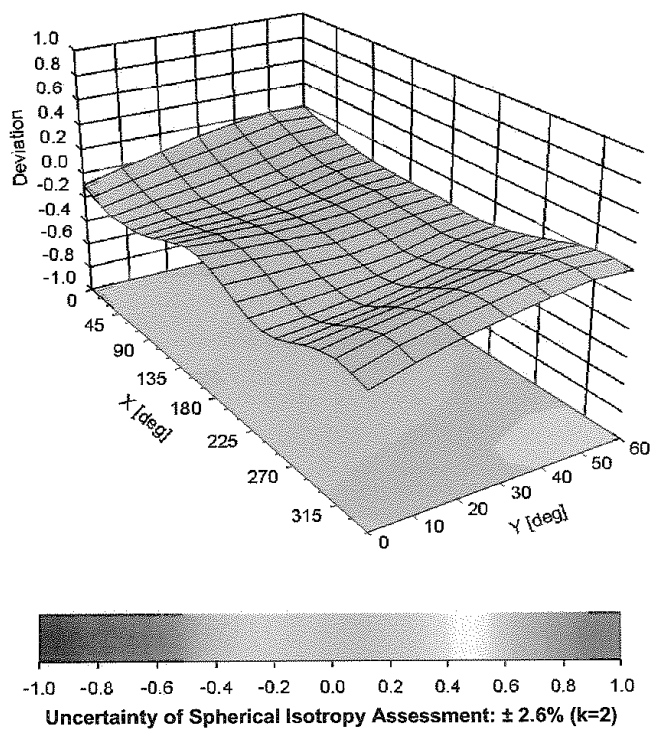

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3052

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -168.8     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 Wireless**

Certificate No: **EX3-3687\_Aug12**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3687**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4**  
**Calibration procedure for dosimetric E-field probes**


Calibration date: **August 27, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 29-Mar-12 (No. 217-01508)         | Apr-13                 |
| Power sensor E4412A        | MY41498087      | 29-Mar-12 (No. 217-01508)         | Apr-13                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 27-Mar-12 (No. 217-01531)         | Apr-13                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 27-Mar-12 (No. 217-01529)         | Apr-13                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 27-Mar-12 (No. 217-01532)         | Apr-13                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-11 (No. ES3-3013_Dec11)    | Dec-12                 |
| DAE4                       | SN: 660         | 20-Jun-12 (No. DAE4-660_Jun12)    | Jun-13                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-11)  | In house check: Apr-13 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

|                                                                                                                 | Name           | Function              | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Jeton Kastrati | Laboratory Technician |   |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |  |
| Issued: August 27, 2012                                                                                         |                |                       |                                                                                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |                                                                                       |

Certificate No: EX3-3687\_Aug12

Page 1 of 11

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C                  | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 – SN:3687

August 27, 2012

# Probe EX3DV4

## SN:3687

Manufactured: March 10, 2009  
Calibrated: August 27, 2012

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

### Basic Calibration Parameters

|                                                    | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|----------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup> | 0.53     | 0.44     | 0.48     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                              | 98.7     | 99.0     | 104.1    |               |

### Modulation Calibration Parameters

| UID   | Communication System Name                | PAR  |   | A<br>dB | B<br>dB | C<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|------------------------------------------|------|---|---------|---------|---------|----------|---------------------------|
| 0     | CW                                       | 0.00 | X | 0.00    | 0.00    | 1.00    | 164.1    | $\pm 3.5 \%$              |
|       |                                          |      | Y | 0.00    | 0.00    | 1.00    | 149.1    |                           |
|       |                                          |      | Z | 0.00    | 0.00    | 1.00    | 157.2    |                           |
| 10062 | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | 8.69 | X | 10.23   | 68.9    | 21.7    | 125.6    | $\pm 2.5 \%$              |
|       |                                          |      | Y | 10.07   | 67.9    | 20.9    | 108.6    |                           |
|       |                                          |      | Z | 10.18   | 68.9    | 21.8    | 118.7    |                           |
| 10117 | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | 8.07 | X | 10.33   | 68.9    | 21.2    | 134.0    | $\pm 2.2 \%$              |
|       |                                          |      | Y | 10.08   | 68.0    | 20.6    | 115.5    |                           |
|       |                                          |      | Z | 10.24   | 68.9    | 21.3    | 127.2    |                           |
| 10196 | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  | 8.10 | X | 9.88    | 68.6    | 21.2    | 125.6    | $\pm 2.2 \%$              |
|       |                                          |      | Y | 9.76    | 67.8    | 20.6    | 111.9    |                           |
|       |                                          |      | Z | 9.85    | 68.7    | 21.3    | 120.9    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 5200                 | 36.0                               | 4.66                            | 4.78    | 4.78    | 4.78    | 0.25  | 1.80       | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.27    | 4.27    | 4.27    | 0.35  | 1.80       | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.04    | 4.04    | 4.04    | 0.40  | 1.80       | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 5200                 | 49.0                               | 5.30                            | 4.37    | 4.37    | 4.37    | 0.39  | 1.90       | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.68    | 3.68    | 3.68    | 0.45  | 1.90       | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 3.88    | 3.88    | 3.88    | 0.45  | 1.90       | ± 13.1 %    |


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4- SN:3687

August 27, 2012

# **Frequency Response of E-Field** (TEM-Cell:ifi110 EXX, Waveguide: R22)

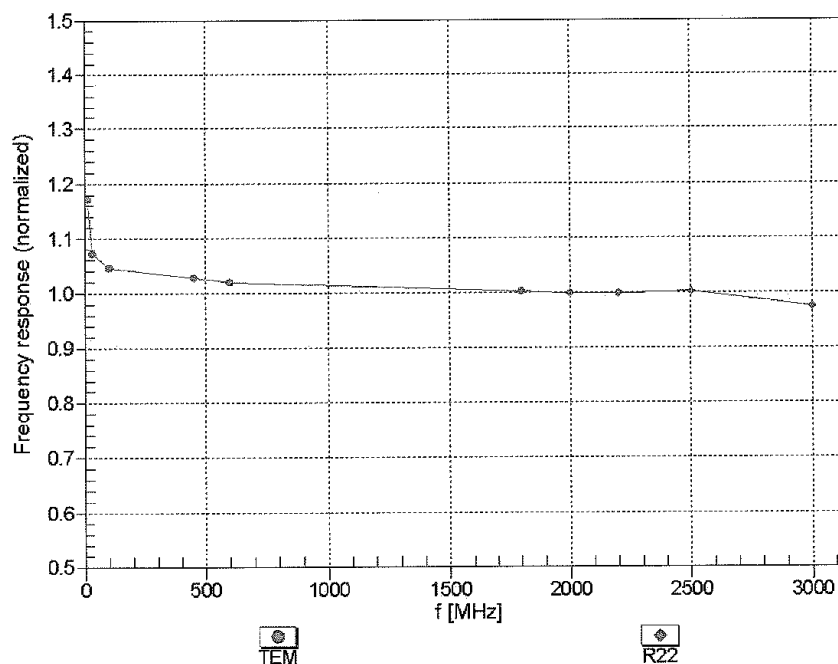


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4—SN:3687



August 27, 2012

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


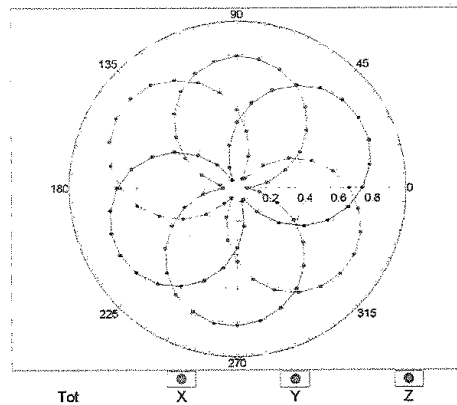


f=1800 MHz,R22

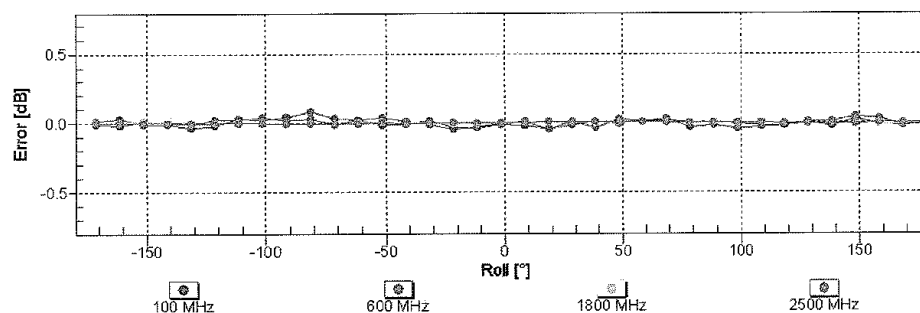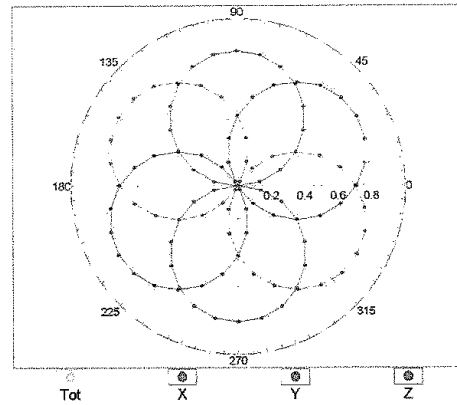


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

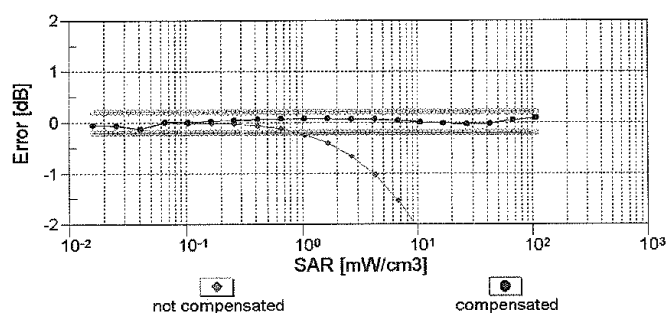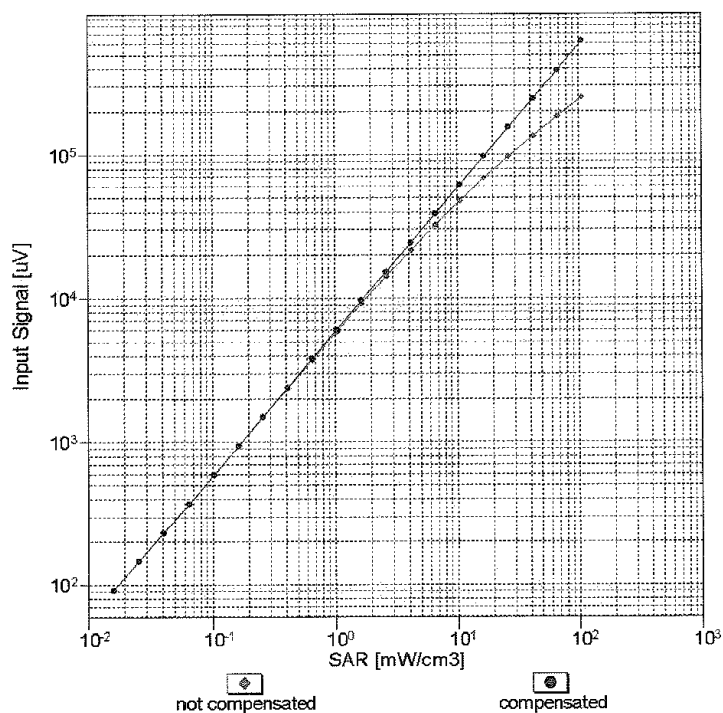


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

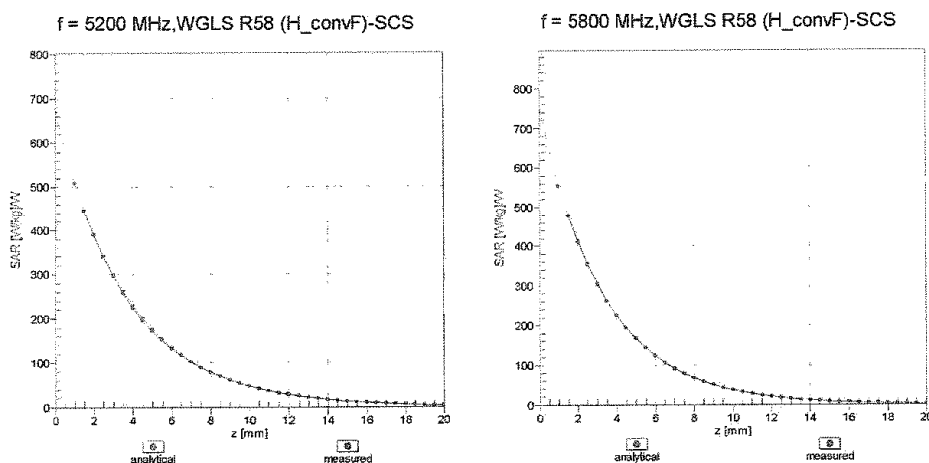

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), $f = 900 \text{ MHz}$

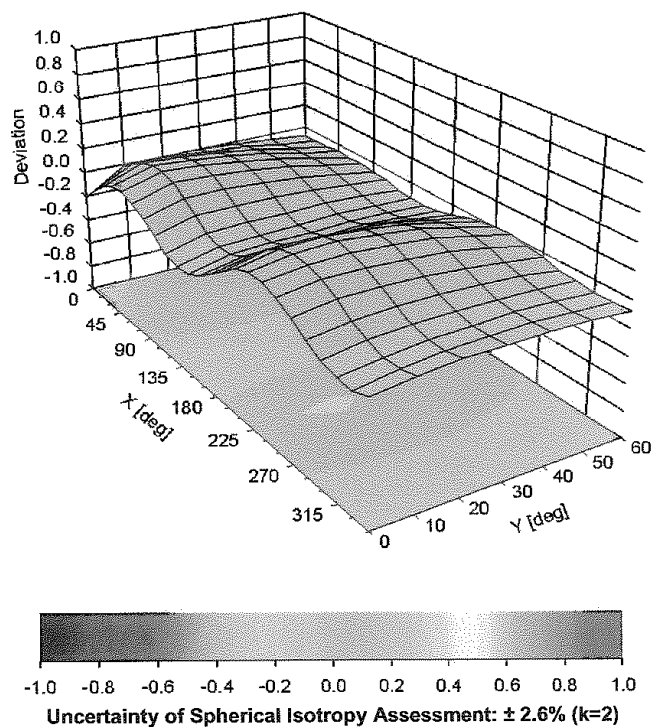

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 128.5      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 wireless**

Certificate No: **D2450V2-756 Aug11**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 756**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits above 700 MHz**



Calibration date: **August 25, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Power sensor HP 8481A       | US37292783         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Reference 20 dB Attenuator  | SN: S5086 (20b)    | 29-Mar-11 (No. 217-01367)         | Apr-12                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 29-Mar-11 (No. 217-01371)         | Apr-12                 |
| Reference Probe ES3DV3      | SN: 3205           | 29-Apr-11 (No. ES3-3205_Apr11)    | Apr-12                 |
| DAE4                        | SN: 601            | 04-Jul-11 (No. DAE4-601_Jul11)    | Jul-12                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-09) | In house check: Oct-11 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

|                |                |                       |                                                                                       |
|----------------|----------------|-----------------------|---------------------------------------------------------------------------------------|
|                | <b>Name</b>    | <b>Function</b>       | <b>Signature</b>                                                                      |
| Calibrated by: | Jeton Kastrati | Laboratory Technician |  |
| Approved by:   | Katja Pokovic  | Technical Manager     |  |

Issued: August 25, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.6.2     |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

### Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 51.8 $\pm$ 6 % | 2.02 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

### SAR result with Body TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                | 250 mW input power | 13.3 mW / g                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>52.1 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                  | 250 mW input power | 6.17 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>24.4 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.1 \Omega + 4.1 j\Omega$ |
| Return Loss                          | - 26.9 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.126 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.


The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 22, 2004 |

# Impedance Measurement Plot for Body TSL

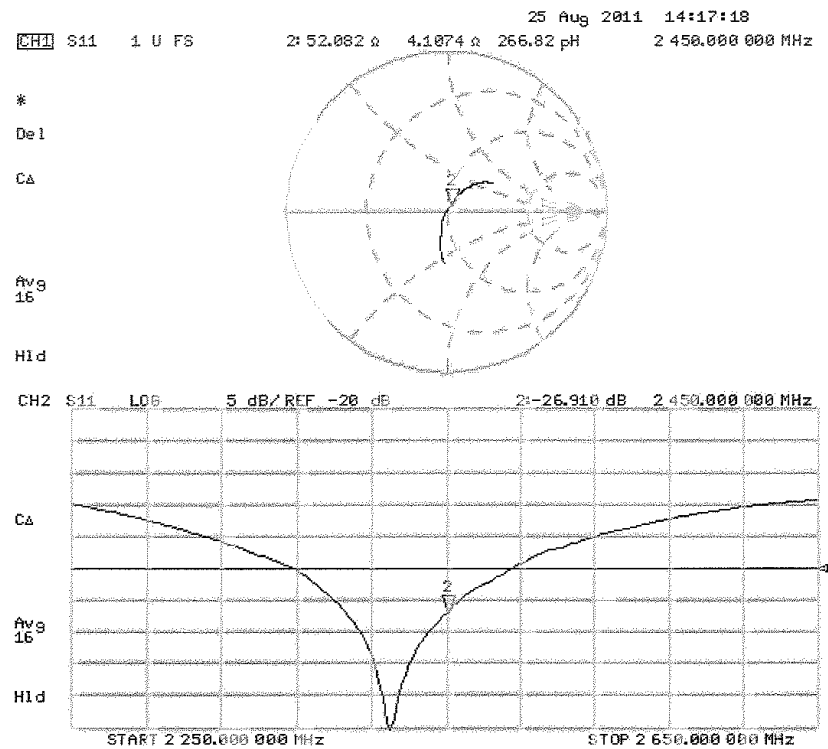

## DASY5 Validation Report for Body TSL

Date: 25.08.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 756**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.700 V/m; Power Drift = 0.00061 dB

Peak SAR (extrapolated) = 27.488 W/kg

**SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.17 mW/g**

Maximum value of SAR (measured) = 17.575 mW/g

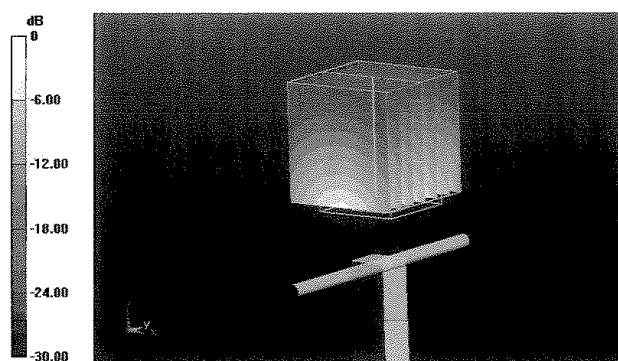

0 dB = 17.570mW/g

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 Wireless**

Certificate No: **D5GHz-1071\_Jul11**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1071**

Calibration procedure(s) **QA CAL-22.v1  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **July 14, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)     | Scheduled Calibration |
|-----------------------------|--------------------|--------------------------------|-----------------------|
| Power meter EPM-442A        | GB37480704         | 06-Oct-10 (No. 217-01266)      | Oct-11                |
| Power sensor HP 8481A       | US37292783         | 06-Oct-10 (No. 217-01266)      | Oct-11                |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 29-Mar-11 (No. 217-01368)      | Apr-12                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 29-Mar-11 (No. 217-01371)      | Apr-12                |
| Reference Probe EX3DV4      | SN: 3503           | 04-Mar-11 (No. EX3-3503_Mar11) | Mar-12                |
| DAE4                        | SN: 601            | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12                |

| Secondary Standards       | ID #             | Check Date (in house)             | Scheduled Check        |
|---------------------------|------------------|-----------------------------------|------------------------|
| Power sensor HP 8481A     | MY41092317       | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 |
| RF generator R&S SMT-06   | 100005           | 04-Aug-99 (in house check Oct-09) | In house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

|                |               |                       |                                                                                       |
|----------------|---------------|-----------------------|---------------------------------------------------------------------------------------|
|                | <b>Name</b>   | <b>Function</b>       | <b>Signature</b>                                                                      |
| Calibrated by: | Dimce Iliev   | Laboratory Technician |  |
| Approved by:   | Katja Pokovic | Technical Manager     |  |

Issued: July 14, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D5GHz-1071\_Jul11

Page 1 of 13

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                                                                      |                                  |
|------------------------------|----------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY5                                                                | V52.6.2                          |
| Extrapolation                | Advanced Extrapolation                                               |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                            |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                                         | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5200 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 35.8 $\pm$ 6 % | 4.55 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5200 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                                  |
|-------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                          | 100 mW input power | 8.13 mW / g                                      |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>81.2 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                                  |
|---------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                            | 100 mW input power | 2.32 mW / g                                      |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.1 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

## Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 35.6           | 4.96 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 35.3 $\pm$ 6 % | 4.85 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                                  |
|-------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                          | 100 mW input power | 8.49 mW / g                                      |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>84.7 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                                  |
|---------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                            | 100 mW input power | 2.42 mW / g                                      |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>24.1 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.9 ± 6 %   | 5.15 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 100 mW input power | 8.04 mW / g                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>80.1 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 100 mW input power | 2.29 mW / g                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>22.8 mW / g ± 16.5 % (k=2)</b> |



### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.8 ± 6 %   | 5.45 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5200 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 100 mW input power | 7.65 mW / g                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>76.4 mW / g ± 18.1 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 100 mW input power | 2.14 mW / g                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.4 mW / g ± 17.6 % (k=2)</b> |

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.2 ± 6 %   | 5.85 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 100 mW input power | 8.26 mW / g                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>82.5 mW / g ± 18.1 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 100 mW input power | 2.30 mW / g                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>23.0 mW / g ± 17.6 % (k=2)</b> |

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.7 ± 6 %   | 6.27 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 100 mW input power | 7.72 mW / g                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>77.1 mW / g ± 18.1 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 100 mW input power | 2.15 mW / g                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.5 mW / g ± 17.6 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.2 $\Omega$ - 6.1 j $\Omega$ |
| Return Loss                          | - 24.3 dB                      |

### Antenna Parameters with Head TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.6 $\Omega$ - 3.7 j $\Omega$ |
| Return Loss                          | - 26.0 dB                      |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.6 $\Omega$ - 3.4 j $\Omega$ |
| Return Loss                          | - 28.7 dB                      |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ - 4.4 j $\Omega$ |
| Return Loss                          | - 26.5 dB                      |

### Antenna Parameters with Body TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.1 $\Omega$ - 1.5 j $\Omega$ |
| Return Loss                          | - 27.5 dB                      |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.9 $\Omega$ - 0.9 j $\Omega$ |
| Return Loss                          | - 30.5 dB                      |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.209 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 26, 2008 |

## DASY5 Validation Report for Head TSL

Date: 13.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHz; Serial: D5GHzV2 - SN: 1071**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.55$  mho/m;  $\epsilon_r = 35.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.85$  mho/m;  $\epsilon_r = 35.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 34.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41), ConvF(4.91, 4.91, 4.91), ConvF(4.81, 4.81, 4.81); Calibrated: 04.03.2011
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 64.916 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 30.326 W/kg  
**SAR(1 g) = 8.13 mW/g; SAR(10 g) = 2.32 mW/g**  
Maximum value of SAR (measured) = 18.667 mW/g


**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 64.885 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 33.919 W/kg  
**SAR(1 g) = 8.49 mW/g; SAR(10 g) = 2.42 mW/g**  
Maximum value of SAR (measured) = 20.008 mW/g

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 61.496 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 33.910 W/kg  
**SAR(1 g) = 8.04 mW/g; SAR(10 g) = 2.29 mW/g**  
Maximum value of SAR (measured) = 19.345 mW/g

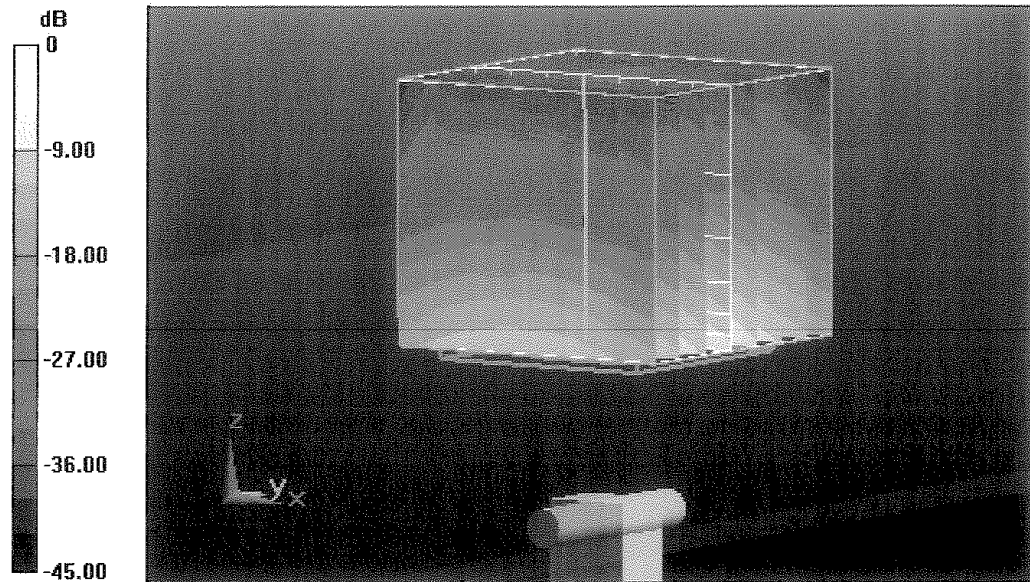

0 dB = 19.350mW/g

# Impedance Measurement Plot for Head TSL

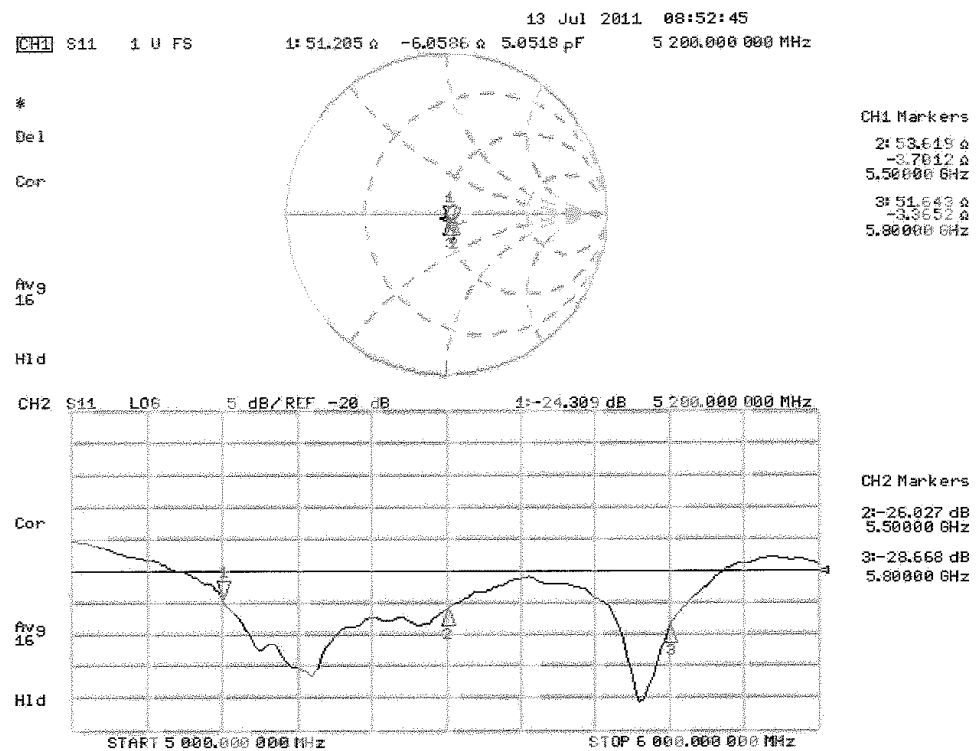

## DASY5 Validation Report for Body TSL

Date: 14.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHz; Serial: D5GHzV2 - SN: 1071**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.45$  mho/m;  $\epsilon_r = 48.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.85$  mho/m;  $\epsilon_r = 48.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.27$  mho/m;  $\epsilon_r = 47.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:


- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91), ConvF(4.43, 4.43, 4.43), ConvF(4.38, 4.38, 4.38); Calibrated: 04.03.2011
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 58.574 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 30.027 W/kg  
**SAR(1 g) = 7.65 mW/g; SAR(10 g) = 2.14 mW/g**  
Maximum value of SAR (measured) = 17.812 mW/g

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 59.164 V/m; Power Drift = 0.0018 dB  
Peak SAR (extrapolated) = 35.182 W/kg  
**SAR(1 g) = 8.26 mW/g; SAR(10 g) = 2.3 mW/g**  
Maximum value of SAR (measured) = 19.705 mW/g

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 55.594 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 35.537 W/kg  
**SAR(1 g) = 7.72 mW/g; SAR(10 g) = 2.15 mW/g**  
Maximum value of SAR (measured) = 18.976 mW/g



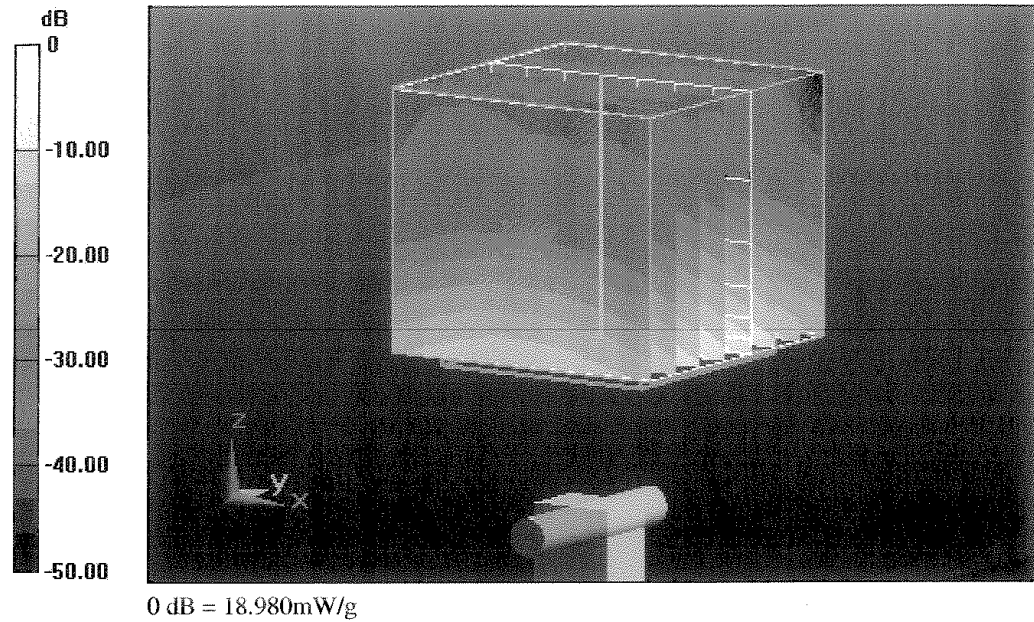



# Impedance Measurement Plot for Body TSL

