

FCC SAR TEST REPORT

Test File No : F690501/RF-SAR002569

Equipment Under Test	Module
Model Name	7265D2W
Host Device	NOTEBOOK PC
Host Device Name	XE521QAB
Applicant	Intel Mobile Communications
Address of Applicant	Intel Mobile Communications 100 Center Point Circle Suite 200 Columbia, SC 29210 USA
FCC ID	PD97265D2
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013 ANSI/IEEE C95.1, C95.3
Date of Receipt	2018-04-10
Date of Test(s)	2018-04-17 ~ 2018-04-20
Date of Issue	2018-04-24
Test Result	Refer to the Page 06

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Korea Co., Ltd. or testing done by SGS Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Korea Co., Ltd. in writing.



Report prepared by /
Jamie Kim
Test Engineer



Approved by /
Jongwon Ma
Technical Manager

Revision history

Revision	Date of issue	Revisions	Revised By
-	April 24, 2018	Initial issue	-

Contents

1.	Testing Laboratory	5
2.	Details of Manufacturer	5
3.	Description of EUT(s)	5
4.	The Highest Reported SAR Values	5
5.	Test Methodology	6
6.	Testing Environment	6
7.	Specific Absorption Rate (SAR)	7
	7.1 Introduction	7
	7.2 SAR Definition	7
	7.3 Test Standards and Limits	7
8.	The SAR Measurement System	9
9.	System Components	10
	9.1 Probe	10
	9.2 ELI Phantom	10
	9.3 Device Holder	11
10.	SAR Measurement Procedures	12
	10.1 Normal SAR Measurement Procedure	12
11.	SAR System Verification	14
12.	Tissue Simulant Fluid for the Frequency Band	15
13.	Instruments List	17
14.	FCC Power Measurement Procedures	18
15.	Measured and Reported SAR	18
16.	Maximum Output Power Specifications	19
	16.1 Maximum Output Power Specifications (Notebook)	19
	16.2 Maximum Output Power Specifications (Tablet)	20
	16.3 Bluetooth Maximum Output Power Specifications	20
17.	WLAN	21
	17.1 General Device Setup	21
	17.2 U-NII-1 and U-NII-2A	21
	17.3 U-NII-2C and U-NII-3	21
	17.4 2.4 GHz SAR Test Requirements	21
	17.5 OFDM Transmission Mode and SAR Test Channel Selection	22
	17.6 Initial Test Configuration Procedure	22
	17.7 Subsequent Test Configuration Procedures	22
18.	RF Conducted Power Measurement	23
19.	Transmit Antenna Separation Distances	29
	19.1 Notebook Device Type	29
	19.2 Tablet PC Device Type	30
20.	SAR Data Summary	31
	20.1 Notebook Device Type	31
	20.2 Tablet PC Device Type	33
21.	SAR Measurement Variability	35
	21.1 Measurement Variability	35
	21.2 Measurement Uncertainty	35
22.	Simultaneous Multi-band Transmission Evaluation	36
	22.1 Introduction	36
	22.2 The Simultaneous Transmission possibilities are listed as below	36
	22.3 Simultaneous Transmission Procedures	36
	22.3.1 Notebook Device Type	36
	22.3.2 Tablet PC Device Type	37
	22.4 SPLSR Evaluation and Analysis	38
	Appendixes List	41
Report File No : F690501/RF-SAR002569		Date of Issue : 2018-04-24
(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx .)		
RTT5041-76(2015.10.01) (2)		A4 (210mm x 297mm)

Appendix A.1 Verification Test Plots for 2450 MHz	42
Appendix A.2 Verification Test Plots for 5300 MHz	44
Appendix A.3 Verification Test Plots for 5600 MHz	45
Appendix A.4 Verification Test Plots for 5800 MHz	46
Appendix A.5 SAR Test Plots for WLAN 2.4GHz Main (Notebook Mode)	47
Appendix A.6 SAR Test Plots for WLAN 2.4GHz Aux (Notebook Mode)	48
Appendix A.7 SAR Test Plots for WLAN 5.3GHz Main (Notebook Mode)	49
Appendix A.8 SAR Test Plots for WLAN 5.3GHz Aux (Notebook Mode)	50
Appendix A.9 SAR Test Plots for WLAN 5.6GHz Main (Notebook Mode)	51
Appendix A.10 SAR Test Plots for WLAN 5.6GHz Aux (Notebook Mode)	52
Appendix A.11 SAR Test Plots for WLAN 5.8GHz Main (Notebook Mode)	53
Appendix A.12 SAR Test Plots for WLAN 5.8GHz Aux (Notebook Mode)	54
Appendix A.13 SAR Test Plots for WLAN 2.4GHz Main (Tablet Mode)	55
Appendix A.14 SAR Test Plots for WLAN 2.4GHz Aux (Tablet Mode)	56
Appendix A.15 SAR Test Plots for WLAN 5.6GHz Main (Tablet Mode)	57
Appendix A.16 SAR Test Plots for WLAN 5.6GHz Aux (Tablet Mode)	58
Appendix B.1 Calibration certificate for Probe(S/N 7413)	59
Appendix B.2 Calibration certificate for DAE	97
Appendix B.3 Calibration certificate for Dipole	102
-THE END-	123

1. Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo 3 Laboratory)
Address	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Telephone	+82 +31 - 428 - 5700
FAX	+82 +31 - 427 - 2371

2. Details of Manufacturer

Applicant	Intel Mobile Communications
Address	Intel Mobile Communications 100 Center Point Circle Suite 200 Columbia, SC 29210 USA
Email	steven.c.hackett@intel.com
Phone No.	803-216-2344

3. Description of EUT(s)

EUT Type	Module
Model Name	7265D2W
Host Device	NOTEBOOK PC
Host Device Name	XE521QAB
Mode of Operation	WLAN, Bluetooth
Duty Cycle	1 (WLAN)
Body worn Accessory	None
Tx Frequency Range	2412 MHz ~ 2462 MHz (WLAN_802.11b/g/n) 5180 MHz ~ 5240 MHz, 5260 MHz ~ 5320 MHz (WLAN_802.11a/n/ac) 5500 MHz ~ 5700 MHz (WLAN_802.11a/n/ac) 5745 MHz ~ 5825 MHz (WLAN_802.11a/n/ac) 2402 MHz ~ 2480 MHz (Bluetooth)

4. The Highest Reported SAR Values

Equipment Class	Band	Highest Reported SAR 1g (W/kg)
DTS	2.4 GHz WLAN	1.30
UNII	5.8 GHz WLAN	1.05
NII	5.3 GHz WLAN	0.93
	5.6 GHz WLAN	1.24
DSS	Bluetooth	0.19
Simultaneous SAR per KDB 690783 D01v01r03		1.49

5. Test Methodology

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☒	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☒	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Reduction Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v03	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☐	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6. Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: < ± 2°C
Ambient noise & Reflection	: < 0.012 W/kg

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.3-2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting

source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 m W/g	8.00 m W/g
Partial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

1. The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8. The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY6 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 6 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

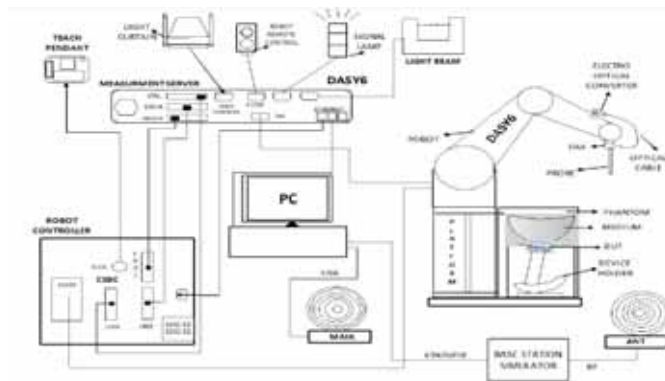


Fig 1. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 8.1 Pro.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The ELI phantom enabling testing flat usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9. System Components

9.1 Probe

Construction	: Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	: Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835 and HSL1900. Additional CF-Calibration for other liquids and frequencies upon request.
Frequency	: 10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	: $10\mu\text{W/g}$ to > 100 m W/g; Linearity: ± 0.2 dB(noise: typically $< 1\mu\text{W/g}$)
Dimensions	: Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Distance from probe tip to dipole centers: 1 mm
Application	: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%



EX3DV4 E-Field Probe

NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX C" for the Calibration Certification Report.

9.2 ELI Phantom

Construction	: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
---------------------	---

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure



ELI Phantom

Shell Thickness	: 2.0 mm $\pm$ 0.2 mm
Dimensions	: Major axis: 600 mm Minor axis: 400 mm

9.3 Device Holder

Construction: : Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (a.q.. laptops, Cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioned.



Device Holder

10. SAR Measurement Procedures

10.1 Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 and 3: Area Scan & Zoom Scan Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11. SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 1. The daily system accuracy verification occurs within the flat section of the ELI phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 2450 MHz, 5300 MHz, 5600 MHz and 5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2)^\circ\text{C}$, the relative humidity was in the range $(55 \pm 5)\%$ R.H and the liquid depth above the ear reference points was $\geq 15\text{ cm} \pm 5\text{ mm}$ (frequency $\leq 3\text{ GHz}$) or $\geq 10\text{ cm} \pm 5\text{ mm}$ (frequency $> 3\text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

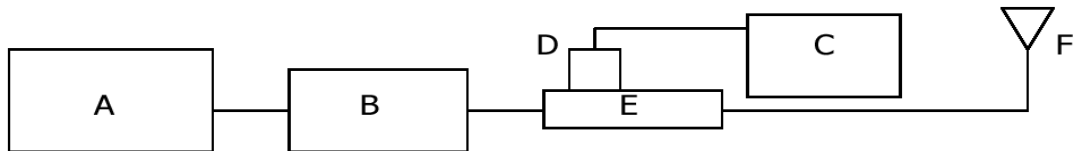


Fig. 1. The microwave circuit arrangement used for SAR system verification

- A. R&S Model SMBV100A Vector Signal Generator
- B. MECA Model AMP2027 Amplifier
- C. Agilent Model N1914A Power Meter
- D. Agilent Model N8481A Power Sensor
- E. KEYSIGHT Model 772D Dual Directional Coupler
- F. Reference dipole Antenna



Photo of the dipole Antenna

Verification Kit	Probe S/N	Tissue	Target SAR 1 g from Calibration Certificate (1 W)	Measured SAR 1 g (0.1 W)	Normalized SAR 1 g (1 W)	Deviation (%)	Date	Liquid Temp. (°C)
D2450V2 SN:892	7413	2450 Body	50.60	4.79	47.90	-5.34	2018-04-17	21.5
D2450V2 SN:892	7413	2450 Body	50.60	4.88	48.80	-3.56	2018-04-18	21.5
D5 GHz V2 SN:1106	7413	5300 Body	79.60	8.42	84.20	5.78	2018-04-19	21.6
D5 GHz V2 SN:1106	7413	5600 Body	81.60	8.28	82.80	1.47	2018-04-20	21.6
D5 GHz V2 SN:1106	7413	5800 Body	79.10	8.23	82.30	4.05	2018-04-19	21.6

Table1. Results system verification

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

12. Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAKS-3.5 Dielectric Probe in conjunction with SPEAG Vector Network Analyzer (85 MHz- 14 GHz) by using a procedure detailed in Section V.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp()
2450	Body	Measured,2018-04-17	50.86	1.90	21.5
		Target Tissue Body	52.70	1.95	
		Deviation (%)	-3.49	-2.56	
2412		Measured,2018-04-17	51.38	1.89	
		Deviation (%)	-2.50	-3.08	
2462		Measured,2018-04-17	51.00	1.92	
		Deviation (%)	-3.23	-1.54	
2450	Body	Measured,2018-04-18	52.71	1.95	21.5
		Target Tissue Body	52.70	1.95	
		Deviation (%)	0.02	0.00	
2422		Measured,2018-04-18	52.81	1.92	
		Deviation (%)	0.21	-1.54	
2452		Measured,2018-04-18	52.71	1.96	
		Deviation (%)	0.02	0.51	
5300	Body	Measured,2018-04-19	49.54	5.44	21.6
		Target Tissue Body	48.90	5.42	
		Deviation (%)	1.31	0.37	
5290		Measured,2018-04-19	49.82	5.39	
		Deviation (%)	1.88	-0.55	
5600	Body	Measured,2018-04-20	49.01	5.83	21.6
		Target Tissue Body	48.50	5.77	
		Deviation (%)	1.05	1.04	
5530		Measured,2018-04-20	49.06	5.69	
		Deviation (%)	1.15	-1.39	
5690		Measured,2018-04-20	48.92	5.86	
		Deviation (%)	0.87	1.56	
5800	Body	Measured,2018-04-19	49.79	6.14	21.6
		Target Tissue Body	48.20	6.00	
		Deviation (%)	3.30	2.33	
5775		Measured,2018-04-19	49.84	6.21	
		Deviation (%)	3.40	3.50	

The composition of the brain & muscle tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		900		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.91	46.21	40.29	50.75	40.29	50.75	55.24	70.17	55.00	68.64
Salt (NaCl)	3.79	2.34	1.38	0.94	1.38	0.94	0.31	0.39	-	-
Sugar	56.93	51.17	57.90	-	57.90	-	-	-	-	-
HEC	0.25	0.15	0.24	0.10	0.24	0.10	-	-	-	-
Bactericide	0.12	0.08	0.18	-	0.18	-	-	-	-	-
Triton X-100	-	-	-	-	-	-	-	-	-	-
DGBE	-	-	-	-	-	-	44.45	70.17	45.00	31.37
Dielectric Constant	43.5	56.7	41.5	55.2	41.5	55.0	40.0	53.3	39.2	52.7
Conductivity (S/m)	0.87	0.94	0.90	0.97	0.97	1.05	1.40	1.52	1.80	1.95

Salt: 99 + % Pure Sodium Chloride

Sugar: 98 + % Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99 + % Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral Oil	11
Emulsifiers	9
Additives and Salt	2

13. Instruments List

Test Platform	SPEAG DASY6 Professional				
Location	10-2, LS-ro 182beon-gil, Gunpo-si Gyeonggi-do, 15807 Republic of Korea				
Manufacture	SPEAG				
Description	SAR Test System (Frequency range 300 MHz – 6 GHz)				
Software Reference	DASY52: 52.10.0(1446) / SEMCAD X: 14.6.10(7417)				
Hardware Reference					
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Robot	TX60 L	F16/54FUA1/A/01	N/A	N/A	N/A
Phantom	ELI Phantom	TP-1244	N/A	N/A	N/A
Mounting Device	Laptop Extension Kit	N/A	N/A	N/A	N/A
Verification Dipole	D2450V2	892	2017-04-21	Biennial	2019-04-21
Verification Dipole	D5GHzV2	1106	2017-05-26	Biennial	2019-05-26
Calibration of dielectric parameter Probes	DAKS-3.5	1068	2017-05-23	Annual	2018-05-23
DAE	DAE4	1503	2017-08-03	Annual	2018-08-03
E-Field Probe	EX3DV4	7413	2017-07-26	Annual	2018-07-26
Performance Check for Vector Network Analyzer and Vector Reflectometer	DAKS-VNA R140	0160115	2018-02-21	Annual	2019-02-21
Power Meter	N1914A	MY56120017	2017-07-09	Annual	2018-07-09
Power Sensor	N8481A	MY56120026	2017-07-09	Annual	2018-07-09
Power Sensor	N8481A	MY56120030	2017-07-09	Annual	2018-07-09
Vector Signal Generator	SMBV100A	262093	2017-07-05	Annual	2018-07-05
RF Amplifier	AMP2027	10008	2017-07-07	Annual	2018-07-07
Dual Directional Coupler	772D	MY52180259	2017-07-07	Annual	2018-07-07
Lowpass Filter	WLJ4-3000-5850-8000-60EF	1	2017-08-10	Annual	2018-08-10
Lowpass Filter	WLJ8-6000-7440-8000-60EF	1	2017-08-10	Annual	2018-08-10
Attenuator	2	BY6201	2017-08-10	Annual	2018-08-10
Attenuator	2	CB6049	2017-08-10	Annual	2018-08-10
Attenuator	05AS102-K03	A2	2017-12-08	Annual	2018-12-08
Hygro-Thermometer	TE-201	TE-201-2	2017-08-11	Annual	2018-08-11
Digital Thermometer	SDT25	16031500243	2017-08-11	Annual	2018-08-11
Signal Analyzer	FSV7	103082	2017-07-11	Annual	2018-07-11

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

14. FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

15. Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

16. Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

16.1 Maximum Output Power Specifications (Notebook)

Average power for Production (dB m)					
Mode	Data Rate	Channel	Normal/Maximum	Main	Aux
802.11b	All Data Rates	1 ~ 11 Channels	Maximum	15.5	15.5
			Normal	14.0	14.0
802.11g	All Data Rates	1 ~ 11 Channels	Maximum	15.5	15.5
			Normal	14.0	14.0
802.11n HT20	All Data Rates	1 ~ 11 Channels	Maximum	15.5	15.5
			Normal	14.0	14.0
802.11n HT40	All Data Rates	3 ~ 9 Channels	Maximum	15.5	15.5
			Normal	14.0	14.0
Tune-up Tolerance: -1.5 dB / +1.5 dB					

Average power for Production (dB m)					
Mode	Data Rate	Channel	Normal/Maximum	Main	Aux
802.11a, n, ac HT20 / VHT20	All Data Rates	36 ~ 116 Channels	Maximum	12.5	12.5
			Normal	11.0	11.0
		132 ~ 144 Channels	Maximum	10.5	10.5
			Normal	9.0	9.0
		149 ~ 165 Channels	Maximum	9.0	9.0
			Normal	7.5	7.5
802.11n, ac HT40 / VHT40	All Data Rates	38 ~ 110 Channels	Maximum	12.5	12.5
			Normal	11.0	11.0
		134 , 142 Channels	Maximum	10.5	10.5
			Normal	9.0	9.0
		151 , 159 Channels	Maximum	9.0	9.0
			Normal	7.5	7.5
802.11ac VHT80	All Data Rates	42 ~ 106 Channels	Maximum	12.5	12.5
			Normal	11.0	11.0
		138 Channels	Maximum	10.5	10.5
			Normal	9.0	9.0
		155 Channels	Maximum	9.0	9.0
			Normal	7.5	7.5
Tune-up Tolerance: -1.5 dB / +1.5 dB					

16.2 Maximum Output Power Specifications (Tablet)

17. Average power for Production (dB m)					
Mode	Data Rate	Channel	Normal/Maximum	Main	Aux
802.11b	All Data Rates	1 ~ 11 Channels	Maximum	14.5	14.5
			Normal	13.0	13.0
802.11g	All Data Rates	1 ~ 11 Channels	Maximum	14.5	14.5
			Normal	13.0	13.0
802.11n HT20	All Data Rates	1 ~ 11 Channels	Maximum	14.5	14.5
			Normal	13.0	13.0
802.11n HT40	All Data Rates	3 ~ 9 Channels	Maximum	14.5	14.5
			Normal	13.0	13.0
Tune-up Tolerance: -1.5 dB / +1.5 dB					

Average power for Production (dB m)					
Mode	Data Rate	Channel	Normal/Maximum	Main	Aux
802.11a, n, ac HT20 / VHT20	All Data Rates	36 ~ 64 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
		100 ~ 116 Channels	Maximum	8.5	8.5
			Normal	7.0	7.0
		132 ~ 165 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
802.11n, ac HT40 / VHT40	All Data Rates	38 ~ 62 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
		102 , 110 Channels	Maximum	8.5	8.5
			Normal	7.0	7.0
		134 ~ 159 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
802.11ac VHT80	All Data Rates	42 , 58 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
		106 Channels	Maximum	8.5	8.5
			Normal	7.0	7.0
		138 , 155 Channels	Maximum	7.5	7.5
			Normal	6.0	6.0
Tune-up Tolerance: -1.5 dB / +1.5 dB					

16.3 Bluetooth Maximum Output Power Specifications

Average power for Production (dBm)					
Mode	Normal/Maximum	GFSK	PI/4DQPSK	8DPSK	LE
Bluetooth	Maximum	6.5	1.5	1.5	4.5
	Normal	5.0	0.0	0.0	3.0
Tune-up Tolerance: -1.5 dB / +1.5 dB					

17. WLAN

17.1 General Device Setup

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

17.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

17.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

17.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

17.5 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

17.6 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements

17.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

18. RF Conducted Power Measurement

WLAN 2.4 GHz Notebook Mode

Mode	Freq. (MHz)	Ch. #	Rate	Average Power [dB m]	
				Main	AUX
802.11b	2412	1	1	15.49	15.50
	2437	6	1	15.22	15.34
	2462	11	1	15.50	15.42
802.11g	2412	1	6	Not Require	
	2437	6	6		
	2462	11	6		
802.11n HT20	2412	1	MCS0		
	2437	6	MCS0		
	2462	11	MCS0		
802.11n HT40	2422	3	MCS0	15.49	15.06
	2437	6	MCS0	15.47	15.07
	2452	9	MCS0	15.46	15.03

WLAN 5.2 GHz Notebook Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5180	36	6	Not Require	
	5200	40	6		
	5220	44	6		
	5240	48	6		
802.11n HT20	5180	36	MCS0		
	5200	40	MCS0		
	5220	44	MCS0		
	5240	48	MCS0		
802.11n HT40	5190	38	MCS0		
	5230	46	MCS0		
802.11ac VHT20	5180	36	MCS0		
	5200	40	MCS0		
	5220	44	MCS0		
	5240	48	MCS0		
802.11ac VHT40	5190	38	MCS0		
	5230	46	MCS0		
802.11ac VHT80	5210	42	MCS0		

WLAN 5.3 GHz Notebook Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5260	52	6	Not Require	
	5280	56	6		
	5300	60	6		
	5320	64	6		
802.11n HT20	5260	52	MCS0		
	5280	56	MCS0		
	5300	60	MCS0		
	5320	64	MCS0		
802.11n HT40	5270	54	MCS0		
	5310	62	MCS0		
802.11ac VHT20	5260	52	MCS0		
	5280	56	MCS0		
	5300	60	MCS0		
	5320	64	MCS0		
802.11ac VHT40	5270	54	MCS0		
	5310	62	MCS0		
802.11ac VHT80	5290	58	MCS0	12.50	12.30

WLAN 5.6 GHz Notebook Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5500	100	6	Not Require	
	5580	116	6		
	5660	132	6		
	5700	140	6		
802.11n HT20	5500	100	MCS0		
	5580	116	MCS0		
	5660	132	MCS0		
	5700	140	MCS0		
802.11n HT40	5510	102	MCS0		
	5550	110	MCS0		
	5670	134	MCS0		
802.11ac VHT20	5500	100	MCS0		
	5580	116	MCS0		
	5660	132	MCS0		
	5720	144	MCS0		
802.11ac VHT40	5510	102	MCS0		
	5550	110	MCS0		
	5670	134	MCS0		
	5710	142	MCS0		
802.11ac VHT80	5530	106	MCS0	12.50	12.17
	5690	138	MCS0	10.50	10.20

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

WLAN 5.8 GHz Notebook Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5745	149	6	Not Require	
	5785	157	6		
	5825	165	6		
802.11n HT20	5745	149	MCS0		
	5785	157	MCS0		
	5825	165	MCS0		
802.11n HT40	5755	151	MCS0		
	5795	159	MCS0		
802.11ac VHT20	5745	149	MCS0		
	5785	157	MCS0		
	5825	165	MCS0		
802.11ac VHT40	5755	151	MCS0		
	5795	159	MCS0		
802.11ac VHT80	5775	155	MCS0	8.70	8.70

WLAN 2.4 GHz Tablet Mode

Mode	Freq. (MHz)	Ch. #	Rate	Average Power [dB m]	
				Main	AUX
802.11b	2412	1	1	14.38	14.29
	2437	6	1	14.18	14.33
	2462	11	1	14.37	14.31
802.11g	2412	1	6	Not Require	
	2437	6	6		
	2462	11	6		
802.11n HT20	2412	1	MCS0		
	2437	6	MCS0		
	2462	11	MCS0		
802.11n HT40	2422	3	MCS0	14.49	14.49
	2437	6	MCS0	14.32	14.50
	2452	9	MCS0	14.42	14.23

WLAN 5.2 GHz Tablet Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5180	36	6	Not Require	
	5200	40	6		
	5220	44	6		
	5240	48	6		
802.11n HT20	5180	36	MCS0		
	5200	40	MCS0		
	5220	44	MCS0		
	5240	48	MCS0		
802.11n HT40	5190	38	MCS0		
	5230	46	MCS0		
802.11ac VHT20	5180	36	MCS0		
	5200	40	MCS0		
	5220	44	MCS0		
	5240	48	MCS0		
802.11ac VHT40	5190	38	MCS0		
	5230	46	MCS0		
802.11ac VHT80	5210	42	MCS0		

WLAN 5.3 GHz Tablet Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5260	52	6	Not Require	
	5280	56	6		
	5300	60	6		
	5320	64	6		
802.11n HT20	5260	52	MCS0		
	5280	56	MCS0		
	5300	60	MCS0		
	5320	64	MCS0		
802.11n HT40	5270	54	MCS0		
	5310	62	MCS0		
802.11ac VHT20	5260	52	MCS0		
	5280	56	MCS0		
	5300	60	MCS0		
	5320	64	MCS0		
802.11ac VHT40	5270	54	MCS0		
	5310	62	MCS0		
802.11ac VHT80	5290	58	MCS0		

WLAN 5.6 GHz Tablet Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5500	100	6	Not Require	
	5580	116	6		
	5660	132	6		
	5700	140	6		
802.11n HT20	5500	100	MCS0		
	5580	116	MCS0		
	5660	132	MCS0		
	5700	140	MCS0		
802.11n HT40	5510	102	MCS0		
	5550	110	MCS0		
	5670	134	MCS0		
802.11ac VHT20	5500	100	MCS0		
	5580	116	MCS0		
	5660	132	MCS0		
	5720	144	MCS0		
802.11ac VHT40	5510	102	MCS0		
	5550	110	MCS0		
	5670	134	MCS0		
	5710	142	MCS0		
802.11ac VHT80	5530	106	MCS0	8.09	8.50
	5690	138	MCS0	7.08	7.37

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

WLAN 5.8 GHz Tablet Mode

Mode	Freq. (MHz)	Ch. #	Rate	Measured Power [dB m]	
				Main	AUX
802.11a	5745	149	6	Not Require	
	5785	157	6		
	5825	165	6		
802.11n HT20	5745	149	MCS0		
	5785	157	MCS0		
	5825	165	MCS0		
802.11n HT40	5755	151	MCS0		
	5795	159	MCS0		
802.11ac VHT20	5745	149	MCS0		
	5785	157	MCS0		
	5825	165	MCS0		
802.11ac VHT40	5755	151	MCS0		
	5795	159	MCS0		
802.11ac VHT80	5775	155	MCS0		


Bluetooth

Channel	Frequency (MHz)	GFSK (dB m)	4DPSK (dB m)	8DPSK (dB m)	LE (dB m)
Low	2402	4.44	-1.31	-1.46	2.93
Middle	2441	5.30	-0.34	-0.30	3.85
High	2480	4.77	-0.96	-0.84	3.12

Note. Justification for test configurations for WLAN per KDB Publication 248227 D01 Wi-Fi SAR v02r02:

1. Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
2. For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
3. For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
4. For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For channels were measured.

19. Transmit Antenna Separation Distances

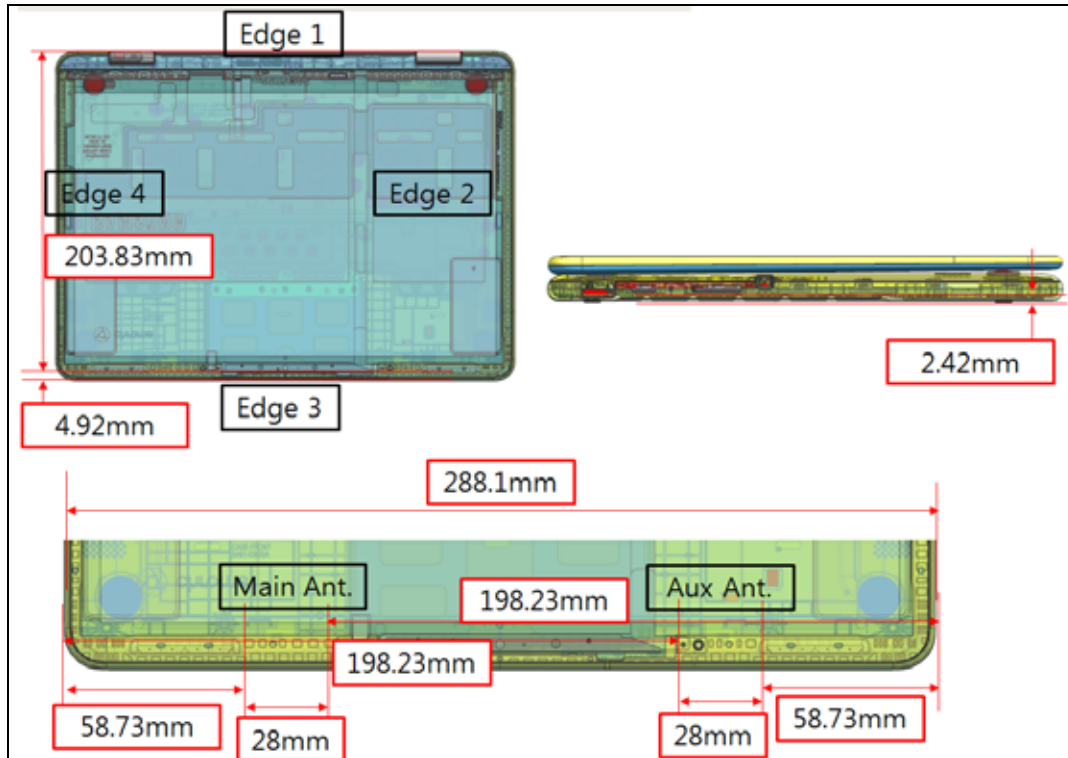

<The Distance information of Antenna to Edges of Tablet PC>

19.1 Notebook Device Type

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Distance (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum tune-up tolerance limit of Bluetooth the antenna to use separation distance,

Notebook Type Bluetooth SAR was not required: $[4.47 / 5.00 * \sqrt{2.480}] = 1.41 < 3.0$

19.2 Tablet PC Device Type

Based on the maximum tune-up tolerance limit of WLAN and Bluetooth, and the antenna to use separation distance, Table “EXEMPT” SAR was not required and Table “Measure” SAR was required.

Antenna	Frequency (MHz)	Output power ^{Note 2, 4}		Separation distances (mm) ^{Note 1 and 4}						SAR Exemption ^{Note 3 and 4}					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Main	2462	14.50	28.00	5	203.83	198.23	5	58.73		Measure	EXEMPT	EXEMPT	Measure	EXEMPT	N/A
	5240	7.50	6.00	5	203.83	198.23	5	58.73		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
	5320	7.50	6.00	5	203.83	198.23	5	58.73		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
	5550	8.50	7.00	5	203.83	198.23	5	58.73		Measure	EXEMPT	EXEMPT	Measure	EXEMPT	N/A
	5825	7.50	6.00	5	203.83	198.23	5	58.73		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
Aux	2462	14.50	28.00	5	203.83	58.73	5	198.23		Measure	EXEMPT	EXEMPT	Measure	EXEMPT	N/A
	5240	7.50	6.00	5	203.83	58.73	5	198.23		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
	5320	7.50	6.00	5	203.83	58.73	5	198.23		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
	5550	8.50	7.00	5	203.83	58.73	5	198.23		Measure	EXEMPT	EXEMPT	Measure	EXEMPT	N/A
	5825	7.50	6.00	5	203.83	58.73	5	198.23		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A
Bluetooth - Aux Antenna															
Bluetooth	2480	6.50	4.00	5	203.83	58.73	5	198.23		EXEMPT	EXEMPT	EXEMPT	EXEMPT	EXEMPT	N/A

Note

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the maximum rated power (including tune-up or manufacturing tolerances).
- If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation ≤ 50mm the value is the KDB 447498 D01v06 calculated value and must be less than 3 for SAR exemption.
- Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.
- SAR evaluation for the front surface of tablet display screens is generally not necessary according to 4.3 section of KDB 616217 D04 v01r02.

20. SAR Data Summary

20.1 Notebook Device Type

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg))		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11b	2412	1	15.49	-	15.50	2.060	1.150	-	1.000	-	1.016	1.171	-	-
Base	802.11b	2437	6	15.22	-	15.50	1.670	1.100	-	1.067	-	1.016	1.192	-	-
Base	802.11b	2462	11	15.50	-	15.50	1.860	1.180	-	1.009	-	1.016	1.199	-	-
Base	802.11b	2412	1	-	15.50	15.50	1.780	-	0.810	-	1.000	1.016	-	0.823	-
Base	802.11b	2437	6	-	15.34	15.50	1.920	-	0.903	-	1.038	1.016	-	0.952	A6
Base	802.11b	2462	11	-	15.42	15.50	1.930	-	0.861	-	1.019	1.016	-	0.891	-
Repeat Test															
Base	802.11b	2462	11	15.50	-	15.50	2.130	1.180	-	1.009	-	1.016	1.199	-	-
Base	802.11b	2437	6	-	15.34	15.50	1.850	-	0.892	-	1.038	1.016	-	0.940	-
Additional Test															
Base	802.11n HT40	2422	3	15.49	-	15.50	2.480	1.260	-	1.002	-	1.032	1.303	-	A5
Base	802.11n HT40	2437	6	15.47	-	15.50	2.420	1.180	-	1.007	-	1.032	1.226	-	-
Base	802.11n HT40	2452	9	15.46	-	15.50	2.500	1.240	-	1.009	-	1.032	1.292	-	-
Base	802.11n HT40	2422	3	-	15.06	15.50	1.280	-	0.738	-	1.107	1.032	-	0.843	-
Base	802.11n HT40	2437	6	-	15.07	15.50	1.350	-	0.741	-	1.104	1.032	-	0.844	-
Base	802.11n HT40	2452	9	-	15.03	15.50	1.350	-	0.739	-	1.114	1.032	-	0.850	-
Repeat Test															
Base	802.11n HT40	2422	3	15.49	-	15.50	2.540	1.220	-	1.002	-	1.032	1.262	-	-

WLAN 5.3 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5290	58	12.50	-	12.50	2.220	0.813	-	1.000	-	1.148	0.933	-	A7
Base	802.11ac VHT80	5290	58	-	12.30	12.50	1.930	-	0.604	-	1.047	1.148	-	0.726	A8
Repeat Test															
Base	802.11ac VHT80	5290	58	12.50	-	12.50	2.030	0.806	-	1.000	-	1.148	0.925	-	-

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5530	106	12.50	-	12.50	1.680	0.904	-	1.000	-	1.148	1.038	-	-
Base	802.11ac VHT80	5690	138	10.50	-	10.50	3.120	1.050	-	1.000	-	1.148	1.205	-	-
Base	802.11ac VHT80	5530	106		12.17	12.50	1.000	-	0.465	-	1.073	1.148	-	0.576	A10
Base	802.11ac VHT80	5690	138	-	10.20	10.50	0.933	-	0.457	-	1.072	1.148	-	0.562	-
Repeat Test															
Base	802.11ac VHT80	5690	138	10.50	-	10.50	3.140	1.080	-	1.000	-	1.148	1.240	-	A9

WLAN 5.8 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5775	155	8.70	-	9.00	1.400	0.851	-	1.072	-	1.148	1.047	-	A11
Base	802.11ac VHT80	5775	155	-	8.70	9.00	1.180	-	0.522	-	1.072	1.148	-	0.642	A12
Repeat Test															
Base	802.11ac VHT80	5775	155	8.70	-	9.00	1.600	0.845	-	1.072	-	1.148	1.039	-	-

20.2 Tablet PC Device Type

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	Cube	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No		
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit			Main	Aux	Main	Aux		Main	Aux		Main	Aux
Rear	802.11b	2412	1	14.38	-	14.50	1.470	-	0.723	-	1.028	-	1.016	0.755	-	-		
Edge3	802.11b	2412	1	14.38	-	14.50	0.661	-	0.359	-	1.028	-	1.016	0.375	-	-		
Rear	802.11b	2437	6	-	14.33	14.50	0.960	0	-	0.523	-	1.040	1.016	-	0.553	A14		
							0.831	1		0.467				0.493				
Edge3	802.11b	2437	6	-	14.33	14.50	0.632	-	-	0.338	-	1.040	1.016	-	0.357	-		
Additional Test																		
Rear	802.11n HT40	2422	3	14.49	-	14.50	1.580	-	0.847	-	1.002	-	1.032	0.876	-	A13		
Rear	802.11n HT40	2452	9	14.42	-	14.50	1.160	-	0.623	-	1.019	-	1.032	0.655	-	-		
Edge3	802.11n HT40	2422	3	14.49	-	14.50	0.967	-	0.569	-	1.002	-	1.032	0.589	-	-		
Rear	802.11n HT40	2437	6	-	14.50	14.50	0.976	0	-	0.532	-	1.000	1.032	-	0.549	-		
							0.914	1		0.519					0.536			
Edge3	802.11n HT40	2437	6	-	14.50	14.50	0.715	-	-	0.346	-	1.000	1.032	-	0.357	-		
Repeat Test																		
Rear	802.11n HT40	2422	3	14.49	-	14.50	1.470	-	0.837	-	1.002	-	1.032	0.866	-	-		

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No		
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux		Main	Aux
Rear	802.11ac VHT80	5530	106	8.09	-	8.50	1.960	0.807	-	1.099	-	1.148	1.018	-	A15		
Rear	802.11ac VHT80	5690	138	7.08	-	7.50	2.000	0.718	-	1.102	-	1.148	0.908	-	-		
Edge3	802.11ac VHT80	5530	106	8.09	-	8.50	0.690	0.171	-	1.099	-	1.148	0.216	-	-		
Rear	802.11ac VHT80	5530	106	-	8.50	8.50	0.806	-	0.373	-	1.000	1.148	-	0.428	-		
Rear	802.11ac VHT80	5690	138	-	7.37	7.50	0.830	-	0.374	-	1.030	1.148	-	0.442	A16.		
Edge3	802.11ac VHT80	5530	106	-	8.50	8.50	0.451	-	0.133	-	1.000	1.148	-	0.153			
Repeat Test																	
Rear	802.11ac VHT80	5530	106	8.09	-	8.50	1.950	0.769	-	1.099	-	1.148	0.970	-	-		

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
2. Liquid tissue depth was at least 15 cm for all frequencies.
3. All modes of operation were investigated, and worst-case results are reported.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2 dB below the highest peak.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
7. Per FCC KDB 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determined SAR test exclusion for adjacent edge configurations.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
5. WLAN transmission was verified using a spectrum analyzer.
6. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a,g, n then ac) is selected.
7. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is ≤ 1.2 W/kg, SAR is not required for UNII band1 > 1.2 W/kg, both bands should be tested independently for SAR. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

21. SAR Measurement Variability

21.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

EUT Position	Mode	Traffic Channel		Separation Distance (mm)	Measured 1g SAR (W/kg)	1 st Repeated 1g SAR(W/kg)	Ratio
		Frequency (MHz)	Channel				
Base	WLAN 2.4 GHz	2462	11	0	1.180	1.180	1.00
Base	WLAN 2.4 GHz	2437	6	0	0.903	0.892	0.99
Base	WLAN 2.4 GHz	2422	3	0	1.260	1.220	0.97
Rear	WLAN 2.4 GHz	2422	3	0	0.847	0.837	0.99
Base	WLAN 5GHz	5290	58	0	0.813	0.806	0.99
Base	WLAN 5GHz	5690	138	0	1.050	1.080	0.97
Base	WLAN 5GHz	5775	155	0	0.851	0.845	0.99
Rear	WLAN 5GHz	5530	106	0	0.807	0.769	0.95

21.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

22. Simultaneous Multi-band Transmission Evaluation

22.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as Bluetooth devices which may simultaneously transmit with the licensed transmitter.

22.2 The Simultaneous Transmission possibilities are listed as below

No	Capable TX Configuration	Operation
1	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux	Yes
2	WLAN 5 GHz Main + WLAN 5 GHz Aux	Yes
3	WLAN 2.4 GHz Main Ant + Bluetooth Aux Ant	Yes
4	WLAN 5 GHz Main Ant + Bluetooth Aux Ant	Yes

Note:

- The simultaneous transmission possibilities are listed as below.
- WLAN Aux Ant and Bluetooth Aux Ant share the same antenna and cannot transmit simultaneously.

22.3 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured per FCC KDB 447498 D01v06 4.3.2.b), the following equation must be used to estimate the standalone 1g and 10g SAR for simultaneous transmission involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{\text{Frequency (GHz)}}}{7.5} * \frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Distance (mm)}}$$

22.3.1 Notebook Device Type

Device Type	Mode	Frequency [MHz]	Maximum Allowed Power [mW]	Separation Distance [mm]	Estimated SAR [W/kg]
Notebook	Bluetooth	2480	4.47	5.00	0.188

Notebook Body SAR Simultaneous Transmission Analysis

Simultaneous TX	configuration	Main Ant SAR(W/kg)	Aux Ant SAR(W/kg)	ΣSAR (W/kg)
WLAN 2.4 GHz	Base	1.303	0.952	2.255
WLAN 5.3 GHz	Base	0.933	0.726	1.659
WLAN 5.6 GHz	Base	1.240	0.576	1.816
WLAN 5.8 GHz	Base	1.047	0.642	1.689
WLAN + Bluetooth	configuration	2.4 GHz Main Ant SAR(W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
	Base	1.303	0.188	1.491
	configuration	5 GHz Main Ant SAR(W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
	Base	1.240	0.188	1.428

22.3.2 Tablet PC Device Type

Antenna	Tx	Frequency	Output power ^{Note 2, 4}		Separation distances (mm) ^{Note 1 and 4}						Estimated SAR Value ^{Note 3 and 4}					
		(MHz)	dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
WiFi - Main Antenna - Zero separation from tablet																
Main	WiFi	2462	14.50	28.18	5	203.83	198.23	5	58.73		Measure	0.118	0.118	Measure	0.118	N/A
	WiFi	5240	7.50	5.62	5	203.83	198.23	5	58.73		0.343	0.034	0.034	0.343	0.034	N/A
	WiFi	5320	7.50	5.62	5	203.83	198.23	5	58.73		0.346	0.035	0.035	0.346	0.035	N/A
	WiFi	5550	8.50	7.08	5	203.83	198.23	5	58.73		Measure	0.044	0.044	Measure	0.044	N/A
	WiFi	5825	7.50	5.62	5	203.83	198.23	5	58.73		0.362	0.036	0.036	0.362	0.036	N/A
WiFi - Aux Antenna - Zero separation from tablet																
Aux	WiFi	2412	14.50	28.18	5	203.83	58.73	5	198.23		Measure	0.117	0.117	Measure	0.117	N/A
	WiFi	5240	7.50	5.62	5	203.83	58.73	5	198.23		0.343	0.034	0.034	0.343	0.034	N/A
	WiFi	5320	7.50	5.62	5	203.83	58.73	5	198.23		0.346	0.035	0.035	0.346	0.035	N/A
	WiFi	5700	8.50	7.08	5	203.83	58.73	5	198.23		Measure	0.045	0.045	Measure	0.045	N/A
	WiFi	5825	7.50	5.62	5	203.83	58.73	5	198.23		0.362	0.036	0.036	0.362	0.036	N/A
B.T- Aux Antenna - Zero separation from tablet																
Bluetooth	B.T	2480	6.50	4.47	5	203.83	58.73	5	198.23		0.188	0.019	0.019	0.188	0.019	N/A

Tablet PC Body SAR Simulations Transmission Analysis

Simultaneous TX	configuration	Main Ant SAR(W/kg)	Aux Ant SAR(W/kg)	ΣSAR (W/kg)
2.4 GHz WLAN Tablet Mode	Rear	0.876	0.553	1.429
	Edge3	0.589	0.357	0.946
5.6 GHz WLAN Tablet Mode	Rear	1.018	0.442	1.460
	Edge3	0.216	0.153	0.369
WLAN + Bluetooth	configuration	2.4 GHz Main Ant SAR(W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
	Rear	0.876	0.188	1.064
	Edge 3	0.589	0.188	0.777
	configuration	5 GHz Main Ant SAR(W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
	Rear	1.018	0.188	1.206
	Edge3	0.216	0.188	0.404

22.4 SPLSR Evaluation and Analysis

FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio for each pair of antennas is ≤ 0.04 , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formal.


$$\text{Distance} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

Notebook Body SAR Peak Location Separation Ratio (SPLSR)

Simultaneous Tx	Position	Main Ant	Aux Ant	Σ SAR (W/kg)	Calculated Distance (mm)	SPLSR (≤ 0.04)	Volume Scan	Page No
WLAN 2.4 GHz	Base	1.303	0.952	2.255	139.0	0.024	NO	40
WLAN 5.3 GHz	Base	0.933	0.726	1.659	144.0	0.015	NO	41
WLAN 5.6 GHz	Base	1.240	0.576	1.816	141.0	0.017	NO	41
WLAN 5.6 GHz	Base	1.047	0.642	1.689	138.0	0.016	NO	42

Notebook (Base) 2.4 GHz (WLAN Main Ant + WLAN Aux Ant)

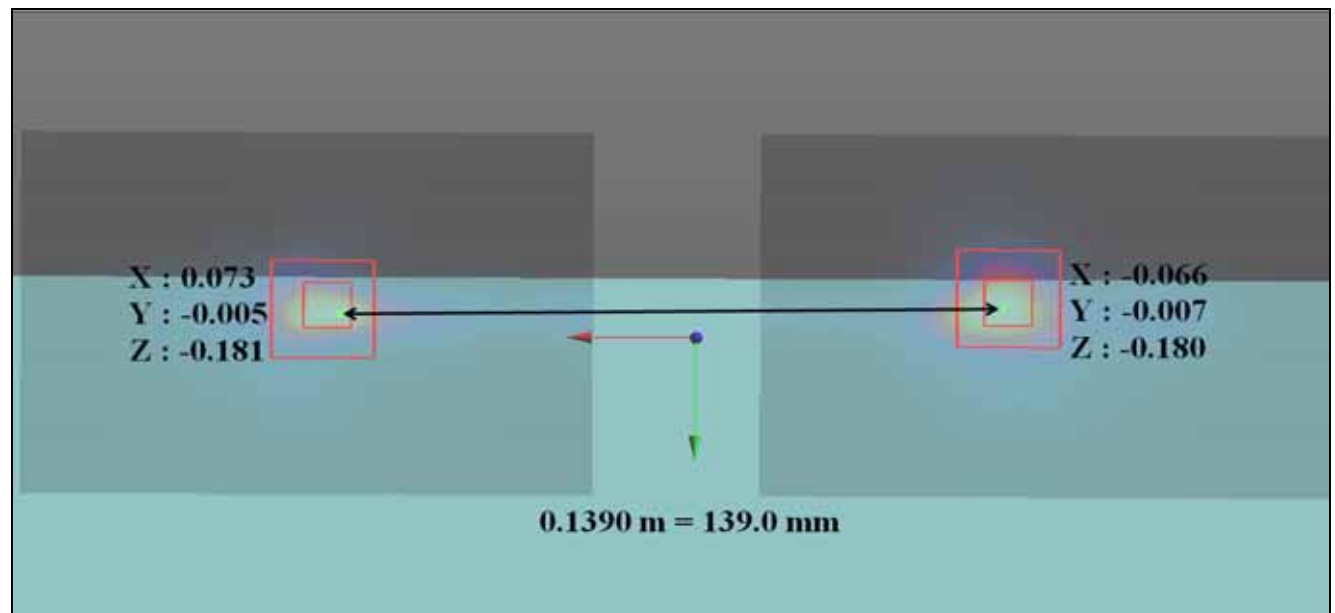


WLAN Main Ant			WLAN Aux Ant			R_i		Σ SAR (W/kg)	SPLSR (≤ 0.04)	Volume Scan SAR [W/kg]	Plot No
X, m	Y, m	Z, m	X, m	Y, m	Z, m	m	mm				
0.073	-0.005	-0.181	-0.066	-0.007	-0.180	0.139	139.0	2.255	0.024	-	-

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24


(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Notebook (Base) 5.3 GHz (WLAN Main Ant + WLAN Aux Ant)

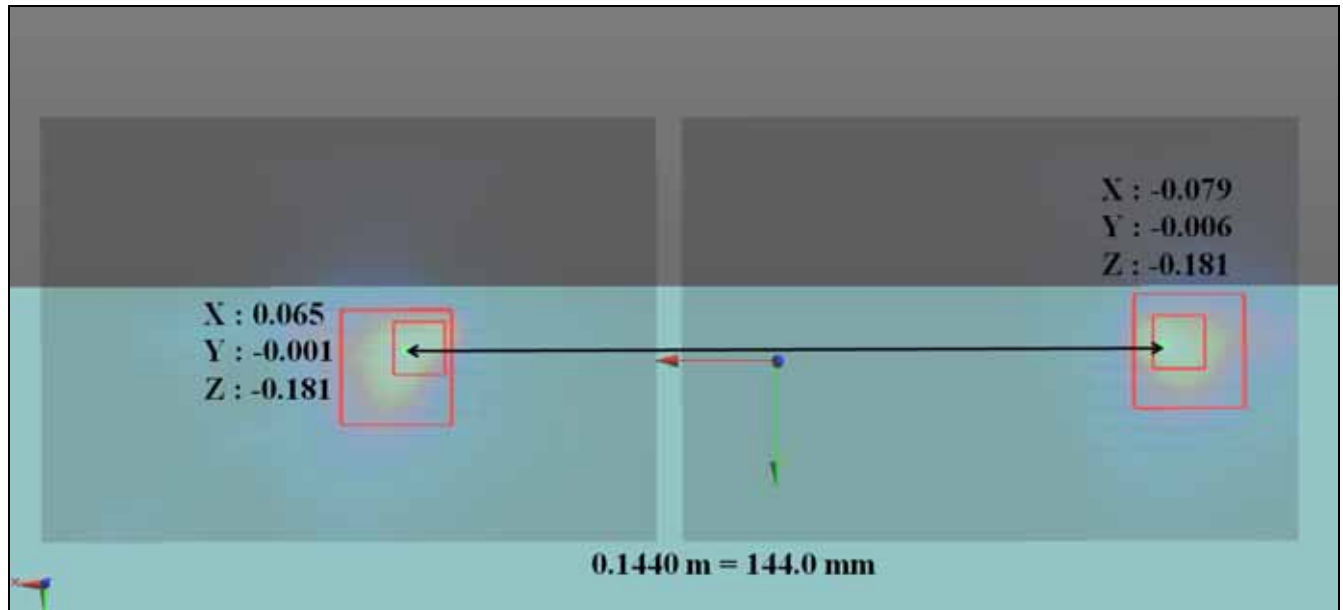


WLAN Main Ant			WLAN Aux Ant			R _i		ΣSAR (W/kg)	SPLSR (≤0.04)	Volume Scan SAR [W/kg]	Plot No
X, m	Y, m	Z, m	X, m	Y, m	Z, m	m	mm				
0.065	-0.001	-0.181	-0.079	-0.006	-0.181	0.1440	144.0	1.659	0.015	-	-

Notebook (Base) 5.6 GHz (WLAN Main Ant + WLAN Aux Ant)

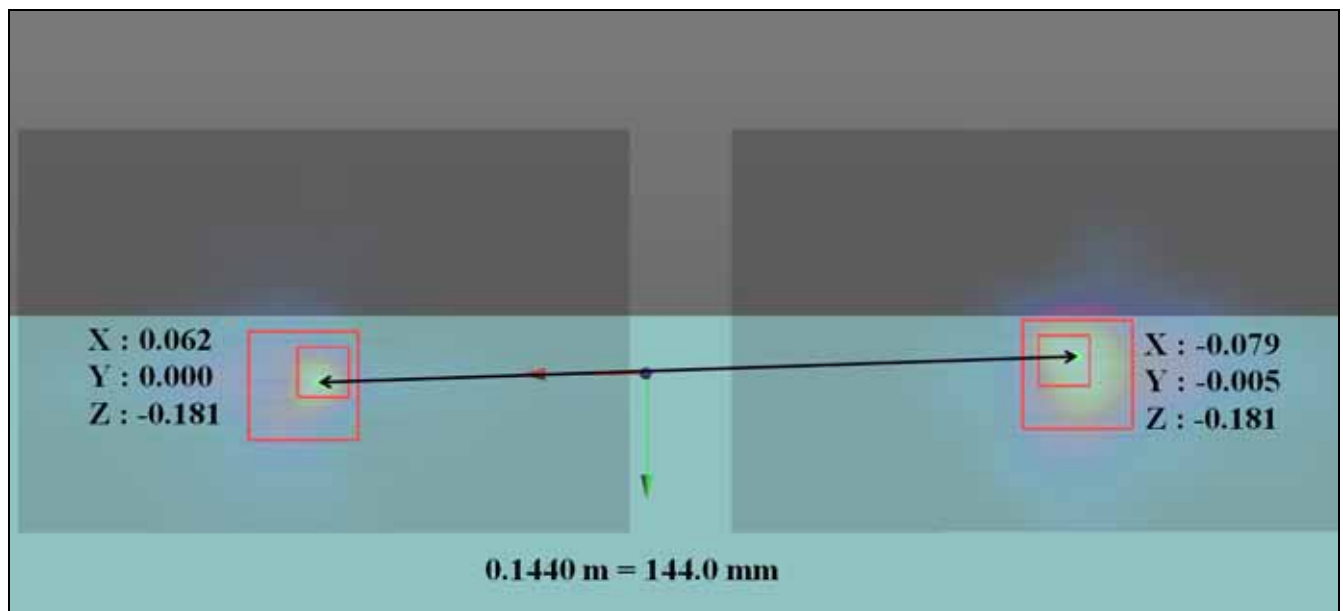

WLAN Main Ant			WLAN Aux Ant			R _i		ΣSAR (W/kg)	SPLSR (≤0.04)	Volume Scan SAR [W/kg]	Plot No
X, m	Y, m	Z, m	X, m	Y, m	Z, m	m	mm				
0.062	0	-0.181	-0.079	-0.005	-0.181	0.141	141.0	1.816	0.017	-	-

Notebook (Base) 5.8 GHz (WLAN Main Ant + WLAN Aux Ant)

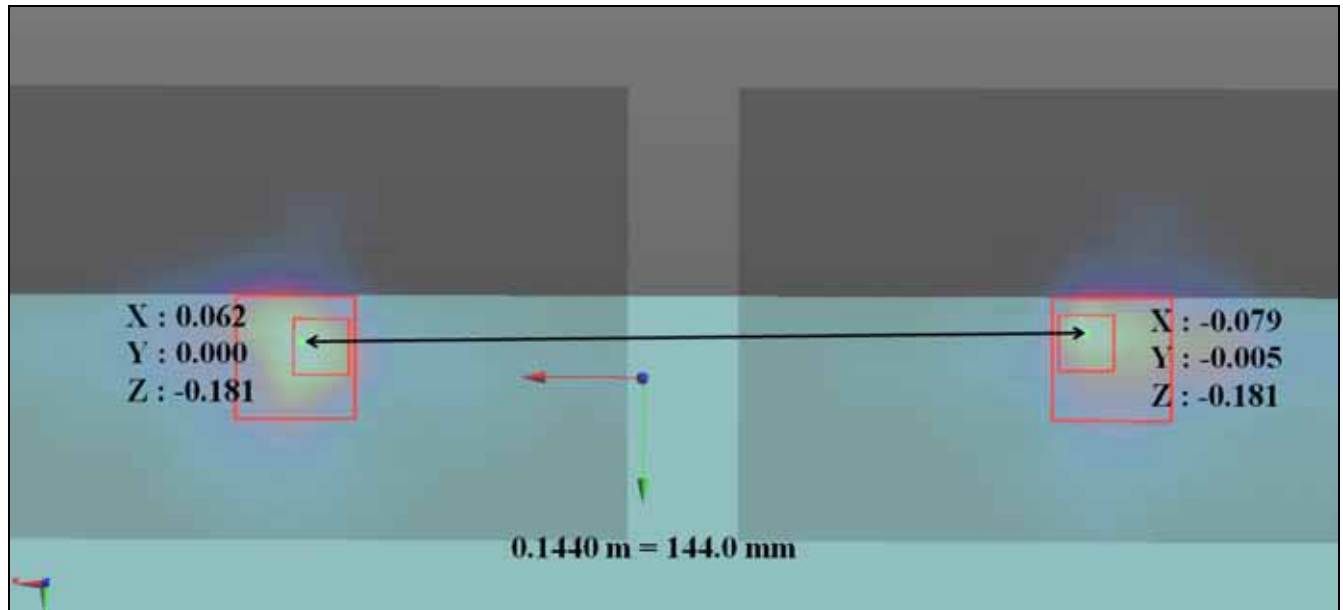

WLAN Main Ant			WLAN Aux Ant			R _i		ΣSAR (W/kg)	SPLSR (≤0.04)	Volume Scan SAR [W/kg]	Plot No
X, m	Y, m	Z, m	X, m	Y, m	Z, m	m	mm				
0.060	-0.005	-0.180	-0.078	-0.007	-0.181	0.138	138.0	1.689	0.016	-	-

Appendixes List

Appendix A

- A.1 Verification Test Plots for 2450MHz
- A.2 Verification Test Plots for 5300 MHz
- A.3 Verification Test Plots for 5600 MHz
- A.4 Verification Test Plots for 5800 MHz
- A.5 SAR Test Plots for WLAN 2450 MHz Main (Notebook Mode)
- A.6 SAR Test Plots for WLAN 2450 MHz Aux (Notebook Mode)
- A.7 SAR Test Plots for WLAN 5300 MHz Main (Notebook Mode)
- A.8 SAR Test Plots for WLAN 5300 MHz Aux (Notebook Mode)
- A.9 SAR Test Plots for WLAN 5600 MHz Main (Notebook Mode)
- A.10 SAR Test Plots for WLAN 5600 MHz Aux (Notebook Mode)
- A.11 SAR Test Plots for WLAN 5800 MHz Main (Notebook Mode)
- A.12 SAR Test Plots for WLAN 5800 MHz Aux (Notebook Mode)
- A.13 SAR Test Plots for WLAN 2450 MHz Main (Tablet Mode)
- A.14 SAR Test Plots for WLAN 2450 MHz Aux (Tablet Mode)
- A.15 SAR Test Plots for WLAN 5600 MHz Main (Tablet Mode)
- A.16 SAR Test Plots for WLAN 5600 MHz Aux (Tablet Mode)

Appendix B

- B.1 Calibration certificate for Probe
- B.2 Calibration certificate for DAE
- B.3 Calibration certificate for Dipole

Appendix A.1 Verification Test Plots for 2450 MHz

Date: 2018-04-17

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [2450MHz Verification 2018_04_17.da53.0](#)

Input Power : 100 mW

Ambient Temp : 22.2 °C Tissue Temp : 21.5 °C

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:892

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 50.859$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/2450MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 7.10 W/kg


Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 65.66 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.38 W/kg

SAR(1 g) = 4.79 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 7.75 W/kg

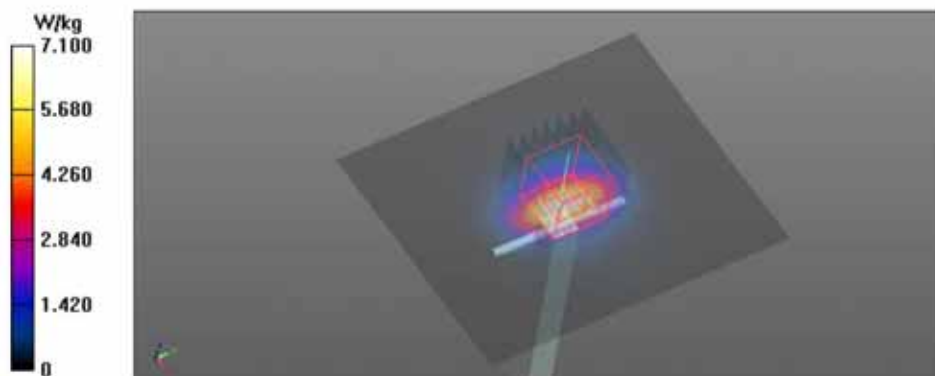

Date: 2018-04-18

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [2450MHz Verification 2018_04_18 da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.1 °C Tissue Temp : 21.5 °C

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:892

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/2450MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 7.93 W/kg


Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.31 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.47 W/kg

SAR(1 g) = 4.88 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 7.89 W/kg

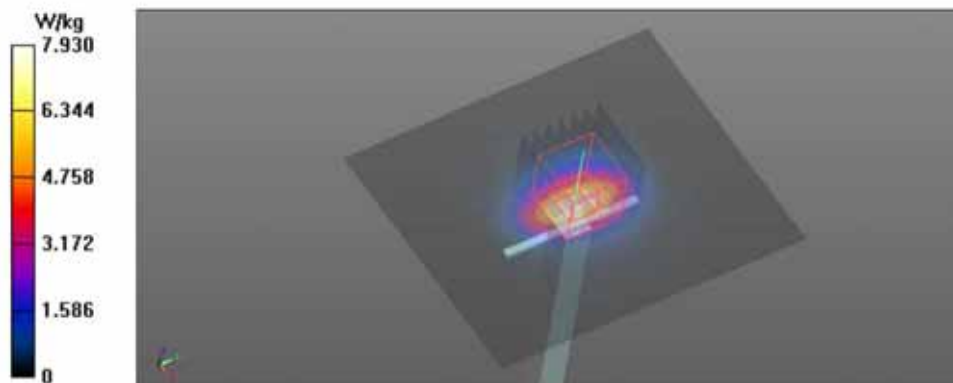

Appendix A.2 Verification Test Plots for 5300 MHz

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [5300MHz Verification_2018_04_19.da53.0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1106

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.439$ S/m; $\epsilon_r = 49.543$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.81, 4.81, 4.81); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5300MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 22.1 W/kg


Verification/5300MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.71 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 36.9 W/kg

SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 22.1 W/kg

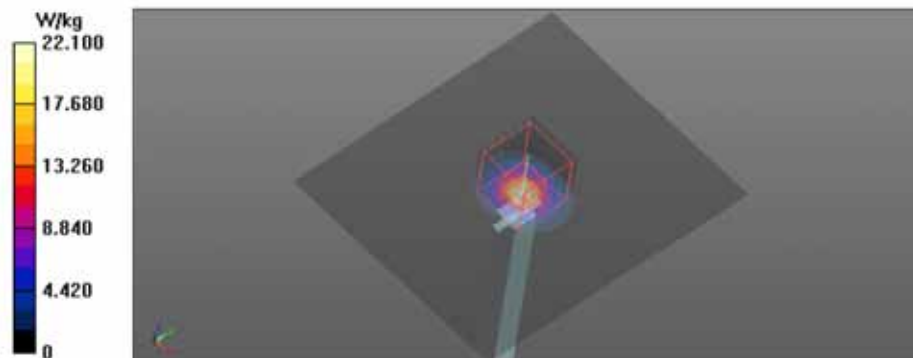

Appendix A.3 Verification Test Plots for 5600 MHz

Date: 2018-04-20

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [5600MHz Verification 2018_04_20.da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1106

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.827$ S/m; $\epsilon_r = 49.011$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.13, 4.13, 4.13); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5600MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 21.0 W/kg


Verification/5600MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.09 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 8.28 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 21.9 W/kg

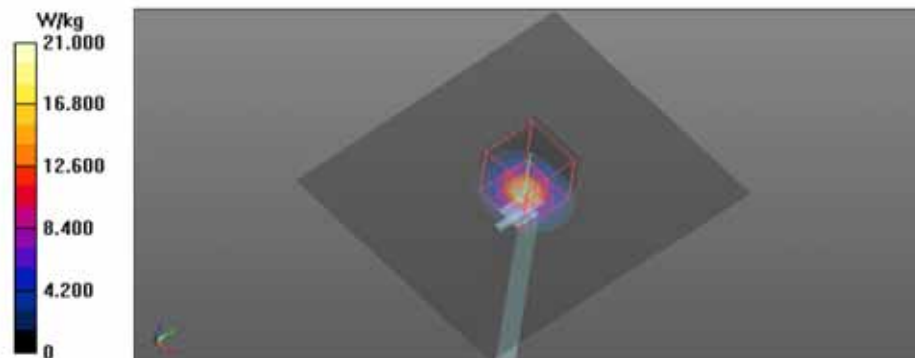

Appendix A.4 Verification Test Plots for 5800 MHz

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [5800MHz Verification 2018_04_19 da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1106

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 6.138$ S/m; $\epsilon_r = 49.786$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.28, 4.28, 4.28); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5800MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 21.1 W/kg


Verification/5800MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.98 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

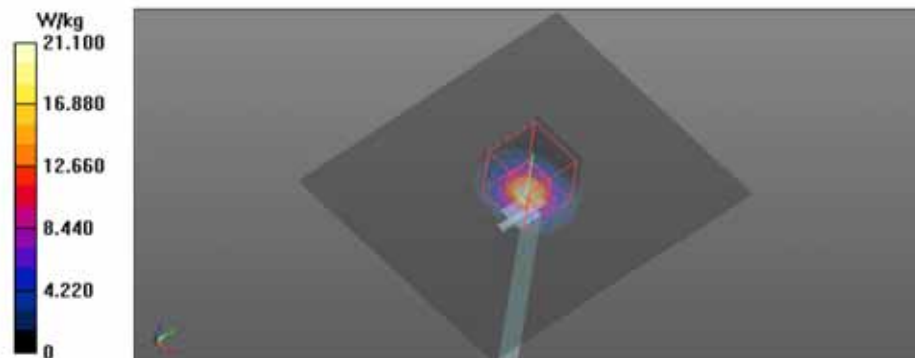

Appendix A.5 SAR Test Plots for WLAN 2.4GHz Main (Notebook Mode)

Date: 2018-04-18

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11n HT40 Base CH3 Main.da53.0](#)

Ambient Temp : 22.1 °C Tissue Temp : 21.5 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 2.4GHz WLAN (0); Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 52.805$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH3_Main/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.48 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH3_Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.07 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 2.66 W/kg

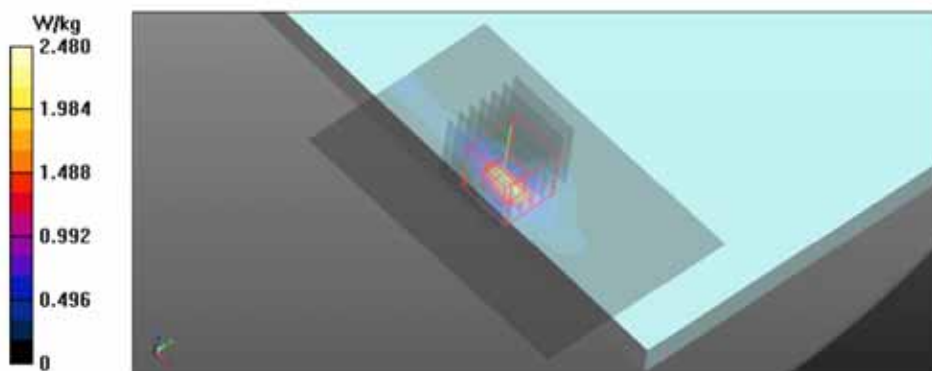

Appendix A.6 SAR Test Plots for WLAN 2.4GHz Aux (Notebook Mode)

Date: 2018-04-17

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11b Base CH6 Aux.da53.0](#)

Ambient Temp : 22.2 °C Tissue Temp : 21.5 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 2.4GHz WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.885$ S/m; $\epsilon_r = 50.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11b_Base_CH6_Aux/Area Scan (121x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.92 W/kg

Body/2.4GHz_WLAN_802.11b_Base_CH6_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

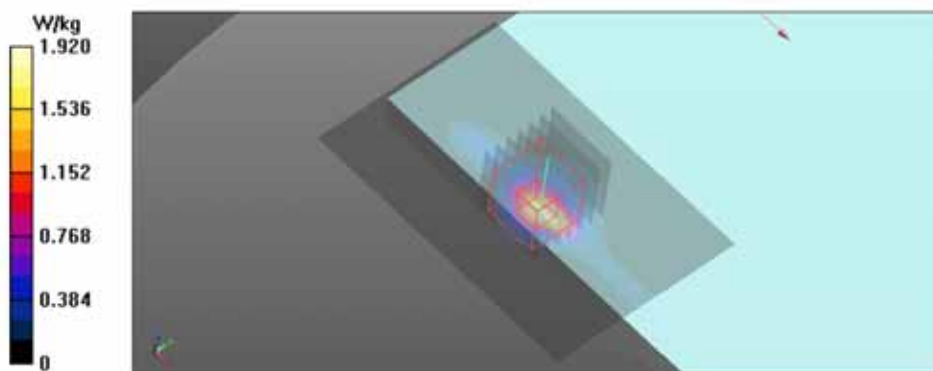

Appendix A.7 SAR Test Plots for WLAN 5.3GHz Main (Notebook Mode)

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.3GHz WLAN 802.11ac VHT80 Base CH58 Main.da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.386$ S/m; $\epsilon_r = 49.817$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.81, 4.81, 4.81); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Snl503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz WLAN 802.11ac VHT80 Base CH58 Main/Area Scan (121x81x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.22 W/kg

Body/5.3GHz WLAN 802.11ac VHT80 Base CH58 Main/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.227 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

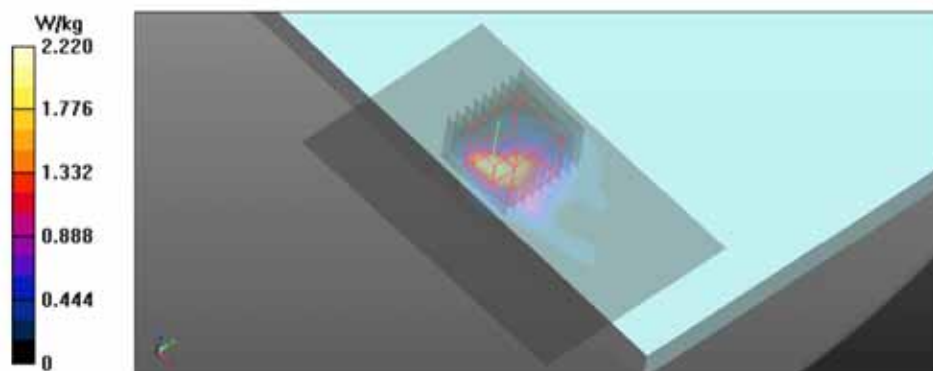

Appendix A.8 SAR Test Plots for WLAN 5.3GHz Aux (Notebook Mode)

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.3GHz_WLAN_802.11ac_VHT80_Base_CH58_Aux_da53-0

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.386$ S/m; $\epsilon_r = 49.817$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.81, 4.81, 4.81); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz_WLAN_802.11ac_VHT80_Base_CH58_Aux/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.93 W/kg

Body/5.3GHz_WLAN_802.11ac_VHT80_Base_CH58_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.487 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

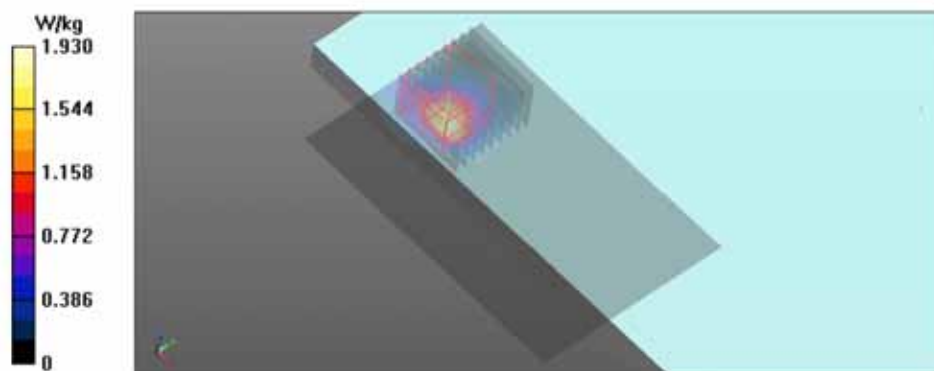

Appendix A.9 SAR Test Plots for WLAN 5.6GHz Main (Notebook Mode)

Date: 2018-04-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.6GHz WLAN 802.11ac VHT80 Base CH138 Main Repeat Test.da53.0

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.86$ S/m; $\epsilon_r = 48.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.13, 4.13, 4.13); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Base_CH138_Main_Repeat Test/Area Scan (121x81x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 3.14 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Base_CH138_Main_Repeat Test/Zoom Scan (9x9x7)/Cube


0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.919 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 6.79 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 2.96 W/kg

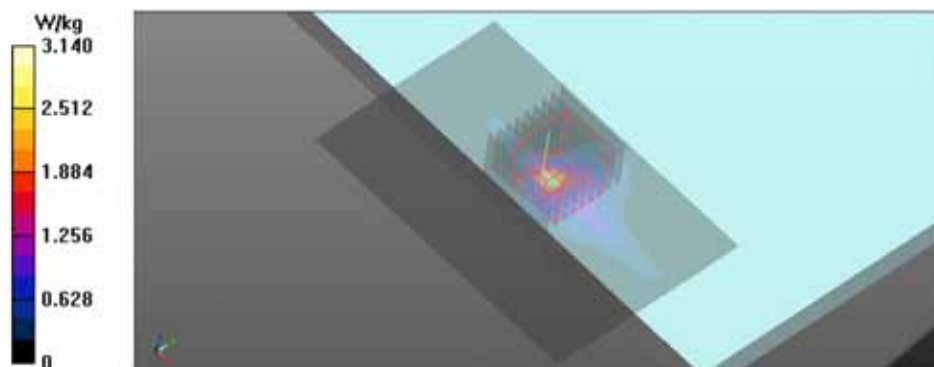

Appendix A.10 SAR Test Plots for WLAN 5.6GHz Aux (Notebook Mode)

Date: 2018-04-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz WLAN 802.11ac VHT80 Base CH106 Aux.da53-0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.691$ S/m; $\epsilon_r = 49.055$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.13, 4.13, 4.13); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Base_CH106_Aux/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.00 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Base_CH106_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.285 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

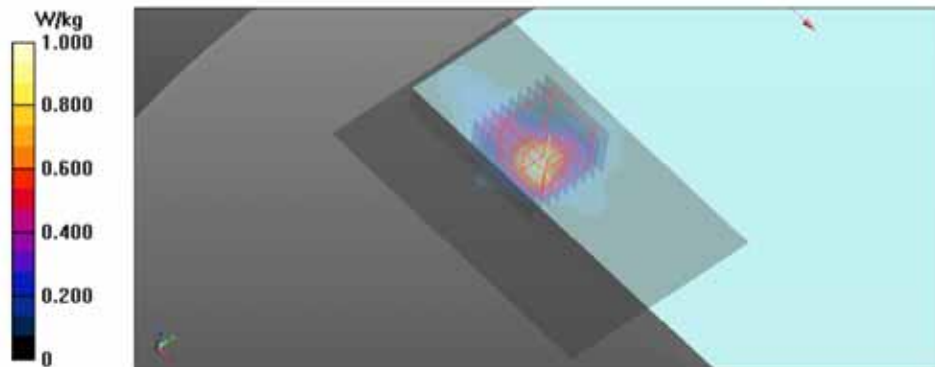

Appendix A.11 SAR Test Plots for WLAN 5.8GHz Main (Notebook Mode)

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.8GHz WLAN 802.11ac VHT80 Base CH155 Main da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.214$ S/m; $\epsilon_r = 49.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.28, 4.28, 4.28); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Main/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Main/Zoom Scan (9x9x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.485 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 5.30 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 2.91 W/kg

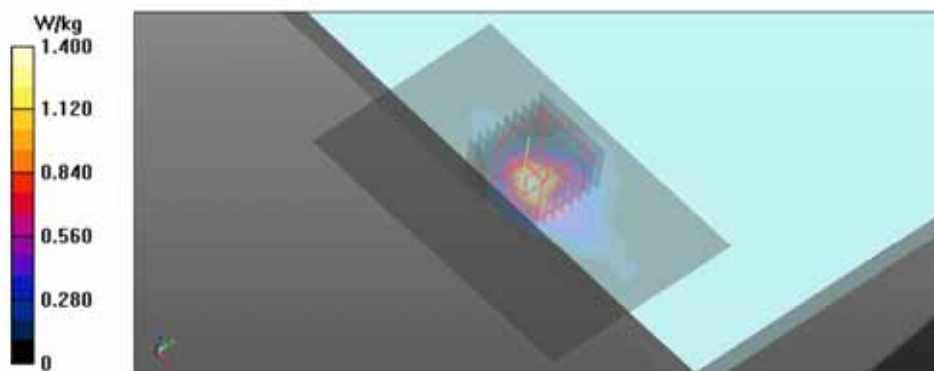

Appendix A.12 SAR Test Plots for WLAN 5.8GHz Aux (Notebook Mode)

Date: 2018-04-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.8GHz WLAN 802.11ac VHT80 Base CH155 Aux.da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.214$ S/m; $\epsilon_r = 49.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.28, 4.28, 4.28); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Aux/Area Scan (121x81x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.011 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

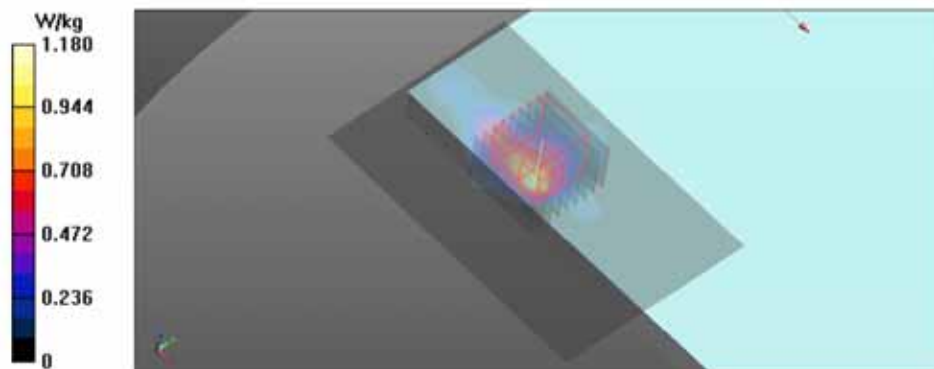

Appendix A.13 SAR Test Plots for WLAN 2.4GHz Main (Tablet Mode)

Date: 2018-04-18

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11n HT40 Rear CH3 Main.da53.0](#)

Ambient Temp : 22.1 °C Tissue Temp : 21.5 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 2.4GHz WLAN (0); Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 52.805$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Rear_CH3_Main/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Rear_CH3_Main/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.7900 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

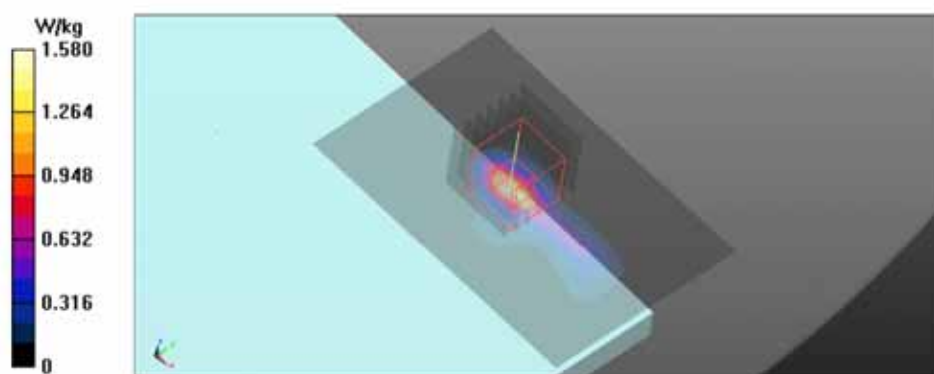

Appendix A.14 SAR Test Plots for WLAN 2.4GHz Aux (Tablet Mode)

Date: 2018-04-17

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11b Rear CH6 Aux.da53.0](#)

Ambient Temp : 22.2 °C Tissue Temp : 21.5 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 2.4GHz WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.885$ S/m; $\epsilon_r = 50.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(7.6, 7.6, 7.6); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11b_Rear_CH6_Aux/Area Scan (121x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.960 W/kg

Body/2.4GHz_WLAN_802.11b_Rear_CH6_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.06 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.972 W/kg

Body/2.4GHz_WLAN_802.11b_Rear_CH6_Aux/Zoom Scan (7x7x7)/Cube 1: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.06 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.851 W/kg

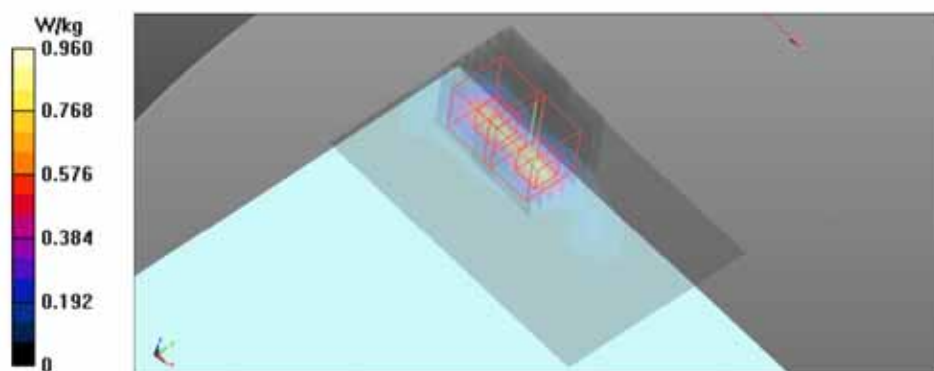

Appendix A.15 SAR Test Plots for WLAN 5.6GHz Main (Tablet Mode)

Date: 2018-04-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz WLAN 802.11ac VHT80 Rear CH106 Main.da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.691$ S/m; $\epsilon_r = 49.055$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.13, 4.13, 4.13); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Rear_CH106_Main/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.96 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Rear_CH106_Main/Zoom Scan (9x9x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.114 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 2.46 W/kg

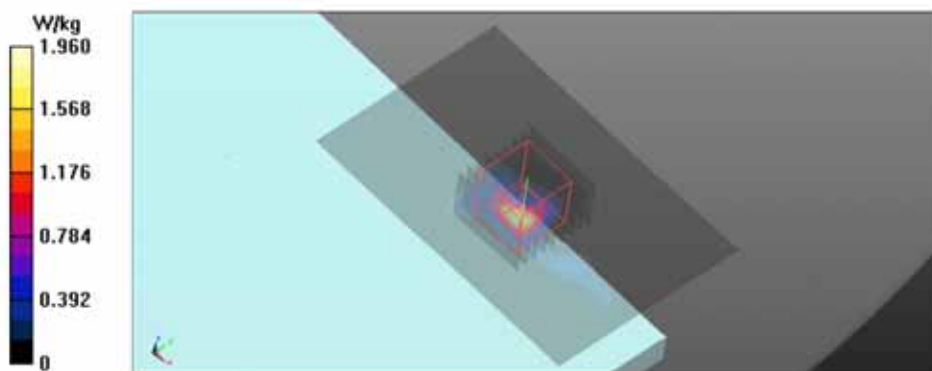

Appendix A.16 SAR Test Plots for WLAN 5.6GHz Aux (Tablet Mode)

Date: 2018-04-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.6GHz WLAN 802.11ac VHT80 Rear CH138 Aux da53-0

Ambient Temp : 22.3 °C Tissue Temp : 21.6 °C

DUT: XE521QAB; Type: NOTEBOOK PC; Serial: 0UCV91ZK200112E

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.86$ S/m; $\epsilon_r = 48.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(4.13, 4.13, 4.13); Calibrated: 7/26/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 8/3/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Rear_CH138_Aux/Area Scan (121x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.830 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Rear_CH138_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.135 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

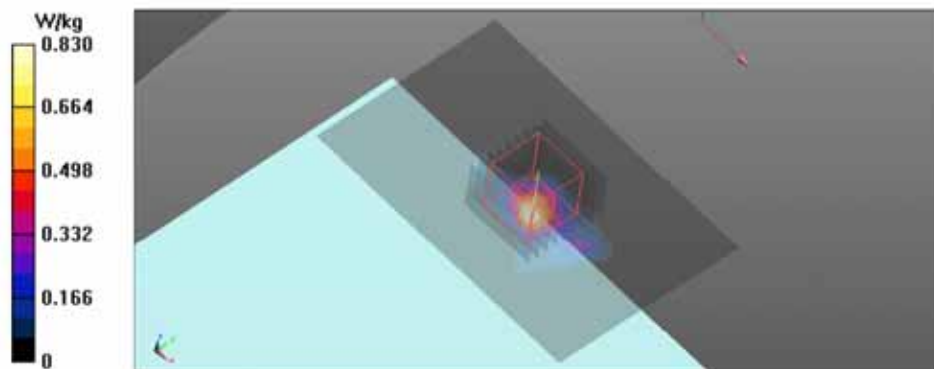

Appendix B.1 Calibration certificate for Probe(S/N 7413)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**


Client **SGS Korea (Dymstec)**

Certificate No: **EX3-7413_Jul17**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7413**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes



Calibration date: **July 26, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013, Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660, Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498057	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: July 26, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-7413_Jul17

Page 1 of 38

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center). i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 - SN:7413

July 26, 2017

Probe EX3DV4

SN:7413

Manufactured: March 10, 2016
Calibrated: July 26, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7413

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$) ^A	0.44	0.58	0.41	± 10.1 %
DCP (mV) ^B	118.5	96.3	97.2	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	146.6	±2.7 %
		Y	0.0	0.0	1.0		143.4	
		Z	0.0	0.0	1.0		155.8	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
X	43.21	295.5	30.90	8.791	0.000	5.036	0.000	0.402	0.992
Y	43.15	325.3	36.22	17.03	0.307	5.100	0.500	0.463	1.005
Z	43.03	324.9	36.34	17.87	0.113	5.100	1.091	0.397	1.008

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7413

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
835	41.5	0.90	9.72	9.72	9.72	0.48	0.83	± 12.0 %
900	41.5	0.97	9.49	9.49	9.49	0.44	0.80	± 12.0 %
1750	40.1	1.37	8.60	8.60	8.60	0.30	0.99	± 12.0 %
1900	40.0	1.40	8.27	8.27	8.27	0.35	0.85	± 12.0 %
2300	39.5	1.67	7.89	7.89	7.89	0.39	0.87	± 12.0 %
2450	39.2	1.80	7.43	7.43	7.43	0.39	0.90	± 12.0 %
2600	39.0	1.96	7.08	7.08	7.08	0.36	0.96	± 12.0 %
5200	36.0	4.66	5.66	5.66	5.66	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.44	5.44	5.44	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.72	4.72	4.72	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.94	4.94	4.94	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7413

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
835	55.2	0.97	9.58	9.58	9.58	0.55	0.80	± 12.0 %
1750	53.4	1.49	8.42	8.42	8.42	0.25	0.99	± 12.0 %
1900	53.3	1.52	8.07	8.07	8.07	0.37	0.85	± 12.0 %
2450	52.7	1.95	7.60	7.60	7.60	0.43	0.95	± 12.0 %
2600	52.5	2.16	7.28	7.28	7.28	0.30	1.05	± 12.0 %
5200	49.0	5.30	4.98	4.98	4.98	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.81	4.81	4.81	0.40	1.90	± 13.1 %
5600	48.5	5.77	4.13	4.13	4.13	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.28	4.28	4.28	0.50	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7413

July 26, 2017

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

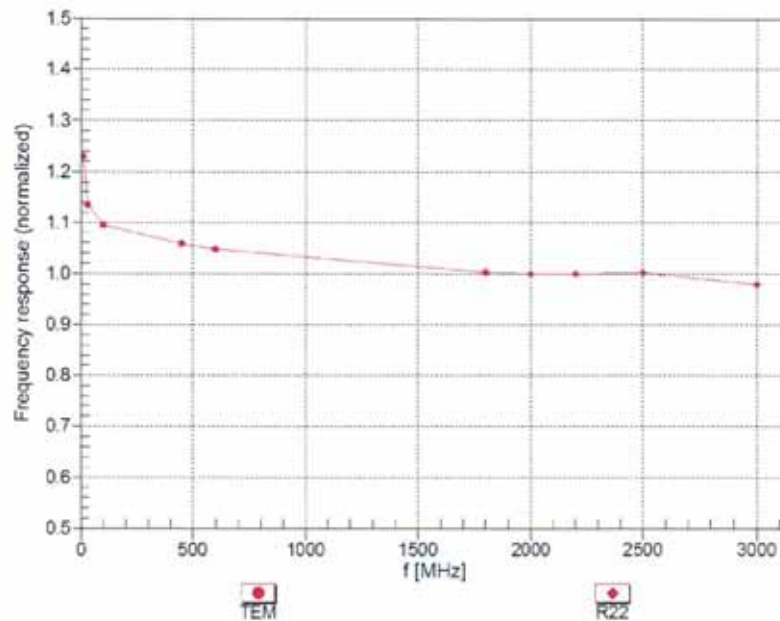


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:7413



July 26, 2017

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM

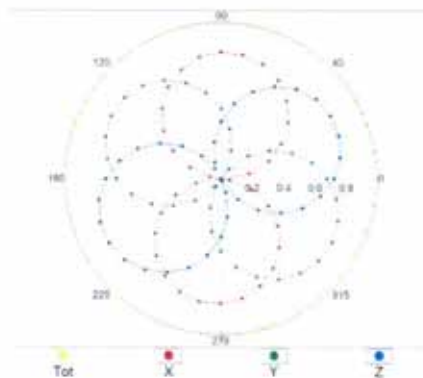

f=1800 MHz, R22

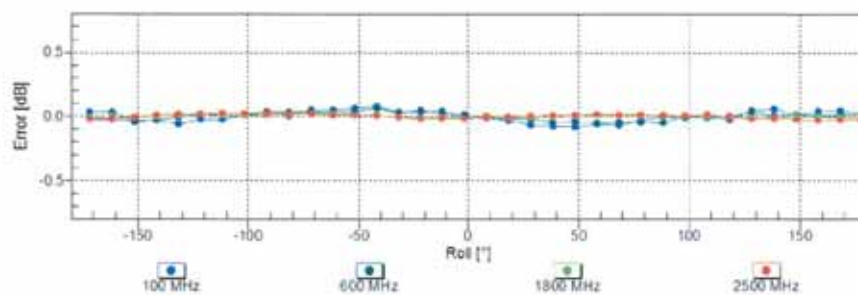
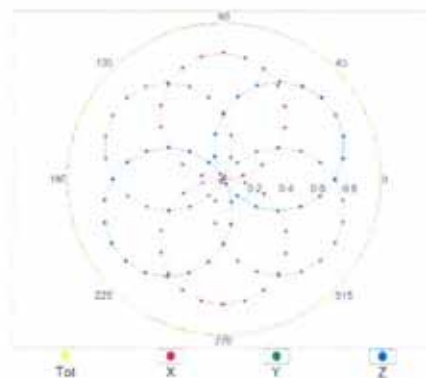


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:7413

July 26, 2017

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

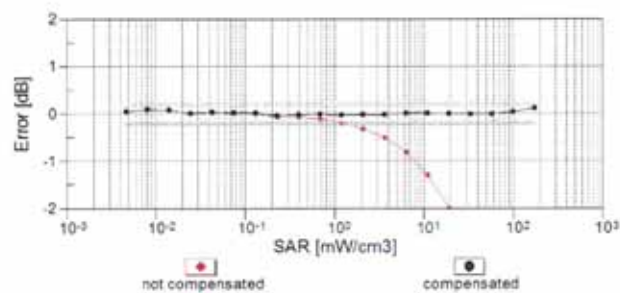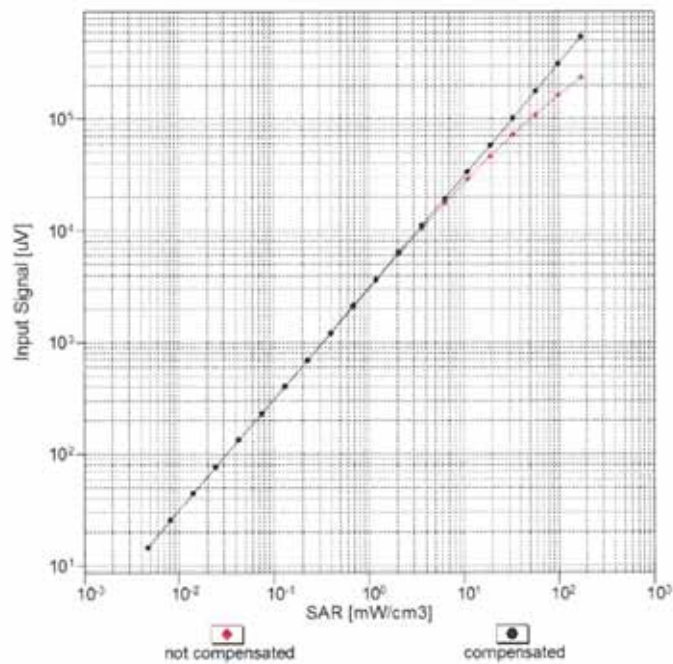

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


Certificate No: EX3-7413_Jul17

Page 9 of 38


EX3DV4- SN:7413

July 26, 2017

Conversion Factor Assessment

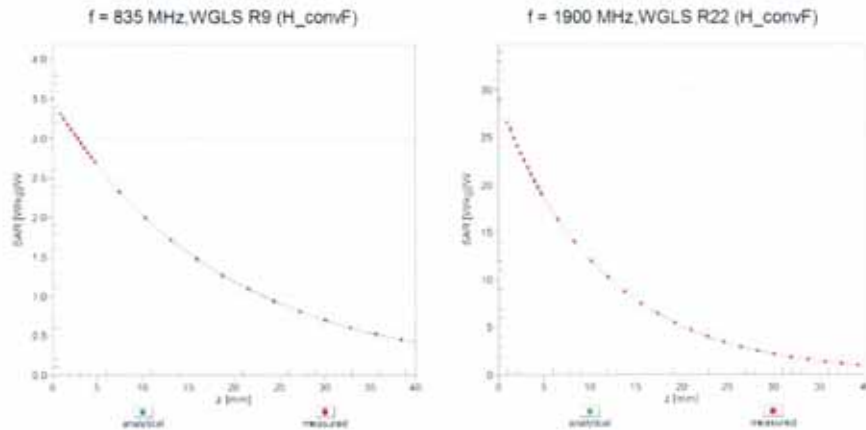

Deviation from Isotropy in Liquid Error (ϕ , θ), $f = 900$ MHz

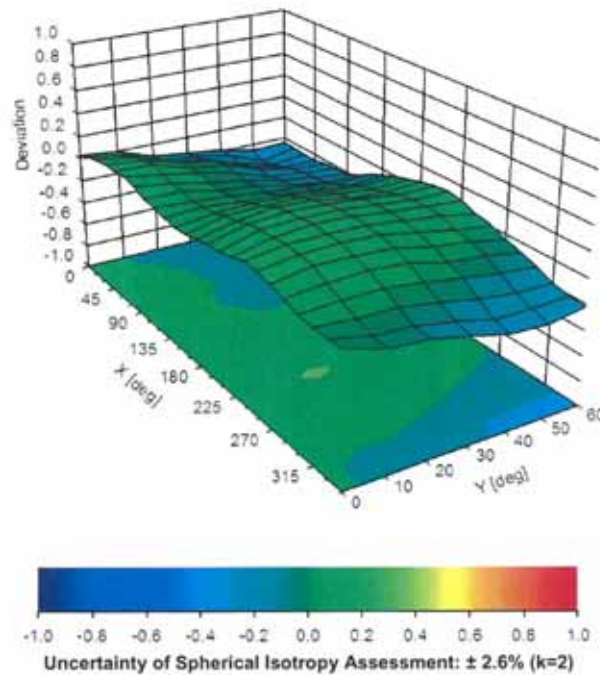

Certificate No: EX3-7413_Jul17

Page 10 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	58.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4-SN:7413

July 26, 2017

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB-μV	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	146.6	± 2.7 %
		Y	0.00	0.00	1.00		143.4	
		Z	0.00	0.00	1.00		155.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	1.70	63.36	8.03	10.00	20.0	± 9.6 %
		Y	18.07	89.37	19.08		20.0	
		Z	8.55	80.82	16.03		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	3.14	90.04	25.83	0.00	150.0	± 9.6 %
		Y	1.02	67.08	15.16		150.0	
		Z	1.04	67.40	15.36		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.31	68.08	18.42	0.41	150.0	± 9.6 %
		Y	1.20	64.07	15.44		150.0	
		Z	1.21	64.17	15.53		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.81	67.43	17.43	1.46	150.0	± 9.6 %
		Y	4.88	66.86	17.27		150.0	
		Z	4.87	66.86	17.29		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	106.18	23.00	9.39	50.0	± 9.6 %
		Y	100.00	120.28	30.18		50.0	
		Z	100.00	118.67	29.17		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	105.64	22.80	9.57	50.0	± 9.6 %
		Y	100.00	119.60	29.91		50.0	
		Z	100.00	117.95	28.87		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	109.44	23.46	6.56	60.0	± 9.6 %
		Y	100.00	120.58	29.41		60.0	
		Z	100.00	119.14	28.58		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	5.15	79.57	31.18	12.57	50.0	± 9.6 %
		Y	4.73	75.08	29.64		50.0	
		Z	5.29	80.31	32.83		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	9.71	96.80	34.91	9.56	60.0	± 9.6 %
		Y	10.56	97.28	35.49		60.0	
		Z	11.85	101.30	37.19		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	117.89	26.35	4.80	80.0	± 9.6 %
		Y	100.00	122.90	29.71		80.0	
		Z	100.00	121.64	29.02		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	136.90	33.51	3.55	100.0	± 9.6 %
		Y	100.00	126.63	30.61		100.0	
		Z	100.00	125.56	30.05		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	5.39	82.56	28.27	7.80	80.0	± 9.6 %
		Y	6.45	84.67	29.31		80.0	
		Z	6.74	86.31	30.12		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	110.55	23.51	5.30	70.0	± 9.6 %
		Y	100.00	119.20	28.36		70.0	
		Z	100.00	117.79	27.59		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	203.05	57.46	1.88	100.0	± 9.6 %
		Y	100.00	128.66	29.95		100.0	
		Z	100.00	127.82	29.55		100.0	

Certificate No: EX3-7413_Jul17

Page 12 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	366.59	116.90	1.17	100.0	± 9.6 %
		Y	100.00	138.85	32.98		100.0	
		Z	100.00	138.98	32.98		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	100.00	132.73	35.67	5.30	70.0	± 9.6 %
		Y	100.00	131.16	35.70		70.0	
		Z	100.00	131.27	35.66		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	100.00	133.89	34.80	1.88	100.0	± 9.6 %
		Y	10.07	94.43	24.06		100.0	
		Z	12.11	97.02	24.76		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	100.00	134.69	34.80	1.17	100.0	± 9.6 %
		Y	3.66	81.11	19.45		100.0	
		Z	4.00	82.36	19.86		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	100.00	133.48	36.01	5.30	70.0	± 9.6 %
		Y	100.00	131.68	35.94		70.0	
		Z	100.00	131.79	35.90		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	100.00	133.95	34.78	1.88	100.0	± 9.6 %
		Y	8.26	91.75	23.25		100.0	
		Z	9.76	94.11	23.91		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	100.00	135.84	35.30	1.17	100.0	± 9.6 %
		Y	3.72	81.67	19.79		100.0	
		Z	4.07	82.96	20.20		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	100.00	133.58	34.19	0.00	150.0	± 9.6 %
		Y	1.73	71.56	15.20		150.0	
		Z	1.78	71.95	15.37		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	100.00	104.04	21.35	7.78	50.0	± 9.6 %
		Y	100.00	116.02	27.54		50.0	
		Z	100.00	114.42	26.62		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.00	117.65	1.67	0.00	150.0	± 9.6 %
		Y	0.00	93.92	0.68		150.0	
		Z	0.00	93.85	0.03		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	43.41	92.84	20.33	13.80	25.0	± 9.6 %
		Y	100.00	119.81	31.15		25.0	
		Z	890.76	147.94	36.04		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	100.00	103.98	22.39	10.79	40.0	± 9.6 %
		Y	100.00	117.75	29.31		40.0	
		Z	100.00	115.84	28.10		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	100.00	122.01	31.91	9.03	50.0	± 9.6 %
		Y	100.00	127.79	35.28		50.0	
		Z	100.00	127.89	35.16		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.15	77.08	25.20	6.55	100.0	± 9.6 %
		Y	4.94	78.82	26.01		100.0	
		Z	5.06	79.73	26.50		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.38	69.89	19.40	0.61	110.0	± 9.6 %
		Y	1.26	65.45	16.25		110.0	
		Z	1.27	65.59	16.36		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	160.41	44.84	1.30	110.0	± 9.6 %
		Y	100.00	141.42	37.42		110.0	
		Z	100.00	141.77	37.55		110.0	

Certificate No: EX3-7413_Jul17

Page 13 of 38

EX3DV4- SN:7413

July 26, 2017

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	14.71	116.94	35.42	2.04	110.0	± 9.6 %
		Y	4.58	89.09	25.94		110.0	
		Z	5.03	91.04	26.65		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.67	67.66	17.02	0.49	100.0	± 9.6 %
		Y	4.66	66.77	16.61		100.0	
		Z	4.66	66.78	16.63		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.68	67.73	17.10	0.72	100.0	± 9.6 %
		Y	4.68	66.88	16.73		100.0	
		Z	4.68	66.89	16.76		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.94	67.88	17.25	0.86	100.0	± 9.6 %
		Y	4.95	67.13	16.96		100.0	
		Z	4.95	67.14	16.98		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.80	67.74	17.33	1.21	100.0	± 9.6 %
		Y	4.83	67.06	17.10		100.0	
		Z	4.83	67.06	17.12		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.80	67.70	17.46	1.46	100.0	± 9.6 %
		Y	4.86	67.10	17.28		100.0	
		Z	4.85	67.10	17.30		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.06	67.73	17.79	2.04	100.0	± 9.6 %
		Y	5.15	67.33	17.77		100.0	
		Z	5.15	67.33	17.79		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.07	67.66	17.95	2.55	100.0	± 9.6 %
		Y	5.20	67.35	18.00		100.0	
		Z	5.19	67.34	18.01		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.14	67.59	18.09	2.67	100.0	± 9.6 %
		Y	5.28	67.35	18.19		100.0	
		Z	5.26	67.35	18.21		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.88	67.42	17.66	1.99	100.0	± 9.6 %
		Y	4.98	66.97	17.60		100.0	
		Z	4.97	66.97	17.62		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.85	67.73	17.88	2.30	100.0	± 9.6 %
		Y	4.96	67.31	17.85		100.0	
		Z	4.95	67.31	17.87		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.88	67.81	18.15	2.83	100.0	± 9.6 %
		Y	5.03	67.52	18.22		100.0	
		Z	5.02	67.50	18.24		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.85	67.64	18.26	3.30	100.0	± 9.6 %
		Y	5.02	67.44	18.40		100.0	
		Z	5.00	67.42	18.41		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.86	67.65	18.51	3.82	90.0	± 9.6 %
		Y	5.06	67.54	18.72		90.0	
		Z	5.04	67.51	18.73		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.86	67.38	18.59	4.15	90.0	± 9.6 %
		Y	5.07	67.35	18.86		90.0	
		Z	5.05	67.31	18.87		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.88	67.42	18.67	4.30	90.0	± 9.6 %
		Y	5.10	67.42	18.96		90.0	
		Z	5.08	67.38	18.97		90.0	

Certificate No: EX3-7413_Jul17

Page 14 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10081-CAB	CDMA2000 (1xRTT, RC3)	X	100.00	138.00	34.90	0.00	150.0	± 9.6 %
		Y	0.80	65.64	12.13		150.0	
		Z	0.82	65.89	12.27		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	5.34	66.35	5.42	4.77	80.0	± 9.6 %
		Y	0.78	60.00	4.92		80.0	
		Z	0.76	60.00	4.75		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	109.42	23.46	6.56	60.0	± 9.6 %
		Y	100.00	120.60	29.44		60.0	
		Z	100.00	119.16	28.61		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	2.85	77.33	20.64	0.00	150.0	± 9.6 %
		Y	1.83	67.74	15.65		150.0	
		Z	1.84	67.90	15.75		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.82	77.44	20.69	0.00	150.0	± 9.6 %
		Y	1.79	67.69	15.62		150.0	
		Z	1.81	67.85	15.72		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	9.82	97.07	35.00	9.56	60.0	± 9.6 %
		Y	10.67	97.50	35.57		60.0	
		Z	12.00	101.60	37.29		60.0	
10100-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	4.35	77.47	20.18	0.00	150.0	± 9.6 %
		Y	3.07	70.08	16.67		150.0	
		Z	3.09	70.20	16.75		150.0	
10101-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.55	70.44	17.59	0.00	150.0	± 9.6 %
		Y	3.20	67.38	15.91		150.0	
		Z	3.21	67.44	15.96		150.0	
10102-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.63	70.26	17.60	0.00	150.0	± 9.6 %
		Y	3.31	67.37	16.01		150.0	
		Z	3.32	67.42	16.05		150.0	
10103-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	7.09	79.87	22.32	3.98	65.0	± 9.6 %
		Y	7.22	78.69	22.05		65.0	
		Z	7.14	78.64	22.05		65.0	
10104-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	6.09	74.93	21.05	3.98	65.0	± 9.6 %
		Y	6.66	75.24	21.37		65.0	
		Z	6.72	75.57	21.54		65.0	
10105-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.52	72.82	20.43	3.98	65.0	± 9.6 %
		Y	6.33	74.12	21.18		65.0	
		Z	6.14	73.64	21.00		65.0	
10108-CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	3.73	76.61	20.09	0.00	150.0	± 9.6 %
		Y	2.67	69.34	16.50		150.0	
		Z	2.69	69.47	16.58		150.0	
10109-CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	3.26	70.88	17.83	0.00	150.0	± 9.6 %
		Y	2.86	67.26	15.80		150.0	
		Z	2.86	67.33	15.85		150.0	
10110-CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	3.15	76.57	20.21	0.00	150.0	± 9.6 %
		Y	2.16	68.49	16.07		150.0	
		Z	2.18	68.64	16.17		150.0	
10111-CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	3.36	74.28	19.32	0.00	150.0	± 9.6 %
		Y	2.58	68.23	16.08		150.0	
		Z	2.59	68.29	16.13		150.0	

Certificate No: EX3-7413_Jul17

Page 15 of 38

EX3DV4- SN:7413

July 26, 2017

10112-CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.37	70.68	17.77	0.00	150.0	± 9.6 %
		Y	2.98	67.29	15.87		150.0	
		Z	2.99	67.35	15.92		150.0	
10113-CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.49	74.06	19.26	0.00	150.0	± 9.6 %
		Y	2.73	68.40	16.23		150.0	
		Z	2.74	68.45	16.27		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.13	68.17	16.93	0.00	150.0	± 9.6 %
		Y	5.10	67.18	16.47		150.0	
		Z	5.10	67.20	16.50		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.39	68.16	16.91	0.00	150.0	± 9.6 %
		Y	5.36	67.24	16.51		150.0	
		Z	5.36	67.25	16.53		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.22	68.35	16.94	0.00	150.0	± 9.6 %
		Y	5.18	67.35	16.49		150.0	
		Z	5.19	67.37	16.51		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.10	68.06	16.89	0.00	150.0	± 9.6 %
		Y	5.06	67.04	16.42		150.0	
		Z	5.07	67.05	16.44		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.44	68.28	16.97	0.00	150.0	± 9.6 %
		Y	5.44	67.44	16.62		150.0	
		Z	5.44	67.46	16.64		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.20	68.30	16.93	0.00	150.0	± 9.6 %
		Y	5.17	67.31	16.48		150.0	
		Z	5.17	67.33	16.50		150.0	
10140-CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.67	70.24	17.50	0.00	150.0	± 9.6 %
		Y	3.34	67.38	15.93		150.0	
		Z	3.35	67.43	15.97		150.0	
10141-CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.79	70.26	17.62	0.00	150.0	± 9.6 %
		Y	3.47	67.50	16.11		150.0	
		Z	3.47	67.55	16.15		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	3.44	79.86	21.21	0.00	150.0	± 9.6 %
		Y	1.94	68.51	15.65		150.0	
		Z	1.95	68.68	15.76		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	4.22	79.53	20.77	0.00	150.0	± 9.6 %
		Y	2.43	68.97	15.68		150.0	
		Z	2.44	69.06	15.74		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.96	72.64	17.33	0.00	150.0	± 9.6 %
		Y	2.17	66.44	13.93		150.0	
		Z	2.18	66.53	13.99		150.0	
10145-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	14.38	99.45	24.33	0.00	150.0	± 9.6 %
		Y	1.11	64.20	10.91		150.0	
		Z	1.11	64.27	10.95		150.0	
10146-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.28	62.85	9.01	0.00	150.0	± 9.6 %
		Y	1.60	64.11	10.09		150.0	
		Z	1.82	65.46	10.85		150.0	
10147-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.42	63.92	9.71	0.00	150.0	± 9.6 %
		Y	1.78	65.35	10.84		150.0	
		Z	2.13	67.26	11.83		150.0	

Certificate No: EX3-7413_Jul17

Page 16 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10149-CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	3.28	70.99	17.90	0.00	150.0	± 9.6 %
		Y	2.86	67.33	15.85		150.0	
		Z	2.87	67.39	15.90		150.0	
10150-CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.38	70.77	17.83	0.00	150.0	± 9.6 %
		Y	2.99	67.35	15.91		150.0	
		Z	3.00	67.40	15.96		150.0	
10151-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.07	84.06	24.07	3.98	65.0	± 9.6 %
		Y	7.99	82.23	23.52		65.0	
		Z	8.22	82.93	23.80		65.0	
10152-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.68	75.19	20.91	3.98	65.0	± 9.6 %
		Y	6.24	75.48	21.16		65.0	
		Z	6.31	75.86	21.36		65.0	
10153-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	6.12	76.41	21.81	3.98	65.0	± 9.6 %
		Y	6.67	76.58	22.00		65.0	
		Z	6.74	76.95	22.18		65.0	
10154-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	3.34	77.71	20.75	0.00	150.0	± 9.6 %
		Y	2.21	68.89	16.32		150.0	
		Z	2.22	69.03	16.41		150.0	
10155-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	3.37	74.30	19.34	0.00	150.0	± 9.6 %
		Y	2.58	68.25	16.11		150.0	
		Z	2.59	68.32	16.16		150.0	
10156-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	4.11	84.13	22.55	0.00	150.0	± 9.6 %
		Y	1.78	68.53	15.36		150.0	
		Z	1.79	68.72	15.47		150.0	
10157-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	3.49	76.92	18.89	0.00	150.0	± 9.6 %
		Y	2.00	66.95	13.89		150.0	
		Z	2.01	67.06	13.96		150.0	
10158-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	3.52	74.21	19.34	0.00	150.0	± 9.6 %
		Y	2.74	68.47	16.28		150.0	
		Z	2.75	68.52	16.32		150.0	
10159-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	3.92	78.44	19.54	0.00	150.0	± 9.6 %
		Y	2.11	67.40	14.17		150.0	
		Z	2.12	67.49	14.22		150.0	
10160-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.33	73.65	19.02	0.00	150.0	± 9.6 %
		Y	2.71	68.59	16.31		150.0	
		Z	2.72	68.70	16.39		150.0	
10161-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.30	70.96	17.89	0.00	150.0	± 9.6 %
		Y	2.88	67.31	15.83		150.0	
		Z	2.89	67.37	15.88		150.0	
10162-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.42	71.03	17.94	0.00	150.0	± 9.6 %
		Y	3.00	67.49	15.95		150.0	
		Z	3.00	67.54	16.00		150.0	
10166-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.20	68.69	18.21	3.01	150.0	± 9.6 %
		Y	3.48	69.24	18.96		150.0	
		Z	3.64	70.14	19.52		150.0	
10167-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.75	70.86	18.36	3.01	150.0	± 9.6 %
		Y	4.24	72.08	19.38		150.0	
		Z	4.62	73.72	20.21		150.0	

Certificate No: EX3-7413_Jul17

Page 17 of 38

EX3DV4-SN:7413

July 26, 2017

10168-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.24	73.41	19.88	3.01	150.0	± 9.6 %
		Y	4.74	74.52	20.82		150.0	
		Z	5.24	76.43	21.72		150.0	
10169-CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.54	67.44	17.64	3.01	150.0	± 9.6 %
		Y	2.89	68.35	18.55		150.0	
		Z	3.10	69.72	19.34		150.0	
10170-CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.30	72.50	19.74	3.01	150.0	± 9.6 %
		Y	3.89	73.98	20.81		150.0	
		Z	4.54	76.88	22.11		150.0	
10171-AAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.67	68.33	16.80	3.01	150.0	± 9.6 %
		Y	3.22	69.99	18.08		150.0	
		Z	3.63	72.17	19.14		150.0	
10172-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.50	81.38	24.41	6.02	65.0	± 9.6 %
		Y	9.22	94.46	30.27		65.0	
		Z	10.26	97.56	31.61		65.0	
10173-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	9.35	90.84	25.63	6.02	65.0	± 9.6 %
		Y	24.68	108.76	32.56		65.0	
		Z	64.02	127.17	37.57		65.0	
10174-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	6.22	83.14	22.47	6.02	65.0	± 9.6 %
		Y	18.47	101.98	29.99		65.0	
		Z	30.86	111.91	32.98		65.0	
10175-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.51	67.13	17.37	3.01	150.0	± 9.6 %
		Y	2.86	68.06	18.31		150.0	
		Z	3.06	69.41	19.09		150.0	
10176-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.30	72.52	19.75	3.01	150.0	± 9.6 %
		Y	3.90	74.00	20.82		150.0	
		Z	4.55	76.90	22.12		150.0	
10177-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.53	67.28	17.47	3.01	150.0	± 9.6 %
		Y	2.88	68.19	18.40		150.0	
		Z	3.09	69.55	19.18		150.0	
10178-CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.27	72.31	19.63	3.01	150.0	± 9.6 %
		Y	3.87	73.82	20.72		150.0	
		Z	4.50	76.69	22.01		150.0	
10179-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	2.95	70.24	18.11	3.01	150.0	± 9.6 %
		Y	3.52	71.86	19.31		150.0	
		Z	4.04	74.39	20.49		150.0	
10180-CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.67	68.27	16.75	3.01	150.0	± 9.6 %
		Y	3.21	69.94	18.03		150.0	
		Z	3.63	72.10	19.10		150.0	
10181-CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.52	67.26	17.46	3.01	150.0	± 9.6 %
		Y	2.88	68.18	18.39		150.0	
		Z	3.08	69.54	19.18		150.0	
10182-CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.26	72.29	19.62	3.01	150.0	± 9.6 %
		Y	3.86	73.80	20.71		150.0	
		Z	4.49	76.66	22.00		150.0	
10183-AAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.66	68.24	16.74	3.01	150.0	± 9.6 %
		Y	3.20	69.92	18.02		150.0	
		Z	3.62	72.08	19.09		150.0	

EX3DV4- SN:7413

July 26, 2017

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.53	67.31	17.49	3.01	150.0	± 9.6 %
		Y	2.89	68.22	18.41		150.0	
		Z	3.09	69.58	19.20		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.28	72.36	19.65	3.01	150.0	± 9.6 %
		Y	3.88	73.87	20.74		150.0	
		Z	4.52	76.74	22.04		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.68	68.30	16.78	3.01	150.0	± 9.6 %
		Y	3.22	69.96	18.06		150.0	
		Z	3.64	72.15	19.12		150.0	
10187-CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.54	67.36	17.56	3.01	150.0	± 9.6 %
		Y	2.90	68.28	18.48		150.0	
		Z	3.10	69.65	19.27		150.0	
10188-CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.39	73.03	20.06	3.01	150.0	± 9.6 %
		Y	3.99	74.48	21.10		150.0	
		Z	4.67	77.46	22.43		150.0	
10189-AAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.74	68.71	17.06	3.01	150.0	± 9.6 %
		Y	3.29	70.37	18.32		150.0	
		Z	3.72	72.61	19.41		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.57	67.85	16.79	0.00	150.0	± 9.6 %
		Y	4.49	66.63	16.15		150.0	
		Z	4.49	66.65	16.18		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.74	68.14	16.90	0.00	150.0	± 9.6 %
		Y	4.65	66.92	16.28		150.0	
		Z	4.65	66.94	16.31		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.77	68.15	16.91	0.00	150.0	± 9.6 %
		Y	4.69	66.95	16.30		150.0	
		Z	4.69	66.97	16.33		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.57	67.90	16.81	0.00	150.0	± 9.6 %
		Y	4.48	66.67	16.16		150.0	
		Z	4.49	66.69	16.19		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.75	68.15	16.91	0.00	150.0	± 9.6 %
		Y	4.66	66.94	16.29		150.0	
		Z	4.66	66.96	16.32		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.77	68.16	16.92	0.00	150.0	± 9.6 %
		Y	4.69	66.96	16.31		150.0	
		Z	4.69	66.98	16.34		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.53	67.96	16.80	0.00	150.0	± 9.6 %
		Y	4.43	66.69	16.12		150.0	
		Z	4.44	66.71	16.15		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.74	68.11	16.89	0.00	150.0	± 9.6 %
		Y	4.65	66.90	16.28		150.0	
		Z	4.65	66.92	16.31		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.78	68.07	16.89	0.00	150.0	± 9.6 %
		Y	4.70	66.90	16.29		150.0	
		Z	4.70	66.92	16.32		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.08	68.09	16.90	0.00	150.0	± 9.6 %
		Y	5.04	67.04	16.41		150.0	
		Z	5.04	67.06	16.43		150.0	

Certificate No: EX3-7413_Jul17

Page 19 of 38

EX3DV4- SN:7413

July 26, 2017

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.34	68.12	16.91	0.00	150.0	± 9.6 %
		Y	5.34	67.29	16.56		150.0	
		Z	5.35	67.31	16.58		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	5.13	68.22	16.89	0.00	150.0	± 9.6 %
		Y	5.08	67.15	16.39		150.0	
		Z	5.08	67.17	16.42		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	3.05	69.01	16.98	0.00	150.0	± 9.6 %
		Y	2.76	66.12	15.21		150.0	
		Z	2.77	66.17	15.25		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	10.20	92.45	26.25	6.02	65.0	± 9.6 %
		Y	27.52	110.97	33.27		65.0	
		Z	76.15	130.69	38.54		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	9.50	89.73	24.67	6.02	65.0	± 9.6 %
		Y	27.08	108.74	31.95		65.0	
		Z	71.87	126.90	36.81		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	6.55	88.73	27.12	6.02	65.0	± 9.6 %
		Y	11.64	99.63	32.04		65.0	
		Z	17.06	108.51	35.08		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	9.45	91.00	25.69	6.02	65.0	± 9.6 %
		Y	24.89	108.90	32.60		65.0	
		Z	64.61	127.32	37.61		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	8.77	88.34	24.13	6.02	65.0	± 9.6 %
		Y	24.32	106.70	31.30		65.0	
		Z	60.73	123.68	35.93		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	6.22	87.66	26.65	6.02	65.0	± 9.6 %
		Y	10.98	98.32	31.54		65.0	
		Z	15.83	106.81	34.49		65.0	
10232-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	9.43	90.97	25.68	6.02	65.0	± 9.6 %
		Y	24.85	108.88	32.60		65.0	
		Z	64.54	127.31	37.61		65.0	
10233-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	8.74	88.30	24.12	6.02	65.0	± 9.6 %
		Y	24.23	106.65	31.29		65.0	
		Z	60.45	123.62	35.92		65.0	
10234-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.95	86.68	26.18	6.02	65.0	± 9.6 %
		Y	10.48	97.20	31.06		65.0	
		Z	14.93	105.39	33.93		65.0	
10235-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	9.43	90.99	25.69	6.02	65.0	± 9.6 %
		Y	24.92	108.95	32.62		65.0	
		Z	64.97	127.46	37.65		65.0	
10236-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	8.83	88.45	24.16	6.02	65.0	± 9.6 %
		Y	24.67	106.93	31.36		65.0	
		Z	62.18	124.07	36.02		65.0	
10237-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.22	87.69	26.67	6.02	65.0	± 9.6 %
		Y	11.00	98.41	31.57		65.0	
		Z	15.90	106.96	34.54		65.0	
10238-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	9.40	90.94	25.67	6.02	65.0	± 9.6 %
		Y	24.80	108.87	32.59		65.0	
		Z	64.47	127.31	37.61		65.0	

EX3DV4- SN:7413

July 26, 2017

10239-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	8.70	88.25	24.11	6.02	65.0	± 9.6 %
		Y	24.14	106.60	31.28		65.0	
		Z	60.20	123.57	35.91		65.0	
10240-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	6.20	87.66	26.65	6.02	65.0	± 9.6 %
		Y	10.97	98.35	31.56		65.0	
		Z	15.84	106.89	34.52		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	6.63	78.47	23.75	6.98	65.0	± 9.6 %
		Y	8.72	83.53	26.63		65.0	
		Z	9.59	85.96	27.73		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	5.80	75.81	22.54	6.98	65.0	± 9.6 %
		Y	8.13	82.02	25.96		65.0	
		Z	8.28	82.81	26.43		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.78	72.67	22.02	6.98	65.0	± 9.6 %
		Y	6.28	77.54	25.01		65.0	
		Z	6.23	77.70	25.25		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.35	72.24	16.04	3.98	65.0	± 9.6 %
		Y	6.98	78.49	19.43		65.0	
		Z	8.11	80.98	20.43		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	4.22	71.55	15.70	3.98	65.0	± 9.6 %
		Y	6.62	77.41	18.95		65.0	
		Z	7.57	79.64	19.87		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	14.54	96.12	25.90	3.98	65.0	± 9.6 %
		Y	8.94	86.46	22.84		65.0	
		Z	9.52	87.54	23.16		65.0	
10247-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	5.87	78.64	20.63	3.98	65.0	± 9.6 %
		Y	5.90	76.95	19.95		65.0	
		Z	5.98	77.32	20.08		65.0	
10248-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	5.53	77.05	19.95	3.98	65.0	± 9.6 %
		Y	5.70	75.87	19.47		65.0	
		Z	5.78	76.21	19.60		65.0	
10249-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	15.71	98.92	27.98	3.98	65.0	± 9.6 %
		Y	10.80	90.46	25.30		65.0	
		Z	11.69	91.94	25.77		65.0	
10250-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	6.35	79.84	22.91	3.98	65.0	± 9.6 %
		Y	6.70	79.11	22.63		65.0	
		Z	6.80	79.56	22.83		65.0	
10251-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	5.67	76.25	20.98	3.98	65.0	± 9.6 %
		Y	6.16	76.21	21.04		65.0	
		Z	6.24	76.63	21.22		65.0	
10252-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	10.12	90.91	26.55	3.98	65.0	± 9.6 %
		Y	9.20	87.23	25.32		65.0	
		Z	9.69	88.37	25.73		65.0	
10253-CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.54	74.56	20.60	3.98	65.0	± 9.6 %
		Y	6.10	74.91	20.88		65.0	
		Z	6.17	75.27	21.06		65.0	
10254-CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.93	75.64	21.40	3.98	65.0	± 9.6 %
		Y	6.49	75.92	21.62		65.0	
		Z	6.56	76.27	21.79		65.0	

EX3DV4- SN:7413

July 26, 2017

10255- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	7.27	82.40	23.68	3.98	65.0	± 9.6 %
		Y	7.46	81.21	23.33		65.0	
		Z	7.66	81.88	23.61		65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	3.02	67.24	12.59	3.98	65.0	± 9.6 %
		Y	4.93	72.85	15.99		65.0	
		Z	5.54	74.64	16.76		65.0	
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	2.95	66.62	12.20	3.98	65.0	± 9.6 %
		Y	4.63	71.63	15.35		65.0	
		Z	5.12	73.13	16.02		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	7.78	84.97	21.16	3.98	65.0	± 9.6 %
		Y	5.75	78.70	19.01		65.0	
		Z	5.90	79.15	19.11		65.0	
10259- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.07	79.11	21.46	3.98	65.0	± 9.6 %
		Y	6.24	77.82	20.94		65.0	
		Z	6.34	78.24	21.11		65.0	
10260- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	5.97	78.42	21.17	3.98	65.0	± 9.6 %
		Y	6.19	77.31	20.73		65.0	
		Z	6.28	77.69	20.88		65.0	
10261- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	10.86	92.53	26.48	3.98	65.0	± 9.6 %
		Y	9.14	87.45	24.76		65.0	
		Z	9.71	88.67	25.17		65.0	
10262- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	6.33	79.76	22.85	3.98	65.0	± 9.6 %
		Y	6.68	79.03	22.58		65.0	
		Z	6.78	79.49	22.78		65.0	
10263- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	5.65	76.22	20.97	3.98	65.0	± 9.6 %
		Y	6.14	76.18	21.03		65.0	
		Z	6.23	76.59	21.21		65.0	
10264- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	9.92	90.50	26.39	3.98	65.0	± 9.6 %
		Y	9.07	86.94	25.19		65.0	
		Z	9.55	88.07	25.60		65.0	
10265- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.68	75.20	20.91	3.98	65.0	± 9.6 %
		Y	6.24	75.48	21.17		65.0	
		Z	6.31	75.86	21.36		65.0	
10266- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	6.12	76.39	21.79	3.98	65.0	± 9.6 %
		Y	6.67	76.56	21.99		65.0	
		Z	6.74	76.93	22.17		65.0	
10267- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.03	83.97	24.03	3.98	65.0	± 9.6 %
		Y	7.96	82.17	23.49		65.0	
		Z	8.20	82.86	23.78		65.0	
10268- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	6.21	74.62	21.01	3.98	65.0	± 9.6 %
		Y	6.78	75.01	21.37		65.0	
		Z	6.84	75.32	21.53		65.0	
10269- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	6.15	74.04	20.80	3.98	65.0	± 9.6 %
		Y	6.73	74.51	21.20		65.0	
		Z	6.78	74.80	21.35		65.0	
10270- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.92	78.69	22.08	3.98	65.0	± 9.6 %
		Y	7.23	78.02	21.99		65.0	
		Z	7.33	78.43	22.17		65.0	

Certificate No: EX3-7413_Jul17

Page 22 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.95	70.25	17.36	0.00	150.0	± 9.6 %
		Y	2.57	66.56	15.18		150.0	
		Z	2.58	66.64	15.24		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	2.89	80.11	21.62	0.00	150.0	± 9.6 %
		Y	1.59	67.76	15.47		150.0	
		Z	1.61	67.97	15.61		150.0	
10277-CAA	PHS (QPSK)	X	1.60	60.00	5.33	9.03	50.0	± 9.6 %
		Y	2.06	61.77	7.27		50.0	
		Z	1.88	61.22	6.69		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	5.61	75.19	15.64	9.03	50.0	± 9.6 %
		Y	8.56	82.00	19.50		50.0	
		Z	8.73	82.31	19.35		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	5.92	75.84	15.96	9.03	50.0	± 9.6 %
		Y	8.71	82.22	19.65		50.0	
		Z	8.94	82.62	19.54		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	100.00	130.59	32.77	0.00	150.0	± 9.6 %
		Y	1.34	68.03	13.34		150.0	
		Z	1.36	68.28	13.46		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	100.00	137.77	34.79	0.00	150.0	± 9.6 %
		Y	0.79	65.43	12.00		150.0	
		Z	0.80	65.66	12.13		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	100.00	145.82	38.18	0.00	150.0	± 9.6 %
		Y	1.06	70.12	14.65		150.0	
		Z	1.10	70.68	14.91		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	100.00	151.21	40.69	0.00	150.0	± 9.6 %
		Y	1.91	78.38	18.47		150.0	
		Z	2.05	79.42	18.87		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	16.45	96.79	27.39	9.03	50.0	± 9.6 %
		Y	20.44	100.98	29.51		50.0	
		Z	25.00	105.05	30.69		50.0	
10297-AAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	3.78	76.85	20.21	0.00	150.0	± 9.6 %
		Y	2.69	69.45	16.57		150.0	
		Z	2.70	69.57	16.65		150.0	
10298-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	8.05	94.22	24.52	0.00	150.0	± 9.6 %
		Y	1.46	67.04	13.51		150.0	
		Z	1.47	67.20	13.60		150.0	
10299-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.85	66.37	11.93	0.00	150.0	± 9.6 %
		Y	2.26	67.74	12.97		150.0	
		Z	2.71	69.97	14.07		150.0	
10300-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.43	62.83	9.39	0.00	150.0	± 9.6 %
		Y	1.73	63.85	10.33		150.0	
		Z	1.90	64.81	10.90		150.0	
10301-AAA	IEEE 802.16e WiMAX (29.18, 5ms, 10MHz, QPSK, PUSC)	X	4.58	65.84	17.61	4.17	50.0	± 9.6 %
		Y	4.75	65.81	17.58		50.0	
		Z	4.83	66.11	17.76		50.0	
10302-AAA	IEEE 802.16e WiMAX (29.18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.01	66.27	18.21	4.96	50.0	± 9.6 %
		Y	5.24	66.32	18.21		50.0	
		Z	5.22	66.29	18.24		50.0	

Certificate No: EX3-7413_Jul17

Page 23 of 38

EX3DV4- SN:7413

July 26, 2017

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.75	65.84	18.02	4.96	50.0	± 9.6 %
		Y	5.00	65.98	18.04		50.0	
		Z	4.97	65.93	18.06		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.61	65.99	17.68	4.17	50.0	± 9.6 %
		Y	4.81	65.86	17.53		50.0	
		Z	4.79	65.84	17.56		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.00	66.53	19.03	6.02	35.0	± 9.6 %
		Y	4.50	68.19	19.72		35.0	
		Z	4.37	67.68	19.52		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.39	65.94	18.75	6.02	35.0	± 9.6 %
		Y	4.78	67.05	19.30		35.0	
		Z	4.69	66.74	19.18		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.27	66.02	18.69	6.02	35.0	± 9.6 %
		Y	4.68	67.20	19.25		35.0	
		Z	4.58	66.84	19.12		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.25	66.20	18.83	6.02	35.0	± 9.6 %
		Y	4.66	67.43	19.41		35.0	
		Z	4.56	67.06	19.27		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.43	65.85	18.67	6.02	35.0	± 9.6 %
		Y	4.82	67.23	19.43		35.0	
		Z	4.74	66.92	19.32		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.34	65.98	18.72	6.02	35.0	± 9.6 %
		Y	4.73	67.12	19.28		35.0	
		Z	4.64	66.79	19.16		35.0	
10311-AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	4.23	75.61	19.53	0.00	150.0	± 9.6 %
		Y	3.05	68.74	16.22		150.0	
		Z	3.07	68.84	16.30		150.0	
10313-AAA	IDEN 1:3	X	14.63	94.12	23.00	6.99	70.0	± 9.6 %
		Y	9.93	88.32	22.16		70.0	
		Z	11.58	90.43	22.69		70.0	
10314-AAA	IDEN 1:6	X	100.00	131.51	35.98	10.00	30.0	± 9.6 %
		Y	18.91	105.68	30.88		30.0	
		Z	22.25	109.14	31.84		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.25	68.73	18.84	0.17	150.0	± 9.6 %
		Y	1.10	63.86	15.27		150.0	
		Z	1.11	63.96	15.36		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.59	67.75	16.84	0.17	150.0	± 9.6 %
		Y	4.55	66.73	16.35		150.0	
		Z	4.55	66.74	16.37		150.0	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.59	67.75	16.84	0.17	150.0	± 9.6 %
		Y	4.55	66.73	16.35		150.0	
		Z	4.55	66.74	16.37		150.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.71	68.14	16.87	0.00	150.0	± 9.6 %
		Y	4.63	66.96	16.27		150.0	
		Z	4.63	66.99	16.30		150.0	
10401-AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.31	67.79	16.70	0.00	150.0	± 9.6 %
		Y	5.35	67.15	16.45		150.0	
		Z	5.36	67.18	16.49		150.0	

EX3DV4- SN.7413

July 26, 2017

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.63	68.36	16.85	0.00	150.0	± 9.6 %
		Y	5.60	67.40	16.45		150.0	
		Z	5.60	67.42	16.47		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	100.00	130.59	32.77	0.00	115.0	± 9.6 %
		Y	1.34	68.03	13.34		115.0	
		Z	1.36	68.28	13.46		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	100.00	130.59	32.77	0.00	115.0	± 9.6 %
		Y	1.34	68.03	13.34		115.0	
		Z	1.36	68.28	13.46		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	24.33	103.36	25.31	0.00	100.0	± 9.6 %
		Y	47.07	110.87	27.63		100.0	
		Z	100.00	119.60	29.45		100.0	
10410-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	14.46	95.17	22.11	3.23	80.0	± 9.6 %
		Y	100.00	126.27	32.27		80.0	
		Z	100.00	127.08	32.68		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.17	67.82	18.27	0.00	150.0	± 9.6 %
		Y	1.02	62.93	14.60		150.0	
		Z	1.03	63.03	14.69		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.57	67.86	16.85	0.00	150.0	± 9.6 %
		Y	4.49	66.66	16.22		150.0	
		Z	4.49	66.68	16.25		150.0	
10417-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.57	67.86	16.85	0.00	150.0	± 9.6 %
		Y	4.49	66.66	16.22		150.0	
		Z	4.49	66.68	16.25		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.57	68.10	16.92	0.00	150.0	± 9.6 %
		Y	4.48	66.84	16.26		150.0	
		Z	4.48	66.86	16.29		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.59	68.01	16.90	0.00	150.0	± 9.6 %
		Y	4.50	66.78	16.25		150.0	
		Z	4.50	66.80	16.28		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.69	67.93	16.86	0.00	150.0	± 9.6 %
		Y	4.61	66.77	16.26		150.0	
		Z	4.61	66.79	16.29		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.85	68.23	16.96	0.00	150.0	± 9.6 %
		Y	4.76	67.06	16.37		150.0	
		Z	4.76	67.08	16.39		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.78	68.22	16.96	0.00	150.0	± 9.6 %
		Y	4.69	67.01	16.34		150.0	
		Z	4.69	67.03	16.37		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.31	68.16	16.91	0.00	150.0	± 9.6 %
		Y	5.29	67.27	16.52		150.0	
		Z	5.30	67.29	16.55		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.31	68.17	16.92	0.00	150.0	± 9.6 %
		Y	5.31	67.35	16.56		150.0	
		Z	5.32	67.38	16.59		150.0	

EX3DV4- SN:7413

July 26, 2017

10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.32	68.16	16.90	0.00	150.0	± 9.6 %
		Y	5.31	67.28	16.52		150.0	
		Z	5.32	67.29	16.54		150.0	
10430-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	5.25	76.34	20.87	0.00	150.0	± 9.6 %
		Y	4.26	71.31	18.29		150.0	
		Z	4.24	71.21	18.24		150.0	
10431-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.31	68.86	17.10	0.00	150.0	± 9.6 %
		Y	4.14	67.22	16.17		150.0	
		Z	4.14	67.25	16.21		150.0	
10432-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.57	68.44	17.01	0.00	150.0	± 9.6 %
		Y	4.45	67.08	16.28		150.0	
		Z	4.45	67.10	16.31		150.0	
10433-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.79	68.26	16.98	0.00	150.0	± 9.6 %
		Y	4.70	67.04	16.36		150.0	
		Z	4.70	67.06	16.39		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	5.99	79.06	21.53	0.00	150.0	± 9.6 %
		Y	4.38	72.25	18.23		150.0	
		Z	4.35	72.12	18.17		150.0	
10435-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	12.71	93.48	21.59	3.23	80.0	± 9.6 %
		Y	100.00	126.04	32.16		80.0	
		Z	100.00	126.85	32.57		80.0	
10447-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.77	69.89	16.95	0.00	150.0	± 9.6 %
		Y	3.41	67.17	15.35		150.0	
		Z	3.42	67.21	15.38		150.0	
10448-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.16	68.70	17.00	0.00	150.0	± 9.6 %
		Y	3.99	67.00	16.04		150.0	
		Z	3.99	67.03	16.07		150.0	
10449-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.40	68.35	16.96	0.00	150.0	± 9.6 %
		Y	4.27	66.90	16.18		150.0	
		Z	4.28	66.93	16.21		150.0	
10450-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.57	68.11	16.90	0.00	150.0	± 9.6 %
		Y	4.48	66.82	16.22		150.0	
		Z	4.48	66.84	16.25		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.77	70.56	16.77	0.00	150.0	± 9.6 %
		Y	3.27	67.23	14.85		150.0	
		Z	3.28	67.27	14.88		150.0	
10456-AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.15	68.57	16.95	0.00	150.0	± 9.6 %
		Y	6.20	67.88	16.71		150.0	
		Z	6.21	67.90	16.74		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.82	66.49	16.60	0.00	150.0	± 9.6 %
		Y	3.78	65.33	15.93		150.0	
		Z	3.78	65.35	15.96		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.49	69.46	15.93	0.00	150.0	± 9.6 %
		Y	3.07	66.42	14.09		150.0	
		Z	3.07	66.47	14.13		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.47	66.89	16.41	0.00	150.0	± 9.6 %
		Y	4.18	65.00	15.30		150.0	
		Z	4.11	64.75	15.19		150.0	

Certificate No: EX3-7413_Jul17

Page 26 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	5.23	104.95	31.66	0.00	150.0	± 9.6 %
		Y	0.89	67.79	15.95		150.0	
		Z	0.91	68.17	16.19		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	12.26	95.94	23.33	3.29	80.0	± 9.6 %
		Y	100.00	131.24	34.62		80.0	
		Z	100.00	133.62	35.70		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.24	3.23	80.0	± 9.6 %
		Y	97.10	108.70	24.21		80.0	
		Z	100.00	110.19	24.80		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.66	3.23	80.0	± 9.6 %
		Y	3.57	73.15	14.10		80.0	
		Z	73.37	102.32	21.87		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.26	84.23	19.21	3.23	80.0	± 9.6 %
		Y	100.00	128.65	33.24		80.0	
		Z	100.00	131.14	34.37		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.16	3.23	80.0	± 9.6 %
		Y	17.52	90.65	19.88		80.0	
		Z	100.00	109.41	24.43		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.61	3.23	80.0	± 9.6 %
		Y	2.52	69.65	12.80		80.0	
		Z	12.01	84.74	17.54		80.0	
10467-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.30	86.45	19.90	3.23	80.0	± 9.6 %
		Y	100.00	128.98	33.39		80.0	
		Z	100.00	131.48	34.52		80.0	
10468-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.18	3.23	80.0	± 9.6 %
		Y	25.30	94.56	20.90		80.0	
		Z	100.00	109.68	24.55		80.0	
10469-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.60	3.23	80.0	± 9.6 %
		Y	2.54	69.78	12.84		80.0	
		Z	12.75	85.32	17.70		80.0	
10470-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.30	86.46	19.90	3.23	80.0	± 9.6 %
		Y	100.00	129.02	33.39		80.0	
		Z	100.00	131.53	34.53		80.0	
10471-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.17	3.23	80.0	± 9.6 %
		Y	24.80	94.30	20.81		80.0	
		Z	100.00	109.60	24.51		80.0	
10472-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.59	3.23	80.0	± 9.6 %
		Y	2.52	69.67	12.78		80.0	
		Z	12.45	85.05	17.60		80.0	
10473-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.24	86.32	19.85	3.23	80.0	± 9.6 %
		Y	100.00	128.98	33.38		80.0	
		Z	100.00	131.50	34.51		80.0	
10474-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.16	3.23	80.0	± 9.6 %
		Y	24.04	94.00	20.74		80.0	
		Z	100.00	109.61	24.51		80.0	
10475-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.59	3.23	80.0	± 9.6 %
		Y	2.50	69.59	12.76		80.0	
		Z	12.08	84.78	17.54		80.0	

Certificate No: EX3-7413_Jul17

Page 27 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10477-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.75	60.00	7.14	3.23	80.0	± 9.6 %
		Y	18.34	91.09	19.97		80.0	
		Z	100.00	109.36	24.40		80.0	
10478-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.78	60.00	6.58	3.23	80.0	± 9.6 %
		Y	2.47	69.46	12.70		80.0	
		Z	11.50	84.27	17.38		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.29	81.74	20.59	3.23	80.0	± 9.6 %
		Y	17.45	99.98	27.41		80.0	
		Z	45.77	115.70	31.76		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.49	72.00	15.18	3.23	80.0	± 9.6 %
		Y	18.07	93.12	23.16		80.0	
		Z	71.13	111.41	27.93		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.65	68.33	13.33	3.23	80.0	± 9.6 %
		Y	11.54	86.23	20.69		80.0	
		Z	33.54	99.96	24.59		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	67.62	119.25	31.03	2.23	80.0	± 9.6 %
		Y	4.51	78.26	19.21		80.0	
		Z	4.65	78.77	19.38		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.56	67.59	13.44	2.23	80.0	± 9.6 %
		Y	5.35	76.18	17.62		80.0	
		Z	7.86	81.43	19.56		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.45	66.83	13.12	2.23	80.0	± 9.6 %
		Y	4.71	74.28	16.92		80.0	
		Z	6.47	78.65	18.61		80.0	
10485-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	13.68	98.74	27.40	2.23	80.0	± 9.6 %
		Y	4.53	78.80	20.61		80.0	
		Z	4.64	79.30	20.80		80.0	
10486-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.51	82.24	21.32	2.23	80.0	± 9.6 %
		Y	3.77	72.32	17.38		80.0	
		Z	3.80	72.48	17.44		80.0	
10487-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.96	80.49	20.68	2.23	80.0	± 9.6 %
		Y	3.70	71.63	17.07		80.0	
		Z	3.71	71.77	17.12		80.0	
10488-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.93	83.64	23.47	2.23	80.0	± 9.6 %
		Y	4.15	75.55	20.22		80.0	
		Z	4.20	75.87	20.37		80.0	
10489-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.25	74.56	19.92	2.23	80.0	± 9.6 %
		Y	3.77	70.82	18.19		80.0	
		Z	3.78	70.94	18.25		80.0	
10490-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.25	73.89	19.64	2.23	80.0	± 9.6 %
		Y	3.84	70.53	18.06		80.0	
		Z	3.84	70.64	18.13		80.0	
10491-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.94	77.72	21.33	2.23	80.0	± 9.6 %
		Y	4.16	73.00	19.32		80.0	
		Z	4.19	73.20	19.43		80.0	
10492-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.15	71.63	18.96	2.23	80.0	± 9.6 %
		Y	4.00	69.47	17.94		80.0	
		Z	4.00	69.56	17.99		80.0	

EX3DV4- SN:7413

July 26, 2017

10493-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.18	71.28	18.81	2.23	80.0	± 9.6 %
		Y	4.05	69.29	17.86		80.0	
		Z	4.06	69.37	17.91		80.0	
10494-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.09	81.36	22.52	2.23	80.0	± 9.6 %
		Y	4.61	74.86	19.93		80.0	
		Z	4.65	75.10	20.05		80.0	
10495-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.23	72.21	19.25	2.23	80.0	± 9.6 %
		Y	4.04	69.85	18.15		80.0	
		Z	4.04	69.94	18.21		80.0	
10496-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.24	71.57	18.99	2.23	80.0	± 9.6 %
		Y	4.10	69.50	18.03		80.0	
		Z	4.10	69.58	18.08		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	118.07	28.72	2.23	80.0	± 9.6 %
		Y	2.91	71.72	15.50		80.0	
		Z	2.96	71.96	15.56		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.22	67.07	12.39	2.23	80.0	± 9.6 %
		Y	1.60	62.02	9.94		80.0	
		Z	1.58	61.97	9.88		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.85	64.78	11.20	2.23	80.0	± 9.6 %
		Y	1.52	61.26	9.39		80.0	
		Z	1.50	61.20	9.32		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	7.88	89.35	24.93	2.23	80.0	± 9.6 %
		Y	4.22	76.91	20.26		80.0	
		Z	4.29	77.32	20.43		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.17	78.41	20.54	2.23	80.0	± 9.6 %
		Y	3.79	71.80	17.72		80.0	
		Z	3.81	71.95	17.78		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.15	77.87	20.25	2.23	80.0	± 9.6 %
		Y	3.83	71.54	17.53		80.0	
		Z	3.84	71.68	17.59		80.0	
10503-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.77	83.19	23.29	2.23	80.0	± 9.6 %
		Y	4.09	75.30	20.10		80.0	
		Z	4.14	75.62	20.25		80.0	
10504-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.21	74.38	19.83	2.23	80.0	± 9.6 %
		Y	3.75	70.70	18.12		80.0	
		Z	3.75	70.83	18.19		80.0	
10505-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.21	73.73	19.56	2.23	80.0	± 9.6 %
		Y	3.81	70.42	18.00		80.0	
		Z	3.82	70.54	18.07		80.0	
10506-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.99	81.06	22.40	2.23	80.0	± 9.6 %
		Y	4.57	74.69	19.85		80.0	
		Z	4.61	74.93	19.97		80.0	
10507-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.21	72.11	19.20	2.23	80.0	± 9.6 %
		Y	4.02	69.78	18.11		80.0	
		Z	4.03	69.87	18.17		80.0	

Certificate No: EX3-7413_Jul17

Page 29 of 38

EX3DV4- SN:7413

July 26, 2017

10508-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.21	71.46	18.93	2.23	80.0	± 9.6 %
		Y	4.08	69.42	17.98		80.0	
		Z	4.09	69.50	18.04		80.0	
10509-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.60	77.06	20.81	2.23	80.0	± 9.6 %
		Y	4.77	72.76	19.05		80.0	
		Z	4.79	72.92	19.13		80.0	
10510-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.53	70.88	18.70	2.23	80.0	± 9.6 %
		Y	4.46	69.20	17.95		80.0	
		Z	4.46	69.27	18.01		80.0	
10511-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.54	70.40	18.52	2.23	80.0	± 9.6 %
		Y	4.50	68.90	17.86		80.0	
		Z	4.51	68.97	17.91		80.0	
10512-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.72	80.94	22.11	2.23	80.0	± 9.6 %
		Y	5.11	74.72	19.70		80.0	
		Z	5.15	74.93	19.80		80.0	
10513-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.47	71.43	18.95	2.23	80.0	± 9.6 %
		Y	4.36	69.50	18.09		80.0	
		Z	4.36	69.58	18.15		80.0	
10514-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.42	70.68	18.67	2.23	80.0	± 9.6 %
		Y	4.37	69.01	17.93		80.0	
		Z	4.37	69.08	17.98		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.15	68.53	18.66	0.00	150.0	± 9.6 %
		Y	0.98	63.10	14.65		150.0	
		Z	0.99	63.20	14.75		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	100.00	188.29	54.67	0.00	150.0	± 9.6 %
		Y	0.59	69.30	16.86		150.0	
		Z	0.61	70.08	17.31		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	1.31	77.15	22.71	0.00	150.0	± 9.6 %
		Y	0.83	64.83	15.20		150.0	
		Z	0.83	65.04	15.37		150.0	
10518-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.57	67.98	16.86	0.00	150.0	± 9.6 %
		Y	4.48	66.74	16.21		150.0	
		Z	4.48	66.77	16.23		150.0	
10519-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.73	68.14	16.92	0.00	150.0	± 9.6 %
		Y	4.65	66.95	16.31		150.0	
		Z	4.65	66.97	16.34		150.0	
10520-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.60	68.17	16.90	0.00	150.0	± 9.6 %
		Y	4.50	66.89	16.23		150.0	
		Z	4.50	66.92	16.26		150.0	
10521-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.54	68.21	16.91	0.00	150.0	± 9.6 %
		Y	4.43	66.88	16.21		150.0	
		Z	4.44	66.90	16.24		150.0	
10522-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.60	68.29	16.99	0.00	150.0	± 9.6 %
		Y	4.49	67.00	16.31		150.0	
		Z	4.50	67.03	16.34		150.0	

Certificate No: EX3-7413_Jul17

Page 30 of 38

EX3DV4- SN:7413

July 26, 2017

10523-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.51	68.28	16.91	0.00	150.0	± 9.6 %
		Y	4.39	66.90	16.18		150.0	
		Z	4.39	66.93	16.21		150.0	
10524-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.54	68.22	16.96	0.00	150.0	± 9.6 %
		Y	4.44	66.92	16.28		150.0	
		Z	4.44	66.95	16.31		150.0	
10525-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.56	67.36	16.60	0.00	150.0	± 9.6 %
		Y	4.44	66.00	15.89		150.0	
		Z	4.45	66.02	15.92		150.0	
10526-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.72	67.70	16.73	0.00	150.0	± 9.6 %
		Y	4.59	66.33	16.02		150.0	
		Z	4.59	66.35	16.05		150.0	
10527-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.65	67.72	16.70	0.00	150.0	± 9.6 %
		Y	4.52	66.29	15.96		150.0	
		Z	4.52	66.31	15.99		150.0	
10528-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.67	67.72	16.72	0.00	150.0	± 9.6 %
		Y	4.53	66.30	15.99		150.0	
		Z	4.53	66.33	16.02		150.0	
10529-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.67	67.72	16.72	0.00	150.0	± 9.6 %
		Y	4.53	66.30	15.99		150.0	
		Z	4.53	66.33	16.02		150.0	
10531-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.66	67.83	16.74	0.00	150.0	± 9.6 %
		Y	4.51	66.37	15.99		150.0	
		Z	4.51	66.39	16.02		150.0	
10532-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.53	67.74	16.72	0.00	150.0	± 9.6 %
		Y	4.38	66.23	15.92		150.0	
		Z	4.38	66.25	15.95		150.0	
10533-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.68	67.80	16.73	0.00	150.0	± 9.6 %
		Y	4.54	66.37	15.99		150.0	
		Z	4.54	66.39	16.02		150.0	
10534-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.15	67.52	16.60	0.00	150.0	± 9.6 %
		Y	5.08	66.38	16.06		150.0	
		Z	5.08	66.39	16.08		150.0	
10535-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.21	67.67	16.66	0.00	150.0	± 9.6 %
		Y	5.14	66.55	16.14		150.0	
		Z	5.15	66.57	16.16		150.0	
10536-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.10	67.72	16.68	0.00	150.0	± 9.6 %
		Y	5.02	66.51	16.10		150.0	
		Z	5.02	66.53	16.12		150.0	
10537-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.15	67.64	16.63	0.00	150.0	± 9.6 %
		Y	5.07	66.47	16.08		150.0	
		Z	5.08	66.49	16.11		150.0	
10538-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.22	67.58	16.64	0.00	150.0	± 9.6 %
		Y	5.15	66.47	16.12		150.0	
		Z	5.15	66.49	16.15		150.0	
10540-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.15	67.59	16.67	0.00	150.0	± 9.6 %
		Y	5.08	66.46	16.13		150.0	
		Z	5.09	66.48	16.16		150.0	

Certificate No: EX3-7413_Jul17

Page 31 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10541-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.14	67.51	16.61	0.00	150.0	± 9.6 %
		Y	5.06	66.36	16.07		150.0	
		Z	5.07	66.37	16.09		150.0	
10542-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.28	67.53	16.63	0.00	150.0	± 9.6 %
		Y	5.22	66.44	16.13		150.0	
		Z	5.22	66.46	16.15		150.0	
10543-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.34	67.51	16.63	0.00	150.0	± 9.6 %
		Y	5.28	66.46	16.16		150.0	
		Z	5.28	66.47	16.18		150.0	
10544-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.46	67.56	16.53	0.00	150.0	± 9.6 %
		Y	5.41	66.48	16.05		150.0	
		Z	5.41	66.50	16.08		150.0	
10545-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.61	67.83	16.62	0.00	150.0	± 9.6 %
		Y	5.59	66.91	16.22		150.0	
		Z	5.60	66.93	16.25		150.0	
10546-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.51	67.74	16.59	0.00	150.0	± 9.6 %
		Y	5.45	66.64	16.10		150.0	
		Z	5.46	66.65	16.12		150.0	
10547-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.58	67.75	16.58	0.00	150.0	± 9.6 %
		Y	5.53	66.70	16.12		150.0	
		Z	5.53	66.72	16.15		150.0	
10548-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.70	68.30	16.83	0.00	150.0	± 9.6 %
		Y	5.73	67.50	16.50		150.0	
		Z	5.74	67.53	16.53		150.0	
10550-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.54	67.75	16.61	0.00	150.0	± 9.6 %
		Y	5.49	66.73	16.15		150.0	
		Z	5.50	66.75	16.18		150.0	
10551-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.54	67.77	16.57	0.00	150.0	± 9.6 %
		Y	5.48	66.70	16.10		150.0	
		Z	5.48	66.71	16.13		150.0	
10552-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.49	67.69	16.55	0.00	150.0	± 9.6 %
		Y	5.42	66.56	16.04		150.0	
		Z	5.42	66.57	16.06		150.0	
10553-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.55	67.65	16.55	0.00	150.0	± 9.6 %
		Y	5.49	66.56	16.07		150.0	
		Z	5.49	66.57	16.09		150.0	
10554-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.85	67.83	16.55	0.00	150.0	± 9.6 %
		Y	5.82	66.84	16.14		150.0	
		Z	5.83	66.85	16.16		150.0	
10555-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.95	68.06	16.65	0.00	150.0	± 9.6 %
		Y	5.94	67.11	16.26		150.0	
		Z	5.94	67.13	16.28		150.0	
10556-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.98	68.11	16.67	0.00	150.0	± 9.6 %
		Y	5.96	67.18	16.28		150.0	
		Z	5.97	67.19	16.31		150.0	
10557-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.96	68.05	16.66	0.00	150.0	± 9.6 %
		Y	5.92	67.06	16.24		150.0	
		Z	5.93	67.07	16.27		150.0	

Certificate No: EX3-7413_Jul17

Page 32 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10558-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.99	68.18	16.74	0.00	150.0	± 9.6 %
		Y	5.96	67.21	16.33		150.0	
		Z	5.97	67.22	16.36		150.0	
10560-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.00	68.06	16.71	0.00	150.0	± 9.6 %
		Y	5.96	67.06	16.30		150.0	
		Z	5.96	67.08	16.32		150.0	
10561-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.91	68.00	16.72	0.00	150.0	± 9.6 %
		Y	5.89	67.05	16.32		150.0	
		Z	5.89	67.06	16.35		150.0	
10562-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.00	68.28	16.86	0.00	150.0	± 9.6 %
		Y	5.98	67.33	16.46		150.0	
		Z	5.98	67.34	16.49		150.0	
10563-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.08	68.14	16.74	0.00	150.0	± 9.6 %
		Y	6.07	67.24	16.38		150.0	
		Z	6.07	67.25	16.41		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.85	67.81	16.85	0.46	150.0	± 9.6 %
		Y	4.80	66.81	16.37		150.0	
		Z	4.81	66.84	16.40		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	5.08	68.28	17.18	0.46	150.0	± 9.6 %
		Y	5.02	67.24	16.68		150.0	
		Z	5.02	67.25	16.71		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.91	68.14	17.01	0.46	150.0	± 9.6 %
		Y	4.85	67.07	16.50		150.0	
		Z	4.86	67.09	16.52		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.98	68.70	17.47	0.46	150.0	± 9.6 %
		Y	4.89	67.48	16.87		150.0	
		Z	4.89	67.49	16.88		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.80	67.82	16.72	0.46	150.0	± 9.6 %
		Y	4.76	66.85	16.27		150.0	
		Z	4.77	66.89	16.31		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.96	68.92	17.61	0.46	150.0	± 9.6 %
		Y	4.86	67.63	16.97		150.0	
		Z	4.86	67.64	16.99		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.96	68.62	17.45	0.46	150.0	± 9.6 %
		Y	4.88	67.44	16.87		150.0	
		Z	4.88	67.46	16.89		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.31	68.91	18.88	0.46	130.0	± 9.6 %
		Y	1.19	64.60	15.73		130.0	
		Z	1.20	64.72	15.84		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.35	70.11	19.57	0.46	130.0	± 9.6 %
		Y	1.21	65.18	16.10		130.0	
		Z	1.21	65.31	16.21		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	177.11	51.08	0.46	130.0	± 9.6 %
		Y	2.06	85.82	23.66		130.0	
		Z	2.39	88.51	24.64		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	2.58	88.71	27.90	0.46	130.0	± 9.6 %
		Y	1.32	70.93	19.06		130.0	
		Z	1.34	71.20	19.23		130.0	

Certificate No: EX3-7413_Jul17

Page 33 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.62	67.58	16.89	0.46	130.0	± 9.6 %
		Y	4.60	66.64	16.45		130.0	
		Z	4.60	66.66	16.48		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.66	67.81	16.99	0.46	130.0	± 9.6 %
		Y	4.63	66.82	16.52		130.0	
		Z	4.63	66.84	16.55		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.85	68.05	17.13	0.46	130.0	± 9.6 %
		Y	4.81	67.08	16.68		130.0	
		Z	4.81	67.10	16.70		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.77	68.34	17.31	0.46	130.0	± 9.6 %
		Y	4.71	67.24	16.79		130.0	
		Z	4.71	67.25	16.81		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.49	67.40	16.50	0.46	130.0	± 9.6 %
		Y	4.47	66.48	16.07		130.0	
		Z	4.47	66.51	16.11		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.53	67.41	16.50	0.46	130.0	± 9.6 %
		Y	4.52	66.54	16.11		130.0	
		Z	4.52	66.58	16.14		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.68	68.45	17.30	0.46	130.0	± 9.6 %
		Y	4.61	67.30	16.75		130.0	
		Z	4.61	67.31	16.77		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.41	67.05	16.22	0.46	130.0	± 9.6 %
		Y	4.41	66.23	15.85		130.0	
		Z	4.41	66.27	15.89		130.0	
10583-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.62	67.58	16.89	0.46	130.0	± 9.6 %
		Y	4.60	66.64	16.45		130.0	
		Z	4.60	66.66	16.48		130.0	
10584-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.66	67.81	16.99	0.46	130.0	± 9.6 %
		Y	4.63	66.82	16.52		130.0	
		Z	4.63	66.84	16.55		130.0	
10585-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.85	68.05	17.13	0.46	130.0	± 9.6 %
		Y	4.81	67.08	16.68		130.0	
		Z	4.81	67.10	16.70		130.0	
10586-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.77	68.34	17.31	0.46	130.0	± 9.6 %
		Y	4.71	67.24	16.79		130.0	
		Z	4.71	67.25	16.81		130.0	
10587-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.49	67.40	16.50	0.46	130.0	± 9.6 %
		Y	4.47	66.48	16.07		130.0	
		Z	4.47	66.51	16.11		130.0	
10588-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.53	67.41	16.50	0.46	130.0	± 9.6 %
		Y	4.52	66.54	16.11		130.0	
		Z	4.52	66.58	16.14		130.0	
10589-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.68	68.45	17.30	0.46	130.0	± 9.6 %
		Y	4.61	67.30	16.75		130.0	
		Z	4.61	67.31	16.77		130.0	
10590-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.41	67.05	16.22	0.46	130.0	± 9.6 %
		Y	4.41	66.23	15.85		130.0	
		Z	4.41	66.27	15.89		130.0	

EX3DV4- SN:7413

July 26, 2017

10591-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.77	67.62	16.97	0.46	130.0	± 9.6 %
		Y	4.75	66.71	16.56		130.0	
		Z	4.75	66.72	16.58		130.0	
10592-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.92	67.96	17.10	0.46	130.0	± 9.6 %
		Y	4.89	67.03	16.69		130.0	
		Z	4.89	67.04	16.71		130.0	
10593-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.83	67.85	16.97	0.46	130.0	± 9.6 %
		Y	4.81	66.92	16.56		130.0	
		Z	4.81	66.93	16.58		130.0	
10594-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.90	68.06	17.15	0.46	130.0	± 9.6 %
		Y	4.87	67.10	16.72		130.0	
		Z	4.87	67.11	16.74		130.0	
10595-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.86	68.01	17.05	0.46	130.0	± 9.6 %
		Y	4.83	67.06	16.62		130.0	
		Z	4.83	67.07	16.64		130.0	
10596-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.80	68.00	17.05	0.46	130.0	± 9.6 %
		Y	4.76	67.04	16.62		130.0	
		Z	4.77	67.06	16.65		130.0	
10597-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.75	67.89	16.93	0.46	130.0	± 9.6 %
		Y	4.71	66.93	16.49		130.0	
		Z	4.72	66.94	16.51		130.0	
10598-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.75	68.24	17.27	0.46	130.0	± 9.6 %
		Y	4.70	67.16	16.75		130.0	
		Z	4.70	67.17	16.77		130.0	
10599-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.38	67.86	16.99	0.46	130.0	± 9.6 %
		Y	5.42	67.19	16.76		130.0	
		Z	5.42	67.20	16.78		130.0	
10600-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.45	68.08	17.07	0.46	130.0	± 9.6 %
		Y	5.54	67.59	16.93		130.0	
		Z	5.55	67.61	16.97		130.0	
10601-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.39	68.02	17.06	0.46	130.0	± 9.6 %
		Y	5.44	67.35	16.83		130.0	
		Z	5.44	67.37	16.86		130.0	
10602-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.46	67.93	16.92	0.46	130.0	± 9.6 %
		Y	5.56	67.50	16.82		130.0	
		Z	5.57	67.52	16.86		130.0	
10603-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.57	68.35	17.27	0.46	130.0	± 9.6 %
		Y	5.62	67.74	17.08		130.0	
		Z	5.63	67.76	17.11		130.0	
10604-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.42	67.95	17.06	0.46	130.0	± 9.6 %
		Y	5.50	67.40	16.90		130.0	
		Z	5.50	67.43	16.93		130.0	
10605-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.46	68.03	17.09	0.46	130.0	± 9.6 %
		Y	5.54	67.52	16.95		130.0	
		Z	5.55	67.55	16.99		130.0	
10606-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.24	67.48	16.68	0.46	130.0	± 9.6 %
		Y	5.28	66.81	16.45		130.0	
		Z	5.28	66.83	16.49		130.0	

Certificate No: EX3-7413_Jul17

Page 35 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN-7413

July 26, 2017

10607-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.65	67.13	16.72	0.46	130.0	± 9.6 %
		Y	4.60	66.05	16.19		130.0	
		Z	4.60	66.07	16.22		130.0	
10608-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.83	67.53	16.87	0.46	130.0	± 9.6 %
		Y	4.76	66.42	16.35		130.0	
		Z	4.76	66.44	16.38		130.0	
10609-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.72	67.38	16.71	0.46	130.0	± 9.6 %
		Y	4.65	66.26	16.18		130.0	
		Z	4.65	66.28	16.21		130.0	
10610-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.78	67.57	16.90	0.46	130.0	± 9.6 %
		Y	4.70	66.43	16.35		130.0	
		Z	4.70	66.44	16.37		130.0	
10611-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.68	67.35	16.73	0.46	130.0	± 9.6 %
		Y	4.62	66.23	16.20		130.0	
		Z	4.62	66.25	16.22		130.0	
10612-AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.69	67.50	16.77	0.46	130.0	± 9.6 %
		Y	4.62	66.37	16.24		130.0	
		Z	4.62	66.40	16.27		130.0	
10613-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.68	67.32	16.62	0.46	130.0	± 9.6 %
		Y	4.62	66.22	16.10		130.0	
		Z	4.62	66.24	16.13		130.0	
10614-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.66	67.67	16.95	0.46	130.0	± 9.6 %
		Y	4.57	66.43	16.35		130.0	
		Z	4.57	66.44	16.37		130.0	
10615-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.67	67.09	16.45	0.46	130.0	± 9.6 %
		Y	4.61	66.06	15.97		130.0	
		Z	4.62	66.09	16.00		130.0	
10616-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.26	67.36	16.75	0.46	130.0	± 9.6 %
		Y	5.24	66.45	16.38		130.0	
		Z	5.24	66.46	16.40		130.0	
10617-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.31	67.48	16.78	0.46	130.0	± 9.6 %
		Y	5.31	66.65	16.45		130.0	
		Z	5.31	66.66	16.48		130.0	
10618-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.22	67.61	16.87	0.46	130.0	± 9.6 %
		Y	5.20	66.67	16.48		130.0	
		Z	5.20	66.68	16.50		130.0	
10619-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.21	67.31	16.65	0.46	130.0	± 9.6 %
		Y	5.21	66.44	16.30		130.0	
		Z	5.21	66.46	16.32		130.0	
10620-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.29	67.31	16.69	0.46	130.0	± 9.6 %
		Y	5.29	66.47	16.36		130.0	
		Z	5.29	66.49	16.39		130.0	
10621-AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.32	67.55	16.94	0.46	130.0	± 9.6 %
		Y	5.30	66.62	16.56		130.0	
		Z	5.30	66.63	16.57		130.0	
10622-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.32	67.65	16.98	0.46	130.0	± 9.6 %
		Y	5.32	66.80	16.64		130.0	
		Z	5.32	66.81	16.66		130.0	

Certificate No: EX3-7413_Jul17

Page 36 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10623-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.19	67.15	16.60	0.46	130.0	± 9.6 %
		Y	5.19	66.29	16.25		130.0	
		Z	5.19	66.30	16.28		130.0	
10624-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.38	67.33	16.74	0.46	130.0	± 9.6 %
		Y	5.38	66.50	16.42		130.0	
		Z	5.38	66.51	16.44		130.0	
10625-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.62	67.92	17.08	0.46	130.0	± 9.6 %
		Y	5.63	67.14	16.79		130.0	
		Z	5.63	67.15	16.82		130.0	
10626-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.55	67.36	16.66	0.46	130.0	± 9.6 %
		Y	5.56	66.51	16.34		130.0	
		Z	5.56	66.52	16.36		130.0	
10627-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.74	67.77	16.82	0.46	130.0	± 9.6 %
		Y	5.79	67.09	16.59		130.0	
		Z	5.79	67.11	16.62		130.0	
10628-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.55	67.35	16.55	0.46	130.0	± 9.6 %
		Y	5.57	66.54	16.25		130.0	
		Z	5.57	66.55	16.28		130.0	
10629-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.62	67.38	16.55	0.46	130.0	± 9.6 %
		Y	5.65	66.63	16.29		130.0	
		Z	5.65	66.64	16.32		130.0	
10630-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.84	68.24	16.98	0.46	130.0	± 9.6 %
		Y	6.00	67.87	16.91		130.0	
		Z	6.00	67.90	16.95		130.0	
10631-AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.92	68.60	17.37	0.46	130.0	± 9.6 %
		Y	5.93	67.78	17.06		130.0	
		Z	5.93	67.78	17.07		130.0	
10632-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.75	67.98	17.07	0.46	130.0	± 9.6 %
		Y	5.77	67.18	16.78		130.0	
		Z	5.77	67.19	16.80		130.0	
10633-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.64	67.60	16.70	0.46	130.0	± 9.6 %
		Y	5.64	66.74	16.38		130.0	
		Z	5.64	66.75	16.41		130.0	
10634-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.64	67.70	16.82	0.46	130.0	± 9.6 %
		Y	5.62	66.76	16.45		130.0	
		Z	5.62	66.77	16.47		130.0	
10635-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.46	66.80	16.07	0.46	130.0	± 9.6 %
		Y	5.49	66.06	15.83		130.0	
		Z	5.49	66.08	15.86		130.0	
10636-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.95	67.64	16.68	0.46	130.0	± 9.6 %
		Y	5.98	66.87	16.42		130.0	
		Z	5.98	66.88	16.45		130.0	
10637-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.07	67.93	16.81	0.46	130.0	± 9.6 %
		Y	6.13	67.24	16.59		130.0	
		Z	6.13	67.26	16.62		130.0	
10638-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.08	67.94	16.78	0.46	130.0	± 9.6 %
		Y	6.12	67.21	16.56		130.0	
		Z	6.13	67.23	16.58		130.0	

Certificate No: EX3-7413_Jul17

Page 37 of 38

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

July 26, 2017

10639-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.07	67.92	16.82	0.46	130.0	± 9.6 %
		Y	6.10	67.14	16.56		130.0	
		Z	6.10	67.15	16.59		130.0	
10640-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.05	67.86	16.73	0.46	130.0	± 9.6 %
		Y	6.09	67.14	16.50		130.0	
		Z	6.10	67.15	16.53		130.0	
10641-AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.09	67.74	16.68	0.46	130.0	± 9.6 %
		Y	6.16	67.10	16.51		130.0	
		Z	6.16	67.12	16.54		130.0	
10642-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.18	68.15	17.07	0.46	130.0	± 9.6 %
		Y	6.18	67.32	16.78		130.0	
		Z	6.19	67.33	16.80		130.0	
10643-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.98	67.70	16.74	0.46	130.0	± 9.6 %
		Y	6.03	67.02	16.53		130.0	
		Z	6.03	67.04	16.56		130.0	
10644-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.10	68.09	16.95	0.46	130.0	± 9.6 %
		Y	6.14	67.36	16.72		130.0	
		Z	6.14	67.37	16.74		130.0	
10645-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.21	68.04	16.87	0.46	130.0	± 9.6 %
		Y	6.27	67.40	16.70		130.0	
		Z	6.27	67.42	16.73		130.0	
10646-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	13.89	104.90	35.11	9.30	60.0	± 9.6 %
		Y	20.31	114.82	39.91		60.0	
		Z	29.97	126.11	43.70		60.0	
10647-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	11.47	101.31	34.12	9.30	60.0	± 9.6 %
		Y	16.95	111.15	38.95		60.0	
		Z	23.30	120.64	42.30		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	7.00	96.92	23.87	0.00	150.0	± 9.6 %
		Y	0.65	63.10	10.22		150.0	
		Z	0.65	63.21	10.30		150.0	

² Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix B.2 Calibration certificate for DAE

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **DAE4-1503_Aug17**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 1503**

Calibration procedure(s) **QA CAL-06.v29**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **August 03, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	09-Sep-16 (No:19065)	Sep-17
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	05-Jan-17 (in house check)	In house check: Jan-18
Calibrator Box V2.1	SE UMS 006 AA 1002	05-Jan-17 (in house check)	In house check: Jan-18

Calibrated by:	Name Dominique Steffen	Function Laboratory Technician	Signature 
Approved by:	Sven Kühn	Deputy Manager	

Issued: August 3, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **DAE4-1503_Aug17**

Page 1 of 5

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV
 Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.963 ± 0.02% (k=2)	404.190 ± 0.02% (k=2)	404.151 ± 0.02% (k=2)
Low Range	3.94952 ± 1.50% (k=2)	3.97769 ± 1.50% (k=2)	3.95645 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	296.0 ° ± 1 °
---	---------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200029.54	-13.01	-0.01
Channel X + Input	20005.96	1.20	0.01
Channel X - Input	-20003.13	1.86	-0.01
Channel Y + Input	200034.71	0.88	0.00
Channel Y + Input	20004.73	0.12	0.00
Channel Y - Input	-20005.90	-0.72	0.00
Channel Z + Input	200031.07	-2.89	-0.00
Channel Z + Input	20004.29	-0.23	-0.00
Channel Z - Input	-20003.09	2.18	-0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.65	-0.41	-0.02
Channel X + Input	201.18	0.13	0.07
Channel X - Input	-198.56	0.45	-0.22
Channel Y + Input	2001.14	0.08	0.00
Channel Y + Input	200.57	-0.36	-0.18
Channel Y - Input	-199.35	-0.27	0.14
Channel Z + Input	2001.50	0.54	0.03
Channel Z + Input	200.07	-0.81	-0.40
Channel Z - Input	-199.86	-0.60	0.30

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	10.42	8.53
	- 200	-6.60	-8.45
Channel Y	200	-10.38	-10.56
	- 200	9.65	9.80
Channel Z	200	-13.55	-13.41
	- 200	11.35	11.88

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.27	-3.01
Channel Y	200	7.38	-	2.30
Channel Z	200	10.29	4.61	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15556	16886
Channel Y	16206	14562
Channel Z	15467	14256

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	1.26	-0.03	2.32	0.43
Channel Y	0.03	-0.95	1.57	0.45
Channel Z	1.02	-0.56	2.40	0.46

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Appendix B.3 Calibration certificate for Dipole

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **D2450V2-892_Apr17**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 892**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz



Calibration date: **April 21, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature



Approved by: **Katja Pokovic** Technical Manager



Issued: April 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D2450V2-892_Apr17**

Page 1 of 8

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.7 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.5 $\pm$ 6 %	2.03 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.4 Ω + 3.4 j Ω
Return Loss	- 24.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.5 Ω + 6.1 j Ω
Return Loss	- 24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2011

DASY5 Validation Report for Head TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 892

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.7 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 21.1 W/kg

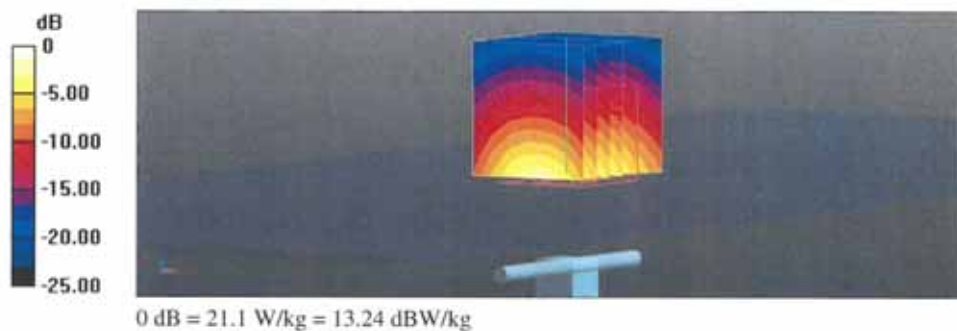

Impedance Measurement Plot for Head TSL

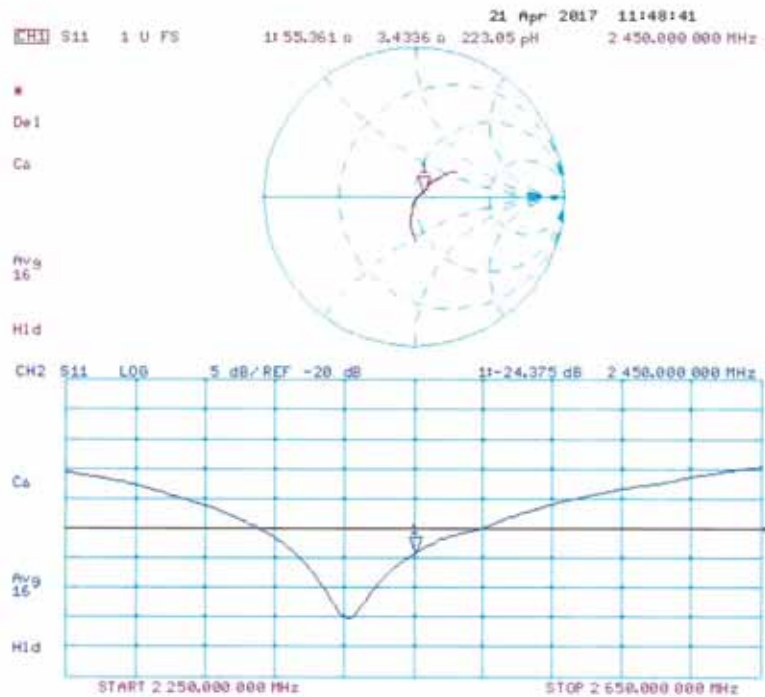

DASY5 Validation Report for Body TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 892

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.4 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

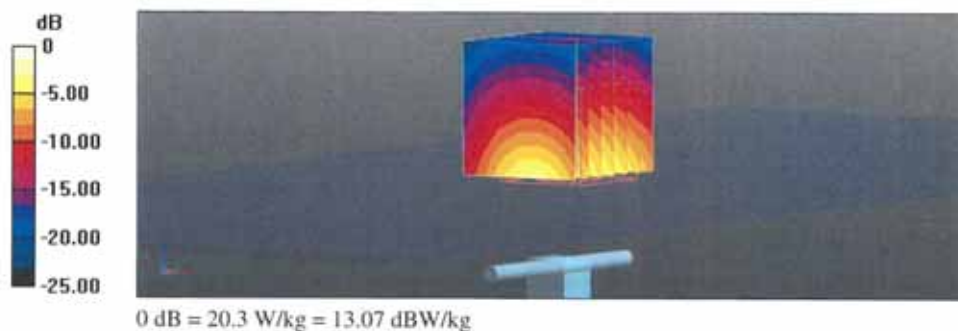

Impedance Measurement Plot for Body TSL

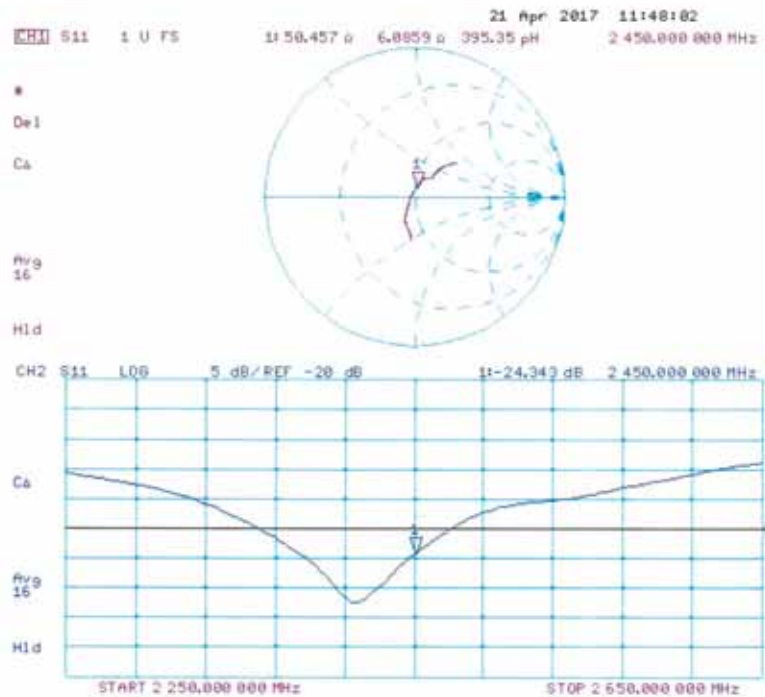

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **D5GHzV2-1106_May17**

CALIBRATION CERTIFICATE

Object	D5GHzV2 - SN:1106		
Calibration procedure(s)	QA CAL-22.v2 Calibration procedure for dipole validation kits between 3-6 GHz		
Calibration date:	May 26, 2017		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	31-Dec-16 (No. EX3-3503_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17
Calibrated by:	Name Johannes Kurikka	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: May 26, 2017

Certificate No: D5GHzV2-1106_May17

Page 1 of 14

Report File No : F690501/RF-SAR002569

Date of Issue : 2018-04-24

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)