



TESTING CERT #3478.01



SAR TEST REPORT

EUT Description	Wireless Module installed in Tablet
Brand Name	Intel® Dual Band Wireless-AC 8260
Model Name	18260NGW
Serial Number	MAC:34.13.E8.3D.3B.05
FCC/IC ID	FCC ID: PD98260NG & PD98260NGU IC ID: 1000M-8260NG
Antenna type	Antenna: ACON, Advanced-Connectek Inc. Main: D-APP5P-GFC200 Aux: D-APP5P-GFC201
Hardware/Software Version	DRTU version: 1.8.3-01563 Driver version:18.12.0.1
Date of Sample Receipt	2015-08-18
Date of Test Start/End	2015-09-09/2015-09-29
Features	WiFi: 802.11 a/b/g/n/ac 2.4/5.2/5.3/5.6/5.8 GHz Bluetooth: BDR/EDR v2.1, Bluetooth LE v4.0 (see section 7)
Description	Wireless Module: Intel® 8260NGW Platform: Toshiba Model - PT16A Series

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, Issue 4 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.32 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	3.82mm	

Test Report number	15072001.TR01
Revision Control	Rev. 00

The test results relate only to the samples tested.

The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by Reviewed by Approved by

Cheiel IN
(SAR Test Lead)

Jose M. FORTES
(Technical Manager)

Nawfal ASRIH
(Laboratory Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 – 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees.....	3
3. Environmental Conditions	4
4. Test samples.....	4
5. Remarks and comments.....	4
6. Document Revision History	4
7. Equipment Under Test.....	5
8. Test Verdicts summary.....	7
Annex A. Test & System Description	8
A.1 SAR DEFINITION	8
A.2 SPEAG SAR MEASUREMENT SYSTEM	9
A.2.1 SAR MEASUREMENT SETUP	9
A.2.2 E-FIELD MEASUREMENT PROBE	10
A.2.3 SAM PHANTOM	10
A.2.4 FLAT PHANTOM	11
A.2.5 DEVICE POSITIONER.....	11
A.3 DATA EVALUATION	12
A.4 SYSTEM AND LIQUID CHECK.....	14
A.4.1 SYSTEM CHECK	14
A.4.2 LIQUID CHECK	15
A.5 TEST EQUIPMENT LIST.....	16
A.6 MEASUREMENT UNCERTAINTY EVALUATION.....	17
A.7 RF EXPOSURE LIMITS	19
Annex B. Test Results.....	20
B.1 TEST CONDITIONS	20
B.1.1 SAR TEST POSITIONS RELATIVE TO THE PHANTOM	20
B.1.2 TEST SIGNAL, OUTPUT POWER AND TEST FREQUENCIES	20
B.1.3 EVALUATION EXCLUSION AND TEST REDUCTIONS.....	20
B.2 CONDUCTED POWER MEASUREMENTS	27
B.2.1 WLAN 2.4GHz (DTS)	27
B.2.2 WLAN 5GHz (UNII)	28
B.2.3 BLUETOOTH	30
B.3 TISSUE PARAMETERS MEASUREMENT.....	31
B.4 SYSTEM CHECK MEASUREMENTS.....	31
B.5 SAR TEST RESULTS.....	32
B.5.1 802.11B/G/N – 2.4GHz - DTS	32
B.5.2 802.11A/N/AC – 5.2 GHz – UNII-1.....	32
B.5.3 802.11A/N/AC – 5.3 GHz – UNII-2A	32
B.5.4 802.11A/N/AC – 5.6 GHz – UNII-2C.....	33
B.5.5 802.11A/N/AC – 5.8 GHz – UNII-3.....	33
B.5.6 BLUETOOTH – 2.4GHz - DSSS.....	34
B.6 SAR MEASUREMENT VARIABILITY	35
B.7 SIMULTANEOUS TRANSMISSION SAR EVALUATION	36
Annex C. Test System Plots.....	37
Annex E. TSL Dielectric Parameters	54
Annex F. Photographs.....	58

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part §2.1093 - Radiofrequency radiation exposure evaluation: portable devices.
2. FCC OET KDB 248827 D01 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
3. FCC OET KDB 447498 D01 – Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.
4. FCC OET KDB 616217 D04 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.
5. FCC OET KDB 865664 D01 – SAR Measurement Requirements for 100 MHz to 6 GHz.
6. FCC OET KDB 865664 D02 – RF Exposure Compliance Reporting and Documentation Considerations.
7. IC RSS 102, Issue 4 – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).
8. IC Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard.
9. IC Notice 2012-DRS1203 – Applicability of latest FCC RF Exposure KDB procedures (publication date October 24, 2012) and other procedures.
10. IC Notice 2013-DRS0911 – Latest publication of IEEE 1528-2013 and power exemption limits.
11. IEEE Std 1528-2003 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
12. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques.

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA).
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ All tests were performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself, and the following limits were not exceeded during the tests:

Temperature	23°C ± 2°C
Humidity	50% ± 10%
Liquid Temperature	23°C ± 2°C

4. Test samples

Sample	Test Item #	Description	Model	Serial #	Date of reception
#01	15072001.S01	Wireless Module installed in Tablet	8260NGW + Toshiba Model PT16A Series	WLAN MAC:34.13.E8.3D.3B.05	2015-08-18

- ✓ Sample #01 has undergone all the test(s) requested by the applicant, following the standards specified in section 1.

5. Remarks and comments

- Only the plots for the test positions with the highest measured SAR per band/mode are included in *Annex C. Test System Plots*, as required per FCC OET KDB 865664 D02, paragraph 2.3.8.

6. Document Revision History

Revision #	Date	Details
Rev. 00	2015-10-12	First Issue

7. Equipment Under Test

Brand Name	Intel® Dual Band Wireless-AC 8260																																														
Model Name	18260NGW																																														
FCC/IC ID	FCC ID: PD98260NG & PD98260NGU IC ID: 1000M-8260NG																																														
Software Version	1.8.3-01563																																														
Driver Version	18.12.0.1																																														
Prototype / Production	Production																																														
Host Identification	Toshiba Model PT16A Series																																														
Exposure Conditions	Body worn																																														
Supported Radios	802.11a/b/g/n/ac BDR/EDR v2.1 - Bluetooth LE v4.0																																														
Antenna Information	Main WLAN: PIFA antenna. WiFi 2.4GHz & 5GHz Aux WLAN: PIFA antenna. WiFi 2.4GHz & 5GHz and BT. See Antenna Diagrams for more information about the location of each antenna within the device.																																														
Maximum Output Power Specification	<table><tr><th colspan="3"></th><th colspan="2">Main/Aux Antenna</th></tr><tr><th>WLAN</th><th>Band Name</th><th>Mode</th><th>Nominal output power (dBm)</th><th>Max tune up tolerance limit (dBm)</th></tr><tr><td rowspan="5">2.4GHz</td><td rowspan="2">DTS</td><td>802.11b/g/n</td><td>13.5</td><td>15.0</td></tr><tr><td>LE</td><td>10.0</td><td>10.0</td></tr><tr><td rowspan="3">DSS</td><td>BDR</td><td>11.5</td><td>11.5</td></tr><tr><td>EDR1</td><td>9.5</td><td>9.5</td></tr><tr><td>EDR2</td><td>9.5</td><td>9.5</td></tr><tr><td rowspan="4">5GHz</td><td>UNII-1</td><td rowspan="4">802.11a/n/ac</td><td>12.0</td><td>13.5</td></tr><tr><td>UNII-2A</td><td>12.0</td><td>13.5</td></tr><tr><td>UNII-2C</td><td>12.0</td><td>13.5</td></tr><tr><td>UNII-3</td><td>12.0</td><td>13.5</td></tr></table>								Main/Aux Antenna		WLAN	Band Name	Mode	Nominal output power (dBm)	Max tune up tolerance limit (dBm)	2.4GHz	DTS	802.11b/g/n	13.5	15.0	LE	10.0	10.0	DSS	BDR	11.5	11.5	EDR1	9.5	9.5	EDR2	9.5	9.5	5GHz	UNII-1	802.11a/n/ac	12.0	13.5	UNII-2A	12.0	13.5	UNII-2C	12.0	13.5	UNII-3	12.0	13.5
			Main/Aux Antenna																																												
WLAN	Band Name	Mode	Nominal output power (dBm)	Max tune up tolerance limit (dBm)																																											
2.4GHz	DTS	802.11b/g/n	13.5	15.0																																											
		LE	10.0	10.0																																											
	DSS	BDR	11.5	11.5																																											
		EDR1	9.5	9.5																																											
		EDR2	9.5	9.5																																											
5GHz	UNII-1	802.11a/n/ac	12.0	13.5																																											
	UNII-2A		12.0	13.5																																											
	UNII-2C		12.0	13.5																																											
	UNII-3		12.0	13.5																																											
Simultaneous Transmission Configurations	WLAN 2.4GHz: Main + Aux antenna WLAN 5GHz: Main + Aux antenna WLAN 2.4GHz Main + BT Aux WLAN 5GHz Main + BT Aux																																														
Additional Information	No WWAN transmitter is considered in this report																																														
	5.60-5.65 GHz band (TDWR) is supported by the device																																														
	Band gap is supported by the device																																														

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
BDR/EDR v2.1	77%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	10.44
Bluetooth LE v4.0	62%	GFSK	2.4GHz	2400-2483.5	3.39
802.11b/g/n	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	14.95
802.11a/n/ac	100%	BPSK QPSK 16QAM 64QAM 256QAM	5.2GHz	5150-5250	13.48
			5.3GHz	5250-5350	13.37
			5.6GHz	5475-5725	13.50
			5.8GHz	5725-5850	13.50

8. Test Verdicts summary

Mode	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b/g/n	2.4GHz	0.98	P
802.11a/n/ac	5.2GHz	1.25	P
	5.3GHz	1.32	P
	5.6GHz	1.27	P
	5.8GHz	1.32	P
	2.4GHz	0.44	P
Bluetooth	2.4GHz	0.44	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Highest Reported SAR (1g) (W/kg)			
Exposure Condition	Equipment Class		
	DTS	DSS	NII
Body Worn	0.98	0.44	1.32
Simultaneous Tx	Sum-SAR: 1.79 SPLSR: 0.024	Sum-SAR: 1.26	Sum-SAR: 2.15 SPLSR: 0.039

Considering the results of the performed test according to FCC 47CFR Part 2.1093 and IC RSS 102, Issue 4 the item under test is IN COMPLIANCE with the requested specifications specified in section 1. *Standards, reference documents and applicable test methods.*

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:

σ = Conductivity of the tissue (S/m)
 ρ = Mass density of the tissue (kg/m³)
 E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup


The DASY5 system for performing compliance tests consists of the following items:

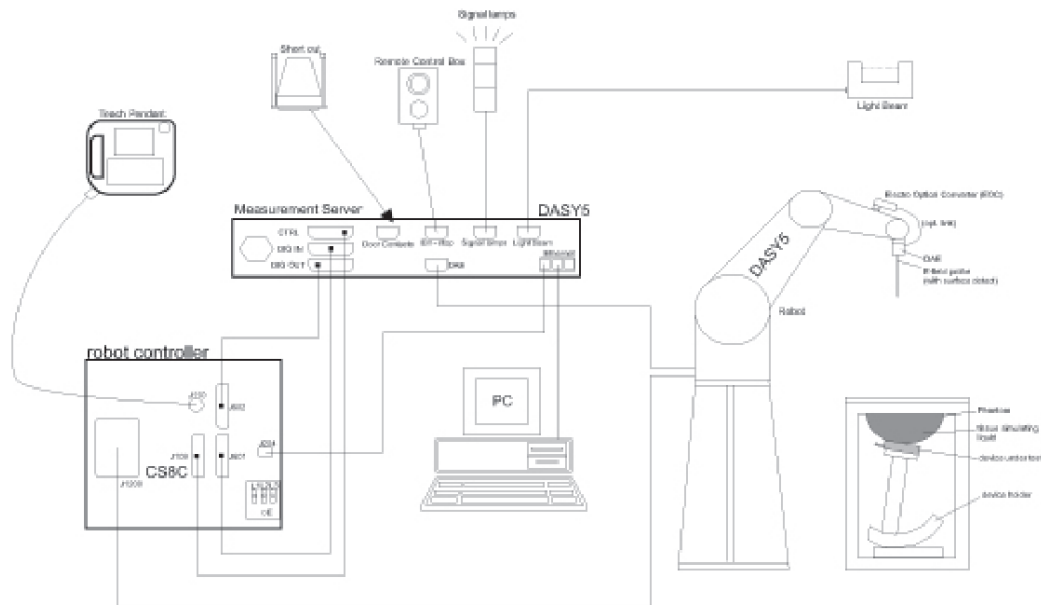

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY5 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:

Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Shell thickness at ERP	6 ± 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm



A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm



A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.

A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. An example grid is shown in Figure 11. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of

the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

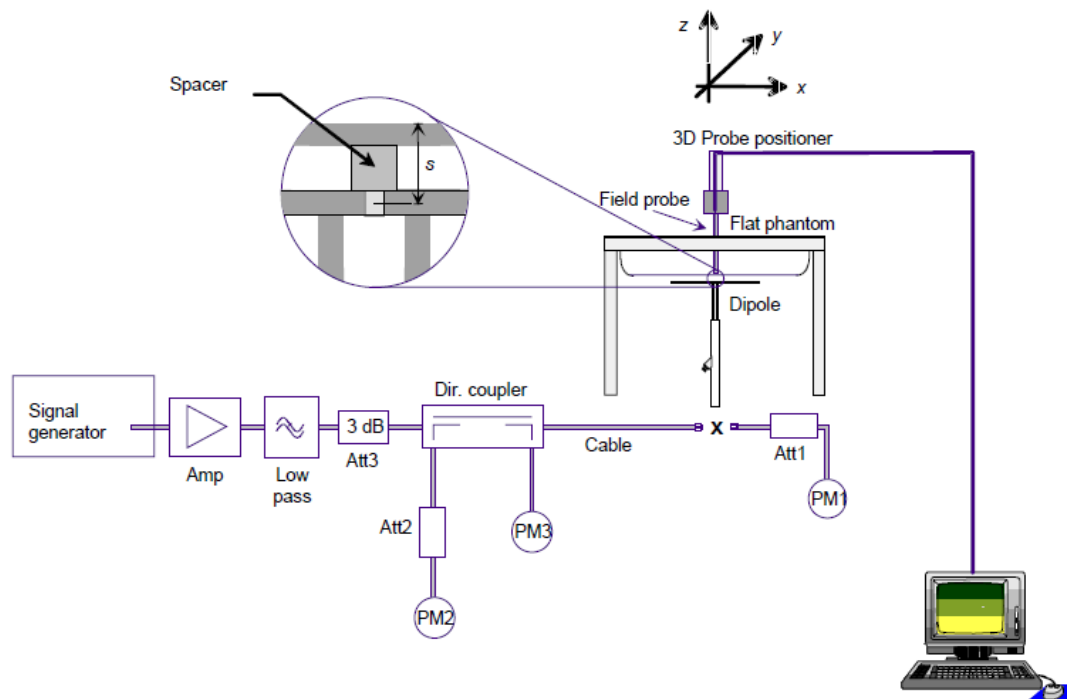

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

The output power on dipole port must be set to 20dBm (100mW) and SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

SPEAG SAR System

Device	Type/Model	Serial Number	Manufacturer	Calibration Date	Calibration Due
Dosimetric E-field Probe	EX3DV4	3978	SPEAG	2015-06-15	2016-06-15
Data Acquisition Electronics	DAE4	1429	SPEAG	2015-06-11	2016-06-11
Electro-Optical Converter	EOC60	-	SPEAG	NA	NA
Light Beam Unit	LB5 / 80	-	di-soric	NA	NA
6-axis Robot	TX60 L	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
Measurement Server	DASY5 P/N: SE UMS 011 EA	1444	SPEAG	NA	NA
SAM Phantom	Twin SAM v5.0	1838	SPEAG	NA	NA
Oval Flat Phantom	ELI v5.0	1260	SPEAG	NA	NA
Handset Positioner	P/N SD 000 H01 KA	-	SPEAG	NA	NA
Dielectric Probe Kit	DAKS-3.5	1037	SPEAG	2014-06-24	2016-06-24
Vector Reflectometer	PLANAR R140	0131013	Copper Mountain Technologies	2015-08-06	2017-08-06
2450MHz System Validation Dipole	D2450V2	937	SPEAG	2014-06-24	2016-06-24
5GHz System Validation Dipole	D5GHZv2	1164	SPEAG	2015-06-18	2017-06-18
DASY software	-	9-618AE2F1	SPEAG	NA	NA
DAKS software	-	9-2687B491	SPEAG	NA	NA

Shared Instrumentation

Device	Type/Model	Serial Number	Manufacturer	Calibration Date	Calibration Due
Temperature & Humidity Logger	TR-702W + THA-3151	Logger: 38740061 / Sensor: 020429AD	TandD	2013-12-26	2015-12-26
USB Power Sensor	NRP-Z81	102278	R&S	2015-09-10	2017-09-10
USB Power Sensor	NRP-Z81	102279	R&S	2015-09-10	2017-09-10
Vector Signal Generator	ESG E4438C	MY45092885	Agilent	NA	NA
Power Meter	E4418B	MY41295204	Agilent	2014-04-01	2016-04-01
Power Sensor	E9300A	MY41495592	Agilent	2014-04-09	2016-04-09
Power Amplifier	-	MODU-023-B- 0001	SATIMO	NA	NA
Coupler	CD0.5-8-20-30	1251-002	Amd-group	NA	NA

Tissue Simulant Liquids

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body 2450	SPEAG MSL2450V2	2400-2700	H ₂ O, NaCl, DGBE
Body 5GHz	SATIMO 5000MHz	5000-6000	Triton X-100, H ₂ O, DGMH

A.6 Measurement Uncertainty Evaluation

DASY5 Uncertainty Budget According to IEEE 1528/2011 and IEC 62209-1/2011								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	√3	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

SPEAG System Uncertainty budget (IEEE 1528-2011 & IEC 62209-1:2011)

DASY5 Uncertainty Budget According to IEC 62209-2/2010								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Post-processing	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scaling ^p	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±7.9 %	R	$\sqrt{3}$	1	1	±4.6 %	±4.6 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.5 %	±12.5 %	748
Expanded STD Uncertainty						±25.1 %	±25.0 %	

SPEAG System Uncertainty budget (IEC 62209-2:2010)

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part §2.1093 and RSS 102, Issue 4 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

B.1 Test Conditions

B.1.1 SAR Test positions relative to the phantom

The device under test was the Intel® Dual Band Wireless-AC 8260 card inside a 2 in 1 host tablet + keyboard dock (Toshiba Model PT16A Series) computer using a set of Acon antennas. The card was operated utilizing proprietary software (DRTU version 1.8.3-01563) and each channel was measured using a broadband power meter to determine the maximum average power.

According to FCC OET KDB 616217 D04, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations.

The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

Considering the antenna location diagrams in *Annex E* and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Main	Aux
Position	- Back face - Top edge - Right edge	- Back face - Top edge

See *B.1.3 Evaluation Exclusion and Test Reductions* for a more detailed list of the applied reductions.

B.1.2 Test signal, Output power and Test Frequencies

The device was put into operation by using an own control software (DRTU version 1.8.3-01563) to program the test mode required for select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

B.1.3 Evaluation Exclusion and Test Reductions

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

According to FCC OET KDB 248227 D01, an initial test configuration is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.

2.4GHz (DTS)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11b	20	1Mbps	1	2412	Main	31.62	T	R ¹	R ³	R ¹	R ³
			6	2437		31.62	R ¹	R ¹	R ³	R ¹	R ³
			11	2462		31.62	T	T	R ³	T	R ³
			1	2412	Aux	31.62	T	R ¹	R ³	R ³	R ³
			6	2437		31.62	R ¹	T	R ³	R ³	R ³
			11	2462		31.62	T	R ¹	R ³	R ³	R ³
802.11g	20	6Mbps	1	2412	Main	31.62	R ²	R ²	R ³	R ²	R ³
			6	2437		31.62	R ²	R ²	R ³	R ²	R ³
			11	2462		31.62	R ²	R ²	R ³	R ²	R ³
			1	2412	Aux	31.62	R ²	R ²	R ³	R ³	R ³
			6	2437		31.62	R ²	R ²	R ³	R ³	R ³
			11	2462		31.62	R ²	R ²	R ³	R ³	R ³
802.11n	20	HT0	1	2412	Main	31.62	R ²	R ²	R ³	R ²	R ³
			6	2437		31.62	R ²	R ²	R ³	R ²	R ³
			11	2462		31.62	R ²	R ²	R ³	R ²	R ³
			1	2412	Aux	31.62	R ²	R ²	R ³	R ³	R ³
			6	2437		31.62	R ²	R ²	R ³	R ³	R ³
			11	2462		31.62	R ²	R ²	R ³	R ³	R ³
	40	HT0	3	2422	Main	31.62	R ²	R ²	R ³	R ²	R ³
			6	2437		31.62	R ²	R ²	R ³	R ²	R ³
			9	2452		31.62	R ²	R ²	R ³	R ²	R ³
			3	2422	Aux	31.62	R ²	R ²	R ³	R ³	R ³
			6	2437		31.62	R ²	R ²	R ³	R ³	R ³
			9	2452		31.62	R ²	R ²	R ³	R ³	R ³

T Tested configuration

R¹ Reduced. According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following:

- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel.

R² Reduced. According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

R³ Reduced. According to FCC OET KDB 447498 D01, at 1500 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, where the Max allowed Power is including the tune-up tolerance:

$$\text{Max allowed Power} = \frac{3.0}{\sqrt{f(\text{GHz})}} \cdot 50\text{mm} + (\text{Test Sep Distance}(\text{mm}) - 50\text{mm}) \cdot 10$$

5.2GHz (UNII-1)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11a	20	6Mbps	36	5180	Main	22.39	R ²	R ²	R ³	R ²	R ³
			40	5200		22.39	R ²	R ²	R ³	R ²	R ³
			44	5220		22.39	R ²	R ²	R ³	R ²	R ³
			48	5240		22.39	R ²	R ²	R ³	R ²	R ³
			36	5180	Aux	22.39	T	R ²	R ³	R ³	R ³
			40	5200		22.39	T	R ²	R ³	R ³	R ³
			44	5220		22.39	T	R ²	R ³	R ³	R ³
			48	5240		22.39	T	R ²	R ³	R ³	R ³
802.11n	20	HT0	36	5180	Main	22.39	R ²	R ²	R ³	R ²	R ³
			40	5200		22.39	R ²	R ²	R ³	R ²	R ³
			44	5220		22.39	R ²	R ²	R ³	R ²	R ³
			48	5240		22.39	R ²	R ²	R ³	R ²	R ³
			36	5180	Aux	22.39	R ¹	R ²	R ³	R ³	R ³
			40	5200		22.39	R ¹	R ²	R ³	R ³	R ³
			44	5220		22.39	R ¹	R ²	R ³	R ³	R ³
			48	5240		22.39	R ¹	R ²	R ³	R ³	R ³
	40	HT0	38	5190	Main	22.39	R ²	R ²	R ³	R ²	R ³
			46	5230		22.39	R ²	R ²	R ³	R ²	R ³
			38	5190	Aux	22.39	T	R ²	R ³	R ³	R ³
			46	5230		22.39	T	R ²	R ³	R ³	R ³
802.11ac	80	VTH0	42	5210	Main	22.39	T	T	R ³	T	R ³
					Aux	22.39	T	T	R ³	R ³	R ³

T Tested configuration

R¹ Reduced. According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

R² Reduced. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

R³ Reduced. According to FCC OET KDB 447498 D01, at 1500 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, where the Max allowed Power is including the tune-up tolerance:

$$Max\ allowed\ Power = \frac{3.0}{\sqrt{f(GHz)}} \cdot 50mm + (Test\ Sep\ Distance(mm) - 50mm) \cdot 10$$

5.3GHz (UNII-2A)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11a	20	6Mbps	52	5260	Main	22.39	R ²	R ²	R ³	R ²	R ³
			56	5280		22.39	R ²	R ²	R ³	R ²	R ³
			60	5300		22.39	R ²	R ²	R ³	R ²	R ³
			64	5320		22.39	R ²	R ²	R ³	R ²	R ³
			52	5260	Aux	22.39	T	R ²	R ³	R ³	R ³
			56	5280		22.39	T	R ²	R ³	R ³	R ³
			60	5300		22.39	T	R ²	R ³	R ³	R ³
			64	5320		22.39	T	R ²	R ³	R ³	R ³
802.11n	20	HT0	52	5260	Main	22.39	R ²	R ²	R ³	R ²	R ³
			56	5280		22.39	R ²	R ²	R ³	R ²	R ³
			60	5300		22.39	R ²	R ²	R ³	R ²	R ³
			64	5320		22.39	R ²	R ²	R ³	R ²	R ³
			52	5260	Aux	22.39	R ¹	R ²	R ³	R ³	R ³
			56	5280		22.39	R ¹	R ²	R ³	R ³	R ³
			60	5300		22.39	R ¹	R ²	R ³	R ³	R ³
			64	5320		22.39	R ¹	R ²	R ³	R ³	R ³
	40	HT0	54	5270	Main	22.39	R ²	R ²	R ³	R ²	R ³
			62	5310		22.39	R ²	R ²	R ³	R ²	R ³
			54	5270	Aux	22.39	T	R ²	R ³	R ³	R ³
			62	5310		22.39	T	R ²	R ³	R ³	R ³
802.11ac	80	VTH0	58	5290	Main	22.39	T	T	R ³	T	R ³
					Aux	22.39	T	T	R ³	R ³	R ³

T Tested configuration

R¹ Reduced. According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

R² Reduced. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

R³ Reduced. According to FCC OET KDB 447498 D01, at 1500 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, where the Max allowed Power is including the tune-up tolerance:

$$\text{Max allowed Power} = \frac{3.0}{\sqrt{f(\text{GHz})}} \cdot 50\text{mm} + (\text{Test Sep Distance}(\text{mm}) - 50\text{mm}) \cdot 10$$

5.6GHz (UNII-2C)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11a	20	6Mbps	100	5500	Main	22.39	R ²	R ²	R ³	R ²	R ³
			104	5520		22.39	R ²	R ²	R ³	R ²	R ³
			108	5540		22.39	R ²	R ²	R ³	R ²	R ³
			112	5560		22.39	R ²	R ²	R ³	R ²	R ³
			116	5580		22.39	R ²	R ²	R ³	R ²	R ³
			120	5600		22.39	R ²	R ²	R ³	R ²	R ³
			124	5620		22.39	R ²	R ²	R ³	R ²	R ³
			128	5640		22.39	R ²	R ²	R ³	R ²	R ³
			132	5660		22.39	R ²	R ²	R ³	R ²	R ³
			136	5680		22.39	R ²	R ²	R ³	R ²	R ³
			140	5700		22.39	R ²	R ²	R ³	R ²	R ³
			100	5500	Aux	22.39	T	R ²	R ³	R ³	R ³
			104	5520		22.39	T	R ²	R ³	R ³	R ³
			108	5540		22.39	T	R ²	R ³	R ³	R ³
			112	5560		22.39	T	R ²	R ³	R ³	R ³
			116	5580		22.39	T	R ²	R ³	R ³	R ³
			120	5600		22.39	T	R ²	R ³	R ³	R ³
			124	5620		22.39	T	R ²	R ³	R ³	R ³
			128	5640		22.39	T	R ²	R ³	R ³	R ³
			132	5660		22.39	T	R ²	R ³	R ³	R ³
			136	5680		22.39	T	R ²	R ³	R ³	R ³
			140	5700		22.39	T	R ²	R ³	R ³	R ³
802.11n	20	HT0	100	5500	Main	22.39	R ²	R ²	R ³	R ²	R ³
			104	5520		22.39	R ²	R ²	R ³	R ²	R ³
			108	5540		22.39	R ²	R ²	R ³	R ²	R ³
			112	5560		22.39	R ²	R ²	R ³	R ²	R ³
			116	5580		22.39	R ²	R ²	R ³	R ²	R ³
			120	5600		22.39	R ²	R ²	R ³	R ²	R ³
			124	5620		22.39	R ²	R ²	R ³	R ²	R ³
			128	5640		22.39	R ²	R ²	R ³	R ²	R ³
			132	5660		22.39	R ²	R ²	R ³	R ²	R ³
			136	5680		22.39	R ²	R ²	R ³	R ²	R ³
			140	5700		22.39	R ²	R ²	R ³	R ²	R ³
			100	5500	Aux	22.39	R ¹	R ²	R ³	R ³	R ³
			104	5520		22.39	R ¹	R ²	R ³	R ³	R ³
			108	5540		22.39	R ¹	R ²	R ³	R ³	R ³
			112	5560		22.39	R ¹	R ²	R ³	R ³	R ³
			116	5580		22.39	R ¹	R ²	R ³	R ³	R ³
			120	5600		22.39	R ¹	R ²	R ³	R ³	R ³
			124	5620		22.39	R ¹	R ²	R ³	R ³	R ³
			128	5640		22.39	R ¹	R ²	R ³	R ³	R ³
			132	5660		22.39	R ¹	R ²	R ³	R ³	R ³
			136	5680		22.39	R ¹	R ²	R ³	R ³	R ³
			140	5700		22.39	R ¹	R ²	R ³	R ³	R ³

5.6GHz (UNII-2C)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11n	40	HT0	102	5510	Main	22.39	R ²	R ²	R ³	R ²	R ³
			110	5550		22.39	R ²	R ²	R ³	R ²	R ³
			118	5590		22.39	R ²	R ²	R ³	R ²	R ³
			126	5630		22.39	R ²	R ²	R ³	R ²	R ³
			134	5670		22.39	R ²	R ²	R ³	R ²	R ³
			102	5510	Aux	22.39	T	R ²	R ³	R ³	R ³
			110	5550		22.39	T	R ²	R ³	R ³	R ³
			118	5590		22.39	T	R ²	R ³	R ³	R ³
			126	5630		22.39	T	R ²	R ³	R ³	R ³
			134	5670		22.39	T	R ²	R ³	R ³	R ³
802.11ac	20	VHT0	144	5720	Main	22.39	R ¹	R ²	R ³	R ²	R ³
					Aux	22.39	T	R ²	R ³	R ³	R ³
	40	VHT0	142	5710	Main	22.39	R ¹	R ²	R ³	R ²	R ³
					Aux	22.39	T	R ²	R ³	R ⁴	R ³
	80	VHT0	106	5530	Main	22.39	T	T	R ³	T	R ³
			122	5610		22.39	T	R ²	R ³	R ²	R ³
			138	5690		22.39	R ²	R ²	R ³	R ²	R ³
			106	5530	Aux	22.39	T	T	R ³	R ³	R ³
			122	5610		22.39	T	R ²	R ³	R ³	R ³
			138	5690		22.39	T	R ²	R ³	R ³	R ³

T Tested configuration

R¹ Reduced. According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

R² Reduced. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

R³ Reduced. According to FCC OET KDB 447498 D01, at 1500 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, where the Max allowed Power is including the tune-up tolerance:

$$\text{Max allowed Power} = \frac{3.0}{\sqrt{f(\text{GHz})}} \cdot 50\text{mm} + (\text{Test Sep Distance}(\text{mm}) - 50\text{mm}) \cdot 10$$

5.8GHz (UNII-3)							Test Positions				
Mode	BW [MHz]	Data Rate	Channel	Frequency (MHz)	Antenna	Factory Upper Tolerance (mW)	Back Face	Top Edge	Bottom Edge	Right Edge	Left Edge
802.11a	20	6Mbps	149	5745	Main	22.39	R ²	R ²	R ³	R ²	R ³
			153	5765		22.39	R ²	R ²	R ³	R ²	R ³
			157	5785		22.39	R ²	R ²	R ³	R ²	R ³
			161	5805		22.39	R ²	R ²	R ³	R ²	R ³
			165	5825		22.39	R ²	R ²	R ³	R ²	R ³
			149	5745	Aux	22.39	T	R ²	R ³	R ³	R ³
			153	5765		22.39	T	R ²	R ³	R ³	R ³
			157	5785		22.39	T	R ²	R ³	R ³	R ³
			161	5805		22.39	T	R ²	R ³	R ³	R ³
			165	5825		22.39	T	R ²	R ³	R ³	R ³
802.11n	20	HT0	149	5745	Main	22.39	R ²	R ²	R ³	R ²	R ³
			153	5765		22.39	R ²	R ²	R ³	R ²	R ³
			157	5785		22.39	R ²	R ²	R ³	R ²	R ³
			161	5805		22.39	R ²	R ²	R ³	R ²	R ³
			165	5825		22.39	R ²	R ²	R ³	R ²	R ³
			149	5745	Aux	22.39	R ¹	R ²	R ³	R ³	R ³
			153	5765		22.39	R ¹	R ²	R ³	R ³	R ³
			157	5785		22.39	R ¹	R ²	R ³	R ³	R ³
			161	5805		22.39	R ¹	R ²	R ³	R ³	R ³
			165	5825		22.39	R ¹	R ²	R ³	R ³	R ³
	40	HT0	151	5755	Main	22.39	R ²	R ²	R ³	R ²	R ³
			159	5795		22.39	R ²	R ²	R ³	R ²	R ³
			151	5755	Aux	22.39	T	R ²	R ³	R ³	R ³
			159	5795		22.39	T	R ²	R ³	R ³	R ³
802.11ac	80	VTH0	155	5775	Main	22.39	T	T	R ³	T	R ³
					Aux	22.39	T	T	R ³	R ³	R ³

T Tested configuration

R¹ Reduced. According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

R² Reduced. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

R³ Reduced. According to FCC OET KDB 447498 D01, at 1500 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, where the Max allowed Power is including the tune-up tolerance:

$$\text{Max allowed Power} = \frac{3.0}{\sqrt{f(\text{GHz})}} \cdot 50\text{mm} + (\text{Test Sep Distance}(\text{mm}) - 50\text{mm}) \cdot 10$$

B.2 Conducted Power Measurements

B.2.1 WLAN 2.4GHz (DTS)

					Avg Pwr [dBm]		Max output Pwr [dBm]	SAR Test?
Band	Mode	Data Rate	Ch #	Freq [MHz]	Main	Aux		
2.4GHz (DTS)	802.11b	1Mbps	1	2412	14.89	14.91	15.00	Yes
			6	2437	14.88	14.84	15.00	
			11	2462	14.95	14.89	15.00	
	802.11g	6Mbps	1	2412	NR ¹	NR ¹	15.00	No ²
			6	2437			15.00	
			11	2462			15.00	
	802.11n20	HT0	1	2412			15.00	No ²
			6	2437			15.00	
			11	2462			15.00	
	802.11n40		3	2422			15.00	No ²
			6	2437			15.00	
			9	2452			15.00	

Initial test configuration

1. NR: Not Required
2. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

B.2.2 WLAN 5GHz (UNII)

5.2GHz and 5.3GHz (UNII-1 and UNII-2A)

Band	Mode	Data Rate	Ch #	Freq [MHz]	Avg Pwr [dBm]		Max output Pwr [dBm]	SAR Test?
					Main	Aux		
5.3GHz (UNII-2A)	802.11a	6Mbps	52	5260	NR ¹	13.30	13.50	Yes ^{2,3,4}
			56	5280		13.30	13.50	
			60	5300		13.00	13.50	
			64	5320		13.37	13.50	
	802.11n20	HT0	52	5260		NR ¹	13.50	No ^{2,3,4}
			56	5280			13.50	
			60	5300			13.50	
			64	5320			13.50	
	802.11n40		54	5270		13.34	13.50	Yes ^{2,3,4}
			62	5310		13.37	13.50	
	802.11ac80	VHT0	58	5290	13.37	13.25	13.50	Yes ^{2,3,4}

Initial test configuration

1. NR: Not Required
2. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
3. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
4. When the specified maximum output power is the same for both UNII-1 and UNII-2A, begin SAR measurement in UNII-2A and if the highest reported SAR for UNII-2A is
 - ≤1.2W/kg, SAR is not required for UNII-1
 - ≥1.2W/kg, both UNII-1 and UNII-2A shall be tested independently for SAR

Band	Mode	Data Rate	Ch #	Freq [MHz]	Avg Pwr [dBm]		Max output Pwr [dBm]	SAR Test?
					Main	Aux		
5.2GHz (UNII-1)	802.11a	6Mbps	36	5180	NR ¹	13.47	13.50	Yes ^{2,3,4}
			40	5200		13.48	13.50	
			44	5220		13.45	13.50	
			48	5240		13.38	13.50	
	802.11n20	HT0	36	5180		NR ¹	13.50	No
			40	5200			13.50	
			44	5220			13.50	
			48	5240			13.50	
	802.11n40		38	5190		13.39	13.50	Yes ^{2,3,4}
			46	5230		13.41	13.50	
	802.11ac80	VHT0	42	5210	13.45	13.32	13.50	Yes ^{2,3,4}

Initial test configuration

1. NR: Not Required
2. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
3. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
4. When the specified maximum output power is the same for both UNII-1 and UNII-2A, begin SAR measurement in UNII-2A and if the highest reported SAR for UNII-2A is
 - ≤1.2W/kg, SAR is not required for UNII-1
 - ≥1.2W/kg, both UNII-1 and UNII-2A shall be tested independently for SAR

5.6GHz and 5.8GHz (UNII-2C and UNII-3)

Band	Mode	Data Rate	Ch #	Freq [MHz]	Avg Pwr [dBm]		Max output Pwr [dBm]	SAR Test?
					Main	Aux		
5.6GHz (UNII-2C)	802.11a	6Mbps	100	5500	NR ¹	13.50	13.50	Yes ^{2,3,4}
			104	5520		13.49	13.50	
			108	5540		13.44	13.50	
			112	5560		13.43	13.50	
			116	5580		13.45	13.50	
			120	5600		13.44	13.50	
			124	5620		13.39	13.50	
			128	5640		13.49	13.50	
	802.11n20	HT0	100	5500		NR ¹	13.50	No
			104	5520			13.50	
			108	5540			13.50	
			112	5560			13.50	
			116	5580			13.50	
			120	5600			13.50	
			124	5620			13.50	
			128	5640			13.50	
	802.11n40		102	5510		13.41	13.50	Yes ^{2,3,4}
			110	5550		13.46	13.50	
			118	5590		13.46	13.50	
			126	5630		13.42	13.50	
	802.11ac80	VHT0	106	5530	13.48	13.36	13.50	Yes ^{2,3,4}
			122	5610	13.43	13.30	13.50	
5.6-5.8GHz (UNII-3)	802.11a	6Mbps	132	5660	NR ¹	13.45	13.50	Yes ^{2,3,4}
			136	5680		13.44	13.50	
			140	5700		13.40	13.50	
			149	5745		13.35	13.50	
			153	5765		13.45	13.50	
			157	5785		13.43	13.50	
			161	5805		13.49	13.50	
			165	5825		13.50	13.50	
	802.11n20	HT0	132	5660		NR ¹	13.50	No
			136	5680			13.50	
			140	5700			13.50	
			149	5745			13.50	
			153	5765			13.50	
			157	5785			13.50	
			161	5805			13.50	
			165	5825			13.50	
	802.11n40		134	5670		13.50	13.50	Yes ^{2,3,4}
			151	5755		13.43	13.50	
			159	5795		13.35	13.50	
	802.11ac20	VHT0	144	5720		13.37	13.50	Yes ^{2,3,4}
	802.11ac40	VHT0	142	5690		13.20	13.50	
	802.11ac80	VHT0	138	5690	13.40	13.41	13.50	
			155	5775	13.38	13.30	13.50	

Initial test configuration

1. NR: Not Required
2. When band gap channels between UNII-2C and UNII-3 band are supported channels in UNII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
5. If reported SAR of next highest output channel for UNII-2A band, UNII-2C or 5.8 GHz band in §15.247 is > 1.2 W/kg subsequent next highest output power channels would also need testing until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

B.2.3 Bluetooth

Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	Avg Pwr [dBm]	Max output Pwr [dBm]
2.4GHz	Bluetooth v2.1	Basic rate GFSK	0	2402	Aux	9.95	11.50
			39	2441		10.27	11.50
			78	2480		10.44	11.50
	Bluetooth v2.1	Basic rate $\pi/4$ DQPSK	0	2402		NR ^{*1}	9.50
			39	2441			9.50
			78	2480			9.50
	Bluetooth v2.1	Basic rate 8-DPSK	0	2402			9.50
			39	2441			9.50
			78	2480			9.50
	Bluetooth v4.0	Low energy GFSK	0	2412			10.00
			20	2437			10.00
			39	2480			10.00

Initial test configuration

1. NR: Not Required

B.3 Tissue Parameters Measurement

Body TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ'	σ	ϵ'	σ	ϵ'	σ	
2450	52.76	1.88	51.27	2.04	-2.72	4.62	2015/09/25
5200	49.03	5.35	48.45	5.07	-1.20	-5.36	2015/09/10
5600	48.48	5.79	47.54	5.67	-1.93	-1.94	2015/09/15
5800	48.20	6.00	47.36	5.81	-1.75	3.06	2014/09/20

See *Annex E* for more details.

B.4 System Check Measurements

Body Measurements

Frequency (MHz)	Average	Target SAR (W/g)	Measured SAR (W/g)	Drift (%)	Limit (%)	Date
2450	1g	51.00	52.65	3.24	10	2015/09/25
	10g	24.00	24.12	0.52		
5200	1g	75.00	78.91	5.22		2015/09/10
	10g	21.00	22.48	7.03		
5600	1g	78.20	83.64	6.95		2015/09/15
	10g	21.70	23.63	8.87		
5800	1g	76.20	70.07	-8.04		2015/09/20
	10g	21	19.82	-5.62		

See *Annex C* for more details.

B.5 SAR Test Results

B.5.1 802.11b/g/n – 2.4GHz - DTS

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11b	20	1Mbps	11	2462	Back Face	0.80	0.81	1
						Right Edge	0.44	0.44	
						Top Edge	0.32	0.32	
Aux	802.11b	20	1Mbps	1	2412	Back Face	0.78	0.80	
						Back Face	0.83	0.84	2
						Right Edge	0.09	0.09	
						Top Edge	0.26	0.27	
				11	2462	Back Face	0.95	0.98	

B.5.2 802.11a/n/ac – 5.2 GHz – UNII-1

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac80	80	VHT0	42	5210	Back Face	0.70	0.71	3
						Right Edge	0.39	0.39	
						Top Edge	0.35	0.35	
Aux	802.11ac80	80	VHT0	42	5210	Back Face	1.15	1.20	
						Right Edge	0.12	0.13	
						Top Edge	0.45	0.46	
	802.11n40	40	HT0	38	5190	Back Face	1.16	1.19	
				46	5230	Back Face	1.22	1.25	
	802.11a	20	6Mbps	36	5180	Back Face	1.17	1.18	
				40	5200	Back Face	1.14	1.15	
				44	5220	Back Face	1.22	1.23	
				48	5240	Back Face	1.22	1.25	4

B.5.3 802.11a/n/ac – 5.3 GHz – UNII-2A

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac80	80	VHT0	58	5290	Back Face	0.69	0.71	5
						Right Edge	0.45	0.46	
						Top Edge	0.37	0.38	
Aux	802.11ac80	80	VHT0	58	5290	Back Face	1.19	1.26	
						Right Edge	0.19	0.20	
						Top Edge	0.43	0.45	
	802.11n40	40	HT0	54	5270	Back Face	1.22	1.27	
				62	5310	Back Face	1.28	1.32	6
	802.11a	20	6Mbps	52	5260	Back Face	1.17	1.23	
				56	5280	Back Face	1.15	1.20	
				60	5300	Back Face	0.94	1.05	
				64	5320	Back Face	1.02	1.09	

B.5.4 802.11a/n/ac – 5.6 GHz – UNII-2C

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac80	80	VHT0	106	5530	Back Face	0.82	0.82	7
						Right Edge	0.45	0.46	
						Top Edge	0.37	0.37	
				122	5610	Back Face	0.68	0.69	
Aux	802.11ac80	80	VHT0	106	5530	Back Face	1.18	1.22	
						Right Edge	0.18	0.19	
						Top Edge	0.45	0.46	
				122	5610	Back Face	1.18	1.21	
	802.11n40	40	HT0	102	5510	Back Face	1.24	1.27	8
				110	5550	Back Face	1.15	1.16	
				118	5590	Back Face	1.14	1.15	
				126	5630	Back Face	1.21	1.23	
	802.11a	20	6Mbps	100	5500	Back Face	1.23	1.23	
				104	5520	Back Face	1.21	1.21	
				108	5540	Back Face	1.22	1.24	
				112	5560	Back Face	1.21	1.23	
				116	5580	Back Face	1.21	1.22	
				120	5600	Back Face	1.22	1.24	
				124	5620	Back Face	1.23	1.26	
				128	5640	Back Face	1.26	1.26	

B.5.5 802.11a/n/ac – 5.8 GHz – UNII-3

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac80	80	VHT0	138	5690	Back Face	0.66	0.68	9
						Right Edge	0.44	0.45	
						Top Edge	0.27	0.27	
Aux	802.11ac80	80	VHT0	138	5690	Back Face	1.26	1.29	
						Right Edge	0.27	0.28	
						Top Edge	0.45	0.46	
	802.11ac40	40	VHT0	155	5775	Back Face	1.08	1.13	
						Back Face	1.07	1.15	
						Back Face	1.11	1.14	
	802.11ac20	20	VHT0	144	5720	Back Face	1.11	1.14	
						Back Face	1.24	1.24	
						Back Face	1.24	1.24	
	802.11n40	40	HT0	134	5670	Back Face	1.24	1.24	
						Back Face	1.20	1.22	
						Back Face	1.26	1.30	
	802.11a	20	6Mbps	159	5795	Back Face	1.26	1.30	
						Back Face	1.29	1.30	
						Back Face	1.24	1.26	
						Back Face	1.13	1.16	
						Back Face	1.14	1.18	
						Back Face	1.24	1.25	
						Back Face	1.27	1.29	
						Back Face	1.32	1.32	10
						Back Face	1.30	1.30	

B.5.6 Bluetooth – 2.4GHz - DSSS

Antenna	Mode	BW (MHz)	Data rate	Ch #	Freq (MHz)	Position	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Aux	802.15	20	DH5	78	2480	Back Face	0.34	0.44	11
						Right Edge	0.02	0.03	
						Top Edge	0.10	0.12	

B.6 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is >0.8 W/kg for a certain band/mode. If the measured SAR value of the initial repeated measurement is <1.45 W/kg with $<20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

Band / Mode	Position	Channel	Freq. (MHz)	Measured SAR 1g (W/kg)	Repeated SAR 1g (W/Kg)	Ratio
2.45GHz 802.11b 1Mbps	Back Face	11	2462	1.00	1.00	1.00
5.2GHz 802.11n40 HT0	Back Face	46	5230	1.22	1.28	1.05
5.3GHz 802.11n40 HT0	Back Face	62	5310	1.28	1.33	1.06
5.6GHz 802.11a 6Mbps	Back Face	128	5640	1.26	1.30	1.05
5.8GHz 802.11a 6Mbps	Back Face	161	5805	1.32	1.33	1.01

B.7 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

Chain	Position	Highest Reported SAR (1g)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Main	Top Edge	0.325	0.378	
	Right Edge	0.444	0.464	
	Back Face	0.813	0.824	
Aux	Top Edge	0.267	0.465	0.122
	Right Edge	0.094	0.278	0.030
	Back Face	0.978	1.323	0.437

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/Kg)	Limit (W/kg)
	Main Antenna	Aux Antenna		
Top Edge	WLAN 2.4GHz	WLAN 2.4GHz	0.59	1.6
	WLAN 5GHz	WLAN 5GHz	0.84	
	WLAN 2.4GHz	BT	0.45	
	WLAN 5GHz	BT	0.50	
Right Edge	WLAN 2.4GHz	WLAN 2.4GHz	0.54	
	WLAN 5GHz	WLAN 5GHz	0.74	
	WLAN 2.4GHz	BT	0.47	
	WLAN 5GHz	BT	0.49	
Back Face	WLAN 2.4GHz	WLAN 2.4GHz	1.79	
	WLAN 5GHz	WLAN 5GHz	2.15	
	WLAN 2.4GHz	BT	1.25	
	WLAN 5GHz	BT	1.26	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (cm) (x,y,z)	SAR to peak location separation ratio	Limit
Back Face	Main WLAN 2.45GHz	0.81	1.79	Max. 1 at (9.24, 4.74, -0.38) cm	0.024	0.04
	Aux WLAN 2.45GHz	0.98		Max. 2 at (9.34, 14.58, -0.26) cm		
Back Face	Main WLAN 5GHz	0.82	2.15	Max. 1 at (8.66, 13.64, -0.23) cm	0.039	0.04
	Aux WLAN 5GHz	1.32		Max. 2 at (8.82, 5.60, -0.39) cm		

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no enlarged zoom scan measurements are required.

Annex C. Test System Plots

1.	2.4GHz - 802.11b, CH11, Main Antenna – Back Face.....	38
2.	2.4GHz - 802.11b, CH1, Aux Antenna – Back Face	39
3.	5.2GHz - 802.11ac80, CH42, Main Antenna – Back Face	40
4.	5.2GHz - 802.11a20, CH48, Aux Antenna – Back Face	41
5.	5.3GHz - 802.11ac80, CH58, Main Antenna – Back Face	42
6.	5.3GHz - 802.11n40, CH62, Aux Antenna – Back Face	43
7.	5.6GHz - 802.11ac80, CH106, Main Antenna – Back Face	44
8.	5.6GHz - 802.11n40, CH102, Aux Antenna – Back Face	45
9.	5.8GHz - 802.11ac80, CH138, Main Antenna – Back Face	46
10.	5.8GHz - 802.11a20, CH161, Aux Antenna – Back Face.....	47
11.	2.4GHz - 802.15, CH78, Aux Antenna – Back Face.....	48
12.	System Check Body Liquid 2450MHz.....	49
13.	System Check Body Liquid 5200MHz.....	50
14.	System Check Body Liquid 5600MHz.....	51
15.	System Check Body Liquid 5800MHz.....	52

1. 2.4GHz - 802.11b, CH11, Main Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/25/2015 2:07:01 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 51.234$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(7.22, 7.22, 7.22); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

DTS/802.11b,1Mbps, CH 11, Back face, Main Antenna/Area Scan (51x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.45 W/kg

DTS/802.11b,1Mbps, CH 11, Back face, Main Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 24.43 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.348 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 W/kg

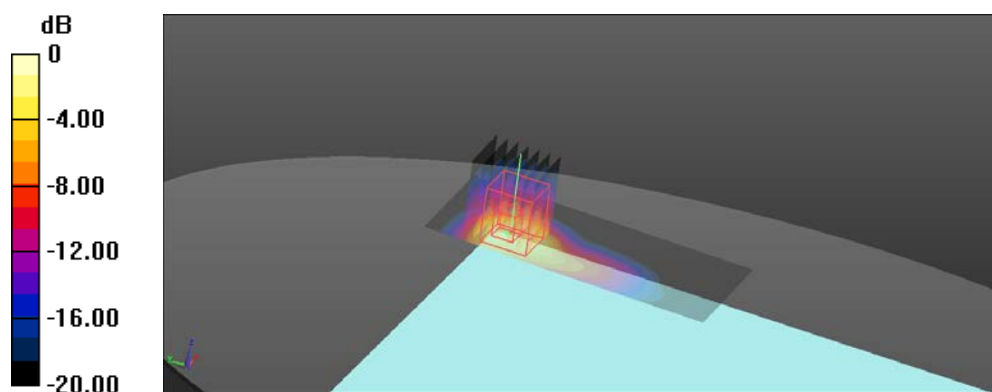

0 dB = 1.37 W/kg = 1.37 dBW/kg

2. 2.4GHz - 802.11b, CH1, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/25/2015 2:51:03 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 51.405$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(7.22, 7.22, 7.22); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -11.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

DTS/802.11b,1Mbps, CH 1, Back face, Aux Antenna/Area Scan (41x81x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.54 W/kg

DTS/802.11b,1Mbps, CH 1, Back face, Aux Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.27 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.337 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.45 W/kg

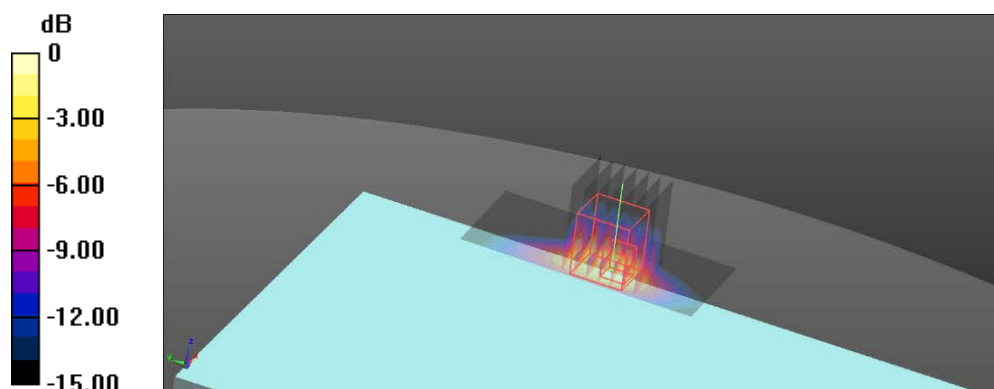

0 dB = 1.45 W/kg = 1.61 dBW/kg

3. 5.2GHz - 802.11ac80, CH42, Main Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/9/2015 6:34:21 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5210 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.143$ S/m; $\epsilon_r = 48.288$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.36, 4.36, 4.36); Calibrated: 6/15/2015;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Main/802.11ac80,VHT0, CH 42, Back face, Main Antenna/Area Scan (61x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.35 W/kg


Main/802.11ac80,VHT0, CH 42, Back face, Main Antenna/Zoom Scan (9x10x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 16.59 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.253 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 W/kg

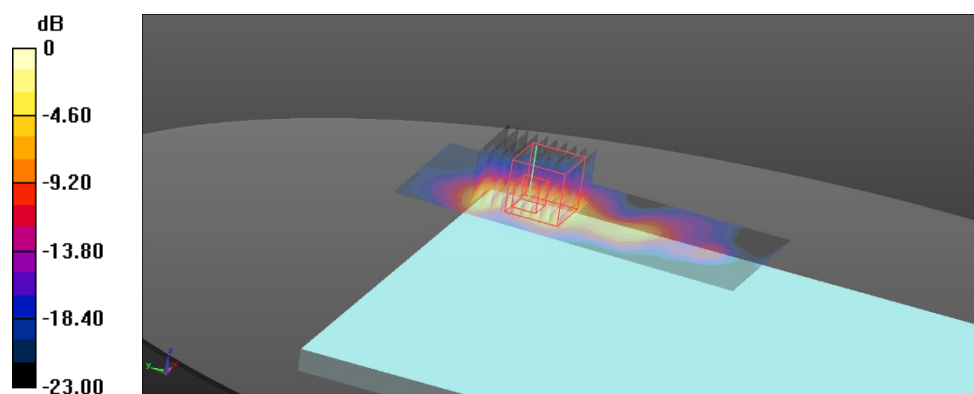

0 dB = 1.37 W/kg = 1.37 dBW/kg

4. 5.2GHz - 802.11a20, CH48, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/21/2015 11:55:31 AM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.246$ S/m; $\epsilon_r = 48.519$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.36, 4.36, 4.36); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 39.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Aux/802.11a20,HT0, CH 48, Back face, Aux Antenna/Area Scan (51x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.37 W/kg

Aux/802.11a20,HT0, CH 48, Back face, Aux Antenna/Zoom Scan (8x8x12)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 21.50 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.85 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

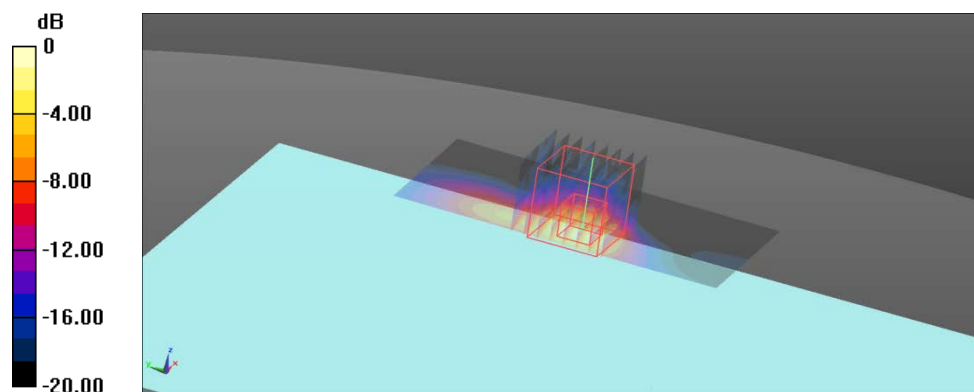

0 dB = 2.45 W/kg = 3.89 dBW/kg

5. 5.3GHz - 802.11ac80, CH58, Main Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/10/2015 11:57:52 AM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5290 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 5.343$ S/m; $\epsilon_r = 48.262$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.21, 4.21, 4.21); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASYS 52.8.8(1222);

Main/802.11ac80,VHT0, CH 58, Back face, Main Antenna/Area Scan (61x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.34 W/kg

Main/802.11ac80,VHT0, CH 58, Back face, Main Antenna/Zoom Scan (9x9x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 15.87 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.236 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.36 W/kg

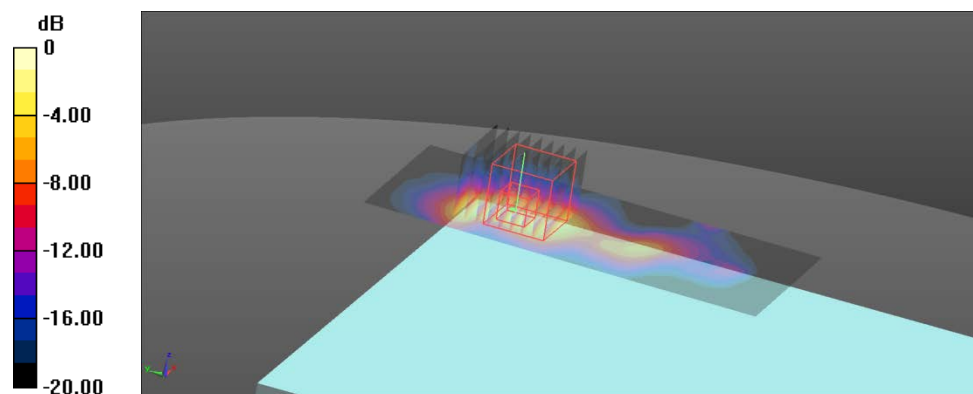

0 dB = 1.36 W/kg = 1.34 dBW/kg

6. 5.3GHz - 802.11n40, CH62, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/23/2015 11:36:16 AM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5310 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 5310$ MHz; $\sigma = 5.337$ S/m; $\epsilon_r = 48.159$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.21, 4.21, 4.21); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASYS 52.8.8(1222);

Aux /802.11n20,HT0, CH 62, Back face, Aux Antenna/Area Scan (51x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.54 W/kg

Aux /802.11n20,HT0, CH 62, Back face, Aux Antenna/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 21.65 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.71 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.377 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.68 W/kg

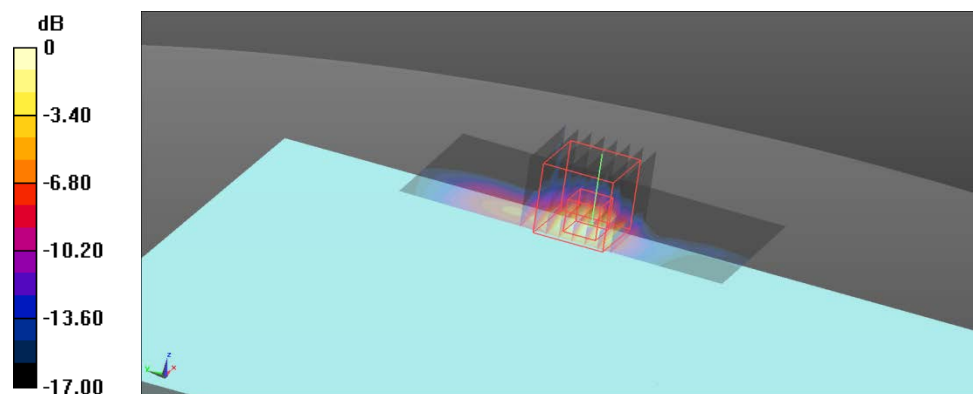

0 dB = 2.68 W/kg = 4.28 dBW/kg

7. 5.6GHz - 802.11ac80, CH106, Main Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/10/2015 11:07:02 AM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5530 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.649$ S/m; $\epsilon_r = 47.764$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(3.97, 3.97, 3.97); Calibrated: 6/15/2015;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Main/802.11ac80,VHT0, CH 106, Back face, Main Antenna /Area Scan (61x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.56 W/kg

Main/802.11ac80,VHT0, CH 106, Back face, Main Antenna /Zoom Scan (9x10x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 18.49 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.254 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.59 W/kg

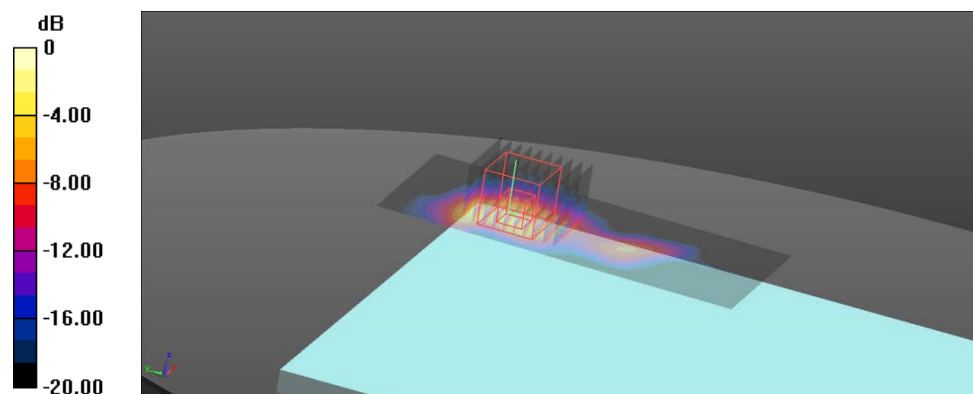

0 dB = 1.59 W/kg = 2.01 dBW/kg

8. 5.6GHz - 802.11n40, CH102, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/22/2015 2:56:45 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5510 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 5510$ MHz; $\sigma = 5.626$ S/m; $\epsilon_r = 47.928$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(3.97, 3.97, 3.97); Calibrated: 6/15/2015;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASYS 52.8.8(1222);

Aux 802.11n40,HT0, CH 102, Back face, Aux Antenna/Area Scan (51x101x1): Interpolated grid:
 $dx=1.000$ mm, $dy=1.000$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.19 W/kg

Aux 802.11n40,HT0, CH 102, Back face, Aux Antenna/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 19.96 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.16 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.401 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.47 W/kg

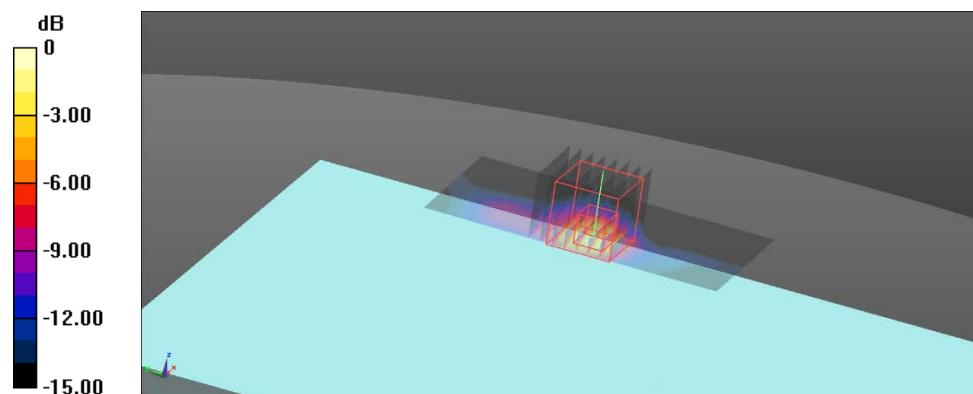

0 dB = 2.47 W/kg = 3.93 dBW/kg

9. 5.8GHz - 802.11ac80, CH138, Main Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/10/2015 1:42:33 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5690 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.869$ S/m; $\epsilon_r = 47.197$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(3.67, 3.67, 3.67); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Main/802.11ac80,VHT0, CH 138, Back face, Main Antenna/Area Scan (61x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.29 W/kg

Main/802.11ac80,VHT0, CH 138, Back face, Main Antenna/Zoom Scan (9x10x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 14.98 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.201 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.39 W/kg

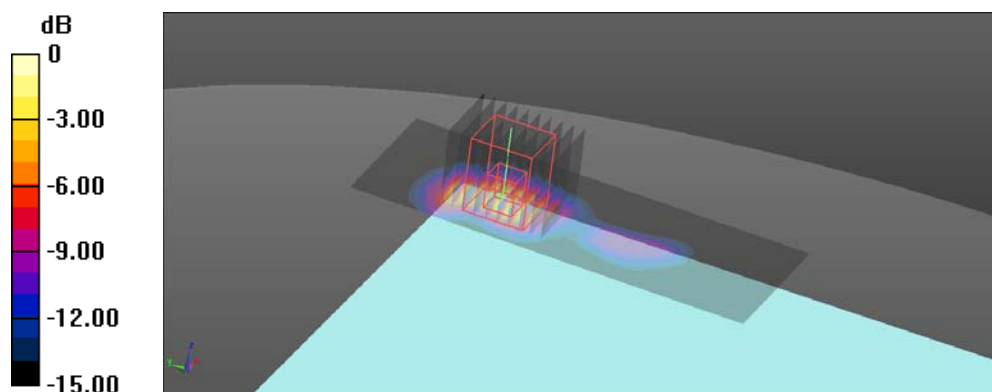

0 dB = 1.39 W/kg = 1.43 dBW/kg

10.5.8GHz - 802.11a20, CH161, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/23/2015 4:58:00 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5805 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 5.864$ S/m; $\epsilon_r = 47.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.01, 4.01, 4.01); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Aux /802.11a,6Mbps, CH 161, Back face, Aux Antenna/Area Scan (51x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.71 W/kg


Aux /802.11a,6Mbps, CH 161, Back face, Aux Antenna/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.48 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.21 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.391 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.78 W/kg

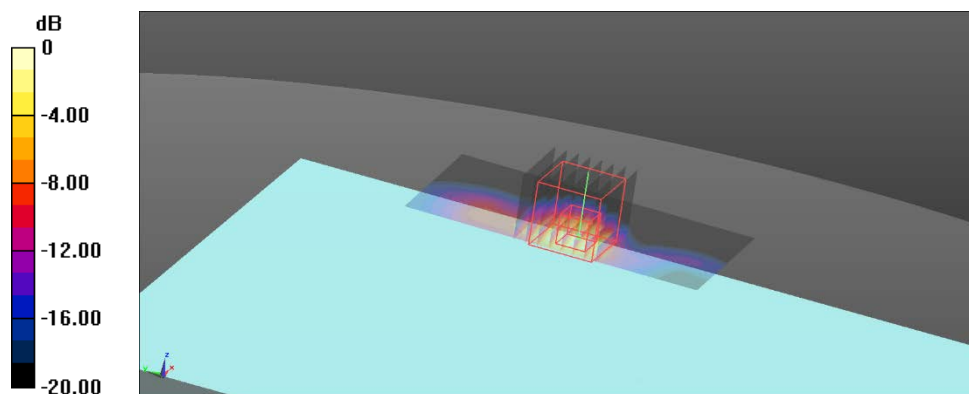

0 dB = 2.78 W/kg = 4.44 dBW/kg

11.2.4GHz - 802.15, CH78, Aux Antenna – Back Face

Test Laboratory: Intel WRF Lab; Date/Time: 9/25/2015 4:48:54 PM

DUT: 8260NGW +Toshiba PT16A Series; Type: Tablet MAC: 34.13.E8.3D.3B.05

Communication System: UID 0, 802.15 (0); Communication System Band: 2.4GHz; Frequency: 2480 MHz; Communication System PAR: 1.133 dB

Medium parameters used: $f = 2480$ MHz; $\sigma = 2.088$ S/m; $\epsilon_r = 51.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(7.22, 7.22, 7.22); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -11.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

BT/802.15, DH5, CH 78, Back face, Aux Antenna /Area Scan (41x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.669 W/kg

BT/802.15, DH5, CH 78, Back face, Aux Antenna /Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.84 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

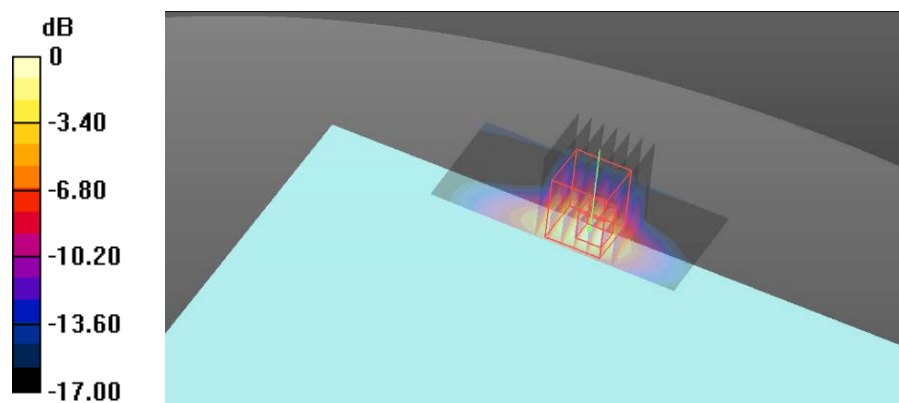

0 dB = 0.594 W/kg = -2.26 dBW/kg

12. System Check Body Liquid 2450MHz

Test Laboratory: Intel WRF Lab; Date/Time: 9/25/2015 7:00:28 PM

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 937


Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz);
 Frequency: 2450 MHz; Communication System PAR: 0 dB
 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.265$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(7.22, 7.22, 7.22); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASYS 52.8.8(1222);

2450/Validation 2540MHz/Area Scan (61x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 8.26 W/kg

2450/Validation 2540MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 64.33 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 11.1 W/kg
SAR(1 g) = 5.26 W/kg; SAR(10 g) = 2.41 W/kg
 Maximum value of SAR (measured) = 8.12 W/kg

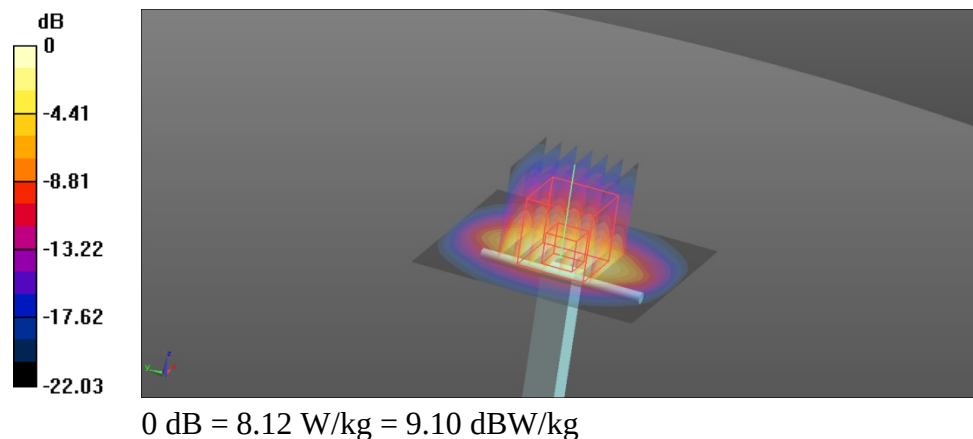

13. System Check Body Liquid 5200MHz

Test Laboratory: Intel WRF Lab; Date/Time: 9/10/2015 11:51:11 AM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1164

Communication System: UID 0, CW (0); Communication System Band: ITD5500 (5000.0 - 5900.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.068$ S/m; $\epsilon_r = 48.449$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.36, 4.36, 4.36); Calibrated: 6/15/2015;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Configuration/Validation 5200MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.2 W/kg


Configuration/Validation 5200MHz/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 62.27 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

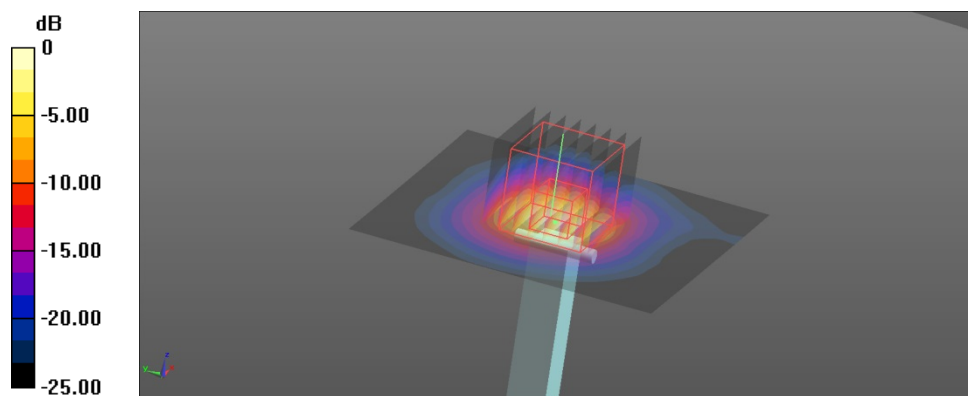

0 dB = 15.8 W/kg = 11.99 dBW/kg

14. System Check Body Liquid 5600MHz

Test Laboratory: Intel WRF Lab; Date/Time: 9/15/2015 10:22:11 AM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1164

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.677$ S/m; $\epsilon_r = 47.542$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(3.67, 3.67, 3.67); Calibrated: 6/15/2015;
 - o Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Configuration/Validation 5600MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.6 W/kg


Configuration/Validation 5600MHz/Zoom Scan 2 (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 61.09 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

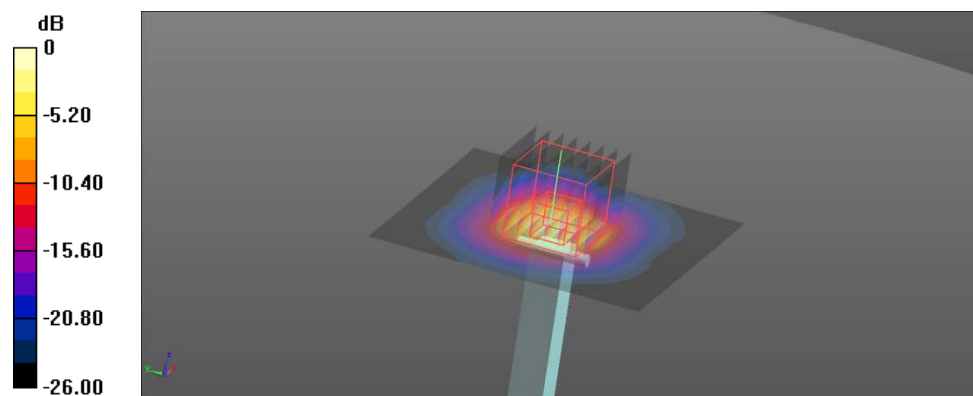

0 dB = 16.4 W/kg = 12.15 dBW/kg

15. System Check Body Liquid 5800MHz

Test Laboratory: Intel WRF Lab; Date/Time: 9/20/2015 11:19:20 AM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1164

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.816$ S/m; $\epsilon_r = 47.358$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3978; ConvF(4.01, 4.01, 4.01); Calibrated: 6/15/2015;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1429; Calibrated: 6/11/2015
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BA;
- DASY52 52.8.8(1222);

Configuration/Validation 5800MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.7 W/kg


Configuration/Validation 5800MHz/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 55.09 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 31.7 W/kg

SAR(1 g) = 7 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (measured) = 14.2 W/kg

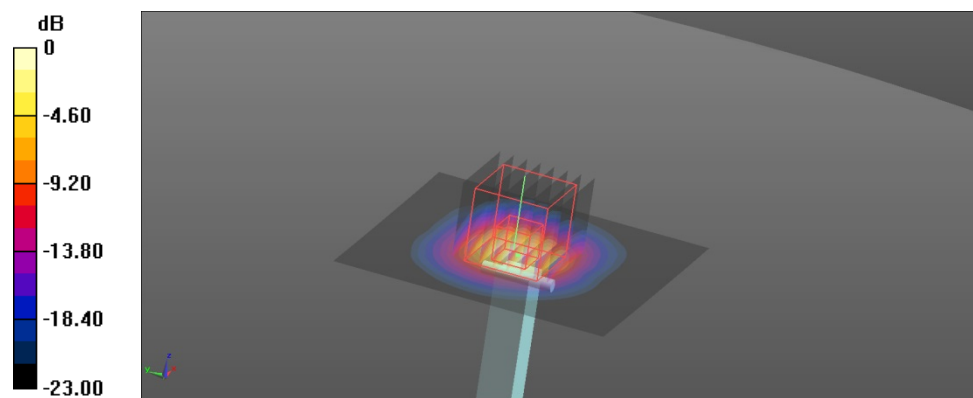

0 dB = 14.2 W/kg = 11.52 dBW/kg



Annex D. Calibration Certificates

Device	Type/Model	Serial Number	Manufacturer	Calibration Certificate
Dosimetric E-field Probe	EX3DV4	3978	SPEAG	
2450MHz System Validation Dipole	D2450V2	937	SPEAG	
5GHz System Validation Dipole	D5GHzv2	1164	SPEAG	

Annex E. TSL Dielectric Parameters



Body 2450MHz

Freq. (MHz)	Target		Measured	
	ϵ'	σ	ϵ'	σ
2400	52.76	1.88	51.45	1.97
2410	52.75	1.90	51.42	1.98
2420	52.74	1.91	51.36	2.00
2430	52.73	1.92	51.35	2.01
2440	52.71	1.94	51.33	2.02
2450	52.70	1.95	51.27	2.04
2460	52.69	1.96	51.23	2.05
2470	52.67	1.98	51.24	2.07
2480	52.66	1.99	51.15	2.09
2490	52.65	2.00	51.14	2.10
2500	52.64	2.02	51.15	2.12

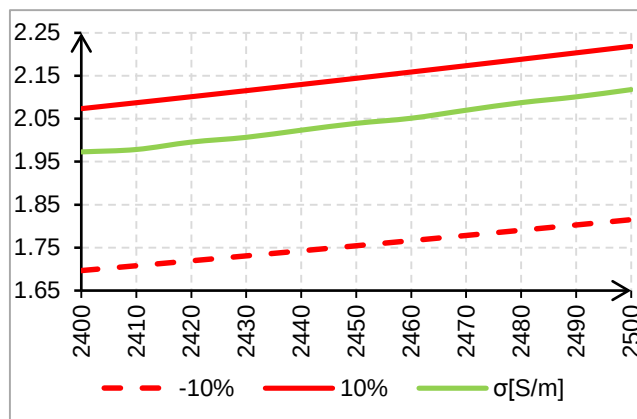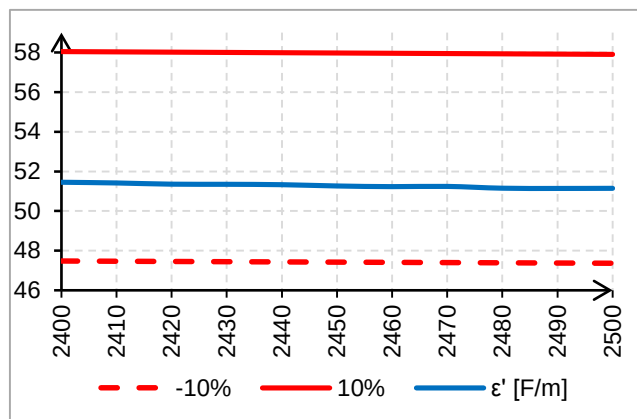



Body 5200MHz

Freq. (MHz)	Target		Measured	
	ϵ'	σ	ϵ'	σ
5000	49.31	5.13	48.81	4.90
5020	49.28	5.15	48.97	4.90
5040	49.26	5.17	48.69	4.88
5060	49.23	5.20	48.99	5.00
5080	49.20	5.22	48.60	4.95
5100	49.17	5.24	48.58	4.99
5120	49.15	5.26	48.55	5.02
5140	49.12	5.29	48.70	5.08
5160	49.09	5.31	48.41	5.15
5180	49.06	5.33	48.14	5.16
5200	49.03	5.35	48.45	5.07
5220	49.01	5.37	48.13	5.22
5240	48.98	5.40	48.52	5.24
5260	48.95	5.42	48.69	5.09
5280	48.92	5.44	48.46	5.38
5300	48.90	5.46	48.07	5.30
5320	48.87	5.48	48.25	5.37
5340	48.84	5.51	47.67	5.41
5360	48.81	5.53	48.13	5.37
5380	48.79	5.55	48.50	5.31
5400	48.76	5.57	48.71	5.27

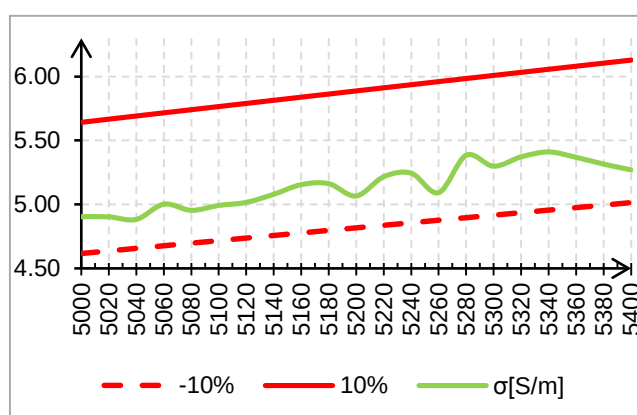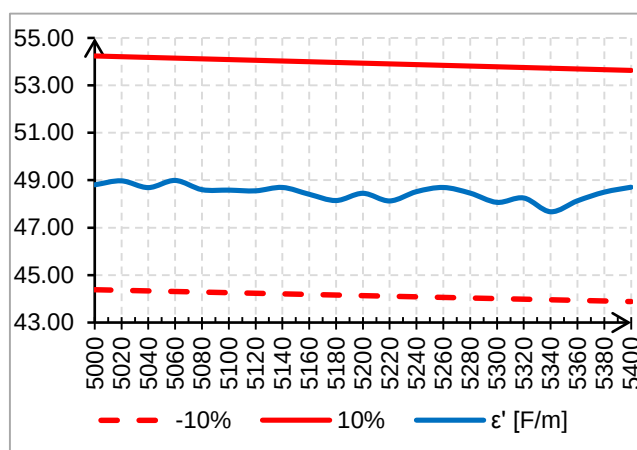

Body 5600MHz

Freq. (MHz)	Target		Measured	
	ϵ'	σ	ϵ'	σ
5400	48.76	5.57	48.71	5.27
5420	48.73	5.59	48.47	5.50
5440	48.70	5.61	48.38	5.53
5460	48.67	5.64	47.91	5.46
5480	48.65	5.66	47.86	5.58
5500	48.62	5.68	47.85	5.59
5520	48.59	5.70	48.01	5.65
5540	48.56	5.72	47.52	5.64
5560	48.54	5.74	47.72	5.63
5580	48.51	5.77	47.53	5.69
5600	48.48	5.79	47.54	5.67
5620	48.45	5.81	47.50	5.73

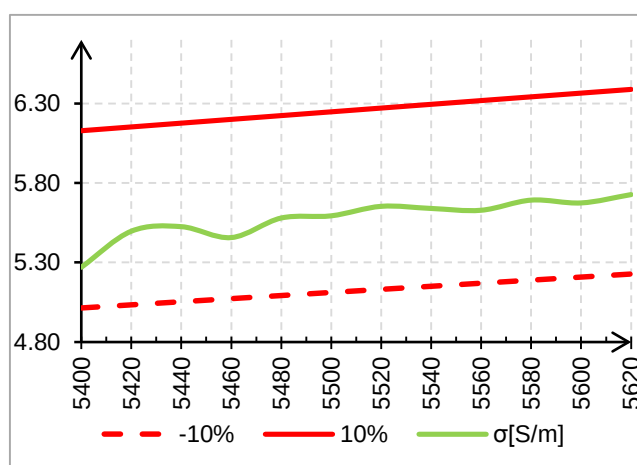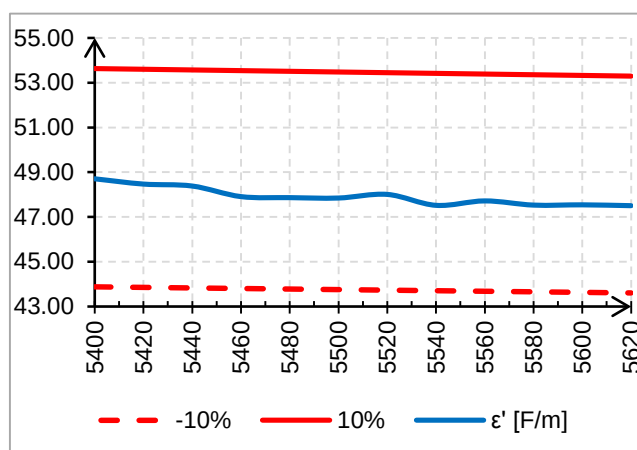

Body 5800MHz

Freq. (MHz)	Target		Measured	
	ϵ'	σ	ϵ'	σ
5640	48.42	5.83	47.41	5.77
5660	48.40	5.85	47.33	5.85
5680	48.37	5.87	47.02	5.87
5700	48.34	5.89	47.37	5.87
5720	48.31	5.91	47.53	5.96
5740	48.28	5.93	47.33	5.79
5760	48.26	5.96	47.47	5.92
5780	48.23	5.98	46.97	5.77
5800	48.20	6.00	47.36	5.81

