

**TEST REPORT CONCERNING THE COMPLIANCE
OF AN INTEL® DUAL BAND WIRELESS CARD
MODEL 8265D2W,
WITH 47 CFR PART 15-SUBPART B (10-1-14 Edition)
AND THE
REQUIREMENTS OF INDUSTRY CANADA:
ICES-003 (ISSUE 5, AUGUST 2012).**

16031803.f01
May 26, 2016

FCC listed : 90828
Industry Canada : 2932G-2
R&TTE and EMC Notified Body : 1856

TÜV Rheinland Nederland B.V.
P.O. Box 37
9350 AA Leek (NL)
Eiberkamp 10
9351 VT Leek (NL)

Telephone: +31 594 505005
Telefax: +31 594 504804

Internet: www.tuv.com/nl
E-mail: products@nl.tuv.com

MEASUREMENT/TECHNICAL REPORT

Intel Mobile Communication SAS (France)
Model: 8265D2W

This report concerns:	Original certification <u>Class 2 change</u> Verification / DoC																														
Equipment type:	Intel® Dual Band Wireless card with Bluetooth																														
Report prepared by:	<table><tr><td>Name</td><td>:</td><td>S. ten Caat</td></tr><tr><td>Company name</td><td>:</td><td>TÜV Rheinland Nederland B.V.</td></tr><tr><td>Address</td><td>:</td><td>Eiberkamp 10</td></tr><tr><td>Postal code/city</td><td>:</td><td>9351 VT Leek</td></tr><tr><td>Mailing address</td><td>:</td><td>P.O. Box 37</td></tr><tr><td>Postal code/city</td><td>:</td><td>9350 AA Leek</td></tr><tr><td>Country</td><td>:</td><td>The Netherlands</td></tr><tr><td>Telephone number</td><td>:</td><td>+ 31 594 505 005</td></tr><tr><td>Telefax number</td><td>:</td><td>+ 31 594 504 804</td></tr><tr><td>E-mail</td><td>:</td><td>products@nl.tuv.com</td></tr></table>	Name	:	S. ten Caat	Company name	:	TÜV Rheinland Nederland B.V.	Address	:	Eiberkamp 10	Postal code/city	:	9351 VT Leek	Mailing address	:	P.O. Box 37	Postal code/city	:	9350 AA Leek	Country	:	The Netherlands	Telephone number	:	+ 31 594 505 005	Telefax number	:	+ 31 594 504 804	E-mail	:	products@nl.tuv.com
Name	:	S. ten Caat																													
Company name	:	TÜV Rheinland Nederland B.V.																													
Address	:	Eiberkamp 10																													
Postal code/city	:	9351 VT Leek																													
Mailing address	:	P.O. Box 37																													
Postal code/city	:	9350 AA Leek																													
Country	:	The Netherlands																													
Telephone number	:	+ 31 594 505 005																													
Telefax number	:	+ 31 594 504 804																													
E-mail	:	products@nl.tuv.com																													

The data taken for this test and report herein was done in accordance with 47 CFR Part 15, Subpart B (10-1-14 edition), ICES-003 (Issue 5, August 2012) and the measurement procedures of ANSI C63.4-2013. TÜV Rheinland Nederland B.V. at Leek, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: May 26, 2016

Signature:



K.F. van der Molen
Engineer EMC TÜV Rheinland Nederland B.V.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Description of test item

Test item : Intel® Dual Band Wireless Card with Bluetooth
Manufacturer : Intel Mobile Communications SAS
Brand : Intel
Models : 8265D2W
Remark : See Photo 1

Applicant information

Applicants representative : Mrs. L. Peignot
Company : Intel Mobile Communications SAS
Address : Le Navigator B / 505 route des Lucioles / CS 70293
City : 06905 Sophia Antipolis Cedex
Country : France
Telephone number : +33 (0)4 93 00 14 14
Telefax number : +33 (0)4 93 00 14 01

Test(s) performed

Location : Leek
Test(s) started : May 11, 2016
Test(s) completed : May 25, 2016
Purpose of test(s) : Original certification
Test specification(s) : 47 CFR Part 15, subpart B (10-1-14 Edition) and
ICES-003 (ISSUE 5, AUGUST 2012)

Test engineer(s) : S. ten Caat



Report written by : S. ten Caat checked by K.F. van der Molen

Report date : May 26, 2016

**This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V.
The test results relate only to the item(s) tested.**

Table of contents

1	General information	5
1.1	Product description	5
1.1.1	Introduction	5
1.2	Related submittal(s) and/or Grant(s)	5
1.2.1	General	5
1.3	Tested system details	5
1.3.1	Description of input/output ports	5
1.4	Test Summary	7
1.5	Test methodology	8
1.6	Test facility	8
1.7	Test conditions	8
2	System test configuration	9
2.1	Justification	9
2.2	EUT mode of operation	9
2.3	Special accessories	9
2.4	Equipment modifications	9
2.5	Product Labelling	9
2.6	Block diagram of the EUT	9
2.7	Schematics of the EUT	9
2.8	Part list of the EUT	9
3	Radiated emission data	10
3.1	System Radiated emissions data (30 MHz – 1 GHz)	11
4	AC Power-line Conducted emission data	13
4.1.1	Testresults	14
5	List of utilized test equipment	16
6	Testsetup photographs	17
6.1	Testsetup photographs radiated emissions	17
6.2	Testsetup photographs AC power line conducted emissions	18

1 General information.

1.1 Product description.

1.1.1 Introduction.

The EUT is a Dual band wireless card with Bluetooth.

The content of this report and measurement results have not been changed other than the way of presenting the data.

1.2 Related submittal(s) and/or Grant(s).

1.2.1 General.

None issued

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

1.3.1 Description of input/output ports

Number	Terminal	From	To	Remarks
1	Mains	Mains (power supply)	AUX2	Used for powering/charging AUX2 and with that powering the EUT

Table 1: Interconnection between EUT and auxiliary equipment

Test item (EUT1)	:	Intel® Dual band wireless card with Bluetooth
Manufacturer	:	Intel Mobile Communication SAS
Brand mark	:	Intel
Model	:	8265D2W
Serial number	:	---
Remark	:	Tested in a Extender (AUX1) connected to a notebook (AUX2)
Test item (AUX 1)	:	NGFF Extender
Manufacturer	:	Intel Mobile Communication SAS
Brand mark	:	Intel
Model	:	PCB00435
Serial number	:	REV.02
Remark	:	Host for EUT
Test item (AUX2)	:	Notebook
Manufacturer	:	Dell
Brand mark	:	Dell
Model	:	P16G
Serial number	:	---
Remark	:	connected with AUX1

Test item (AUX3) : Wireless router
 Manufacturer : Netgear
 Brand mark : Netgear
 Model : WNDR3300
 Serial number : 1TR2837100A88
 Remark : --

Test item (AUX4) : Mobile phone with Bluetooth
 Manufacturer : OnePlus
 Brand mark : OnePlus
 Model : One A0001
 Serial number : --
 Remark : --

Test item (AUX5 and 6) : Antennas
 Manufacturer : SkyCross Electronics Co., Ltd.
 Brand mark : SkyCross
 Model : WIMAX/WLAN
 Serial number : --
 Remark : --

Test item (AUX7) : Notebook
 Manufacturer : Dell
 Brand mark : Dell
 Model : P16G
 Serial number : --
 Remark : --

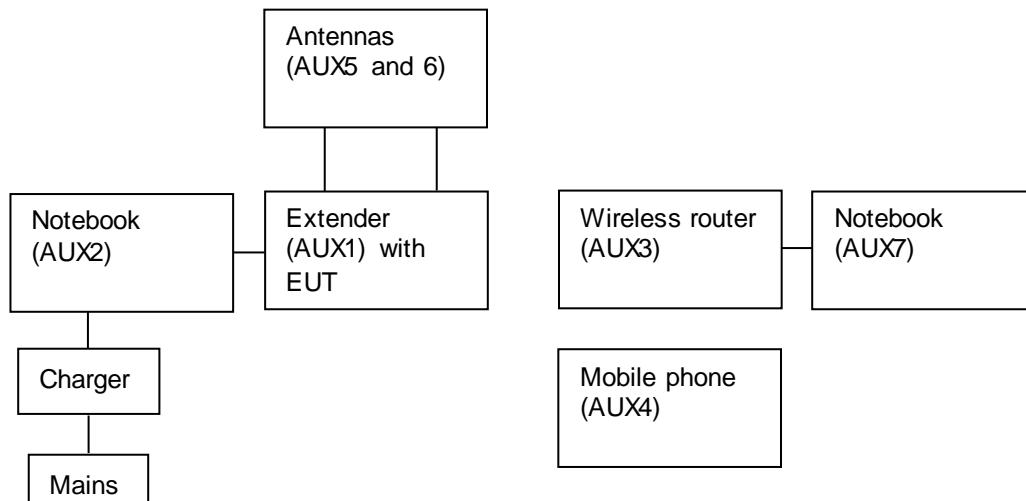


Figure 1 Set-up during testing



Photo 1: EUT.

1.4 Test Summary

The EUT was tested in accordance with the specifications given in the table below.

Test Standard		Description	Page	Pass / Fail
47 CFR Part 15 Subpart B (10-1-14 Edition)	ICES-003 Issue 5, August 2012			
15.107(a)	Section 6.1 Table 2	AC Power Line Conducted emissions	12 – 15	Pass
15.109(a)	Section 6.2.1 Table 5	Radiated emissions	10 – 11	Pass

Table : testspecifications

Testmethods: ANSI C63.4-2014

Note: see end of the report for setup photographs.

1.5 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15, Subpart B (10-1-14 Edition), sections 15.107 and 15.109 and ICES-003 Issue 5 (august 2012) Sections 6.1 and 6.2.

The test methods, which have been used, are based on ANSI C63.4-2014.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters. To calculate the field strength level from these results to the appropriate distance at which the limit is specified, the appropriate extrapolation factor is used.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.6 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.7 Test conditions.

Normal test conditions:

Temperature (*) : +15°C to +35°C
Relative humidity(*) : 20 % to 75 %
Supply voltage : 120VAC
Air pressure : 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

2 System test configuration.

2.1 Justification.

The system was configured for testing in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4-2014.

2.2 EUT mode of operation.

Testing was performed while EUT was operating in normal operating mode

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.4 Equipment modifications.

No modifications have been made to the equipment.

No modifications have been made to the equipment in order to achieve compliance.

2.5 Product Labelling

The product labeling information is available in the technical documentation package.

2.6 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.7 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.8 Part list of the EUT.

The part list is available in the technical documentation package.

3 Radiated emission data.

RESULT: PASS

Date of testing: May 11, 2016

Frequency range: 30MHz - 1000MHz

Requirements:

FCC 15.109(a) and IC ICES-003 section 6.2

Except for Class A digital devices, the field strength of radiated emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Test procedure:

ANSI C63.4-2014.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30 MHz to 1 GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

3.1 System Radiated emissions data (30 MHz – 1 GHz).

Frequency (MHz)	Antenna polarization Measurement results @3m (dB μ V/m)		Limits Qp @3m (dB μ V/m)	Pass/Fail
	Vertical	Horizontal		
99.60	26.2	28.9	43.5	Pass
144.00	31.2	30.8	43.5	Pass
180.04	26.1	31.1	43.5	Pass
228.04	24.6	35.3	46.0	Pass
299.72	29.3	28.9	46.0	Pass
336.00	29.3	27.9	46.0	Pass
384.00	<26.0	31.6	46.0	Pass
432.00	<26.0	31.7	46.0	Pass
462.00	26.3	<26.0	46.0	Pass
528.00	30.5	<26.0	46.0	Pass
640.00	34.5	32.7	46.0	Pass
804.72	40.2	<26.0	46.0	Pass

Table 1 Radiated emissions


The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.109 and ICES-003 are depicted in Table 1. The system is tested as in whole, so with all equipment as shown in Figure.1 in place and functioning. Being the worst case situation.

Notes:

1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
2. Measurement uncertainty is ± 5.0 dB
3. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in 3 positions, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
4. A Quasi-peak detector was used with a resolution bandwidth of 120 kHz.
5. The EUT was tested in normal operation mode. Worst case values have been noted.

Used test equipment and ancillaries:

A00257	A00258	A00314	A00450	A00447	A00235	A00466	A00444	

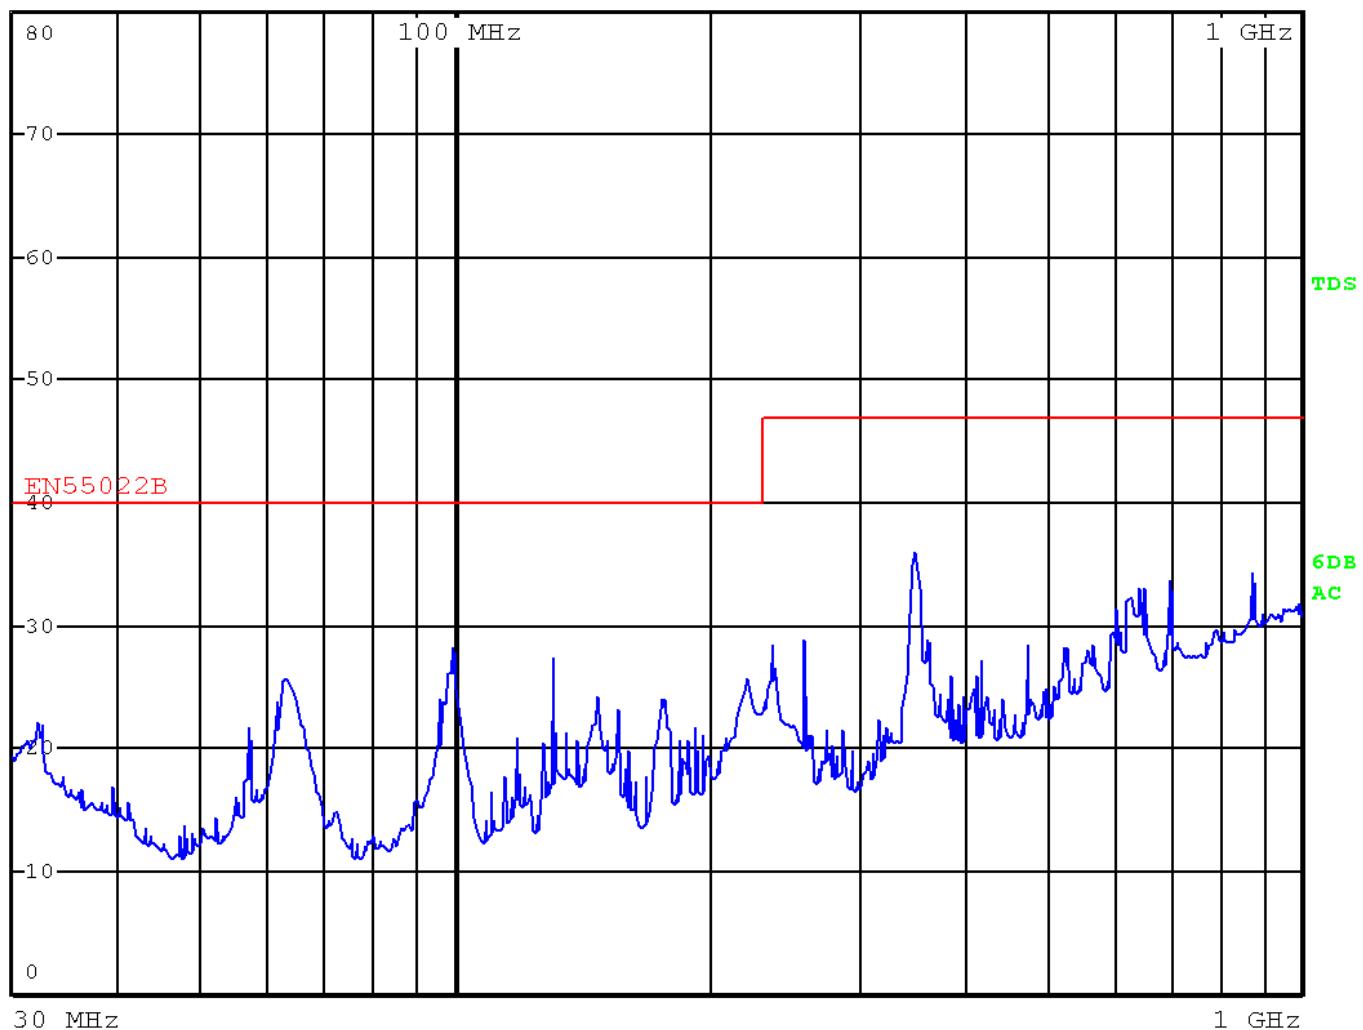

Plot 1: Radiated emissions of the EUT using wifi 2.4Ghz + Bluetooth

4 AC Power-line Conducted emission data.

RESULT: Pass.

Date of testing: May 23, 2016

Requirements:

Except when the requirements applicable to a given device state otherwise, for any license-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the following table. The tighter limit applies at the frequency range boundaries.

Frequency of Emission (MHz)	Conducted Limit (dB μ V) Quasi-Peak	Conducted Limit (dB μ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

*Decreases with the logarithm of the frequency.

Test procedure:

ANSI C63.4-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50 μ H / 50 Ω LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT is placed on a non-conductive table 0.8m above the ground plane. The EUT was positioned at least 80cm from the LISN. The power cable was routed over the non-conductive plate to the LISN.

4.1.1 Test results

Frequency (MHz)	Measurement results N (dB μ V)		Measurement results L1 (dB μ V)		Limits (dB μ V)		Verdict (Pass/Fail)
	QP	AV	QP	AV	QP	AV	
	0.165	46.6	32.0	46.2	31.8	65.2	55.2
0.189	41.4	27.0	40.5	26.03	64.0	54.0	Pass
0.200	43.9	30.1	43.3	31.2	63.6	53.6	Pass
0.259	36.6	26.9	36.0	26.2	61.4	51.4	Pass
0.325	33.8	23.9	32.7	21.6	59.6	49.6	Pass
0.450	18.5	10.1	23.1	19.3	56.9	46.9	Pass
1.505	18.1	9.9	30.3	21.4	56.0	46.0	Pass
1.677	17.4	10.0	25.3	19.2	56.0	46.0	Pass
3.704	25.7	15.2	28.2	15.0	56.0	46.0	Pass
10.830	20.9	15.3	27.2	20.8	60.0	50.0	Pass

Table 2 Conducted emissions results of the EUT using wifi 2.4Ghz + Bluetooth.


The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.107(a) and ICES-003 Section 6.1 Table 2 Class B, at the 120 Volts/ 60 Hz AC mains connection terminals of the EUT, are depicted in the table above.

Notes:

1. The resolution bandwidth used was 9 kHz.
2. Tested in the normal operation mode. Worst case values noted.
3. Plots are provided on the next pages.

Used test equipment and ancillaries:

A00022	A00171	A00437	A00441	A00314	

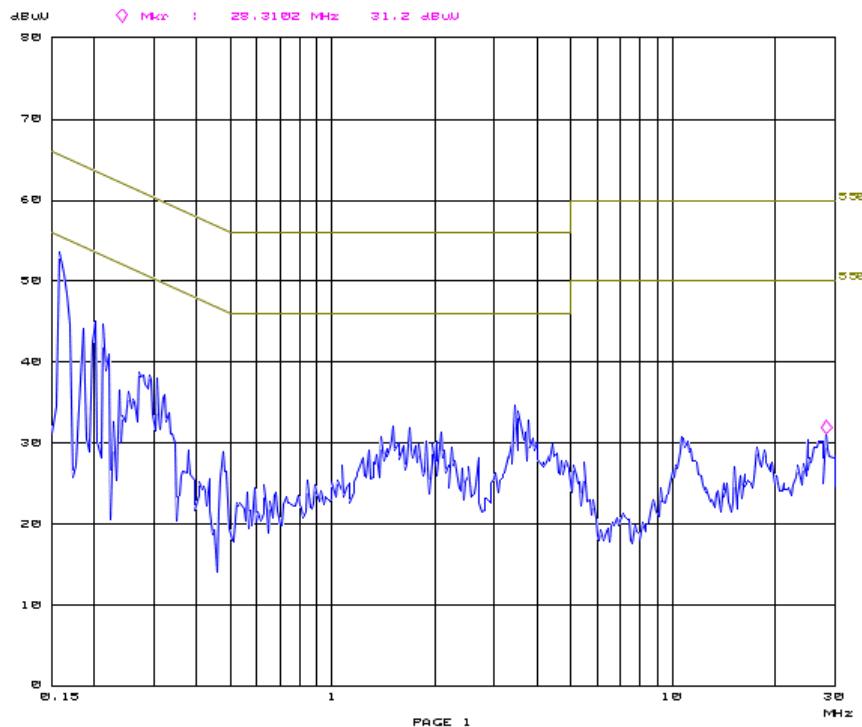

Plot 2: Conducted emission

5 List of utilized test equipment.

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
For Radiated Emissions					
Measurement Receiver	Rohde & Schwarz	ESCI	A00314	03/2016	03/2017
RF Cable S-AR	Gigalink	APG0500	A00447	01/2016	01/2017
Controller	Maturo	SCU/088/ 8090811	A00450	N/A	N/A
Controller	EMCS	DOC202	A00257	N/A	N/A
Test facility	Comtest	FCC listed: 90828 IC: 2932G-2	A00235	04/2014	04/2017
Antenna mast	EMCS	AP-4702C	A00258	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	A00444	03/2016	03/2017
Biconilog Testantenna	Teseq	CBL 6111D	A00466	06/2015	06/2016
For AC Power Line					
Variac	RFT	LSS020	A00171	NA	NA
LISN	EMCO	3625/2	A00022	01/2016	01/2018
Measurement Receiver	Rohde & Schwarz	ESCI	A00314	03/2016	03/2017
Shielded room for Conducted emissions	--	--	A00437	NA	NA
Temperature-Humiditymeter	Extech	SD500	A00444	03/2016	03/2017

NA= Not Applicable

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

6 Testsetup photographs

6.1 Testsetup photographs radiated emissions

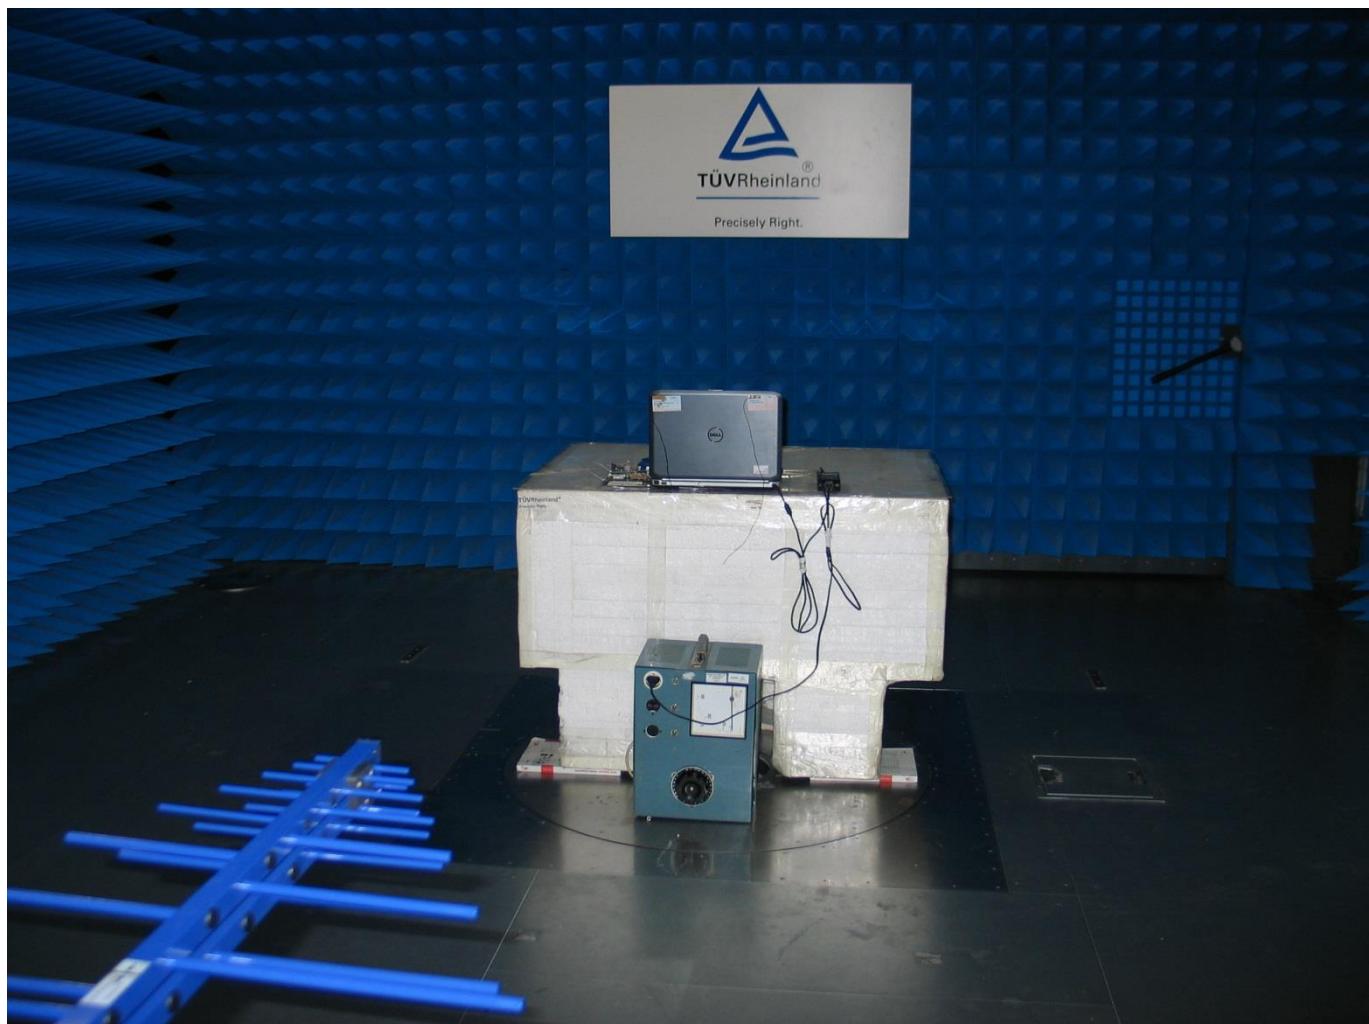


Photo 1. Radiated emission

6.2 Testsetup photographs AC power line conducted emissions



Photo 2. Conducted emission