

TEST REPORT

EUT Description	Wireless Module installed in Backpack PC
Brand Name	Intel® Dual-Band Wireless-AC 8265
Model Name	8265NGW
FCC/IC ID	FCC ID: PD98265NG & PD98265NGU IC ID: 1000M-8265NG
Date of Test Start/End	2017-08-01 / 2017-08-14
Features	802.11 a/b/g/n/ac Wireless LAN + Bluetooth v4.2 (see section 5)
Description	Platform: TPC-Q036-BP series + WNC antenna

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, Issue 5 (see section 1)		
RF Exposure Environment	Portable devices - General population/uncontrolled exposure		
Maximum SAR Result & Limit		SAR Result	SAR Limit
	Body-worn	0.48 W/Kg (1g)	1.6 W/kg (1g)
	Extremities	2.34 W/kg (10g)	4.0 W/kg (10g)
Min. test separation distance	7.88mm		

Test Report identification	170621-02.TR01
Revision Control	Rev. 01 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed by

Rafael Quiroz
(Test Engineer Lead)

Olivier FARGANT
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	8
7. Test Verdicts summary	8
7.1. BODY-WORN EXPOSURE	8
7.2. EXTREMITIES EXPOSURE	8
8. Document Revision History	9
Annex A. Test & System Description	10
A.1 SAR DEFINITION	10
A.2 SPEAG SAR MEASUREMENT SYSTEM	11
A.2.1 SAR Measurement Setup	11
A.2.2 E-Field Measurement Probe	12
A.2.3 SAM Phantom	12
A.2.4 Flat Phantom	13
A.2.5 Device Positioner	13
A.3 DATA EVALUATION	14
A.4 SYSTEM AND LIQUID CHECK	16
A.4.1 System Check	16
A.4.2 Liquid Check	17
A.5 TEST EQUIPMENT LIST	18
A.5.1 SAR System #1	18
A.5.2 Shared Instrumentation	18
A.5.3 Tissue Simulant Liquid	18
A.6 MEASUREMENT UNCERTAINTY EVALUATION	19
A.7 RF EXPOSURE LIMITS	21
Annex B. Test Results	22
B.1 TEST CONDITIONS	22
B.1.1 Test SAR Test positions relative to the phantom	22
B.1.2 Test signal, Output power and Test Frequencies	22
B.1.3 Evaluation Exclusion and Test Reductions	23
B.2 CONDUCTED POWER MEASUREMENTS	25
B.2.1 WLAN 2.4GHz	25
B.2.2 WLAN 5GHz (U-NII)	26
B.2.3 Bluetooth	30
B.3 TISSUE PARAMETERS MEASUREMENT	31
B.4 SYSTEM CHECK MEASUREMENTS	31
B.5 SAR TEST RESULTS - BODY-WORN EXPOSURE (1G)	32
B.5.1 802.11b/g/n – 2.4GHz - DTS	32
B.5.2 802.11a/n/ac – 5.3 GHz – U-NII-2A	32
B.5.3 802.11a/n/ac – 5.6 GHz – U-NII-2C	32
B.5.4 802.11a/n/ac – 5.8 GHz – U-NII-3	32
B.5.5 Bluetooth – 2.4GHz - DSS	32
B.6 SAR TEST RESULTS - EXTREMITIES EXPOSURE (10G)	33
B.6.1 802.11b/g/n – 2.4GHz - DTS	33

B.6.2	802.11a/n/ac – 5.3 GHz – U-NII-2A.....	33
B.6.3	802.11a/n/ac – 5.6 GHz – U-NII-2C.....	34
B.6.4	802.11a/n/ac – 5.8 GHz – U-NII-3	34
B.6.5	Bluetooth – 2.4GHz - DSS.....	35
B.6.6	SAR Measurement Variability.....	36
B.6.7	Simultaneous Transmission SAR Evaluation.....	37
Annex C.	Test System Plots.....	41
Annex D.	TSL Dielectric Parameters	64
D.1	BODY DTS 2450MHz	64
D.2	BODY 5200MHz-5800MHz	65
Annex E.	Calibration Certificates	67
Annex F.	Photographs	69
F.1	TEST SAMPLE	69
F.2	TEST POSITIONS.....	70
F.3	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY	72
F.4	PHANTOM LIQUID LEVEL DURING MEASUREMENTS	73

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices.
2. FCC OET KDB 248227 D01 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
3. FCC OET KDB 447498 D01 –RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.
4. FCC OET KDB 865664 D01 – SAR Measurement Requirements for 100 MHz to 6 GHz.
5. FCC OET KDB 865664 D02 – RF Exposure Compliance Reporting and Documentation Considerations.
6. IC RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).
7. IC Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures.
8. IC Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard.
9. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
10. KDB Inquiry #488193

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2005 testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by IC, with IC Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 2°C
Humidity	50% ± 10%
Liquid Temperature	21°C ± 2°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	170621-02.S02	Wireless Module installed in Backpack PC	8265NGW+TPC- Q036-BP series	Wifi MAC: 34:13:E8:52:D5:B9 BT MAC: 34:13:E8:52:D5:BD	2017-06-23	NA

5. EUT Features

Brand Name	Intel® Dual-Band Wireless-AC 8265	
Model Name	8265NGW	
FCC/IC ID	FCC ID: PD98265NG & PD98265NGU IC ID: 1000M-8265NG	
Software Version	1.9.1-04155	
Driver Version	19.20.0.6	
Prototype / Production	Production	
Host Identification	TPC-Q036-BP series	
Exposure Conditions	Body-worn / Extremities	
Supported Radios	802.11b/g/n 2.4GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac 5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5825.0 MHz) Bluetooth 2.4GHz (2400.0 – 2483.5 MHz)	
Antenna Information	Main WLAN: WNC PIFA antenna. WiFi 2.4GHz & 5GHz S/N: DQ6415GBC00 (81EAA415.GBC) Aux WLAN: WNC PIFA antenna. WiFi 2.4GHz & 5GHz and BT. S/N: DQ6415GBC00 (81EAA415.GBD) See Annex F for more details on antennas location.	
Simultaneous Transmission Configurations	WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	
Additional Information	No WWAN transmitter is considered in this report	
	5.60-5.65 GHz band (TDWR) is supported by the device	
	Band gap is supported by the device	

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11b/g/n	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	20.00
802.11a/n/ac	100%	BPSK QPSK 16QAM 64QAM 256QAM	5.2GHz	5150-5250	NM
			5.3GHz	5250-5350	20.50
			5.6GHz	5475-5725	20.50
			5.8GHz	5725-5850	20.50
BDR/EDR v4.2	77%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	11.44
Bluetooth LE v4.2	64%	GFSK	2.4GHz	2400-2483.5	9.00

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit			SISO mode	
Equipment Class	Mode	BW (MHz)	Main (dBm)	Aux (dBm)
DTS	802.11b	20	20.00	20.00
	802.11g	20	20.00	20.50
	802.11n20	20	20.00	20.50
	802.11n40	40	16.00	16.00
U-NII-1	802.11a	20	20.50	20.50
	802.11n20	20	20.50	20.50
	802.11n40	40	20.50	20.50
	802.11ac80	80	13.00	13.00
U-NII-2A	802.11a	20	20.50	20.50
	802.11n20	20	20.50	20.00
	802.11n40	40	20.50	19.50
	802.11ac80	80	11.50	12.00
U-NII-2C	802.11a	20	20.00	20.00
	802.11n20	20	20.00	20.00
	802.11n40	40	20.50	20.50
	802.11ac80	80	19.50	18.00
U-NII-3	802.11a	20	20.50	20.50
	802.11n20	20	20.00	20.50
	802.11n40	40	20.50	20.50
	802.11ac80	80	19.50	20.00
BT	Bluetooth v4.2 BDR	20		11.50
	Bluetooth v4.2 EDR2	20		9.00
	Bluetooth v4.2 EDR3	20		9.00
	BLE	-		9.00

6. Remarks and comments

- Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.8.

7. Test Verdicts summary

7.1. Body-worn exposure

Standard	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b/g/n	2.4GHz	0.03	P
802.11a/n/ac	5.2GHz	NM	NA
	5.3GHz	0.48	P
	5.6GHz	0.28	P
	5.8GHz	0.22	P
Bluetooth	2.4GHz	0.00	P

7.2. Extremities exposure

Standard	Band	Highest Reported SAR (10g) (W/kg)	Verdict
802.11b/g/n	2.4GHz	1.44	P
802.11a/n/ac	5.2GHz	NM	NA
	5.3GHz	2.23	P
	5.6GHz	2.34	P
	5.8GHz	2.25	P
Bluetooth	2.4GHz	0.06	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Highest Reported SAR (1g) (W/kg)			
Exposure Condition	Equipment Class		
	DTS	DSS	U-NII
Body-worn	0.03	0.00	0.48
Simultaneous Body-worn Tx	Sum-SAR: 0.05	Sum-SAR: 0.59	Sum-SAR: 0.59

Highest Reported SAR (10g) (W/kg)			
Exposure Condition	Equipment Class		
	DTS	DSS	U-NII
Extremities Exposure	1.44	0.06	2.34
Simultaneous Extremities Exposure Tx	Sum-SAR: 2.44	Sum-SAR: 4.33 SPLSR: 0.03	Sum-SAR: 4.33 SPLSR: 0.07

Considering the results of the performed test according to FCC 47CFR Part 2.1093 and IC RSS 102, Issue 5 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods.

8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev. 00	2017-08-22	V. Kaculini	First Issue
Rev. 01	2017-08-23	Rafael Quiroz	SAR values updated in section B.6.5 due to typo

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:

σ = Conductivity of the tissue (S/m)
 ρ = Mass density of the tissue (kg/m³)
E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY5 system for performing compliance tests consists of the following items:

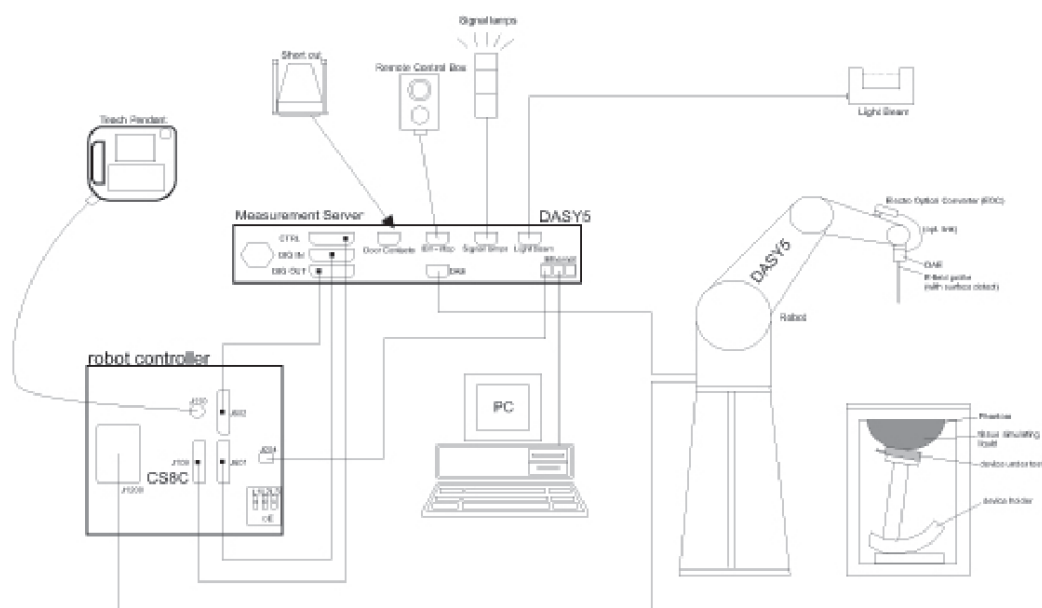

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY5 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:

Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Shell thickness at ERP	6 ± 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm



A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm



A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.



The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

A.5.1 SAR System #1

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0218	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	NA	NA
0221	SAM Phantom	Twin SAM v5.0	1838	SPEAG	NA	NA
0222	Oval Flat Phantom	ELI v5.0	1260	SPEAG	NA	NA
0223	Measurement SW	DASY52	v52.8.8.1258	SPEAG	NA	NA
0225	Post processing SW	SEMCAD X	v14.6.10	SPEAG	NA	NA
0229	Light Beam Unit	LB5 / 80	-	Di-soric	NA	NA
0231	6-axis Robot	TX60 L	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
0233	Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
0235	Measurement Server	DASY5 P/N: SE UMS 011 EA	1444	SPEAG	NA	NA
0243	Electro-Optical Converter	EOC60	1076	SPEAG	NA	NA
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	2016-12-08	2017-12-08
0418	Data Acquisition Electronics	DAE4	1496	SPEAG	2016-12-06	2017-12-06

A.5.2 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0096	VNA	MS202SB	1301107	Anritsu	2015-09-23	2017-09-23
0098	USB Power Sensor	NRP-Z81	102278	R&S	2015-09-10	2017-09-10
0099	USB Power Sensor	NRP-Z81	102279	R&S	2015-09-10	2017-09-10
0114	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	NA	NA
0170	Power Amplifier	SAM-01	151922	ETS-Lindgren	NA	NA
0224	Liquid measurement SW	DAKS-3.5	V2.20.533	SPEAG	NA	NA
0237	Dielectric Probe Kit	DAKS-3.5	1037	SPEAG	2016-06-14	2018-06-14
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	2016-06-20	2018-06-20
0398	Temperature & Humidity Logger	TR-72NW-H + HHA-3151	Logger: 62180216 Sensor: 0202622A	TandD	2016-02-01	2018-02-01
0408	Thermometer	TESTO 922	33622932	Testo	2016-05-19	2018-05-19
0412	Coupler	CD0.5-8-20-30	1251-002	Amd-group	NA	NA
0591	5GHz System Validation Dipole	D5GHZv2	1259	SPEAG	2017-04-26	2019-04-26

A.5.3 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG MBBL600-6000V6 Batch 160630-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

SAR System #1

SPEAG DASY5 Uncertainty Budget According to IEEE 1528-2013 and IEC 62209-1/2016 (0.3 - 6 GHz range)								
Error Description Measurement System	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0.0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	√3	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

SPEAG DASY5 Uncertainty Budget According to IEC 62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
Modulation Response	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Post-processing	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scaling	±0.0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±7.9 %	R	√3	1	1	±4.4 %	±4.4 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.5 %	±12.4 %	748
Expanded STD Uncertainty						±25.1 %	±25.0 %	

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part §2.1093 and RSS 102, Issue 5 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was an Intel® Dual-Band Wireless-AC 8265 card inside a backpack PC host platform (TPC-Q036-BP series) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 1.9.1-04155) and each channel was measured using a broadband power meter to determine the maximum average power.

Due to the physical design complexity of the EUT, a KDB inquiry was submitted to validate the SAR exposure and the necessary testing positions. Therefore, following testing position used for testing were defined according to KDB Inquiry #488193:

Antennas	Tested surfaces	Body SAR_0mm (1g-SAR<1.6)	Hand SAR_0mm (10g-SAR<4)
Main and Aux	3-1	required	Not required
Aux	2, 2-2, 2-3, 2-4, 2-5, 2-6, 2-7, 2-8	Not required	required
Main	1, 1-2, 1-4, 2-4, 2-5, 2-6	Not required	required

Considering the antenna location diagrams in Annex F and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Main	Aux
Position	○ 1 ○ 1-2 ○ 1-4 ○ 2-4 ○ 2-5 ○ 2-6 ○ 3-1	○ 2 ○ 2-2 ○ 2-3 ○ 2-4 ○ 2-5 ○ 2-6 ○ 2-7 ○ 2-8 ○ 3-1

See *B.1.3.1* for a more detailed list of the applied reductions.

See *F.2* section for more information on the tested positions

B.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

B.1.3 Evaluation Exclusion and Test Reductions

B.1.3.1 SAR evaluation exclusion

The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 v06 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances $\leq 50\text{mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$\left[\frac{(\text{max. power of channel, including tune - up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f_{\text{GHz}}} \right] \leq 3.0 \text{ for } 1\text{g SAR, and } \leq 7.5 \text{ for } 10\text{g extremity SAR} \quad (1)$$

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is $\leq 50\text{ mm}$, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $< 5\text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances $> 50\text{ mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$\left((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot (f_{\text{MHz}}/150) \right) \text{mW, for } 100\text{MHz to } 1500\text{MHz} \quad (2)$$

$$\left((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot 10 \right) \text{mW, for } 1500\text{MHz and } \leq 6\text{GHz} \quad (3)$$

LAN Antenna	Band Name	Output power		1	1-2	1-4	2	2-2	2-3	2-4	2-5	2-6	2-7	2-8	3-1
		dBm	mW												
WLAN Main	DTS	20.5	112.2	T	T	T	R	R	R	T	T	T	R	R	T
	U-NII-1	20.5	112.2	R	R	R	R	R	R	R	R	R	R	R	R
	U-NII-2A	20.5	112.2	T	T	T	R	R	R	T	T	T	R	R	T
	U-NII-2C	20.5	112.2	T	T	T	R	R	R	T	T	T	R	R	T
	U-NII-3	20.5	112.2	T	T	T	R	R	R	T	T	T	R	R	T
WLAN Aux	DTS	20.5	112.2	R	R	R	T	T	T	T	T	T	T	T	T
	U-NII-1	20.5	112.2	R	R	R	R	R	R	R	R	R	R	R	R
	U-NII-2A	20.5	112.2	R	R	R	T	T	T	T	T	T	T	T	T
	U-NII-2C	20.5	112.2	R	R	R	T	T	T	T	T	T	T	T	T
	U-NII-3	20.5	112.2	R	R	R	T	T	T	T	T	T	T	T	T
	BT	11.5	14.1	R	R	R	T	T	T	T	T	T	T	T	T

T: Tested position

R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WLAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
DSSS	According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following: ▪ When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. ▪ When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
OFDM	According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. According to FCC OET KDB 248227 D01, an <u>initial test configuration</u> is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration. The <u>initial test configuration</u> for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

B.2 Conducted Power Measurements

B.2.1 WLAN 2.4GHz

					Main		Aux		SAR Test ?
Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
2.4GHz (DTS)	802.11b	1Mbps	1	2412	18.50	18.50	18.00	18.00	No ³
			6	2437	20.00	20.00	20.00	Yes	
			11	2462	18.50	18.50	19.00	No ³	
	802.11g	6Mbps	1	2412	NR ¹	16.50	NR ¹	18.00	No ²
			6	2437		20.00		20.50	
			11	2462		17.00		18.00	
	802.11n20	HT0	1	2412		16.50		16.50	
			6	2437		20.00		20.50	
			11	2462		16.00		17.00	
	802.11n40		3	2422		13.00		15.50	
			6	2437		16.00		16.00	
			9	2452		15.00		15.00	

Initial test configuration

1. NR: Not Required
2. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.
3. When the reported SAR of the initial test configuration is $> 0.8\text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

B.2.2 WLAN 5GHz (U-NII)

B.2.2.1 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test ?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.2GHz (U-NII-1)	802.11a	6Mbps	36	5180	NR ¹	17.50	NR ¹	18.00	No ²
			40	5200		20.50		20.50	
			44	5220		20.50		20.50	
			48	5240		20.50		20.50	
	802.11n20	HT0	36	5180		18.00		17.50	
			40	5200		20.50		20.50	
			44	5220		20.50		20.50	
			48	5240		20.50		20.50	
	802.11n40		38	5190		17.00		17.00	
			46	5230		20.50		20.50	
	802.11ac80	VHT0	42	5210		13.00		13.00	

Initial test configuration

- NR: Not Required
- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see B.5.2 in this document).
- Additional conducted power measurement is required when reported SAR is > 1.2 W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
- When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/Kg, SAR is not required for that subsequent test configuration
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/Kg or until all required channels are tested.

					Main		Aux		SAR Test?
Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.3GHz (U-NII-2A)	802.11a	6Mbps	52	5260	NR ¹	20.50	19.50	20.50	Yes
			56	5280		20.50	19.49	20.00	No ⁴
			60	5300		20.50	19.50	20.00	Yes
			64	5320		17.00	17.50	17.50	No ⁴
	802.11n20	HT0	52	5260		20.50	NR ¹	20.00	No ⁵
			56	5280		20.50		20.00	
			60	5300		20.50		20.00	
			64	5320		17.00		17.00	
	802.11n40		54	5270	20.50	19.50		Yes	
			62	5310	13.00	13.00			14.00
	802.11ac80	VHT0	58	5290	NR ¹	11.50			12.00

Initial test configuration

1. NR: Not Required
2. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
6. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.2 5.6 GHz (U-NII-2C)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.6GHz (U-NII-2C)	802.11a	6Mbps	100	5500	NR ¹	17.50	NR ¹	18.00	No ^{4,6}
			104	5520		20.00		20.00	
			108	5540		20.00		20.00	
			112	5560		20.00		20.00	
			116	5580		20.00		20.00	
			120	5600		20.00		20.00	
			124	5620		20.00		20.00	
			128	5640		20.00		20.00	
	802.11n20	HT0	100	5500	NR ¹	17.50	NR ¹	18.00	No ^{4,6}
			104	5520		20.00		20.00	
			108	5540		20.00		20.00	
			112	5560		20.00		20.00	
			116	5580		20.00		20.00	
			120	5600		20.00		20.00	
			124	5620		20.00		20.00	
			128	5640		20.00		20.00	
	802.11n40	HT0	102	5510	18.50	18.50	15.94	16.00	No ⁵
			110	5550	20.50	20.50	20.46	20.50	Yes
			118	5590	20.49	20.50	20.47	20.50	
			126	5630	20.50	20.50	20.50	20.50	No ^{4,6}
	802.11ac80	VHT0	106	5530	NR ¹	12.50	NR ¹	15.50	
			122	5610		19.50		18.00	

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
5. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.3 5.8GHz (U-NII-3)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.6-5.8GHz (U-NII-3)	802.11a	6Mbps	132	5660	NR ¹	20.00	NR ¹	20.00	No ^{4,6}
			136	5680		20.00		20.00	
			140	5700		18.00		18.50	
			149	5745		20.00		20.00	
			153	5765		20.50		20.50	
			157	5785		20.50		20.50	
			161	5805		20.50		20.50	
			165	5825		20.50		20.00	
	802.11n20	HT0	132	5660		20.00		20.00	
			136	5680		20.00		20.00	
			140	5700		17.50		18.00	
			149	5745		20.00		20.00	
			153	5765		20.00		20.50	
			157	5785		20.00		20.50	
			161	5805		20.00		20.50	
			165	5825		20.00		20.00	
	802.11n40	HT0	134	5670	18.93	19.00	19.00	19.00	No ⁵
			151	5755	20.50	20.50	20.50	20.50	Yes
			159	5795	20.48	20.50	20.50	20.50	
	802.11ac80	VHT0	138	5690	NR ¹	19.50	NR ¹	20.00	No ⁴
			155	5775		18.50		17.50	

Initial test configuration

- NR: Not Required
- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
- When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
- When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.3 Bluetooth

Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	Avg Pwr (dBm)	Tune-up Pwr (dBm)
2.4GHz	Bluetooth v4.2	Basic rate GFSK	0	2402	Aux	11.13	11.50
			39	2441		11.40	11.50
			78	2480		11.44	11.50
	Bluetooth v4.2	Basic rate $\pi/4$ DQPSK	0	2402		NR ¹	9.00
			39	2441			9.00
			78	2480			9.00
	Bluetooth v4.2	Basic rate 8-DPSK	0	2402			9.00
			39	2441			9.00
			78	2480			9.00
	Bluetooth v4.2	Low energy GFSK	0	2412			9.00
			20	2437			9.00
			39	2480			9.00

Initial test configuration

1. NR: Not Required

B.3 Tissue Parameters Measurement

Body TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
2450	52.70	1.95	50.35	2.13	-4.47	9.30	2017-08-09
5300	48.88	5.41	44.69	5.52	-8.58	1.97	2017-08-02
5600	48.47	5.76	44.53	5.99	-8.13	3.85	2017-08-07
5800	48.20	6.00	44.13	6.29	-8.44	4.89	2017-08-07

See *Annex D* for more details.

B.4 System Check Measurements

Body Measurements

Frequency (MHz)	Average	Target SAR (W/Kg)	Measured SAR (W/Kg)	Deviation to target (%)	Limit (%)	Date
2450	1g	49.40	51.32	3.89	±10	2017-08-09
	10g	23.40	23.66	1.13		
5300	1g	76.80	69.66	-9.30		2017-08-02
	10g	21.60	20.32	-5.94		
5600	1g	77.80	79.52	2.21		2017-08-07
	10g	21.80	22.85	4.80		
5800	1g	75.30	75.38	0.10		2017-08-08
	10g	21.00	21.32	1.53		

See *Annex C* for more details.

B.5 SAR Test Results - Body-worn exposure (1g)

B.5.1 802.11b/g/n – 2.4GHz - DTS

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11b 1Mbps	20	6	2437	3-1	0.00	0.03	0.03	1
Aux			6	2437	3-1	0.00	0.02	0.02	2

B.5.2 802.11a/n/ac – 5.3 GHz – U-NII-2A

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11n HT0	40	54	5270	3-1	0.00	0.48	0.48	3
Aux	802.11a 6Mbps	20	52	5260	3-1	1.00	0.05	0.07	4

B.5.3 802.11a/n/ac – 5.6 GHz – U-NII-2C

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11n HT0	40	126	5630	3-1	0.00	0.29	0.29	5
Aux	802.11n HT0	40	126	5630	3-1	0.00	0.11	0.11	6

B.5.4 802.11a/n/ac – 5.8 GHz – U-NII-3

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11n HT0	40	151	5755	3-1	0.00	0.22	0.22	7
Aux	802.11n HT0	40	151	5755	3-1	0.00	0.10	0.10	8

B.5.5 Bluetooth – 2.4GHz - DSS

Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct.Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
802.15 DH5	20	78	2480	3-1	0.06	0.00	0.00	9

B.6 SAR Test Results - Extremities exposure (10g)

B.6.1 802.11b/g/n – 2.4GHz - DTS

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 10g (W/kg)	Reported SAR 10g (W/kg)	Plot #
Main	802.11b 1Mbps	20	6	2437	1	0.00	1.44	1.44	10
					1-2	0.00	0.69	0.69	
					1-4	0.00	0.15	0.15	
					2-4	0.00	0.72	0.72	
					2-5	0.00	0.02	0.02	
					2-6	0.00	0.00	0.00	
Aux			6	2437	2	0.00	1.35	1.35	11
					2-2	0.00	0.59	0.59	
					2-3	0.00	0.04	0.04	
					2-4	0.00	0.92	0.92	
					2-5	0.00	0.00	0.00	
					2-6	0.00	0.01	0.01	
					2-7	0.00	0.02	0.02	
					2-8	0.00	0.18	0.18	

B.6.2 802.11a/n/ac – 5.3 GHz – U-NII-2A

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 10g (W/kg)	Reported SAR 10g (W/kg)	Plot #
Main	802.11n HT0	40	54	5270	1	0.00	2.17	2.17	12
					1-2	0.00	1.94	1.94	
					1-4	0.00	1.27	1.27	
					2-4	0.00	0.98	0.98	
					2-5	0.00	0.84	0.84	
					2-6	0.00	0.50	0.50	
			62	5310	1	0.00	0.36	0.36	
Aux	802.11a 6Mbps	20	52	5260	2	1.00	1.02	1.28	
					2-2	1.00	1.35	1.70	
					2-3	1.00	1.77	2.23	13
					2-4	1.00	0.35	0.44	
					2-5	1.00	0.23	0.29	
					2-6	1.00	0.19	0.23	
					2-7	1.00	0.93	1.17	
					2-8	1.00	0.57	0.72	
			60	5300	2-3	0.50	1.64	1.84	

B.6.3 802.11a/n/ac – 5.6 GHz – U-NII-2C

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 10g (W/kg)	Reported SAR 10g (W/kg)	Plot #
Main	802.11n HT0	40	126	5630	1	0.00	2.09	2.09	
					1-2	0.00	2.33	2.33	14
					1-4	0.00	0.96	0.96	
					2-4	0.00	0.99	0.99	
					2-5	0.00	1.10	1.10	
					2-6	0.00	0.49	0.49	
			110	5550	1	0.00	2.02	2.02	
					1-2	0.00	2.22	2.22	
Aux	802.11n HT0	40	126	5630	2	0.00	1.79	1.79	
					2-2	0.00	2.02	2.02	
					2-3	0.00	2.34	2.34	15
					2-4	0.00	0.66	0.66	
					2-5	0.00	0.30	0.30	
					2-6	0.00	0.25	0.25	
					2-7	0.00	1.30	1.30	
					2-8	0.00	0.97	0.97	
			118	5590	2-2	0.03	1.98	1.99	
					2-3	0.03	2.29	2.31	

B.6.4 802.11a/n/ac – 5.8 GHz – U-NII-3

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 10g (W/kg)	Reported SAR 10g (W/kg)	Plot #
Main	802.11n HT0	40	151	5755	1	0.00	2.14	2.14	
					1-2	0.00	2.25	2.25	16
					1-4	0.00	0.83	0.83	
					2-4	0.00	1.32	1.32	
					2-5	0.00	0.94	0.94	
					2-6	0.00	0.48	0.48	
			159	5795	1	0.02	2.12	2.13	
					1-2	0.02	2.15	2.16	
Aux	802.11n HT0	40	151	5755	2	0.00	1.40	1.40	
					2-2	0.00	1.47	1.47	
					2-3	0.00	1.69	1.69	17
					2-4	0.00	0.50	0.50	
					2-5	0.00	0.21	0.21	
					2-6	0.00	0.17	0.17	
					2-7	0.00	0.76	0.76	
					2-8	0.00	0.69	0.69	

B.6.5 Bluetooth – 2.4GHz - DSS

Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct.Factor (dB)	SAR 10g (W/kg)	Reported SAR 10g (W/kg)	Plot #
802.15 DH5	20	78	2480	2	0.06	0.06	0.06	18
				2-2	0.06	0.03	0.04	
				2-3	0.06	0.01	0.01	
				2-4	0.06	0.04	0.04	
				2-5	0.06	0.01	0.00	
				2-6	0.06	0.01	0.00	
				2-7	0.06	0.02	0.02	
				2-8	0.06	0.01	0.01	

B.6.6 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is >0.8 W/kg for a certain band/mode. Repeated measurement is not required when the original highest measured SAR is <0.8 W/Kg for 1g, or < 2.0 W/Kg for 10g.

If the measured SAR value of the initial repeated measurement is <1.45 W/kg for 1g, or <3.6 W/kg for 10g, with $<20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 10g (W/kg)	1 st Repeated SAR 10g (W/Kg)	2 nd Repeated SAR 10g (W/Kg)	Highest Ratio
5.3GHz 802.11n40 HT0	1	54	5270	2.17	1.99		1.09
5.6GHz 802.11n40 HT0	2-3	126	5630	2.34	2.19		1.07
5.8GHz 802.11n40 HT0	1-2	151	5755	2.25	2.11		1.07

B.6.7 Simultaneous Transmission SAR Evaluation

B.6.7.1 Body-worn exposure

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found.

Antenna	Position	Highest Reported SAR (1g) (W/Kg)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Main	3-1	0.03	0.48	
Aux	3-1	0.02	0.11	0.00

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/Kg)	Limit (W/kg)
	Main Antenna	Aux Antenna		
3-1	WLAN 5GHz	WLAN 5GHz	0.59	1.6
	WLAN 5GHz	WLAN 5GHz + BT	0.59	
	WLAN 5GHz	BT	0.48	
	WLAN 2.4GHz	WLAN 2.4GHz	0.05	
	WLAN 2.4GHz	BT	0.03	

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no SAR to peak location measurement is required.

B.6.7.2 Extremities exposure

According to FCC OET KDB 447498 D01, when the sum of 10g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (10g) (W/Kg)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Main	1	1.44	2.17	
	1-2	0.69	2.33	
	1-4	0.15	1.27	
	2	1.00*	1.00*	
	2-2	1.00*	1.00*	
	2-3	1.00*	1.00*	
	2-4	0.72	1.32	
	2-5	0.02	1.10	
	2-6	0.00	0.50	
	2-7	1.00*	1.00*	
	2-8	1.00*	1.00*	
Aux	1	1.00*	1.00*	1.00*
	1-2	1.00*	1.00*	1.00*
	1-4	1.00*	1.00*	1.00*
	2	1.35	1.79	0.06
	2-2	0.59	2.02	0.04
	2-3	0.04	2.34	0.01
	2-4	0.92	0.66	0.05
	2-5	0.00	0.30	0.00
	2-6	0.02	0.25	0.00
	2-7	0.03	1.30	0.03
	2-8	0.18	0.97	0.01

* According to FCC OET KDB 447498 D01, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 1 W/Kg for 10-g SAR when the test separation is > 50mm in order to determine simultaneous transmission test exclusion.

Position	Simultaneous Tx Antenna Combination		Σ SAR 10g (W/Kg)	Limit (W/kg)
	Main Antenna	Aux Antenna		
1	WLAN 5GHz	WLAN 5GHz	3.17	4.0
	WLAN 5GHz	WLAN 5GHz + BT	4.17	
	WLAN 5GHz	BT	3.17	
	WLAN 2.4GHz	WLAN 2.4GHz	2.44	
	WLAN 2.4GHz	BT	2.44	
1-2	WLAN 5GHz	WLAN 5GHz	3.33	
	WLAN 5GHz	WLAN 5GHz + BT	4.33	
	WLAN 5GHz	BT	3.33	
	WLAN 2.4GHz	WLAN 2.4GHz	1.69	
	WLAN 2.4GHz	BT	1.69	
1-4	WLAN 5GHz	WLAN 5GHz	2.27	
	WLAN 5GHz	WLAN 5GHz + BT	3.27	
	WLAN 5GHz	BT	2.27	
	WLAN 2.4GHz	WLAN 2.4GHz	1.15	
	WLAN 2.4GHz	BT	1.15	
2	WLAN 5GHz	WLAN 5GHz	2.79	
	WLAN 5GHz	WLAN 5GHz + BT	2.85	
	WLAN 5GHz	BT	1.06	
	WLAN 2.4GHz	WLAN 2.4GHz	2.35	
	WLAN 2.4GHz	BT	1.06	
2-2	WLAN 5GHz	WLAN 5GHz	3.02	
	WLAN 5GHz	WLAN 5GHz + BT	3.06	
	WLAN 5GHz	BT	1.04	
	WLAN 2.4GHz	WLAN 2.4GHz	1.59	
	WLAN 2.4GHz	BT	1.04	
2-3	WLAN 5GHz	WLAN 5GHz	3.34	
	WLAN 5GHz	WLAN 5GHz + BT	3.35	
	WLAN 5GHz	BT	1.01	
	WLAN 2.4GHz	WLAN 2.4GHz	1.04	
	WLAN 2.4GHz	BT	1.01	
2-4	WLAN 5GHz	WLAN 5GHz	1.98	
	WLAN 5GHz	WLAN 5GHz + BT	2.03	
	WLAN 5GHz	BT	1.37	
	WLAN 2.4GHz	WLAN 2.4GHz	1.64	
	WLAN 2.4GHz	BT	0.77	
2-5	WLAN 5GHz	WLAN 5GHz	1.40	
	WLAN 5GHz	WLAN 5GHz + BT	1.40	
	WLAN 5GHz	BT	1.10	

	WLAN 2.4GHz	WLAN 2.4GHz	0.02	
	WLAN 2.4GHz	BT	0.02	
2-6	WLAN 5GHz	WLAN 5GHz	0.75	
	WLAN 5GHz	WLAN 5GHz + BT	0.75	
	WLAN 5GHz	BT	0.50	
	WLAN 2.4GHz	WLAN 2.4GHz	0.00	
	WLAN 2.4GHz	BT	0.00	
2-7	WLAN 5GHz	WLAN 5GHz	2.30	
	WLAN 5GHz	WLAN 5GHz + BT	2.33	
	WLAN 5GHz	BT	1.03	
	WLAN 2.4GHz	WLAN 2.4GHz	1.03	
	WLAN 2.4GHz	BT	1.03	
2-8	WLAN 5GHz	WLAN 5GHz	1.97	
	WLAN 5GHz	WLAN 5GHz + BT	1.98	
	WLAN 5GHz	BT	1.01	
	WLAN 2.4GHz	WLAN 2.4GHz	1.18	
	WLAN 2.4GHz	BT	1.01	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 100g (W/kg)	Σ SAR 10g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
1*	Main WLAN 5GHz	2.17	4.17	Max1 at (88.8;91.4; -2.82)	0.03	0.10
	Aux WLAN 5GHz	1.00**		Max2 at (74.8;-153; 0)		
	Aux BT	1.00**		Max2 at (74.8;-153; 0)		
1-2*	Main WLAN 5GHz	2.33	4.33	Max2 at (48.4;-17.6; -4.36)	0.07	
	Aux WLAN 5GHz	1.00**		Max2 at (74.8;-153; 0)		
	Aux BT	1.00**		Max2 at (74.8;-153; 0)		

* The worst case for simultaneous SAR to peak location separation ratio calculation was made considering the sum of 3 SAR results and the closest maxima distance between Main and Aux antenna (i.e. the closest distance between the peak location between Main WLAN to Aux WLAN and Main WLAN to Aux BT).

** For WLAN Aux the SAR value was estimated applying standalone test exclusion, the peak location in this case corresponds to the geometrical location of the antenna translated to the phantom surface

Annex C. Test System Plots

1. DTS - 802.11b, CH6, Main Antenna – Position 3-1	42
2. DTS - 802.11b, CH6, Aux Antenna – Position 3-1	43
3. U-NII-2A - 802.11n40, CH54, Main Antenna – Position 3-1	44
4. U-NII-2A - 802.11a, CH52, Aux Antenna – Position 3-1	45
5. U-NII-2C - 802.11n40, CH126, Main Antenna – Position 3-1	46
6. U-NII-2C - 802.11n40, CH126, Aux Antenna – Position 3-1	47
7. U-NII-3 - 802.11n40, CH151, Main Antenna – Position 3-1	48
8. U-NII-3 - 802.11n40, CH151, Aux Antenna – Position 3-1	49
9. BT - 802.15, CH78, Aux Antenna – Position 3-1	50
10. DTS - 802.11b, CH6, Main Antenna – Position 1	51
11. DTS - 802.11b, CH6, Aux Antenna – Position 2	52
12. U-NII-2A - 802.11n40, CH54, Main Antenna – Position 1	53
13. U-NII-2A - 802.11a, CH52, Aux Antenna – Position 2-3	54
14. U-NII-2C - 802.11n40, CH126, Main Antenna – Position 1-2	55
15. U-NII-2C - 802.11n40, CH126, Aux Antenna – Position 2-3	56
16. U-NII-3 - 802.11n40, CH151, Main Antenna – Position 1-2	57
17. U-NII-3 - 802.11n40, CH151 Aux Antenna – Position 2-3	58
18. BT - 802.15, CH78, Aux Antenna – Position 2	59
19. System Check Body Liquid 2450MHz	60
20. System Check Body Liquid 5300MHz	61
21. System Check Body Liquid 5600MHz	62
22. System Check Body Liquid 5800MHz	63

1. DTS - 802.11b, CH6, Main Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 11:04:21 AM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 50.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

DTS_802.11b_CH6-2437MHz_TP_3-1_Main/Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0353 W/kg


DTS_802.11b_CH6-2437MHz_TP_3-1_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.894 V/m; Power Drift = 0.39 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.014 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0359 W/kg

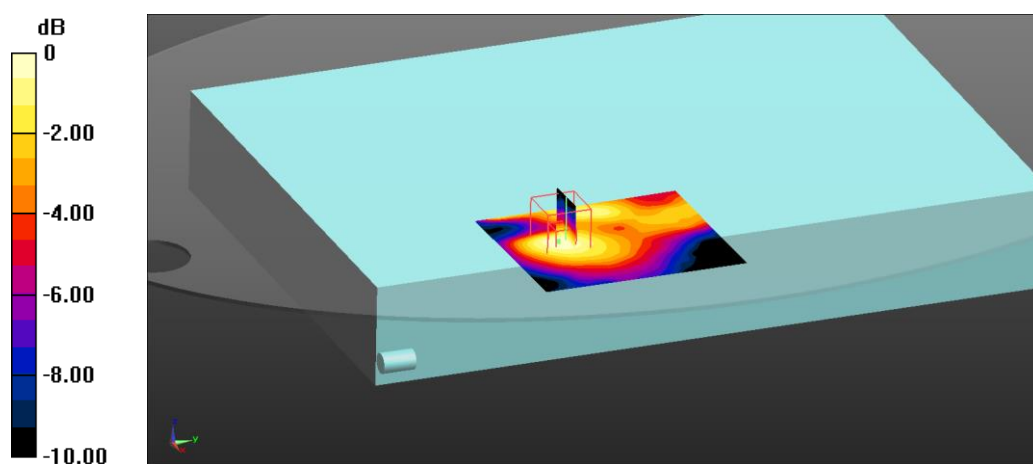

0 dB = 0.0359 W/kg = -14.45 dBW/kg

2. DTS - 802.11b, CH6, Aux Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 11:37:30 AM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 50.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

DTS_802.11b_CH6-2437MHz_TP_3-1_Aux/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0239 W/kg


DTS_802.11b_CH6-2437MHz_TP_3-1_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.006 V/m; Power Drift = 0.36 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00758 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0217 W/kg

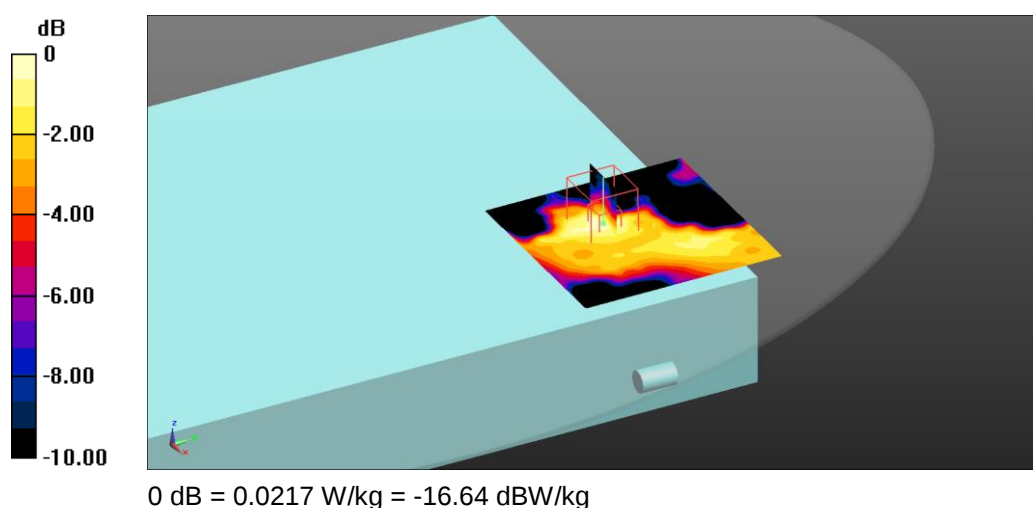

3. U-NII-2A - 802.11n40, CH54, Main Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-02 3:03:44 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5270

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.484$ S/m; $\epsilon_r = 44.723$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.43, 4.43, 4.43); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222);

UNII-2A_802.11n40_CH54-5270MHz_TP_3-1_Main/Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.886 W/kg


UNII-2A_802.11n40_CH54-5270MHz_TP_3-1_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.975 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.204 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.852 W/kg

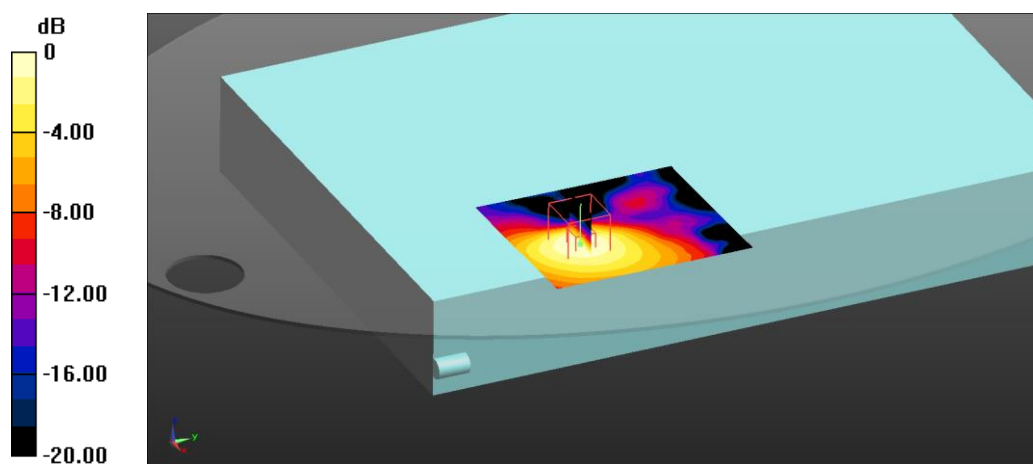

0 dB = 0.852 W/kg = -0.70 dBW/kg

4. U-NII-2A - 802.11a, CH52, Aux Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-02 3:37:24 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5260

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.47$ S/m; $\epsilon_r = 44.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.43, 4.43, 4.43); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222);

UNII-2A_802.11a_CH52-5260MHz_TP_3-1_Aux/Area Scan (61x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.108 W/kg


UNII-2A_802.11a_CH52-5260MHz_TP_3-1_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.087 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.023 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.110 W/kg

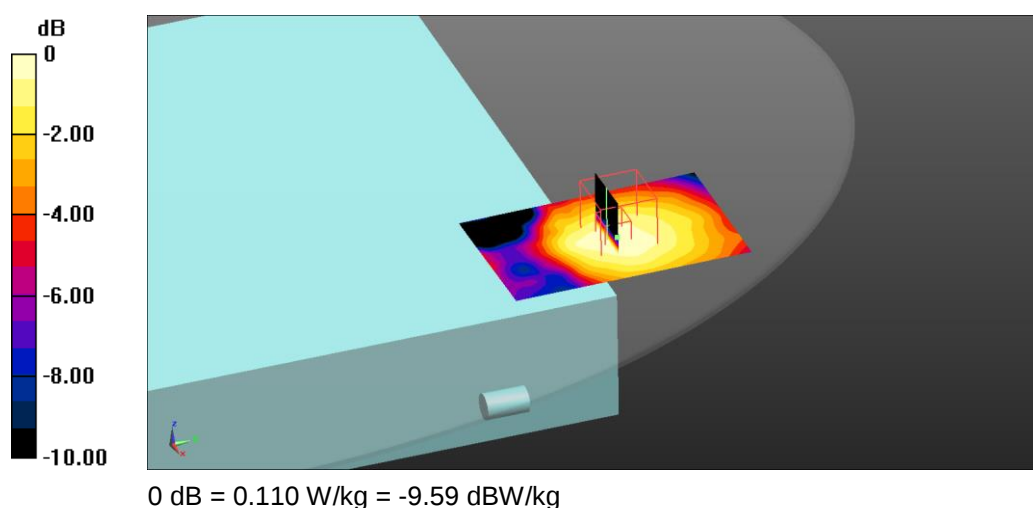

5. U-NII-2C - 802.11n40, CH126, Main Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-07 12:54:21 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5630

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5630$ MHz; $\sigma = 6.038$ S/m; $\epsilon_r = 44.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(3.91, 3.91, 3.91); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-2C_802.11n40_CH126-5630MHz_TP_3-1_Main/Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.538 W/kg


UNII-2C_802.11n40_CH126-5630MHz_TP_3-1_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.152 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.544 W/kg

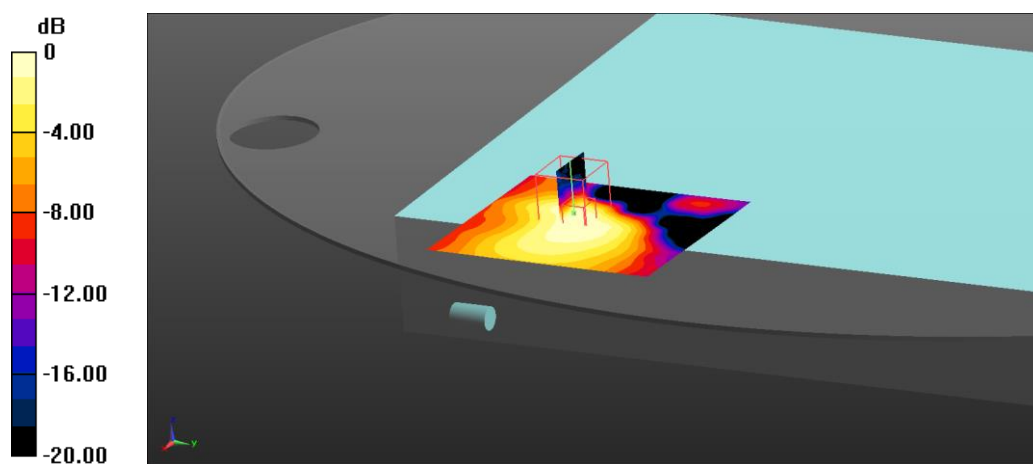

0 dB = 0.544 W/kg = -2.64 dBW/kg

6. U-NII-2C - 802.11n40, CH126, Aux Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-07 1:31:09 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5630

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5630$ MHz; $\sigma = 6.038$ S/m; $\epsilon_r = 44.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(3.91, 3.91, 3.91); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-2C_802.11n40_CH126-5630MHz_TP_3-1_Aux/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.252 W/kg


UNII-2C_802.11n40_CH126-5630MHz_TP_3-1_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.554 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.046 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.226 W/kg

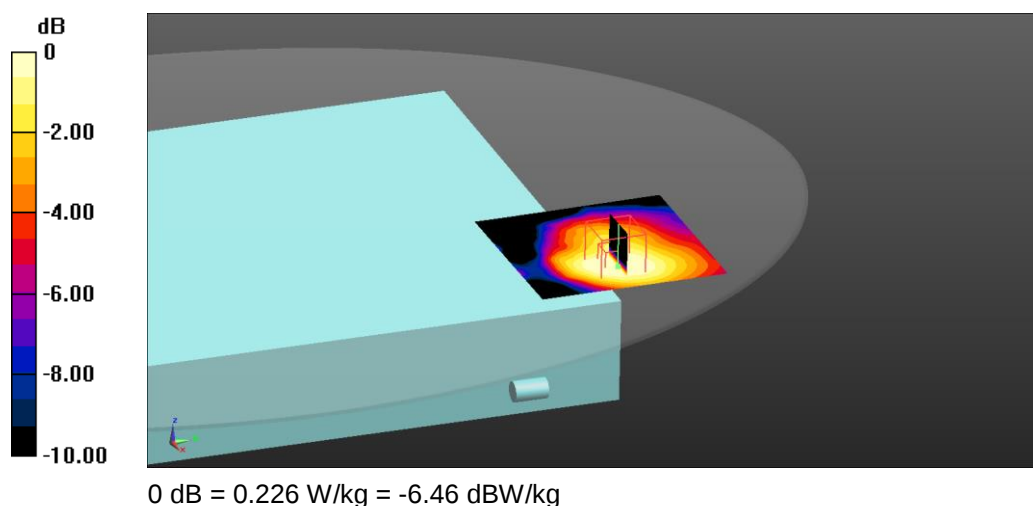

7. U-NII-3 - 802.11n40, CH151, Main Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-08 10:47:53 AM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5755

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.223$ S/m; $\epsilon_r = 44.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.03, 4.03, 4.03); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-3_802.11n40_CH151-5755MHz_TP_3-1_Main/Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.434 W/kg


UNII-3_802.11n40_CH151-5755MHz_TP_3-1_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.109 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.088 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.400 W/kg

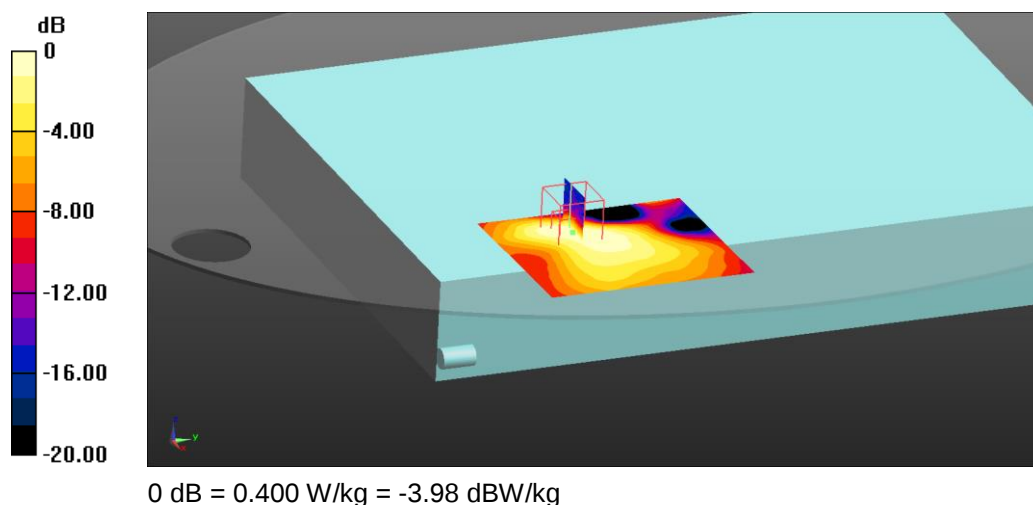

8. U-NII-3 - 802.11n40, CH151, Aux Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-08 11:26:55 AM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5755 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.223$ S/m; $\epsilon_r = 44.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.03, 4.03, 4.03); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-3_802.11n40_CH151-5755MHz_TP_3-1_Aux/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.214 W/kg


UNII-3_802.11n40_CH151-5755MHz_TP_3-1_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.764 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.042 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.207 W/kg

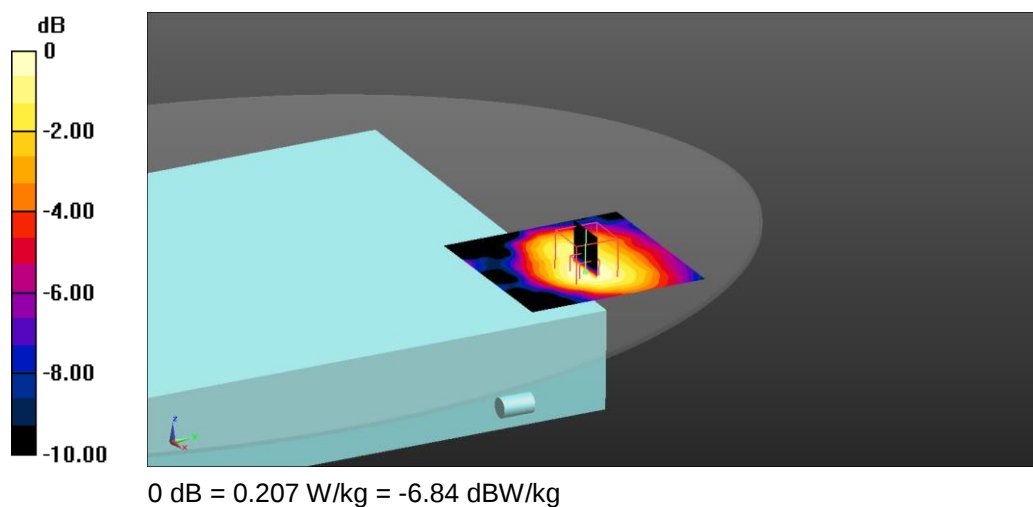

9. BT - 802.15, CH78, Aux Antenna – Position 3-1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 1:02:14 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:BD

Communication System: UID 0, 802.15 (0); Communication System Band: 2.4GHZ; Frequency: 2480

MHz; Communication System PAR: 1.133 dB

Medium parameters used: $f = 2480$ MHz; $\sigma = 2.16$ S/m; $\epsilon_r = 50.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

BT_802.15_CH78-2480MHz_TP_3-1_Aux/Spot check (51x51x1): Interpolated grid: $dx=5.000$ mm, $dy=5.000$ mm

Maximum value of SAR (interpolated) = 0 W/kg

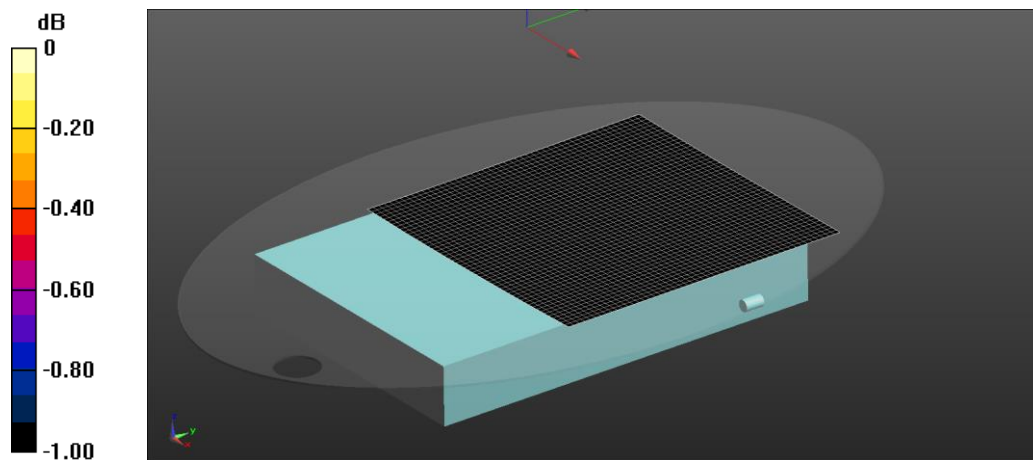

0 dB = 0 W/kg = -999.00 dBW/kg

10.DTS - 802.11b, CH6, Main Antenna – Position 1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 1:21:11 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 50.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

DTS_802.11b_CH6-2437MHz_TP_1_Main/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.00 W/kg


DTS_802.11b_CH6-2437MHz_TP_1_Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.66 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 6.70 W/kg

SAR(1 g) = 2.96 W/kg; SAR(10 g) = 1.44 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.32 W/kg

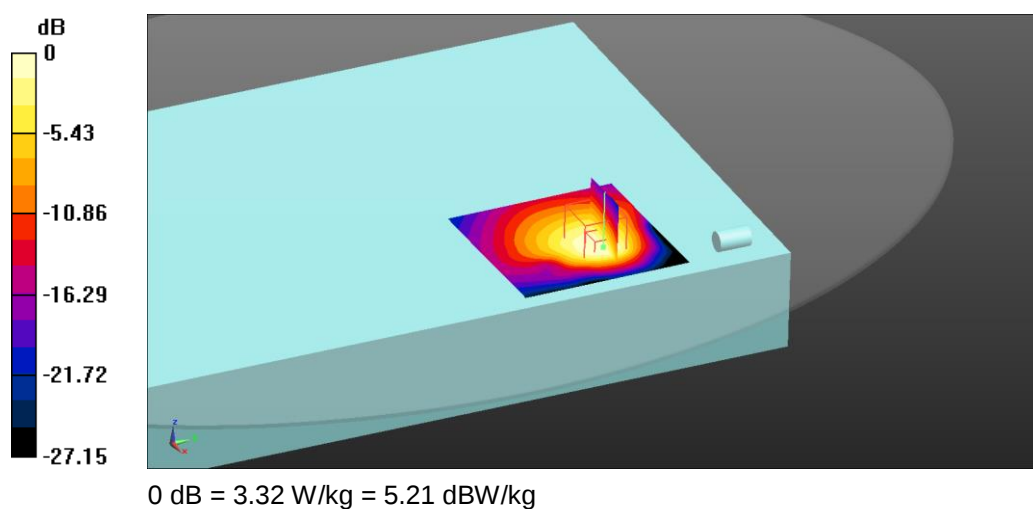

11.DTS - 802.11b, CH6, Aux Antenna – Position 2

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 1:48:10 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 2.4GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 50.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

DTS_802.11b_CH6-2437MHz_TP_2_Aux/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 3.74 W/kg


DTS_802.11b_CH6-2437MHz_TP_2_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.78 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 6.56 W/kg

SAR(1 g) = 3.02 W/kg; SAR(10 g) = 1.35 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.43 W/kg

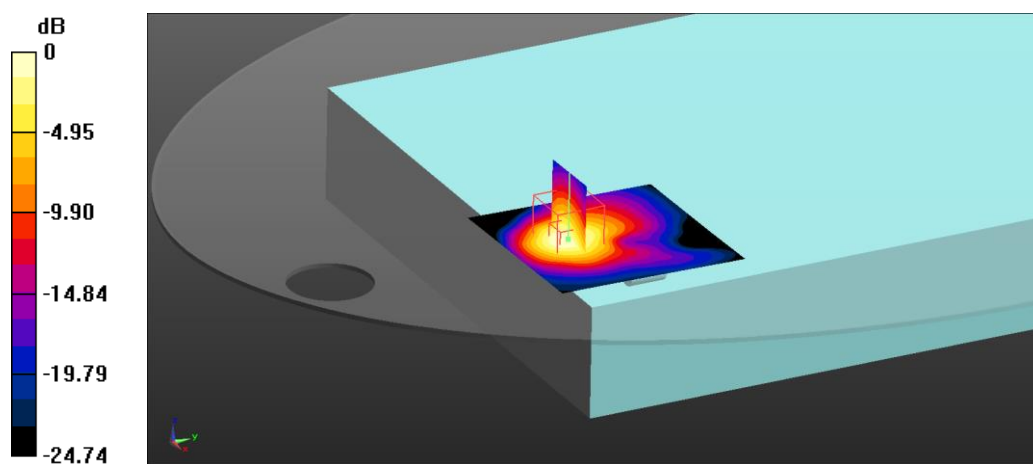

0 dB = 3.43 W/kg = 5.35 dBW/kg

12. U-NII-2A - 802.11n40, CH54, Main Antenna – Position 1

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-02 4:45:08 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5270 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5270$ MHz; $\sigma = 5.484$ S/m; $\epsilon_r = 44.723$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.43, 4.43, 4.43); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222);

UNII-2A_802.11n40_CH54-5270MHz_TP_1_Main/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.7 W/kg


UNII-2A_802.11n40_CH54-5270MHz_TP_1_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 18.18 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 37.1 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 16.6 W/kg

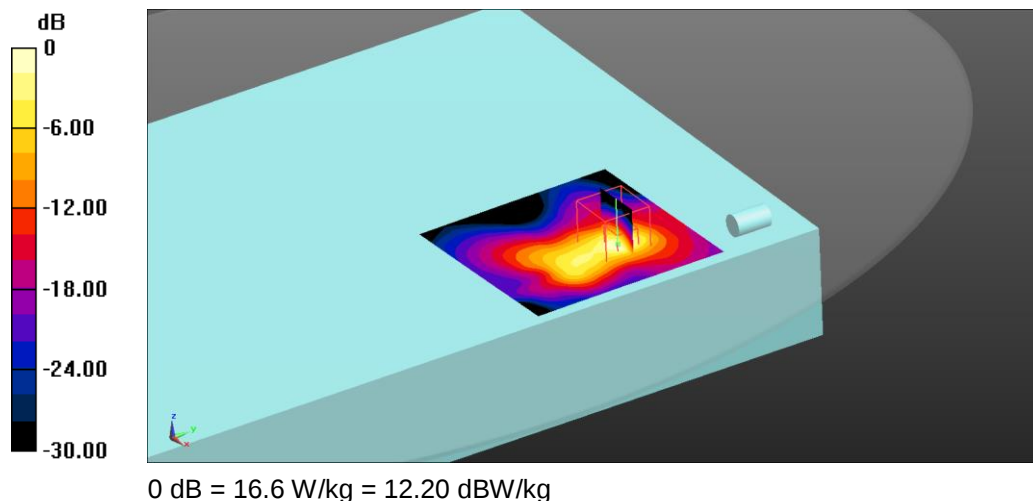

13. U-NII-2A - 802.11a, CH52, Aux Antenna – Position 2-3

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-02 1:14:43 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5260

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.47$ S/m; $\epsilon_r = 44.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.43, 4.43, 4.43); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222);

UNII-2A_802.11a_CH52-5260MHz_TP_2-3_Aux/Area Scan (111x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.3 W/kg


UNII-2A_802.11a_CH52-5260MHz_TP_2-3_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 13.18 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 23.6 W/kg

SAR(1 g) = 5.74 W/kg; SAR(10 g) = 1.77 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 11.8 W/kg

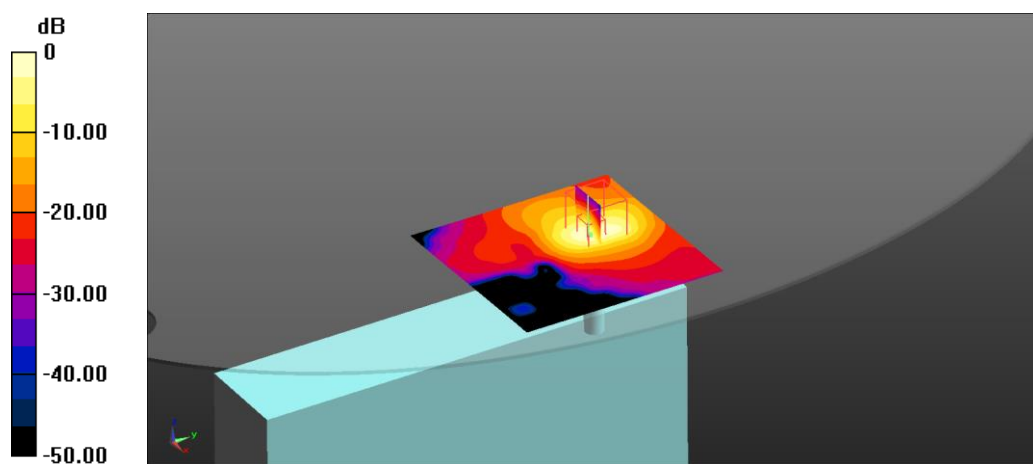

0 dB = 11.8 W/kg = 10.72 dBW/kg

14. U-NII-2C - 802.11n40, CH126, Main Antenna – Position 1-2

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-07 4:13:37 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5630

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5630$ MHz; $\sigma = 6.038$ S/m; $\epsilon_r = 44.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(3.91, 3.91, 3.91); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222);

UNII-2C_802.11n40_CH126-5630MHz_TP_1-2_Main/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 18.5 W/kg


UNII-2C_802.11n40_CH126-5630MHz_TP_1-2_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.24 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 47.9 W/kg

SAR(1 g) = 9.26 W/kg; SAR(10 g) = 2.33 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 19.0 W/kg

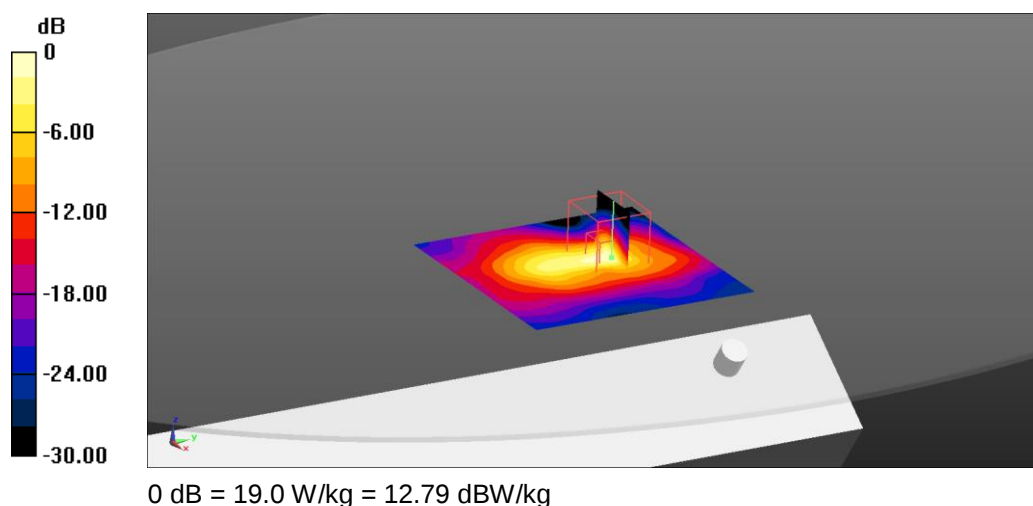

15. U-NII-2C - 802.11n40, CH126, Aux Antenna – Position 2-3

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-07 2:51:25 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5630

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5630$ MHz; $\sigma = 6.038$ S/m; $\epsilon_r = 44.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(3.91, 3.91, 3.91); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-2C_802.11n40_CH126-5630MHz_TP_2-3_Aux/Area Scan (111x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.3 W/kg


UNII-2C_802.11n40_CH126-5630MHz_TP_2-3_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 19.36 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 38.5 W/kg

SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.34 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 18.0 W/kg

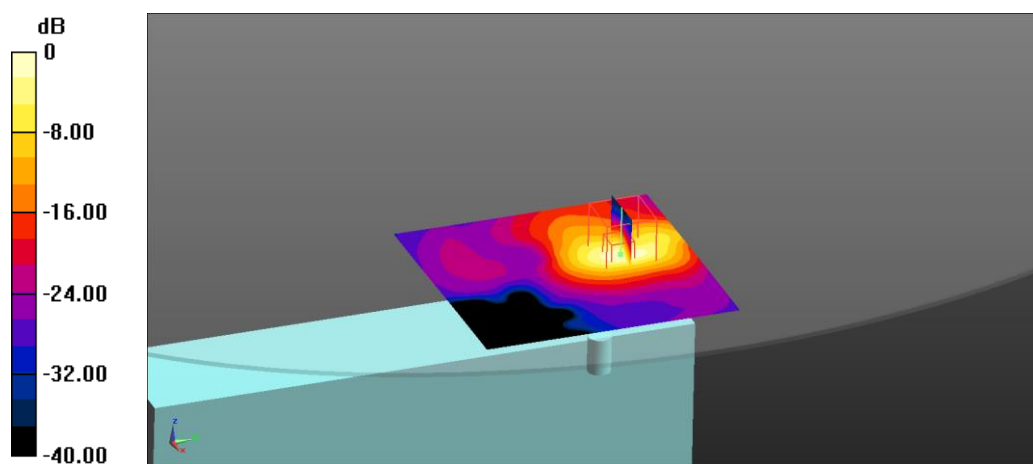

0 dB = 18.0 W/kg = 12.55 dBW/kg

16.U-NII-3 - 802.11n40, CH151, Main Antenna – Position 1-2

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-08 4:03:38 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5755

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.223$ S/m; $\epsilon_r = 44.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.03, 4.03, 4.03); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-3_802.11n40_CH151-5755MHz_TP_1-2_Main/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.2 W/kg


UNII-3_802.11n40_CH151-5755MHz_TP_1-2_Main/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.43 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 42.7 W/kg

SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 17.4 W/kg

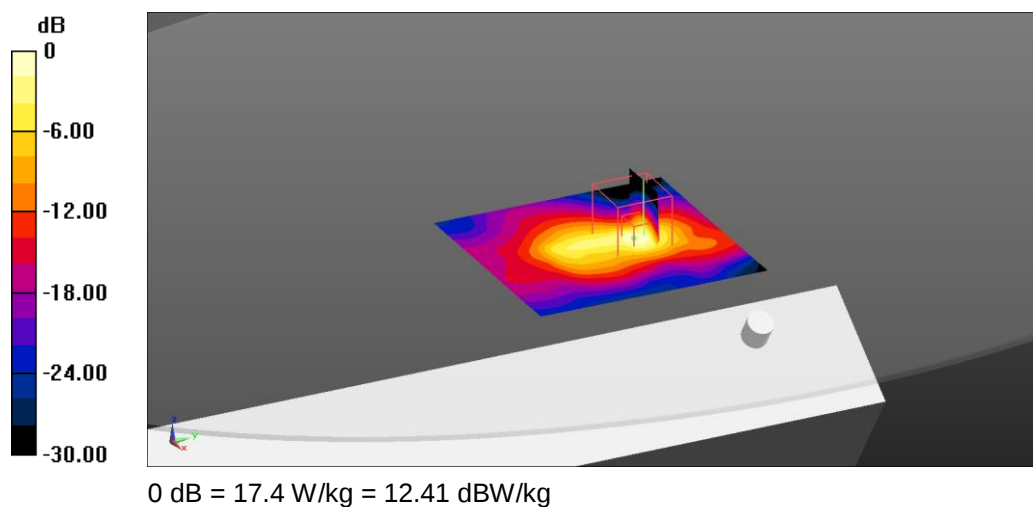

17.U-III-3 - 802.11n40, CH151 Aux Antenna – Position 2-3

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-08 2:39:01 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:B9

Communication System: UID 0, 802.11 (0); Communication System Band: 5GHz; Frequency: 5755

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.223$ S/m; $\epsilon_r = 44.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.03, 4.03, 4.03); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -9.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

UNII-3_802.11n40_CH151-5755MHz_TP_2-3_Aux/Area Scan (111x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.9 W/kg


UNII-3_802.11n40_CH151-5755MHz_TP_2-3_Aux/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.83 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 6.19 W/kg; SAR(10 g) = 1.69 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 14.8 W/kg

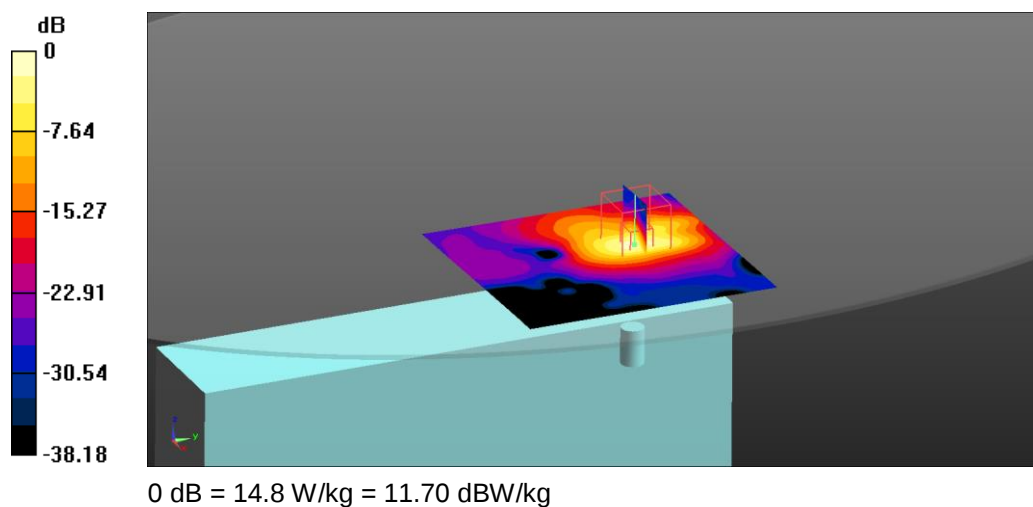

18.BT - 802.15, CH78, Aux Antenna – Position 2

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 2:13:03 PM

DUT: TPC-Q036-BP + 8265NGW; Type: Backpack PC; Serial: 34:13:E8:52:D5:BD

Communication System: UID 0, 802.15 (0); Communication System Band: 2.4GHZ; Frequency: 2480

MHz; Communication System PAR: 1.133 dB

Medium parameters used: $f = 2480$ MHz; $\sigma = 2.16$ S/m; $\epsilon_r = 50.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -52.0, 25.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

BT_802.15_CH78-2480MHz_TP_2_Aux/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.179 W/kg


BT_802.15_CH78-2480MHz_TP_2_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.838 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.058 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.150 W/kg

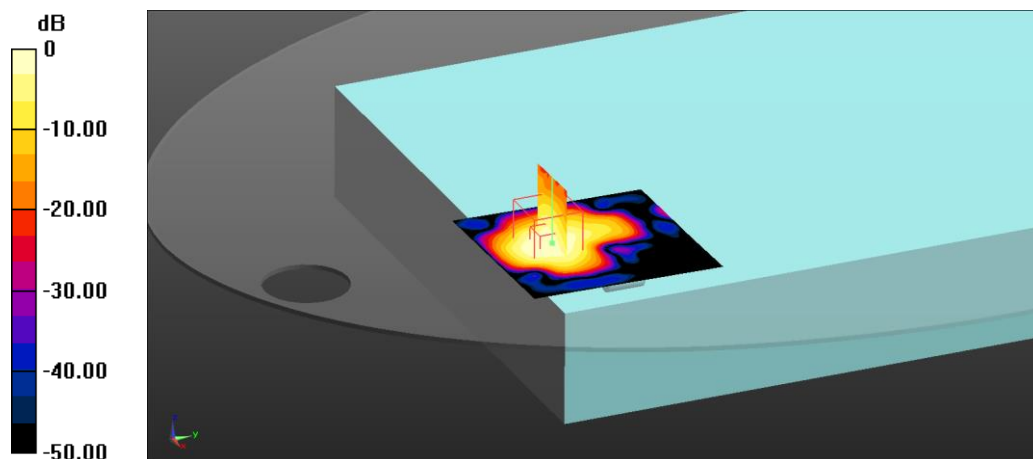

0 dB = 0.150 W/kg = -8.24 dBW/kg

19. System Check Body Liquid 2450MHz

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-09 10:20:14 AM

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:937

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.131$ S/m; $\epsilon_r = 50.347$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(7.53, 7.53, 7.53); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -14.0, 31.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

System check 2450MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.00 W/kg


System check 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.19 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.14 W/kg; SAR(10 g) = 2.37 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.88 W/kg

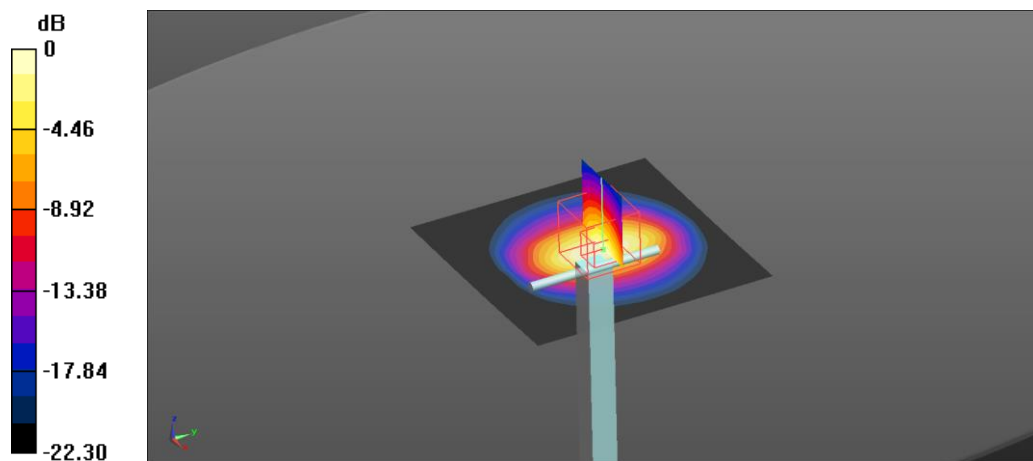

0 dB = 5.88 W/kg = 7.69 dBW/kg

20. System Check Body Liquid 5300MHz

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-02 6:59:11 PM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1259

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 44.685$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.43, 4.43, 4.43); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

System check 5300MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.4 W/kg


System check 5300MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 55.54 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 6.96 W/kg; SAR(10 g) = 2.03 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 14.3 W/kg

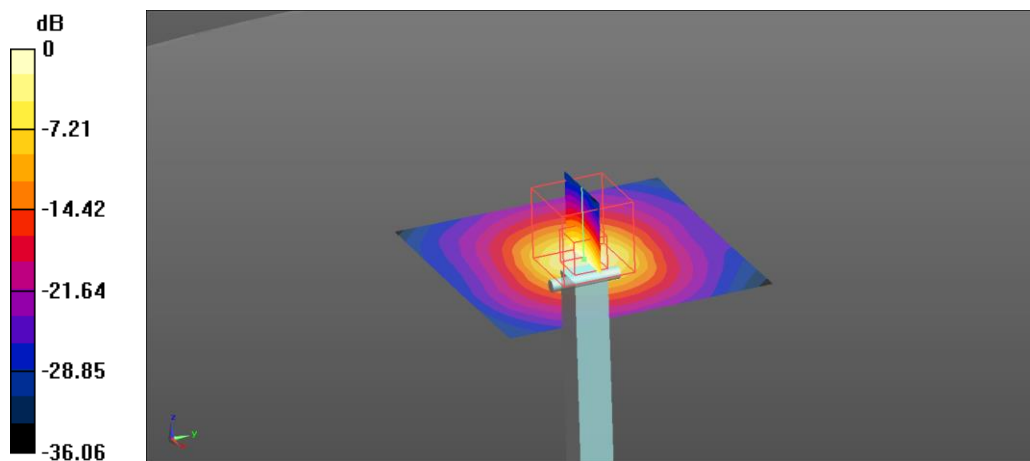

0 dB = 14.3 W/kg = 11.55 dBW/kg

21. System Check Body Liquid 5600MHz

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-07 6:21:44 PM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1259

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.988$ S/m; $\epsilon_r = 44.529$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(3.91, 3.91, 3.91); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

System check 5600MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.7 W/kg


System check 5600MHz/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 58.44 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.29 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 16.7 W/kg

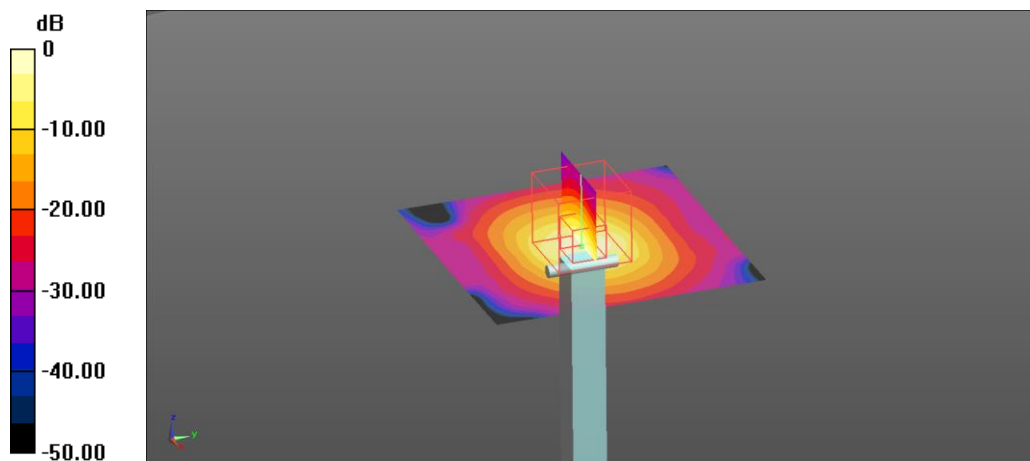

0 dB = 16.7 W/kg = 12.23 dBW/kg

22. System Check Body Liquid 5800MHz

Test Laboratory: Intel WRF Lab; Date/Time: 2017-08-08 10:00:01 AM

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1259

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5800$ MHz; $\sigma = 6.293$ S/m; $\epsilon_r = 44.132$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:

- Probe: EX3DV4 - SN7325; ConvF(4.03, 4.03, 4.03); Calibrated: 2016-12-08;
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1496; Calibrated: 2016-12-06
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222);

System check 5800MHz/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 15.7 W/kg

System check 5800MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 56.48 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 35.3 W/kg
SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.13 W/kg (SAR corrected for target medium)


Maximum value of SAR (measured) = 15.9 W/kg

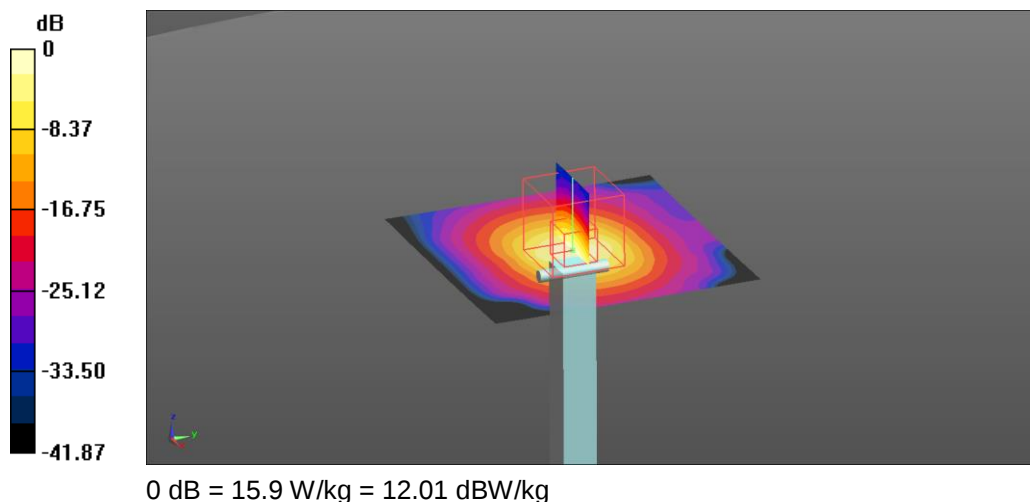

Annex D. TSL Dielectric Parameters

D.1 Body DTS 2450MHz


Freq. (MHz)	Target		2017-08-09	
	Target		Measured	
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)
2400	52.77	1.90	50.44	2.08
2410	52.75	1.91	50.42	2.09
2420	52.74	1.92	50.40	2.10
2430	52.73	1.93	50.38	2.11
2440	52.71	1.94	50.37	2.12
2450	52.70	1.95	50.35	2.13
2460	52.69	1.96	50.33	2.14
2470	52.67	1.98	50.31	2.15
2480	52.66	1.99	50.29	2.16
2490	52.65	2.01	50.27	2.17
2500	52.64	2.02	50.25	2.18

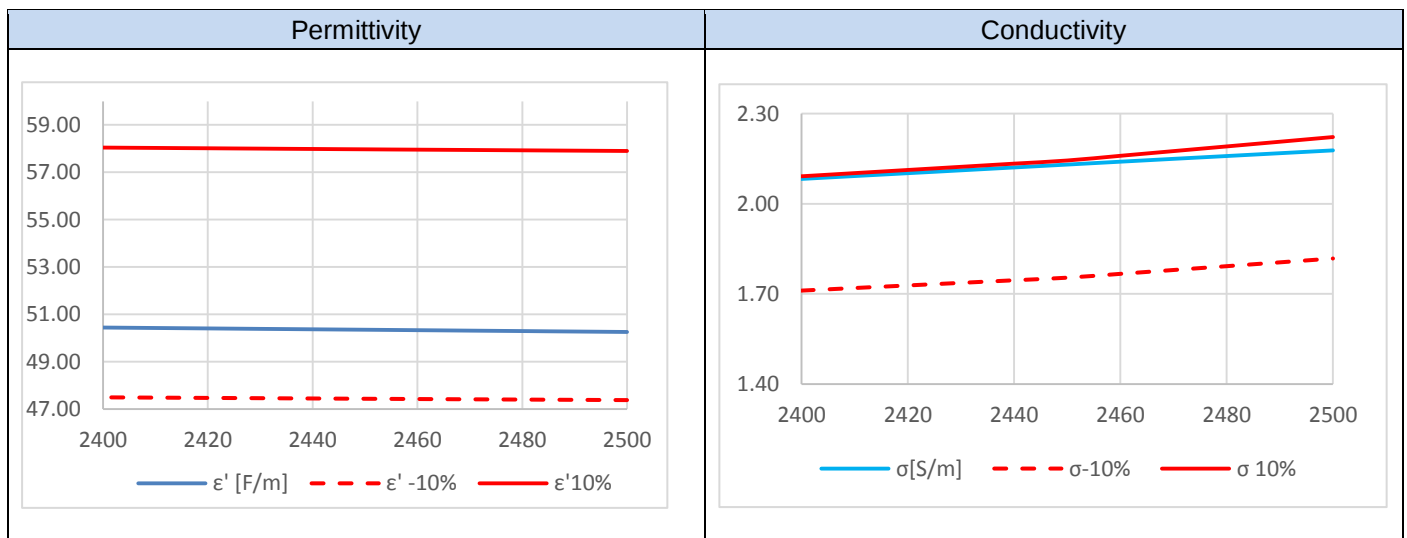


D.2 Body 5200MHz-5800MHz

Freq. (MHz)			2017-08-02		2017-08-07	
	Target		Measured		Measured	
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ' (F/m)	ϵ_2 (F/m)	σ_2 (F/m)
5200	49.01	5.30	44.82	5.39	45.24	5.45
5210	49.00	5.31	44.81	5.40	45.22	5.47
5220	48.99	5.32	44.79	5.42	45.20	5.48
5230	48.97	5.33	44.78	5.43	45.19	5.49
5240	48.96	5.34	44.77	5.44	45.17	5.51
5250	48.95	5.36	44.75	5.45	45.15	5.52
5260	48.93	5.37	44.74	5.47	45.14	5.53
5270	48.92	5.38	44.72	5.48	45.12	5.55
5280	48.91	5.39	44.71	5.49	45.10	5.56
5290	48.89	5.40	44.70	5.51	45.08	5.57
5300	48.88	5.41	44.69	5.52	45.06	5.59
5310	48.87	5.43	44.67	5.53	45.05	5.60
5320	48.85	5.44	44.66	5.55	45.03	5.61
5330	48.84	5.45	44.64	5.56	45.02	5.63
5340	48.82	5.46	44.63	5.58	45.00	5.64
5350	48.81	5.47	44.62	5.59	44.98	5.65
5360	48.80	5.48	44.60	5.60	44.96	5.67
5370	48.78	5.50	44.59	5.61	44.94	5.68
5380	48.77	5.51	44.57	5.63	44.92	5.69
5390	48.76	5.52	44.55	5.64	44.90	5.71
5400	48.74	5.53	44.53	5.65	44.88	5.72
5500	48.61	5.65	44.37	5.78	44.70	5.85
5510	48.59	5.66	44.35	5.79	44.68	5.87
5520	48.58	5.67	44.34	5.81	44.66	5.88
5530	48.57	5.68	44.32	5.82	44.64	5.89
5540	48.55	5.69	44.31	5.83	44.62	5.90
5550	48.54	5.71	44.30	5.85	44.61	5.92
5560	48.53	5.72	44.28	5.86	44.59	5.93
5570	48.51	5.73	44.26	5.87	44.58	5.95
5580	48.50	5.74	44.25	5.89	44.56	5.96
5590	48.49	5.75	44.23	5.91	44.55	5.97
5600	48.47	5.76	44.20	5.92	44.53	5.99
5610	48.46	5.78	44.18	5.94	44.51	6.00
5620	48.44	5.79	44.16	5.95	44.49	6.02
5630	48.43	5.80	44.14	5.96	44.47	6.04
5640	48.42	5.81	44.12	5.98	44.45	6.05
5650	48.40	5.82	44.10	5.99	44.43	6.06
5660	48.39	5.83	44.08	6.01	44.41	6.08
5670	48.38	5.85	44.06	6.02	44.39	6.09
5680	48.36	5.86	44.04	6.04	44.37	6.11
5690	48.35	5.87	44.02	6.05	44.35	6.12
5700	48.34	5.88	44.00	6.07	44.33	6.14
5710	48.32	5.88	43.99	6.08	44.31	6.16
5720	48.31	5.89	43.97	6.10	44.29	6.17
5730	48.30	5.91	43.95	6.12	44.27	6.18
5740	48.28	5.92	43.93	6.13	44.25	6.20
5750	48.27	5.93	43.91	6.15	44.23	6.21
5760	48.25	5.94	43.90	6.16	44.21	6.23
5770	48.24	5.95	43.88	6.18	44.19	6.24
5780	48.23	5.96	43.86	6.20	44.17	6.26
5790	48.21	5.98	43.84	6.21	44.15	6.27
5800	48.20	5.99	43.82	6.23	44.13	6.29
5810	48.19	6.00	43.80	6.24	44.12	6.31
5820	48.17	6.01	43.78	6.26	44.10	6.32
5830	48.16	6.02	43.75	6.27	44.08	6.34
5840	48.15	6.03	43.73	6.29	44.06	6.35
5850	48.13	6.05	43.71	6.30	44.05	6.37
5860	48.12	6.06	43.69	6.31	44.03	6.38
5870	48.10	6.07	43.67	6.33	44.01	6.40
5880	48.09	6.08	43.65	6.34	43.99	6.41
5890	48.08	6.09	43.63	6.36	43.98	6.43
5900	48.06	6.10	43.61	6.38	43.96	6.45

Permittivity

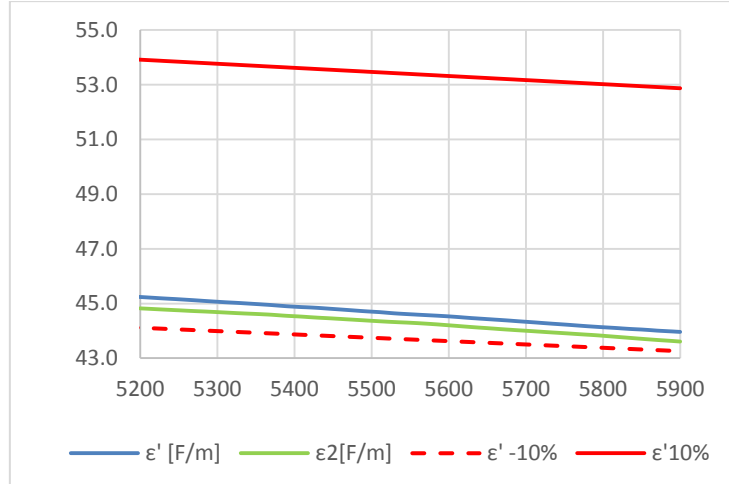

Conductivity

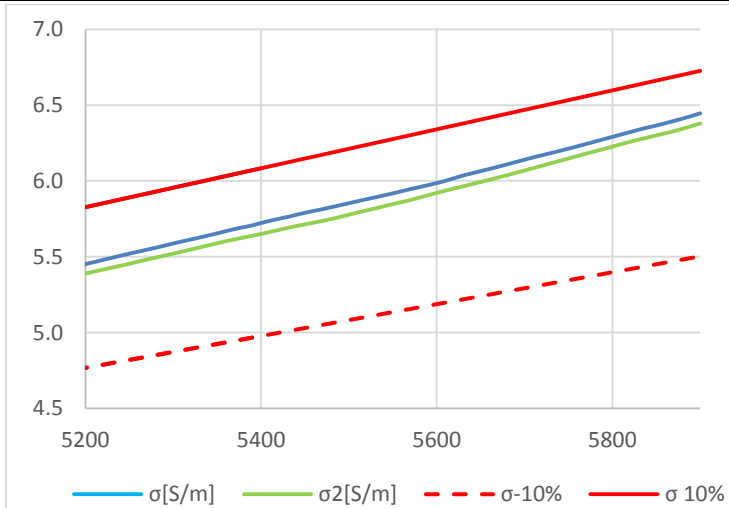

Annex E. Calibration Certificates

ID	Device	Type/Model	Serial Number	Manufacturer	Calibration Certificate
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	
0591	5GHz System Validation Dipole	D5GHzv2	1259	SPEAG	

Dipole calibration

According to the KDB 865664 D01, a dipole must be calibrated using a fully validated SAR system according to the tissue dielectric parameters and SAR probe calibration frequency required for device testing. However, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements.

1. When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times$ 0.2) or not meeting the required 20 dB minimum return-loss requirement.
2. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement

The below results show the latest return loss and impedance measurements for each dipole performed by the lab:

Dipole 2450MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-26.30	51.1 + 4.8 j	2016-06-22
Dipole 5200MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-32.5	49.7 – 2.4 j	2017-04-18
Dipole 5300MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-28.4	46.4 + 0.5 j	2017-04-18
Dipole 5500MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-27.6	46.2 + 1.1 j	2017-04-18
Dipole 5600MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-25.6	49.0 – 5.1 j	2017-04-18
Dipole 5800MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-24.1	48.2 – 5.9 j	2017-04-18