

FCC SAR TEST REPORT

Test File No : F690501/RF-SAR002670

Equipment Under Test	Module
Model Name	9560D2W
Host Device	NOTEBOOK PC
Host Device Name	NP930QBE
Applicant	Intel Mobile Communications
Address of Applicant	Intel Mobile Communications 100 Center Point Circle Suite 200 Columbia, SC 29210 USA
FCC ID	PD99560D2
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013 ANSI/IEEE C95.1, C95.3
Date of Receipt	2018-08-30
Date of Test(s)	2018-09-19 ~ 2018-10-09
Date of Issue	2018-10-11
Test Result	Refer to the Page 05

In the configuration tested, the EUT complied with the standards specified above.

This test report does not assure KOLAS accreditation.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Korea Co., Ltd. or testing done by SGS Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Korea Co., Ltd. in writing.



Report prepared by /
Minsoo Kim
Test Engineer



Approved by /
Jongwon Ma
Technical Manager

Report File No : F690501/RF-SAR002670

Date of Issue : 2018-10-11

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Revision history

Revision	Date of issue	Revisions	Revised By
-	October 11 , 2018	Initial issue	-

Contents

1	Testing Laboratory	5
2	Details of Manufacturer	5
3	Description of EUT(s)	5
4	The Highest Reported SAR Values	5
5	Test Methodology	6
6	Test Environment	6
7	Specific Absorption Rate (SAR)	7
7.1	Introduction	7
7.2	SAR Definition	7
7.3	Test Standards and Limits	7
8	The SAR Measurement System	9
9	System Components	10
9.1	Probe	10
9.2	ELI Phantom	10
9.3	Device Holder	11
10	SAR Measurement Procedures	12
10.1	Normal SAR Measurement Procedure	12
11	SAR System Verification	14
12	Tissue Simulant Fluid for the Frequency Band	16
13	Instruments List	19
14	FCC Power Measurement Procedures	20
15	Measured and Reported SAR	20
16	Maximum Output Power Specifications	20
16.1	WLAN Maximum Output Power Specifications(SISO)	20
16.1.1	WLAN 2.4 GHz Notebook & Tablet Mode	20
16.1.2	WLAN 5 GHz Notebook Mode	21
16.1.3	WLAN 5 GHz Tablet Mode	22
16.2	WLAN Maximum Output Power Specifications(MIMO)	23
16.2.1	WLAN 2.4 GHz Notebook & Tablet Mode	23
16.2.2	WLAN 5 GHz Notebook Mode	23
16.2.3	WLAN 5 GHz Tablet Mode	24
16.3	Bluetooth Maximum Output Power Specifications	24
17	WLAN	25
17.1	General Device Setup	25
17.2	U-NII-1 and U-NII-2A	25
17.3	U-NII-2C and U-NII-3	25
17.4	2.4 GHz SAR Test Requirements	25
17.5	OFDM Transmission Mode and SAR Test Channel Selection	26
17.6	Initial Test Configuration Procedure	26
17.7	Subsequent Test Configuration Procedures	26
18	RF Conducted Power Measurement	27
18.1	SISO Conducted Power	27
18.2	MIMO Conducted Power	31
19	Transmit Antenna Separation Distances	35
20	SAR Test Exclusions Applied	36
20.1	Tablet PC Device Type	36
21	Bluetooth Duty Cycle used for SAR Testing	37

Report File No : F690501/RF-SAR002670

Date of Issue : 2018-10-11

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

22	SAR Data Summary	38
22.1	Notebook Device Type	38
22.2	Tablet PC Device Type	41
23	SAR Measurement Variability	46
23.1	Measurement Variability	46
23.2	Measurement Uncertainty	46
24	Simultaneous Multi-band Transmission Evaluation	47
24.1	Introduction	47
24.2	Simultaneous Transmission possibilities are listed as below	47
24.3	Notebook Body SAR Simultaneous Transmission Analysis	47
24.4	Tablet PC Body SAR Simultaneous Transmission Analysis	48
	Appendixes List	49
	Appendixes A.1	50
	Appendixes A.2	52
	Appendixes A.3	54
	Appendixes A.4	56
	Appendixes A.5	58
	Appendixes A.6	59
	Appendixes A.7	60
	Appendixes A.8	61
	Appendixes A.9	62
	Appendixes A.10	63
	Appendixes A.11	64
	Appendixes A.12	65
	Appendixes A.13	66
	Appendixes A.14	67
	Appendixes A.15	68
	Appendixes A.16	69
	Appendixes A.17	70
	Appendixes A.18	71
	Appendixes A.19	72
	Appendixes A.20	73
	Appendixes A.21	74
	Appendixes A.22	75
	Appendixes A.23	76
	Appendixes A.24	77
	Appendixes A.25	78
	Appendixes A.26	79
	Appendixes A.27	80
	Appendixes A.28	81
	Appendixes A.29	82
	Appendixes A.30	83
	THE END	83

1 Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo 3 Laboratory)
Address	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Telephone	+82 +31 - 428 - 5700
FAX	+82 +31 - 427 - 2371

2 Details of Manufacturer

Applicant	Intel Mobile Communications
Address	Intel Mobile Communications 100 Center Point Circle Suite 200 Columbia, SC 29210 USA
Email	steven.c.hackett@intel.com
Phone No.	803-216-2344

3 Description of EUT(s)

EUT Type	Module		
Model Name	9560D2W		
Host Device	NOTEBOOK PC		
Host Device Name	NP930QBE		
Mode of Operation	WLAN, Bluetooth		
Crest Factor	1 (WLAN), 1.310(Bluetooth)		
Body worn Accessory	None		
Tx Frequency Range	2412 MHz ~ 2462 MHz (WLAN_802.11b/g/n/ac) 5180 MHz ~ 5240 MHz, 5260 MHz ~ 5320 MHz (WLAN_802.11a/n/ac) 5500 MHz ~ 5720 MHz, 5745 MHz ~ 5825 MHz (WLAN_802.11a/n/ac) 2402 MHz ~ 2480 MHz (Bluetooth)		
Antenna Information	Port	Main	Aux
	Manufacturer	Galtronics	Galtronics
	Type	PIFA	PIFA
	Main Antenna Gain (dBi)		Aux Antenna Gain (dBi)
	2.400 GHz ~ 2.500 GHz	-0.13	2.400 GHz ~ 2.500 GHz 0.84
	5.150 GHz ~ 5.350 GHz	3.34	5.150 GHz ~ 5.350 GHz 0.92
	5.470 GHz ~ 5.725 GHz	1.17	5.470 GHz ~ 5.725 GHz 0.92
	5.785 GHz ~ 5.850 GHz	-0.77	5.785 GHz ~ 5.850 GHz -1.76
Additional Information	5.600 GHz ~ 5.650 GHz band (TDWR) is supported by the device		

4 The Highest Reported SAR Values

Equipment Class	Band	Highest Reported SAR 1g (W/kg)
DTS	2.4 GHz WLAN	0.81
UNII	5.8 GHz WLAN	1.14
NII	5.3 GHz WLAN	1.02
	5.6 GHz WLAN	1.08
DSS	Bluetooth	0.18
Simultaneous SAR per KDB 690783 D01v01r03		1.27

5 Test Methodology

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☒	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☒	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Reduction Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v02	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☐	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6 Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: < ± 2°C
Ambient noise & Reflection	: < 0.012 W/kg

7 Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.3-2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting

source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 m W/g	8.00 m W/g
Partial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

1. The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY6 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 6 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

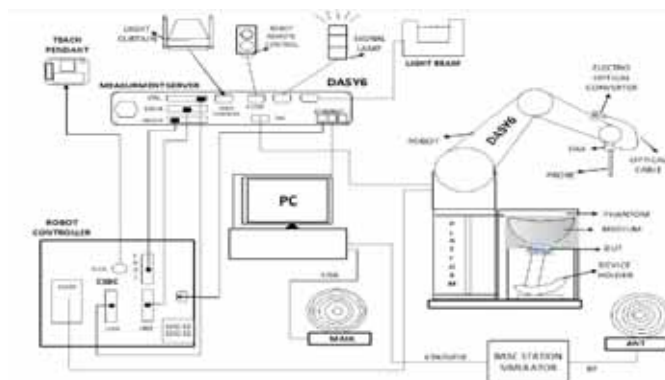


Fig 1. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 8.1 Pro.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The ELI phantom enabling testing flat usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9 System Components

9.1 Probe

Construction	: Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	: Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835 and HSL1900. Additional CF-Calibration for other liquids and frequencies upon request.
Frequency	: 10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	: $10\mu\text{W/g}$ to > 100 m W/g; Linearity: ± 0.2 dB(noise: typically $< 1\mu\text{W/g}$)
Dimensions	: Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Distance from probe tip to dipole centers: 1 mm
Application	: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%



EX3DV4 E-Field Probe

NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference “APPENDIX C” for the Calibration Certification Report.

9.2 ELI Phantom

Construction	: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
---------------------	---

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure



ELI Phantom

Shell Thickness	: $2.0\text{ mm} \pm 0.2\text{ mm}$
Dimensions	: Major axis: 600 mm Minor axis: 400 mm

9.3 Device Holder

Construction: : Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (a.q.. laptops, Cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioned.



Device Holder

10 SAR Measurement Procedures

10.1 Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 and 3: Area Scan & Zoom Scan Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 1. The daily system accuracy verification occurs within the flat section of the ELI phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 2450 MHz, 5300 MHz, 5600 MHz and 5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2)^\circ\text{C}$, the relative humidity was in the range $(55 \pm 5)\%$ R.H and the liquid depth above the ear reference points was $\geq 15\text{ cm} \pm 5\text{ mm}$ (frequency $\leq 3\text{ GHz}$) or $\geq 10\text{ cm} \pm 5\text{ mm}$ (frequency $> 3\text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

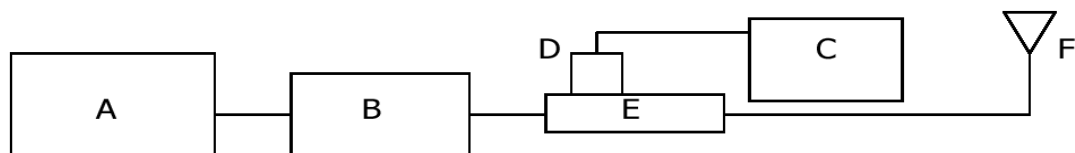


Fig. 1. The microwave circuit arrangement used for SAR system verification

- A. R&S Model SMBV100A Vector Signal Generator
- B. MECA Model AMP2027 Amplifier
- C. Agilent Model N1914A Power Meter
- D. Agilent Model N8481A Power Sensor
- E. KEYSIGHT Model 772D Dual Directional Coupler
- F. Reference dipole Antenna



Photo of the dipole Antenna

Verification Kit	Probe S/N	Tissue	Target SAR 1 g from Calibration Certificate (1 W)	Measured SAR 1 g (0.1 W)	Normalized SAR 1 g (1 W)	Deviation (%)	Date	Liquid Temp. (°C)
D2450V2 SN:734	7412	2450 Body	49.40	4.84	48.40	-2.02	2018-09-19	21.5
D2450V2 SN:734	7412	2450 Body	49.40	5.17	51.70	4.66	2018-10-04	21.3
D5 GHz V2 SN:1130	7412	5300 Body	76.00	7.58	75.80	-0.26	2018-09-21	21.4
D5 GHz V2 SN:1130	7412	5300 Body	76.00	7.61	76.10	0.13	2018-10-05	21.4
D5 GHz V2 SN:1130	7412	5600 Body	80.10	8.21	82.10	2.50	2018-09-20	21.6
D5 GHz V2 SN:1130	7412	5600 Body	80.10	8.12	81.20	1.37	2018-10-08	21.5
D5 GHz V2 SN:1130	7412	5800 Body	75.70	7.72	77.20	1.98	2018-09-21	21.4
D5 GHz V2 SN:1130	7412	5800 Body	75.70	7.41	74.10	-2.11	2018-10-09	21.4

Table1. Results system verification

12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAKS-3.5 Dielectric Probe in conjunction with SPEAG Vector Network Analyzer (85 MHz- 14 GHz) by using a procedure detailed in Section V.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp()
2450	Body	Measured, 2018-09-19	52.50	1.95	21.5
		Target Tissue Body	52.70	1.95	
		Deviation (%)	-0.38	0.00	
2412		Measured, 2018-09-19	52.56	1.90	
		Deviation (%)	-0.27	-2.56	
2480		Measured, 2018-09-19	52.43	1.98	
		Deviation (%)	-0.51	1.54	
2450	Body	Measured, 2018-10-04	53.65	1.94	21.3
		Target Tissue Body	52.70	1.95	
		Deviation (%)	1.80	-0.51	
2437		Measured, 2018-10-04	53.63	1.94	
		Deviation (%)	1.76	-0.51	
5300	Body	Measured, 2018-09-21	49.35	5.28	21.4
		Target Tissue Body	48.90	5.42	
		Deviation (%)	0.92	-2.58	
5290		Measured, 2018-09-21	49.45	5.24	
		Deviation (%)	1.12	-3.32	
5300	Body	Measured, 2018-10-05	48.63	5.46	21.4
		Target Tissue Body	48.90	5.42	
		Deviation (%)	-0.55	0.74	
5290		Measured, 2018-10-05	48.62	5.61	
		Deviation (%)	-0.57	3.51	
5600	Body	Measured, 2018-09-20	47.50	5.79	21.6
		Target Tissue Body	48.50	5.77	
		Deviation (%)	-2.06	0.35	
5530		Measured, 2018-09-20	48.04	5.68	
		Deviation (%)	-0.95	-1.56	
5690		Measured, 2018-09-20	47.86	6.03	
		Deviation (%)	-1.32	4.51	
5600	Body	Measured, 2018-10-08	48.42	5.81	21.5
		Target Tissue Body	48.50	5.77	
		Deviation (%)	-0.16	0.69	
5530		Measured, 2018-10-08	48.22	5.79	
		Deviation (%)	-0.58	0.35	
5690		Measured, 2018-10-08	48.67	6.01	
		Deviation (%)	0.35	4.16	

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp()
5800	Body	Measured, 2018-09-21	48.77	5.93	21.4
		Target Tissue Body	48.20	6.00	
		Deviation (%)	1.18	-1.17	
5775	Body	Measured, 2018-09-21	48.11	5.78	21.4
		Deviation (%)	-0.19	-3.67	
5800	Body	Measured, 2018-10-09	48.41	5.91	21.4
		Target Tissue Body	48.20	6.00	
		Deviation (%)	0.44	-1.50	
5755	Body	Measured, 2018-10-09	48.58	5.94	21.4
		Deviation (%)	0.79	-1.00	

The composition of the brain & muscle tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		900		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.91	46.21	40.29	50.75	40.29	50.75	55.24	70.17	55.00	68.64
Salt (NaCl)	3.79	2.34	1.38	0.94	1.38	0.94	0.31	0.39	-	-
Sugar	56.93	51.17	57.90	-	57.90	-	-	-	-	-
HEC	0.25	0.15	0.24	0.10	0.24	0.10	-	-	-	-
Bactericide	0.12	0.08	0.18	-	0.18	-	-	-	-	-
Triton X-100	-	-	-	-	-	-	-	-	-	-
DGBE	-	-	-	-	-	-	44.45	70.17	45.00	31.37
Dielectric Constant	43.5	56.7	41.5	55.2	41.5	55.0	40.0	53.3	39.2	52.7
Conductivity (S/m)	0.87	0.94	0.90	0.97	0.97	1.05	1.40	1.52	1.80	1.95

Salt: 99 + % Pure Sodium Chloride

Sugar: 98 + % Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99 + % Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral Oil	11
Emulsifiers	9
Additives and Salt	2

13 Instruments List

Test Platform	SPEAG DASY6 Professional				
Location	10-2, LS-ro 182beon-gil, Gunpo-si Gyeonggi-do, 15807 Republic of Korea				
Manufacture	SPEAG				
Description	SAR Test System (Frequency range 300 MHz – 6 GHz)				
Software Reference	DASY52: 52.10.0(1446) SEMCAD X: 14.6.10(7417)				
Hardware Reference					
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Robot	TX60 L	F16/54FUA1/A/01	N/A	N/A	N/A
Phantom	ELI Phantom	TP-1244	N/A	N/A	N/A
Mounting Device	Laptop Extension Kit	N/A	N/A	N/A	N/A
Verification Dipole	D2450V2	734	2018-05-30	Biennial	2020-05-30
Verification Dipole	D5GHzV2	1130	2018-05-25	Biennial	2020-05-25
Calibration of dielectric parameter Probes	DAKS-3.5	1068	2018-05-29	Annual	2019-05-29
DAE	DAE4	1503	2018-07-23	Annual	2019-07-23
E-Field Probe	EX3DV4	7412	2018-04-25	Annual	2019-04-25
Performance Check for Vector Network Analyzer and Vector Reflectometer	DAKS-VNA R140	0160115	2018-02-21	Annual	2019-02-21
Power Meter	N1914A	MY56120017	2018-06-15	Annual	2019-06-15
Power Sensor	N8481A	MY56120026	2018-06-15	Annual	2019-06-15
Power Sensor	N8481A	MY56120030	2018-06-15	Annual	2019-06-15
Vector Signal Generator	SMBV100A	262093	2018-06-14	Annual	2019-06-14
RF Amplifier	AMP2027	10008	2018-06-15	Annual	2019-06-15
Dual Directional Coupler	772D	MY52180259	2018-06-15	Annual	2019-06-15
Lowpass Filter	LA-30N	LF03	2018-06-21	Annual	2019-06-21
Lowpass Filter	LA-60N	LF04	2018-06-21	Annual	2019-06-21
Attenuator	05AS102-K20	A3	2017-12-08	Annual	2018-12-08
Attenuator	05AS102-K20	A4	2017-12-08	Annual	2018-12-08
Attenuator	05AS102-K03	A2	2017-12-08	Annual	2018-12-08
Hygro-Thermometer	TE-201	TE-201-3	2018-06-18	Annual	2019-06-19
Digital Thermometer	SDT25	170415000183	2018-06-19	Annual	2019-06-19
Signal Analyzer	FSV7	103082	2018-06-14	Annual	2019-06-14

Report File No : F690501/RF-SAR002670

Date of Issue : 2018-10-11

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

14 FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

15 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

16 Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

16.1 WLAN Maximum Output Power Specifications(SISO)

16.1.1 WLAN 2.4 GHz Notebook & Tablet Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11b	All Channels	Maximum	16.00	16.00
		Normal	15.50	15.50
802.11g	All Channels	Maximum	16.00	16.00
		Normal	15.50	15.50
802.11n HT20	All Channels	Maximum	16.00	16.00
		Normal	15.50	15.50
802.11n HT40	3 Channels	Maximum	14.00	14.00
		Normal	13.50	13.50
	6 Channels	Maximum	16.00	16.00
		Normal	15.50	15.50
	9 Channels	Maximum	13.75	13.75
		Normal	13.25	13.25

16.1.2 WLAN 5 GHz Notebook Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11a, n, ac HT20 / VHT20	36 ~ 64 Channels	Maximum	11.50	12.00
		Normal	11.00	11.50
	100 ~ 144 Channels	Maximum	13.00	13.00
		Normal	12.50	12.50
	149 ~ 165 Channels	Maximum	13.50	13.50
		Normal	13.00	13.00
802.11n, ac HT40 / VHT40	38 ~ 62 Channels	Maximum	11.50	12.00
		Normal	11.00	11.50
	102 ~ 142 Channels	Maximum	13.00	13.00
		Normal	12.50	12.50
	151 , 159 Channels	Maximum	13.50	13.50
		Normal	13.00	13.00
802.11ac VHT80	42 , 58 Channels	Maximum	11.50	12.00
		Normal	11.00	11.50
	106 ~ 138 Channels	Maximum	13.00	13.00
		Normal	12.50	12.50
	155 Channels	Maximum	13.50	13.50
		Normal	13.00	13.00
802.11ac VHT160	50 Channels	Maximum	11.50	12.00
		Normal	11.00	11.50
	114 Channels	Maximum	12.50	12.50
		Normal	12.00	12.00

16.1.3 WLAN 5 GHz Tablet Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11a, n, ac HT20 / VHT20	36 ~ 64 Channels	Maximum	11.00	9.00
		Normal	10.50	8.50
	100 ~ 144 Channels	Maximum	12.50	10.00
		Normal	12.00	9.50
	149 ~ 165 Channels	Maximum	12.50	12.50
		Normal	12.00	12.00
802.11n, ac HT40 / VHT40	38 ~ 62 Channels	Maximum	11.00	9.00
		Normal	10.50	8.50
	102 ~ 142 Channels	Maximum	12.50	10.00
		Normal	12.00	9.50
	151 , 159 Channels	Maximum	12.50	12.50
		Normal	12.00	12.00
802.11ac VHT80	42 , 58 Channels	Maximum	11.00	9.00
		Normal	10.50	8.50
	106 ~ 138 Channels	Maximum	12.50	10.00
		Normal	12.00	9.50
	155 Channels	Maximum	12.50	12.50
		Normal	12.00	12.00
802.11ac VHT160	50 Channels	Maximum	11.00	9.00
		Normal	10.50	8.50
	114 Channels	Maximum	12.50	10.00
		Normal	12.00	9.50

16.2 WLAN Maximum Output Power Specifications(MIMO)

16.2.1 WLAN 2.4 GHz Notebook & Tablet Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11n HT20	All Channels	Maximum	13.00	13.00
		Normal	12.50	12.50
802.11n HT40	3 Channels	Maximum	13.00	13.00
		Normal	12.50	12.50
	6 Channels	Maximum	14.50	14.50
		Normal	14.00	14.00
	9 Channels	Maximum	13.00	13.00
		Normal	12.50	12.50

16.2.2 WLAN 5 GHz Notebook Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11 n, ac HT20 / VHT20	36 ~ 64 Channels	Maximum	9.00	9.00
		Normal	8.50	8.50
	100 ~ 144 Channels	Maximum	10.50	10.50
		Normal	10.00	10.00
	149 ~ 165 Channels	Maximum	11.00	11.00
		Normal	10.50	10.50
802.11n, ac HT40 / VHT40	38 ~ 62 Channels	Maximum	9.00	9.00
		Normal	8.50	8.50
	102 ~ 142 Channels	Maximum	10.50	10.50
		Normal	10.00	10.00
	151 , 159 Channels	Maximum	11.00	11.00
		Normal	10.50	10.50
802.11ac VHT80	42 , 58 Channels	Maximum	9.00	9.00
		Normal	8.50	8.50
	106 ~ 138 Channels	Maximum	10.50	10.50
		Normal	10.00	10.00
	155 Channels	Maximum	11.00	11.00
		Normal	10.50	10.50
802.11ac VHT160	50 Channels	Maximum	9.00	9.00
		Normal	8.50	8.50
	114 Channels	Maximum	12.00	12.00
		Normal	11.50	11.50

16.2.3 WLAN 5 GHz Tablet Mode

Average power for Production (dB m)				
Mode	Channel	Normal/Maximum	Main	Aux
802.11 n, ac HT20 / VHT20	36 ~ 64 Channels	Maximum	9.00	7.50
		Normal	8.50	7.00
	100 ~ 144 Channels	Maximum	10.50	8.50
		Normal	10.00	8.00
	149 ~ 165 Channels	Maximum	11.00	10.00
		Normal	10.50	9.50
802.11n, ac HT40 / VHT40	38 ~ 62 Channels	Maximum	9.00	7.50
		Normal	8.50	7.00
	102 ~ 142 Channels	Maximum	10.50	8.50
		Normal	10.00	8.00
	151 , 159 Channels	Maximum	11.00	10.00
		Normal	10.50	9.50
802.11ac VHT80	42 , 58 Channels	Maximum	9.00	7.50
		Normal	8.50	7.00
	106 ~ 138 Channels	Maximum	10.50	8.50
		Normal	10.00	8.00
	155 Channels	Maximum	11.00	10.00
		Normal	10.50	9.50
802.11ac VHT160	50 Channels	Maximum	9.00	7.50
		Normal	8.50	7.00
	114 Channels	Maximum	10.50	8.50
		Normal	10.00	8.00

16.3 Bluetooth Maximum Output Power Specifications

Average power for Production (dBm)					
Mode	Normal/Maximum	GFSK	PI/4DQPSK	8DPSK	LE
Bluetooth	Maximum	10.70	6.70	6.70	6.50
	Normal	9.20	5.20	5.20	5.00

17 WLAN

17.1 General Device Setup

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

17.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

17.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

17.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

17.5 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

17.6 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements

17.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

18 RF Conducted Power Measurement

18.1 SISO Conducted Power

WLAN 2.4 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook & Tablet Mode Measured Power [dB m]	
				Main	AUX
802.11b	2412	1	1	16.00	16.00
	2437	6	1	15.96	15.92
	2462	11	1	15.93	15.96
802.11g	2412	1	6	Not Measured	
	2437	6	6		
	2462	11	6		
802.11n HT20	2412	1	MCS0		
	2437	6	MCS0		
	2462	11	MCS0		
802.11n HT40	2422	3	MCS0	14.00	13.99
	2437	6	MCS0	16.00	16.00
	2452	9	MCS0	13.74	13.73

WLAN 5.2 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook & Tablet Mode Measured Power [dB m]	
				Main	AUX
802.11a	5180	36	6	Not Measured	
	5200	40	6		
	5220	44	6		
	5240	48	6		
802.11n HT20	5180	36	MCS0		
	5200	40	MCS0		
	5220	44	MCS0		
	5240	48	MCS0		
802.11n HT40	5190	38	MCS0		
	5230	46	MCS0		
802.11ac VHT20	5180	36	VHT0		
	5200	40	VHT0		
	5220	44	VHT0		
	5240	48	VHT0		
802.11ac VHT40	5190	38	VHT0		
	5230	46	VHT0		
802.11ac VHT80	5210	42	VHT0		

WLAN 5.3 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11a	5260	52	6	Not Measured			
	5280	56	6				
	5300	60	6				
	5320	64	6				
802.11n HT20	5260	52	MCS0				
	5280	56	MCS0				
	5300	60	MCS0				
	5320	64	MCS0				
802.11n HT40	5270	54	MCS0				
	5310	62	MCS0				
802.11ac VHT20	5260	52	VHT0				
	5280	56	VHT0				
	5300	60	VHT0				
	5320	64	VHT0				
802.11ac VHT40	5270	54	VHT0				
	5310	62	VHT0				
802.11ac VHT80	5290	58	VHT0	11.50	12.00	11.00	9.00
802.11ac VHT160	5250	50	VHT0	Not Measured			

WLAN 5.6 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11a	5500	100	6	Not Measured			
	5520	104	6				
	5540	108	6				
	5560	112	6				
	5580	116	6				
	5600	120	6				
	5620	124	6				
	5640	128	6				
	5660	132	6				
	5680	136	6				
	5700	140	6				
	5720	142	6				

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11n HT20	5500	100	MCS0	Not Measured			
	5520	104	MCS0				
	5540	108	MCS0				
	5560	112	MCS0				
	5580	116	MCS0				
	5600	120	MCS0				
	5620	124	MCS0				
	5640	128	MCS0				
	5660	132	MCS0				
	5680	136	MCS0				
	5700	140	MCS0				
	5720	142	MCS0				
802.11n HT40	5510	102	MCS0				
	5550	110	MCS0				
	5590	118	MCS0				
	5630	126	MCS0				
	5670	134	MCS0				
	5710	142	MCS0				
802.11ac VHT20	5500	100	VHT0				
	5520	104	VHT0				
	5540	108	VHT0				
	5560	112	VHT0				
	5580	116	VHT0				
	5600	120	VHT0				
	5620	124	VHT0				
	5640	128	VHT0				
	5660	132	VHT0				
	5680	136	VHT0				
	5700	140	VHT0				
	5720	142	VHT0				
802.11ac VHT40	5510	102	VHT0				
	5550	110	VHT0				
	5590	118	VHT0				
	5630	126	VHT0				
	5670	134	VHT0				
	5710	142	VHT0				
802.11ac VHT80	5530	106	VHT0	12.96	12.98	12.41	9.90
	5610	122	VHT0	12.89	12.94	12.38	9.99
	5690	138	VHT0	13.00	13.00	12.50	10.00
802.11ac VHT160	5570	114	VHT0	Not Measured			

WLAN 5.8 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11a	5745	149	6	Not Measured			
	5765	153	6				
	5785	157	6				
	5805	161	6				
	5825	165	6				
802.11n HT20	5745	149	MCS0				
	5765	153	MCS0				
	5785	157	MCS0				
	5805	161	MCS0				
	5825	165	MCS0				
802.11n HT40	5755	151	MCS0				
	5795	159	MCS0				
802.11ac VHT20	5745	149	VHT0				
	5765	153	VHT0				
	5785	157	VHT0				
	5805	161	VHT0				
	5825	165	VHT0				
802.11ac VHT40	5755	151	VHT0				
	5795	159	VHT0				
802.11ac VHT80	5775	155	VHT0	13.50	13.43	12.50	12.50

18.2 MIMO Conducted Power

WLAN 2.4 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook & Tablet Mode Measured Power [dB m]	
				Main	Aux
802.11n HT20	2412	1	MCS8	Not Measured	
	2437	6	MCS8		
	2462	11	MCS8		
802.11n HT40	2422	3	MCS8	13.00	13.00
	2437	6	MCS8	14.50	14.50
	2452	9	MCS8	13.00	13.00

WLAN 5.2 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11n HT20	5180	36	MCS8	Not Measured			
	5200	40	MCS8				
	5220	44	MCS8				
	5240	48	MCS8				
802.11n HT40	5190	38	MCS8				
	5230	46	MCS8				
802.11ac VHT20	5180	36	VHT0				
	5200	40	VHT0				
	5220	44	VHT0				
	5240	48	VHT0				
802.11ac VHT40	5190	38	VHT0				
	5230	46	VHT0				
802.11ac VHT80	5210	42	VHT0				

WLAN 5.3 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11n HT20	5260	52	MCS8	Not Measured			
	5280	56	MCS8				
	5300	60	MCS8				
	5320	64	MCS8				
802.11n HT20	5260	52	MCS8				
	5280	56	MCS8				
	5300	60	MCS8				
	5320	64	MCS8				
802.11n HT40	5270	54	MCS8				
	5310	62	MCS8				
802.11ac VHT20	5260	52	VHT0				
	5280	56	VHT0				
	5300	60	VHT0				
	5320	64	VHT0				
802.11ac VHT40	5270	54	VHT0				
	5310	62	VHT0				
802.11ac VHT80	5290	58	VHT0	9.00	9.00	7.50	7.50
802.11ac VHT160	5250	50	VHT0	Not Measured			

WLAN 5.6 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11n HT20	5500	100	MCS8	Not Measured			
	5520	104	MCS8				
	5540	108	MCS8				
	5560	112	MCS8				
	5580	116	MCS8				
	5600	120	MCS8				
	5620	124	MCS8				
	5640	128	MCS8				
	5660	132	MCS8				
	5680	136	MCS8				
	5700	140	MCS8				
	5720	142	MCS8				
802.11n HT40	5510	102	MCS8				
	5550	110	MCS8				
	5590	118	MCS8				
	5630	126	MCS8				
	5670	134	MCS8				
	5710	142	MCS8				
802.11ac VHT20	5500	100	VHT0				
	5520	104	VHT0				
	5540	108	VHT0				
	5560	112	VHT0				
	5580	116	VHT0				
	5600	120	VHT0				
	5620	124	VHT0				
	5640	128	VHT0				
	5660	132	VHT0				
	5680	136	VHT0				
	5700	140	VHT0				
	5720	142	VHT0				
802.11ac VHT40	5510	102	VHT0				
	5550	110	VHT0				
	5590	118	VHT0				
	5630	126	VHT0				
	5670	134	VHT0				
	5710	142	VHT0				
802.11ac VHT80	5530	106	VHT0	10.46	10.48	8.46	8.47
	5610	122	VHT0	10.48	10.49	8.48	8.49
	5690	138	VHT0	10.50	10.50	8.50	8.50
802.11ac VHT160	5570	114	VHT0	Not Measured			

WLAN 5.8 GHz

Mode	Freq. (MHz)	Ch. #	Rate	Notebook Mode Measured Power [dB m]		Tablet Mode Measured Power [dB m]	
				Main	Aux	Main	Aux
802.11n HT20	5745	149	MCS8	Not Measured			
	5765	153	MCS8				
	5785	157	MCS8				
	5805	161	MCS8				
	5825	165	MCS8				
802.11n HT40	5755	151	MCS8				
	5795	159	MCS8				
802.11ac VHT20	5745	149	VHT0				
	5765	153	VHT0				
	5785	157	VHT0				
	5805	161	VHT0				
	5825	165	VHT0				
802.11ac VHT40	5755	151	VHT0				
	5795	159	VHT0				
802.11ac VHT80	5775	155	VHT0	10.50	10.50	10.00	10.00


Bluetooth

Channel	Frequency (MHz)	GFSK (dB m)	4DPSK (dB m)	8DPSK (dB m)	LE (dB m)
Low	2402	8.39	5.72	5.72	5.50
Middle	2441	9.33	5.88	5.90	5.60
High	2480	9.34	5.00	4.95	4.59

Note. Justification for test configurations for WLAN per KDB Publication 248227 D01 Wi-Fi SAR v02r02:

1. Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
2. For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
3. For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
4. For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For channels were measured.

19 Transmit Antenna Separation Distances

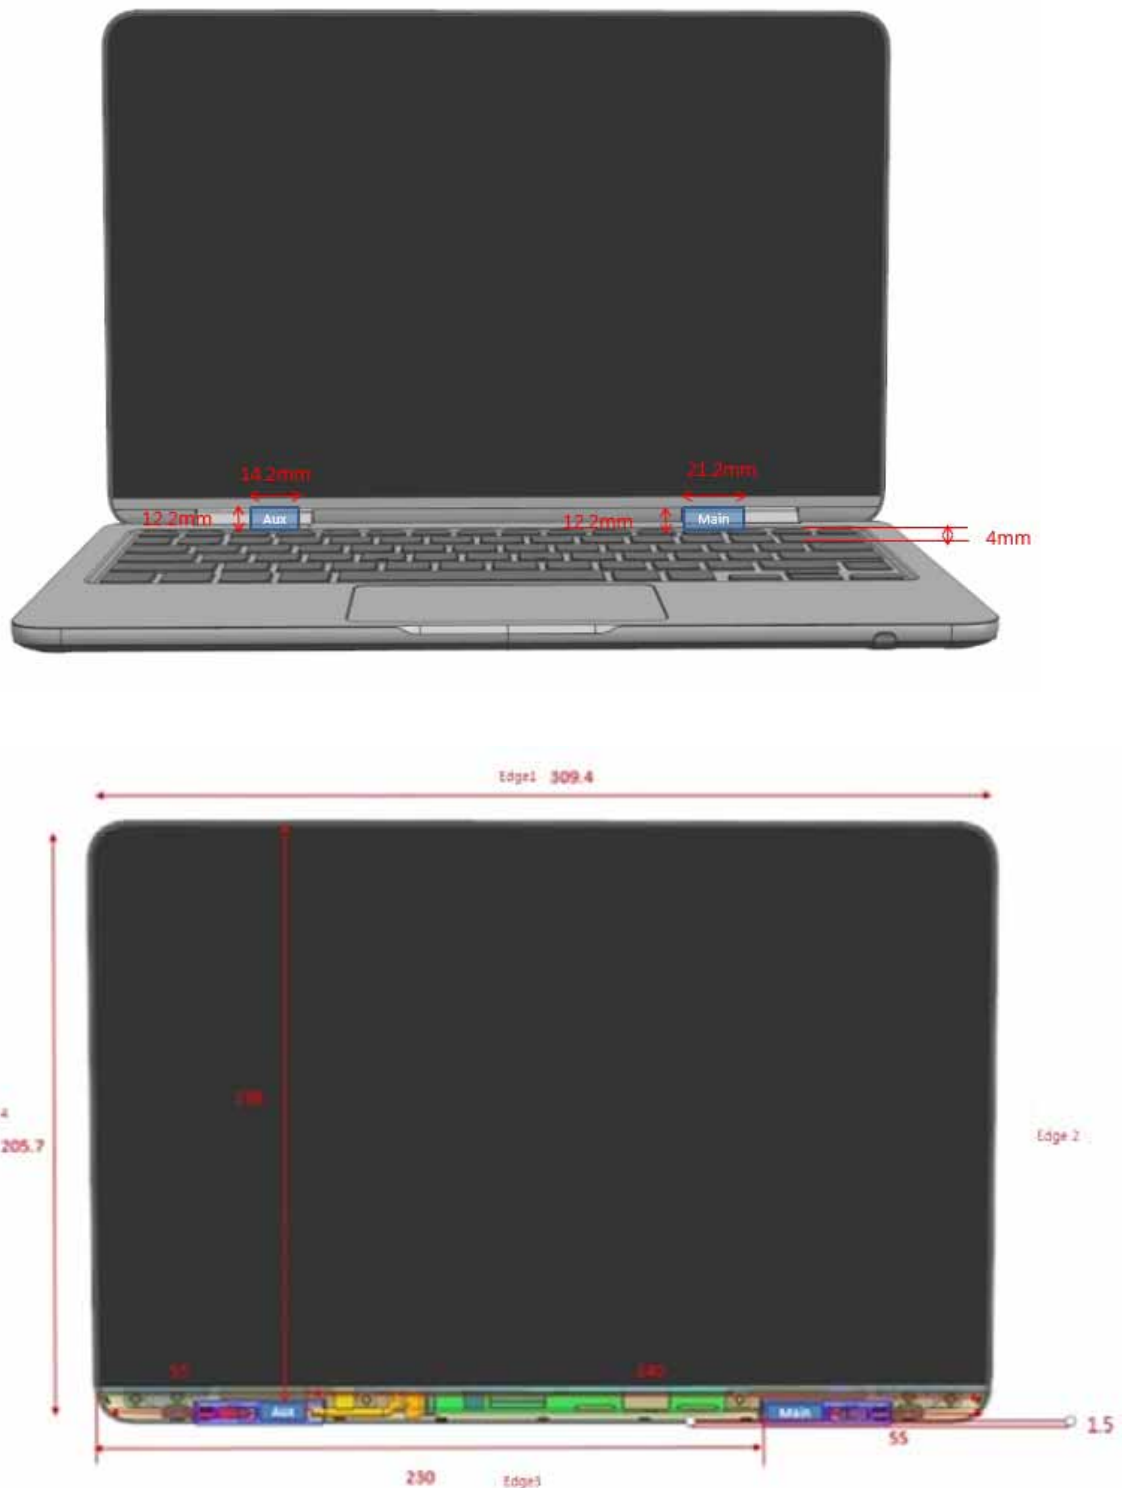

<The Distance information of Antenna to Edges of Notebook and Tablet PC>

Report File No : F690501/RF-SAR002670

Date of Issue : 2018-10-11

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

20. SAR Test Exclusions Applied

20.1 Tablet PC Device Type


Based on the maximum tune-up tolerance limit of WLAN and Bluetooth, and the antenna to use separation distance, Table “EXEMPT” SAR was not required and Table “Measure” SAR was required.

Frequency (MHz)	Output power ^{Note 2, 4}		Separation distances (mm) ^{Note 1 and 4}						SAR Exemption ^{Note 3 and 4}					
	dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
WLAN Main Antenna														
2462	16.00	40	5	198	55	5	230		12.55 Measure	1576mW EXEMPT	146mW EXEMPT	12.55 Measure	1896mW EXEMPT	N/A
5240	9.00	8	5	198	55	5	230		3.66 Measure	1546mW EXEMPT	116mW EXEMPT	3.66 Measure	1866mW EXEMPT	N/A
5320	9.00	8	5	198	55	5	230		3.69 Measure	1545mW EXEMPT	115mW EXEMPT	3.69 Measure	1865mW EXEMPT	N/A
5720	10.00	10	5	198	55	5	230		4.78 Measure	1543mW EXEMPT	113mW EXEMPT	4.78 Measure	1863mW EXEMPT	N/A
5825	12.50	18	5	198	55	5	230		8.69 Measure	1542mW EXEMPT	112mW EXEMPT	8.69 Measure	1862mW EXEMPT	N/A
WLAN Aux Antenna														
2462	16.00	40	5	198	240	5	55		12.55 Measure	1576mW EXEMPT	1996mW EXEMPT	12.55 Measure	146mW EXEMPT	N/A
5240	11.00	13	5	198	240	5	55		5.95 Measure	1546mW EXEMPT	1966mW EXEMPT	5.95 Measure	116mW EXEMPT	N/A
5320	11.00	13	5	198	240	5	55		6.00 Measure	1545mW EXEMPT	1965mW EXEMPT	6.00 Measure	115mW EXEMPT	N/A
5720	12.50	18	5	198	240	5	55		8.61 Measure	1543mW EXEMPT	1963mW EXEMPT	8.61 Measure	113mW EXEMPT	N/A
5825	12.50	18	5	198	240	5	55		8.69 Measure	1542mW EXEMPT	1962mW EXEMPT	8.69 Measure	112mW EXEMPT	N/A
Bluetooth Antenna														
2480	10.00	10	5	198	240	5	55		3.15 Measure	1575mW EXEMPT	1995mW EXEMPT	3.15 Measure	145mW EXEMPT	N/A

Note

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the maximum rated power (including tune-up or manufacturing tolerances).
- If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation ≤ 50mm the value is the KDB 447498 D01v06 calculated value and must be less than 3 for SAR exemption.
- Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.
- SAR evaluation for the front surface of tablet display screens is generally not necessary according to 4.3 section of KDB 616217 D04 v01r02.

21 Bluetooth Duty Cycle used for SAR Testing

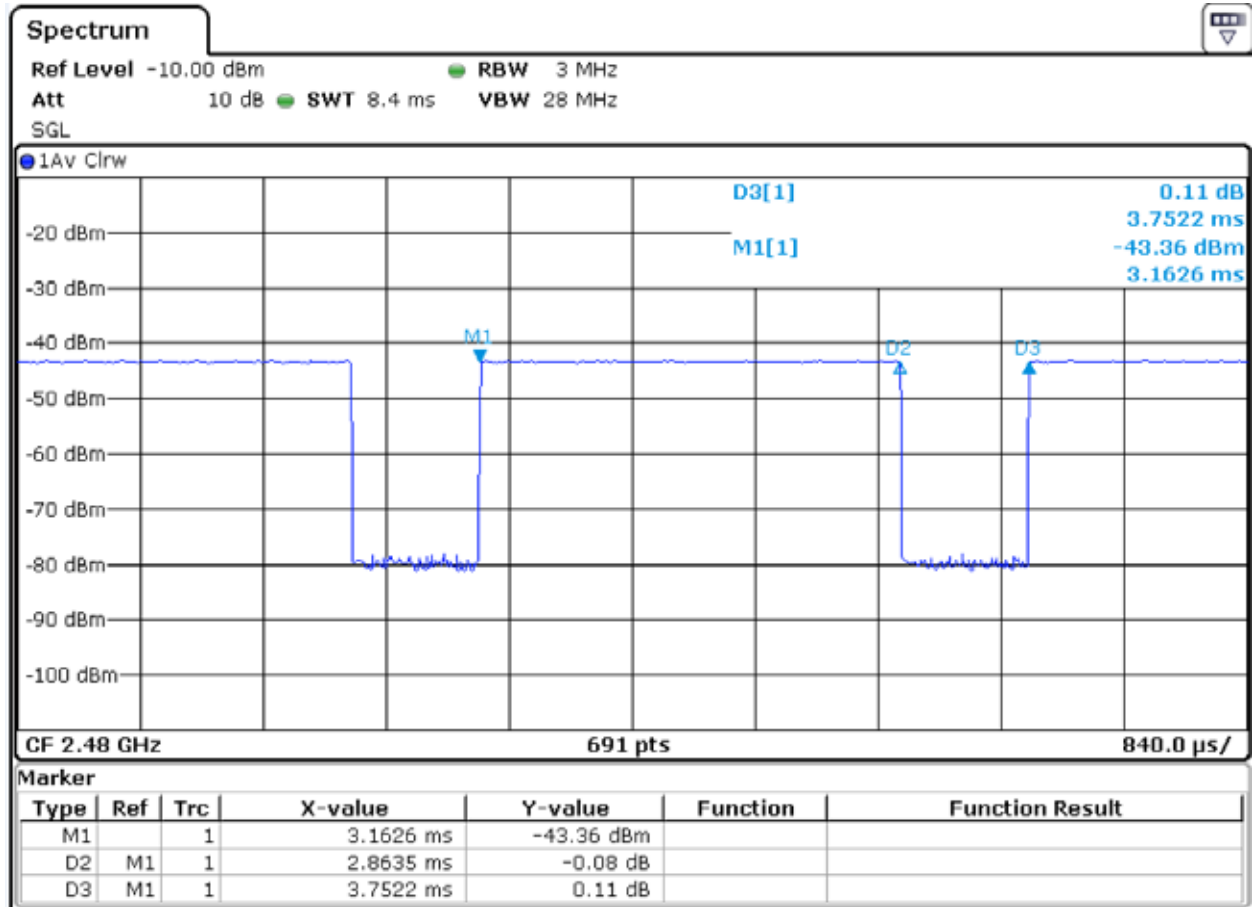

Bluetooth Duty cycle measurement

$$T_{on} = 2.864 \text{ ms}$$

$$T_{on} + T_{off} = 3.752 \text{ ms}$$

$$\text{Duty Cycle} = (T_{on} / T_{on} + T_{off}) \times 100$$

$$76.3 \% = (2.864 / 3.752) \times 100$$

Bluetooth Duty cycle: **76.3 %**

$$\text{SAR Crest Factor} = 1 / 0.763 = 1.310$$

22 SAR Data Summary

22.1 Notebook Device Type

SAR measurement for SISO

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	Cube	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No		
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit			Main	Aux	Main	Aux		Main	Aux		Main	Aux
Base	802.11b	2412	1	16.00	-	16.00	0.815	0	0.481	-	1.000	-	1.015	0.488	-	-		
								1	0.404					0.410				
Base	802.11b	2412	1	-	16.00	16.00	0.585	-	-	0.293	-	1.000	1.015	-	0.297	-		
Additional Test																		
Base	802.11n HT40	2437	6	16.00	-	16.00	0.815	0	0.510	-	1.000	-	1.042	0.531	-	A5		
								1	0.402					0.419				
Base	802.11n HT40	2437	6	-	16.00	16.00	0.642	-	-	0.322	-	1.000	1.042	-	0.336	A6		

WLAN 5.3 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit							Main	Aux	
				Main	Aux			Main	Aux	Main	Aux				
Base	802.11ac VHT80	5290	58	11.50	-	11.50	2.090	0.866	-	1.000	-	1.150	0.996	-	A7
Base	802.11ac VHT80	5290	58	-	12.00	12.00	0.903	-	0.512	-	1.000	1.150	-	0.589	A8
Repeat Test															
Base	802.11ac VHT80	5290	58	11.50	-	11.50	2.110	0.866	-	1.000	-	1.150	0.996	-	-

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit							Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5530	106	12.96	-	13.00	1.820	0.739	-	1.000	-	1.150	0.858		-
Base	802.11ac VHT80	5610	122	12.89	-	13.00	1.700	0.718	-	1.000	-	1.150	0.847		-
Base	802.11ac VHT80	5690	138	13.00	-	13.00	2.090	0.819	-	1.000	-	1.150	0.942		-
Base	802.11ac VHT80	5530	106	-	12.98	13.00	1.990	-	0.836	-	1.000	1.150		0.966	-
Base	802.11ac VHT80	5610	122	-	12.94	13.00	2.550	-	0.855	-	1.000	1.150		0.997	-
Base	802.11ac VHT80	5690	138	-	13.00	13.00	2.000	-	0.920	-	1.000	1.150		1.058	-
Repeat Test															
Base	802.11ac VHT80	5690	138	13.00	-	13.00	1.930	0.835	-	1.000	-	1.150	0.960	-	A9
Base	802.11ac VHT80	5690	138	-	13.00	13.00	2.470	-	0.926	-	1.000	1.150	-	1.065	A10

WLAN 5.8 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5775	155	13.50	-	13.50	2.210	0.988	-	1.000	-	1.150	1.136	-	A11
Base	802.11ac VHT80	5775	155	-	13.43	13.50	1.710	-	0.684	-	1.016	1.150	-	0.799	A12
Repeat Test															
Base	802.11ac VHT80	5775	155	13.50	-	13.50	1.880	0.954	-	1.000	-	1.150	1.097	-	-

Bluetooth 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)		Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)	Scaling Factor (Power)	1-g Scaled SAR (W/kg)	Plot No
		Frequency (MHz)	Channel	Conducted Power	Tune-Up Limit					
Base	GFSK	2480	78	9.34	10.70	0.168	0.096	1.368	0.131	A13

SAR measurement for MIMO

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11n HT40	2437	6	14.50	14.50	14.50	0.432	0.232	N/A	1.000	N/A	1.092	0.253	N/A	A14

WLAN 5.3 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit							Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5290	58	9.00	9.00	9.00	2.170	0.890	N/A	1.000	N/A	1.150	1.024	N/A	A15
Repeat Test															
Base	802.11ac VHT80	5290	58	9.00	9.00	9.00	1.650	0.830	0.412	1.000	1.000	1.150	0.955	0.474	-

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5530	106	10.46	10.48	10.50	1.310	0.453	0.417	1.009	1.005	1.150	0.526	0.482	A16
Base	802.11ac VHT80	5610	122	10.48	10.49	10.50	1.230	0.374	0.391	1.005	1.002	1.150	0.432	0.451	-
Base	802.11ac VHT80	5690	138	10.50	10.50	10.50	1.140	0.420	0.367	1.000	1.000	1.150	0.483	0.422	-

WLAN 5.8 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Base	802.11ac VHT80	5775	155	10.50	10.50	10.50	1.250	0.478	0.416	1.000	1.000	1.150	0.550	0.478	A17

22.2 Tablet PC Device Type

SAR measurement for SISO

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	Cube	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No		
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit			Main	Aux	Main	Aux		Main	Aux		Main	Aux
				Main	Aux													
Rear	802.11b	2412	1	16.00	-	16.00	0.752	-	0.444	-	1.000	-	1.015	0.451	-	-		
Rear	802.11b	2412	1	-	16.00	16.00	1.120	-	-	0.606	-	1.000	1.015	-	0.615	-		
Edge3	802.11b	2412	1	16.00	-	16.00	1.440	-	0.719	-	1.000	-	1.015	0.730	-	-		
Edge3	802.11b	2412	1	-	16.00	16.00	1.550	0	-	0.799	-	1.000	1.015	-	0.811	A19		
								1		0.770					0.782			
								2		0.649					0.659			
Edge3	802.11b	2462	11	-	15.85	16.00	1.450	0	-	0.780	-	1.000	1.015	-	0.799	-		
								1		0.643					0.659			
Additional Test																		
Rear	802.11n HT40	2437	6	16.00	-	16.00	0.703	-	0.355	-	1.000	-	1.042	0.370	-	-		
Rear	802.11n HT40	2437	6	-	16.00	16.00	0.810	-	-	0.477	-	1.000	1.042	-	0.497	-		
Edge3	802.11n HT40	2437	6	16.00	-	16.00	1.390	-	0.690	-	1.000	-	1.042	0.734	-	A18		
Edge3	802.11n HT40	2437	6	-	16.00	16.00	1.470	0	-	0.746	-	1.000	1.042	-	0.783	-		
								1		0.731					0.767			
								2		0.618					0.648			

WLAN 5.3 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	Cube	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit			Main	Aux	Main	Aux		Main	Aux	
				Main	Aux											
Rear	802.11ac VHT80	5290	58	11.00	-	11.00	0.510	-	0.217	-	1.000	-	1.150	0.250	-	-
Rear	802.11ac VHT80	5290	58	-	9.00	9.00	0.433	-	-	0.201	-	1.000	1.150	-	0.231	-
Edge3	802.11ac VHT80	5290	58	11.00	-	11.00	1.640	0	0.753	-	1.000	-	1.150	0.866	-	A20
								1	0.605					0.696		
Edge3	802.11ac VHT80	5290	58	-	9.00	9.00	2.730	-	-	0.794	-	1.000	1.150	-	0.913	A21

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Rear	802.11ac VHT80	5530	106	12.41	-	12.50	0.922	0.373	-	1.021	-	1.150	0.438	-	-
Rear	802.11ac VHT80	5610	122	12.38	-	12.50	1.570	0.397	-	1.028	-	1.150	0.469	-	-
Rear	802.11ac VHT80	5690	138	12.50	-	12.50	1.490	0.458	-	1.000	-	1.150	0.527	-	-
Rear	802.11ac VHT80	5690	138	-	10.00	10.00	0.704	-	0.308	-	1.000	1.150	-	0.354	-
Edge3	802.11ac VHT80	5530	106	12.41	-	12.50	1.750	0.721	-	1.021	-	1.150	0.847	-	-
Edge3	802.11ac VHT80	5610	122	12.38	-	12.50	1.910	0.747	-	1.028	-	1.150	0.883	-	-
Edge3	802.11ac VHT80	5690	138	12.50	-	12.50	2.260	0.839	-	1.000	-	1.150	0.965	-	-
Edge3	802.11ac VHT80	5530	106	-	9.90	10.00	2.560	-	0.915	-	1.023	1.150	-	1.077	A23
Edge3	802.11ac VHT80	5610	122	-	9.99	10.00	2.370	-	0.837	-	1.002	1.150	-	0.965	
Edge3	802.11ac VHT80	5690	138	-	10.00	10.00	2.340	-	0.793	-	1.000	1.150	-	0.912	
Repeat Test															
Edge3	802.11ac VHT80	5690	138	12.50	-	12.50	2.210	0.841	-	1.000	-	1.150	0.967	-	A22
Edge3	802.11ac VHT80	5530	106	-	9.90	10.00	2.980	-	0.874	-	1.023	1.150	-	1.029	-

WLAN 5.8 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Rear	802.11ac VHT80	5775	155	12.50	-	12.50	1.180	0.397	-	1.000	-	1.150	0.457	-	-
Rear	802.11ac VHT80	5775	155	-	12.50	12.50	1.140	-	0.400	-	1.000	1.150	-	0.460	-
Edge3	802.11ac VHT80	5775	155	12.50	-	12.50	2.470	0.941	-	1.000	-	1.150	1.082	-	A24
Edge3	802.11ac VHT80	5775	155	-	12.50	12.50	2.220	-	0.951	-	1.000	1.150	-	1.094	A25
Repeat Test															
Edge3	802.11ac VHT80	5775	155	12.50	-	12.50	2.470	0.933	-	1.000	-	1.150	1.073	-	-
Edge3	802.11ac VHT80	5775	155	-	12.50	12.50	2.070	-	0.904	-	1.000	1.150	-	1.040	-

Bluetooth 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)		Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)	Scaling Factor (Power)	1-g Scaled SAR (W/kg)	Plot No
		Frequency (MHz)	Channel	Conducted Power	Tune-Up Limit					
Rear	GFSK	2480	78	9.34	10.70	0.254	0.134	1.368	0.183	A26
Edge3	GFSK	2480	78	9.34	10.70	0.232	0.125	1.368	0.171	-

SAR measurement for MIMO

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	Cube		1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit											
				Main	Aux					Main	Aux	Main	Aux		Main	Aux	
Rear	802.11n HT40	2437	6	14.50	14.50	14.50	0.499	-		N/A	0.300	N/A	1.000	1.092	N/A	0.328	-
Edge3	802.11n HT40	2437	6	14.50	14.50	14.50	0.746	-	0	0.309	0.397	1.000	1.000	1.092	0.337	0.434	A27
									1		0.395					0.431	

WLAN 5.3 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune-Up Limit		Main	Aux	Main	Aux		Main	Aux	
Rear	802.11ac VHT80	5290	58	7.50	7.50	7.50	0.469	N/A	0.176	N/A	1.000	1.150	N/A	0.202	-
Edge3	802.11ac VHT80	5290	58	7.50	7.50	7.50	3.030	N/A	0.697	N/A	1.000	1.150	N/A	0.802	A28

WLAN 5.6 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Rear	802.11ac VHT80	5690	138	8.50	8.50	8.50	0.612	0.181	0.184	1.000	1.000	1.150	0.208	0.212	-
Edge3	802.11ac VHT80	5530	106	8.46	8.47	8.50	3.010	N/A	0.604	1.009	1.007	1.150	N/A	0.699	A29
Edge3	802.11ac VHT80	5610	122	8.48	8.49	8.50	2.650	N/A	0.554	1.005	1.002	1.150	N/A	0.639	-
Edge3	802.11ac VHT80	5690	138	8.50	8.50	8.50	2.490	N/A	0.489	1.000	1.000	1.150	N/A	0.562	-

WLAN 5.8 GHz Body SAR

EUT Position	Mode	Traffic Channel		Power(dBm)			Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)		Scaling Factor (Power)		Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)		Plot No
		Frequency (MHz)	Channel	Conducted Power		Tune- Up Limit		Main	Aux	Main	Aux		Main	Aux	
				Main	Aux										
Rear	802.11ac VHT80	5775	155	10.00	10.00	10.00	0.825	0.283	0.286	1.000	1.000	1.150	0.325	0.329	-
Edge3	802.11ac VHT80	5775	155	10.00	10.00	10.00	1.710	0.549	0.687	1.000	1.000	1.150	0.631	0.790	A30

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
2. Liquid tissue depth was at least 15 cm for all frequencies.
3. All modes of operation were investigated, and worst-case results are reported.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2 dB below the highest peak.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
7. Per FCC KDB 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determined SAR test exclusion for adjacent edge configurations.
8. For MIMO SAR results with 'N/A', there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.

4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
5. WLAN transmission was verified using a spectrum analyzer.
6. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a,g, n then ac) is selected.
7. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is $> 1.2\text{ W/kg}$.
8. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50, 114. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is $> 1.2\text{ W/kg}$, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

23 SAR Measurement Variability

23.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

EUT Position	Mode	Antenna	Traffic Channel		Separation Distance (mm)	Measured 1g SAR (W/kg)	1 st Repeated 1g SAR(W/kg)	Ratio
			Frequency (MHz)	Channel				
Base	WLAN 5GHz	Main	5290	58	0	0.866	0.866	1.00
Base	WLAN 5GHz	Main	5690	138	0	0.819	0.835	1.02
Base	WLAN 5GHz	Aux	5690	138	0	0.920	0.926	1.01
Base	WLAN 5GHz	Main	5775	155	0	0.988	0.954	1.04
Edge3	WLAN 5GHz	Main	5690	138	0	0.839	0.841	1.00
Edge3	WLAN 5GHz	Aux	5530	106	0	0.915	0.874	1.05
Edge3	WLAN 5GHz	Main	5775	155	0	0.941	0.933	1.01
Edge3	WLAN 5GHz	Aux	5775	155	0	0.951	0.904	1.05
Base	WLAN 5GHz	MIMO	5290	58	0	0.890	0.830	1.07

23.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

24 Simultaneous Multi-band Transmission Evaluation

24.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as Bluetooth devices which may simultaneously transmit with the licensed transmitter.

24.2 The Simultaneous Transmission possibilities are listed as below

No	Capable TX Configuration	Operation
1	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux	YES
2	WLAN 5 GHz Main + WLAN 5 GHz Aux	YES
3	WLAN 2.4 GHz Main + Bluetooth Aux	YES
4	WLAN 5 GHz Main + Bluetooth Aux	YES
5	WLAN 5 GHz Main + WLAN 5 GHz Aux + Bluetooth Aux	YES

Note:

- The simultaneous transmission possibilities are listed as below.
- WLAN 2.4GHz Aux and Bluetooth Aux share the same antenna and cannot transmit simultaneously.
- We used the sum of 1-g SAR provision in KDB 447498 D01v06 to exclude the simultaneous transmission.

24.3 Notebook Body SAR Simultaneous Transmission Analysis

Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 2.4 GHz	Base	0.253		Not Applicable	0.253
Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Base	1.024		Not Applicable	1.024
Simultaneous TX	configuration	WLAN Main SAR (W/kg)	WLAN Aux SAR (W/kg)	Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 2.4 GHz	Base	0.531	Not Applicable	0.131	0.662
Simultaneous TX	configuration	WLAN Main SAR (W/kg)	WLAN Aux SAR (W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Base	1.136	Not Applicable	0.131	1.267
Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Base	1.024		0.131	1.155

- As the sum of the SAR is than 1.6 W/kg, so SPLSR is not required.

24.4 Tablet PC Body SAR Simultaneous Transmission Analysis

Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 2.4 GHz	Rear	0.328		Not Applicable	0.328
	Edge3	0.434			0.434
Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Rear	0.329		Not Applicable	0.329
	Edge3	0.802			0.802
Simultaneous TX	configuration	WLAN Main SAR (W/kg)	WLAN Aux SAR (W/kg)	Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
WLAN 2.4 GHz	Rear	0.451	Not Applicable	0.183	0.634
	Edge3	0.734		0.171	0.905
Simultaneous TX	configuration	WLAN Main SAR (W/kg)	WLAN Aux SAR (W/kg)	Bluetooth Aux SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Rear	0.527	Not Applicable	0.183	0.710
	Edge3	1.082		0.171	1.253
Simultaneous TX	configuration	MIMO SAR(W/kg)		Bluetooth Aux Ant SAR (W/kg)	ΣSAR (W/kg)
WLAN 5 GHz	Rear	0.329		0.183	0.512
	Edge3	0.802		0.171	0.973

- As the sum of the SAR is than 1.6 W/kg, so SPLSR is not required.

Appendixes List

Appendix A

- A.1 Verification Test Plots for 2450MHz
- A.2 Verification Test Plots for 5300 MHz
- A.3 Verification Test Plots for 5600 MHz
- A.4 Verification Test Plots for 5800 MHz
- A.5 SAR Test Plots for WLAN 2450 MHz Main SISO (Notebook Mode)
- A.6 SAR Test Plots for WLAN 2450 MHz Aux SISO(Notebook Mode)
- A.7 SAR Test Plots for WLAN 5300 MHz Main SISO(Notebook Mode)
- A.8 SAR Test Plots for WLAN 5300 MHz Aux SISO(Notebook Mode)
- A.9 SAR Test Plots for WLAN 5600 MHz Main SISO(Notebook Mode)
- A.10 SAR Test Plots for WLAN 5600 MHz Aux SISO(Notebook Mode)
- A.11 SAR Test Plots for WLAN 5800 MHz Main SISO(Notebook Mode)
- A.12 SAR Test Plots for WLAN 5800 MHz Aux SISO(Notebook Mode)
- A.13 SAR Test Plots for Bluetooth (Notebook Mode)
- A.14 SAR Test Plots for WLAN 2450 MHz MIMO(Notebook Mode)
- A.15 SAR Test Plots for WLAN 2450 MHz MIMO(Notebook Mode)
- A.16 SAR Test Plots for WLAN 5300 MHz MIMO(Notebook Mode)
- A.17 SAR Test Plots for WLAN 5300 MHz MIMO(Notebook Mode)
- A.18 SAR Test Plots for WLAN 2450 MHz Main SISO(Tablet Mode)
- A.19 SAR Test Plots for WLAN 2450 MHz Aux SISO(Tablet Mode)
- A.20 SAR Test Plots for WLAN 5300 MHz Main SISO(Tablet Mode)
- A.21 SAR Test Plots for WLAN 5300 MHz Aux SISO(Tablet Mode)
- A.22 SAR Test Plots for WLAN 5600 MHz Main SISO(Tablet Mode)
- A.23 SAR Test Plots for WLAN 5600 MHz Aux SISO(Tablet Mode)
- A.24 SAR Test Plots for WLAN 5800 MHz Main SISO(Tablet Mode)
- A.25 SAR Test Plots for WLAN 5800 MHz Aux SISO(Tablet Mode)
- A.26 SAR Test Plots for Bluetooth (Tablet Mode)
- A.27 SAR Test Plots for WLAN 2450 MHz MIMO(Tablet Mode)
- A.28 SAR Test Plots for WLAN 5300 MHz MIMO(Tablet Mode)
- A.29 SAR Test Plots for WLAN 5600 MHz MIMO(Tablet Mode)
- A.30 SAR Test Plots for WLAN 5800 MHz MIMO(Tablet Mode)

Appendix A.1 Verification Test Plots for 2450 MHz

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [2450MHz Verification 2018_09_19.da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 52.501$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/2450MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 7.94 W/kg


Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 64.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 9.56 W/kg

SAR(1 g) = 4.84 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 7.82 W/kg

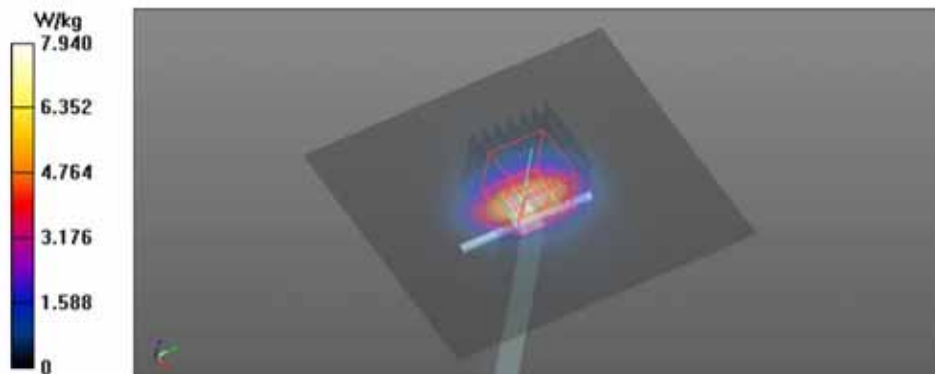

Date: 2018-10-04

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [2450MHz Verification 2018 10 04.da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.2 °C Tissue Temp : 21.3 °C

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 53.652$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/2450MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 8.09 W/kg


Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 61.03 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.17 W/kg; SAR(10 g) = 2.48 W/kg

Maximum value of SAR (measured) = 8.34 W/kg

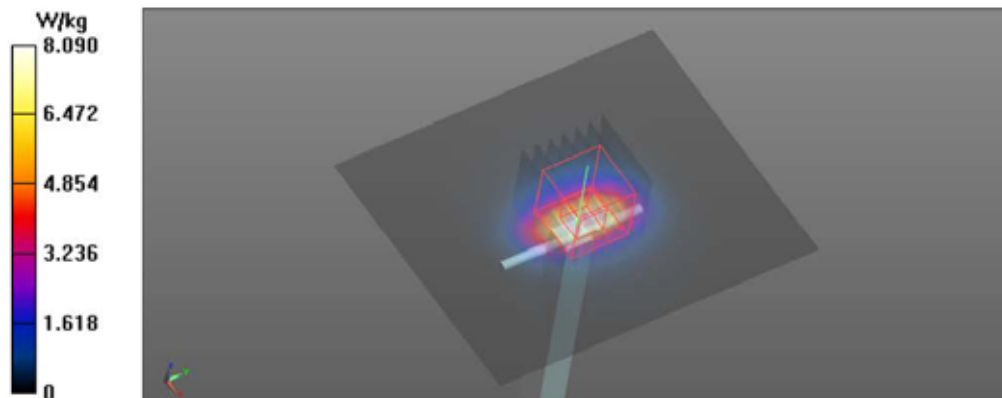

Rep

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Appendix A.2 Verification Test Plots for 5300 MHz

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [5300MHz Verification 2018_09_21 da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 49.352$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5300MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 17.6 W/kg


Verification/5300MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 68.88 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

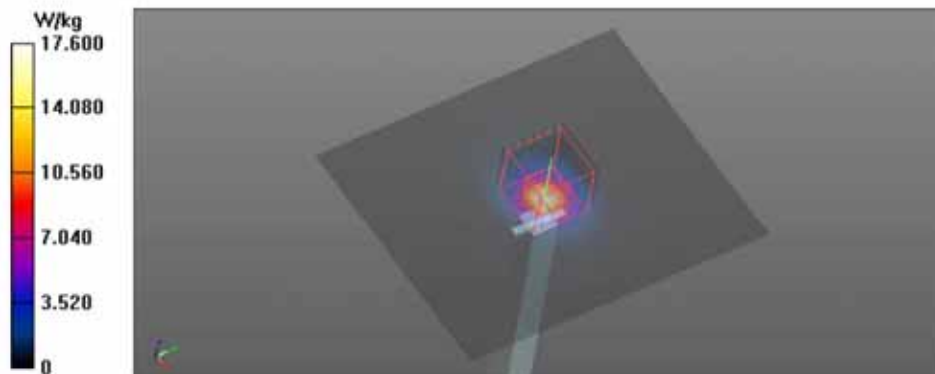

Date: 2018-10-05

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5300MHz Verification 2018 10 05.da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.4 °C Tissue Temp : 21.4 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.463$ S/m; $\epsilon_r = 48.627$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5300MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 19.0 W/kg


Verification/5300MHz Verification/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

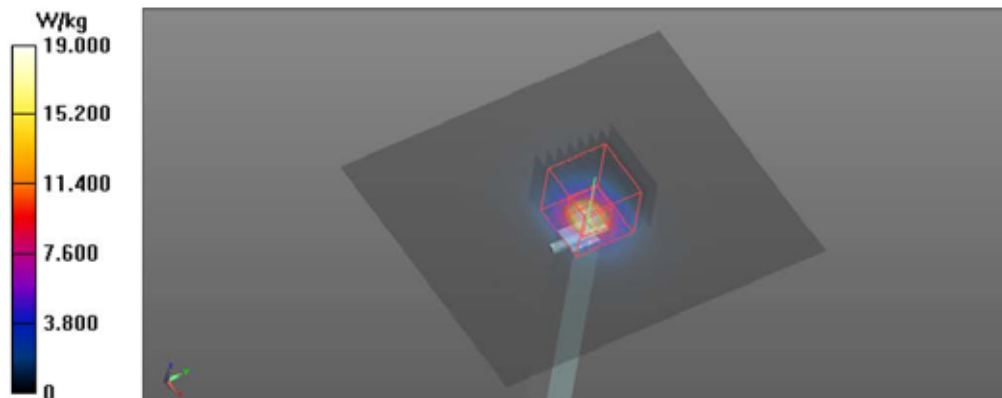

Rep

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Appendix A.3 Verification Test Plots for 5600 MHz

Date: 2018-09-20

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5600MHz Verification 2018_09_20.da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.4 °C Tissue Temp : 21.6 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.786$ S/m; $\epsilon_r = 47.502$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5600MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 21.2 W/kg


Verification/5600MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 71.01 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 36.0 W/kg

SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

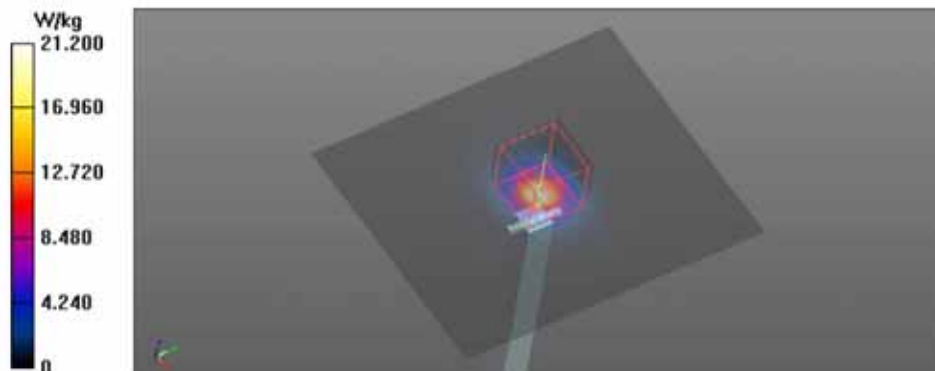

Date: 2018-10-08

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5600MHz Verification 2018 10 08.da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.806$ S/m; $\epsilon_r = 48.424$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5600MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 21.0 W/kg


Verification/5600MHz Verification/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.67 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 36.0 W/kg

SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 21.4 W/kg

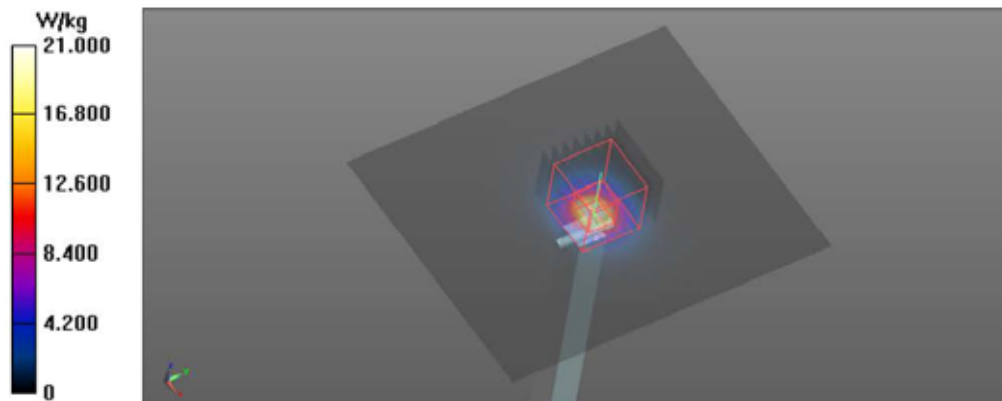

Rep

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Appendix A.4 Verification Test Plots for 5800 MHz

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [5800MHz Verification 2018_09_21.da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.934$ S/m; $\epsilon_r = 48.771$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5800MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.5 W/kg


Verification/5800MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.70 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

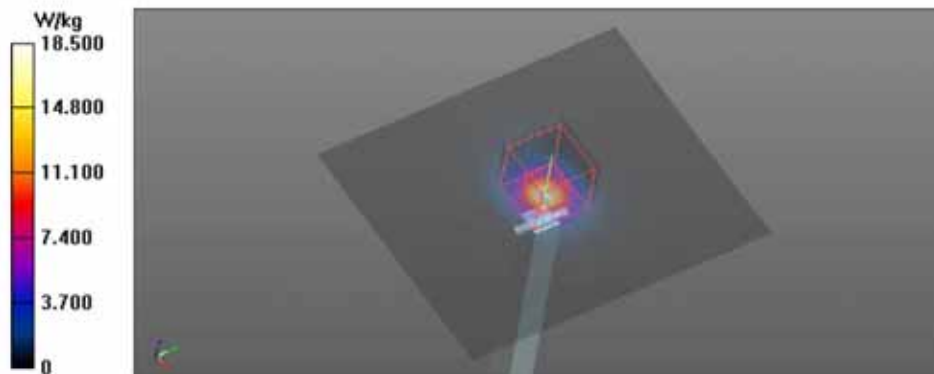

Date: 2018-10-09

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5800MHz Verification 2018 10 09.da53:0](#)

Input Power : 100 mW

Ambient Temp : 22.5 °C Tissue Temp : 21.4 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.908$ S/m; $\epsilon_r = 48.406$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Verification/5800MHz Verification/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 19.1 W/kg


Verification/5800MHz Verification/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

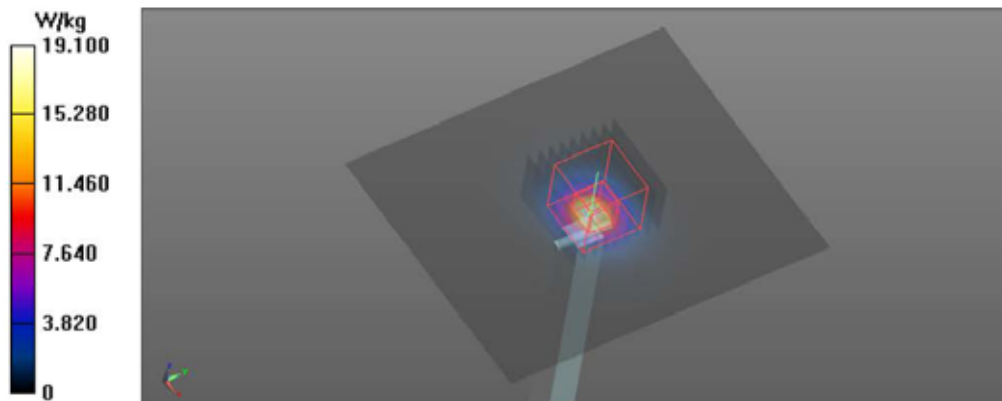

Repo

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Appendix A.5 SAR Test Plots for WLAN 2450 MHz Main SISO(Notebook Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: 2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 52.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.815 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.637 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.932 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main/Zoom Scan (7x7x7)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.637 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.834 W/kg

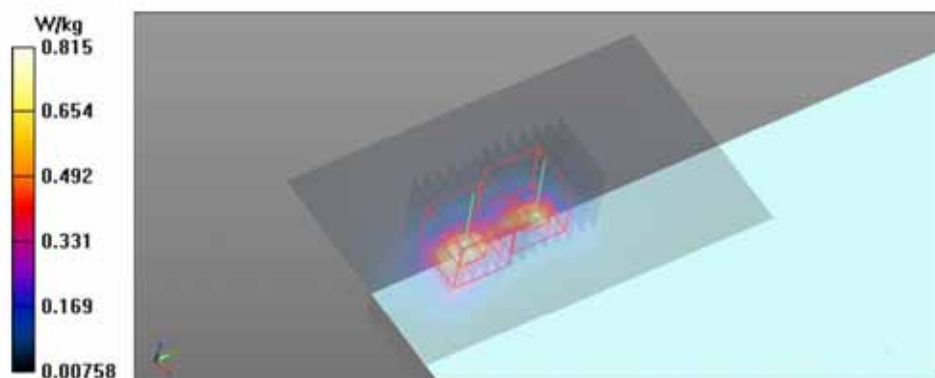

Appendix A.6 SAR Test Plots for WLAN 2450 MHz Aux SISO(Notebook Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11n HT40 Base CH6 Aux.da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 52.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz WLAN_802.11n_HT40_Base_CH6_Aux/Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.642 W/kg

Body/2.4GHz WLAN_802.11n_HT40_Base_CH6_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.402 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

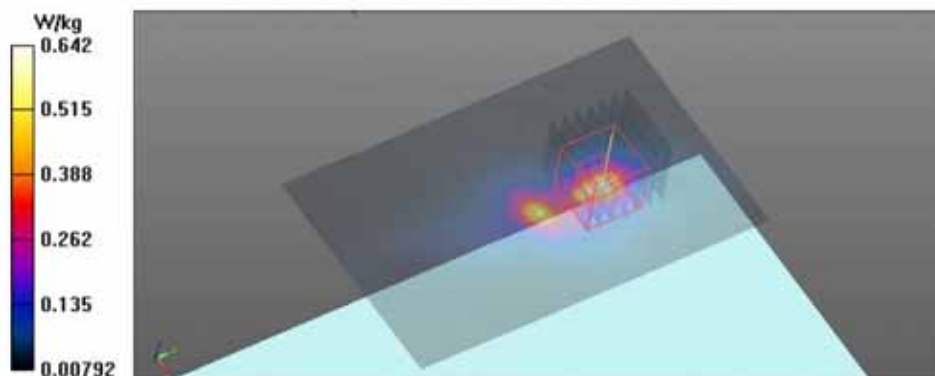

Appendix A.7 SAR Test Plots for WLAN 5300 MHz Main SISO(Notebook Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.3GHz WLAN 802.11ac_VHT80_Base_CH58_Main.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 49.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz WLAN 802.11ac_VHT80_Base_CH58_Main/Area Scan (81x131x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.09 W/kg

Body/5.3GHz WLAN 802.11ac_VHT80_Base_CH58_Main/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.965 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.99 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 2.36 W/kg

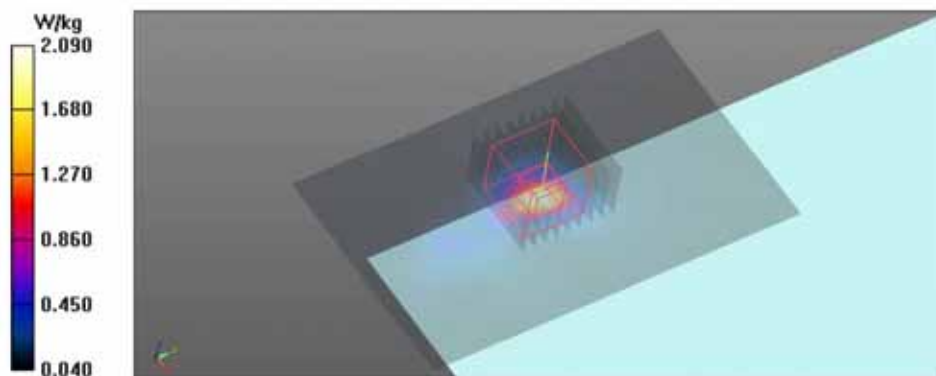

Appendix A.8 SAR Test Plots for WLAN 5300 MHz Aux SISO(Notebook Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.3GHz WLAN 802.11ac VHT80 Base CH58 Aux.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 49.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz WLAN 802.11ac VHT80 Base CH58 Aux/Area Scan (81x131x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.903 W/kg

Body/5.3GHz WLAN 802.11ac VHT80 Base CH58 Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.109 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

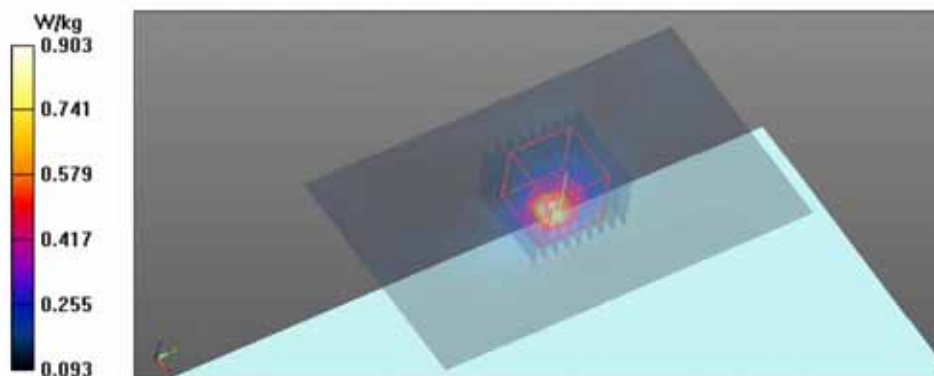

Appendix A.9 SAR Test Plots for WLAN 5600 MHz Main SISO(Notebook Mode)

Date: 2018-09-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz WLAN 802.11ac VHT80 Base CH138 Main Repeat Test.da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.6 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 6.029$ S/m; $\epsilon_r = 47.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz WLAN 802.11ac VHT80 Base CH138 Main Repeat Test/Area Scan (81x131x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.93 W/kg

Body/5.6GHz WLAN 802.11ac VHT80 Base CH138 Main Repeat Test/Zoom Scan (9x9x7)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.957 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

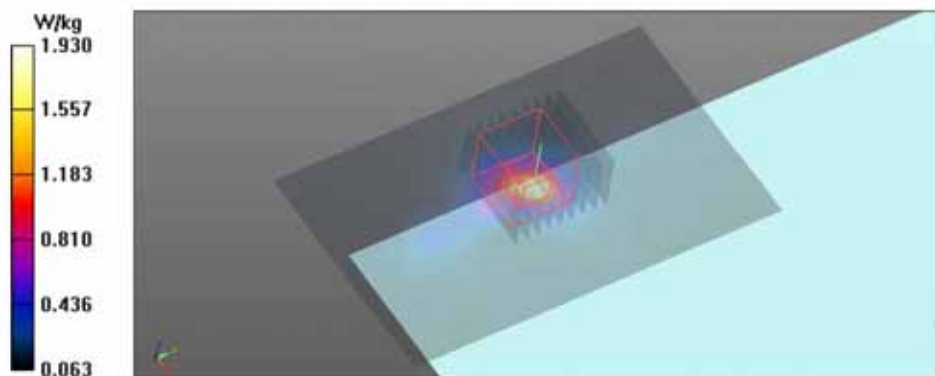

Appendix A.10 SAR Test Plots for WLAN 5600 MHz Aux SISO(Notebook Mode)

Date: 2018-09-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz WLAN 802.11ac_VHT80_Base_CH138_Aux_Repeat Test da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.6 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 6.029$ S/m; $\epsilon_r = 47.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz WLAN_802.11ac_VHT80_Base_CH138_Aux/Area Scan (81x131x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.47 W/kg

Body/5.6GHz WLAN_802.11ac_VHT80_Base_CH138_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.219 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 4.62 W/kg

SAR(1 g) = 0.926 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 2.32 W/kg

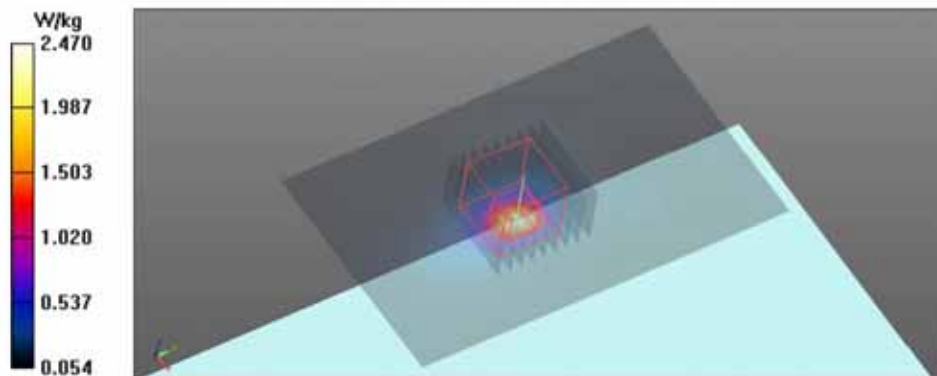

Appendix A.11 SAR Test Plots for WLAN 5800 MHz Main SISO(Notebook Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.8GHz WLAN 802.11ac VHT80 Base CH155 Main.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.784$ S/m; $\epsilon_r = 48.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Main/Area Scan (81x131x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.21 W/kg

Body/5.8GHz WLAN 802.11ac VHT80 Base CH155 Main/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.819 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.42 W/kg

SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

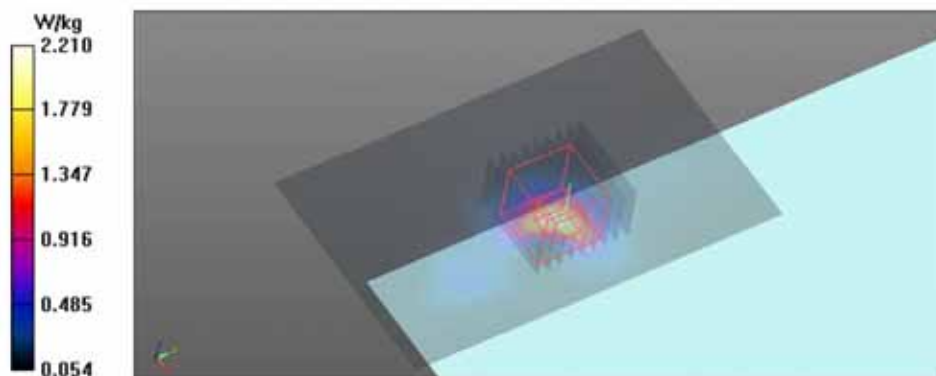

Appendix A.12 SAR Test Plots for WLAN 5800 MHz Aux SISO(Notebook Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.8GHz WLAN 802.11ac_VHT80_Base_CH155_Aux_da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.784$ S/m; $\epsilon_r = 48.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz WLAN 802.11ac_VHT80_Base_CH155_Aux/Area Scan (81x131x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Body/5.8GHz WLAN 802.11ac_VHT80_Base_CH155_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.643 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

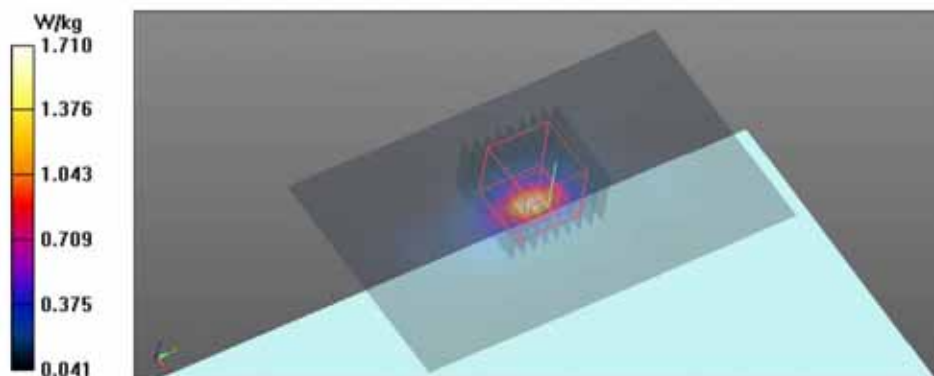

Appendix A.13 SAR Test Plots for Bluetooth (Notebook Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [Bluetooth_Base_CH78_da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30978

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 52.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/Bluetooth_Base_CH78/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.168 W/kg


Body/Bluetooth_Base_CH78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.825 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

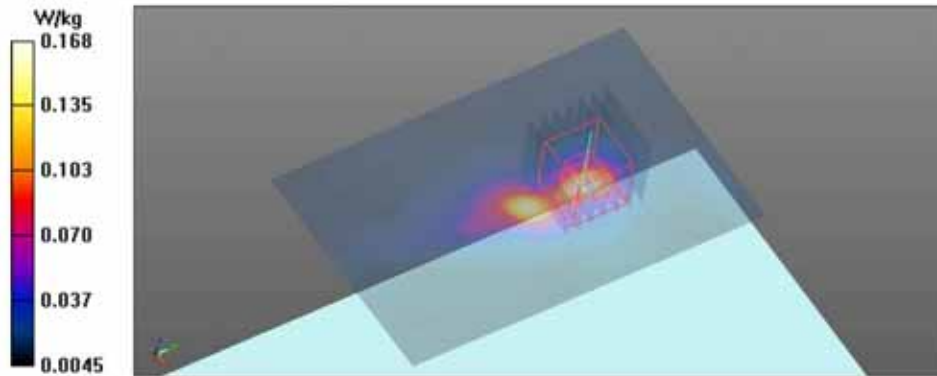

Appendix A.14 SAR Test Plots for WLAN 2450 MHz MIMO(Notebook Mode)

Date: 2018-10-04

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 2.4GHz_WLAN_802.11n_HT40_Base_CH6_MIMO.da53:0

Ambient Temp : 22.2 °C Tissue Temp : 21.3 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main/Area Scan (91x321x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.432 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Base_CH6_Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.205 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

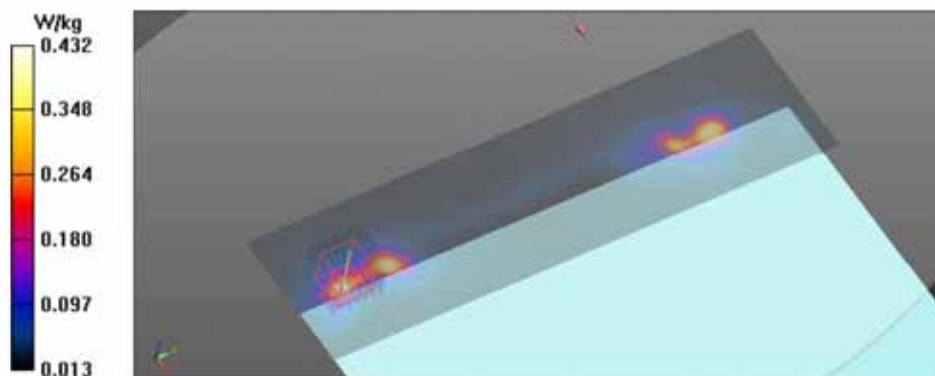

Appendix A.15 SAR Test Plots for WLAN 5300 MHz MIMO(Notebook Mode)

Date: 2018-10-05

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.3GHz WLAN 802.11ac_VHT80_Base_CH58_MIMO.da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.605$ S/m; $\epsilon_r = 48.617$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz WLAN_802.11ac_VHT80_Base_CH58_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.17 W/kg

Body/5.3GHz WLAN_802.11ac_VHT80_Base_CH58_MIMO/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.906 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.26 W/kg

SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 1.97 W/kg

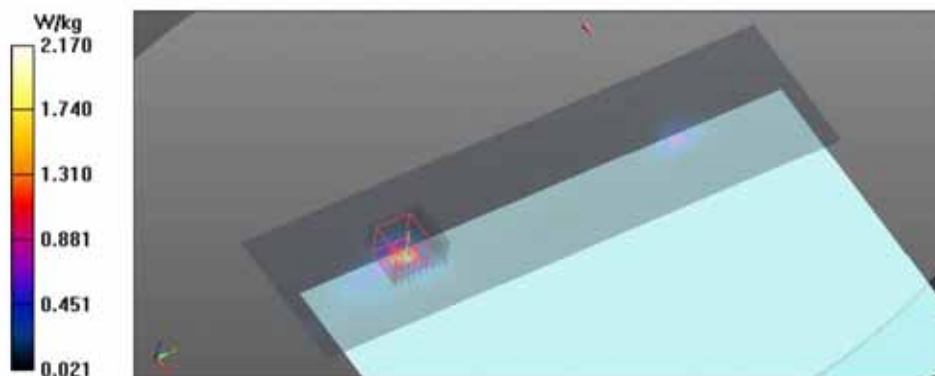

Appendix A.16 SAR Test Plots for WLAN 5600 MHz MIMO(Notebook Mode)

Date: 2018-10-08

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz WLAN 802.11ac_VHT80_Base_CH106_MIMO.da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.789$ S/m; $\epsilon_r = 48.219$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz WLAN_802.11ac_VHT80_Base_CH106_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Body/5.6GHz WLAN_802.11ac_VHT80_Base_CH106_MIMO/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.593 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

Body/5.6GHz WLAN_802.11ac_VHT80_Base_CH106_MIMO/Zoom Scan (9x9x7)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.593 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

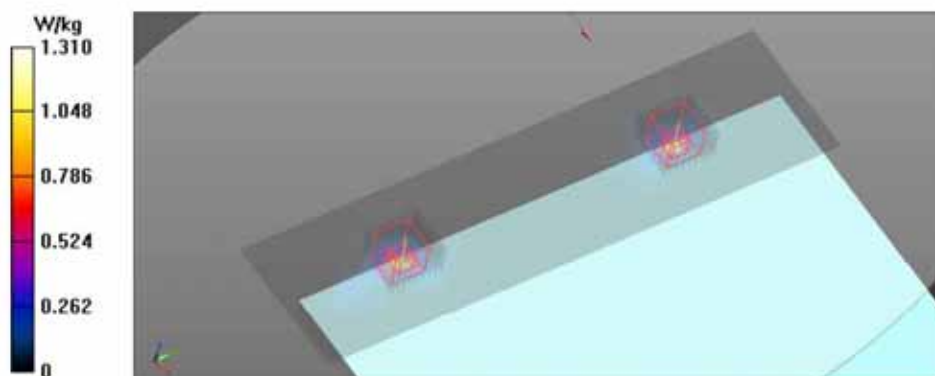

Appendix A.17 SAR Test Plots for WLAN 5800 MHz MIMO(Notebook Mode)

Date: 2018-10-09

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.8GHz_WLAN_802.11ac_VHT80_Base_CH155_MIMO_da53-0

Ambient Temp : 22.5 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.943$ S/m; $\epsilon_r = 48.584$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz_WLAN_802.11ac_VHT80_Base_CH155_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Base_CH155_MIMO/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.142 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Base_CH155_MIMO/Zoom Scan (9x9x7)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.142 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

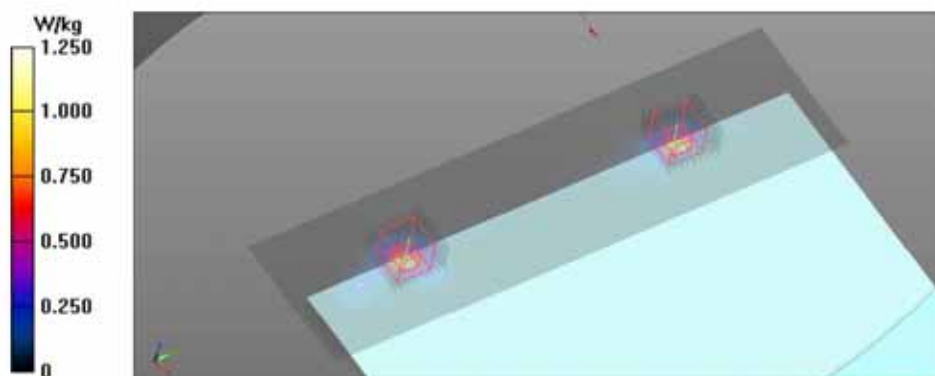

Appendix A.18 SAR Test Plots for WLAN 2450 MHz Main SISO(Tablet Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_Main.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 52.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_Main/Area Scan (91x141x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.39 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_Main/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.687 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

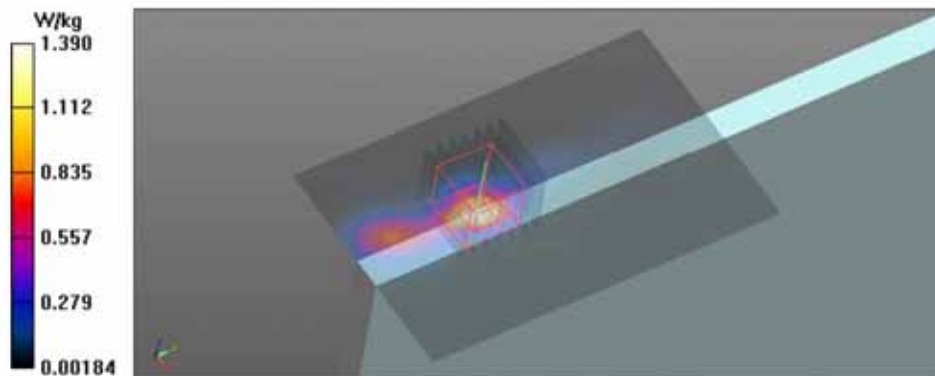

Appendix A.19 SAR Test Plots for WLAN 2450 MHz Aux SISO(Tablet Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [2.4GHz_WLAN_802.11b_Edge3_CH1_Aux da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 52.559$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11b_Edge3_CH1_Aux/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Body/2.4GHz_WLAN_802.11b_Edge3_CH1_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

Body/2.4GHz_WLAN_802.11b_Edge3_CH1_Aux/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 1.54 W/kg


Body/2.4GHz_WLAN_802.11b_Edge3_CH1_Aux/Zoom Scan (7x7x7)/Cube 2: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.984 W/kg

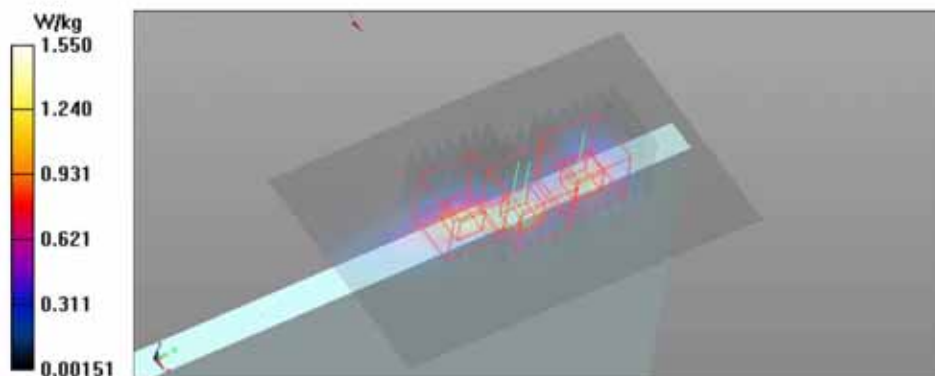

Appendix A.20 SAR Test Plots for WLAN 5300 MHz Main SISO(Tablet Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Main.da53-0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 49.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(144)SEMCAD X 14.6.10(7417)

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Main/Area Scan (81x121x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.64 W/kg

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Main/Zoom Scan (8x8x7)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.191 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Main/Zoom Scan (8x8x7)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.191 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

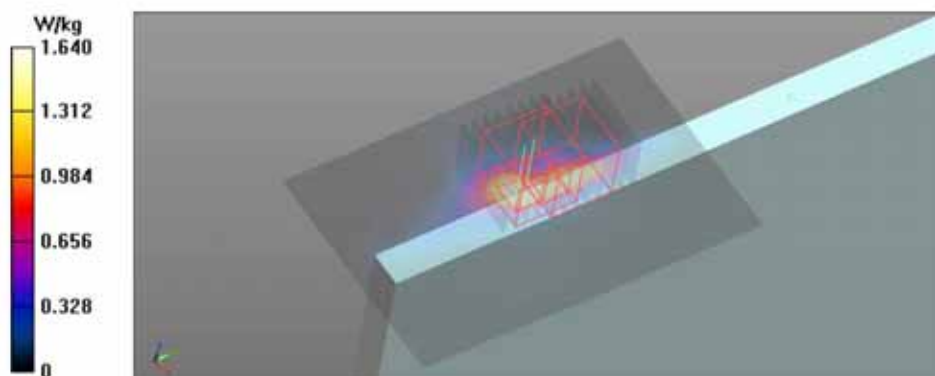

Appendix A.21 SAR Test Plots for WLAN 5300 MHz Aux SISO(Tablet Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Aux.da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 49.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Aux/Area Scan (81x121x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.73 W/kg

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_Aux/Zoom Scan (9x9x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.350 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 7.09 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 2.50 W/kg

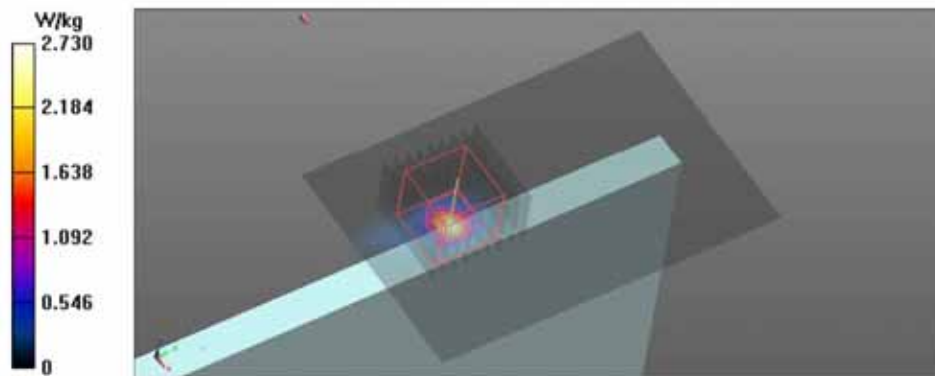

Appendix A.22 SAR Test Plots for WLAN 5600 MHz Main SISO(Tablet Mode)

Date: 2018-09-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH138_Main_Repeat Test.da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.6 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 6.029$ S/m; $\epsilon_r = 47.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH138_Main_Repeat Test/Area Scan (81x121x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.21 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH138_Main_Repeat Test/Zoom Scan (9x9x7)/Cube


0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.511 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.42 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 2.47 W/kg

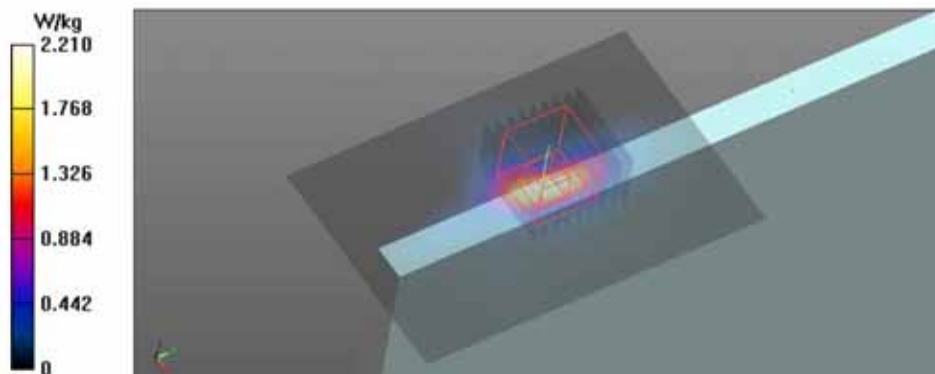

Appendix A.23 SAR Test Plots for WLAN 5600 MHz Aux SISO(Tablet Mode)

Date: 2018-09-20

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_Aux.da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.6 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.677$ S/m; $\epsilon_r = 48.039$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_Aux/Area Scan (81x121x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.56 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_Aux/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.452 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.04 W/kg

SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

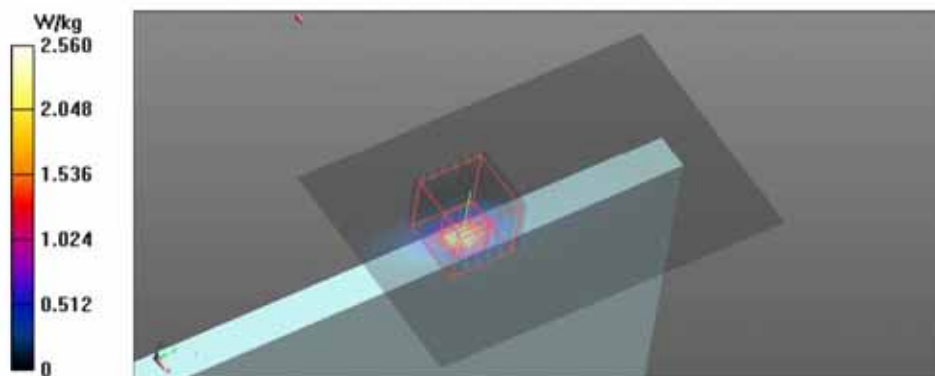

Appendix A.24 SAR Test Plots for WLAN 5800 MHz Main SISO(Tablet Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Main.da53:0

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.784$ S/m; $\epsilon_r = 48.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Main/Area Scan (81x121x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.47 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Main/Zoom Scan (8x8x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.409 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 5.14 W/kg

SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 2.44 W/kg

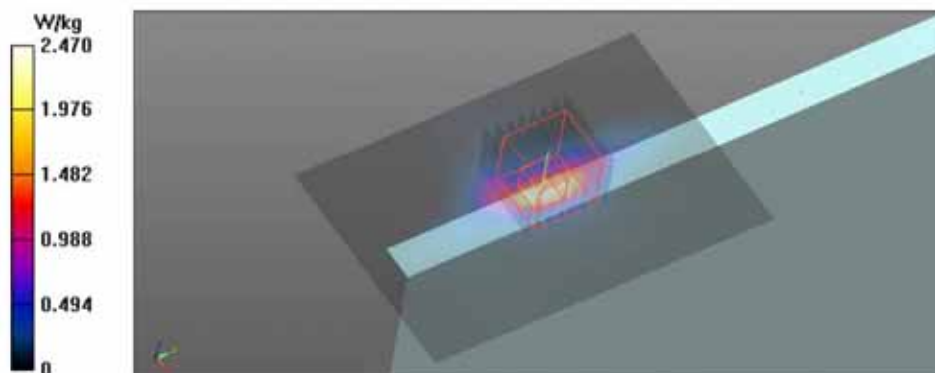

Appendix A.25 SAR Test Plots for WLAN 5800 MHz Aux SISO(Tablet Mode)

Date: 2018-09-21

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Aux.da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.784$ S/m; $\epsilon_r = 48.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Aux/Area Scan (81x121x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.22 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_Aux/Zoom Scan (8x8x7)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.554 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 6.24 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

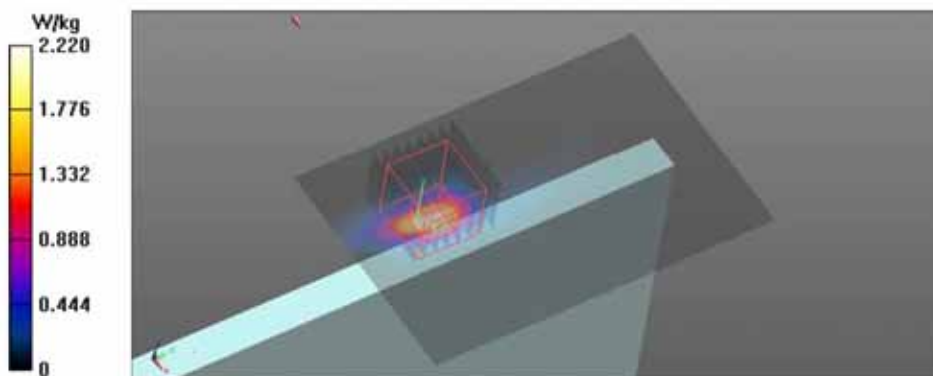

Appendix A.26 SAR Test Plots for Bluetooth (Tablet Mode)

Date: 2018-09-19

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [Bluetooth_Rear_CH78_da53.0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30978

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 52.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/Bluetooth_Rear_CH78/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.254 W/kg


Body/Bluetooth_Rear_CH78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.064 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

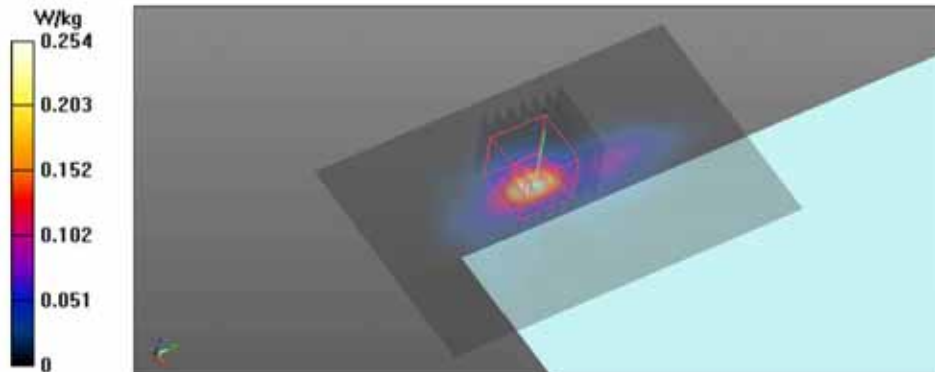

Appendix A.27 SAR Test Plots for WLAN 2450 MHz MIMO(Tablet Mode)

Date: 2018-10-04

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: 2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_MIMO.da53:0

Ambient Temp : 22.2 °C Tissue Temp : 21.3 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800070D

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.78, 7.78, 7.78); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.746 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_MIMO/Zoom Scan (8x11x7)/Cube 0: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.837 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_MIMO/Zoom Scan (8x11x7)/Cube 1: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.837 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

Body/2.4GHz_WLAN_802.11n_HT40_Edge3_CH6_MIMO/Zoom Scan (8x11x7)/Cube 2: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.837 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.583 W/kg

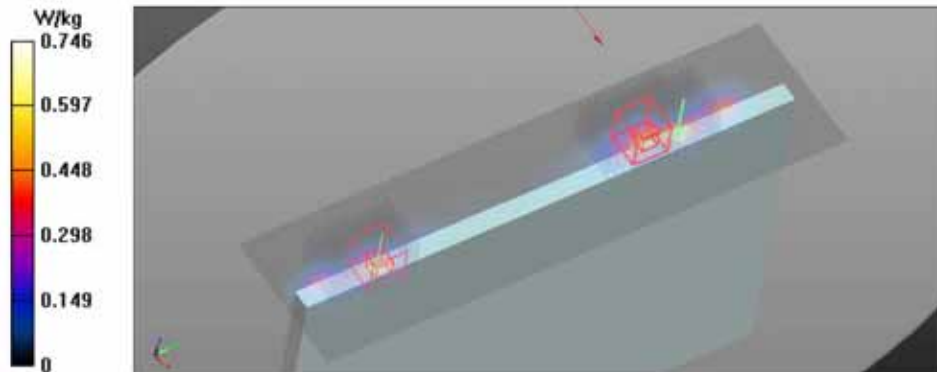

Appendix A.28 SAR Test Plots for WLAN 5300 MHz MIMO(Tablet Mode)

Date: 2018-10-05

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_MIMO.da53:0](#)

Ambient Temp : 22.4 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.605$ S/m; $\epsilon_r = 48.617$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.58, 4.58, 4.58); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 3.03 W/kg

Body/5.3GHz_WLAN_802.11ac_VHT80_Edge3_CH58_MIMO/Zoom Scan (9x9x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.261 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 5.22 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 2.29 W/kg

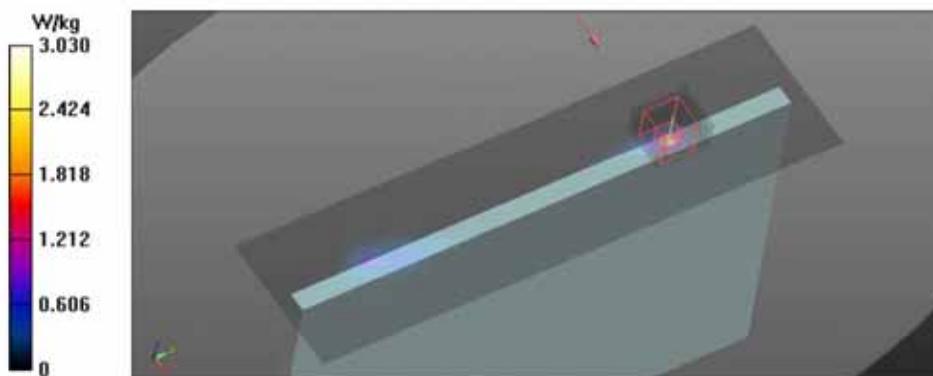

Appendix A.29 SAR Test Plots for WLAN 5600 MHz MIMO(Tablet Mode)

Date: 2018-10-08

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_MIMO.da53:0](#)

Ambient Temp : 22.3 °C Tissue Temp : 21.5 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.789$ S/m; $\epsilon_r = 48.219$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.03, 4.03, 4.03); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 3.01 W/kg

Body/5.6GHz_WLAN_802.11ac_VHT80_Edge3_CH106_MIMO/Zoom Scan (9x9x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.387 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

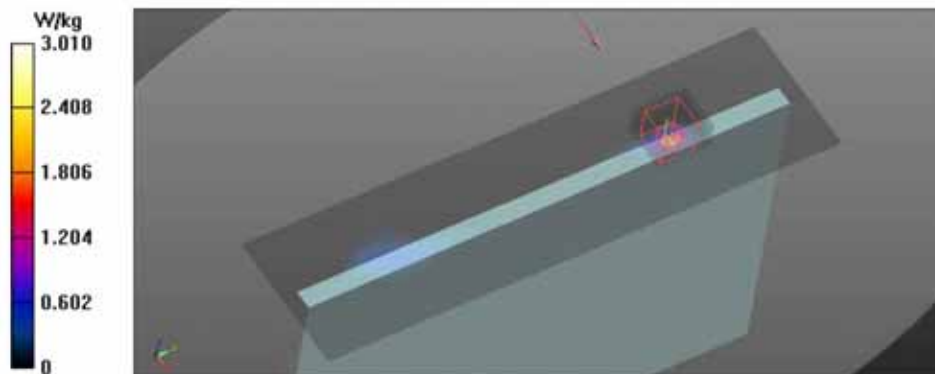

Appendix A.30 SAR Test Plots for WLAN 5800 MHz MIMO(Tablet Mode)

Date: 2018-10-09

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_MIMO.da53.0](#)

Ambient Temp : 22.5 °C Tissue Temp : 21.4 °C

DUT: NP930QBE; Type: NOTEBOOK PC; Serial: 0XHK91ZK800036F

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.943$ S/m; $\epsilon_r = 48.584$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.19, 4.19, 4.19); Calibrated: 4/25/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 7/23/2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1244
- DASY52 52.10.0(1446)SEMCAD X 14.6.10(7417)

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_MIMO/Area Scan (91x331x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_MIMO/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.728 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 4.46 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

Body/5.8GHz_WLAN_802.11ac_VHT80_Edge3_CH155_MIMO/Zoom Scan (9x9x7)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.728 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

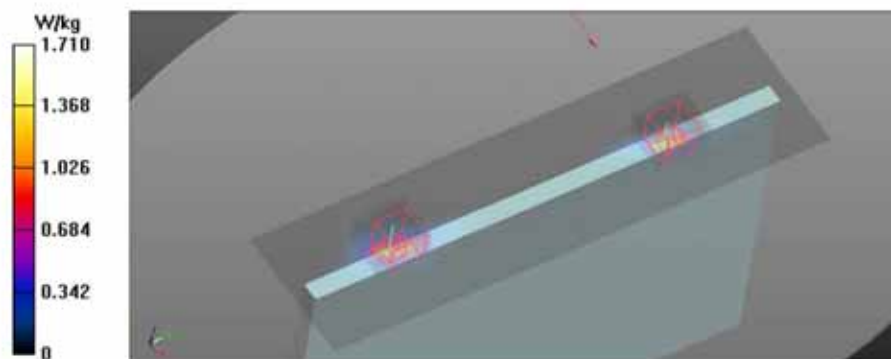

-THE END-