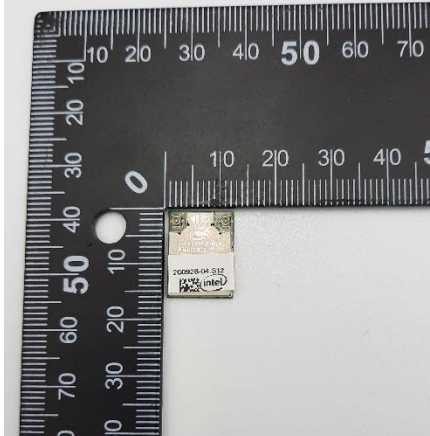
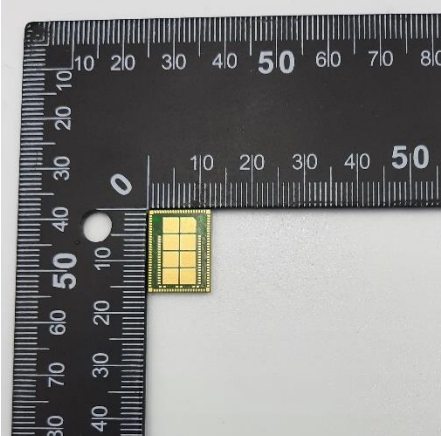
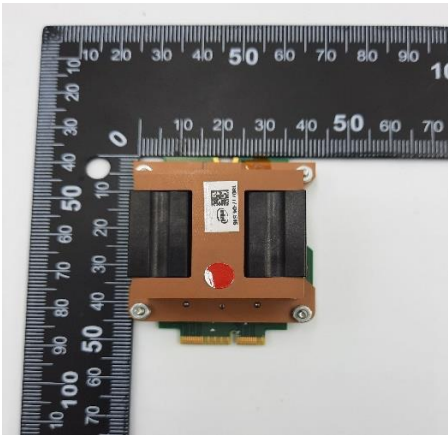
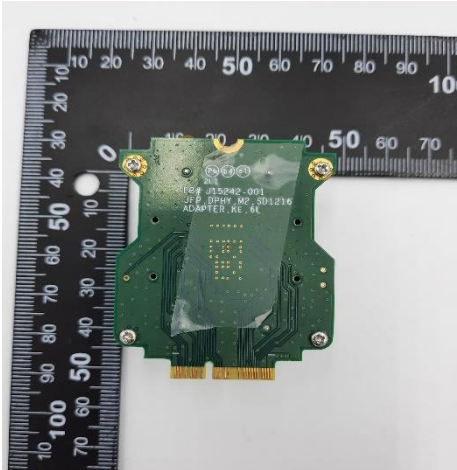
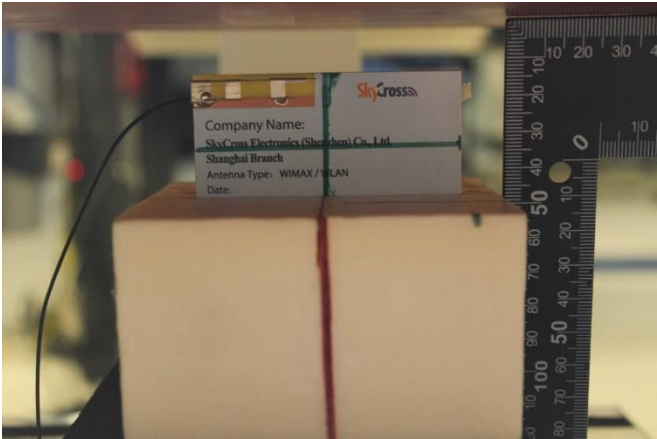
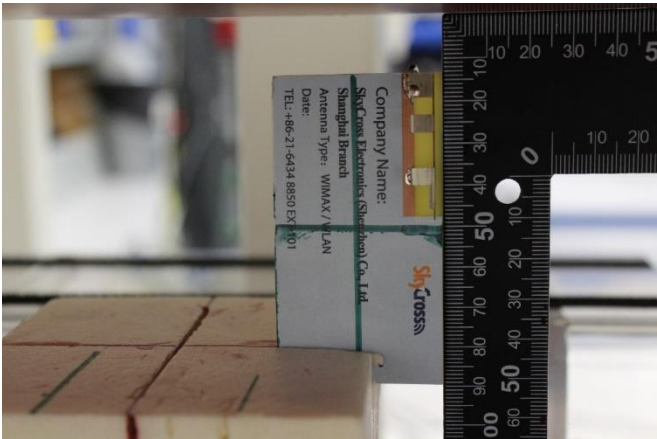
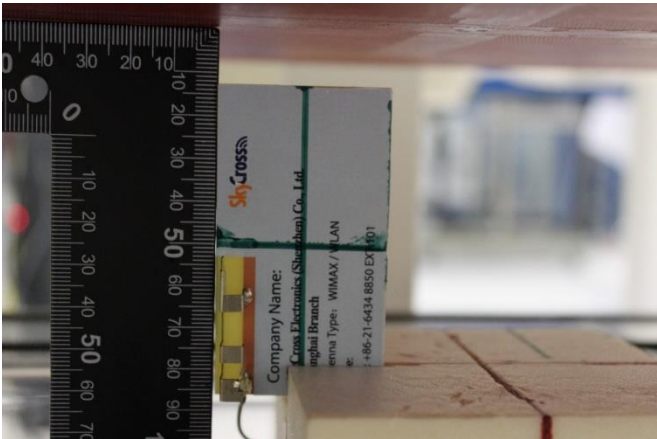
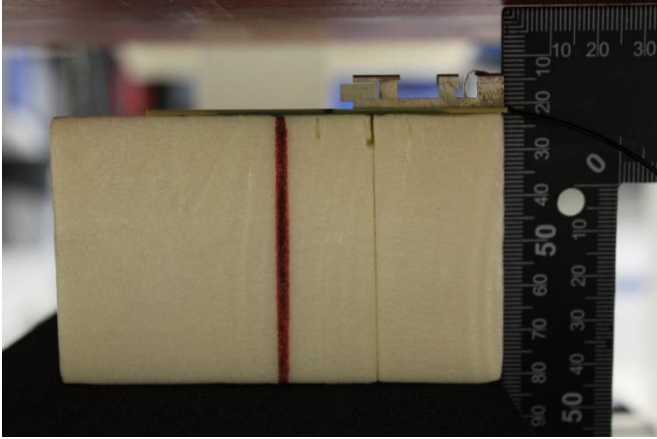
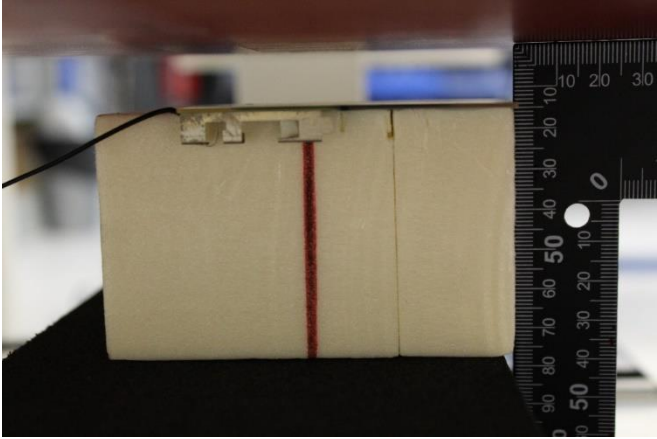


Annex F. Photographs



F.1 Test Sample

D2W Module: (Front) 200928-04.S12 	D2W Module: (Back) 200928-04.S12 
M2 Socket: (Front) 180717-04.S16 	M2 Socket: (Back) 180717-04.S16 
Platform Extender: 170220-02.S04 	Laptop PC Host: 170000-01.S15 

F.2 Test positions


Top Edge	Bottom Edge
	
Left Edge	Right Edge
	
Front Face	Back Face
	

F.3 Antenna host platform location and adjacent edge positions relative to the body

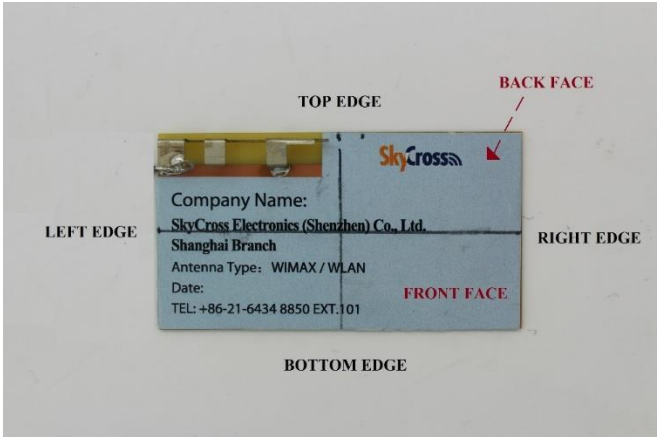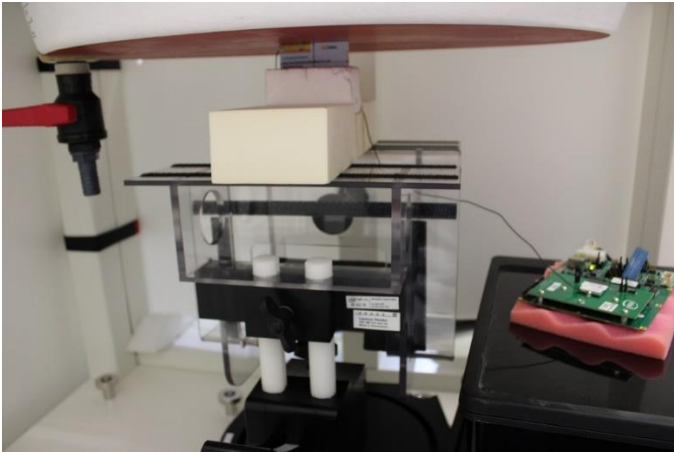Antenna Front View	Antenna Positions
 A photograph of the antenna's front view. A ruler is placed above the antenna for scale. The antenna is a rectangular circuit board with a yellow component at the top left. It features the 'SkyCross' logo and the following text: 'Company Name: SkyCross Electronics (Shenzhen) Co., Ltd. Shanghai Branch', 'Antenna Type: WIMAX / WLAN', 'Date:', and 'TEL: +86-21-6434 8850 EXT.101'.	 A photograph of the antenna with labels for its edges and faces. 'TOP EDGE' is at the top, 'BOTTOM EDGE' is at the bottom, 'LEFT EDGE' is on the left, and 'RIGHT EDGE' is on the right. The 'BACK FACE' is indicated by a red arrow pointing to the top right corner, and the 'FRONT FACE' is labeled in red at the bottom right.
General Setup	
 A photograph showing the general test setup. The antenna is mounted on a black stand with a yellow box on top. A green circuit board is visible on a red surface to the right.	

F.4 Phantom liquid level during measurements

ELI phantom Body liquid SAR Dasy SPEAG MBBL600-6000V6 Batch -160630-01

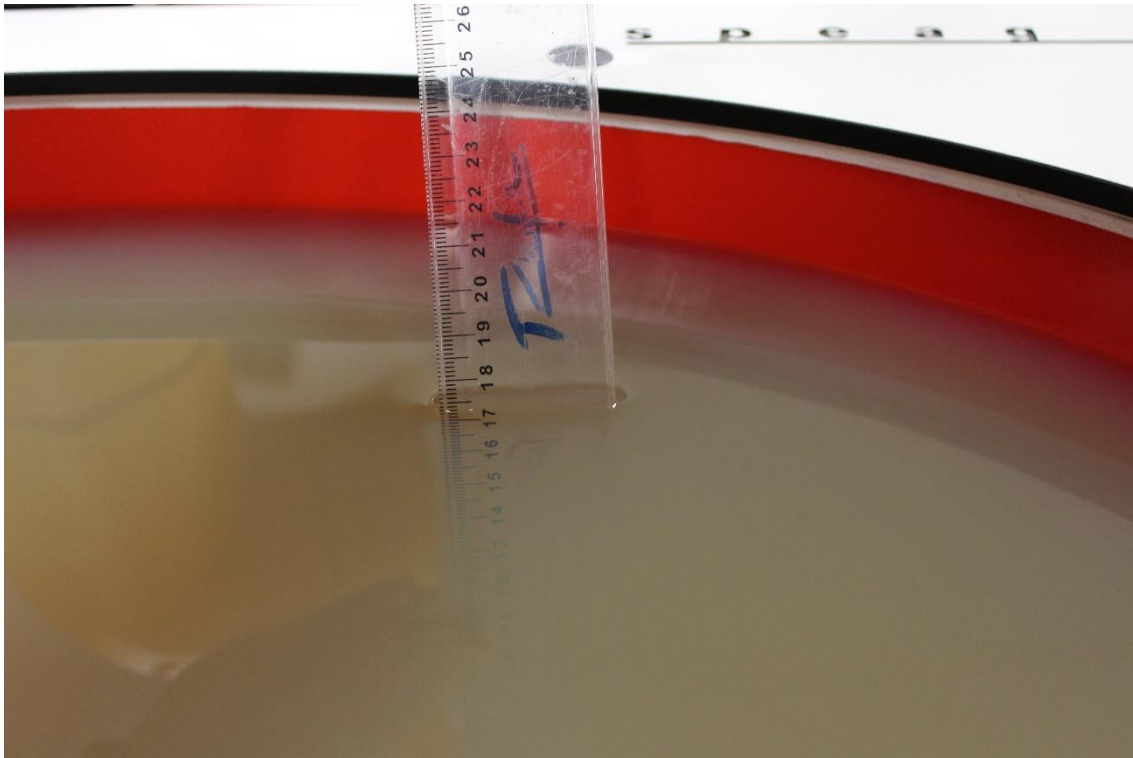

End of the report

This page is intentionally left blank and marks the last page of the test report.