




N° 1-6736  
Scope available  
on [www.cofrac.fr](http://www.cofrac.fr)



# TEST REPORT

EUT Description	Wireless Module installed in Laptop
Brand Name	Intel® WiFi-6 AX201
Model Name	AX201D2W
FCC/IC ID	FCC ID: PD9AX201D2; IC ID: 1000M-AX201D2
Date of Test Start/End	2020-04-07 / 2020-04-17
Features	802.11 a/b/g/n/ac/ax Wireless LAN + Bluetooth® 5.1 (see section 5)
Description	Platform: HSN-C06C + WNC (v1) / WNC (v2) antennas

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	<a href="mailto:steven.c.hackett@intel.com">steven.c.hackett@intel.com</a>

Reference Standards	FCC 47 CFR Part §2.1093	
	RSS-102, issue 5 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.16 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 9.43mm to antenna edge	

Test Report identification	200310-02.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

The test report shall not be reproduced in full, without written approval of the laboratory.

Reference to accreditation shall be used only by full reproduction of test report.

Issued & Reviewed by

Cheiel IN  
(Technical Manager)

Intel Corporation S.A.S – WRF Lab  
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France  
Tel. +33493001400 / Fax +33493001401

# Table of Contents

<b>1.</b>	<b>Standards, reference documents and applicable test methods.....</b>	<b>4</b>
<b>2.</b>	<b>General conditions, competences and guarantees .....</b>	<b>4</b>
<b>3.</b>	<b>Environmental Conditions.....</b>	<b>5</b>
<b>4.</b>	<b>Test samples.....</b>	<b>5</b>
<b>5.</b>	<b>EUT Features .....</b>	<b>6</b>
<b>6.</b>	<b>Remarks and comments .....</b>	<b>8</b>
<b>7.</b>	<b>Test Verdicts summary.....</b>	<b>8</b>
<b>8.</b>	<b>Document Revision History .....</b>	<b>8</b>
<b>Annex A.</b>	<b>Test &amp; System Description .....</b>	<b>9</b>
A.1	SAR DEFINITION.....	9
A.2	SPEAG SAR MEASUREMENT SYSTEM .....	10
A.2.1	<i>SAR Measurement Setup.....</i>	10
A.2.2	<i>E-Field Measurement Probe.....</i>	11
A.2.3	<i>SAM Phantom .....</i>	11
A.2.4	<i>Flat Phantom .....</i>	12
A.2.5	<i>Device Positioner.....</i>	12
A.3	DATA EVALUATION .....	13
A.4	SYSTEM AND LIQUID CHECK .....	15
A.4.1	<i>System Check .....</i>	15
A.4.2	<i>Liquid Check.....</i>	16
A.5	TEST EQUIPMENT LIST .....	17
A.5.1	<i>SAR System #1 .....</i>	17
A.5.2	<i>Shared Instrumentation .....</i>	17
A.5.3	<i>Tissue Simulant Liquid .....</i>	17
A.6	MEASUREMENT UNCERTAINTY EVALUATION .....	18
A.7	RF EXPOSURE LIMITS .....	20
<b>Annex B.</b>	<b>Test Results .....</b>	<b>21</b>
B.1	TEST CONDITIONS.....	21
B.1.1	<i>Test SAR Test positions relative to the phantom.....</i>	21
B.1.2	<i>Test signal, Output power and Test Frequencies .....</i>	21
B.1.3	<i>Evaluation Exclusion and Test Reductions.....</i>	22
B.2	CONDUCTED POWER MEASUREMENTS .....	24
B.2.1	<i>WLAN 2.4GHz.....</i>	24
B.2.2	<i>WLAN 5GHz (U-NII) .....</i>	25
B.2.3	<i>Bluetooth .....</i>	31
B.3	TISSUE PARAMETERS MEASUREMENT .....	32
B.4	SYSTEM CHECK MEASUREMENTS .....	32
B.5	SAR TEST RESULTS .....	33
B.5.1	<i>Bluetooth &amp; 802.11b/g/n/ax – 2.4GHz – DTS – BT (DSS).....</i>	33
B.5.2	<i>802.11a/n/ac/ax – 5.3 GHz – U-NII-2A.....</i>	33
B.5.3	<i>802.11a/n/ac/ax – 5.6 GHz – U-NII-2C.....</i>	33
B.5.4	<i>802.11a/n/ac/ax – 5.8 GHz – U-NII-3 .....</i>	33
B.5.4	<i>SAR Measurement Variability.....</i>	34
B.5.5	<i>Simultaneous Transmission SAR Evaluation.....</i>	35
<b>Annex C.</b>	<b>Test System Plots.....</b>	<b>36</b>
<b>Annex D.</b>	<b>TSL Dielectric Parameters .....</b>	<b>46</b>

D.1	BODY DTS 2450MHz .....	46
D.2	BODY 5200MHz-5800MHz .....	47
<b>Annex E.</b>	<b>Calibration Certificates .....</b>	<b>49</b>
<b>Annex F.</b>	<b>Photographs .....</b>	<b>51</b>
F.1	TEST SAMPLE .....	51
F.2	TEST POSITIONS.....	52
F.3	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY.....	53
F.4	PHANTOM LIQUID LEVEL DURING MEASUREMENTS .....	54

## 1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices.
2. FCC OET KDB 248227 D01 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
3. FCC OET KDB 447498 D01 – RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.
4. FCC OET KDB 616217 D04 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.
5. FCC OET KDB 865664 D01 – SAR Measurement Requirements for 100 MHz to 6 GHz.
6. FCC OET KDB 865664 D02 – RF Exposure Compliance Reporting and Documentation Considerations.
7. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
8. ISED RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).
9. ISED RSS-102 Supplementary Procedures SPR-001 SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (Laptop Mode / Tablet Mode)
10. ISED Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures.
11. ISED Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard.

## 2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

### 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	20.3°C ± 2°C
Humidity	38% ± 10%
Liquid Temperature	21°C ± 2°C

### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200310-02.S02	Wireless Module installed in Laptop	AX201D2W +HSN-C06C	FPM5001601	2020-03-25	WNC Antenna v1
#02	200310-02.S03	Wireless Module installed in Laptop	AX201D2W +HSN-C06C	FPM5001530	2020-03-25	WNC Antenna v2

## 5. EUT Features

Brand Name	Intel® WiFi-6 AX201																				
Model Name	AX201D2W																				
Software Version	11.1941.0-10270																				
Driver Version	21.60.2.1																				
Prototype / Production	Production																				
Host Identification	HSN-C06C																				
Exposure Conditions	Body worn																				
Supported Radios	802.11b/g/n/ax 802.11a/n/ac/ax Bluetooth	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5825.0 MHz) 2.4GHz (2400.0 – 2483.5 MHz)																			
Antenna Information "information provided by the customer"	<b>WNCv1</b> <table border="1"> <tr> <td>Antenna Port</td> <td>Type</td> <td>Part Number</td> </tr> <tr> <td>Main (DRTU Chain B)</td> <td>PIFA</td> <td>DC33002E600 (81ELA415.G13)</td> </tr> <tr> <td>Aux (DTRU Chain A)</td> <td>PIFA</td> <td>DC33002E600 (81ELA415.G13)</td> </tr> </table> <b>WNCv2</b> <table border="1"> <tr> <td>Antenna Port</td> <td>Type</td> <td>Part Number</td> </tr> <tr> <td>Main (DRTU Chain B)</td> <td>PIFA</td> <td>DC33002G200 (81ELA415.G18)</td> </tr> <tr> <td>Aux (DTRU Chain A)</td> <td>PIFA</td> <td>DC33002G200 (81ELA415.G18)</td> </tr> </table>			Antenna Port	Type	Part Number	Main (DRTU Chain B)	PIFA	DC33002E600 (81ELA415.G13)	Aux (DTRU Chain A)	PIFA	DC33002E600 (81ELA415.G13)	Antenna Port	Type	Part Number	Main (DRTU Chain B)	PIFA	DC33002G200 (81ELA415.G18)	Aux (DTRU Chain A)	PIFA	DC33002G200 (81ELA415.G18)
Antenna Port	Type	Part Number																			
Main (DRTU Chain B)	PIFA	DC33002E600 (81ELA415.G13)																			
Aux (DTRU Chain A)	PIFA	DC33002E600 (81ELA415.G13)																			
Antenna Port	Type	Part Number																			
Main (DRTU Chain B)	PIFA	DC33002G200 (81ELA415.G18)																			
Aux (DTRU Chain A)	PIFA	DC33002G200 (81ELA415.G18)																			
See Annex F for more details on antennas location.																					
Simultaneous Transmission Configurations	WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux																				
Additional Information	No WWAN transmitter is considered in this report																				
	5.60-5.65 GHz band (TDWR) is supported by the device																				
	Band gap is supported by the device																				

### Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Max. Measured Conducted Power (dBm)
802.11b/g/n/ax	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	19.89
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	5.2GHz	5150-5250	NM
			5.3GHz	5250-5350	20.00
			5.6GHz	5475-5725	19.96
			5.8GHz	5725-5850	20.00
BDR/EDR v5.1	78%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	10.46
Bluetooth LE v5.1	65%	GFSK	2.4GHz	2400-2483.5	NM

NM: Not Measured

## Maximum Output power specification + Tune up tolerance limit

			Transmitter Chain (dBm) (SISO)		Transmitter Chain (dBm) (MIMO)	
Radio band Name	802.11	Bandwidth (MHz)	Main	Aux	Main	Aux
2.4GHz	BLE v5.1	2		7.00		
	Bluetooth v5.1	1		11.00		
DTS	802.11b	20	20.00	20.00		
	802.11g	20	20.00	20.00		
	802.11n20	20	20.00	20.00	17.50	17.50
	802.11n40	40	16.00	16.00	14.50	14.50
	802.11ax20	20	20.00	20.00	17.50	17.50
	802.11ax40	40	16.00	16.00	14.50	14.50
UNII-1	802.11a	20	19.50	20.00		
	802.11n20	20	19.50	20.00	18.50	18.50
	802.11n40	40	19.50	20.00	18.50	18.50
	802.11ax20	20	19.50	20.00	18.50	18.50
	802.11ax40	40	19.50	20.00	18.50	18.50
	802.11ac80	80	18.25	18.50	16.00	16.00
	802.11ax80	80	18.25	18.50	16.00	16.00
UNII-2A	802.11a	20	19.50	20.00		
	802.11n20	20	19.50	20.00	18.50	18.50
	802.11n40	40	19.50	20.00	18.50	18.50
	802.11ax20	20	19.50	20.00	18.50	18.50
	802.11ax40	40	19.50	20.00	18.50	18.50
	802.11ac80	80	17.75	17.75	14.5	14.5
	802.11ax80	80	17.75	17.75	14.5	14.5
	802.11ac160	160	15.25	14.75	12.75	12.75
	802.11ax160	160	15.25	14.75	12.75	12.75
UNII-2C	802.11a	20	19.50	20.00		
	802.11n20	20	19.50	20.00	18.75	18.75
	802.11n40	40	19.50	20.00	18.50	18.50
	802.11ax20	20	19.50	20.00	18.75	18.75
	802.11ax40	40	19.50	20.00	18.50	18.50
	802.11ac80	80	19.50	19.75	18.25	18.25
	802.11ax80	80	19.50	19.75	18.25	18.25
	802.11ac160	160	14.50	14.25	13.25	13.25
	802.11ax160	160	14.50	14.25	13.25	13.25
UNII-3	802.11a	20	19.50	20.00		
	802.11n20	20	19.50	20.00	18.75	18.75
	802.11n40	40	19.50	20.00	19.50	19.50
	802.11ax20	20	19.50	20.00	18.75	18.75
	802.11ax40	40	19.50	20.00	19.50	19.50
	802.11ac80	80	19.50	20.00	19.00	19.00
	802.11ax80	80	19.50	20.00	19.00	19.00

## 6. Remarks and comments

1. The conducted values are obtained by applying the BIOS SAR power values to the AX201D2W Intel module installed in the HSN-C06C identified in this report, as requested by the customer
2. Variability and simultaneous transmission results shown in this report are based on the highest SAR value obtained among all antennas or device configurations considered on this report.
3. Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.8.

## 7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b//g/n/ax	2.4GHz	0.29	P
802.11a/n/ac/ax	5.2GHz	NM	NA
	5.3GHz	1.08	P
	5.6GHz	1.12	P
	5.8GHz	1.16	P
	Bluetooth	0.03	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)		
	Equipment Class		
	DTS	DSS	U-NII
Body Worn	0.29	0.03	1.16
Simultaneous Tx	Sum-SAR:0.45	Sum-SAR: 1.32 SPLSR: NR	Sum-SAR: 1.32 SPLSR: NR

Considering the results of the performed test according to FCC 47CFR Part 2.1093 and ISED RSS 102, Issue 5 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

## 8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev. 00	2020-04-17	A. Lounes	First Issue

# Annex A. Test & System Description

---

## A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left( \frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left( \frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m<sup>3</sup>)

E = RMS electric field strength (V/m)

## A.2 SPEAG SAR Measurement System

### A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

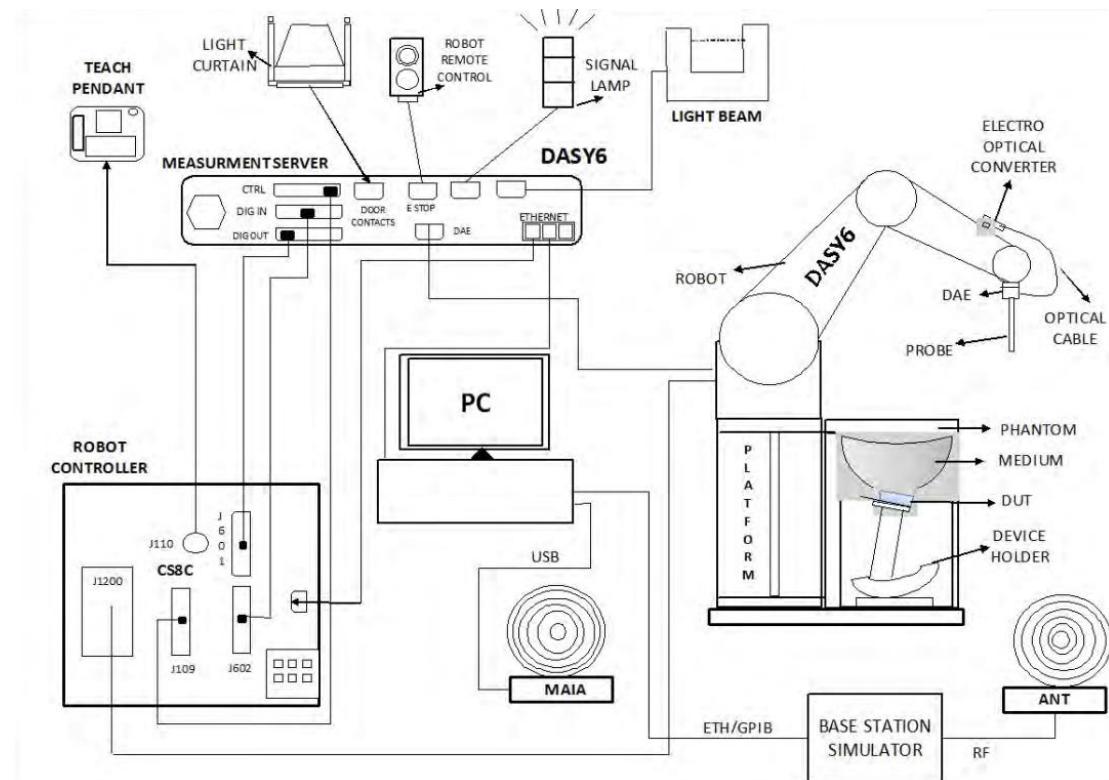

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool.

### A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:

Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	$\pm 0.3$ dB
Hemispherical Isotropy (in human-equivalent liquids)	$\pm 0.5$ dB
Linearity	$\pm 0.2$ dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

### A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Shell thickness at ERP	6 $\pm$ 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm



### A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm



### A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



### A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than  $\pm 1$  mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within  $\pm 30$ ° of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than  $\pm 30$ °, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of  $\pm 5\%$ .

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


## A.4 System and Liquid Check

### A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

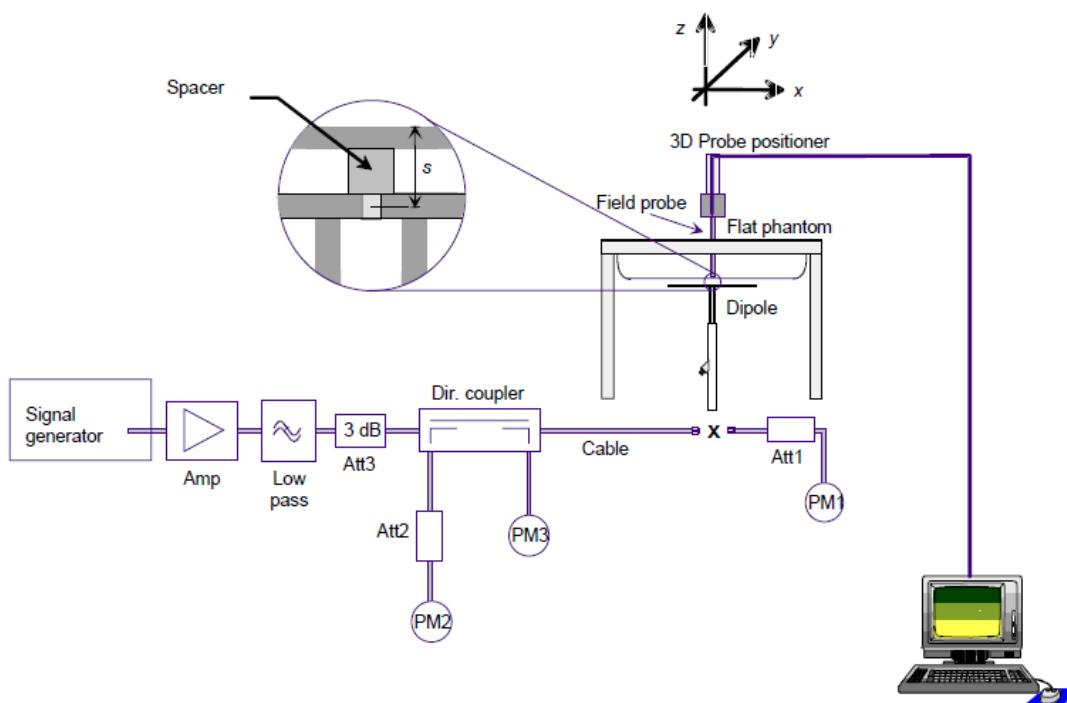

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

#### A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency		Body SAR	
(MHz)	$\epsilon_r$ (F/m)	$\sigma$ (S/m)	
150	61.9	0.80	
300	58.2	0.92	
450	56.7	0.94	
835	55.2	0.97	
900	55.0	1.05	
1450	54.0	1.30	
1800-2000	53.3	1.52	
2450	52.7	1.95	
3000	52.0	2.73	
5800	48.2	6.00	

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ .

## A.5 Test Equipment List

### A.5.1 SAR System #1

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0218	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	NA	NA
0221	SAM Phantom	Twin SAM v5.0	1838	SPEAG	NA	NA
0223	Measurement SW	DASY6 6.8.0.14623	9-618AE2F1	SPEAG	NA	NA
0229	Light Beam Unit	SE UKS 030 AA	-	Di-soric	NA	NA
0231	6-axis Robot	TX60 L	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
0233	Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
0243	Electro-Optical Converter	EOC60	1076	SPEAG	NA	NA
0637	Oval Flat Phantom	ELI v8.0	2059	SPEAG	NA	NA
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	2019-12-16	2020-12-16
0418	Data Acquisition Electronics	DAE4	1496	SPEAG	2019-12-05	2020-12-05

### A.5.2 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0098	USB Power Sensor	NRP-Z81	102278	R&S	2019-04-02	2021-04-02
0099	USB Power Sensor	NRP-Z81	102279	R&S	2019-04-02	2021-04-02
0114	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	NA	NA
0170	Power Amplifier	SAM-01	151922	ETS-Lindgren	NA	NA
0224	Liquid measurement SW	DAK-3.5 V2.6.0.5	9-2687B491	SPEAG	NA	NA
0237	Dielectric Probe Kit	DAK-3.5	1037	SPEAG	2019-07-16	2021-07-16
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	2018-05-18	2020-05-18
0412	Coupler	CD0.5-8-20-30	1251-002	Amd-group	NA	NA
0124	5GHz System Validation Dipole	D5GHzv2	1164	SPEAG	2019-05-20	2021-05-20
0619	USB Power Sensor	NRP-Z81	104381	R&S	2018-04-16	2020-04-16
0655	Vector Reflectometer	PLANAR R140	0190616	Copper Mountain Technologies	2019-08-07	2021-08-07
0799	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-FBFD5A	AVTECH	2019-06-27	2021-06-27
0880	Thermometer	925	34822881	Testo	2019-11-19	2021-11-19

### A.5.3 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG MBB600-6000V6 Batch 160630-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol

## A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

### SAR System #1

SPEAG DASY6 Uncertainty Budget According to IEEE 1528-2013 and IEC 62209-1/2016 (0.3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
<b>Measurement System</b>								
Probe Calibration	$\pm 7.00$	N	1	1	1	$\pm 7.00$	$\pm 7.00$	$\infty$
Axial Isotropy	$\pm 4.7 \%$	R	$\sqrt{3}$	0.7	0.7	$\pm 1.9 \%$	$\pm 1.9 \%$	$\infty$
Hemispherical Isotropy	$\pm 9.6 \%$	R	$\sqrt{3}$	0.7	0.7	$\pm 3.9 \%$	$\pm 3.9 \%$	$\infty$
Boundary Effects	$\pm 2.0 \%$	R	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	$\infty$
Linearity	$\pm 4.7 \%$	R	$\sqrt{3}$	1	1	$\pm 2.7 \%$	$\pm 2.7 \%$	$\infty$
System Detection Limits	$\pm 1.0 \%$	R	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$	$\infty$
Modulation Response	$\pm 2.4 \%$	R	$\sqrt{3}$	1	1	$\pm 1.4 \%$	$\pm 1.4 \%$	$\infty$
Readout Electronics	$\pm 0.3 \%$	N	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	$\infty$
Response Time	$\pm 0.8 \%$	R	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$	$\infty$
Integration Time	$\pm 2.6 \%$	R	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	$\infty$
RF Ambient Noise	$\pm 3.0 \%$	R	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	$\infty$
RF Ambient Reflections	$\pm 3.0 \%$	R	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	$\infty$
Probe Positioner	$\pm 0.04 \%$	R	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	$\infty$
Probe Positioning	$\pm 0.8 \%$	R	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$	$\infty$
Max. SAR Eval.	$\pm 4.0 \%$	R	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	$\infty$
<b>Test Sample Related</b>								
Device Positioning	$\pm 2.9 \%$	N	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6 \%$	N	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0 \%$	R	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	$\infty$
Power Scaling	$\pm 0.0 \%$	R	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	$\infty$
<b>Phantom and Setup</b>								
Phantom Uncertainty	$\pm 6.6 \%$	R	$\sqrt{3}$	1	1	$\pm 3.8 \%$	$\pm 3.8 \%$	$\infty$
SAR correction	$\pm 1.9 \%$	N	$\sqrt{3}$	1	0.84	$\pm 1.9 \%$	$\pm 1.6 \%$	$\infty$
Liquid Conductivity (mea.) DAK	$\pm 2.5 \%$	N	$\sqrt{3}$	0.78	0.71	$\pm 2.0 \%$	$\pm 1.8 \%$	$\infty$
Liquid Permittivity (mea.) DAK	$\pm 2.5 \%$	N	$\sqrt{3}$	0.23	0.26	$\pm 0.6 \%$	$\pm 0.7 \%$	$\infty$
Temp. unc. - Conductivity BB	$\pm 3.4 \%$	R	$\sqrt{3}$	0.78	0.71	$\pm 1.5 \%$	$\pm 1.4 \%$	$\infty$
Temp. unc. - Permittivity BB	$\pm 0.4 \%$	R	$\sqrt{3}$	0.23	0.26	$\pm 0.1 \%$	$\pm 0.1 \%$	$\infty$
Combined Std. Uncertainty	Combine						$\pm 11.6 \%$	$\pm 11.5$
Expanded STD Uncertainty	Expande						$\pm 23.2\%$	$\pm 23.00$

SPEAG DASY6 Uncertainty Budget According to IEC 62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
<b>Measurement System</b>								
Probe Calibration	±7.00 %	N	1	1	1	±7.00 %	±7.00 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
Modulation Response	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Post-processing	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
<b>Test Sample Related</b>								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scaling	±0.0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±7.6 %	R	√3	1	1	±4.4 %	±4.4 %	∞
SAR correction	±1.9 %	N	√3	1	0.84	±1.9 %	±1.6 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	N	√3	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	N	√3	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.6 %	±11.6 %	605
<b>Expanded STD Uncertainty</b>						±23.3 %	±23.2 %	

## A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 and ISED RSS 102 issue 5 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	<b>1.6 W/kg</b>
Whole body average SAR	<b>0.08 W/kg</b>
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	<b>4.0 W/kg</b>

# Annex B. Test Results

---

## B.1 Test Conditions

### B.1.1 Test SAR Test positions relative to the phantom

The device under test was an Intel® WiFi-6 AX201 card inside a Notebook host platform (HSN-C06C) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 11.1941.0-10270) and each channel was measured using a broadband power meter to determine the maximum average power.

According to FCC OET KDB 616217 D04, laptop position should be tested for SAR compliance with the display screen opened at an angle of 90° to the keyboard compartment and the notebook bottom surface must be touching the phantom.

See B.1.3.1 for a more detailed list of the applied reductions.

See *F.2 Test positions* section for more information on the tested positions.

### B.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

### B.1.3 Evaluation Exclusion and Test Reductions

#### B.1.3.1 SAR evaluation exclusion

The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 v06 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances  $\leq 50\text{mm}$ , the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune - up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[ \sqrt{f_{(\text{GHz})}} \right] \leq 3.0 \text{ for 1g SAR, and } \leq 7.5 \text{ for 10g extremity SAR} \quad (1)$$

Where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50\text{ mm}$ , and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5\text{ mm}$ , a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances  $> 50\text{ mm}$ , the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot (f_{\text{MHz}}/150))\text{mW}, \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot 10)\text{mW}, \quad (3)$$

for 1500MHz and  $\leq 6\text{GHz}$

LAN Antenna	Band Name	Output power		Laptop	Laptop
		dBm	mW		
WLAN Main	DTS	20.0	100.0	>50	T
	U-NII-1	19.5	89.1	>50	R
	U-NII-2A	20.0	100.0	>50	T
	U-NII-2C	20.0	100.0	>50	T
	U-NII-3	20.0	100.0	>50	T
WLAN Aux	DTS	20.0	100.0	>50	T
	U-NII-1	20.0	100.0	>50	R
	U-NII-2A	19.5	89.1	>50	T
	U-NII-2C	19.5	89.1	>50	T
	U-NII-3	19.5	89.1	>50	T
	BT	11.0	12.6	>50	T

T: Tested position

R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

### B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
- $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
- $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$

### WLAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
DSSS	<p>According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following:</p> <ul style="list-style-type: none"> <li>▪ When the reported SAR of the highest measured maximum output power channel for the exposure configuration is <math>\leq 0.8 \text{ W/kg}</math>, no further SAR testing is required for 802.11b DSSS in that exposure configuration.</li> <li>▪ When the reported SAR is <math>&gt; 0.8 \text{ W/kg}</math>, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is <math>&gt; 1.2 \text{ W/kg}</math>, SAR is required for the third channel.</li> </ul> <p>According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is <math>\leq 1.2 \text{ W/kg}</math>.</p>
OFDM	<p>According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.</p> <p>According to FCC OET KDB 248227 D01, an <i>initial test configuration</i> is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.</p> <p>The <i>initial test configuration</i> for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures.</p> <p>According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is <math>&gt; 0.8 \text{ W/kg}</math>, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is <math>\leq 1.2 \text{ W/kg}</math> or all required channels are tested.</p>

## B.2 Conducted Power Measurements

### B.2.1 WLAN 2.4GHz

Average power (dBm)							Main transmitter			Aux transmitter			
Radio	Band	802.11	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	WNC v1	WNC v2	Tune-up Power	WNC v1	WNC v2	Tune-up Power	
DTS	2.4GHz	802.11b	20	1	1	2412	19.09	19.13	19.25	19.42	19.35	19.50	
					6	2437	19.82	19.89	20.00	19.76	19.78	20.00	
					11	2462	19.30	19.47	19.50	19.28	19.33	19.50	
		802.11g		6	1	2412	NR	NR	17.00	NR	NR	16.75	
					6	2437	NR	NR	20.00	NR	NR	20.00	
					11	2462	NR	NR	15.00	NR	NR	15.50	
		802.11n20		HT0	1	2412	NR	NR	17.00	NR	NR	16.75	
					6	2437	NR	NR	20.00	NR	NR	20.00	
					11	2462	NR	NR	15.00	NR	NR	15.50	
		802.11ax20		HE0	1	2412	NR	NR	17.00	NR	NR	16.75	
					6	2437	NR	NR	20.00	NR	NR	20.00	
					11	2462	NR	NR	15.00	NR	NR	15.50	
		802.11n40	40	HT0	3	2422	NR	NR	16.00	NR	NR	16.00	
					6	2437	NR	NR	16.00	NR	NR	16.00	
					9	2452	NR	NR	16.00	NR	NR	16.00	
		802.11ax40		HE0	3	2422	NR	NR	16.00	NR	NR	16.00	
					6	2437	NR	NR	16.00	NR	NR	16.00	
					9	2452	NR	NR	16.00	NR	NR	16.00	

Initial test configuration

1. NR: Not Required:

- As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n/ax channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{W/kg}$ .
- When the reported SAR of the initial test configuration is  $> 0.8\text{ W/kg}$ , SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.

## B.2.2 WLAN 5GHz (U-NII)

### B.2.2.1 WLAN 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A)

Average power (dBm)							Main transmitter			Aux transmitter			
Radio	Band	802.11	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	WNC v1	WNC v2	Tune-up Power	WNC v1	WNC v2	Tune-up Power	
UNII-1	5.2GHz	802.11a	20	6	36	5180	NR	NR	18.50	NR	NR	18.50	
					40	5200	NR	NR	19.50	NR	NR	19.50	
					44	5220	NR	NR	19.50	NR	NR	20.00	
					48	5240	NR	NR	19.50	NR	NR	20.00	
		802.11n 20		HT0	36	5180	NR	NR	18.50	NR	NR	18.50	
					40	5200	NR	NR	19.50	NR	NR	19.50	
					44	5220	NR	NR	19.50	NR	NR	20.00	
					48	5240	NR	NR	19.50	NR	NR	20.00	
		802.11a x20		HE0	36	5180	NR	NR	18.50	NR	NR	18.50	
					40	5200	NR	NR	19.50	NR	NR	19.50	
					44	5220	NR	NR	19.50	NR	NR	20.00	
					48	5240	NR	NR	19.50	NR	NR	20.00	
		802.11n 40	40	HT0	38	5190	NR	NR	18.50	NR	NR	18.50	
					46	5230	NR	NR	19.50	NR	NR	20.00	
		802.11a x40		HE0	38	5190	NR	NR	18.50	NR	NR	18.50	
					46	5230	NR	NR	19.50	NR	NR	20.00	
		802.11a c80	80	VHT0	42	5210	NR	NR	18.25	NR	NR	18.50	
		802.11a x80				5210	NR	NR	18.25	NR	NR	18.50	

#### Initial test configuration

##### 1. NR: Not Required:

- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for U-NII-1 band (see §0 in this document).
- Additional conducted power measurement is required when reported SAR is  $> 1.2 \text{ W/kg}$ . In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
- When the reported SAR of the initial test configuration is  $> 0.8 \text{ W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $= 1.2 \text{ W/kg}$  or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for that subsequent test configuration
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2 \text{ W/kg}$  or until all required channels are tested.

Radio	Band	Average power (dBm)						Main transmitter			Aux transmitter		
		802.11	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	WNC v1	WNC v2	Tune-up Power	WNC v1	WNC v2	Tune-up Power	
UNII-2A	5.3GHz	802.11a	20	6	52	5260	NR	NR	19.50	NR	NR	20.00	
					56	5280	NR	NR	19.50	NR	NR	20.00	
					60	5300	NR	NR	19.50	NR	NR	20.00	
					64	5320	NR	NR	18.25	NR	NR	18.00	
		802.11n20	20	HT0	52	5260	NR	NR	19.50	NR	NR	20.00	
					56	5280	NR	NR	19.50	NR	NR	20.00	
					60	5300	NR	NR	19.50	NR	NR	20.00	
					64	5320	NR	NR	18.25	NR	NR	18.00	
		802.11ax20	20	HE0	52	5260	NR	NR	19.50	NR	NR	20.00	
					56	5280	NR	NR	19.50	NR	NR	20.00	
					60	5300	NR	NR	19.50	NR	NR	20.00	
					64	5320	NR	NR	18.25	NR	NR	18.00	
		802.11n40	40	HT0	54	5270	19.36	19.45	19.50	19.86	20.00	20.00	
					62	5310	NR	NR	17.25	NR	NR	17.25	
		802.11ax40	40	HE0	54	5270	NR	NR	19.50	NR	NR	20.00	
					62	5310	NR	NR	17.25	NR	NR	17.25	
		802.11ac80	80	VHT0	58	5290	NR	NR	17.75	NR	NR	17.75	
		802.11ax80				5290	NR	NR	17.75	NR	NR	17.75	
		802.11ac160	160	VHT0	50	5250	NR	NR	15.25	NR	NR	14.75	
		802.11ax160				5250	NR	NR	15.25	NR	NR	14.75	

#### Initial test configuration

##### 1. NR: Not Required:

- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)
- Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

**B.2.2.2 WLAN 5.6GHz (UNII-2C)**

Average power (dBm)							Main transmitter			Aux transmitter		
Radio	Band	802.11	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	WNC v1	WNC v2	Tune-up Power	WNC v1	WNC v2	Tune-up Power
UNII-2C	5.6GHz	802.11a	6	100	5500	NR	NR	19.00	NR	NR	19.00	
					5520	NR	NR	19.50	NR	NR	20.00	
				104	5540	NR	NR	19.50	NR	NR	20.00	
					5560	NR	NR	19.50	NR	NR	20.00	
					5580	NR	NR	19.50	NR	NR	20.00	
					5600	NR	NR	19.50	NR	NR	20.00	
				112	5620	NR	NR	19.50	NR	NR	20.00	
					5640	NR	NR	19.50	NR	NR	20.00	
		802.11n20	20	100	5500	NR	NR	19.00	NR	NR	19.00	
					5520	NR	NR	19.50	NR	NR	20.00	
					5540	NR	NR	19.50	NR	NR	20.00	
				104	5560	NR	NR	19.50	NR	NR	20.00	
					5580	NR	NR	19.50	NR	NR	20.00	
					5600	NR	NR	19.50	NR	NR	20.00	
					5620	NR	NR	19.50	NR	NR	20.00	
				108	5640	NR	NR	19.50	NR	NR	20.00	
		802.11ax20	HE0	112	5500	NR	NR	19.00	NR	NR	19.00	
					5520	NR	NR	19.50	NR	NR	20.00	
					5540	NR	NR	19.50	NR	NR	20.00	
				116	5560	NR	NR	19.50	NR	NR	20.00	
					5580	NR	NR	19.50	NR	NR	20.00	
					5600	NR	NR	19.50	NR	NR	20.00	
					5620	NR	NR	19.50	NR	NR	20.00	
		802.11n40	HT0	120	5640	NR	NR	19.50	NR	NR	20.00	
					5500	NR	NR	19.00	NR	NR	19.00	
					5520	NR	NR	19.50	NR	NR	20.00	
					5540	NR	NR	19.50	NR	NR	20.00	
				104	5560	NR	NR	19.50	NR	NR	20.00	
					5580	NR	NR	19.50	NR	NR	20.00	
					5600	NR	NR	19.50	NR	NR	20.00	
					5620	NR	NR	19.50	NR	NR	20.00	
		802.11n40 (MIMO)	40	108	5640	NR	NR	19.50	NR	NR	20.00	
					5510	NR	NR	18.25	18.14	18.21	18.25	
					5550	NR	NR	19.50	19.85	19.95	20.00	
					5590	NR	NR	19.50	19.95	19.96	20.00	
				110	5630	NR	NR	19.50	19.83	19.95	20.00	
					5510	16.20	NR	16.25	16.17	NR	16.25	
					5550	18.39	NR	18.50	18.36	NR	18.50	
					5590	18.44	NR	18.50	18.46	NR	18.50	
		802.11ax40	HE0	118	5630	18.40	NR	18.50	18.40	NR	18.50	
					5510	NR	NR	18.25	NR	NR	18.25	
					5550	NR	NR	19.50	NR	NR	20.00	
					5590	NR	NR	19.50	NR	NR	20.00	
				126	5630	NR	NR	19.50	NR	NR	20.00	
					5530	18.75	18.60	18.75	NR	NR	18.75	
					5610	19.48	19.46	19.50	NR	NR	19.75	
					5610	15.84	NR	16.00	15.94	NR	16.00	
		802.11ac80 (MIMO)	80	106	5610	17.94	NR	18.25	18.20	NR	18.25	
					5530	NR	NR	18.75	NR	NR	18.75	
				122	5610	NR	NR	19.50	NR	NR	19.75	
					5530	NR	NR	19.50	NR	NR	19.75	
		802.11ax80	HE0	106	5570	NR	NR	14.50	NR	NR	14.25	
					5570	NR	NR	14.50	NR	NR	14.25	
				122	5610	NR	NR	14.50	NR	NR	14.25	
					5530	NR	NR	14.50	NR	NR	14.25	
		802.11ac160	VHT0	114	5570	NR	NR	14.50	NR	NR	14.25	
					5570	NR	NR	14.50	NR	NR	14.25	
		802.11ax160	HE0		5570	NR	NR	14.50	NR	NR	14.25	

**Initial test configuration**
**1. NR: Not Required:**

- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated

frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)

- When the reported SAR of the initial test configuration is  $> 0.8\text{W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq 1.2\text{W/kg}$  or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/Kg}$ , SAR is not required for that subsequent test configuration.
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2\text{ W/Kg}$  or until all required channels are tested.

## B.2.2.3 WLAN 5.8GHz (UNII3)

Radio	Band	802.11	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	Average power (dBm)					
							Main transmitter			Aux transmitter		
							WNC v1	WNC v2	Tune-up Power	WNC v1	WNC v2	Tune-up Power
5.6GHz	802.11a	802.11a	20	6	132	5660	NR	NR	19.50	NR	NR	20.00
					136	5680	NR	NR	19.50	NR	NR	20.00
					140	5700	NR	NR	18.00	NR	NR	17.50
		802.11n20	HT0	HT0	132	5660	NR	NR	19.50	NR	NR	20.00
					136	5680	NR	NR	19.50	NR	NR	20.00
					140	5700	NR	NR	18.00	NR	NR	17.50
	802.11ax20	802.11n40	40	HE0	132	5660	NR	NR	19.50	NR	NR	20.00
					136	5680	NR	NR	19.50	NR	NR	20.00
					140	5700	NR	NR	18.00	NR	NR	17.50
		802.11ax40	HT0	HT0	134	5670	NR	NR	19.25	NR	NR	20.00
					142	5710	NR	NR	19.50	NR	NR	19.25
					134	5670	NR	NR	19.25	NR	NR	20.00
		802.11ac80	80	VHT0	138	5690	19.47	19.38	19.50	20.00	19.89	20.00
						5690	NR	NR	19.50	NR	NR	20.00
UNII-3	5.8GHz	802.11a	20	6	144	5720	NR	NR	19.50	NR	NR	20.00
					149	5745	NR	NR	19.50	NR	NR	20.00
					153	5765	NR	NR	19.50	NR	NR	20.00
					157	5785	NR	NR	19.50	NR	NR	20.00
					161	5805	NR	NR	19.50	NR	NR	20.00
					165	5825	NR	NR	19.50	NR	NR	20.00
		802.11n20	20	HT0	144	5720	NR	NR	19.50	NR	NR	20.00
					149	5745	NR	NR	19.50	NR	NR	20.00
					153	5765	NR	NR	19.50	NR	NR	20.00
					157	5785	NR	NR	19.50	NR	NR	20.00
					161	5805	NR	NR	19.50	NR	NR	20.00
					165	5825	NR	NR	19.50	NR	NR	20.00
		802.11ax20	40	HE0	144	5720	NR	NR	19.50	NR	NR	20.00
					149	5745	NR	NR	19.50	NR	NR	20.00
					153	5765	NR	NR	19.50	NR	NR	20.00
					157	5785	NR	NR	19.50	NR	NR	20.00
					161	5805	NR	NR	19.50	NR	NR	20.00
					165	5825	NR	NR	19.50	NR	NR	20.00
		802.11n40	40	HT0	151	5755	NR	NR	19.50	NR	NR	20.00
					159	5795	NR	NR	19.50	NR	NR	20.00
		802.11ax40	40	HE0	151	5755	NR	NR	19.50	NR	NR	20.00
					159	5795	NR	NR	19.50	NR	NR	20.00
		802.11ac80	80	VHT0	155	5775	18.43	18.43	18.50	18.29	18.44	18.50
						5775	NR	NR	18.50	NR	NR	18.50

## Initial test configuration

## 1. NR: Not Required

- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax)

- When the reported SAR of the initial test configuration is  $> 0.8\text{W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq 1.2\text{W/kg}$  or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/Kg}$ , SAR is not required for that subsequent test configuration.
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2 \text{ W/Kg}$  or until all required channels are tested.

### B.2.3 Bluetooth

Radio	Band	Bluetooth	Bandwidth (MHz)	Rate (Mbps)	Channel	Frequency (MHz)	Average power (dBm)		
							Aux transmitter		
WNCv1	WNCv2	Tune-up Power							
2.4GHz	BT	Bluetooth v5.1	1	Basic rate GFSK	0	2402	9.07	9.73	11.00
					39	2441	9.62	10.20	11.00
					78	2480	10.12	10.46	11.00
				Basic rate p/4 DQPSK	0	2402	NR	NR	7.00
					39	2441	NR	NR	7.00
					78	2480	NR	NR	7.00
		BLEv5.1	2	Basic rate 8-DPSK	0	2402	NR	NR	7.00
					39	2441	NR	NR	7.00
					78	2480	NR	NR	7.00
				Low energy GFSK	0	2412	NR	NR	7.00
					20	2442	NR	NR	7.00
					39	2480	NR	NR	7.00

#### Initial test configuration

1. NR: Not Required

### B.3 Tissue Parameters Measurement

#### Body TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	$\epsilon'$ (F/m)	$\sigma$ (S/m)	$\epsilon'$ (F/m)	$\sigma$ (S/m)	$\epsilon'$	$\sigma$	
2450.0	52.7	1.95	50.01	2.04	-5.1	4.62	2020-04-06
5300.0	48.88	5.42	44.78	5.5	-8.39	1.48	2020-04-06
5600.0	48.47	5.77	44.97	6.04	-7.22	4.68	2020-04-08
5600.0	48.47	5.77	44.69	5.94	-7.8	2.95	2020-04-16
5800.0	48.2	6.0	43.74	6.18	-9.25	3.0	2020-04-06

See Annex D for more details.

### B.4 System Check Measurements

#### Body Measurements

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Deviation to target (%)	Limit (%)	Date
2450	1g	49.40	48.80	-1.21	$\pm 10$	2020-04-07
	10g	23.20	22.60	-2.59		
5300	1g	71.20	70.40	-1.12	$\pm 10$	2020-04-07
	10g	20.10	20.80	3.48		
5600	1g	76.40	79.20	3.66	$\pm 10$	2020-04-08
	10g	21.40	23.20	8.41		
5600	1g	76.40	71.80	-6.02	$\pm 10$	2020-04-16
	10g	21.40	21.00	-1.87		

See Annex C for more details.

## B.5 SAR Test Results

### B.5.1 Bluetooth & 802.11b/g/n/ax – 2.4GHz – DTS – BT (DSS)

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
WNCv1	802.15	DH5	20	78	2480	Laptop	AUX	0.88	0.02	0.03	
	802.11b	1Mbps	20	6	2437		MAIN	0.18	0.19	0.20	
	802.11b	1Mbps	20	6	2437		AUX	0.24	0.24	0.25	
WNCv2	802.15	DH5	20	78	2480	Laptop	AUX	0.54	0.02	0.03	
	802.11b	1Mbps	20	6	2437		MAIN	0.11	0.28	0.29	1
	802.11b	1Mbps	20	6	2437		AUX	0.22	0.20	0.21	

### B.5.2 802.11a/n/ac/ax – 5.3 GHz – U-NII-2A

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
WNCv1	802.11n	HT0	40	54	5270	Laptop	MAIN	0.13	0.75	0.78	
	802.11n	HT0	40	54	5270		AUX	0.14	0.59	0.61	
WNCv2	802.11n	HT0	40	54	5270		MAIN	0.05	1.07	1.08	2
	802.11n	HT0	40	54	5270		AUX	0.00	0.52	0.52	

### B.5.3 802.11a/n/ac/ax – 5.6 GHz – U-NII-2C

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
WNCv1	802.11n (MIMO)	HT8	40	118	5590	Laptop	MAIN	0.06	0.80	0.81	4
	802.11ac	VHT0	80	106	5530		MAIN	0.00	0.96	0.96	
	802.11ac	VHT0	80	122	5610		MAIN	0.02	1.11	1.12	3
	802.11ac (MIMO)	VHT8	80	122	5610		MAIN	0.31	0.75	0.81	
	802.11n	HT0	40	118	5590		AUX	0.04	0.70	0.71	
	802.11n (MIMO)	HT8	40	118	5590		AUX	0.04	0.47	0.48	
	802.11ac (MIMO)	VHT8	80	122	5610		AUX	0.05	0.43	0.44	
WNCv2	802.11ac	VHT0	80	106	5530	Laptop	MAIN	0.15	0.75	0.78	
	802.11ac	VHT0	80	122	5610		MAIN	0.05	1.04	1.05	
	802.11n	HT0	40	118	5590		AUX	0.04	0.68	0.69	

### B.5.4 802.11a/n/ac/ax – 5.8 GHz – U-NII-3

Antenna Manufacturer	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
WNCv1	802.11ac	VHT0	80	155	5775	Laptop	MAIN	0.03	0.77	0.78	
	802.11n	VHT0	80	138	5690		MAIN	0.07	0.96	0.97	
	802.11n	VHT0	40	138	5690		AUX	0.00	0.69	0.69	
WNCv2	802.11ac	VHT0	80	155	5775	Laptop	MAIN	0.07	0.58	0.59	
	802.11ac	VHT0	80	138	5690		MAIN	0.12	1.13	1.16	5
	802.11ac	VHT0	80	138	5690		AUX	0.11	0.52	0.53	

#### B.5.4 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is  $\geq 0.8$  W/kg for a certain band mode. If the measured SAR value of the initial repeated measurement is  $< 1.45$  W/kg with  $< 20\%$  variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1 <sup>st</sup> Repeated SAR 1g (W/Kg)	2 <sup>nd</sup> Repeated SAR 1g (W/Kg)	Highest Ratio
5.3GHz 802.11ac40 HT0	Laptop	54	5270	0.96	1.07		0.90
5.5GHz 802.11ac80 VHT0	Laptop	106	5530	0.96	0.95		1.01
5.6GHz 802.11ac80 VHT0	Laptop	122	5610	1.11	1.09		1.02

### B.5.5 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/Kg)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Aux	Laptop	0.25	(MIMO) 0.81*	0.03
Main	Laptop	0.29	(MIMO) 0.48*	

\*For WLAN 5GHz, the maximum standalone reported SAR found for CH118 on Main and Aux antenna, exceeds the Simultaneous SAR test exclusion for both the SAR summation and the SPLSR threshold. This channel was tested on each antenna individually using the MIMO target power declared for each chain (section 5), resulting in the maximum reported SAR in the table above marked as (MIMO) and considered for Simultaneous Transmission SAR Evaluation summation on the next page table

Position	Simultaneous Tx Antenna Combination		$\Sigma$ SAR 1g (W/Kg)	Limit (W/kg)
	Aux Antenna	Main Antenna		
Laptop	WLAN 5GHz	WLAN 5GHz	1.29	1.6
	WLAN 5GHz + BT	WLAN 5GHz	1.32	
	BT	WLAN 5GHz	0.51	
	WLAN 2.4GHz	WLAN 2.4GHz	0.54	
	BT	WLAN 2.4GHz	0.32	

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no SPLSR or enlarged zoom scan measurements are required

# Annex C. Test System Plots

---

1.	DTS - 802.11b, CH6, WNCv2 Antenna, Main transmitter – Laptop .....	37
2.	UNII-2A - 802.11n40, CH54, WNCv2 Antenna, Main transmitter – Laptop .....	38
3.	UNII-2C - 802.11ac80, CH122, WNCv1 Antenna, Main transmitter – Laptop .....	39
4.	802.11n40 , CH 118, WNCv1 Antenna, Main transmitter – Laptop (MIMO) .....	40
5.	UNII-3 - 802.11ac80, CH138, WNCv2 Antenna, Main transmitter – Laptop .....	41
6.	System Check Body Liquid 2450.0MHz.....	42
7.	System Check Body Liquid 5300.0MHz.....	43
8.	System Check Body Liquid 5600.0MHz – 08-04-2020 .....	44
9.	System Check Body Liquid 5600.0MHz – 16-04-2020 .....	45

## 1. DTS - 802.11b, CH6, WNCv2 Antenna, Main transmitter – Laptop

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WLAN MAC	DUT Type
HSN-C06C	358.0 x 230.0 x 15.0	84:FD:D1:C8:77:2E	Laptop

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	LAPTOP 0.00	WLAN 2.4GHz	WCDMA10012CAB	2437.0 6	7.75	2.03	50.0

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-06	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	144.0 x 144.0	30.0 x 30.0 x 30.0	Date	2020-04-07, 17:50
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	<b>SAR1g [W/Kg]</b>	0.265
Sensor Surface [mm]	3.0	1.4	<b>SAR10g [W/Kg]</b>	0.142
Graded Grid Grading Ratio	No	No	Power Drift [dB]	-0.02
MAIA Surface Detection	Confirmed by MAIA	Confirmed by MAIA	Power Scaling	Disabled
Scan Method	Yes	Yes	Scaling Factor [dB]	Disabled
	Measured	Measured	TSL Correction	Positive Only
				Positive Only

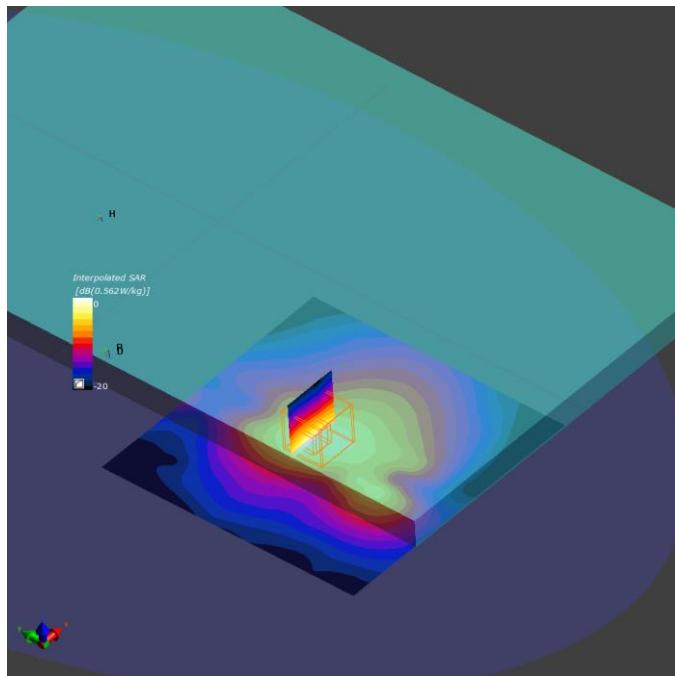

## 2. UNII-2A - 802.11n40, CH54, WNCv2 Antenna, Main transmitter – Laptop

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WLAN MAC	DUT Type
HSN-C06C	358.0 x 230.0 x 15.0	84:FD:D1:C8:77:2E	Laptop

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	Laptop 0.00	WLAN 5GHz	WCDMA10456AAB	5270.0 54	4.32	5.45	44.8

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-06	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 140.0	22.0 x 22.0 x 22.0	Date	2020-04-07, 17:24
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	<b>SAR1g [W/Kg]</b>	0.936
Sensor Surface [mm]	3.0	1.4	<b>SAR10g [W/Kg]</b>	0.369
Graded Grid	No	Yes	Power Drift [dB]	-0.04
Grading Ratio	n/a	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes	TSL Correction	Positive Only
Scan Method	Measured	Measured		Positive Only

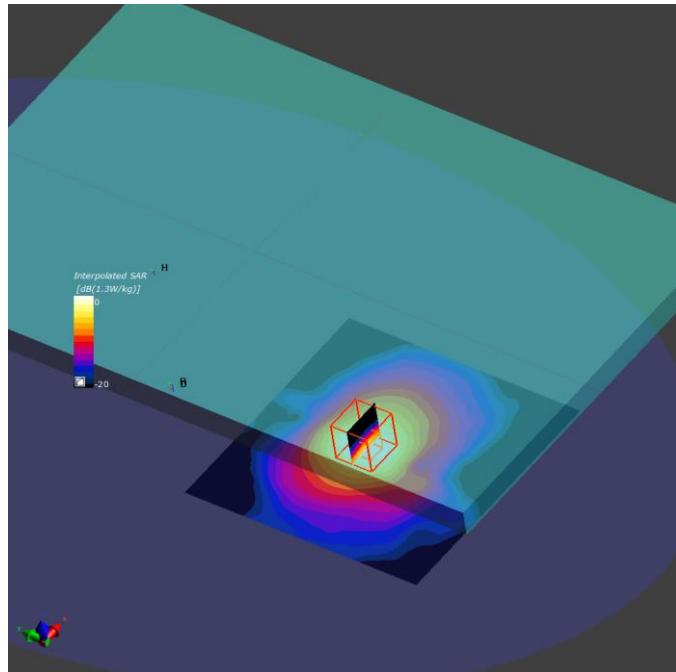

### 3. UNII-2C - 802.11ac80, CH122, WNCv1 Antenna, Main transmitter – Laptop

#### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WLAN MAC	DUT Type
HSN-C06C	358.0 x 230.0 x 15.0	84:FD:D1:C8:79:81	Laptop

#### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	Laptop 0.00	WLAN 5GHz	WCDMA10456AAB	5610.0 122	3.8	6.05	44.9

#### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-08	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

#### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 140.0	22.0 x 22.0 x 22.0	Date	2020-04-08, 11:41
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	<b>SAR1g [W/Kg]</b>	1.54
Sensor Surface [mm]	3.0	1.4	<b>SAR10g [W/Kg]</b>	0.567
Graded Grid	No	Yes	Power Drift [dB]	0.05
Grading Ratio	n/a	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes	TSL Correction	Positive Only
Scan Method	Measured	Measured		Positive Only

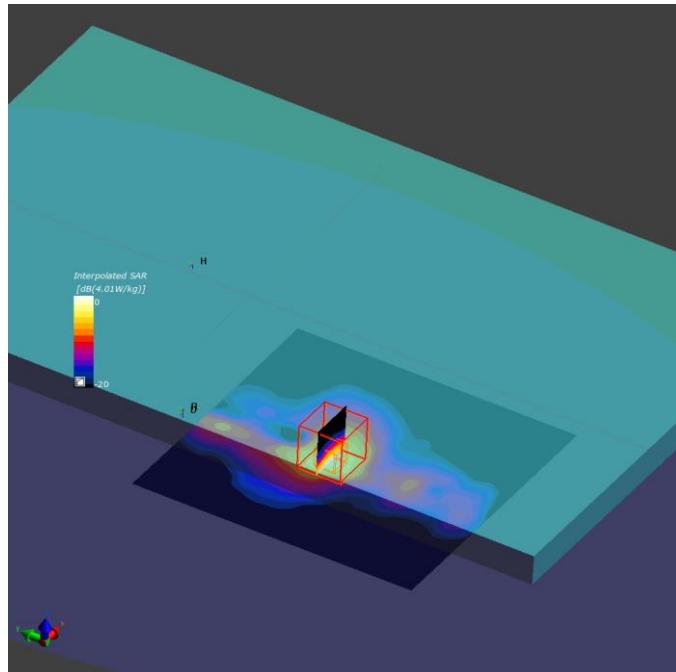

## 4. 802.11n40 , CH 118, WNCv1 Antenna, Main transmitter – Laptop (MIMO)

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WLAN MAC	DUT Type
HSN-C06C	358.0 x 230.0 x 15.0	84:FD:D1:C8:79:81	Laptop

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	BACK 0.00	WLAN 5GHz	WCDMA10114CAC	5590.0 118	3.8	5.93	44.7

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-16	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 140.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

### Measurement Results

	Area Scan	Zoom Scan
Date	2020-04-16, 16:44	2020-04-16, 16:50
<b>SAR1g [W/Kg]</b>	0.804	0.800
<b>SAR10g [W/Kg]</b>	0.304	0.305
Power Drift [dB]	-0.05	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only

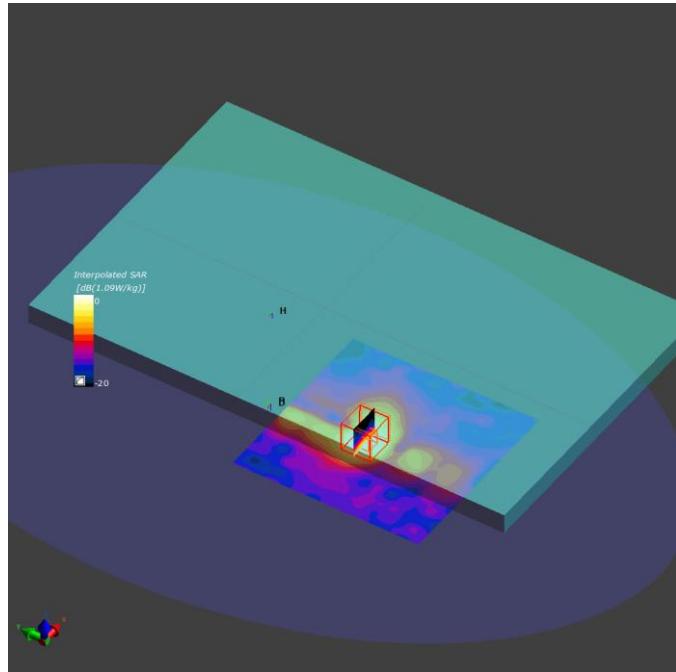

## 5. UNII-3 - 802.11ac80, CH138, WNCv2 Antenna, Main transmitter – Laptop

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WLAN MAC	DUT Type
HSN-C06C	358.0 x 230.0 x 15.0	84:FD:D1:C8:77:2E	Laptop

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	EDGE LEFT 0.00	WLAN 5GHz	WCDMA10402AAD	5690.0 138	3.8	6.04	44.0

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-06	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 280.0	22.0 x 22.0 x 22.0	Date	2020-04-07, 17:36
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	<b>SAR1g [W/Kg]</b>	0.975
Sensor Surface [mm]	3.0	1.4	<b>SAR10g [W/Kg]</b>	0.365
Graded Grid	No	Yes	Power Drift [dB]	0.03
Grading Ratio	n/a	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes	TSL Correction	Positive Only
Scan Method	Measured	Measured		Positive Only

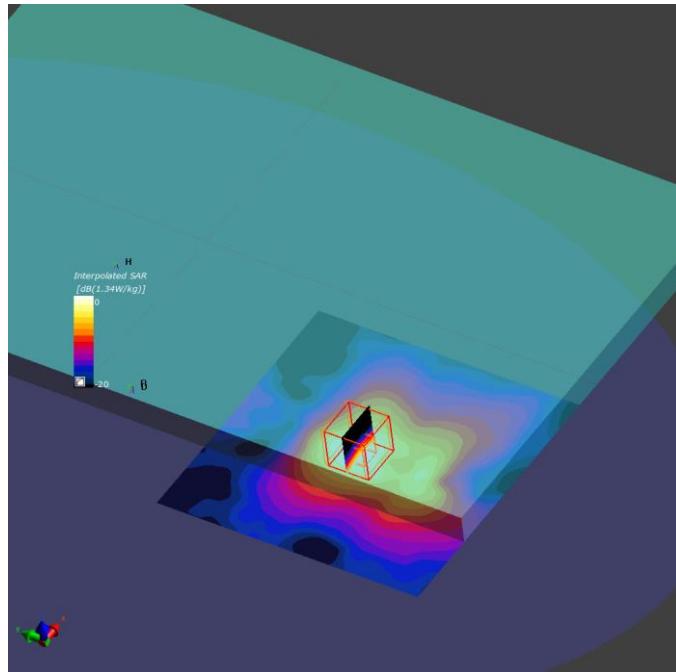

## 6. System Check Body Liquid 2450.0MHz

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2450V2 , SPEAG	50.0 x 10.0 x 15.0	937	Validation Dipole

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	,			2450.0	7.75	2.04	50.0

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-06	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid Grading Ratio	No n/a	No n/a
MAIA Surface Detection	Confirmed by MAIA Yes	Confirmed by MAIA Yes
Scan Method	Measured	Measured

### Measurement Results

	Area Scan	Zoom Scan
Date	2020-04-07, 18:23	2020-04-07, 18:30
psSAR1g [W/Kg]	2.09	2.44
psSAR10g [W/Kg]	1.05	1.13
Power Drift [dB]	0.00	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only

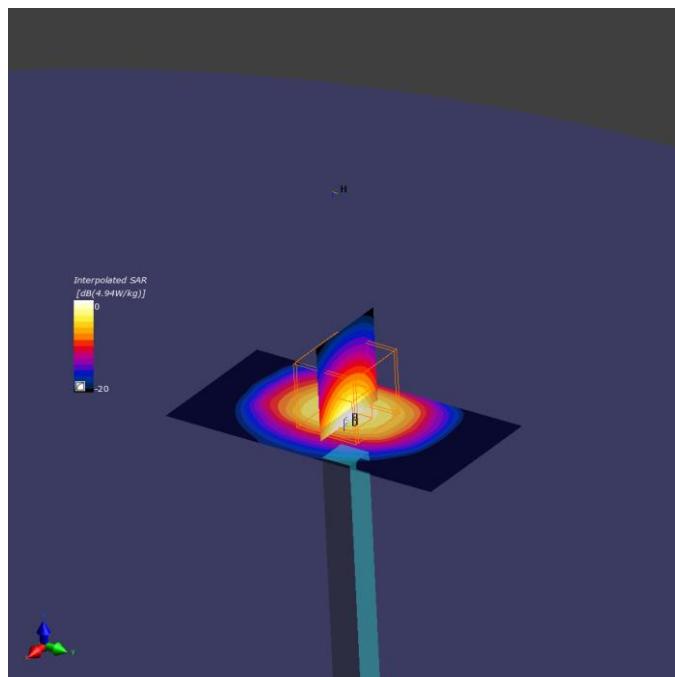

## 7. System Check Body Liquid 5300.0MHz

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	,			5300.0	4.32	5.50	44.8

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-06	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0	Date	2020-04-07, 10:11
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	<b>psSAR1g [W/Kg]</b>	2.82
Sensor Surface [mm]	3.0	1.4	<b>psSAR10g [W/Kg]</b>	0.872
Graded Grid	No	Yes	Power Drift [dB]	0.02
Grading Ratio	n/a	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes	TSL Correction	Positive Only
Scan Method	Measured	Measured		Positive Only

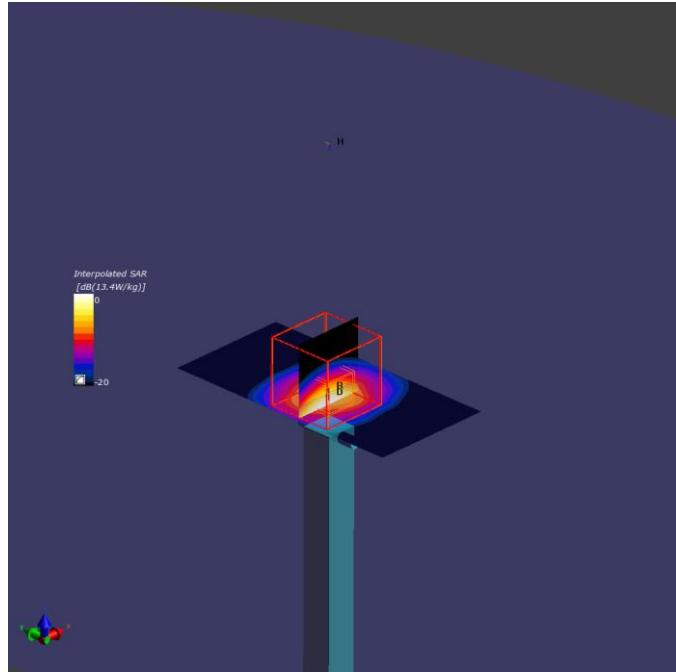

## 8. System Check Body Liquid 5600.0MHz – 08-04-2020

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	,			5600.0	3.8	6.04	45.0

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-08	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup

	Area Scan	Zoom Scan	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0	Date	2020-04-08, 16:11
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	<b>psSAR1g [W/Kg]</b>	2.86
Sensor Surface [mm]	3.0	1.4	<b>psSAR10g [W/Kg]</b>	0.875
Graded Grid	No	Yes	Power Drift [dB]	-0.03
Grading Ratio	n/a	1.4	Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes	TSL Correction	Positive Only
Scan Method	Measured	Measured		Positive Only

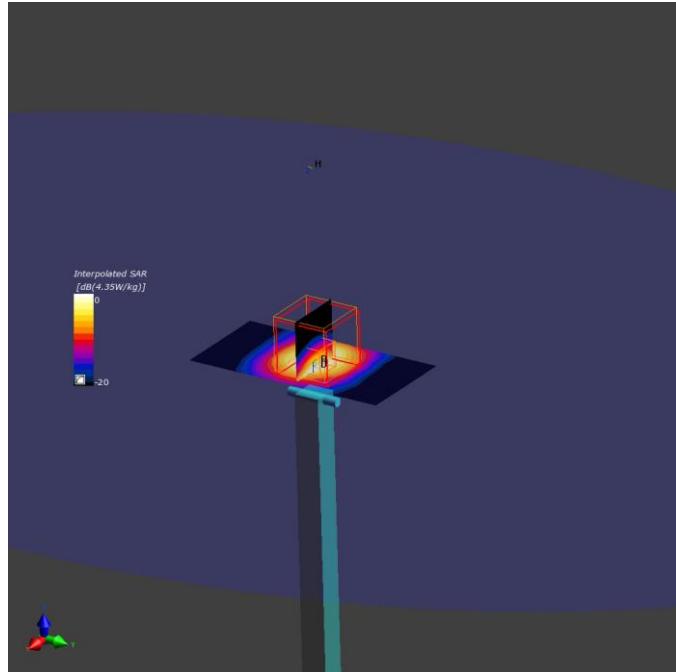

## 9. System Check Body Liquid 5600.0MHz – 16-04-2020

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 15.0	1164	Validation Dipole

### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat MSL	,			5600.0	3.8	5.94	44.7

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000 , 2020-Apr-16	EX3DV4 - SN7325, 2019-12-16	DAE4 Sn1496, 2019-12-05

### Scan Setup


	Area Scan	Zoom Scan		Measurement Results	
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0		Date	2020-04-16, 17:55
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4		<b>psSAR1g [W/Kg]</b>	2.71
Sensor Surface [mm]	3.0	1.4		<b>psSAR10g [W/Kg]</b>	0.855
Graded Grid	No	Yes		Power Drift [dB]	0.02
Grading Ratio	n/a	1.4		Power Scaling	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA		Scaling Factor [dB]	Disabled
Surface Detection	Yes	Yes		TSL Correction	Positive Only
Scan Method	Measured	Measured			Positive Only

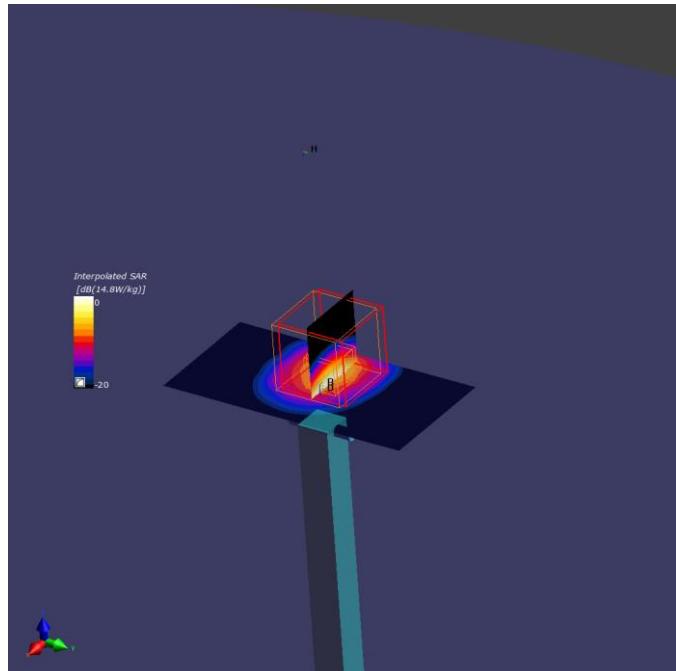

# Annex D. TSL Dielectric Parameters


## D.1 Body DTS 2450MHz

Freq.(MHz)	Target		Measured - 2020-04-06		Measured - 2020-04-08		Measured - 2020-04-16	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$	$\epsilon'2(F/m)$	$\sigma2(S/m)$	$\epsilon'3(F/m)$	$\sigma3(S/m)$
2400.0	52.77	1.9	50.09	2.0	50.83	2.01	50.57	2.02
2410.0	52.75	1.91	50.08	2.01	50.82	2.02	50.55	2.03
2420.0	52.74	1.92	50.06	2.01	50.81	2.03	50.54	2.04
2430.0	52.73	1.93	50.05	2.02	50.8	2.04	50.52	2.05
2440.0	52.71	1.94	50.03	2.03	50.79	2.05	50.51	2.06
<b>2450.0</b>	<b>52.7</b>	<b>1.95</b>	<b>50.01</b>	<b>2.04</b>	<b>50.77</b>	<b>2.06</b>	<b>50.49</b>	<b>2.07</b>
2460.0	52.69	1.96	50.0	2.05	50.76	2.07	50.47	2.07
2470.0	52.67	1.98	49.98	2.06	50.75	2.08	50.46	2.08
2480.0	52.66	1.99	49.97	2.07	50.74	2.09	50.44	2.09
2490.0	52.65	2.01	49.95	2.08	50.73	2.1	50.42	2.1
2500.0	52.64	2.02	49.93	2.09	50.72	2.11	50.41	2.11

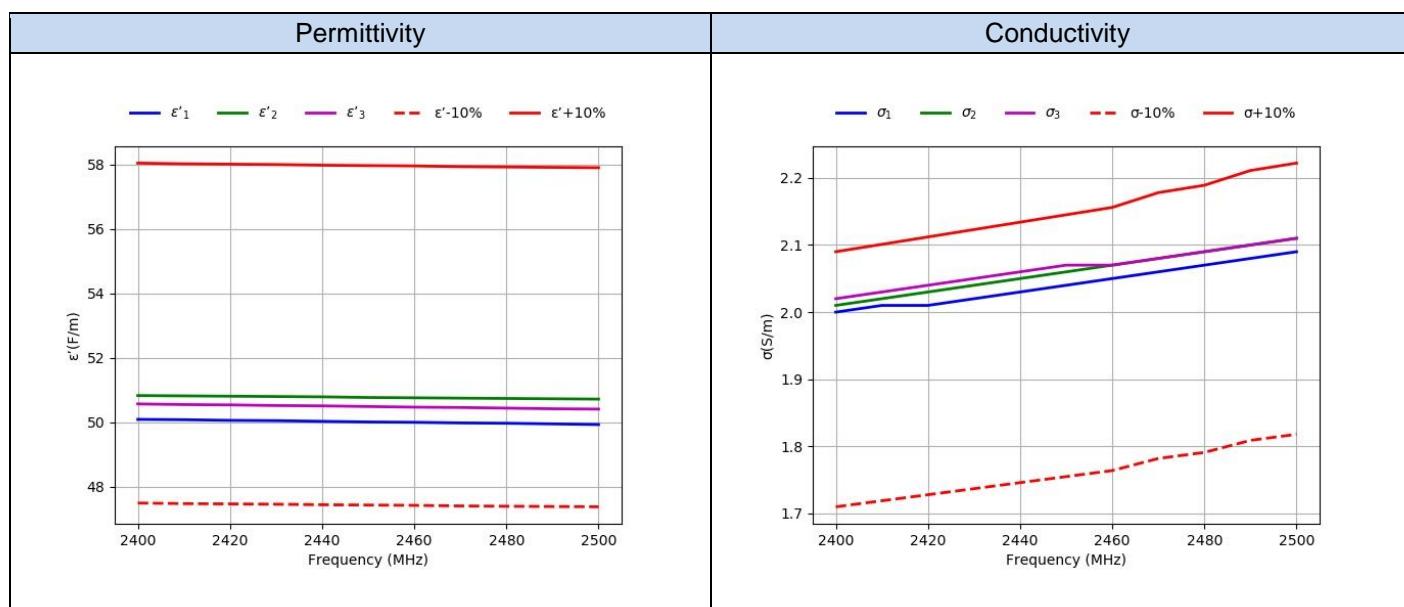

## D.2 Body 5200MHz-5800MHz

Freq.(MHz)	Target		Measured – 2020-04-06		Measured – 2020-04-08		Measured – 2020-04-16	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$	$\epsilon'2(F/m)$	$\sigma2(S/m)$	$\epsilon'3(F/m)$	$\sigma3(S/m)$
5180.0	49.04	5.28	45.0	5.3	45.79	5.43	45.45	5.33
5190.0	49.03	5.29	44.98	5.32	45.77	5.44	45.43	5.34
5200.0	49.01	5.3	44.96	5.33	45.75	5.46	45.41	5.36
5210.0	49.0	5.31	44.95	5.35	45.73	5.48	45.39	5.37
5220.0	48.99	5.32	44.93	5.37	45.71	5.49	45.37	5.39
5230.0	48.97	5.33	44.91	5.38	45.69	5.51	45.35	5.41
5240.0	48.96	5.35	44.89	5.4	45.67	5.53	45.33	5.42
5250.0	48.95	5.36	44.87	5.42	45.65	5.54	45.31	5.44
5260.0	48.93	5.37	44.85	5.43	45.64	5.56	45.29	5.45
5270.0	48.92	5.38	44.83	5.45	45.62	5.57	45.28	5.47
5280.0	48.91	5.39	44.81	5.47	45.6	5.59	45.26	5.48
5290.0	48.89	5.4	44.79	5.48	45.58	5.61	45.24	5.5
<b>5300.0</b>	<b>48.88</b>	<b>5.42</b>	<b>44.78</b>	<b>5.5</b>	<b>45.56</b>	<b>5.62</b>	<b>45.22</b>	<b>5.52</b>
5310.0	48.87	5.43	44.76	5.52	45.54	5.64	45.2	5.53
5320.0	48.85	5.44	44.74	5.53	45.52	5.66	45.19	5.55
5330.0	48.84	5.45	44.72	5.55	45.5	5.67	45.17	5.56
5340.0	48.82	5.46	44.7	5.57	45.48	5.69	45.15	5.58
5350.0	48.81	5.47	44.68	5.58	45.46	5.7	45.13	5.59
5360.0	48.8	5.49	44.67	5.59	45.44	5.72	45.11	5.61
5370.0	48.78	5.5	44.65	5.61	45.42	5.73	45.09	5.62
5380.0	48.77	5.51	44.63	5.62	45.4	5.75	45.08	5.64
5390.0	48.76	5.52	44.61	5.63	45.38	5.76	45.06	5.65
5400.0	48.74	5.53	44.59	5.65	45.37	5.78	45.04	5.67
<b>5500.0</b>	<b>48.61</b>	<b>5.65</b>	<b>44.43</b>	<b>5.78</b>	<b>45.18</b>	<b>5.91</b>	<b>44.87</b>	<b>5.8</b>
5510.0	48.59	5.66	44.41	5.79	45.16	5.92	44.86	5.82
5520.0	48.58	5.67	44.39	5.8	45.14	5.93	44.84	5.83
5530.0	48.57	5.68	44.37	5.82	45.12	5.95	44.82	5.84
5540.0	48.55	5.7	44.36	5.83	45.1	5.96	44.8	5.86
5550.0	48.54	5.71	44.34	5.84	45.08	5.98	44.79	5.87
5560.0	48.53	5.72	44.32	5.86	45.06	5.99	44.77	5.88
5570.0	48.51	5.73	44.3	5.87	45.04	6.0	44.75	5.9
5580.0	48.5	5.74	44.28	5.88	45.01	6.01	44.73	5.91
5590.0	48.48	5.75	44.26	5.9	44.99	6.03	44.71	5.93
<b>5600.0</b>	<b>48.47</b>	<b>5.77</b>	<b>44.24</b>	<b>5.91</b>	<b>44.97</b>	<b>6.04</b>	<b>44.69</b>	<b>5.94</b>
5610.0	48.46	5.78	44.22	5.93	44.94	6.05	44.67	5.95
5620.0	48.44	5.79	44.19	5.94	44.91	6.07	44.64	5.97
5630.0	48.43	5.8	44.17	5.96	44.88	6.08	44.62	5.98
5640.0	48.42	5.81	44.14	5.97	44.86	6.1	44.59	6.0
5650.0	48.4	5.82	44.12	5.99	44.83	6.11	44.57	6.01
5660.0	48.39	5.84	44.1	6.0	44.8	6.13	44.55	6.03
5670.0	48.38	5.85	44.07	6.01	44.78	6.14	44.52	6.04
5680.0	48.36	5.86	44.05	6.03	44.75	6.15	44.5	6.05
5690.0	48.35	5.87	44.03	6.04	44.72	6.17	44.48	6.07
5700.0	48.34	5.88	44.0	6.06	44.69	6.18	44.45	6.08
5710.0	48.32	5.9	43.98	6.07	44.67	6.19	44.42	6.09
5720.0	48.31	5.91	43.95	6.08	44.64	6.2	44.4	6.11
5730.0	48.3	5.92	43.92	6.1	44.61	6.22	44.37	6.12
5740.0	48.28	5.93	43.89	6.11	44.58	6.23	44.34	6.13
5750.0	48.27	5.94	43.87	6.12	44.55	6.24	44.32	6.14
5760.0	48.25	5.95	43.84	6.13	44.53	6.25	44.29	6.16
5770.0	48.24	5.97	43.82	6.14	44.5	6.27	44.26	6.17
5780.0	48.23	5.98	43.79	6.16	44.47	6.28	44.23	6.18
5790.0	48.21	5.99	43.77	6.17	44.45	6.29	44.21	6.19
<b>5800.0</b>	<b>48.2</b>	<b>6.0</b>	<b>43.74</b>	<b>6.18</b>	<b>44.42</b>	<b>6.3</b>	<b>44.18</b>	<b>6.21</b>

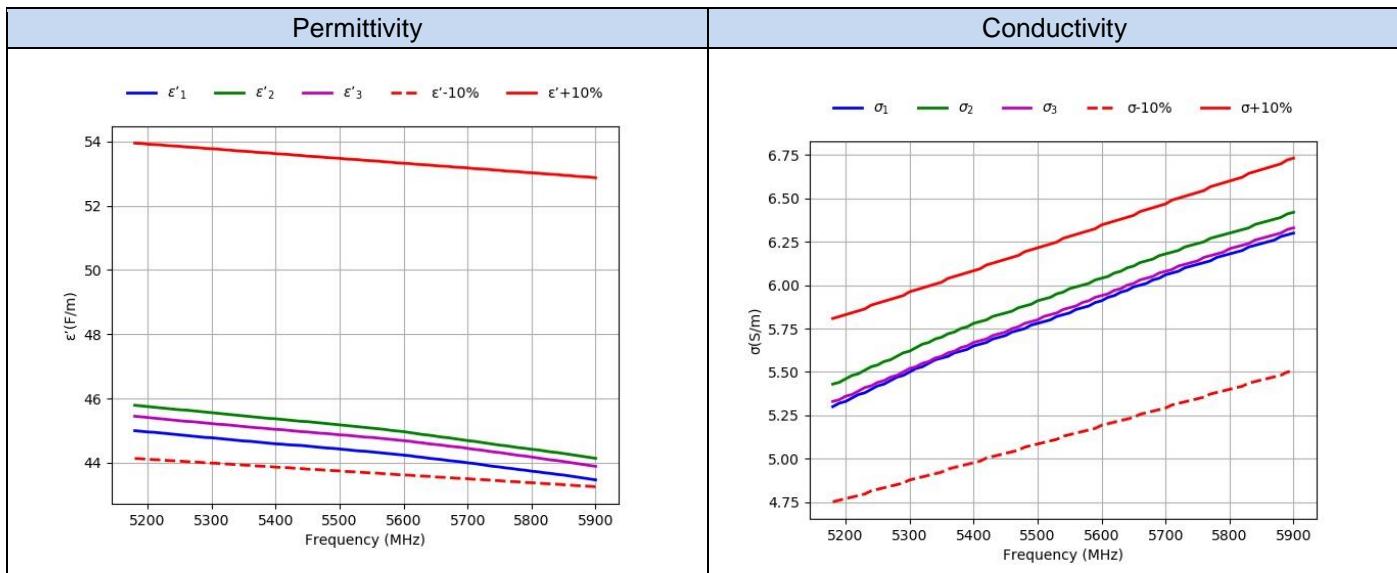

# Annex E. Calibration Certificates

ID	Device	Type/Model	Serial Number	Manufacturer	Calibration Certificate
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	
0124	5GHz System Validation Dipole	D5GHzV2	1164	SPEAG	

## Dipole calibration

According to the KDB 865664 D01, a dipole must be calibrated using a fully validated SAR system according to the tissue dielectric parameters and SAR probe calibration frequency required for device testing. However, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements.

1. When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB  $\times 0.2$ ) or not meeting the required 20 dB minimum return-loss requirement.
2. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than  $5 \Omega$  from the previous measurement

The below results show the latest return loss and impedance measurements for each dipole performed by the lab:

Dipole ID #0239			
Dipole 2450MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Previous	-27.80	50.4 + 4.1 j	2018-05-18
Last	-27.70	46.3 + 3.1 j	2019-03-13
Dipole ID #0124			
Dipole 5200MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-31.7	49.8 – 2.6 j	2019-05-20
Dipole 5300MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-40.1	50.3 + 1.0 j	2019-05-20
Dipole 5500MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-31.4	48.2 + 2.0 j	2019-05-20
Dipole 5600MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-27.3	53.3 + 3.0 j	2019-05-20
Dipole 5800MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-24.2	53.2 + 5.5 j	2019-05-20