



TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (1) of (180)

KCTL

1. Client

- Name : Intel Mobile Communications
- Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
- Date of Receipt : 2020-09-16

2. Use of Report : Class II Permissive Change

3. Name of Product and Model : WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card

- Model Number : AX201D2W
- Manufacturer and Country of Origin: Intel Mobile Communications / USA

4. Host Product Name : Notebook PC

- Host Model Name : XE530QDA, XE531QDA
- Manufacturer : Samsung Electronics Co., Ltd.

5. FCC ID Number : PD9AX201D2

6. Date of Test : 2020-10-07 ~ 2020-10-13

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: Address of testing location)

8. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication

9. Test Results : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Kyoungwoo Min (Signature)	Name : Jongwon Ma (Signature)

2020-11-20

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0046-A Page (2) of (180)	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2020-10-23	Originally issued	-
2020-11-20	Updated Summary of SAR test Results	5

Note: The Report No. KR20-SPF0046 is superseded by the report No. KR20-SPF0046-A

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

1. Identification when information is provided by the customer: Information marked "#" is provided by the customer.
- Disclaimer: This information is provided by the customer and can affect the validity of results.



CONTENTS

1.	General information.....	4
2.	Device information	5
3.	Specific Absorption Rate	32
4.	SAR Measurement Procedures.....	33
5.	RF Exposure Limits	34
6.	FCC SAR General Measurement Procedures.....	35
7.	RF Average Conducted Output Power.....	38
8.	System Verification	42
9.	SAR Test Results	45
10.	Simultaneous Transmission	49
11.	SAR Measurement Variability.....	51
12.	Measurement Uncertainty.....	52
13.	Test Equipment Information	53
14.	Test System Verification Results.....	55
15.	Test Results	64
	Appendixes List.....	85
	Appendix A. Calibration certificate	87
	Appendix B. SAR Tissue Specification.....	166
	Appendix C. Power Reduction Verification	167
	Appendix D. #Antenna Location & Distance.....	172
	Appendix E. EUT Photo	174
	Appendix F. Test Setup Photo.....	178
	End of test report	180

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0046-A Page (4) of (180)	
---	---	---

1. General information

Client : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Manufacturer : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Contact Person : Steven Hackett / Steven.c.hackett@intel.com
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.

2. Device information

2.1 Basic description

Product Name		WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Product Model Number		AX201D2W
Product Manufacturer		Intel Mobile Communications
Host Product Name		Notebook PC
Host Model Number		XE530QDA, XE531QDA
Difference in model name		Two model numbers are allocated for marketing and logistic purposes only.
Host Manufacturer		Samsung Electronics Co., Ltd.
Host Product Serial Number	Radiation	1FD791ZN800111B
		1FD791ZN800088D
	Conduction	1FD791ZN800112W
Mode of Operation		WLAN 2.4 GHz / 5 GHz, Bluetooth
Device Overview		WLAN 2.4 GHz: 2 412.0 MHz ~ 2 462.0 MHz WLAN 5.3 GHz: 5 260.0 MHz ~ 5 320.0 MHz WLAN 5.6 GHz: 5 500.0 MHz ~ 5 720.0 MHz WLAN 5.8 GHz: 5 745.0 MHz ~ 5 825.0 MHz Bluetooth: 2 402.0 MHz ~ 2 480.0 MHz
TDWR Information		5.60 GHz ~ 5.65 GHz band (TDWR) is supported by the device.

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported 1g SAR (W/kg)
WLAN 2.4 GHz	DTS	1.03
U-NII-2A	NII	1.12
U-NII-2C	NII	0.97
U-NII-3	NII	1.11
Bluetooth	DSS/DTS	0.44
Simultaneous SAR per KDB 690783 D01v01r03		1.56

2.3 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

2.3.1 #Maximum WLAN Output Power (Notebook)

Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Ant.1	802.11b	All Channel	16.00	16.50	Yes
		802.11g	All Channel	16.00	16.50	No
		802.11n(HT20)	All Channel	16.00	16.50	No
		802.11n(HT40)	All Channel	16.00	16.50	No
		SU 20 MHz	11	14.50	15.00	No
			Except 11	16.00	16.50	
		RU 26T_20 MHz	1,2,3,4	16.00	16.50	No
			5,6,9	15.00	15.50	
			7,8,10	14.00	14.50	
			11	13.00	13.50	
		RU 52T_20 MHz	1,2,3,4,10	16.00	16.50	No
			5,6,9	15.00	15.50	
			7,8	14.00	14.50	
			11	13.50	14.00	
		RU 106T_20 MHz	All Channel	16.00	16.50	No
		RU 242T_20 MHz	11	14.50	15.00	No
			Except 11	16.00	16.50	
		SU 40 MHz	6	15.50	16.00	No
			7,8,9	15.00	15.50	
			Except 6,7,8,9	16.00	16.50	
		RU 26T_40 MHz	7,8	15.00	15.50	No
			9	14.00	14.50	
			Except 7,8,9	16.00	16.50	
		RU 52T_40 MHz	7,8	15.00	15.50	No
			9	14.00	14.50	
			Except 7,8,9	16.00	16.50	
		RU 106T_40 MHz	All Channel	16.00	16.50	No
		RU 242T_40 MHz	All Channel	16.00	16.50	No
		RU 484T_40 MHz	6	15.50	16.00	No
			7,8,9	15.00	15.50	
			Except 6,7,8,9	16.00	16.50	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (7) of (180)



Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Ant.2	802.11b	All Channel	16.00	16.50	Yes
		802.11g	All Channel	16.00	16.50	No
		802.11n(HT20)	All Channel	16.00	16.50	No
		802.11n(HT40)	All Channel	16.00	16.50	No
		SU 20 MHz	11	15.00	15.50	No
			Except 11	16.00	16.50	
		RU 26T_20 MHz	1,2,3,4	16.00	16.50	No
			5,6,9	15.00	15.50	
			7,8,10	14.00	14.50	
			11	13.00	13.50	
		RU 52T_20 MHz	1,2,3,4,10	16.00	16.50	No
			5,6,9	15.00	15.50	
			7,8	14.00	14.50	
			11	13.50	14.00	
		RU 106T_20 MHz	All Channel	16.00	16.50	No
		RU 242T_20 MHz	11	15.00	15.50	No
			Except 11	16.00	16.50	
		SU 40 MHz	6	15.50	16.00	No
			7,8	15.00	15.50	
			9	14.00	14.50	
			Except 6,7,8,9	16.00	16.50	
		RU 26T_40 MHz	7,8	15.00	15.50	No
			9	14.00	14.50	
			Except 7,8,9	16.00	16.50	
		RU 52T_40 MHz	7,8	15.00	15.50	No
			9	14.00	14.50	
			Except 7,8,9	16.00	16.50	
		RU 106T_40 MHz	All Channel	16.00	16.50	No
		RU 242T_40 MHz	All Channel	16.00	16.50	No
		RU 484T_40 MHz	6	15.50	16.00	No
			7,8	15.00	15.50	
			9	14.00	14.50	
			Except 6,7,8,9	16.00	16.50	

Band	Ant.	Mode	Channel	Output Power (dBm)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	MIMO	802.11n(HT20)	All Channel	16.00	16.50	No
		802.11n(HT40)	All Channel	16.00	16.50	No
		SU 20 MHz	All Channel	13.00	13.50	No
		RU 26T_20 MHz	1,2,3,4	13.00	13.50	No
			5,6,9	12.00	12.50	
			7,8,10	11.00	11.50	
			11	10.00	10.50	
		RU 52T_20 MHz	1,2,3,4,10	13.00	13.50	No
			5,6,9	12.00	12.50	
			7,8	11.00	11.50	
			11	10.50	11.00	
		RU 106T_20 MHz	11	15.50	16.00	No
			Except 11	13.00	13.50	
		RU 242T_20 MHz	All Channel	13.00	13.50	No
		SU 40 MHz	3	13.75	14.25	No
			4,6	14.00	14.50	
			5	13.00	13.50	
			7,8	13.25	13.75	
			9	12.50	13.00	
		RU 26T_40 MHz	7,8	12.00	12.50	No
			9	11.00	11.50	
			Except 7,8,9	13.00	13.50	
		RU 52T_40 MHz	7,8	12.00	12.50	No
			9	11.00	11.50	
			Except 7,8,9	13.00	13.50	
		RU 106T_40 MHz	All Channel	13.00	13.50	No
		RU 242T_40 MHz	All Channel	13.00	13.50	No
		RU 484T_40 MHz	3	13.75	14.25	No
			4,6	14.00	14.50	
			5	13.00	13.50	
			7,8	13.25	13.75	
			9	12.50	13.00	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (9) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1	Ant.1, Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	No
		802.11ac(VHT160)	All Channel	14.00	14.50	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	44	14.00	14.50	No
			Except 44	13.00	13.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	38	13.00	13.50	No
			Except 38	14.00	14.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	13.00	13.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	14.00	14.50	No
		RU 26T_160 MHz	All Channel	13.00	13.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (10) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	38	13.50	14.00	No
			Except 38	14.00	14.50	
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	38	13.50	14.00	No
			Except 38	14.00	14.50	
		802.11ac(VHT80)	All Channel	8.50	9.00	No
		802.11ac(VHT160)	All Channel	12.00	12.50	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	44	11.00	11.50	No
			Except 44	10.00	10.50	
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	38	10.00	10.50	No
			Except 38	11.00	11.50	
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	10.00	10.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No
		SU 160 MHz	All Channel	11.00	11.50	No
		RU 26T_160 MHz	All Channel	10.00	10.50	No
		RU 52T_160 MHz	All Channel	11.00	11.50	No
		RU 106T_160 MHz	All Channel	11.00	11.50	No
		RU 242T_160 MHz	All Channel	11.00	11.50	No
		RU 484T_160 MHz	All Channel	11.00	11.50	No
		RU 996T_160 MHz	All Channel	11.00	11.50	No
		RU 2x996T_160 MHz	All Channel	11.00	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (11) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2A	Ant.1, Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	Yes
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	52	14.00	14.50	No
			64	13.50	14.00	
			Except 52,64	13.00	13.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	54	14.00	14.50	No
			Except 54	13.00	13.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	14.00	14.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (12) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2A	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	62	13.25	13.75	No
			Except 62	14.00	14.50	
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	62	13.25	13.75	No
			Except 62	14.00	14.50	
		802.11ac(VHT80)	All Channel	11.00	11.50	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	52	11.00	11.50	No
			64	10.50	11.00	
			Except 52,64	10.00	10.50	
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	54	11.00	11.50	No
			Except 54	10.00	10.50	
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	11.00	11.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (13) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Ant.1	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	Yes
		802.11ac(VHT160)	All Channel	14.00	14.50	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	100,124,132	13.00	13.50	No
			140	13.50	14.00	
			Except 100,124,132,140	14.00	14.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	102,126,134	13.00	13.50	No
			142	13.50	14.00	
			Except 102,126,134,142	14.00	14.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	122	14.00	14.50	No
			Except 122	13.00	13.50	
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	14.00	14.50	No
		RU 26T_160 MHz	All Channel	13.00	13.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	14.00	14.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (14) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	Yes
		802.11ac(VHT160)	All Channel	14.00	14.50	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	100,124,132	13.00	13.50	No
			140	13.50	14.00	
			Except 100,124,132,140	14.00	14.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	102,126,134	13.00	13.50	No
			142	13.50	14.00	
			Except 102,126,134,142	14.00	14.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	122	14.00	14.50	No
			Except 122	13.00	13.50	
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	13.75	14.25	No
		RU 26T_160 MHz	All Channel	13.00	13.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	13.75	14.25	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (15) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	102	12.00	12.50	No
			Except 102	14.00	14.50	
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	102	12.00	12.50	No
			Except 102	14.00	14.50	
		802.11ac(VHT80)	106	10.50	11.00	No
			Except 106	14.00	14.50	
		802.11ac(VHT160)	All Channel	11.50	12.00	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	100,124,132	10.00	10.50	No
			140	10.50	11.00	
			Except 100,124,132,140	11.00	11.50	
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	102,126,134	10.00	10.50	No
			142	10.50	11.00	
			Except 102,126,134,142	11.00	11.50	
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	122	11.00	11.50	No
			Except 122	10.00	10.50	
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No
		SU 160 MHz	All Channel	12.75	13.25	No
		RU 26T_160 MHz	All Channel	10.00	10.50	No
		RU 52T_160 MHz	All Channel	11.00	11.50	No
		RU 106T_160 MHz	All Channel	11.00	11.50	No
		RU 242T_160 MHz	All Channel	11.00	11.50	No
		RU 484T_160 MHz	All Channel	11.00	11.50	No
		RU 996T_160 MHz	All Channel	11.00	11.50	No
		RU 2x996T_160 MHz	All Channel	12.75	13.25	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (16) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	Ant.1, Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	Yes
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	All Channel	14.00	14.50	No
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	All Channel	14.00	14.50	No
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	14.00	14.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (17) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	13.00	13.50	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	All Channel	11.00	11.50	No
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	All Channel	11.00	11.50	No
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	11.00	11.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (18) of (180)

**2.3.2 #Maximum WLAN Output Power (Tablet)**

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Ant.1	802.11b	All Channel	14.50	15.00	Yes
		802.11g	All Channel	14.50	15.00	No
		802.11n(HT20)	All Channel	14.50	15.00	No
		802.11n(HT40)	All Channel	14.50	15.00	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	11	13.00	13.50	No
			Except 11	14.00	14.50	
		RU 52T_20 MHz	11	13.50	14.00	No
			Except 11	14.00	14.50	
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	All Channel	14.00	14.50	No
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	14.00	14.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	14.00	14.50	No
		RU 26T_160 MHz	All Channel	14.00	14.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (19) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Ant.2	802.11b	All Channel	14.50	15.00	Yes
		802.11g	All Channel	14.50	15.00	No
		802.11n(HT20)	All Channel	14.50	15.00	No
		802.11n(HT40)	All Channel	14.50	15.00	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	11	13.00	13.50	No
			Except 11	14.00	14.50	
		RU 52T_20 MHz	11	14.00	14.50	No
			Except 11	14.00	14.50	
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	All Channel	14.00	14.50	No
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	14.00	14.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	14.00	14.50	No
		RU 26T_160 MHz	All Channel	14.00	14.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (20) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	MIMO	802.11n(HT20)	All Channel	14.50	15.00	No
		802.11n(HT40)	All Channel	14.50	15.00	Yes
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	11	10.00	10.50	No
			Except 11	11.00	11.50	
		RU 52T_20 MHz	11	10.50	11.00	No
			Except 11	11.00	11.50	
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	All Channel	11.00	11.50	No
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	11.00	11.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No
		SU 160 MHz	All Channel	11.00	11.50	No
		RU 26T_160 MHz	All Channel	11.00	11.50	No
		RU 52T_160 MHz	All Channel	11.00	11.50	No
		RU 106T_160 MHz	All Channel	11.00	11.50	No
		RU 242T_160 MHz	All Channel	11.00	11.50	No
		RU 484T_160 MHz	All Channel	11.00	11.50	No
		RU 996T_160 MHz	All Channel	11.00	11.50	No
		RU 2x996T_160 MHz	All Channel	11.00	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (21) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1	Ant.1, Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	No
		802.11ac(VHT160)	All Channel	14.00	14.50	No
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	44	14.00	14.50	No
			Except 44	13.00	13.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	38	13.00	13.50	No
			Except 38	14.00	14.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	13.00	13.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No
		SU 160 MHz	All Channel	14.00	14.50	No
		RU 26T_160 MHz	All Channel	13.00	13.50	No
		RU 52T_160 MHz	All Channel	14.00	14.50	No
		RU 106T_160 MHz	All Channel	14.00	14.50	No
		RU 242T_160 MHz	All Channel	14.00	14.50	No
		RU 484T_160 MHz	All Channel	14.00	14.50	No
		RU 996T_160 MHz	All Channel	14.00	14.50	No
		RU 2x996T_160 MHz	All Channel	14.00	14.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (22) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	38	13.50	14.00	No
			Except 38	14.00	14.50	
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	38	13.50	14.00	No
			Except 38	14.00	14.50	
		802.11ac(VHT80)	All Channel	8.50	9.00	No
		802.11ac(VHT160)	All Channel	12.00	12.50	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	44	11.00	11.50	No
			Except 44	10.00	10.50	
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	38	10.00	10.50	No
			Except 38	11.00	11.50	
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	10.00	10.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No
		SU 160 MHz	All Channel	11.00	11.50	No
		RU 26T_160 MHz	All Channel	10.00	10.50	No
		RU 52T_160 MHz	All Channel	11.00	11.50	No
		RU 106T_160 MHz	All Channel	11.00	11.50	No
		RU 242T_160 MHz	All Channel	11.00	11.50	No
		RU 484T_160 MHz	All Channel	11.00	11.50	No
		RU 996T_160 MHz	All Channel	11.00	11.50	No
		RU 2x996T_160 MHz	All Channel	11.00	11.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (23) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2A	Ant.1, Ant.2	802.11a	All Channel	14.00	14.50	No
		802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	All Channel	14.00	14.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	14.00	14.50	No
		802.11ac(VHT80)	All Channel	14.00	14.50	Yes
		SU 20 MHz	All Channel	14.00	14.50	No
		RU 26T_20 MHz	52	14.00	14.50	No
			64	13.50	14.00	
			Except 52,64	13.00	13.50	
		RU 52T_20 MHz	All Channel	14.00	14.50	No
		RU 106T_20 MHz	All Channel	14.00	14.50	No
		RU 242T_20 MHz	All Channel	14.00	14.50	No
		SU 40 MHz	All Channel	14.00	14.50	No
		RU 26T_40 MHz	54	14.00	14.50	No
			Except 54	13.00	13.50	
		RU 52T_40 MHz	All Channel	14.00	14.50	No
		RU 106T_40 MHz	All Channel	14.00	14.50	No
		RU 242T_40 MHz	All Channel	14.00	14.50	No
		RU 484T_40 MHz	All Channel	14.00	14.50	No
		SU 80 MHz	All Channel	14.00	14.50	No
		RU 26T_80 MHz	All Channel	14.00	14.50	No
		RU 52T_80 MHz	All Channel	14.00	14.50	No
		RU 106T_80 MHz	All Channel	14.00	14.50	No
		RU 242T_80 MHz	All Channel	14.00	14.50	No
		RU 484T_80 MHz	All Channel	14.00	14.50	No
		RU 996T_80 MHz	All Channel	14.00	14.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (24) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2A	MIMO	802.11n(HT20)	All Channel	14.00	14.50	No
		802.11n(HT40)	62	13.25	13.75	Yes
			Except 62	14.00	14.50	
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	62	13.25	13.75	No
			Except 62	14.00	14.50	
		802.11ac(VHT80)	All Channel	11.00	11.50	No
		SU 20 MHz	All Channel	11.00	11.50	No
		RU 26T_20 MHz	52	11.00	11.50	No
			64	10.50	11.00	
			Except 52,64	10.00	10.50	
		RU 52T_20 MHz	All Channel	11.00	11.50	No
		RU 106T_20 MHz	All Channel	11.00	11.50	No
		RU 242T_20 MHz	All Channel	11.00	11.50	No
		SU 40 MHz	All Channel	11.00	11.50	No
		RU 26T_40 MHz	54	11.00	11.50	No
			Except 54	10.00	10.50	
		RU 52T_40 MHz	All Channel	11.00	11.50	No
		RU 106T_40 MHz	All Channel	11.00	11.50	No
		RU 242T_40 MHz	All Channel	11.00	11.50	No
		RU 484T_40 MHz	All Channel	11.00	11.50	No
		SU 80 MHz	All Channel	11.00	11.50	No
		RU 26T_80 MHz	All Channel	11.00	11.50	No
		RU 52T_80 MHz	All Channel	11.00	11.50	No
		RU 106T_80 MHz	All Channel	11.00	11.50	No
		RU 242T_80 MHz	All Channel	11.00	11.50	No
		RU 484T_80 MHz	All Channel	11.00	11.50	No
		RU 996T_80 MHz	All Channel	11.00	11.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (25) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Ant.1, Ant.2	802.11a	All Channel	12.00	12.50	No
		802.11n(HT20)	All Channel	12.00	12.50	No
		802.11n(HT40)	All Channel	12.00	12.50	No
		802.11ac(VHT20)	All Channel	12.00	12.50	No
		802.11ac(VHT40)	All Channel	12.00	12.50	No
		802.11ac(VHT80)	All Channel	12.00	12.50	Yes
		802.11ac(VHT160)	All Channel	12.00	12.50	No
		SU 20 MHz	All Channel	12.00	12.50	No
		RU 26T_20 MHz	All Channel	12.00	12.50	No
		RU 52T_20 MHz	All Channel	12.00	12.50	No
		RU 106T_20 MHz	All Channel	12.00	12.50	No
		RU 242T_20 MHz	All Channel	12.00	12.50	No
		SU 40 MHz	All Channel	12.00	12.50	No
		RU 26T_40 MHz	All Channel	12.00	12.50	No
		RU 52T_40 MHz	All Channel	12.00	12.50	No
		RU 106T_40 MHz	All Channel	12.00	12.50	No
		RU 242T_40 MHz	All Channel	12.00	12.50	No
		RU 484T_40 MHz	All Channel	12.00	12.50	No
		SU 80 MHz	All Channel	12.00	12.50	No
		RU 26T_80 MHz	All Channel	12.00	12.50	No
		RU 52T_80 MHz	All Channel	12.00	12.50	No
		RU 106T_80 MHz	All Channel	12.00	12.50	No
		RU 242T_80 MHz	All Channel	12.00	12.50	No
		RU 484T_80 MHz	All Channel	12.00	12.50	No
		RU 996T_80 MHz	All Channel	12.00	12.50	No
		SU 160 MHz	All Channel	12.00	12.50	No
		RU 26T_160 MHz	All Channel	12.00	12.50	No
		RU 52T_160 MHz	All Channel	12.00	12.50	No
		RU 106T_160 MHz	All Channel	12.00	12.50	No
		RU 242T_160 MHz	All Channel	12.00	12.50	No
		RU 484T_160 MHz	All Channel	12.00	12.50	No
		RU 996T_160 MHz	All Channel	12.00	12.50	No
		RU 2x996T_160 MHz	All Channel	12.00	12.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (26) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	MIMO	802.11n(HT20)	All Channel	14.00	14.50	Yes
		802.11n(HT40)	All Channel	12.00	12.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	12.00	12.50	No
		802.11ac(VHT80)	106	10.50	11.00	No
			Except 106	12.00	12.50	
		802.11ac(VHT160)	All Channel	11.50	12.00	No
		SU 20 MHz	All Channel	9.00	9.50	No
		RU 26T_20 MHz	All Channel	9.00	9.50	No
		RU 52T_20 MHz	All Channel	9.00	9.50	No
		RU 106T_20 MHz	All Channel	9.00	9.50	No
		RU 242T_20 MHz	All Channel	9.00	9.50	No
		SU 40 MHz	All Channel	9.00	9.50	No
		RU 26T_40 MHz	All Channel	9.00	9.50	No
		RU 52T_40 MHz	All Channel	9.00	9.50	No
		RU 106T_40 MHz	All Channel	9.00	9.50	No
		RU 242T_40 MHz	All Channel	9.00	9.50	No
		RU 484T_40 MHz	All Channel	9.00	9.50	No
		SU 80 MHz	All Channel	9.00	9.50	No
		RU 26T_80 MHz	All Channel	9.00	9.50	No
		RU 52T_80 MHz	All Channel	9.00	9.50	No
		RU 106T_80 MHz	All Channel	9.00	9.50	No
		RU 242T_80 MHz	All Channel	9.00	9.50	No
		RU 484T_80 MHz	All Channel	9.00	9.50	No
		RU 996T_80 MHz	All Channel	9.00	9.50	No
		SU 160 MHz	All Channel	9.00	9.50	No
		RU 26T_160 MHz	All Channel	9.00	9.50	No
		RU 52T_160 MHz	All Channel	9.00	9.50	No
		RU 106T_160 MHz	All Channel	9.00	9.50	No
		RU 242T_160 MHz	All Channel	9.00	9.50	No
		RU 484T_160 MHz	All Channel	9.00	9.50	No
		RU 996T_160 MHz	All Channel	9.00	9.50	No
		RU 2x996T_160 MHz	All Channel	9.00	9.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (27) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	Ant.1, Ant.2	802.11a	All Channel	12.00	12.50	No
		802.11n(HT20)	All Channel	12.00	12.50	No
		802.11n(HT40)	All Channel	12.00	12.50	No
		802.11ac(VHT20)	All Channel	12.00	12.50	No
		802.11ac(VHT40)	All Channel	12.00	12.50	No
		802.11ac(VHT80)	All Channel	12.00	12.50	Yes
		SU 20 MHz	All Channel	12.00	12.50	No
		RU 26T_20 MHz	All Channel	12.00	12.50	No
		RU 52T_20 MHz	All Channel	12.00	12.50	No
		RU 106T_20 MHz	All Channel	12.00	12.50	No
		RU 242T_20 MHz	All Channel	12.00	12.50	No
		SU 40 MHz	All Channel	12.00	12.50	No
		RU 26T_40 MHz	All Channel	12.00	12.50	No
		RU 52T_40 MHz	All Channel	12.00	12.50	No
		RU 106T_40 MHz	All Channel	12.00	12.50	No
		RU 242T_40 MHz	All Channel	12.00	12.50	No
		RU 484T_40 MHz	All Channel	12.00	12.50	No
		SU 80 MHz	All Channel	12.00	12.50	No
		RU 26T_80 MHz	All Channel	12.00	12.50	No
		RU 52T_80 MHz	All Channel	12.00	12.50	No
		RU 106T_80 MHz	All Channel	12.00	12.50	No
		RU 242T_80 MHz	All Channel	12.00	12.50	No
		RU 484T_80 MHz	All Channel	12.00	12.50	No
		RU 996T_80 MHz	All Channel	12.00	12.50	No
		SU 160 MHz	All Channel	12.00	12.50	No
		RU 26T_160 MHz	All Channel	12.00	12.50	No
		RU 52T_160 MHz	All Channel	12.00	12.50	No
		RU 106T_160 MHz	All Channel	12.00	12.50	No
		RU 242T_160 MHz	All Channel	12.00	12.50	No
		RU 484T_160 MHz	All Channel	12.00	12.50	No
		RU 996T_160 MHz	All Channel	12.00	12.50	No
		RU 2x996T_160 MHz	All Channel	12.00	12.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (28) of (180)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	MIMO	802.11n(HT20)	All Channel	14.00	14.50	Yes
		802.11n(HT40)	All Channel	12.00	12.50	No
		802.11ac(VHT20)	All Channel	14.00	14.50	No
		802.11ac(VHT40)	All Channel	12.00	12.50	No
		802.11ac(VHT80)	All Channel	12.00	12.50	No
		SU 20 MHz	All Channel	9.00	9.50	No
		RU 26T_20 MHz	All Channel	9.00	9.50	No
		RU 52T_20 MHz	All Channel	9.00	9.50	No
		RU 106T_20 MHz	All Channel	9.00	9.50	No
		RU 242T_20 MHz	All Channel	9.00	9.50	No
		SU 40 MHz	All Channel	9.00	9.50	No
		RU 26T_40 MHz	All Channel	9.00	9.50	No
		RU 52T_40 MHz	All Channel	9.00	9.50	No
		RU 106T_40 MHz	All Channel	9.00	9.50	No
		RU 242T_40 MHz	All Channel	9.00	9.50	No
		RU 484T_40 MHz	All Channel	9.00	9.50	No
		SU 80 MHz	All Channel	9.00	9.50	No
		RU 26T_80 MHz	All Channel	9.00	9.50	No
		RU 52T_80 MHz	All Channel	9.00	9.50	No
		RU 106T_80 MHz	All Channel	9.00	9.50	No
		RU 242T_80 MHz	All Channel	9.00	9.50	No
		RU 484T_80 MHz	All Channel	9.00	9.50	No
		RU 996T_80 MHz	All Channel	9.00	9.50	No
		SU 160 MHz	All Channel	9.00	9.50	No
		RU 26T_160 MHz	All Channel	9.00	9.50	No
		RU 52T_160 MHz	All Channel	9.00	9.50	No
		RU 106T_160 MHz	All Channel	9.00	9.50	No
		RU 242T_160 MHz	All Channel	9.00	9.50	No
		RU 484T_160 MHz	All Channel	9.00	9.50	No
		RU 996T_160 MHz	All Channel	9.00	9.50	No
		RU 2x996T_160 MHz	All Channel	9.00	9.50	No

2.3.3 #Maximum Bluetooth Output Power (Notebook & Tablet)

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
Bluetooth	Ant.2	BDR(GFSK)	All Channel	9.20	10.70	Yes
		EDR ($\pi/4$ DQPSK)	All Channel	5.20	6.70	No
		EDR(8DPSK)	All Channel	5.20	6.70	No
		LE(GFSK)	All Channel	5.00	6.50	No

KCTL

2.4 SAR Test Configurations

2.4.1 #DUT Antenna Locations

The device is a 2-in-1 model that operations as a laptop when folded 90 degrees and as a tablet when folded 360 degrees.

When in tablet mode the overall dimensions of this device are > 20 cm.

A diagram showing the location of the device antennas can be found in Appendix D.

2.4.2 SAR Test Exclusion Considerations (Tablet Mode)

Band / Ant.	Freq. [MHz]	Output Power		Separation distances [mm]					SAR Exemption				
		dBm	mW	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
2.4 GHz Ant.1	2 462.0	15.00	32	5	18	259	5	199	10.04 Measure	2.79 EXEMPT	2186mW EXEMPT	10.04 Measure	1585mW EXEMPT
U-NII-2A Ant.1	5 320.0	14.50	28	5	18	259	5	199	12.92 Measure	3.59 Measure	2155mW EXEMPT	12.92 Measure	1555mW EXEMPT
U-NII-2C Ant.1	5 720.0	12.50	18	5	18	259	5	199	8.61 Measure	2.39 EXEMPT	2153mW EXEMPT	8.61 Measure	1552mW EXEMPT
U-NII-3 Ant.1	5 825.0	12.50	18	5	18	259	5	199	8.69 Measure	2.41 EXEMPT	2152mW EXEMPT	8.69 Measure	1552mW EXEMPT
2.4 GHz Ant.2	2 462.0	15.00	32	5	259	18	5	199	10.04 Measure	2186mW EXEMPT	2.79 EXEMPT	10.04 Measure	1585mW EXEMPT
U-NII-2A Ant.2	5 320.0	14.50	28	5	259	18	5	199	12.92 Measure	2155mW EXEMPT	3.59 Measure	12.92 Measure	1555mW EXEMPT
U-NII-2C Ant.2	5 720.0	12.50	18	5	259	18	5	199	8.61 Measure	2153mW EXEMPT	2.39 EXEMPT	8.61 Measure	1552mW EXEMPT
U-NII-3 Ant.2	5 825.0	12.50	18	5	259	18	5	199	8.69 Measure	2152mW EXEMPT	2.41 EXEMPT	8.69 Measure	1552mW EXEMPT
Bluetooth Ant.2	2 480.0	10.70	12	5	259	18	5	199	3.78 Measure	2185mW EXEMPT	1.05 EXEMPT	3.78 Measure	1585mW EXEMPT

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.

Note 2: Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.

Note 3: If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation <= 50mm the value is the KDB 447498 calculated value and must be less than 3.0 for SAR exemption.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Device Type	Band / Ant.	Device Edge for SAR Testing (Front View)					
		Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth	No	Yes	No	No	No	No
Tablet	2.4 GHz Ant.1	No	Yes	No	No	Yes	No
	U-NII-2A Ant.1	No	Yes	Yes	No	Yes	No
	U-NII-2C Ant.1	No	Yes	No	No	Yes	No
	U-NII-3 Ant.1	No	Yes	No	No	Yes	No
	2.4 GHz Ant.2	No	Yes	No	No	Yes	No
	U-NII-2A Ant.2	No	Yes	No	Yes	Yes	No
	U-NII-2C Ant.2	No	Yes	No	No	Yes	No
	U-NII-3 Ant.2	No	Yes	No	No	Yes	No
	Bluetooth Ant.2	No	Yes	No	No	Yes	No

2.5 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- November 2019 TCB Workshop Notes (Hall Effect and Gravity Sensor Guidance)

KCTL

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. FCC SAR General Measurement Procedures

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

6.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

6.2.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

6.2.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

KCTL

7. RF Average Conducted Output Power

7.1 WLAN Average Conducted Output Power (Notebook)

Band	Ant.	Mode	Conducted Powers (dBm)		
			Low	Mid	High
WLAN 2.4 GHz	Ant.1	802.11b	16.30	16.29	16.26
	Ant.2	802.11b	16.25	16.23	16.21
	Ant.1 MIMO	802.11n(HT20)	11.23	13.38	11.20
	Ant.2 MIMO	802.11n(HT20)	11.36	13.28	11.31
U-NII-2A	Ant.1	802.11ac(VHT80)	-	14.45	-
	Ant.2	802.11ac(VHT80)	-	14.50	-
	Ant.1 MIMO	802.11n(HT40)	11.34	-	10.46
	Ant.2 MIMO	802.11n(HT40)	11.38	-	10.42
U-NII-2C	Ant.1	802.11ac(VHT80)	14.25	14.31	14.30
	Ant.2	802.11ac(VHT80)	14.44	14.26	14.30
	Ant.1 MIMO	802.11ac(VHT80)	7.37	11.30	11.27
	Ant.2 MIMO	802.11ac(VHT80)	7.23	11.23	11.29
U-NII-3	Ant.1	802.11ac(VHT80)	-	14.44	-
	Ant.2	802.11ac(VHT80)	-	14.35	-
	Ant.1 MIMO	802.11n(HT40)	11.27	-	11.39
	Ant.2 MIMO	802.11n(HT40)	11.25	-	11.36

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



7.2 WLAN Average Conducted Output Power (Tablet)

Band	Ant.	Mode	Conducted Powers (dBm)		
			Low	Mid	High
WLAN 2.4 GHz	Ant.1	802.11b	14.96	14.98	14.93
	Ant.2	802.11b	14.90	14.93	14.86
	Ant.1 MIMO	802.11n(HT40)	9.93	11.96	9.91
	Ant.2 MIMO	802.11n(HT40)	9.99	11.98	9.89
U-NII-2A	Ant.1	802.11ac(VHT80)	-	14.45	-
	Ant.2	802.11ac(VHT80)	-	14.50	-
	Ant.1 MIMO	802.11n(HT40)	11.34	-	10.46
	Ant.2 MIMO	802.11n(HT40)	11.38	-	10.42
U-NII-2C	Ant.1	802.11ac(VHT80)	12.44	12.20	12.19
	Ant.2	802.11ac(VHT80)	12.35	12.37	12.41
	Ant.1 MIMO	802.11n(HT20)	11.19	11.23	11.29
	Ant.2 MIMO	802.11n(HT20)	11.24	11.20	11.21
U-NII-3	Ant.1	802.11ac(VHT80)	-	12.35	-
	Ant.2	802.11ac(VHT80)	-	12.38	-
	Ant.1 MIMO	802.11n(HT20)	11.22	11.37	11.36
	Ant.2 MIMO	802.11n(HT20)	11.21	11.23	11.22

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



7.3 Bluetooth Average Conducted Output Power (Notebook & Tablet)

Mode	Freq. [MHz]	Channel	Conducted Powers
			(dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	8.21
	2 441.0	39	8.76
	2 480.0	78	9.58
BDR_2-DH5 (2 Mbps)	2 402.0	0	4.71
	2 441.0	39	4.93
	2 480.0	78	5.94
EDR_3-DH5 (3 Mbps)	2 402.0	0	4.75
	2 441.0	39	4.96
	2 480.0	78	5.91
LE (1 Mbps)	2 402.0	0	4.54
	2 440.0	19	4.61
	2 480.0	39	5.35
LE (2 Mbps)	2 402.0	0	4.54
	2 440.0	19	4.59
	2 480.0	39	5.36


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (41) of (180)

**7.4 Bluetooth Duty Factor**

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH5	2.88	3.76	76.6	1.305

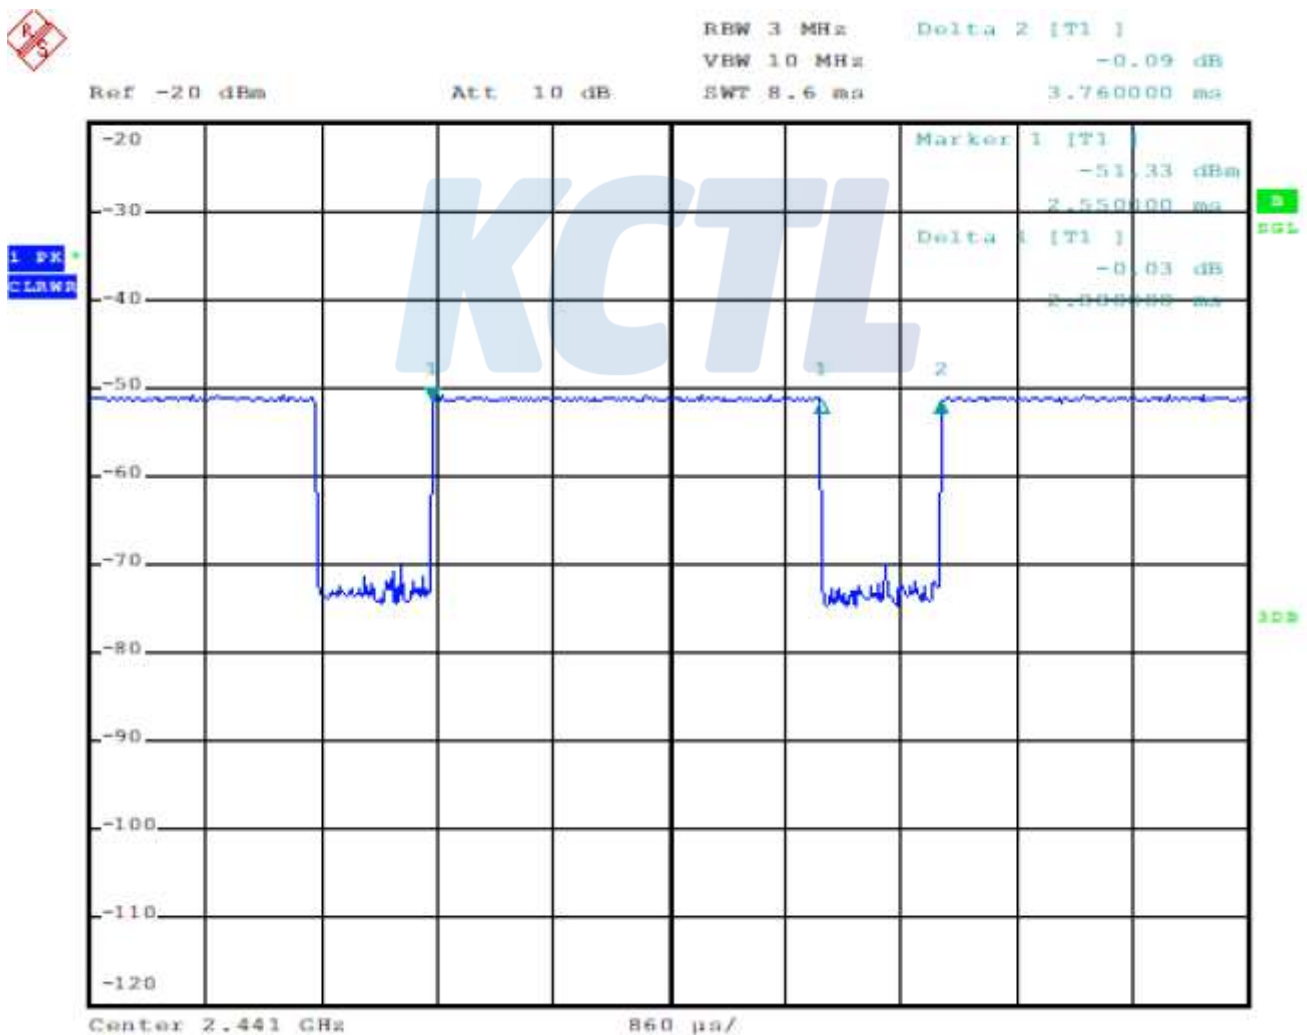7.5 Bluetooth Power Measurement Setup**7.6 Bluetooth Duty Plot**

8. System Verification

8.1 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2020-10-08	39.36	1.88	21.15
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2020-10-12	38.23	1.80	21.32
5 300.0	Recommended Limit		$35.90 \pm 5 \%$ (34.11 ~ 37.70)	$4.76 \pm 5 \%$ (4.52 ~ 5.00)	22 ± 2
	Measured	2020-10-07	35.57	4.86	20.61
5 300.0	Recommended Limit		$35.90 \pm 5 \%$ (34.11 ~ 37.70)	$4.76 \pm 5 \%$ (4.52 ~ 5.00)	22 ± 2
	Measured	2020-10-08	35.51	4.86	20.98
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73 ~ 37.28)	$5.07 \pm 5 \%$ (4.82 ~ 5.32)	22 ± 2
	Measured	2020-10-12	35.65	5.17	20.99
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73 ~ 37.28)	$5.07 \pm 5 \%$ (4.82 ~ 5.32)	22 ± 2
	Measured	2020-10-13	35.73	5.17	20.93
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54 ~ 37.07)	$5.27 \pm 5 \%$ (5.01 ~ 5.53)	22 ± 2
	Measured	2020-10-12	34.89	5.40	20.77
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54 ~ 37.07)	$5.27 \pm 5 \%$ (5.01 ~ 5.53)	22 ± 2
	Measured	2020-10-13	35.38	5.39	20.93
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54 ~ 37.07)	$5.27 \pm 5 \%$ (5.01 ~ 5.53)	22 ± 2
	Measured	2020-10-13	34.95	5.38	20.81


<Table 1. Measurement result of Tissue electric parameters>

8.2 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

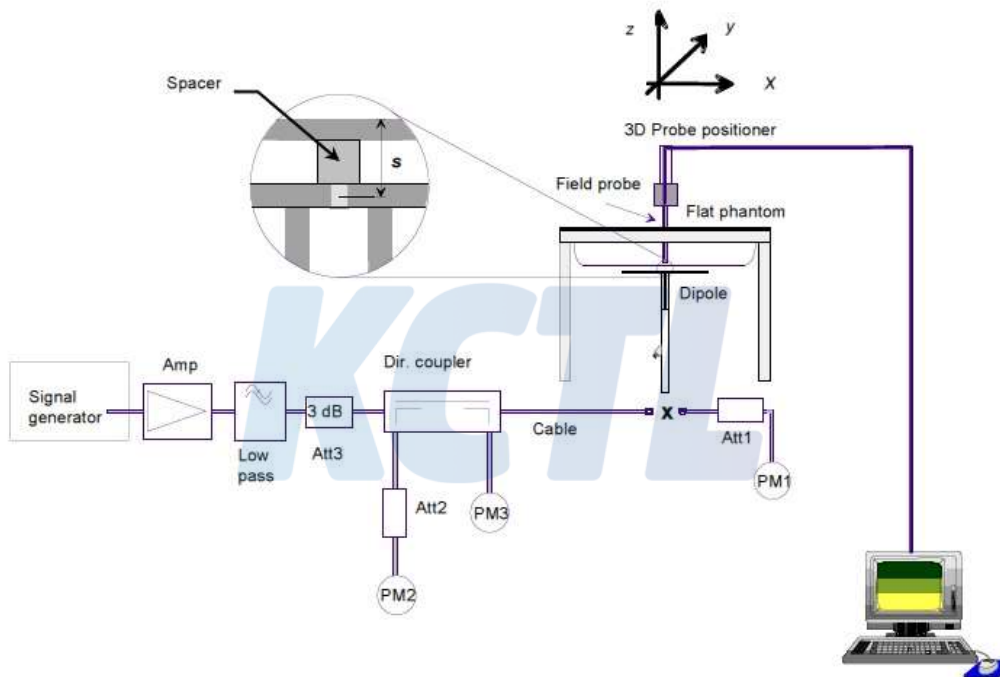

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Normalized to 1 W)		
D2450V2 SN: 895	EX3DV4 SN: 7541	2 450.0	HSL	Recommended Limit 1g (Normalized)		51.30 ± 10 % (46.17~56.43)
				Measured	2020-10-08	53.10
D2450V2 SN: 895	EX3DV4 SN: 7541	2 450.0	HSL	Recommended Limit 1g (Normalized)		51.30 ± 10 % (46.17~56.43)
				Measured	2020-10-12	50.80
D5GHzV2 SN: 1134	EX3DV4 SN: 3928	5 300.0	HSL	Recommended Limit 1g (Normalized)		82.30 ± 10 % (74.07~90.53)
				Measured	2020-10-07	81.50
D5GHzV2 SN: 1134	EX3DV4 SN: 3928	5 300.0	HSL	Recommended Limit 1g (Normalized)		82.30 ± 10 % (74.07~90.53)
				Measured	2020-10-08	83.70
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 600.0	HSL	Recommended Limit 1g (Normalized)		84.10 ± 10 % (75.69 ~ 92.51)
				Measured	2020-10-12	85.30
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 600.0	HSL	Recommended Limit 1g (Normalized)		84.10 ± 10 % (75.69~92.51)
				Measured	2020-10-13	83.60
D5GHzV2 SN: 1134	EX3DV4 SN: 3928	5 800.0	HSL	Recommended Limit 1g (Normalized)		81.50 ± 10 % (73.35~89.65)
				Measured	2020-10-12	82.60
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 800.0	HSL	Recommended Limit 1g (Normalized)		81.50 ± 10 % (73.35~89.65)
				Measured	2020-10-13	85.50
D5GHzV2 SN: 1134	EX3DV4 SN: 3928	5 800.0	HSL	Recommended Limit 1g (Normalized)		81.50 ± 10 % (73.35~89.65)
				Measured	2020-10-13	79.90

<Table 1. System Verification Result>

9. SAR Test Results

9.1 Standalone Body SAR Test Results (Notebook)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Ant.1	Rear	0	2 412.0	16.30	16.50	1.047	1.005	0.279	0.294	1
802.11b	Ant.2	Rear	0	2 412.0	16.25	16.50	1.059	1.005	0.278	0.296	2

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Ant.1	Rear	0	5 290.0	14.45	14.50	1.012	1.011	0.166	0.170	3
802.11ac (VHT80)	Ant.2	Rear	0	5 290.0	14.50	14.50	1.000	1.011	0.184	0.186	4

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Ant.1	Rear	0	5 610.0	14.31	14.50	1.045	1.011	0.149	0.157	5
802.11ac (VHT80)	Ant.2	Rear	0	5 530.0	14.44	14.50	1.014	1.011	0.159	0.163	6

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Ant.1	Rear	0	5 775.0	14.44	14.50	1.014	1.011	0.168	0.172	7
802.11ac (VHT80)	Ant.2	Rear	0	5 775.0	14.35	14.50	1.035	1.011	0.247	0.259	8

Bluetooth										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_ DH5	Rear	0	2 480.0	9.58	10.70	1.294	1.305	0.055	0.093	9

9.2 Standalone Body SAR Test Results (Tablet)

WLAN 2.4 GHz												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)		Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
					Ant.1	Ant.2						
802.11b	Ant.1	Rear	0	2 437.0	14.98		15.00	1.005	1.005	1.020	1.030	10
		Rear	0	2 412.0	14.96		15.00	1.009	1.005	0.753	0.764	
		Top	0	2 437.0	14.98		15.00	1.005	1.005	0.958	0.968	
		Top	0	2 412.0	14.96		15.00	1.009	1.005	0.608	0.617	
802.11b	Ant.2	Rear	0	2 437.0	14.93		15.00	1.016	1.005	0.828	0.845	11
		Rear	0	2 412.0	14.90		15.00	1.023	1.005	0.752	0.773	
		Top	0	2 437.0	14.93		15.00	1.016	1.005	0.723	0.738	
802.11n (HT40)	MIMO	Rear	0	2 437.0	11.96	11.98	15.00	1.005	1.011	0.479	0.487	12
		Top	0	2 437.0	11.96	11.98	15.00	1.005	1.011	0.376	0.382	
Repeated SAR Test												
802.11b	Ant.1	Rear	0	2 437.0	14.98		15.00	1.005	1.005	0.993	1.003	
802.11b	Ant.2	Rear	0	2 437.0	14.93		15.00	1.016	1.005	0.804	0.821	

U-NII-2A												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)		Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
					Ant.1	Ant.2						
802.11ac (VHT80)	Ant.1	Rear	0	5 290.0	14.45		14.50	1.012	1.011	1.090	1.115	13
		Left	0	5 290.0	14.45		14.50	1.012	1.011	0.084	0.086	
		Top	0	5 290.0	14.45		14.50	1.012	1.011	0.567	0.580	
802.11ac (VHT80)	Ant.2	Rear	0	5 290.0	14.50		14.50	1.000	1.011	1.090	1.102	14
		Right	0	5 290.0	14.50		14.50	1.000	1.011	0.073	0.074	
		Top	0	5 290.0	14.50		14.50	1.000	1.011	0.748	0.756	
802.11n (HT40)	MIMO	Rear	0	5 270.0	11.34	11.38	14.50	1.030	1.011	0.673	0.701	15
		Top	0	5 270.0	11.34	11.38	14.50	1.030	1.011	0.362	0.377	
Repeated SAR Test												
802.11ac (VHT80)	Ant.1	Rear	0	5 290.0	14.45		14.50	1.012	1.011	1.080	1.105	
802.11ac (VHT80)	Ant.2	Rear	0	5 290.0	14.50		14.50	1.000	1.011	0.984	0.995	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (47) of (180)

**U-NII-2C**

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)		Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
					Ant.1	Ant.2						
802.11ac (VHT80)	Ant. 1	Rear	0	5 530.0	12.44		12.50	1.014	1.011	0.907	0.930	
		Rear	0	5 610.0	12.20		12.50	1.072	1.011	0.894	0.969	16
		Top	0	5 530.0	12.44		12.50	1.014	1.011	0.640	0.656	
802.11ac (VHT80)	Ant.2	Rear	0	5 690.0	12.41		12.50	1.021	1.011	0.643	0.664	17
		Top	0	5 690.0	12.41		12.50	1.021	1.011	0.379	0.391	
802.11n (HT20)	MIMO	Rear	0	5 720.0	11.28	11.27	14.50	1.050	1.011	0.612	0.650	18
		Top	0	5 720.0	11.28	11.27	14.50	1.050	1.011	0.336	0.357	
Repeated SAR Test												
802.11ac (VHT80)	Ant. 1	Rear	0	5 530.0	12.44		12.50	1.014	1.011	0.893	0.915	

U-NII-3

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)		Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
					Ant.1	Ant.2						
802.11ac (VHT80)	Ant.1	Rear	0	5 775.0	12.35		12.50	1.035	1.011	0.793	0.830	19
		Top	0	5 775.0	12.35		12.50	1.035	1.011	0.359	0.376	
802.11ac (VHT80)	Ant.2	Rear	0	5 775.0	12.38		12.50	1.028	1.011	0.979	1.017	
		Top	0	5 775.0	12.38		12.50	1.028	1.011	0.555	0.577	
802.11n (HT20)	MIMO	Rear	0	5 785.0	11.37	11.23	14.50	1.045	1.011	0.691	0.730	21
		Top	0	5 785.0	11.37	11.23	14.50	1.045	1.011	0.436	0.461	
Repeated SAR Test												
802.11ac (VHT80)	Ant.2	Rear	0	5 775.0	12.38		12.50	1.028	1.011	1.070	1.112	20

Bluetooth

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_ DH5	Rear	0	2 480.0	9.58	10.70	1.294	1.305	0.262	0.442	22
	Top	0	2 480.0	9.58	10.70	1.294	1.305	0.165	0.279	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (48) of (180)

**General Notes:**

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
6. WLAN & Bluetooth transmission was verified using a spectrum analyzer

10. Simultaneous Transmission

10.1 #Simultaneous Transmission Configurations

No.	Scenario	Operation
1	WLAN 2.4 GHz Ant.1 + Bluetooth Ant.2	Yes
2	WLAN 2.4 GHz Ant.1 + WLAN 2.4 GHz Ant.2	Yes
3	WLAN 5 GHz Ant.1 + Bluetooth Ant.2	Yes
4	WLAN 5 GHz Ant.2 + Bluetooth Ant.2	Yes
5	WLAN 5 GHz Ant.1 + WLAN 5 GHz Ant.2	Yes
6	WLAN 5 GHz MIMO+ Bluetooth Ant.2	Yes

Notes:

- It does not to transmit simultaneously the Bluetooth and WLAN 2.4 GHz Ant.2

10.2 Estimated SAR

When standalone SAR is not required to be measured, SAR must also be estimated to determine simultaneous transmission SAR test exclusion.

[Tablet Mode]

Band / Ant.	Freq. [MHz]	Output Power		Separation distances [mm]					Estimated 1g SAR Value (W/kg)				
		dBm	mW	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
2.4 GHz Ant.1	2 462.0	15.00	32	5	18.0	259.0	5	199.0	Measure	0.372	0.400	Measure	0.400
U-NII-2A Ant.1	5 320.0	14.50	28	5	18.0	259.0	5	199.0	Measure	Measure	0.400	Measure	0.400
U-NII-2C Ant.1	5 720.0	12.50	18	5	18.0	259.0	5	199.0	Measure	0.319	0.400	Measure	0.400
U-NII-3 Ant.1	5 825.0	12.50	18	5	18.0	259.0	5	199.0	Measure	0.322	0.400	Measure	0.400
2.4 GHz Ant.2	2 462.0	15.00	32	5	259.0	18.0	5	199.0	Measure	0.400	0.372	Measure	0.400
U-NII-2A Ant.2	5 320.0	14.50	28	5	259.0	18.0	5	199.0	Measure	0.400	Measure	Measure	0.400
U-NII-2C Ant.2	5 720.0	12.50	18	5	259.0	18.0	5	199.0	Measure	0.400	0.319	Measure	0.400
U-NII-3 Ant.2	5 825.0	12.50	18	5	259.0	18.0	5	199.0	Measure	0.400	0.322	Measure	0.400
Bluetooth Ant.2	2 480.0	10.70	12	5	259.0	18.0	5	199.0	Measure	0.400	0.140	Measure	0.400

Notes:

- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.
- If the antenna separation distance is > 50mm then the estimated SAR value is 0.4 W/Kg.
- Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR or determining if SAR is excluded.

10.3 Simultaneous Transmission Analysis

Exposure Condition /Position		WLAN						Bluetooth Ant.2
		2.4 GHz Ant.1	2.4 GHz Ant.2	2.4 GHz MIMO	5 GHz Ant.1	5 GHz Ant.2	5 GHz MIMO	
		[①]	[②]	[③]	[④]	[⑤]	[⑥]	
Body (Notebook)	Rear	0.294	0.296	-	0.172	0.259	-	0.093
Body (Tablet)	Rear	1.030	0.845	0.487	1.115	1.102	0.730	0.442
	Left	0.372	0.400	-	0.322	0.400	-	0.400
	Right	0.400	0.372	-	0.400	0.322	-	0.140
	Top	0.968	0.738	0.382	0.656	0.756	0.461	0.279
	Bottom	0.400	0.400	0.400	0.400	0.400	0.400	0.400
Summation								
Exposure Condition /Position		[①]+[⑦]	[①]+[②]=[③]	[④]+[⑦]	[⑤]+[⑦]	[④]+[⑤]=[⑥]	[④]+[⑤]+[⑦]=[⑥]+[⑦]	
Body (Notebook)	Rear	0.387	0.590	0.265	0.352	0.431	0.524	
Body (Tablet)	Rear	1.472	0.487	1.557	1.544	0.730	1.172	
	Left	0.772	0.772	0.722	0.800	0.722	1.122	
	Right	0.540	0.772	0.540	0.462	0.722	0.862	
	Top	1.247	0.382	0.935	1.035	0.461	0.740	
	Bottom	0.800	0.400	0.800	0.800	0.400	0.800	

Notes:

- Simultaneous transmission SAR test exclusion considerations
Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

11. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

RF Exposure Conditions	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
Tablet	WLAN 2.4 GHz	802.11b	Ant.1	2 437.0	Rear	0	1.020	0.993	1.03
		802.11b	Ant.2	2 437.0	Rear	0	0.828	0.804	1.03
	U-NII-2A	802.11ac(VHT80)	Ant.1	5 290.0	Rear	0	1.090	1.080	1.01
		802.11ac(VHT80)	Ant.2	5 290.0	Rear	0	1.090	0.984	1.11
	U-NII-2C	802.11ac(VHT80)	Ant.1	5 530.0	Rear	0	0.907	0.893	1.02
	U-NII-3	802.11ac(VHT80)	Ant.2	5 775.0	Rear	0	0.979	1.070	1.09

12. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

KCTL

13. Test Equipment Information

Test Platform	SPEAG DASY5 System			
Version	DASY52: 52.10.4.1527 / SEMCAD: 14.6.14 (7483)			
Location	KCTL Inc, 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 2	-	-
Shield Room	-	8F - 3		
Shield Room	-	8F - 4		
DASY5 Robot	TX90XL	F12/5L7FA1/A/01	-	-
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
DASY6 Robot	TX60 Lspeag	F/19/0007289/A/001	-	-
Phantom	2mm Oval Phantom ELI5	1178	-	-
Phantom	2mm Oval Phantom ELI5	2097	-	-
Phantom	2mm Oval Phantom ELI5	2098	-	-
Mounting Device	Laptop Holder	-	-	-
DAE	DAE4	666	2020-01-24	2021-01-24
DAE	DAE4	1586	2020-04-22	2021-04-22
DAE	DAE4	1587	2020-07-29	2021-07-29
Probe	EX3DV4	3928	2020-01-30	2021-01-30
Probe	EX3DV4	7540	2020-04-28	2021-04-28
Probe	EX3DV4	7541	2020-07-30	2021-07-30
ESG Vector Signal Generator	E4438C	MY42080845	2020-03-12	2021-03-12
ESG Vector Signal Generator	E4438C	MY42080486	2020-05-11	2021-05-11
Dual Power Meter	EPM-442A	GB37480680	2020-05-12	2021-05-12
Dual Power Meter	E4419B	GB43312301	2020-05-12	2021-05-12
Power Sensor	8481H	2703A11902	2020-05-12	2021-05-12
Power Sensor	8481H	3318A18090	2020-05-12	2021-05-12
Power Sensor	8481H	3318A 19379	2020-05-12	2021-05-12
Power Sensor	8481H	3318A 19377	2020-05-12	2021-05-12
Attenuator	8491A	21552	2020-05-12	2021-05-12
Attenuator	8491A	35560	2020-05-12	2021-05-12
Attenuator	8491A	35934	2020-05-12	2021-05-12
Attenuator	8491B 3dB	17387	2020-05-12	2021-05-12
Attenuator	8491B-6dB	MY39270294	2020-05-12	2021-05-12

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0046-A
Page (54) of (180)



Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Attenuator	8491B 10dB	29425	2020-05-12	2021-05-12
Power Amplifier	AMP2027	10010	2020-05-12	2021-05-12
Power Amplifier	5190FE	1012	2020-05-12	2021-05-12
Dual Directional Coupler	772D	2839A160504	2020-05-12	2021-05-12
Dual Directional Coupler	772D	2839A00719	2020-05-12	2021-05-12
Low Pass Filter	VLF-3000+	31831	2020-05-12	2021-05-12
Low Pass Filter	VLF-6000+	31838	2020-05-12	2021-05-12
Dipole Validation Kits	D2450V2	895	2020-07-21	2022-07-21
Dipole Validation Kits	D5GHzV2	1134	2020-05-20	2022-05-20
Network Analyzer	E5071B	MY42403524	2020-02-27	2021-02-27
Dielectric Assessment Kit	DAK-3.5	1078	2020-05-19	2021-05-19
Humidity/Temp	MHB-382SD	23107	2020-05-14	2021-05-14
Humidity/Temp	MHB-382SD	46301	2020-03-21	2021-03-21
Humidity/Temp	MHB-382SD	46307	2020-03-27	2021-03-27
Spectrum Analyzer	FSP7	100289	2020-01-03	2021-01-03

KCTL

14. Test System Verification Results

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2020-10-08.da53:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 39.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2450 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2020-10-08/Area Scan (8x11x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 6.85 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2020-10-08/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 69.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 11.1 W/kg


SAR(1 g) = 5.31 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.94 W/kg

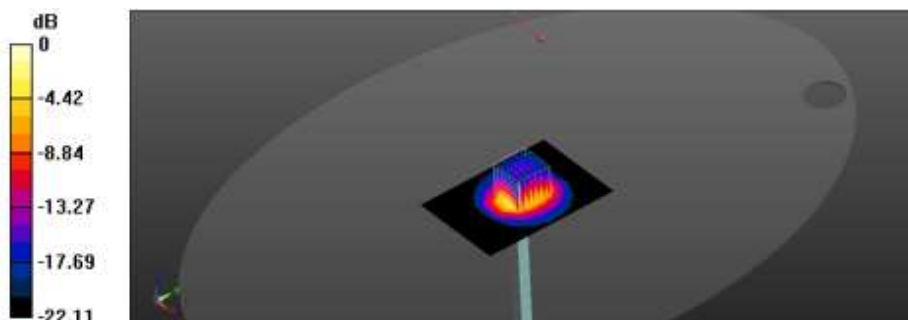

0 dB = 8.94 W/kg = 9.51 dBW/kg

This test report shall not be reproduced, except in full, without the written approval

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2020-10-12.da53:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 38.23$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2450 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2020-10-12/Area Scan (8x11x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 6.57 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2020-10-12/Zoom Scan (7x7x7)/Cube**0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 69.68 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 10.6 W/kg


SAR(1 g) = 5.08 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.56 W/kg

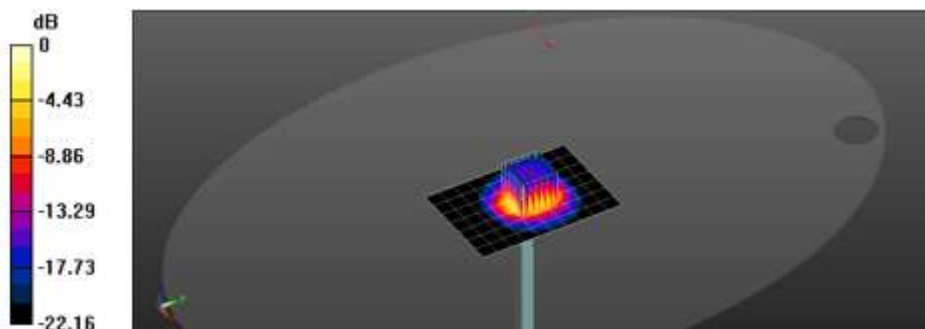

0 dB = 8.56 W/kg = 9.33 dBW/kg

Date: 10/7/2020

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2020-10-07.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.856$ S/m; $\epsilon_r = 35.566$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5300 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5300 MHz Verification Input Power 100 mW 2020-10-07/Area Scan (10x12x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 16.0 W/kg

Configuration/5300 MHz Verification Input Power 100 mW 2020-10-07/Zoom Scan (9x9x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.36 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 32.0 W/kg


SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.38 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 20.3 W/kg

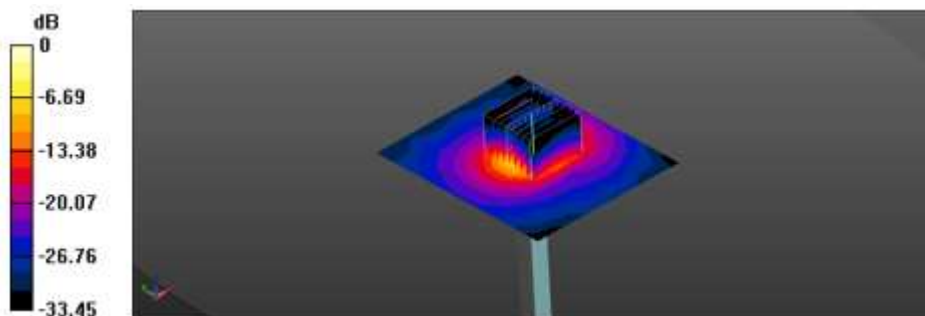

0 dB = 20.3 W/kg = 13.07 dBW/kg

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2020-10-08.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.857$ S/m; $\epsilon_r = 35.507$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5300 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5300 MHz Verification Input Power 100 mW 2020-10-08/Area Scan (10x12x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 16.4 W/kg

Configuration/5300 MHz Verification Input Power 100 mW 2020-10-08/Zoom Scan (8x8x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 33.2 W/kg


SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.44 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 21.0 W/kg

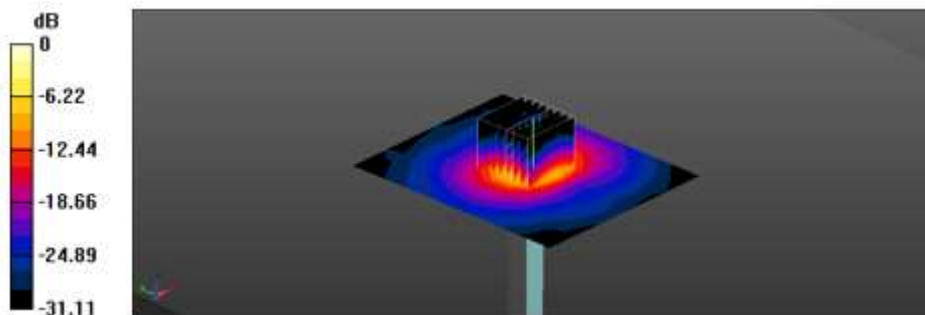

0 dB = 21.0 W/kg = 13.22 dBW/kg

Date: 2020-10-12

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2020-10-12.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.52, 4.52, 4.52) @ 5600 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2020-10-12/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.8 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2020-10-12/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.47 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 35.4 W/kg

SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.51 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 21.7 W/kg

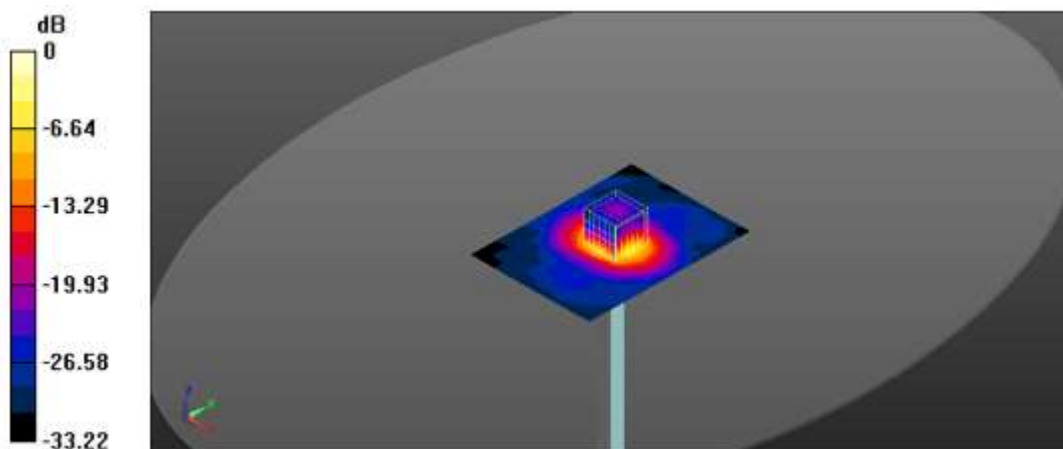

0 dB = 21.7 W/kg = 13.36 dBW/kg

Date: 2020-10-13

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2020-10-13.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.729$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.52, 4.52, 4.52) @ 5600 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2020-10-13/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.8 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2020-10-13/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.20 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 34.5 W/kg

SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 21.2 W/kg

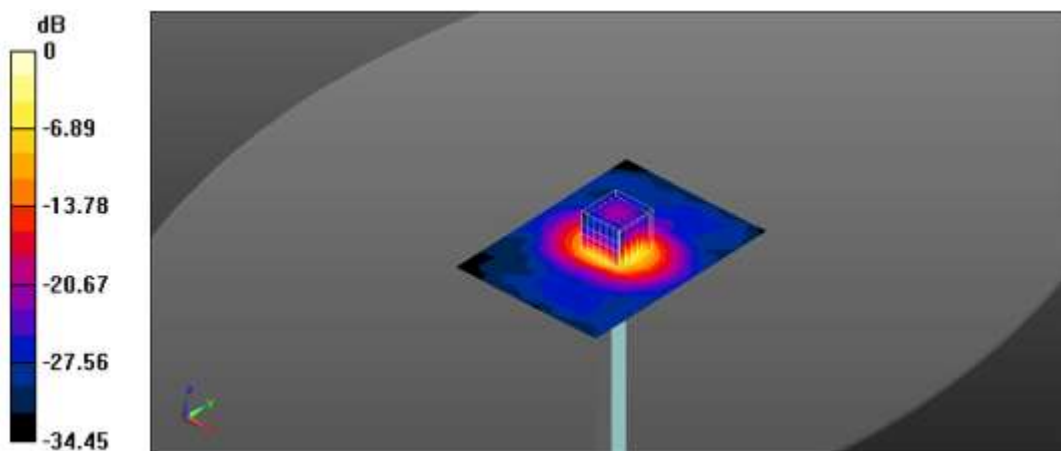

0 dB = 21.2 W/kg = 13.26 dBW/kg

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2020-10-12.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.889$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5800 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-12/Area Scan (10x12x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.0 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-12/Zoom Scan (9x9x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.00 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.4 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 20.7 W/kg

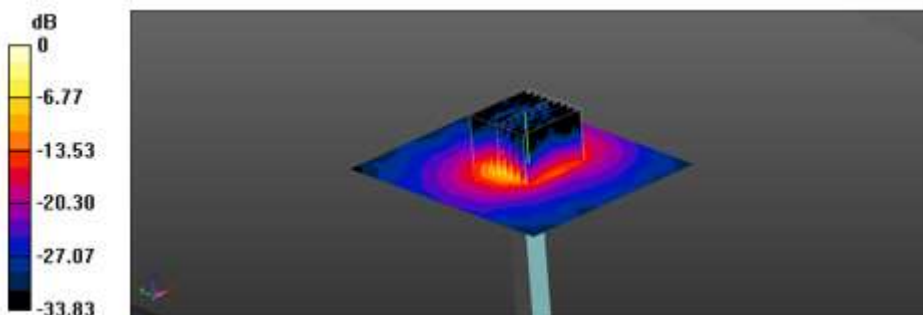

0 dB = 20.7 W/kg = 13.16 dBW/kg

Date: 2020-10-13

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2020-10-13.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.392$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.64, 4.64, 4.64) @ 5800 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-13/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.7 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-13/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.70 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 8.55 W/kg; SAR(10 g) = 2.52 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 21.6 W/kg

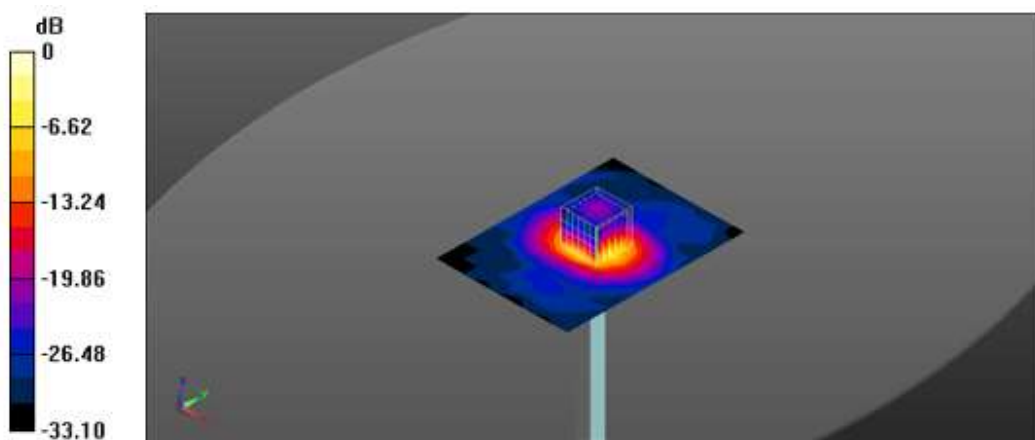

0 dB = 21.6 W/kg = 13.34 dBW/kg

Date: 10/13/2020

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2020-10-13.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.953$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5800 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-13/Area Scan (10x12x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.6 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2020-10-13/Zoom Scan (9x9x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.20 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 20.0 W/kg

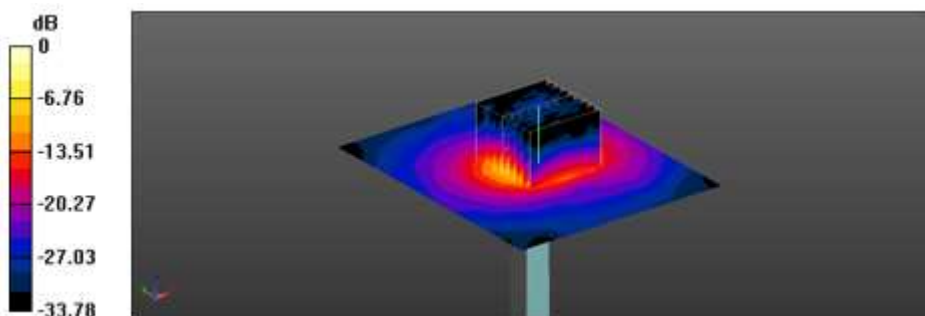

0 dB = 20.0 W/kg = 13.01 dBW/kg

15. Test Results

1)

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 2.4G Notebook.da53:0](#)**DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800111B**


Communication System: UID 0, 2.4G WLAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 39.483$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2412 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 b_Ant.1_CH1_Rear_0 mm/Area Scan (10x10x1): Measurement grid:
dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.379 W/kg

Configuration/802.11 b_Ant.1_CH1_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.92 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.640 W/kg
SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.120 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 45%
Maximum value of SAR (measured) = 0.516 W/kg

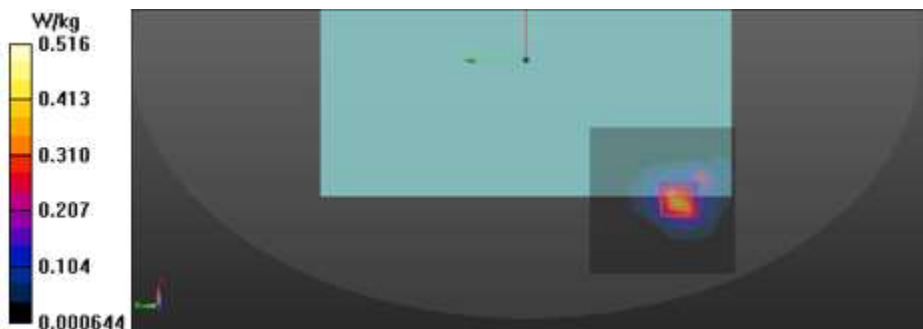

2)

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 2.4G Notebook.da53:1](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800111B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 39.483$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2412 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/802.11 b_Ant.2_CH1_Rear_0 mm/Area Scan (10x10x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.394 W/kg

Configuration 2/802.11 b_Ant.2_CH1_Rear_0 mm/Zoom Scan (7x8x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.024 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.665 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.472 W/kg

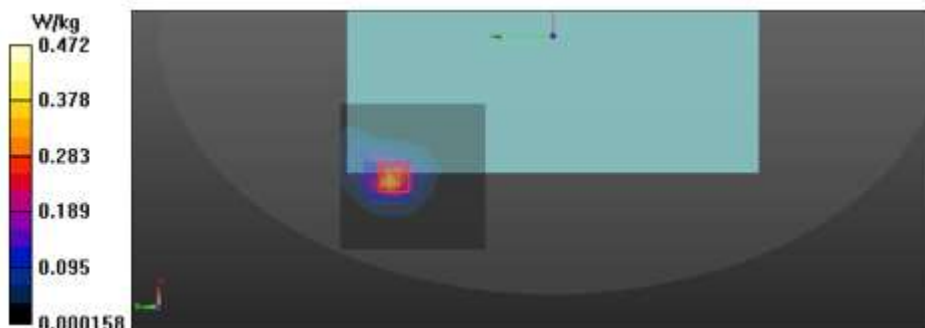

3)

Date: 10/7/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.3G Ant.1 Notebook.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800088D

Communication System: UID 0, 5G WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.847$ S/m; $\epsilon_r = 35.576$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5290 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH58_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.312 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH58_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.304 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.591 W/kg


SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.344 W/kg

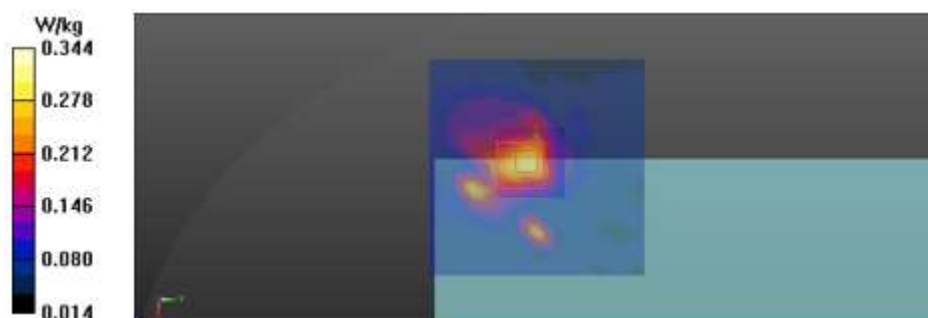

4)

Date: 10/7/2020

Test Laboratory: KCTL Inc.

File Name: [2.WLAN 5.3G Ant.2 Notebook.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800088D

Communication System: UID 0, 5G WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.847$ S/m; $\epsilon_r = 35.576$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5290 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH58_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.433 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH58_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.29 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.11 W/kg


SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.419 W/kg

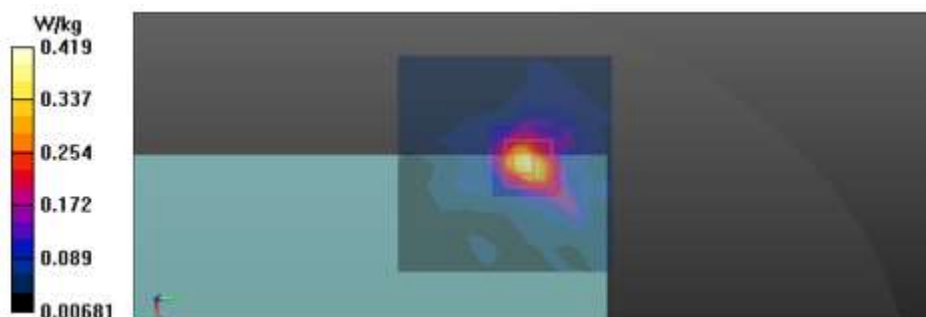

5)

Date: 2020-10-13

Test Laboratory: KCTL Inc.

File Name: [2. 5.6G_VHT80_Body.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800111B

Communication System: UID 0, 5GWLAN (0); Frequency: 5610 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5610 \text{ MHz}$; $\sigma = 5.181 \text{ S/m}$; $\epsilon_r = 35.71$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.52, 4.52, 4.52) @ 5610 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH122_Rear 0mm/Area Scan (9x11x1): Measurement grid:
 dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.454 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH122_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.29 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.672 W/kg


SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.444 W/kg

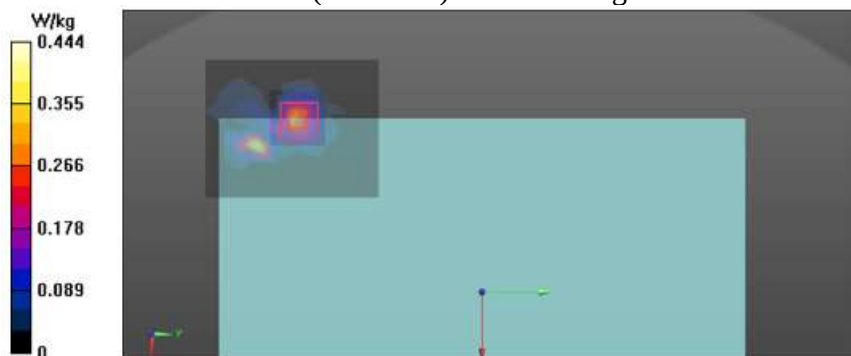

6)

Date: 2020-10-13

Test Laboratory: KCTL Inc.

File Name: [2. 5.6G_VHT80_Body.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800111B

Communication System: UID 0, 5GWLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.092$ S/m; $\epsilon_r = 35.877$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.61, 4.61, 4.61) @ 5530 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH106_Rear 0mm/Area Scan (9x11x1): Measurement grid:
 dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.380 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH106_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.275 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.715 W/kg


SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.461 W/kg

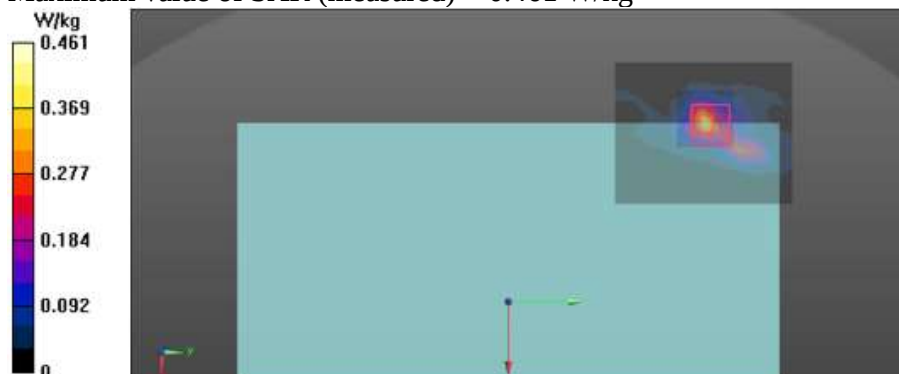

7)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.8G Ant.1 Notebook.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH155_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.352 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH155_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.111 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.409 W/kg



8)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [2.WLAN 5.8G Ant.2 Notebook.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH155_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.398 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH155_Rear_0 mm/Zoom Scan (10x10x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.941 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.542 W/kg

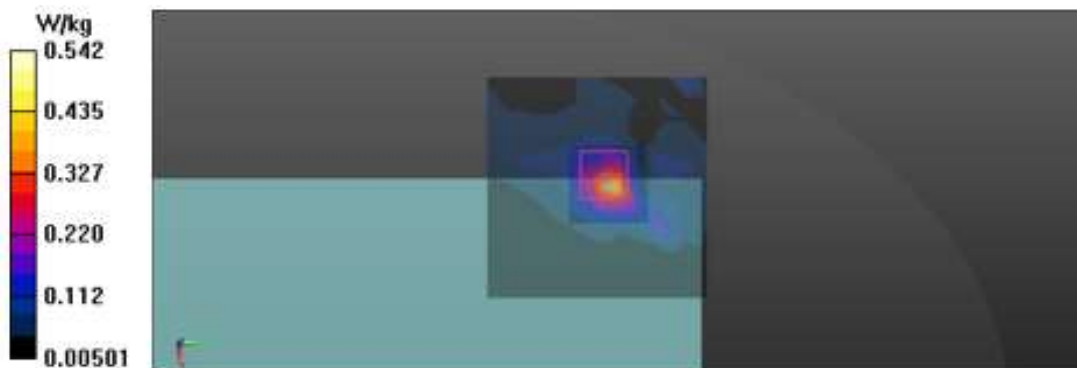

9)

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [2.Bluetooth Notebook.da53:0](#)

DUT: XE530QDA, Type: Notebook, Serial: 1FD791ZN800111B

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30227

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 39.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_GFSK_DH5_Ant.2_CH78_Rear_0 mm/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.0998 W/kg

Configuration/Bluetooth_GFSK_DH5_Ant.2_CH78_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.578 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.0966 W/kg

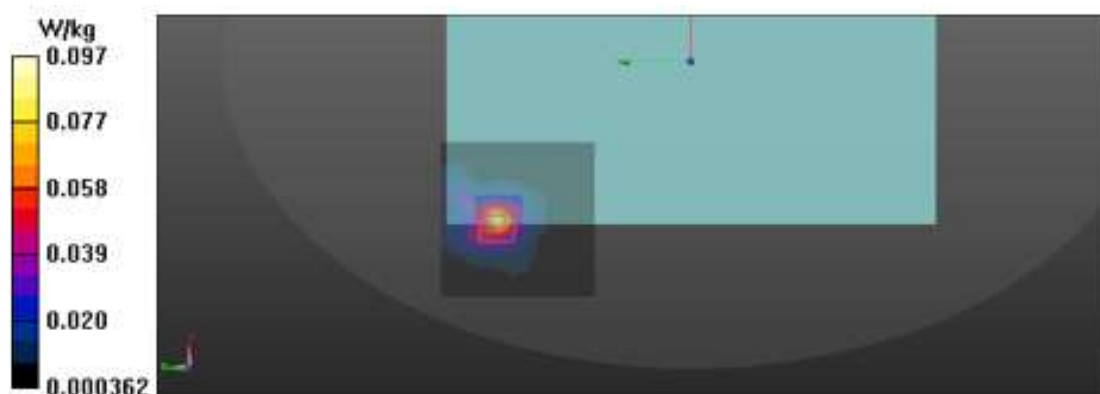

10)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 2.4G Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.221$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2437 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 b_Ant.1_CH6_Rear_0 mm/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.76 W/kg

Configuration/802.11 b_Ant.1_CH6_Rear_0 mm/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.71 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.86 W/kg


SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.81 W/kg

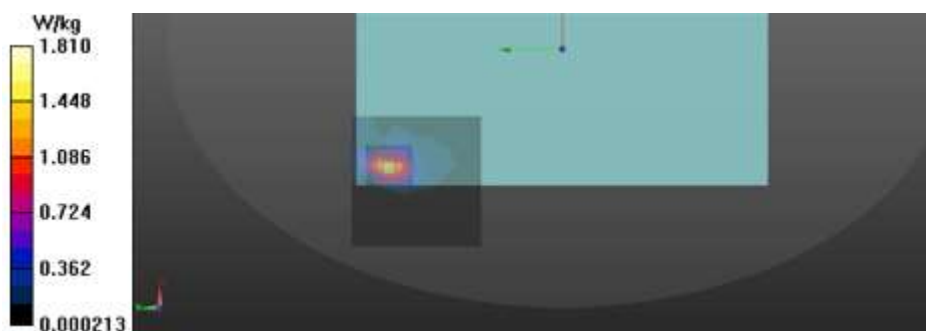

11)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 2.4G Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.221$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2437 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 b_Ant.2_CH6_Rear_0 mm/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.70 W/kg

Configuration/802.11 b_Ant.2_CH6_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.15 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.34 W/kg


SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.50 W/kg

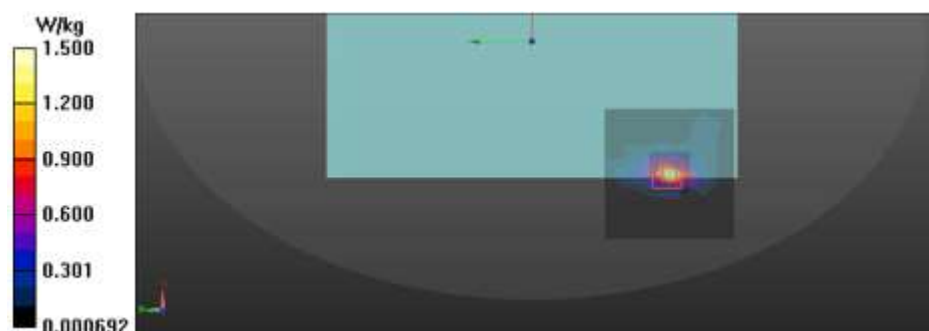

12)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 2.4G Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, 2.4G WLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.221$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2437 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 n_HT40_MIMO_CH6_Rear_0 mm/Area Scan (8x28x1): Measurement grid:
 dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.742 W/kg

Configuration/802.11 n_HT40_MIMO_CH6_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.40 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.41 W/kg


SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.884 W/kg

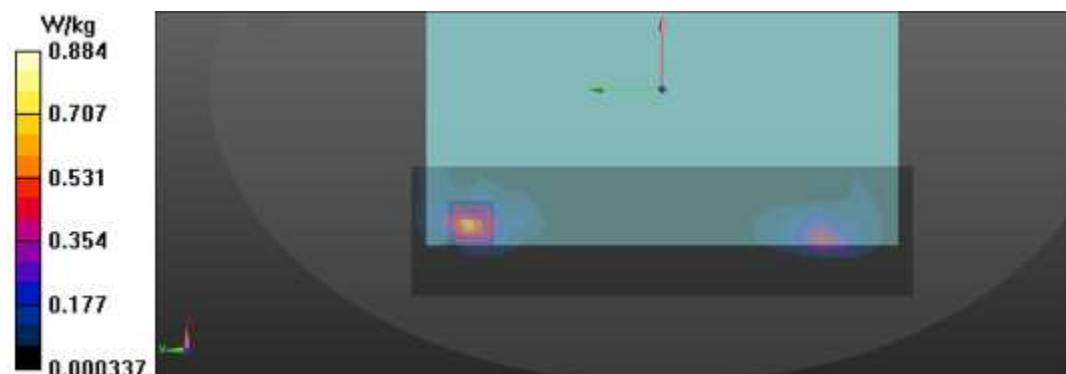

13)

Date: 10/7/2020

Test Laboratory: KCTL Inc.

File Name: [3.WLAN 5.3G Ant.1 Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290 \text{ MHz}$; $\sigma = 4.847 \text{ S/m}$; $\epsilon_r = 35.576$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5290 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH58_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.21 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH58_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.17 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 6.03 W/kg


SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.26 W/kg

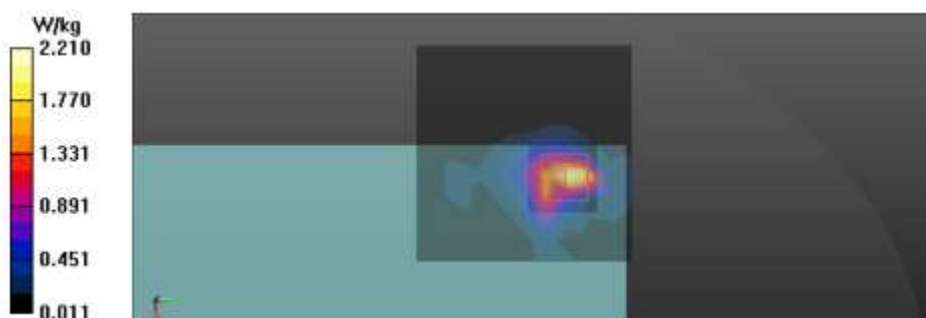

14)

Date: 10/7/2020

Test Laboratory: KCTL Inc.

File Name: [4.WLAN 5.3G Ant.2 Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290 \text{ MHz}$; $\sigma = 4.847 \text{ S/m}$; $\epsilon_r = 35.576$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5290 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH58_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.83 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH58_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.51 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 5.51 W/kg


SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.72 W/kg

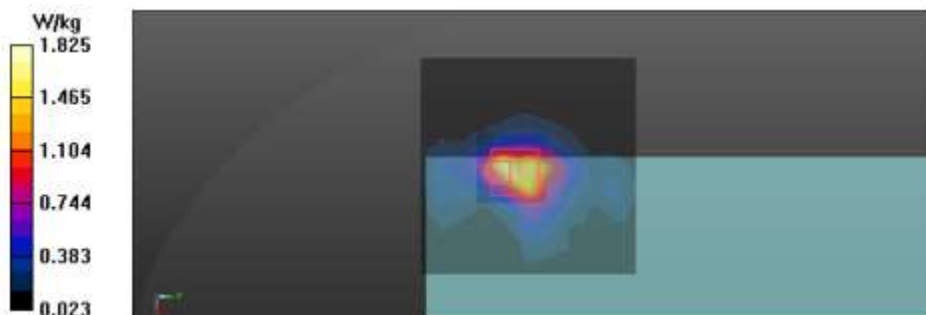

15)

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.3G MIMO Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 4.831 \text{ S/m}$; $\epsilon_r = 35.555$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.94, 4.94, 4.94) @ 5270 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 n_H40_MIMO_CH54_Rear_0 mm/Area Scan (9x33x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.48 W/kg

Configuration/802.11 n_H40_MIMO_CH54_Rear_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 16.25 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 1.77 W/kg



16)

Date: 2020-10-12

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G_VHT80_Body.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, 5GWLAN (0); Frequency: 5610 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5610 \text{ MHz}$; $\sigma = 5.181 \text{ S/m}$; $\epsilon_r = 35.625$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.52, 4.52, 4.52) @ 5610 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH122_Rear 0mm/Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.73 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH122_Rear 0mm/Zoom Scan (10x10x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.72 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 5.61 W/kg


SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.01 W/kg

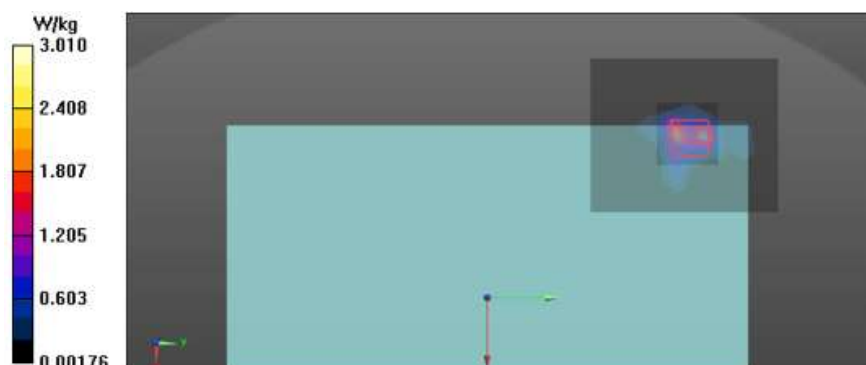

17)

Date: 2020-10-12

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G_VHT80_Body.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, 5GWLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5690 \text{ MHz}$; $\sigma = 5.274 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.52, 4.52, 4.52) @ 5690 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH138_Rear 0mm/Area Scan (10x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH138_Rear 0mm/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 16.60 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 6.22 W/kg


SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.91 W/kg

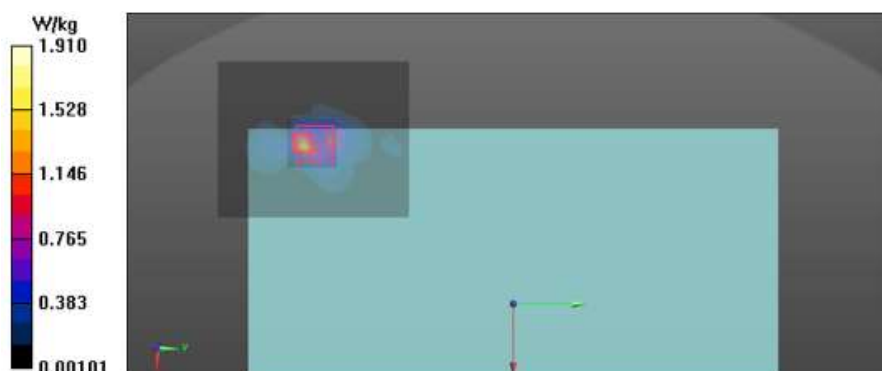

18)

Date: 2020-10-13

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G HT20 Body.da53:0](#)**DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B**

Communication System: UID 0, 5GWLAN (0); Frequency: 5720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5720$ MHz; $\sigma = 5.311$ S/m; $\epsilon_r = 35.51$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.64, 4.64, 4.64) @ 5720 MHz; ; Calibrated: 2020-04-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 2020-04-22
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 n_HT20_MIMO_CH144_Rear 0mm/Area Scan (9x32x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.69 W/kg

Configuration/802.11 n_HT20_MIMO_CH144_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:
Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 11.77 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 6.25 W/kg
SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.183 W/kg
Smallest distance from peaks to all points 3 dB below = 4 mm
Ratio of SAR at M2 to SAR at M1 = 44.4%
Maximum value of SAR (measured) = 2.30 W/kg



19)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [3.WLAN 5.8G Ant.1 Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D


Communication System: UID 0, 5G WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 34.946$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.1_CH155_Rear_0 mm/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 1.92 W/kg

Configuration/802.11 ac_VHT80_Ant.1_CH155_Rear_0 mm/Zoom Scan (11x12x7)/Cube 0:
 Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 10.84 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 4.88 W/kg
SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.248 W/kg
 Smallest distance from peaks to all points 3 dB below = 4 mm
 Ratio of SAR at M2 to SAR at M1 = 60.3%
 Maximum value of SAR (measured) = 2.39 W/kg

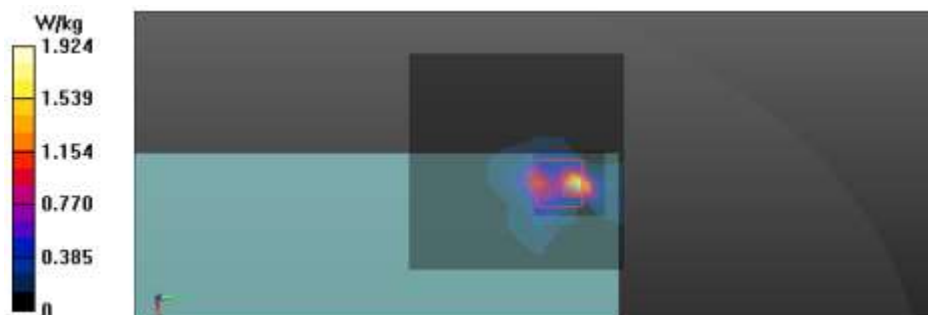

20)

Date: 10/12/2020

Test Laboratory: KCTL Inc.

File Name: [4.WLAN 5.8G Ant.2 Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 ac_VHT80_Ant.2_CH155_Rear_0 mm_Repeated/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.42 W/kg

Configuration/802.11 ac_VHT80_Ant.2_CH155_Rear_0 mm_Repeated/Zoom Scan (9x11x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.48 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 7.56 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 3.47 W/kg

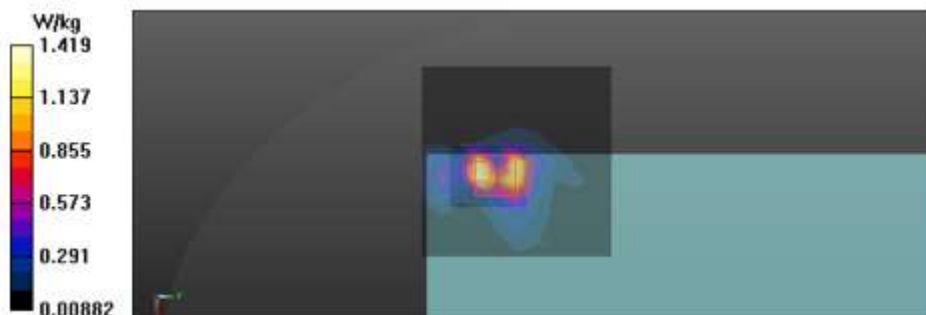

21)

Date: 10/13/2020

Test Laboratory: KCTL Inc.

File Name: [1.WLAN 5.8G MIMO Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800088D

Communication System: UID 0, 5G WLAN (0); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.369$ S/m; $\epsilon_r = 34.994$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5785 MHz; Calibrated: 1/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/24/2020
- Phantom: Front_Left_ELI V8.0; Type: QD OVA 004 AA; Serial: 2097
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 n_H2O_MIMO_CH157_Rear_0 mm/Area Scan (9x33x1): Measurement grid:
 $dx=10$ mm, $dy=10$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.84 W/kg

Configuration/802.11 n_H2O_MIMO_CH157_Rear_0 mm/Zoom Scan (10x11x7)/Cube 0:

Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=1.4$ mm

Reference Value = 18.04 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.80 W/kg


SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.36 W/kg

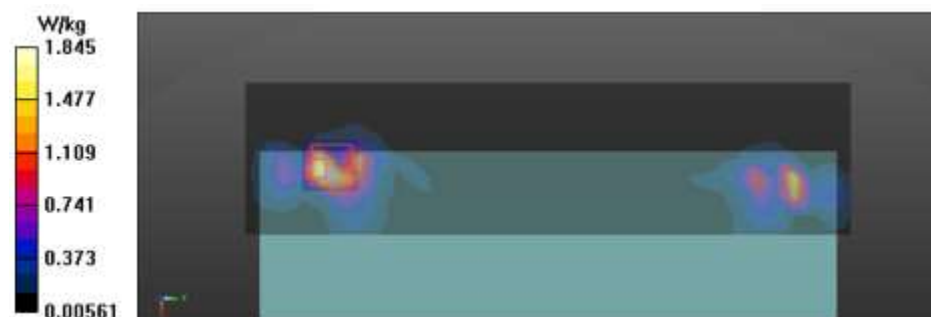

22)

Date: 10/8/2020

Test Laboratory: KCTL Inc.

File Name: [3.Bluetooth_Tablet.da53:0](#)

DUT: XE530QDA, Type: Tablet, Serial: 1FD791ZN800111B

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30227

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 39.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7541; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; ; Calibrated: 7/30/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/29/2020
- Phantom: ELI V8.0_Left; Type: QD OVA 004 AA; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_GFSK_DH5_Ant.2_CH78_Rear_0 mm/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.535 W/kg

Configuration/Bluetooth_GFSK_DH5_Ant.2_CH78_Rear_0 mm/Zoom Scan (7x8x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.15 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 0.532 W/kg

