

TEST REPORT

EUT Description	Wireless Module installed in Tablet
Brand Name	Intel® WiFi-6 AX201
Model Name	AX201D2W
FCC/IC ID	FCC ID: PD9AX201D2; IC ID :1000M-AX201D2
Date of Test Start/End	2021-08-19 / 2021-08-27
Features	802.11ax, Dual Band, 2x2 Wi-Fi + Bluetooth® 5.1 (see section 5)
Description	Platform: TPN-C156 + High-Tek / INPAQ antennas

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, issue 5 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
Exposure Conditions	Body worn	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.05 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 1.7mm to antenna edge	

Test Report identification	210803-01.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by _____ Reviewed by _____

Vaso KACULINI
(Test Engineer Lead)

Olivier FARGANT
(Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	8
7. Test Verdicts summary	8
8. Document Revision History	8
Annex A. Test & System Description	9
A.1 SAR DEFINITION	9
A.2 SPEAG SAR MEASUREMENT SYSTEM	10
A.2.1 SAR Measurement Setup	10
A.2.2 E-Field Measurement Probe	11
A.2.3 SAM Phantom	11
A.2.4 Flat Phantom	12
A.2.5 Device Positioner	12
A.3 DATA EVALUATION	13
A.4 SYSTEM AND LIQUID CHECK	15
A.4.1 System Check	15
A.4.2 Liquid Check	16
A.5 TEST EQUIPMENT LIST	17
A.5.1 Tissue Simulant Liquid	17
A.6 MEASUREMENT UNCERTAINTY EVALUATION	18
A.7 RF EXPOSURE LIMITS	19
Annex B. Test Results	20
B.1 TEST CONDITIONS	20
B.1.1 Test SAR Test positions relative to the phantom	20
B.1.2 Test signal, Output power and Test Frequencies	20
B.1.3 Evaluation Exclusion and Test Reductions	21
B.2 CONDUCTED POWER MEASUREMENTS	24
B.2.1 WLAN 2.4GHz	24
B.2.2 WLAN 5GHz (U-NII)	26
B.2.3 Bluetooth	38
B.3 TISSUE PARAMETERS MEASUREMENT	39
B.4 SYSTEM CHECK MEASUREMENTS	39
B.5 SAR TEST RESULTS	40
B.5.1 Bluetooth & 802.11b/g/n/ax – 2.4GHz – DTS – BT (DSS)	40
B.5.2 802.11a/n/ac/ax – 5.3 GHz – U-NII-2A	41
B.5.3 802.11a/n/ac/ax – 5.6 GHz – U-NII-2C	42
B.5.4 802.11a/n/ac/ax – 5.8 GHz – U-NII-3	43
B.5.5 SAR Measurement Variability	44
B.5.6 Simultaneous Transmission SAR Evaluation	45
Annex C. Test System Plots	48
Annex D. TSL Dielectric Parameters	58
D.1 BODY DTS 2450MHZ	58
D.2 BODY 5180MHZ-5900MHZ	59

Annex E.	Calibration Certificates	61
Annex F.	Photographs	63
F.1	TEST SAMPLE	63
F.2	TEST POSITIONS.....	65
F.3	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY	66
F.4	PHANTOM LIQUID LEVEL DURING MEASUREMENTS	68

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2019-10-01 Edition 2. FCC OET KDB 248227 D01 v02r02 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters. 3. FCC OET KDB 447498 D01 v06 –RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 4. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 5. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz. 6. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations. 7. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
ISED	1. ISED RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands) 2. ISED RSS-102 Supplementary Procedures SPR-001 SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (Laptop Mode / Tablet Mode) 3. ISED Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures. 4. ISED Notice 2020-DRS0020 – Applicability of IEC/IEEE62209-1528 and IEC62209-3 Standard 5. ISED Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard. 6. FCC OET KDB 248227 D01 v02r02 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters. 7. FCC OET KDB 447498 D01 v06 –RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 8. FCC OET KDB 616217 D04 v01r02– SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 9. IEC/IEEE 62209-1528:2020 - Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21.5°C ± 2°C
Humidity	46% ± 10%
Liquid Temperature	21.6°C ± 2°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	210803-01.S02	Wireless Module installed in Tablet	AX201D2W + HP Mavis	TPN-C156(2)	2021-08-03	INPAQ Antenna
#02	210803-01.S03	Wireless Module installed in Tablet	AX201D2W + HP Mavis	TPN-C156(3)	2021-08-03	High-Tek Antenna

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® WiFi-6 AX201		
Model Name	AX201D2W		
Software Version	22.21060.0.0-OEM.DRTU.12219		
Driver Version	22.60.1.2		
Prototype / Production	Production		
Host Identification	TPN-C156		
Supported Radios	802.11b/g/n/ax 2.4GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac/ax 5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) Bluetooth 5.1 2.4GHz (2400.0 – 2483.5 MHz)		
Antenna Information	Transmitter	Aux/TX2	Main/TX1
	Manufacturer	INPAQ	INPAQ
	Antenna type	PIFA	PIFA
	Part number	WA-P-LE-02-036 (DC33002L110)	WA-P-LE-02-035 (DC33002L100)
	Transmitter	Aux/TX2	Main/TX1
	Manufacturer	High-Tek	High-Tek
	Antenna type	PIFA	PIFA
	Part number	DC33002KW00 (0ACCN021001N)	DC33002KW10 (0ACCN021002N)
	See Annex F for more details on antennas location.		
	WLAN 2.4GHz Main + BT Main WLAN 2.4GHz Main + WLAN 2.4GHz Main WLAN 5GHz Main + BT Main WLAN 5GHz Main + WLAN 5GHz Main WLAN 5GHz Main + WLAN 5GHz Main + BT Main		
Simultaneous Transmission Configurations			
Additional Information	No WWAN transmitter is considered in this report		
	5.60-5.65 GHz band (TDWR) is supported by the device		
	Band gap is supported by the device		

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11b/g/n/ax	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	20.43
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	5.2GHz	5150-5250	NM
			5.3GHz	5250-5350	20.44
			5.6GHz	5475-5725	20.48
			5.8GHz	5725-5850	18.44
BDR/EDR v5.1	78%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	9.62
Bluetooth LE v5.1	64%	GFSK	2.4GHz	2400-2483.5	NM

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit, as specified by the client			Full Power mode		Reduced Power mode	
Equipment Class	Mode	BW (MHz)	Aux (dBm)	Main (dBm)	Aux (dBm)	Main (dBm)
DTS	802.11b	20	20.50	20.50	18.00	18.00
	802.11g	20	20.00	20.00	18.00	18.00
	802.11n20	20	20.00	20.00	18.00	18.00
	802.11ax20	20	20.00	20.00	18.00	18.00
	802.11n40	40	17.50	17.50	17.50	17.50
	802.11ax40	40	17.50	17.50	16.00	16.00
U-NII-1	802.11a	20	20.50	20.50	15.50	15.50
	802.11n20	20	20.50	20.50	15.50	15.50
	802.11ax20	20	20.50	20.50	15.50	15.50
	802.11n40	40	20.50	20.50	15.50	15.50
	802.11ax40	40	20.50	20.50	15.50	15.50
	802.11ac80	80	18.50	18.50	15.50	15.50
	802.11ax80	80	18.50	18.50	15.50	15.50
U-NII-2A	802.11a	20	20.50	20.50	15.50	15.50
	802.11n20	20	20.50	20.50	15.50	15.50
	802.11ax20	20	20.50	20.50	15.50	15.50
	802.11n40	40	20.50	20.50	15.50	15.50
	802.11ax40	40	20.50	20.50	15.50	15.50
	802.11ac80	80	17.75	17.75	15.50	15.50
	802.11ax80	80	17.75	17.75	15.50	15.50
	802.11ac160	160	15.25	14.75	15.25	14.75
	802.11ax160	160	15.25	14.75	15.25	14.75
U-NII-2C	802.11a	20	20.50	20.50	15.50	15.50
	802.11n20	20	20.50	20.50	15.50	15.50
	802.11ax20	20	20.50	20.50	15.50	15.50
	802.11n40	40	20.50	20.50	15.50	15.50
	802.11ax40	40	20.50	20.50	15.50	15.50
	802.11ac80	80	19.75	19.75	15.50	15.50
	802.11ax80	80	19.75	19.75	15.50	15.50
	802.11ac160	160	14.50	14.25	14.50	14.25
	802.11ax160	160	14.50	14.25	14.50	14.25
U-NII-3	802.11a	20	20.50	20.50	15.50	15.50
	802.11n20	20	20.50	20.50	15.50	15.50
	802.11ax20	20	20.50	20.50	15.50	15.50
	802.11n40	40	20.50	20.50	15.50	15.50
	802.11ax40	40	20.50	20.50	15.50	15.50
	802.11ac80	80	20.50	20.50	15.50	15.50
	802.11ax80	80	20.50	20.50	15.50	15.50
BT	Bluetooth v5.1 BDR	1		11.00		11.00
	Bluetooth v5.1 EDR2	1		7.00		7.00
	Bluetooth v5.1 EDR3	1		7.00		7.00
	BLE	2		7.00		7.00

6. Remarks and comments

1. The conducted values are obtained by applying the BIOS SAR power values to the AX201D2W Intel module installed in the TPN-C156 identified in this report, as requested by the customer
2. Variability and simultaneous transmission results shown in this report are based on the highest SAR value obtained among all antenna manufacturers.
3. Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.h

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b/g/n/ax	2.4GHz	0.78	P
802.11a/n/ac/ax	5.2GHz	NM	P
	5.3GHz	0.49	P
	5.6GHz	1.05	P
	5.8GHz	0.86	P
Bluetooth	2.4GHz	0.09	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Highest Reported SAR (1g) (W/kg)			
Exposure Condition	Equipment Class		
	DTS	DSS	U-NII
Body Worn	0.78	0.09	1.05
Simultaneous Tx	Sum-SAR: 1.55	Sum-SAR: 1.73 SPLSR: 0.03	Sum-SAR: 1.73 SPLSR: 0.03

Considering the results of the performed test according to FCC 47CFR Part 2.1093 and ISSED RSS 102, Issue 5 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	R. Luciani	First Issue

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:

σ = Conductivity of the tissue (S/m)
 ρ = Mass density of the tissue (kg/m³)
 E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

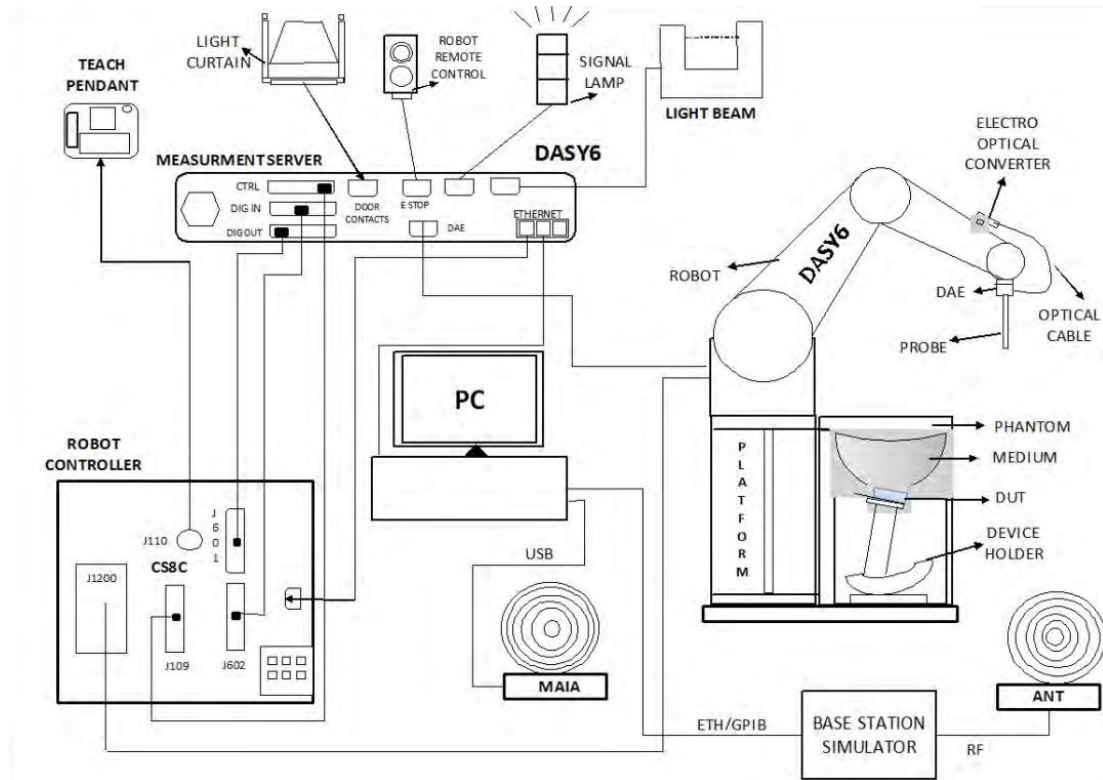

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	± 0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	± 0.5 dB
Linearity	± 0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528, IEC 62209-1 and IEC/IEEE 62209-1528:2020. It enables the dosimetric evaluation of left and right-hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Shell thickness at ERP	6 $\pm$ 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm

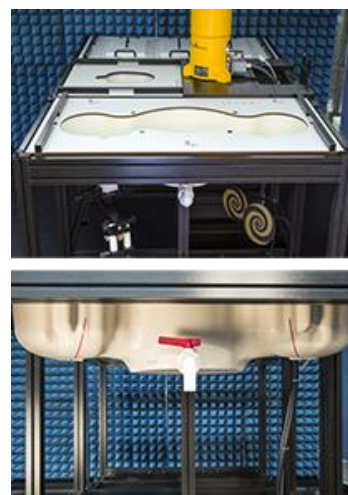


A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2, IEEE1528:2013 and IEC/IEEE 62209-1528:2020 standards and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm $\pm$ 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

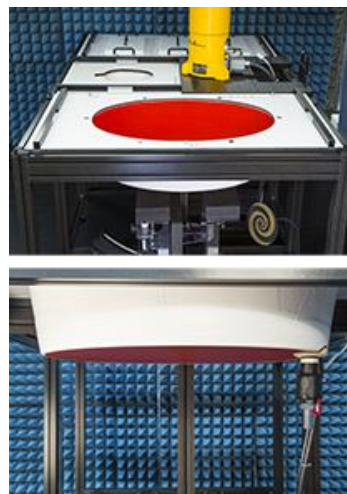

A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.

A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

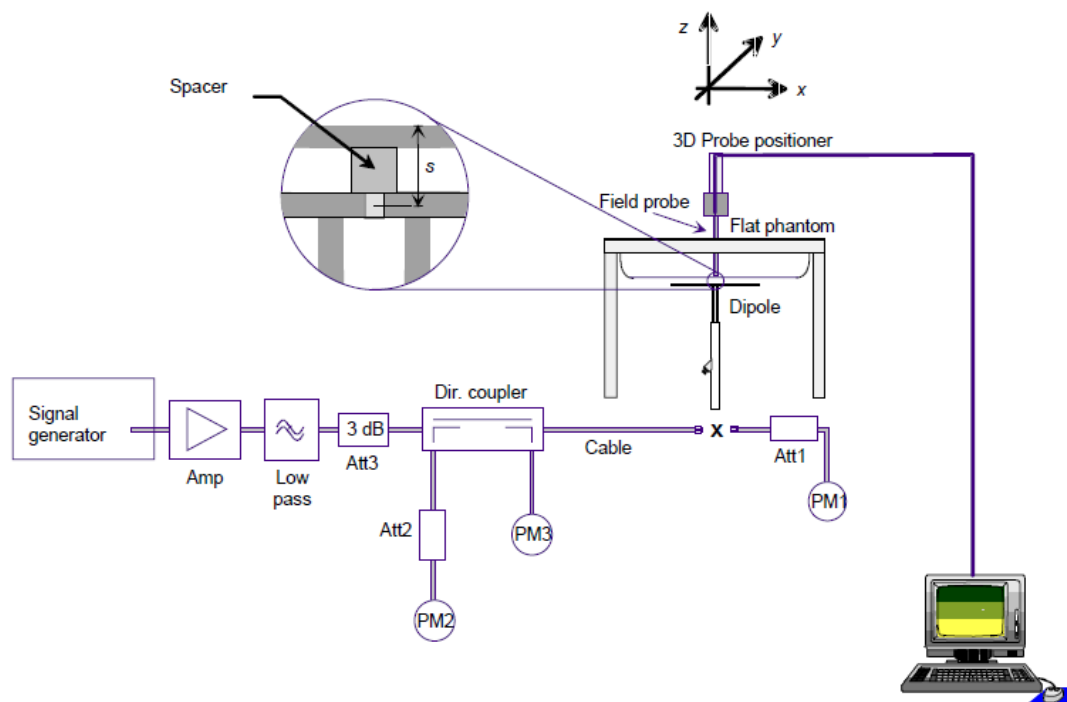

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528, IEC 62209 and IEC/IEEE 62209-1528 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 or IEC/IEEE 62209-1528:2020 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

SAR system #2

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
002-000	6-Axis Robot	TX60 Lspeag	F16/55FXA1/A/01	STAÜBLI	NA	NA
002-001	Robot Controller	CS8C	F16/55FXA1/C/01	STAÜBLI	NA	NA
002-002	Measurement Server	DASY6	1489	SPEAG	NA	NA
002-003	Electro Optical Converter	EOC60	1098	SPEAG	NA	NA
002-004	Light Beam Unit	SE UKS 030 AA	N/A	Di-soric	NA	NA
002-005	Oval Flat Phantom	ELI V8.0	2048	SPEAG	NA	NA
002-006	Laptop Holder		N/A	SPEAG	NA	NA
002-007	Measurement Software	DASY6 v6.14	9-5DEE27C2	SPEAG	NA	NA
002-008	Data Acquisition Electronics	DAE4	1429	SPEAG	2020-05-11	2022-05-11
002-009	Dosimetric E-Field probe	EX3DV4	3978	SPEAG	2021-05-22	2022-05-22

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
126-000	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	2021-05-27	2023-05-27
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2021-03-17	2021-09-17
141-000	USB Power Sensor	NRP-Z81	104381	R&S	2020-06-03	2022-06-03
327-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-F0DED9	AVTECH	2021-03-09	2023-03-09
095-000	Thermometer	TESTO 925	34822881	Testo	2019-11-19	2021-11-19
098-000	Vector Signal Generator	SMW200A 20GHz	103732	R&S	2020-07-20	2022-07-20
198-000	0.8-21GHz RF amplifier	TVA-82-213A+	2004003	Mini-Circuits	2021-03-17	2021-09-17
339-000	Vector Network Analyzer	ZNB 40	101740	R&S	2020-07-10	2022-07-10
070-000	2450MHz System Validation Dipole	D2450V2	937	SPEAG	2020-05-12	2022-05-12
084-000	5GHz System Validation Dipole	D5GHzv2	1259	SPEAG	2020-03-10	2022-03-10

A.5.1 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand System 2	SPEAG MBBL600-6000V6 Batch 160603-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (4 MHz - 6 GHz) including IEEE 1528-2013 and IEC 62209-1/2016, IEC 62209-2/2010								
Symbol	Error Description	Uncert. Value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±14.0 %	N	2	1	1	±7.0 %	±7.0 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	Axial Isotropy	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±2.3 %	N	1	1	1	±2.3 %	±2.3 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(T _σ)	Conductivity (temp.) _{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.25	0.25	±2.0 %	±2.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
Combined Std. Uncertainty							±11.5 %	±11.4 %
Expanded STD Uncertainty							±23.1 %	±22.9 %

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 and ISED RSS 102 issue 5 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
Conducted measurement	F. Heurtematte
SAR measurement	R. Luciani

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was an Intel® WiFi-6 AX201 card inside a Tablet host platform (TPN-C156) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 22.21060.0.0-OEM.DRTU.12219) and each channel was measured using a broadband power meter to determine the maximum average power.

According to FCC OET KDB 616217 D04, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations.

The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the considered position. The device is positioned against the phantom with the edge containing the antenna, perpendicular to the phantom.

The device operates in two power modes: Full Power Mode and Reduced Power Mode. In full power mode, the device can be positioned in Reading Portrait and Ink Open modes through the help of a cover, or kickstand, that can be used as a stand to use the tablet as in a Reading-Slate, Reading-Portrait or in the Ink Open position. In reduced power mode the device operates in typical tablet mode in Handling position. Refer to the Annex F part 3 for more information about those positions.

Depending on its position, the device has two different power modes :

Full Power	Antenna	Aux	Main
	Position	Ink Open	- Reading-Portrait - Ink Open

Reduced Power	Antenna	Aux	Main
	Position	- Top Edge - Back Face	- Top Edge - Back Face - Right Edge

See *B.1.3.1* for a more detailed list of the applied reductions.

See *F.2* section for more information on the tested positions.

B.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

B.1.3 Evaluation Exclusion and Test Reductions

B.1.3.1 SAR evaluation exclusion

The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 v06 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances ≤50mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$\left[\frac{(\text{max. power of channel, including tune - up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f_{(\text{GHz})}} \right] \quad (1)$$

≤ 3.0 for 1g SAR, and ≤ 7.5 for 10g extremity SAR

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for 50 mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150)) \text{mW}, \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for 50 mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10) \text{mW}, \quad (3)$$

for 1500MHz and ≤ 6GHz

	LAN Antenna	Band Name	Output power		Reading Portrait	Ink Open	Reading Slate	Reading Portrait	Ink Open	Reading Slate
			dBm	mW						
Full Power	WLAN Aux	DTS	20.5	112.2	>50	<50	>50	R	T	R
		U-NII-1	20.5	112.2	>50	<50	>50	R	R	R
		U-NII-2A	20.5	112.2	>50	<50	>50	R	T	R
		U-NII-2C	20.5	112.2	>50	<50	>50	R	T	R
		U-NII-3	20.5	112.2	>50	<50	>50	R	T	R
	WLAN Main	DTS	20.5	112.2	<50	<50	>50	T	T	R
		U-NII-1	20.5	112.2	<50	<50	>50	T	R	R
		U-NII-2A	20.5	112.2	<50	<50	>50	T	T	R
		U-NII-2C	20.5	112.2	<50	<50	>50	T	T	R
		U-NII-3	20.5	112.2	<50	<50	>50	T	T	R
		BT	11.0	12.6	<50	<50	>50	T	T	R

T: Tested position
R: Reduced

Reduced Power	LAN Antenna	Band Name	Output power		Back Face	Bottom Edge	Top Edge	Left Edge	Right Edge
			dBm	mW					
	WLAN Aux	DTS	18.00	63.1	<50	>50	<50	>50	>50
		U-NII-1	15.50	35.5	<50	>50	<50	>50	>50
		U-NII-2A	15.50	35.5	<50	>50	<50	>50	>50
		U-NII-2C	15.50	35.5	<50	>50	<50	>50	>50
		U-NII-3	15.50	35.5	<50	>50	<50	>50	>50
	WLAN Main	DTS	18.00	63.1	<50	>50	<50	>50	<50
		U-NII-1	15.50	35.5	<50	>50	<50	>50	<50
		U-NII-2A	15.50	35.5	<50	>50	<50	>50	<50
		U-NII-2C	15.50	35.5	<50	>50	<50	>50	<50
		U-NII-3	15.50	35.5	<50	>50	<50	>50	<50
		BT	11.0	12.6	<50	>50	<50	>50	<50

Back Face	Bottom Edge	Top Edge	Left Edge	Right Edge
T	R	T	R	R
R	R	R	R	R
T	R	T	R	R
T	R	T	R	R
T	R	T	R	R
T	R	T	R	T
R	R	R	R	R
T	R	T	R	T
T	R	T	R	T
T	R	T	R	T
T	R	T	R	T

T: Tested position
R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WLAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
DSSS	According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following: ▪ When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. ▪ When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
OFDM	According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. According to FCC OET KDB 248227 D01, an <u>initial test configuration</u> is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration. The <u>initial test configuration</u> for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

B.2 Conducted Power Measurements

B.2.1 WLAN 2.4GHz

B.2.1.1 WLAN 2.4GHz – Full Power Mode

						Average power (dBm)						
						Main transmitter			Aux transmitter			
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power	
2.4GHz (DTS)	802.11b	20	1	2	2417	20.40	20.20	20.50	20.35	20.28	20.50	
				6	2437	20.37	20.25	20.50	20.35	20.39	20.50	
				10	2457	20.43	20.33	20.50	20.40	20.43	20.50	
	802.11g		6	3	2422	NR	NR	20.00	NR	NR	20.00	
				6	2437	NR	NR	20.00	NR	NR	20.00	
				9	2452	NR	NR	20.00	NR	NR	20.00	
	802.11n20		HT0	3	2422	NR	NR	20.00	NR	NR	20.00	
				6	2437	NR	NR	20.00	NR	NR	20.00	
				9	2452	NR	NR	20.00	NR	NR	20.00	
	802.11ax20		HE0	3	2422	NR	NR	20.00	NR	NR	20.00	
				6	2437	NR	NR	20.00	NR	NR	20.00	
				9	2452	NR	NR	20.00	NR	NR	20.00	
	802.11n40	40	HT0	3	2422	NR	NR	16.50	NR	NR	16.50	
				5	2432	NR	NR	17.50	NR	NR	17.50	
				6	2437	NR	NR	16.00	NR	NR	16.00	
			802.11ax40	HE0	3	2422	NR	NR	16.50	NR	NR	16.50
					5	2432	NR	NR	17.50	NR	NR	17.50
					6	2437	NR	NR	16.00	NR	NR	16.00

Initial test configuration

1. NR: Not Required
2. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n/ax channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.
3. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.
4. As per the TCB Workshop April 2019 – RF Exposure Procedures (802.11ax SAR Testing), for modes with the same maximum output power the 802.11ax should be considered as the highest 802.11 mode

B.2.1.2 WLAN 2.4GHz – Reduced Power Mode

						Average power (dBm)						
						Main transmitter			Aux transmitter			
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power	
2.4GHz (DTS)	802.11b	20	1	1	2412	17.82	17.88	18.00	17.82	17.82	18.00	
				6	2437	17.70	17.85	18.00	17.85	17.82	18.00	
				11	2462	17.90	17.85	18.00	17.79	17.89	18.00	
	802.11g		6	1	2412	NR	NR	18.00	NR	NR	18.00	
				6	2437	NR	NR	18.00	NR	NR	18.00	
				11	2462	NR	NR	18.00	NR	NR	18.00	
	802.11n20		HT0	1	2412	NR	NR	18.00	NR	NR	18.00	
				6	2437	NR	NR	18.00	NR	NR	18.00	
				11	2462	NR	NR	18.00	NR	NR	18.00	
	802.11ax20		HE0	1	2412	NR	NR	18.00	NR	NR	18.00	
				6	2437	NR	NR	18.00	NR	NR	18.00	
				11	2462	NR	NR	18.00	NR	NR	18.00	
	802.11n40	40	HT0	3	2422	NR	NR	16.50	NR	NR	16.50	
				6	2437	NR	NR	17.50	NR	NR	17.50	
				9	2452	NR	NR	16.00	NR	NR	16.00	
			802.11ax40	HE0	3	2422	NR	NR	16.50	NR	NR	16.50
					6	2437	NR	NR	17.50	NR	NR	17.50
					9	2452	NR	NR	16.00	NR	NR	16.00

B.2.2 WLAN 5GHz (U-NII)

B.2.2.1 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A) – Full Power Mode

						Average power (dBm)						
						Main transmitter			Aux transmitter			
						INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power	
5.2GHz (U-NII-1)	802.11a	20	6	36	5180	NR	NR	18.50	NR	NR	18.50	
				40	5200	NR		19.50	NR		20.00	
				44	5220	NR		20.50	NR		20.50	
				48	5240	NR		20.50	NR		20.50	
	802.11n 20		HT0	36	5180	NR		18.50	NR		18.50	
				40	5200	NR		19.50	NR		20.00	
				44	5220	NR		20.50	NR		20.50	
				48	5240	NR		20.50	NR		20.50	
	802.11 ax20		HE0	36	5180	NR		18.50	NR		18.50	
				40	5200	NR		19.50	NR		20.00	
				44	5220	NR		20.50	NR		20.50	
				48	5240	NR		20.50	NR		20.50	
	802.11 n40	40	HT0	38	5190	NR		18.50	NR		18.50	
				46	5230	NR		20.50	NR		20.50	
			802.11a x40	HE0	38	5190		NR	18.50		NR	18.50
					46	5230		NR	20.50		NR	20.50
	802.11a c80	80	VHT0	42	5210	NR		18.50	NR		18.25	
	802.11a x80		HE0			NR		18.50	NR		18.25	

Initial test configuration

- NR: Not Required
- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
- Additional conducted power measurement is required when reported SAR is > 1.2 W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
- When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/Kg, SAR is not required for that subsequent test configuration
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/Kg or until all required channels are tested.

						Average power (dBm)					
						Main transmitter			Aux transmitter		
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.3GHz (U-NII-2A)	802.11 a	20	6	52	5260	NR	NR	20.50	NR	NR	20.50
				56	5280	NR	NR	20.50	NR	NR	20.50
				60	5300	NR	NR	20.50	NR	NR	20.50
				56	5320	NR	NR	18.00	NR	NR	18.00
	802.11 n20		HT0	52	5260	NR	NR	20.50	NR	NR	20.50
				56	5280	NR	NR	20.50	NR	NR	20.50
				60	5300	NR	NR	20.50	NR	NR	20.50
				56	5320	NR	NR	18.00	NR	NR	18.00
	802.11 ax20		HE0	52	5260	NR	NR	20.50	NR	NR	20.50
				56	5280	NR	NR	20.50	NR	NR	20.50
				60	5300	NR	NR	20.50	NR	NR	20.50
				56	5320	NR	NR	18.00	NR	NR	18.00
	802.11 n40	40	HT0	54	5270	NR	NR	20.50	NR	NR	20.50
				62	5310	NR	NR	17.25	NR	NR	17.25
	802.11 ax40		HE0	54	5270	20.38	20.44	20.50	20.36	20.36	20.50
				62	5310	17.17	17.12	17.25	17.04	17.21	17.25
802.11 ac80	80	VHT0	58	5290	NR	NR	17.75	NR	NR	17.75	
802.11 ax80		HE0			NR	NR	17.75	NR	NR	17.75	
802.11 ac160	160	VHT0	50	5250	NR	NR	14.75	NR	NR	15.25	
802.11 ax160		HE0			NR	NR	17.75	NR	NR	15.25	

Initial test configuration

1. NR: Not Required
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
6. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.2 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A) – Reduced Power Mode

						Average power (dBm)					
						Main transmitter			Aux transmitter		
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.2GHz (U-NII-1)	802.11a	20	6	36	5180	NR	NR	15.50	NR	NR	15.50
				40	5200	NR		15.50	NR		15.50
				44	5220	NR		15.50	NR		15.50
				48	5240	NR		15.50	NR		15.50
	802.11n 20		HT0	36	5180	NR		15.50	NR		15.50
				40	5200	NR		15.50	NR		15.50
				44	5220	NR		15.50	NR		15.50
				48	5240	NR		15.50	NR		15.50
	802.11 ax20		HE0	36	5180	NR		15.50	NR		15.50
				40	5200	NR		15.50	NR		15.50
				44	5220	NR		15.50	NR		15.50
				48	5240	NR		15.50	NR		15.50
	802.11 n40	HT0	38	5190	NR	15.50		NR	15.50		
			46	5230	NR	15.50		NR	15.50		
		802.11a x40	HE0	38	5190	NR		15.50	NR		15.50
				46	5230	NR		15.50	NR		15.50
	802.11a c80	80	VHT0	42	5210	NR		15.50	NR		15.50
	802.11a x80		HE0	42		NR		15.50	NR		15.50

Initial test configuration

- NR: Not Required
- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
- Additional conducted power measurement is required when reported SAR is > 1.2 W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
- When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/Kg, SAR is not required for that subsequent test configuration
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/Kg or until all required channels are tested.

						Average power (dBm)					
						Main transmitter			Aux transmitter		
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.3GHz (U-NII-2A)	802.11 a	20	6	52	5260	NR	NR	15.50	NR	NR	15.50
				56	5280	NR	NR	15.50	NR	NR	15.50
				60	5300	NR	NR	15.50	NR	NR	15.50
				56	5320	NR	NR	15.50	NR	NR	15.50
	802.11 n20		HT0	52	5260	NR	NR	15.50	NR	NR	15.50
				56	5280	NR	NR	15.50	NR	NR	15.50
				60	5300	NR	NR	15.50	NR	NR	15.50
				56	5320	NR	NR	15.50	NR	NR	15.50
	802.11 ax20		HE0	52	5260	NR	NR	15.50	NR	NR	15.50
				56	5280	NR	NR	15.50	NR	NR	15.50
				60	5300	NR	NR	15.50	NR	NR	15.50
				56	5320	NR	NR	15.50	NR	NR	15.50
	802.11 n40	40	HT0	54	5270	NR	NR	15.50	NR	NR	15.50
				62	5310	NR	NR	15.50	NR	NR	15.50
	802.11 ax40		HE0	54	5270	NR	NR	15.50	NR	NR	15.50
				62	5310	NR	NR	15.50	NR	NR	15.50
802.11 ac80	80	VHT0	58	5290	15.37	15.44	15.50	15.32	15.33	15.50	
802.11 ax80		HE0			NR	NR	15.50	NR	NR	15.50	
802.11 ac160	160	VHT0	50	5250	NR	NR	14.75	NR	NR	15.25	
802.11 ax160		HE0			NR	NR	14.75	NR	NR	15.25	

Initial test configuration

- 1 NR: Not Required
- 2 The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
- 3 Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
- 4 When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
- 5 When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
- 6 SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.3 5.6 (U-NII-2C) – Full Power Mode

						Average power (dBm)					
						Main transmitter			Aux transmitter		
						INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.6GHz (U-NII-2C)	802.11 a	20	6	100	5500	NR	NR	19.00	NR	NR	19.00
				104	5520	NR	NR	20.50	NR	NR	20.50
				108	5540	NR	NR	20.50	NR	NR	20.50
				112	5560	NR	NR	20.50	NR	NR	20.50
				116	5580	NR	NR	20.50	NR	NR	20.50
				120	5600	NR	NR	20.50	NR	NR	20.50
				124	5620	NR	NR	20.50	NR	NR	20.50
				128	5640	NR	NR	20.50	NR	NR	20.50
	802.11 n20		HT0	100	5500	NR	NR	19.00	NR	NR	19.00
				104	5520	NR	NR	20.50	NR	NR	20.50
				108	5540	NR	NR	20.50	NR	NR	20.50
				112	5560	NR	NR	20.50	NR	NR	20.50
				116	5580	NR	NR	20.50	NR	NR	20.50
				120	5600	NR	NR	20.50	NR	NR	20.50
				124	5620	NR	NR	20.50	NR	NR	20.50
				128	5640	NR	NR	20.50	NR	NR	20.50
	802.11 ax20		HE0	100	5500	NR	NR	19.00	NR	NR	19.00
				104	5520	NR	NR	20.50	NR	NR	20.50
				108	5540	NR	NR	20.50	NR	NR	20.50
				112	5560	NR	NR	20.50	NR	NR	20.50
				116	5580	NR	NR	20.50	NR	NR	20.50
				120	5600	NR	NR	20.50	NR	NR	20.50
				124	5620	NR	NR	20.50	NR	NR	20.50
				128	5640	NR	NR	20.50	NR	NR	20.50
	802.11 n40		HT0	102	5510	NR	NR	18.25	NR	NR	18.25
				110	5550	NR	NR	20.50	NR	NR	20.50
				118	5590	NR	NR	20.50	NR	NR	20.50
				126	5630	NR	NR	20.50	NR	NR	20.50
	802.11 ax40		HE0	102	5510	18.11	18.19	18.25	18.16	18.14	18.25
				110	5550	20.29	20.41	20.50	20.40	20.36	20.50
				118	5590	20.37	20.30	20.50	20.44	20.20	20.50
				126	5630	20.23	20.28	20.50	20.33	20.31	20.50
	802.11 ac80	80	VHT0	106	5530	NR	NR	18.75	NR	NR	18.75
				122	5610	NR	NR	19.75	NR	NR	19.75
	802.11 ax80		HE0	106	5530	NR	NR	18.75	NR	NR	18.75
				122	5610	NR	NR	19.75	NR	NR	19.75
	802.11 ac160	160	VHT0	114	5570	NR	NR	14.25	NR	NR	14.50
	802.11 ax160		HE0			NR	NR	14.25	NR	NR	14.50

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/Kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2\text{ W/Kg}$ or until all required channels are tested.

B.2.2.4 5.6 (U-NII-2C) – Reduced Power Mode

						Average power (dBm)						
						Main transmitter			Aux transmitter			
						INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power	
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power	
5.6GHz (U-NII-2C)	802.11 a	20	6	100	5500	NR	NR	15.50	NR	NR	15.50	
				104	5520	NR	NR	15.50	NR	NR	15.50	
				108	5540	NR	NR	15.50	NR	NR	15.50	
				112	5560	NR	NR	15.50	NR	NR	15.50	
				116	5580	NR	NR	15.50	NR	NR	15.50	
				120	5600	NR	NR	15.50	NR	NR	15.50	
				124	5620	NR	NR	15.50	NR	NR	15.50	
				128	5640	NR	NR	15.50	NR	NR	15.50	
	802.11 n20		HT0	100	5500	NR	NR	15.50	NR	NR	15.50	
				104	5520	NR	NR	15.50	NR	NR	15.50	
				108	5540	NR	NR	15.50	NR	NR	15.50	
				112	5560	NR	NR	15.50	NR	NR	15.50	
				116	5580	NR	NR	15.50	NR	NR	15.50	
				120	5600	NR	NR	15.50	NR	NR	15.50	
				124	5620	NR	NR	15.50	NR	NR	15.50	
				128	5640	NR	NR	15.50	NR	NR	15.50	
	802.11 ax20		HE0	100	5500	NR	NR	15.50	NR	NR	15.50	
				104	5520	NR	NR	15.50	NR	NR	15.50	
				108	5540	NR	NR	15.50	NR	NR	15.50	
				112	5560	NR	NR	15.50	NR	NR	15.50	
				116	5580	NR	NR	15.50	NR	NR	15.50	
				120	5600	NR	NR	15.50	NR	NR	15.50	
				124	5620	NR	NR	15.50	NR	NR	15.50	
				128	5640	NR	NR	15.50	NR	NR	15.50	
	802.11 n40		HT0	102	5510	NR	NR	15.50	NR	NR	15.50	
				110	5550	NR	NR	15.50	NR	NR	15.50	
				118	5590	NR	NR	15.50	NR	NR	15.50	
				126	5630	NR	NR	15.50	NR	NR	15.50	
	802.11 ax40		HE0	102	5510	NR	NR	15.50	NR	NR	15.50	
				110	5550	NR	NR	15.50	NR	NR	15.50	
				118	5590	NR	NR	15.50	NR	NR	15.50	
				126	5630	NR	NR	15.50	NR	NR	15.50	
	802.11 ac80		80	VHT0	106	5530	NR	NR	15.50	NR	NR	15.50
					122	5610	NR	NR	15.50	NR	NR	15.50
	802.11 ax80		80	HE0	106	5530	15.38	15.44	15.50	15.42	15.37	15.50
					122	5610	15.38	15.45	15.50	15.25	15.25	15.50
	802.11 ac160	160	VHT0	114	5570	NR	NR	14.25	NR	NR	14.50	
	802.11 ax160		HE0			NR	NR	14.25	NR	NR	14.50	

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/Kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2\text{ W/Kg}$ or until all required channels are tested.

B.2.2.5 5.8GHz (U-NII-3) – Full Power Mode

						Average power (dBm)					
						Main transmitter			Aux transmitter		
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.6/5.8GHz (U-NII-3)	802.11 a	20	6	132	5660	NR	NR	20.50	NR	NR	20.50
				136	5680	NR	NR	20.50	NR	NR	20.50
				140	5700	NR	NR	17.50	NR	NR	18.00
				144	5720	NR	NR	20.50	NR	NR	20.50
				149	5745	NR	NR	20.50	NR	NR	20.50
				153	5765	NR	NR	20.50	NR	NR	20.50
				157	5785	NR	NR	20.50	NR	NR	20.50
				161	5805	NR	NR	20.50	NR	NR	20.50
				165	5825	NR	NR	20.50	NR	NR	20.50
	802.11 n20		HT0	132	5660	NR	NR	20.50	NR	NR	20.50
				136	5680	NR	NR	20.50	NR	NR	20.50
				140	5700	NR	NR	17.50	NR	NR	18.00
				144	5720	NR	NR	20.50	NR	NR	20.50
				149	5745	NR	NR	20.50	NR	NR	20.50
				153	5765	NR	NR	20.50	NR	NR	20.50
				157	5785	NR	NR	20.50	NR	NR	20.50
				161	5805	NR	NR	20.50	NR	NR	20.50
				165	5825	NR	NR	20.50	NR	NR	20.50
	802.11 ax20		HE0	132	5660	NR	NR	20.50	NR	NR	20.50
				136	5680	NR	NR	20.50	NR	NR	20.50
				140	5700	NR	NR	17.50	NR	NR	18.00
				144	5720	NR	NR	20.50	NR	NR	20.50
				149	5745	NR	NR	20.50	NR	NR	20.50
				153	5765	NR	NR	20.50	NR	NR	20.50
				157	5785	NR	NR	20.50	NR	NR	20.50
				161	5805	NR	NR	20.50	NR	NR	20.50
				165	5825	NR	NR	20.50	NR	NR	20.50
	802.11 n40		HT0	134	5670	NR	NR	19.25	NR	NR	19.25
				142	5710	NR	NR	20.50	NR	NR	20.50
				151	5755	NR	NR	20.50	NR	NR	20.50
				159	5795	NR	NR	20.50	NR	NR	20.50
			HE0	134	5670	NR	NR	19.25	NR	NR	19.25
				142	5710	NR	NR	20.50	NR	NR	20.50
				151	5755	NR	NR	20.50	NR	NR	20.50
				159	5795	NR	NR	20.50	NR	NR	20.50
	802.11 ac80		VHT0	138	5690	20.27	20.30	20.50	20.40	20.40	20.50
155		5775		18.44	18.28	18.50	18.30	18.23	18.50		
802.11 ax80		HE0	138	5690	NR	NR	20.50	NR	NR	20.50	
			155	5775	NR	NR	18.50	NR	NR	18.50	

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/Kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2\text{ W/Kg}$ or until all required channels are tested.

B.2.2.6 5.8GHz (U-NII-3) – Reduced Power Mode

						Average power (dBm)					
						Main transmitter			Aux transmitter		
						INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
Band	Mode	BW (MHz)	Rate (Mbps)	Ch	Frequency (MHz)	INPAQ	High-Tek	Tune-up Power	INPAQ	High-Tek	Tune-up Power
5.6/5.8GHz (U-NII-3)	802.11 a	20	6	132	5660	NR	NR	15.50	NR	NR	15.50
				136	5680	NR	NR	15.50	NR	NR	15.50
				140	5700	NR	NR	15.50	NR	NR	15.50
				144	5720	NR	NR	15.50	NR	NR	15.50
				149	5745	NR	NR	15.50	NR	NR	15.50
				153	5765	NR	NR	15.50	NR	NR	15.50
				157	5785	NR	NR	15.50	NR	NR	15.50
				161	5805	NR	NR	15.50	NR	NR	15.50
				165	5825	NR	NR	15.50	NR	NR	15.50
	802.11 n20		HT0	132	5660	NR	NR	15.50	NR	NR	15.50
				136	5680	NR	NR	15.50	NR	NR	15.50
				140	5700	NR	NR	15.50	NR	NR	15.50
				144	5720	NR	NR	15.50	NR	NR	15.50
				149	5745	NR	NR	15.50	NR	NR	15.50
				153	5765	NR	NR	15.50	NR	NR	15.50
				157	5785	NR	NR	15.50	NR	NR	15.50
				161	5805	NR	NR	15.50	NR	NR	15.50
				165	5825	NR	NR	15.50	NR	NR	15.50
	802.11 ax20	HE0	132	5660	NR	NR	15.50	NR	NR	15.50	
			136	5680	NR	NR	15.50	NR	NR	15.50	
			140	5700	NR	NR	15.50	NR	NR	15.50	
			144	5720	NR	NR	15.50	NR	NR	15.50	
			149	5745	NR	NR	15.50	NR	NR	15.50	
			153	5765	NR	NR	15.50	NR	NR	15.50	
			157	5785	NR	NR	15.50	NR	NR	15.50	
			161	5805	NR	NR	15.50	NR	NR	15.50	
			165	5825	NR	NR	15.50	NR	NR	15.50	
	802.11 n40	HT0	134	5670	NR	NR	15.50	NR	NR	15.50	
			142	5710	NR	NR	15.50	NR	NR	15.50	
			151	5755	NR	NR	15.50	NR	NR	15.50	
			159	5795	NR	NR	15.50	NR	NR	15.50	
	802.11 ax40	HE0	134	5670	NR	NR	15.50	NR	NR	15.50	
			142	5710	NR	NR	15.50	NR	NR	15.50	
			151	5755	NR	NR	15.50	NR	NR	15.50	
			159	5795	NR	NR	15.50	NR	NR	15.50	
	802.11 ac80	80	VHT0	138	5690	15.41	15.35	15.50	15.34	15.37	15.50
				155	5775	15.40	15.35	15.50	15.25	15.21	15.50
	802.11 ax80		HE0	138	5690	NR	NR	15.50	NR	NR	15.50
				155	5775	NR	NR	15.50	NR	NR	15.50

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is $> 1.2\text{W/kg}$. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. ax, a, g, n then ac)
5. When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/Kg}$, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2\text{ W/Kg}$ or until all required channels are tested.

B.2.3 Bluetooth

						Avg Pwr (dBm)		
Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	INPAQ	High-Tek	Tune-up Pwr (dBm)
2.4GHz (BT)	Bluetooth v5.1	Basic rate GFSK	0	2402	Main	8.61	8.65	11.00
			39	2441		9.02	9.20	11.00
			78	2480		9.42	9.62	11.00
	Bluetooth v5.1	Basic rate $\pi/4$ DQPSK	0	2402		NR ¹	NR ¹	7.00
			39	2441				7.00
			78	2480				7.00
	Bluetooth v5.1	Basic rate 8-DPSK	0	2402				7.00
			39	2441				7.00
			78	2480				7.00
	BLE	Low energy GFSK	0	2412				7.00
			20	2442				7.00
			39	2480				7.00

Initial test configuration

1. NR: Not Required

B.3 Tissue Parameters Measurement

Body TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
2450	52.70	1.95	51.89	1.98	-1.54	1.54	2021-08-19
5300	48.88	5.42	46.88	5.38	-4.09	-0.74	
5500	48.61	5.65	46.48	5.67	-0.28	0.35	
5600	48.47	5.77	46.29	5.81	-4.50	0.69	
5800	48.20	6.00	45.91	6.10	-4.75	1.67	
2450	52.70	1.95	51.82	1.99	-1.67	2.05	2021-08-23
5300	48.88	5.42	47.32	5.37	-3.19	-0.92	
5500	48.61	5.65	47.06	5.55	0.97	-1.77	
5600	48.47	5.77	46.35	5.73	-4.37	-0.69	
5800	48.20	6.00	46.42	6.24	-3.69	4.00	
2450	52.70	1.95	52.14	1.98	-1.06	1.54	2021-08-26
5300	48.88	5.42	46.88	5.46	-4.09	0.74	
5500	48.61	5.65	46.48	5.74	-0.28	1.59	
5600	48.47	5.77	46.31	5.89	-4.46	2.08	
5800	48.20	6.00	45.91	6.18	-4.75	3.00	

See Annex D for more details.

B.4 System Check Measurements

Body Measurements

Frequency (MHz)	Average	Target SAR (W/Kg)	Measured SAR (W/Kg)	Deviation to target (%)	Limit (%)	Date
2450	1g	48.60	50.60	4.12	±10	2021-08-25
	10g	22.40	23.40	1.74		
5300	1g	75.10	77.80	3.60		2021-08-20
	10g	20.80	22.20	6.73		
5500	1g	80.00	78.00	-2.50		
	10g	21.80	22.00	0.92		
5600	1g	78.40	74.80	-4.59		
	10g	21.50	21.60	0.47		
5800	1g	74.90	76.80	4.94		
	10g	20.40	22.00	7.84		

See Annex C for more details.

B.5 SAR Test Results

B.5.1 Bluetooth & 802.11b/g/n/ax – 2.4GHz – DTS – BT (DSS)

Antenna Manufacturer	Power Level	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
INPAQ	Full Power	802.15	DH5	1	78	2480	Reading-Portrait	MAIN	1.58	0.01	0.01	
							Ink Open		1.58	0.01	0.01	
		802.11b	1Mbps	20	10	2457	Ink Open	AUX	0.10	0.04	0.04	
					10	2457	Ink Open	MAIN	0.07	0.01	0.01	
					10	2457	Reading-Portrait		0.07	0.01	0.01	
	Reduced Power	802.15	DH5	1	78	2480	Back Face	MAIN	1.58	0.04	0.06	
							Top Edge		1.58	0.01	0.01	
							Right Edge		1.58	0.01	0.01	
		802.11b	1Mbps	20	6	2437	Back Face	AUX	0.15	0.76	0.78	1
					6	2437	Top Edge		0.15	0.19	0.19	
					11	2462	Back Face	MAIN	0.10	0.75	0.77	
					11	2462	Top Edge		0.10	0.06	0.06	
					11	2462	Right Edge		0.10	0.01	0.01	
High-Tek	Full Power	802.15	DH5	1	78	2480	Reading-Portrait	MAIN	1.38	0.01	0.02	
							Ink Open		1.38	0.01	0.01	
		802.11b	1Mbps	20	10	2457	Ink Open	AUX	0.07	0.15	0.15	
					10	2457	Ink Open	MAIN	0.17	0.13	0.14	
					10	2457	Reading-Portrait		0.17	0.28	0.29	
	Reduced Power	802.15	DH5	1	78	2480	Back Face	MAIN	1.38	0.07	0.09	
							Top Edge		1.38	0.05	0.07	
							Right Edge		1.38	0.01	0.02	
		802.11b	1Mbps	20	11	2462	Back Face	AUX	0.11	0.72	0.74	
					11	2462	Top Edge		0.11	0.27	0.27	
					1	2412	Back Face	MAIN	0.12	0.72	0.74	
					1	2412	Top Edge		0.12	0.56	0.57	
					1	2412	Right Edge		0.12	0.18	0.18	

B.5.2 802.11a/n/ac/ax – 5.3 GHz – U-NII-2A

Antenna Manufacturer	Power Level	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
INPAQ	Full Power	801.11ax	HE0	40	54	5270	Ink Open	AUX	0.14	0.04	0.04	
					54	5270	Ink Open	MAIN	0.12	0.03	0.03	
					54	5270	Reading-Portait		0.12	0.01	0.01	
	Reduced Power	801.11ax	HE0	80	58	5290	Back Face	AUX	0.18	0.30	0.32	
					58	5290	Top Edge		0.18	0.04	0.05	
					58	5290	Back Face	MAIN	0.13	0.23	0.24	
					58	5290	Top Edge		0.13	0.06	0.06	
					58	5290	Right Edge		0.13	0.00	0.00	
High-Tek	Full Power	801.11ax	HE0	40	54	5270	Ink Open	AUX	0.14	0.05	0.05	
					54	5270	Ink Open	MAIN	0.06	0.11	0.11	
					54	5270	Reading-Portait		0.06	0.08	0.08	
	Reduced Power	801.11ax	HE0	80	58	5290	Back Face	AUX	0.17	0.47	0.49	2
					58	5290	Top Edge		0.17	0.04	0.04	
					58	5290	Back Face	MAIN	0.06	0.44	0.45	
					58	5290	Top Edge		0.06	0.06	0.06	
					58	5290	Right Edge		0.06	0.02	0.02	

B.5.3 802.11a/n/ac/ax – 5.6 GHz – U-NII-2C

Antenna Manufacturer	Power Level	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
INPAQ	Full Power	801.11ax	HE0	40	118	5590	Ink Open	AUX	0.06	0.01	0.01	
					118	5590	Ink Open	MAIN	0.13	0.01	0.01	
					118	5590	Reading-Portait		0.13	0.01	0.01	
	Reduced Power	801.11ax	HE0	80	106	5530	Back Face	AUX	0.08	0.07	0.07	
					106	5530	Top Edge		0.08	0.01	0.01	
					106	5530	Back Face	MAIN	0.12	0.04	0.04	
					106	5530	Top Edge		0.12	0.01	0.01	
					106	5530	Right Edge		0.12	0.01	0.01	
High-Tek	Full Power	801.11ax	HE0	40	110	5550	Ink Open	AUX	0.14	0.08	0.09	
					110	5550	Ink Open	MAIN	0.09	0.08	0.08	
					110	5550	Reading-Portait		0.09	0.05	0.05	
	Reduced Power	801.11ax	HE0	80	106	5530	Back Face	AUX	0.13	1.02	1.05	3
					122	5610			0.25	0.98	1.03	
					106	5530	Top Edge	MAIN	0.13	0.06	0.06	
					122	5610	Back Face		0.05	0.46	0.47	
					122	5610	Top Edge		0.05	0.13	0.13	
					122	5610	Right Edge		0.05	0.01	0.01	

B.5.4 802.11a/n/ac/ax – 5.8 GHz – U-NII-3

Antenna Manufacture	Power Level	Mode	Data rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Antenna	Scaling Factor (dB).	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/Kg)	No Plot
INPAQ	Full Power	801.11ax	HE0	80	138	5690	Ink Open	AUX	0.10	0.01	0.01	
					138	5690	Ink Open	MAIN	0.23	0.01	0.01	
					138	5690	Reading-Portait		0.23	0.01	0.01	
	Reduced Power	801.11ax	HE0	80	138	5690	Back Face	AUX	0.16	0.02	0.02	
					138	5690	Top Edge		0.16	0.01	0.01	
					138	5690	Back Face	MAIN	0.09	0.03	0.03	
					138	5690	Top Edge		0.09	0.01	0.01	
					138	5690	Right Edge		0.09	0.01	0.01	
High-Tek	Full Power	801.11ax	HE0	80	138	5690	Ink Open	AUX	0.10	0.10	0.10	
					138	5690	Ink Open	MAIN	0.20	0.14	0.15	
					138	5690	Reading-Portait		0.20	0.11	0.12	
	Reduced Power	801.11ax	HE0	80	138	5690	Back Face	AUX	0.13	0.83	0.86	4
					155	5775			0.29	0.69	0.74	
					138	5690	Top Edge	MAIN	0.13	0.04	0.04	
					138	5690	Back Face		0.15	0.57	0.59	
					138	5690	Top Edge		0.15	0.15	0.16	
					138	5690	Right Edge		0.15	0.02	0.02	

B.5.5 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band/mode. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $< 20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement ≥ 1.5 W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2 .

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1 st Repeated SAR 1g (W/Kg)	2 nd Repeated SAR 1g (W/Kg)	Highest Ratio
5.5GHz 802.11ax80 HE0	Back Face	106	5530	1.02	1.02		1.00
5.6GHz 802.11ax80 HE0	Back Face	122	5610	0.98	0.94		0.96

B.5.6 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/Kg)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Aux	Reading-Portait	0.40*	0.40*	
	Ink Open	0.15	0.10	
	Back Face	0.78	1.05	
	Top Edge	0.27	0.06	
	Right Edge	0.40*	0.40*	
Main	Reading-Portait	0.29	0.12	0.02
	Ink Open	0.14	0.15	0.01
	Back Face	0.77	0.59	0.09
	Top Edge	0.57	0.16	0.07
	Right Edge	0.18	0.02	0.02

* According to FCC OET KDB 447498 D01, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/Kg for 1-g SAR when the test separation is > 50mm in order to determine simultaneous transmission test exclusion.

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/Kg)	Limit (W/kg)
	Aux Antenna	Main Antenna		
Top Edge	WLAN 5GHz	WLAN 5GHz	0.22	1.60
	WLAN 5GHz	WLAN 5GHz + BT	0.29	
	WLAN 5GHz	BT	0.13	
	WLAN 2.4GHz	WLAN 2.4GHz	0.84	
	WLAN 2.4GHz	BT	0.34	
Back Face	WLAN 5GHz	WLAN 5GHz	1.64	
	WLAN 5GHz	WLAN 5GHz + BT	1.73	
	WLAN 5GHz	BT	1.14	
	WLAN 2.4GHz	WLAN 2.4GHz	1.55	
	WLAN 2.4GHz	BT	0.87	
Right Edge	WLAN 5GHz	WLAN 5GHz	0.42	
	WLAN 5GHz	WLAN 5GHz + BT	0.44	
	WLAN 5GHz	BT	0.42	
	WLAN 2.4GHz	WLAN 2.4GHz	0.58	
	WLAN 2.4GHz	BT	0.42	
Ink Open	WLAN 5GHz	WLAN 5GHz	0.25	
	WLAN 5GHz	WLAN 5GHz + BT	0.26	
	WLAN 5GHz	BT	0.11	
	WLAN 2.4GHz	WLAN 2.4GHz	0.29	
	WLAN 2.4GHz	BT	0.16	
Reading Portrait	WLAN 5GHz	WLAN 5GHz	0.52	
	WLAN 5GHz	WLAN 5GHz + BT	0.54	
	WLAN 5GHz	BT	0.42	
	WLAN 2.4GHz	WLAN 2.4GHz	0.69	
	WLAN 2.4GHz	BT	0.42	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Back Face	Aux WLAN 5GHz	1.05	1.64	(2.5 ; 31.5 ; -176.9)	0.02	0.04
	Main WLAN 5GHz	0.59		(2.5 ; -55.0 ; -176.8)		
	Aux WLAN 5GHz	1.05	1.73	(2.5 ; 31.5 ; -176.9)	0.03	
	Main WLAN 5GHz + BT	0.68		(2.5 ; -55.0 ; -176.8)		

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no enlarged zoom scan measurements are required

Annex C. Test System Plots

1.	DTS - 802.11b, CH6, Main Antenna, INPAQ – Back Face	49
2.	U-NII-2A - 802.11ax80, CH58, Main Antenna, High-Tek – Back Face	50
3.	U-NII-2C - 802.11ax80, CH106, Main Antenna, High-Tek – Back Face	51
4.	U-NII-3 - 802.11ax80, CH138, Main Antenna, High-Tek – Back Face.....	52
5.	System Check Body Liquid 2450MHz	53
6.	System Check Body Liquid 5300MHz	54
7.	System Check Body Liquid 5500MHz	55
8.	System Check Body Liquid 5600MHz	56
9.	System Check Body Liquid 5800MHz	57

1. DTS - 802.11b, CH6, Aux Antenna, INPAQ – Back Face

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
HP Mavis, TPN-C156	252x175x11	TPN-C156(2)	Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	BACK, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2437.0, 6	7.37	1.97	51.85

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-23	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	3.6 x 3.6 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-25, 11:12	2021-08-25, 11:25
psSAR1g [W/Kg]	0.727	0.756
psSAR10g [W/Kg]	0.355	0.300
Power Drift [dB]	0.20	0.20
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		64.2
Dist 3dB Peak [mm]		4.3

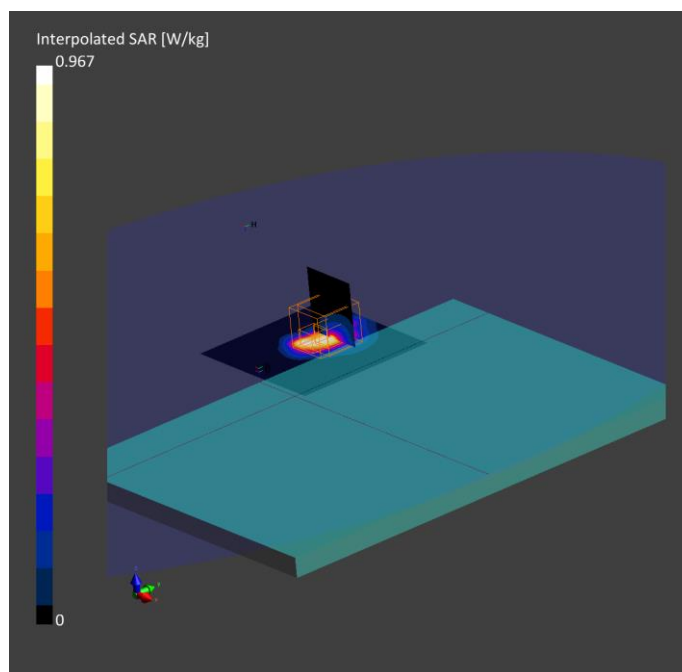

2. U-NII-2A - 802.11ax80, CH58, Aux Antenna, High-Tek – Back Face

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
HP Mavis, TPN-C156	252x175x11	TPN-C156(2)	Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Handling - back face, 0.00	WLAN 5GHz	WLAN, 10731-AAC	5290.0, 58	4.49	5.37	46.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 10:45	2021-08-20, 10:52
psSAR1g [W/Kg]	0.410	0.471
psSAR10g [W/Kg]	0.140	0.129
Power Drift [dB]	-0.08	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		64.6
Dist 3dB Peak [mm]		5.6

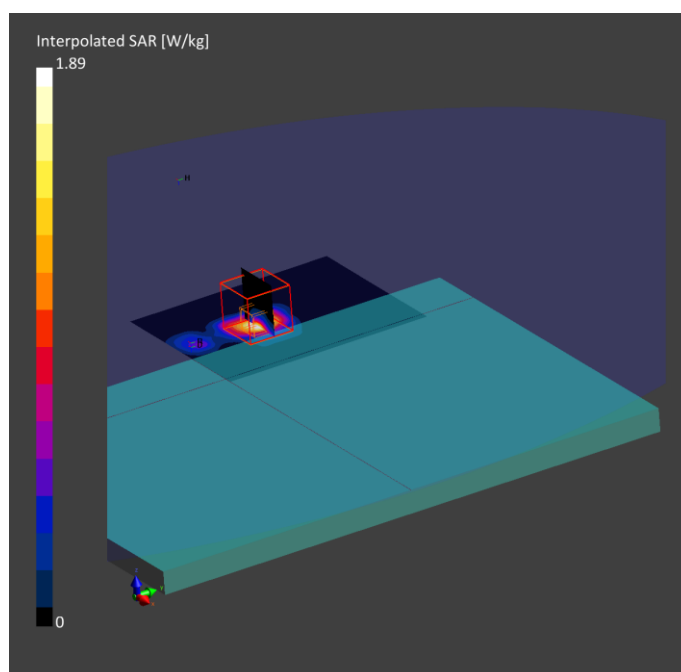

3. U-NII-2C - 802.11ax80, CH106, Aux Antenna, High-Tek – Back Face

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
HP Mavis, TPN-C156	252x175x11	TPN-C156(2)	Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Handling - back face, 0.00	WLAN 5GHz	WLAN, 10731-AAC	5530.0, 106	4.09	5.58	46.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 11:01	2021-08-20, 11:08
psSAR1g [W/Kg]	0.861	1.02
psSAR10g [W/Kg]	0.277	0.270
Power Drift [dB]	-0.11	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		61.4
Dist 3dB Peak [mm]		5.6

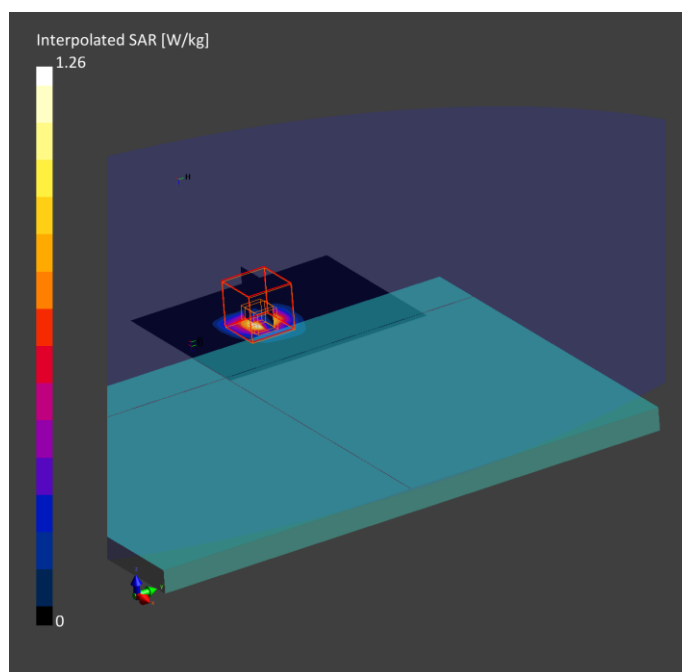

4. U-NII-3 - 802.11ax80, CH138, Aux Antenna, High-Tek – Back Face

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
HP Mavis, TPN-C156	252x175x11	TPN-C156(2)	Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Handling - back face, 0.00	WLAN 5GHz	WLAN, 10731-AAC	5690.0, 138	3.97	5.81	46.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 11:38	2021-08-20, 11:45
psSAR1g [W/Kg]	0.663	0.834
psSAR10g [W/Kg]	0.208	0.208
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		61.5
Dist 3dB Peak [mm]		4.9

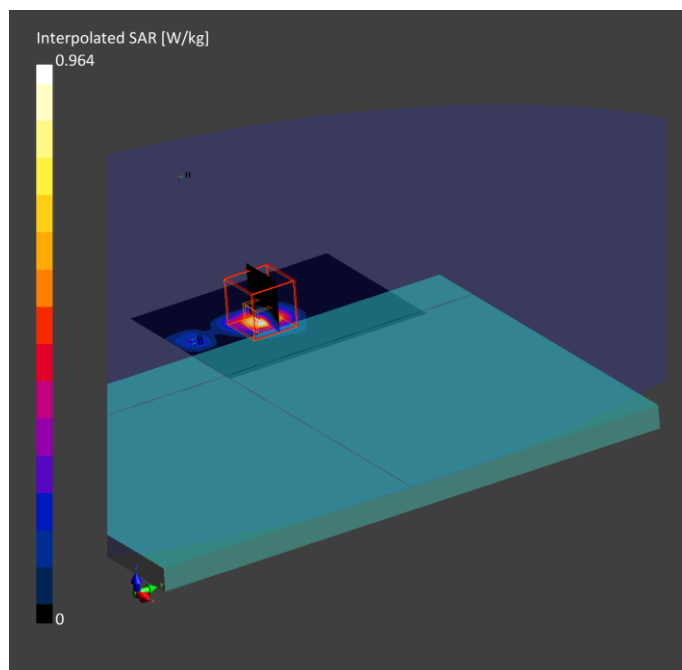

5. System Check Body Liquid 2450MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2450V2, SPEAG	50.0 x 10.0 x 8.0	937	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	2450.0, 0	7.37	1.98	52.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-23	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-25, 16:37	2021-08-25, 16:43
psSAR1g [W/Kg]	2.29	2.37
psSAR10g [W/Kg]	1.08	1.10
Power Drift [dB]	-0.10	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.1
Dist 3dB Peak [mm]		9.0

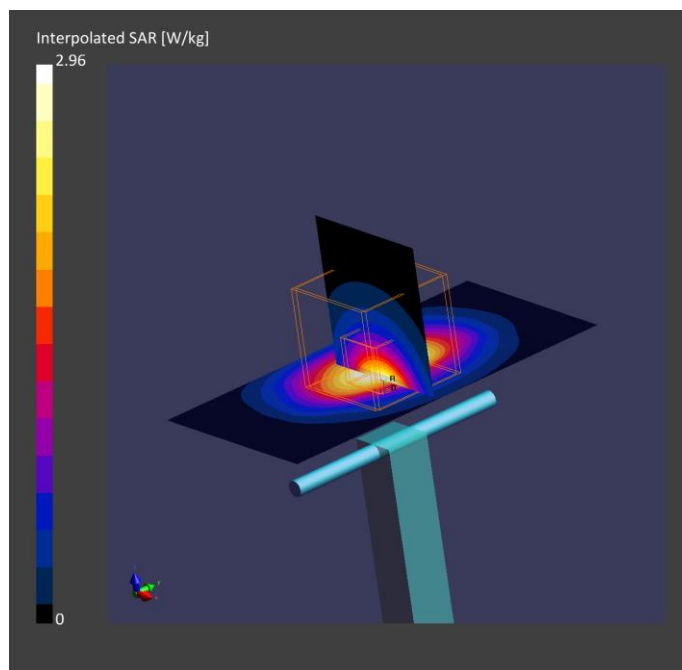

6. System Check Body Liquid 5300MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 8.0	1259	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	5300.0, 0	4.49	5.38	46.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 11:54	2021-08-20, 12:00
psSAR1g [W/Kg]	3.34	3.89
psSAR10g [W/Kg]	0.992	1.11
Power Drift [dB]	-0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		64.1
Dist 3dB Peak [mm]		7.2

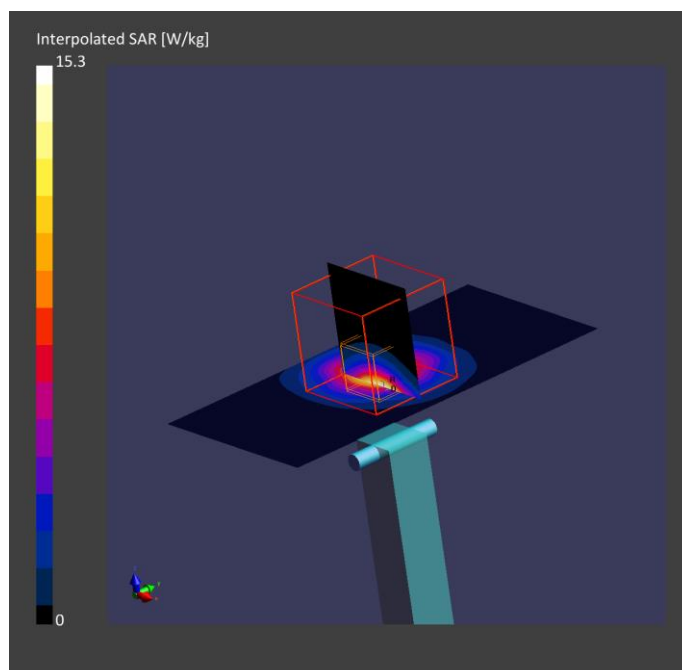

7. System Check Body Liquid 5500MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 13.0	1259	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	5500.0, 0	4.09	5.67	46.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 10:26	2021-08-20, 10:32
psSAR1g [W/Kg]	3.69	3.90
psSAR10g [W/Kg]	1.05	1.10
Power Drift [dB]	-0.13	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		63.9
Dist 3dB Peak [mm]		7.2

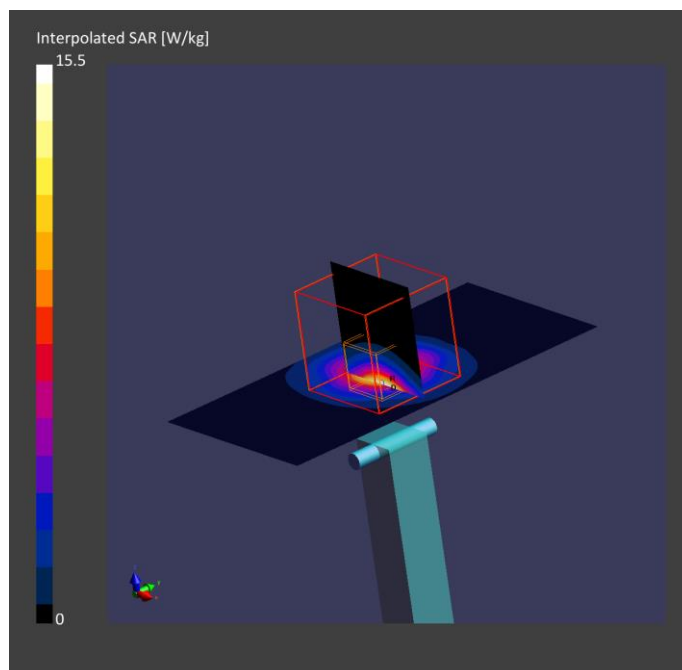

8. System Check Body Liquid 5600MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 13.0	1259	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	5600.0, 0	3.97	5.81	46.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2021-08-20, 13:55	2021-08-20, 14:01
psSAR1g [W/Kg]	3.29	3.74
psSAR10g [W/Kg]	0.975	1.08
Power Drift [dB]	0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		60.8
Dist 3dB Peak [mm]		7.4

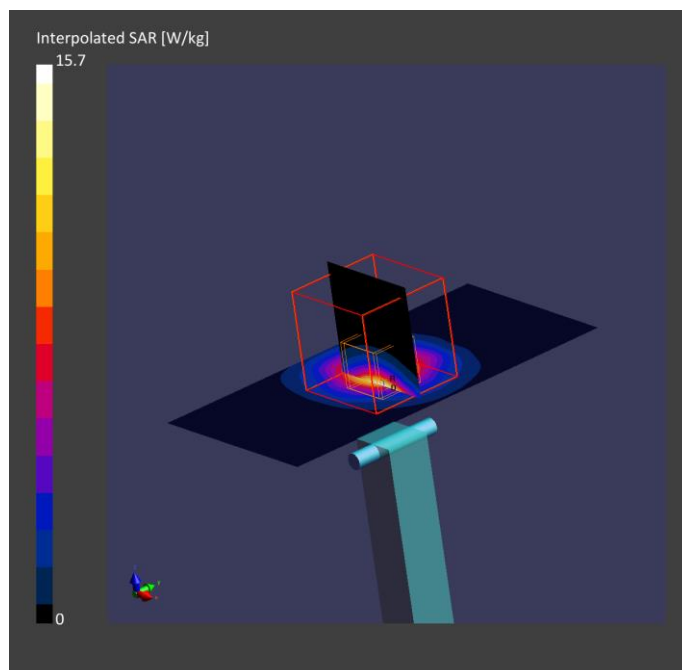

9. System Check Body Liquid 5800MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 , SPEAG	50.0 x 10.0 x 13.0	1259	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	5800.0, 0	4.1	6.10	45.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2021-Aug-19	EX3DV4 – SN3978, 2021-05-22	DAE4 Sn1429, 2021-05-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results


	Area Scan	Zoom Scan
Date	2021-08-20, 12:12	2021-08-20, 12:18
psSAR1g [W/Kg]	3.34	3.93
psSAR10g [W/Kg]	0.977	1.10
Power Drift [dB]	-0.02	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		59.4
Dist 3dB Peak [mm]		7.2

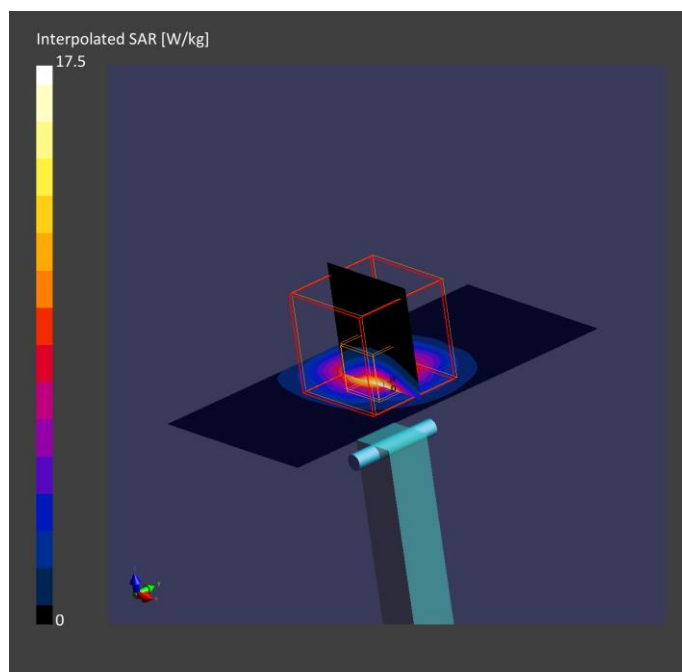

Annex D. TSL Dielectric Parameters

D.1 Body DTS 2450MHz


			2021-08-19		2021-08-23		2021-08-26	
Freq. (MHz)	Target		Measured		Measured		Measured	
	ϵ' (F/m)	ϵ' (F/m)	ϵ' (F/m)	σ (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
2400	52.77	1.9	51.8	1.92	51.88	1.94	52.21	1.94
2410	52.75	1.91	51.82	1.93	51.87	1.95	52.19	1.95
2420	52.74	1.92	51.83	1.94	51.86	1.96	52.18	1.96
2430	52.73	1.93	51.85	1.95	51.85	1.97	52.16	1.97
2440	52.71	1.94	51.87	1.97	51.84	1.98	52.15	1.98
2450	52.7	1.95	51.89	1.98	51.82	1.99	52.14	1.98
2460	52.69	1.96	51.87	1.99	51.81	2.0	52.12	1.99
2470	52.67	1.98	51.86	2.0	51.79	2.01	52.11	2.0
2480	52.66	1.99	51.84	2.0	51.78	2.02	52.1	2.01
2490	52.65	2.01	51.83	2.01	51.76	2.03	52.08	2.02
2500	52.64	2.02	51.81	2.02	51.74	2.04	52.07	2.03

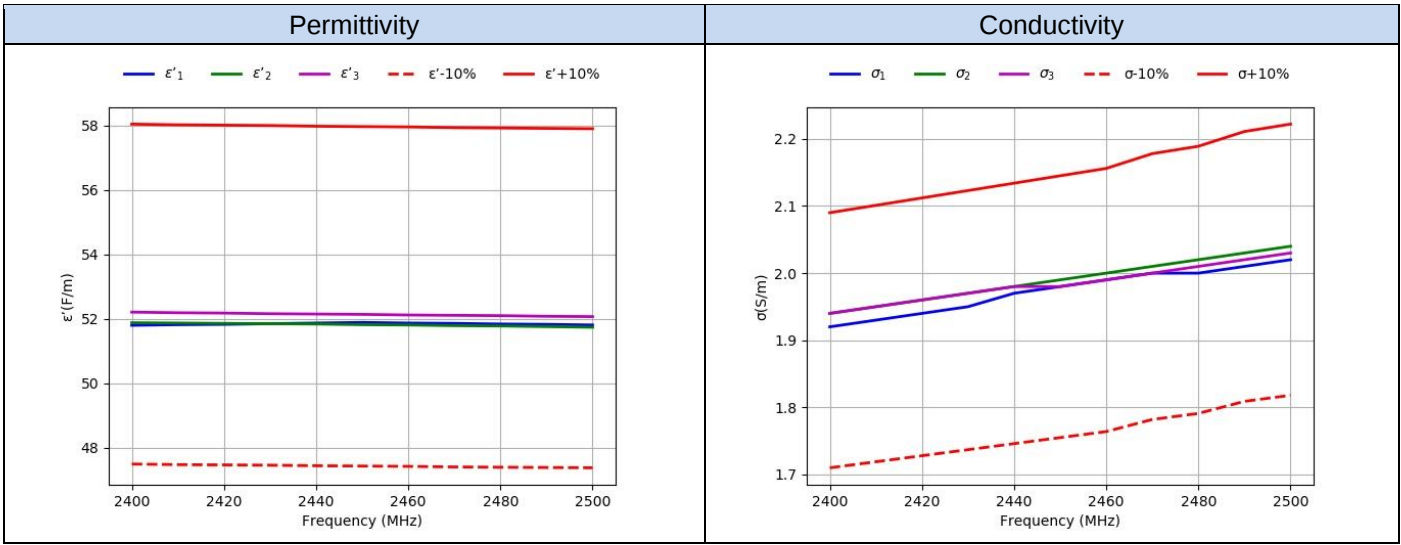

D.2 Body 5180MHz-5900MHz

Freq. (MHz)	Target		Measured 2021-08-19		Measured 2021-08-23		Measured 2021-08-26	
	σ (S/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
5180.0	49.04	5.28	47.11	5.21	47.04	5.22	47.16	5.29
5190.0	49.03	5.29	47.09	5.23	47.05	5.23	47.14	5.30
5200.0	49.01	5.30	47.07	5.24	47.06	5.25	47.12	5.31
5210.0	49.00	5.31	47.05	5.25	47.08	5.26	47.09	5.33
5220.0	48.99	5.32	47.03	5.27	47.10	5.28	47.07	5.34
5230.0	48.97	5.33	47.01	5.28	47.12	5.29	47.05	5.35
5240.0	48.96	5.35	46.99	5.30	47.14	5.30	47.02	5.37
5250.0	48.95	5.36	46.97	5.31	47.17	5.32	47.00	5.38
5260.0	48.93	5.37	46.95	5.33	47.20	5.33	46.97	5.39
5270.0	48.92	5.38	46.93	5.34	47.23	5.34	46.95	5.41
5280.0	48.91	5.39	46.91	5.35	47.26	5.35	46.93	5.42
5290.0	48.89	5.40	46.89	5.37	47.29	5.36	46.90	5.44
5300.0	48.88	5.42	46.88	5.38	47.32	5.37	46.88	5.46
5310.0	48.87	5.43	46.86	5.39	47.35	5.37	46.86	5.47
5320.0	48.85	5.44	46.84	5.41	47.38	5.38	46.84	5.49
5330.0	48.84	5.45	46.82	5.42	47.40	5.39	46.83	5.50
5340.0	48.82	5.46	46.80	5.44	47.42	5.40	46.81	5.52
5350.0	48.81	5.47	46.78	5.45	47.44	5.41	46.79	5.53
5360.0	48.80	5.49	46.76	5.47	47.45	5.41	46.77	5.54
5370.0	48.78	5.50	46.74	5.48	47.46	5.42	46.75	5.56
5380.0	48.77	5.51	46.72	5.50	47.46	5.43	46.74	5.57
5390.0	48.76	5.52	46.70	5.51	47.46	5.44	46.72	5.58
5400.0	48.74	5.53	46.68	5.52	47.45	5.45	46.70	5.60
5500.0	48.61	5.65	46.48	5.67	47.06	5.55	46.48	5.74
5510.0	48.59	5.66	46.46	5.68	47.0	5.57	46.47	5.76
5520.0	48.58	5.67	46.45	5.69	46.93	5.58	46.45	5.77
5530.0	48.57	5.68	46.43	5.71	46.85	5.6	46.43	5.79
5540.0	48.55	5.70	46.41	5.72	46.78	5.61	46.42	5.81
5550.0	48.54	5.71	46.39	5.74	46.7	5.63	46.4	5.82
5560.0	48.53	5.72	46.37	5.75	46.63	5.65	46.39	5.84
5570.0	48.51	5.73	46.35	5.76	46.56	5.67	46.37	5.85
5580.0	48.50	5.74	46.33	5.78	46.48	5.69	46.35	5.86
5590.0	48.48	5.75	46.31	5.79	46.41	5.71	46.33	5.88
5600.0	48.47	5.77	46.29	5.81	46.35	5.73	46.31	5.89
5610.0	48.46	5.78	46.27	5.82	46.28	5.75	46.29	5.91
5620.0	48.44	5.79	46.25	5.84	46.23	5.77	46.27	5.92
5630.0	48.43	5.80	46.23	5.85	46.18	5.79	46.25	5.94
5640.0	48.42	5.81	46.21	5.86	46.13	5.82	46.23	5.95
5650.0	48.40	5.82	46.19	5.88	46.09	5.84	46.21	5.97
5660.0	48.39	5.84	46.17	5.89	46.06	5.86	46.18	5.98
5670.0	48.38	5.85	46.16	5.91	46.04	5.89	46.16	6.0
5680.0	48.36	5.86	46.14	5.92	46.02	5.91	46.14	6.01
5690.0	48.35	5.87	46.12	5.94	46.01	5.94	46.12	6.03
5700.0	48.34	5.88	46.1	5.95	46.01	5.96	46.1	6.04
5710.0	48.32	5.90	46.08	5.97	46.02	5.99	46.08	6.06
5720.0	48.31	5.91	46.06	5.98	46.03	6.02	46.07	6.07
5730.0	48.30	5.92	46.04	6.0	46.06	6.04	46.05	6.09
5740.0	48.28	5.93	46.02	6.01	46.09	6.07	46.03	6.1
5750.0	48.27	5.94	46.0	6.03	46.13	6.1	46.01	6.11
5760.0	48.25	5.95	45.98	6.04	46.18	6.13	45.99	6.13
5770.0	48.24	5.97	45.96	6.05	46.23	6.15	45.98	6.14
5780.0	48.23	5.98	45.95	6.07	46.29	6.18	45.96	6.16
5790.0	48.21	5.99	45.93	6.08	46.35	6.21	45.93	6.17

Freq. (MHz)	Target		Measured 2021-08-19		Measured 2021-08-23		Measured 2021-08-26	
	σ (S/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
5800.0	48.20	6.00	45.91	6.10	46.42	6.24	45.91	6.18
5810.0	48.19	6.01	45.89	6.12	46.49	6.27	45.89	6.20
5820.0	48.17	6.02	45.87	6.13	46.56	6.29	45.86	6.21
5830.0	48.16	6.04	45.85	6.15	46.64	6.32	45.84	6.23
5840.0	48.15	6.05	45.83	6.16	46.71	6.34	45.81	6.24
5850.0	48.13	6.06	45.81	6.18	46.78	6.37	45.79	6.26
5860.0	48.12	6.07	45.79	6.19	46.84	6.39	45.76	6.27
5870.0	48.10	6.08	45.77	6.20	46.90	6.41	45.74	6.29
5880.0	48.09	6.09	45.76	6.22	46.96	6.43	45.72	6.30
5890.0	48.08	6.11	45.74	6.24	47.01	6.45	45.70	6.32
5900.0	48.06	6.12	45.72	6.25	47.05	6.47	45.68	6.33

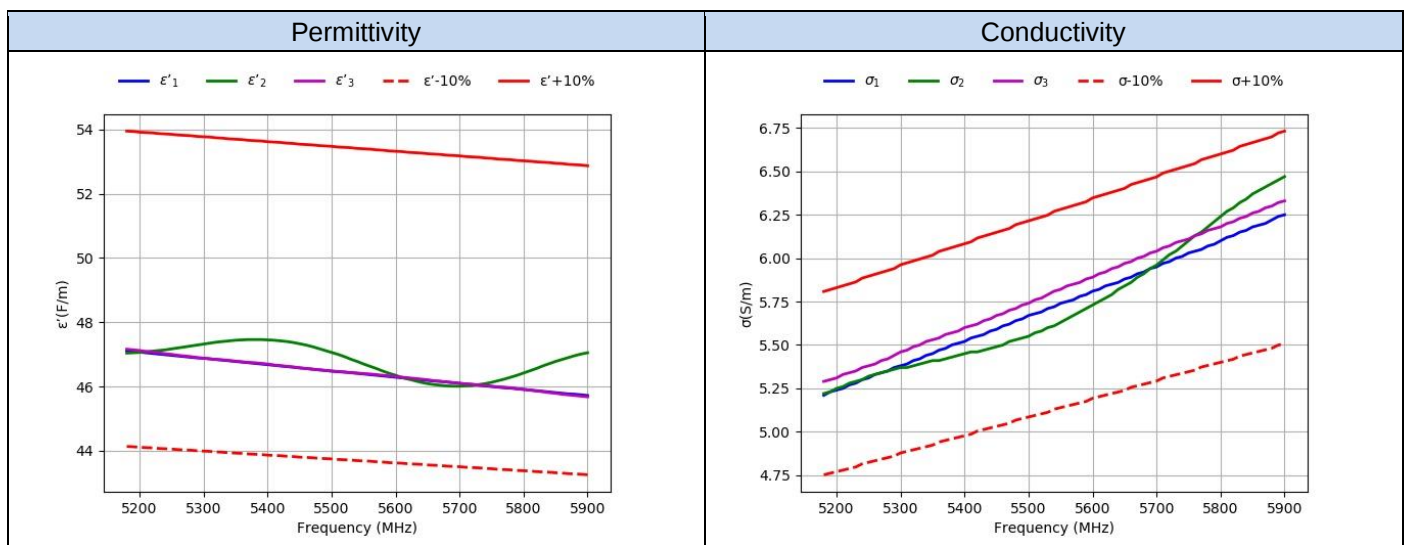

Annex E. Calibration Certificates

ID	Device	Type/Model	Serial Number	Manufacturer	Calibration Certificate
070-000	2450MHz System Validation Dipole	D2450V2	937	SPEAG	
084-000	5GHz System Validation Dipole	D5GHzV2	1259	SPEAG	
002-009	Dosimetric E-field Probe	EX3DV4	3978	SPEAG	

Dipole calibration

According to the KDB 865664 D01, a dipole must be calibrated using a fully validated SAR system according to the tissue dielectric parameters and SAR probe calibration frequency required for device testing. However, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements.

The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 and IEC/IEEE 62209-1528:2020 recommended annual calibration applies.

Immediate re-calibration is required for the following conditions:

1. When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times$ 0.2) or not meeting the required 20 dB minimum return-loss requirement.
2. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement

The below results show the latest return loss and impedance measurements for each dipole performed by the lab:

Dipole ID #070-000			
Dipole 2450MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-29.7	$50.85 + 3.20 j$	2020-05-12
Last	-28.5	$48.17 - 3.19 j$	2021-05-14
Dipole ID #084-000			
Dipole 5200MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-21.3	$49.9 - 8.7 j$	2020-03-10
Last	-24.6	$45.1 + 2.6 j$	2021-02-15
Dipole 5300MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-32.7	$50.4 - 2.3 j$	2020-03-10
Last	-30.9	$52.6 + 1.3 j$	2021-02-15
Dipole 5500MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-32.7	$47.8 - 0.5 j$	2020-03-10
Last	-28.7	$47.8 - 3.9 j$	2021-02-15
Dipole 5600MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-30.5	$53.0 - 0.8 j$	2020-03-10
Last	-26.3	$49.5 - 4.8 j$	2021-02-15
Dipole 5800MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Initial Calibration	-31.1	$52.0 + 2.0 j$	2020-03-10
Last	-34.2	$51.1 + 0.2 j$	2021-02-15