


Annex F. Photographs

F.1 Test Sample

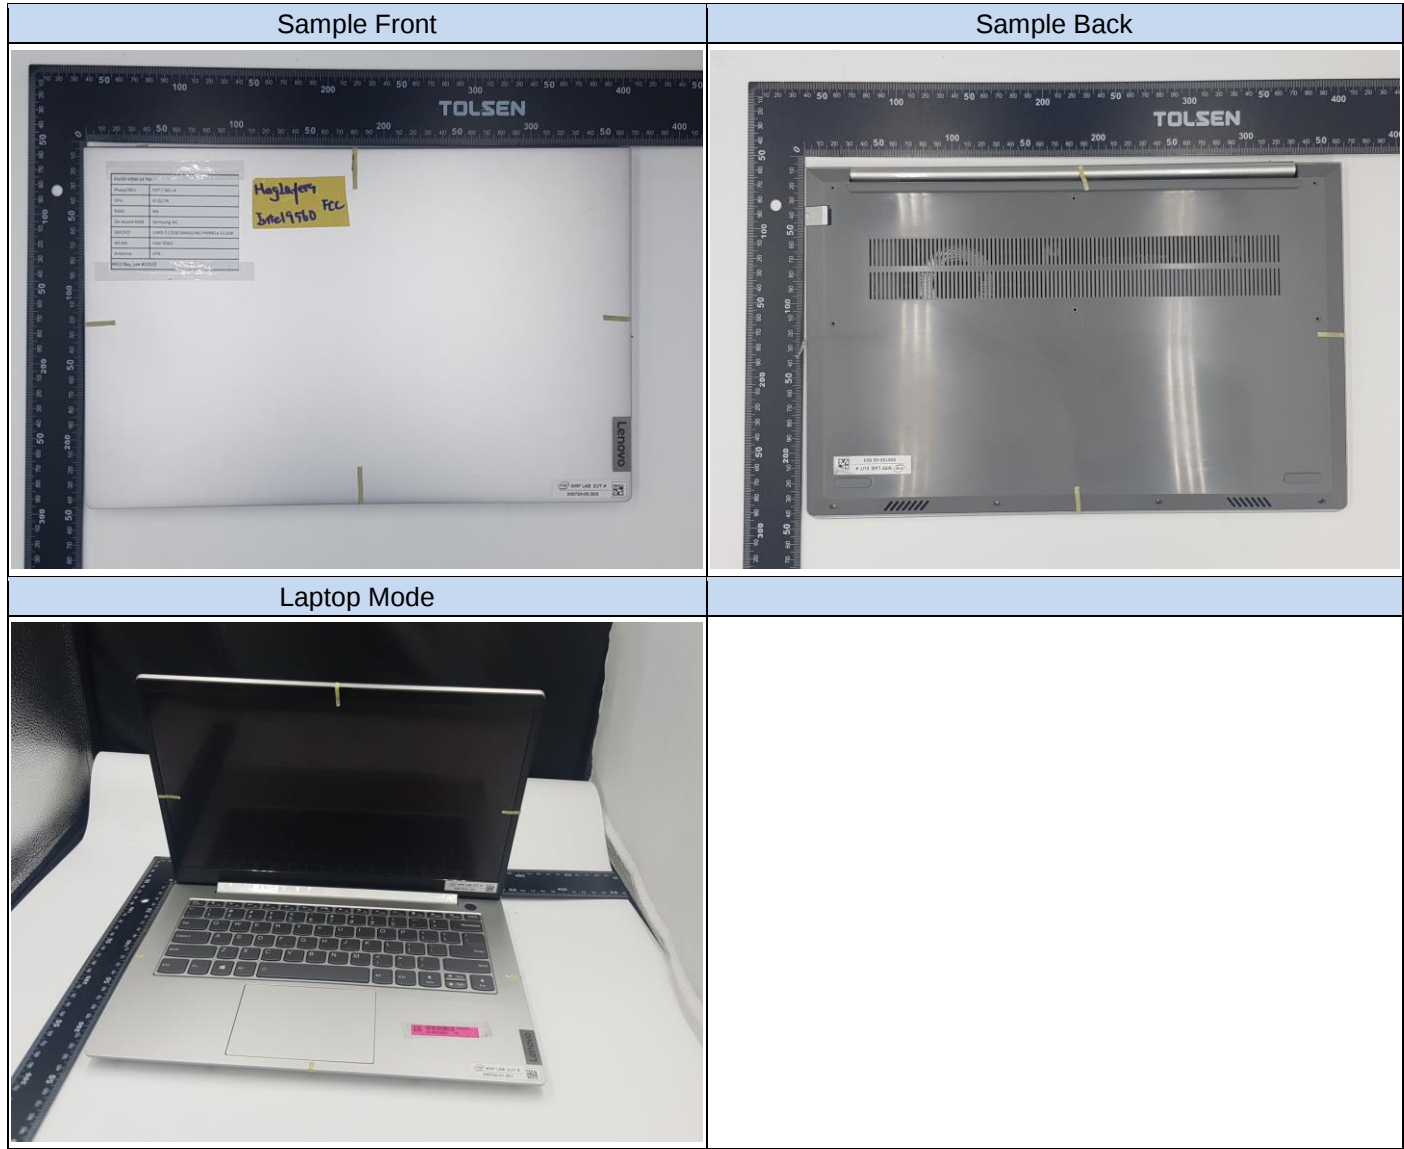

F.2 Test positions

Laptop Mode	Side View
 A photograph showing a laptop in a test setup. The laptop is open and its screen is tilted back. A black, rectangular component is mounted on top of the laptop. A clear plastic enclosure is positioned below the laptop, and a black cable is connected to the laptop's side. A red circular object is visible in the background.	 A photograph showing the side view of the test setup. A black component is mounted on a stand, and a clear plastic enclosure is positioned below it. A red circular object is visible in the background.


F.3 Antenna host platform location and adjacent edge positions relative to the body

Information provided by the customer


Antenna Host Platform location	Antenna Host Platform location - 2																																																								
Top Left Right Bottom NB mode open 90° WLAN-Main WLAN-Aux Keyboard Panel A B C D E F G H I J K L	<table><tr><th colspan="4">Minimum Separation Distance</th></tr><tr><th>Item</th><th>Antenna</th><th>Position</th><th>Distance (mm)</th></tr><tr><td>A</td><td>WLAN-Main</td><td>to Top</td><td>229.48</td></tr><tr><td>B</td><td>WLAN-Main</td><td>to Right</td><td>79.95</td></tr><tr><td>C</td><td>WLAN-Main</td><td>to Left</td><td>247.95</td></tr><tr><td>D</td><td>WLAN-Main</td><td>to Bottom</td><td>10.76</td></tr><tr><td>E</td><td>WLAN-Main</td><td>Main Antenna Length</td><td>30</td></tr><tr><td>F</td><td>Main-Aux</td><td>Main to Aux</td><td>50</td></tr><tr><td>G</td><td>WLAN-Aux</td><td>to Top</td><td>229.48</td></tr><tr><td>H</td><td>WLAN-Aux</td><td>to Right</td><td>159.95</td></tr><tr><td>I</td><td>WLAN-Aux</td><td>to Left</td><td>147.95</td></tr><tr><td>J</td><td>WLAN-Aux</td><td>to Bottom</td><td>10.76</td></tr><tr><td>K</td><td>WLAN-Aux</td><td>Aux Antenna Length</td><td>50</td></tr><tr><td>L</td><td>NB</td><td>Bumper thickness</td><td>4.8</td></tr></table>	Minimum Separation Distance				Item	Antenna	Position	Distance (mm)	A	WLAN-Main	to Top	229.48	B	WLAN-Main	to Right	79.95	C	WLAN-Main	to Left	247.95	D	WLAN-Main	to Bottom	10.76	E	WLAN-Main	Main Antenna Length	30	F	Main-Aux	Main to Aux	50	G	WLAN-Aux	to Top	229.48	H	WLAN-Aux	to Right	159.95	I	WLAN-Aux	to Left	147.95	J	WLAN-Aux	to Bottom	10.76	K	WLAN-Aux	Aux Antenna Length	50	L	NB	Bumper thickness	4.8
Minimum Separation Distance																																																									
Item	Antenna	Position	Distance (mm)																																																						
A	WLAN-Main	to Top	229.48																																																						
B	WLAN-Main	to Right	79.95																																																						
C	WLAN-Main	to Left	247.95																																																						
D	WLAN-Main	to Bottom	10.76																																																						
E	WLAN-Main	Main Antenna Length	30																																																						
F	Main-Aux	Main to Aux	50																																																						
G	WLAN-Aux	to Top	229.48																																																						
H	WLAN-Aux	to Right	159.95																																																						
I	WLAN-Aux	to Left	147.95																																																						
J	WLAN-Aux	to Bottom	10.76																																																						
K	WLAN-Aux	Aux Antenna Length	50																																																						
L	NB	Bumper thickness	4.8																																																						
Laptop Mode																																																									
Main Antenna 10.76 mm (Include Bumper)																																																									

F.4 Phantom liquid level during measurements

ELI phantom Body liquid SAR Dasy SPEAG MBBL600-6000V6 Batch – 160603-01

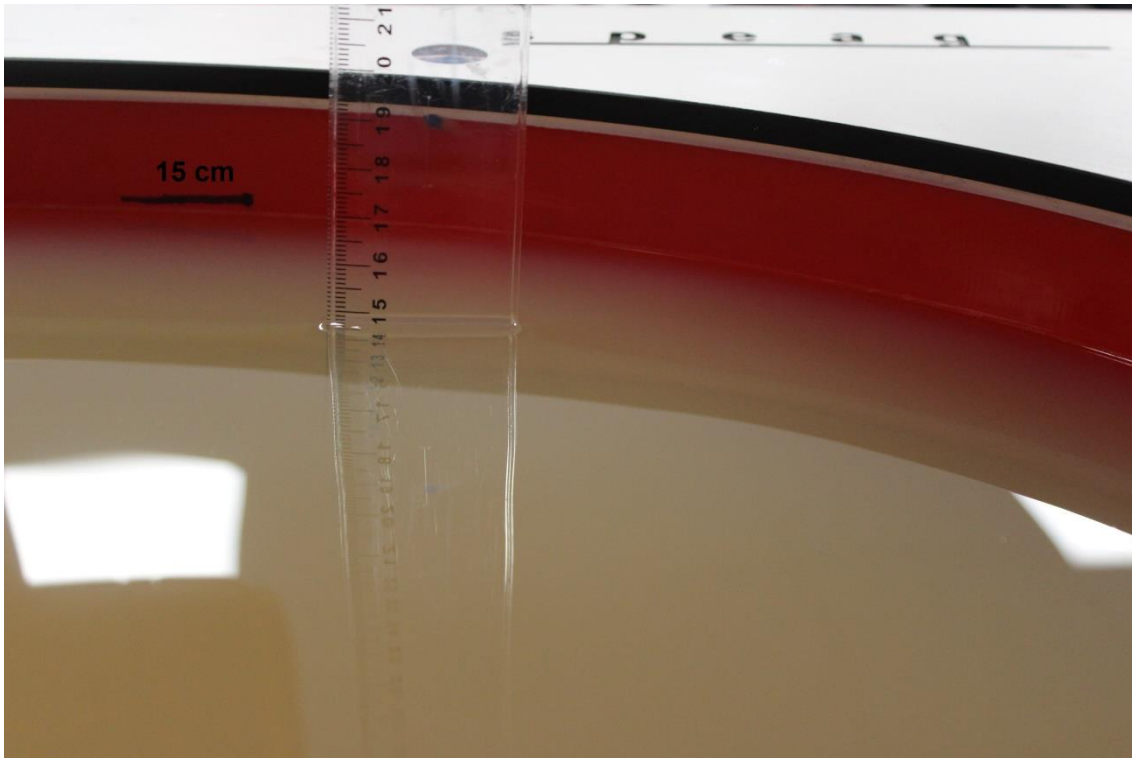

ELI phantom Body liquid SAR DASY SPEAG MBBL600-6000V6 Batch -1 191014-02

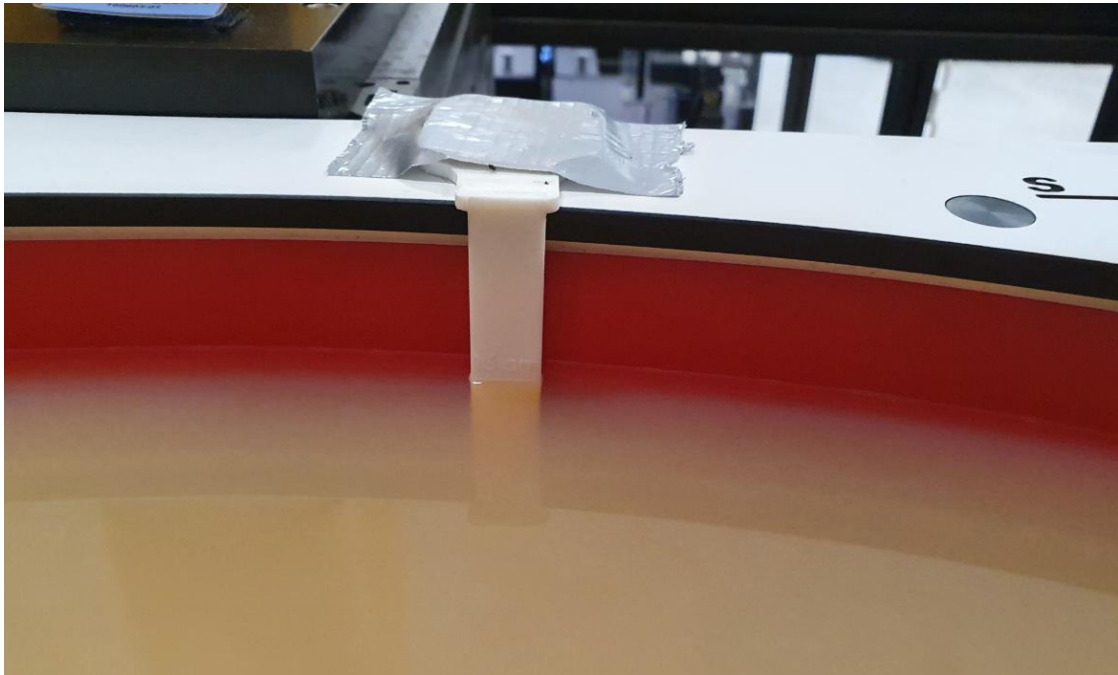

End of the report

This page is intentionally left blank and marks the last page of the test report.