



TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 adapter card
Brand Name	Intel® Wi-Fi 6E AX210
Model Name	AX210D2W
FCC	PD9AX210D2
Date of Test Start/End	2020-08-28 / 2021-01-07
Features	802.11ax, Dual Band, 2x2 Wi-Fi + Bluetooth® 5.2 (see section 5)
Description	Platform: Engineering sample + PIFA antenna

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	Testing Result	Limit
Maximum Power Density Result & Limit	3.37 W/m² (4cm²)	10 W/m² (4cm²)
Maximum SAR Result & Limit	0.32 W/Kg (1g)	1.6 W/kg (1g)
Min. test separation distance	17mm	

Test Report identification	200611-04.TR40
Revision Control	Rev. 01 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

This report shall not be reproduced, except in full, without the written approval of the laboratory.

Reference to accreditation shall be used only by full reproduction of test report.

Issued by _____

Reviewed by _____

Vaso KACULINI
(Test Engineer Lead)

Walid EL HAJJ
(Scientist Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	4
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	7
7. Test Verdicts summary	7
8. Document Revision History	7
Annex A. PD Test & System Description	8
A.1 POWER DENSITY DEFINITION	8
A.2 SPEAG FREE SPACE MEASUREMENT SYSTEM	8
A.2.1 Measurement Setup	8
A.2.2 E-Field Measurement Probe	9
A.2.3 Worst Case Linearization Error	10
A.2.4 Data Evaluation	10
A.3 SYSTEM CHECK	11
A.4 TEST EQUIPMENT LIST	12
A.5 MEASUREMENT UNCERTAINTY EVALUATION	13
A.6 RF EXPOSURE LIMITS	14
Annex B. SAR Test & System Description	15
B.1 SAR DEFINITION	15
B.2 SPEAG SAR MEASUREMENT SYSTEM	16
B.2.1 SAR Measurement Setup	16
B.2.2 E-Field Measurement Probe	17
B.2.3 SAM Phantom	17
B.2.4 Flat Phantom	18
B.2.5 Device Positioner	18
B.3 DATA EVALUATION	19
B.4 SYSTEM AND LIQUID CHECK	21
B.4.1 System Check	21
B.4.2 Liquid Check	22
B.5 TEST EQUIPMENT LIST	23
B.5.1 Tissue Simulant Liquid	23
B.6 MEASUREMENT UNCERTAINTY EVALUATION	24
B.7 RF EXPOSURE LIMITS	26
Annex C. Test Results	27
C.1 TEST CONDITIONS	27
C.1.1 Test positions relative to the phantom	27
C.1.2 Test signal, Output power and Test Frequencies	27
C.2 CONDUCTED POWER MEASUREMENTS	28
C.2.1 WLAN 6-7GHz (U-NII)	28
C.3 TISSUE PARAMETERS MEASUREMENT	32
C.4 SYSTEM CHECK MEASUREMENTS	32
C.4.1 SAR	32
C.4.2 E-Field	32
C.4.3 H-Field	32

C.4.4	<i>Local Power Density</i>	32
C.4.5	<i>Averaged Power Density</i>	33
C.5	TEST RESULTS	34
C.5.1	SAR - 802.11ax – 6.2 GHz – U-NII-5.....	34
C.5.2	SAR - 802.11ax – 6.5 GHz – U-NII-6.....	35
C.5.3	SAR - 802.11ax – 6.7 GHz – U-NII-7.....	36
C.5.4	SAR - 802.11ax – 7.0 GHz – U-NII-8.....	37
C.5.5	PD- 802.11ax – UNII-5, UNII-6, UNII-7, UNII-8	38
C.5.6	<i>Measurement Variability</i>	39
C.5.7	<i>Simultaneous Transmission Evaluation – SAR</i>	40
Annex D.	Test System Plots	41
Annex E.	TSL Dielectric Parameters	54
E.1	HEAD WiFi 6E 6500MHz	54
Annex F.	Calibration Certificates	55
Annex G.	Photographs	56
G.1	TEST SAMPLE	56
G.2	PD TEST POSITIONS.....	57
G.3	SAR TEST POSITION	58
G.4	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY.....	59
G.5	PHANTOM LIQUID LEVEL DURING MEASUREMENTS	60

1. Standards, reference documents and applicable test methods

FCC

1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. Edition October 2019
2. FCC OET KDB 248227 D01 v02r02 - SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
3. FCC OET KDB 447498 D01 v06 -RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.
4. FCC OET KDB 616217 D04 v01r02 - SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.
5. FCC OET KDB 865664 D01 v01r04 - SAR Measurement Requirements for 100 MHz to 6 GHz.
6. FCC OET KDB 865664 D02 v01r02 - RF Exposure Compliance Reporting and Documentation Considerations.
7. IEEE Std 1528-2013 - IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
8. RF Exposure Policies and Procedures: TCB Workshop – October 2020
9. IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
10. SPEAG Application Note – 5G Compliance Testing with DASY6 (5GModule V1.0Beta)

2. General conditions, competences and guarantees

Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.

- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 2°C
Humidity	53.41% ± 10%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200611-04.S12	WLAN and BT, 2x2 PCIe M.2 1216 adapter card	AX210D2W	WFM:BC17B877072C	2020-09-18	
	180001-01.S19	Socket			2018-12-18	
	180000-01.S16	NGFF Extender	PCB00589/PCB00496	ASP00589-1-0025892016-175	2018-12-18	
	170000-01.S15	Laptop	DELL Latitude 6430u	8LGLX1	-	
	-	PCI Cable		-		
	200611-03.S22	Reference Antenna	WRF-BR-PIFA-V3.2	-	2020-07-20	

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® Wi-Fi 6E AX210		
Model Name	AX210D2W		
Software Version	99.3500.51.0-00830		
Driver Version	WLAN 99.0.55.2, BT 21.110.20263.10859		
Prototype / Production	Production		
Host Identification	Engineering sample		
Supported Radios	802.11a/n/ac/ax 6.0GHz (5925.0-7125.0MHz)		
Antenna Information	Transmitter	Main – Chain B	Aux – Chain A
	Manufacturer	Intel	Intel
	Antenna type	PIFA	PIFA
	Part number	na	na
See Annex G for more details on antennas location.			
Simultaneous Transmission Configurations	WLAN 6GHz Main + BT Aux WLAN 6GHz Main + WLAN 6GHz Aux WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux		
Document	Filename 200813_WRF Lab_WiFi 6E_Ref Antenna V3.2- Datasheet_Rev00		Date of receipt 2020-08-13
Additional Information	No WWAN transmitter is considered in this report		
	5.60-5.65 GHz band (TDWR) is supported by the device		
	Band gap is supported by the device		

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.2GHz	5955-6415	13.50
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.5GHz	6435-6515	13.50
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.7GHz	6535-6855	13.50
802.11a/n/ac/ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	7.0GHz	6875-7115	13.50

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit			SISO mode	
Equipment Class	Mode	BW (MHz)	Chain A (dBm)	Chain B (dBm)
U-NII-5	802.11a/n/ac/ax	20/40/80/160	13.50	13.50
U-NII-6	802.11a/n/ac/ax	20/40/80/160	13.50	13.50
U-NII-7	802.11a/n/ac/ax	20/40/80/160	13.50	13.50
U-NII-8	802.11a/n/ac/ax	20/40/80/160	13.50	13.50

6. Remarks and comments

1. The conducted values are obtained by applying the BIOS SAR power values to the AX210D2W Intel module installed in the Engineering sample identified in this report, as requested by the customer
2. Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported SAR [W/kg]	Verdict
802.11a/n/ac/ax	6.2GHz	0.24	P
802.11a/n/ac/ax	6.5GHz	0.29	P
802.11a/n/ac/ax	6.7GHz	0.27	P
802.11a/n/ac/ax	7.0GHz	0.32	P

Standard	Band	Highest Reported P _{Stot} avg [W/m ²] 4cm ²	Verdict
802.11a/n/ac/ax	6.2GHz	2.76	P
802.11a/n/ac/ax	6.5GHz	3.37	P
802.11a/n/ac/ax	6.7GHz	2.98	P
802.11a/n/ac/ax	7.0GHz	3.16	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)	
	DSS	Equipment Class
Body Worn	0.03	0.32
Simultaneous Tx	Sum-SAR:0.64	Sum-SAR: 0.64

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	M.Lefebvre	First Issue
Rev. 01	V. Kaculini	Added a 5 th channel on SAR and PD measurements Added compensation due to uncertainty in PD mode Added epithelial PD estimation from SAR measurements Minor corrections

Annex A. PD Test & System Description

A.1 Power Density Definition

The power density for an electromagnetic field represents the rate of energy transfer per unit area.

The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$\overrightarrow{P_{local}} = \frac{1}{2} \operatorname{Re} (\vec{E} \times \vec{H}^*)$$


Where \vec{E} is the complex electric field peak phasor and \vec{H}^* is the complex conjugate magnetic field peak phasor. This power density is also called "single-point" or "spot power density".

Considering that the FCC's Maximum Permissible Exposure (MPE) limit is applicable on the average power density inside 1cm² area, the single point power densities in the evaluation plane should be averaged inside the 1cm² area.

A.2 SPEAG free space Measurement System

A.2.1 Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

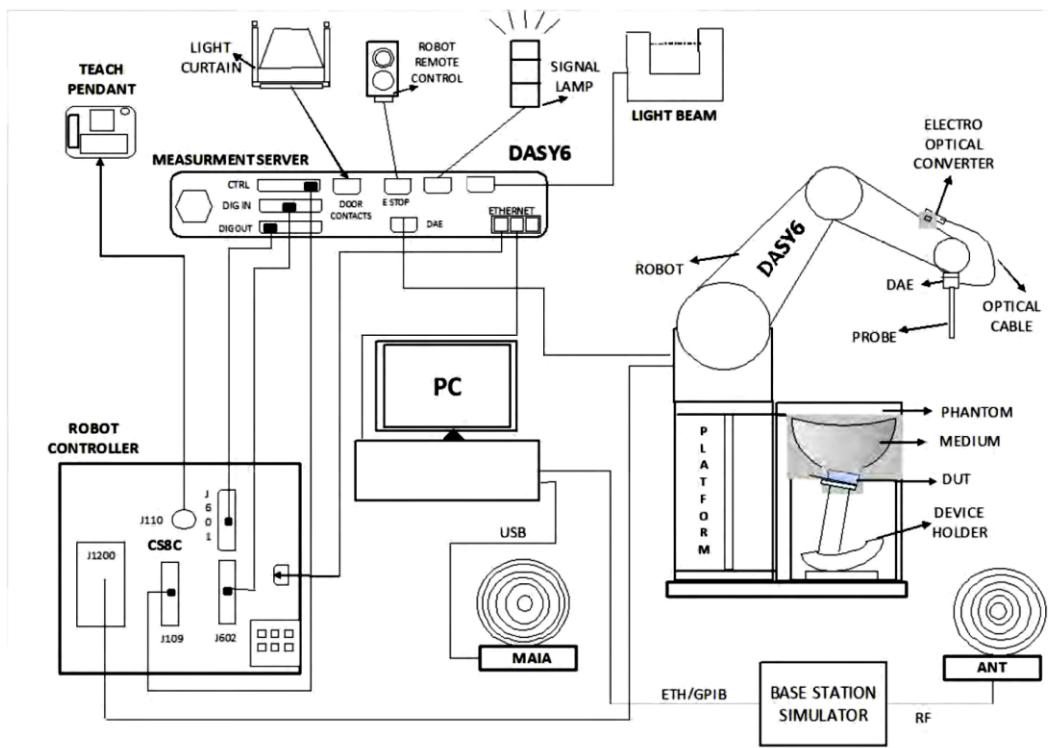

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An mm-wave E-field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the cDASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.


A.2.2 E-Field Measurement Probe

The probe consists of two dipoles (0.8 mm length) optimally arranged with different angles (γ_1 and γ_2) to obtain pseudo-vector information, printed on glass substrate protected by high density foam that allows low perturbation of the measured field.

Three or more measurements are taken for different probe rotational angles, deriving the amplitude and polarization information.

The probe's characteristics are:

Frequency Range	750 MHz – 110 GHz
Length	320 mm
Probe tip external diameter	8 mm
Probe's two dipoles length	0.9mm – Diode loaded
Probe's substrate	Quartz 0.9 x 20 x 0.18mm ($\epsilon_r=3.8$)
Distance between diode sensors and probe's tip	1.5 mm
Axial Isotropy	± 0.6 dB
Maximum operating E-field	3000 V/m
Lower E-field detection threshold	5 V/m @ 60 GHz
Minimum Mechanical separation between probe tip and a Surface	0.5mm
Calibration reference point	Diode Sensor

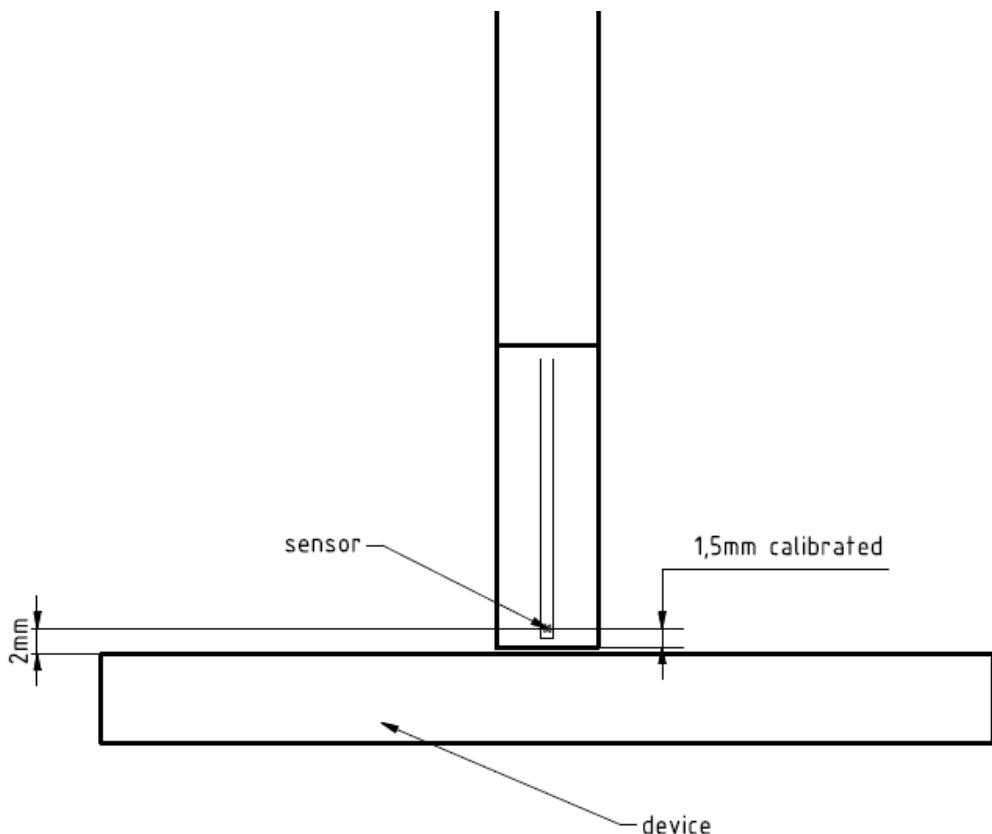

A.2.3 Worst Case Linearization Error

For continuously transmitting signals (100% duty cycle), the worst case linearization error is given by the difference between non linearized voltage and linearized voltage using CW parameters. The error is increasing with the voltage levels. In our particular case, the measured voltages averaged over the signal period are below 1mV. We use 1mV in the below calculation to have the worst case condition. The signal PAR (Peak to Average Ratio) is 6dB and the diode compression point 100mV.

The maximum voltage through the diode is given by:

$$v_{peak} = v_{meas\ avg} \times PAR_{linear}$$

$$v_{peak} = 1 \times 4 = 4 \text{ mV}$$

The linearized voltage using CW parameter is given by:

$$v_{lin\ peak} = v_{peak} + \frac{v_{peak}^2}{diode\ compression\ point}$$

$$v_{lin\ peak} = 4 + \frac{4^2}{100} = 4.16 \text{ mV}$$

The worst case linearization error is:

$$lin\ error = \frac{v_{lin\ peak}}{v_{peak}} = \frac{4.16}{4} = 1.04 = 4\%$$

A.2.4 Data Evaluation

A.2.4.1 Scan

The scan involves the measurement of two planes with three different probe rotations. The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test (DUT) entered by the user. The DUT location settings can be used to offset the center of the grid.

A.2.4.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations.

The reconstruction algorithm developed by the system manufacturer, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as 0.5mm away in the frequency band of 60 GHz.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1 cm².


A.3 System Check

The system performance check verifies that the system operates within its specifications. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal E-field measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated source and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated source must be placed at the correct distance from the E-field probe according to the calibration certificate.



First, the power meter is connected to the output of the signal generator to measure the forward power at the location of the connector to the system check source. The signal generator is adjusted for the desired forward power to match the system check source calibration setup at the connector as read by power meter. Then the power meter is replaced by the system check source.

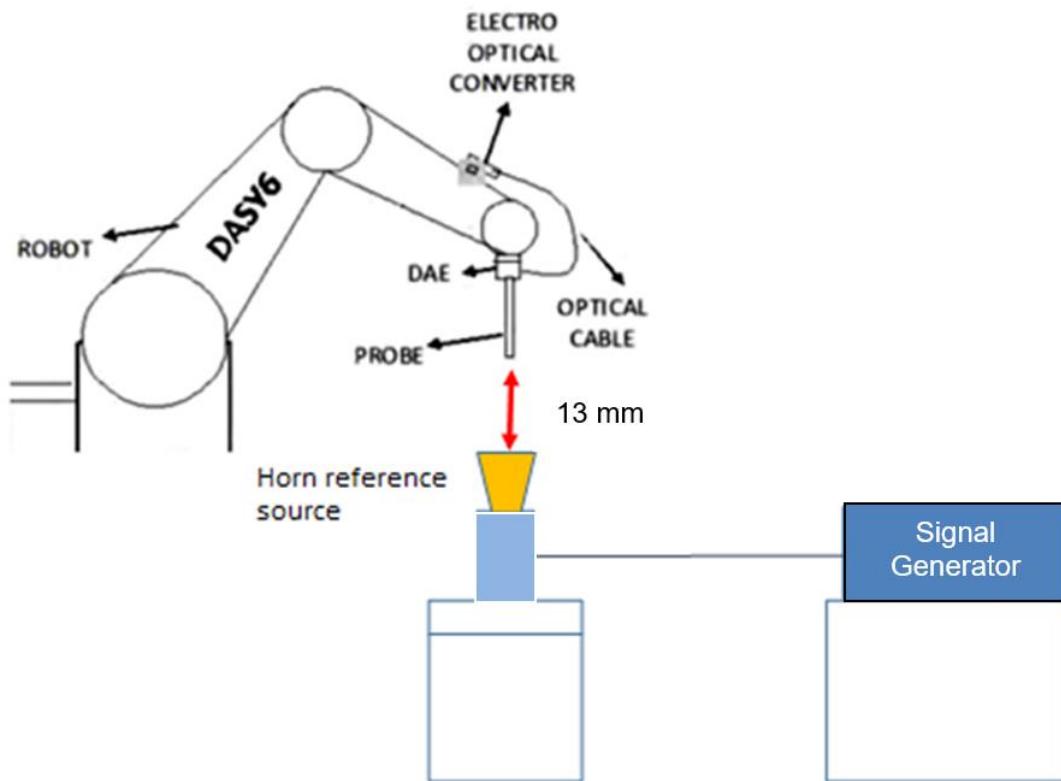

The output power on the reference source is set to 10.0 dBm (10 mW) and the measurement results E, H and Avg PD are compared with the Numerical modeling.

A.4 Test Equipment List

SAR system #3

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0654	E-field mm-Wave Probe	EUmmWV2	9366	SPEAG	2020-05-15	2022-05-15
0628	6-axis Robot	TX60 L	F17/RCB1/A/01	STAÜBLI	n/a	n/a
0631	Robot Remote Control	P/N: SE UMS 032 AA	NA	STAÜBLI	n/a	n/a
0632	Measurement Server	SE UMS 028 BB	1547	SPEAG	n/a	n/a
0633	Electro-Optical Converter	EOC60	1104	SPEAG	n/a	n/a
0635	5G Phantom table professional	Table	NA	SPEAG	n/a	n/a
0636	Light Beam Unit	LB5 / 80	1030	Di-Soric	n/a	n/a
0638	Measurement SW	cDASY6 5G module v2.0.2.34	9-5ED1AC01	SPEAG	n/a	n/a
0657	Data Acquisition Electronics	DAE4	1519	SPEAG	2020-07-17	2022-07-17
0658	5G Phantom	5G	NA	SPEAG	n/a	n/a

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0098	USB Power Sensor	NRP-Z81	102278	R&S	2019-04-02	2021-04-02
0169	Power Amplifier	SAM-01	151918	ETS-Lindgren	n/a	n/a
0412	Coupler	CD0.5-8-20-30	1251-002	Amd-group	n/a	n/a
0414	RF Cable	ST-18/SMAm/SMAm/48	1158830	Huber & Suhner	2020-08-25	2021-02-25
0415	RF Cable	ST-18/SMAm/SMAm/48	1158831	Huber & Suhner	2020-08-25	2021-02-25
0704	Signal Generator	SMW200A	103732	R&S	2020-07-23	2022-07-23
0726	Vector Network Analyzer	ZNB40	101740	R&S	2020-07-10	2022-07-10
0583	Temperature & Humidity Logger	RA32E-TH1-RAS	RA32-F0DEF9	AVTECH	2019-06-09	2021-06-09
0880	Thermometer	TESTO 925	34822881	Testo	2019-11-19	2021-11-19
0590	Horn reference source	PE9859/SF-15	--	Pasternack	NA	NA

A.5 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below:

Uncertainty Budget						
Error Description	Uncertainty Value (\pm dB)	Probability Distribution	Div.	(c_i)	Std. Unc. (\pm dB)	(v_i) v_{eff}
Measurement System						
Probe calibration	0.98	N	1	1	0.98	∞
Hemispherical Isotropy	0.50	R	$\sqrt{3}$	1	0.29	∞
Linearity	0.20	R	$\sqrt{3}$	1	0.12	∞
System Detection Limits	0.04	R	$\sqrt{3}$	1	0.02	∞
Data acquisition	0.03	N	1	1	0.03	∞
Field reconstruction	0.60	R	$\sqrt{3}$	0.3	0.35	∞
Probe Positioning repeatability	0.04	R	$\sqrt{3}$	1	0.02	∞
Probe Positioning offset	0.30	R	$\sqrt{3}$	1	0.17	∞
Test Sample Related						
Power Drift	0.57	R	$\sqrt{3}$	1	0.33	∞
Modulation response	0.40	R	$\sqrt{3}$	1	0.23	
RF Ambient Noise	0.04	R	$\sqrt{3}$	1	0.02	∞
RF Ambient Reflections	0.04	R	$\sqrt{3}$	1	0.02	∞
Combined Std. Uncertainty					1.13	∞
Expanded Std. Uncertainty 95%					2.26	

A.6 RF Exposure Limits

Power density assessments have been made in line with the requirements of FCC 47CFR Part 2.1093, in particular chapter 1.1310 specifying the MPE limits, on the limitation of exposure of the general population / uncontrolled exposure for portable devices

Exposure Type	Power density (S)
Limits for Occupational/Controlled Exposure. 1.5GHz – 100GHz	50.0 W/m²
Limits for General Population/ Uncontrolled Exposure. 1.5GHz – 100GHz	10.0 W/m²

Annex B. SAR Test & System Description

B.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

B.2 SPEAG SAR Measurement System

B.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

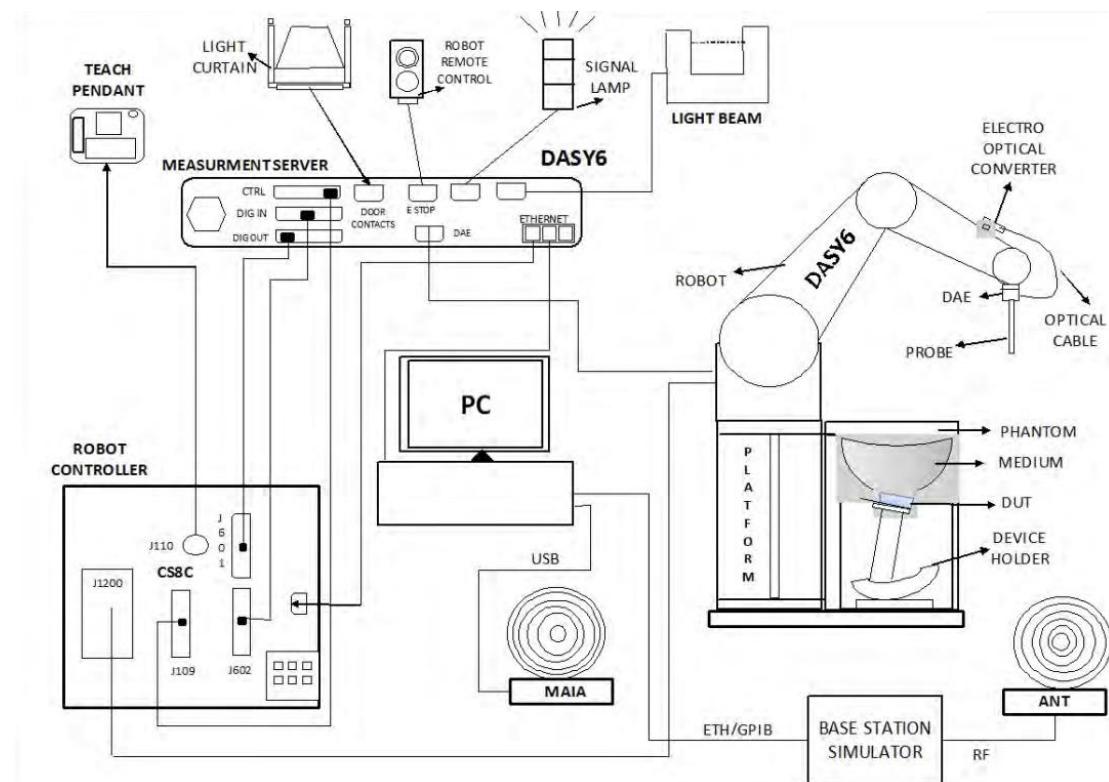

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool

B.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:

Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	± 0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	± 0.5 dB
Linearity	± 0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

B.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	$2 \text{ mm} \pm 0.2 \text{ mm}$
Shell thickness at ERP	$6 \pm 0.2 \text{ mm}$
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm



B.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm \pm 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm



B.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



B.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within ± 30 ° of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than ± 30 °, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


B.4 System and Liquid Check

B.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

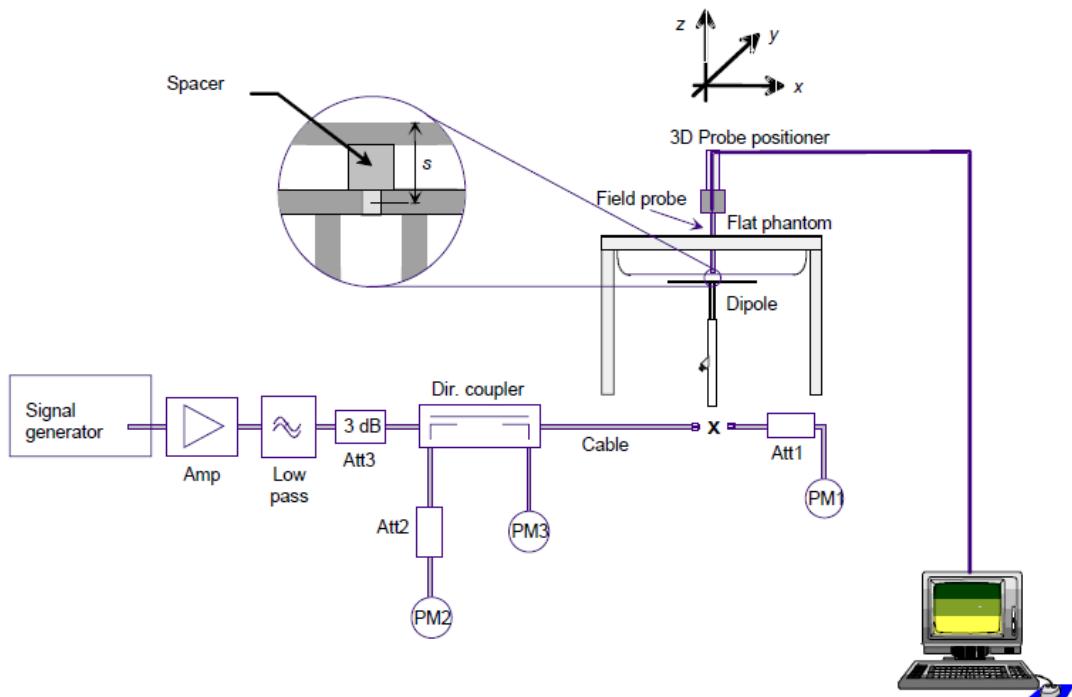

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

B.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000$ kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

B.5 Test Equipment List

SAR system #1

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0218	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	NA	NA
0221	SAM Phantom	Twin SAM v5.0	1838	SPEAG	NA	NA
0223	Measurement SW	DASY6 6.8.0.14623	9-618AE2F1	SPEAG	NA	NA
0229	Light Beam Unit	SE UKS 030 AA	-	Di-soric	NA	NA
0231	6-axis Robot	TX60 L	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
0233	Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
0243	Electro-Optical Converter	EOC60	1076	SPEAG	NA	NA
0637	Oval Flat Phantom	ELI v8.0	2059	SPEAG	NA	NA
0648	Dosimetric E-field Probe	EX3DV4	7465	SPEAG	2020-07-24	2021-07-24
0657	Data Acquisition Electronics	DAE4	1519	SPEAG	2020-07-17	2021-07-17
0660	Measurement Server	DASY6 P/N SE UMS 028 BB	1548	SPEAG	NA	NA

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0098	USB Power Sensor	NRP-Z81	102278	R&S	2019-04-02	2021-04-02
0099	USB Power Sensor	NRP-Z81	102279	R&S	2019-04-02	2021-04-02
0169	Power Amplifier	SAM-01	151918	ETS-Lindgren	n/a	n/a
0224	Liquid measurement SW	DAK-3.5 V2.6.0.5	9-2687B491	SPEAG	n/a	n/a
0237	Dielectric Probe Kit	DAK-3.5	1037	SPEAG	2019-07-16	2021-07-16
0412	Coupler	CD0.5-8-20-30	1251-002	Amd-group	n/a	n/a
0414	RF Cable	ST-18/SMAm/SMAm/48	1158830	Huber & Suhner	2020-08-25	2021-02-25
0415	RF Cable	ST-18/SMAm/SMAm/48	1158831	Huber & Suhner	2020-08-25	2021-02-25
0619	USB Power Sensor	NRP-Z81	104381	R&S	2020-06-03	2022-06-03
0655	Vector Reflectometer	PLANAR R140	0190616	Copper Mountain Technologies	2019-08-07	2021-08-07
0799	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-FBFD5A	AVTECH	2019-06-27	2021-06-27
0880	Thermometer	TESTO 925	34822881	Testo	2019-11-19	2021-11-19
1062	6500MHz System Validation Dipole	D6500V2	1013	SPEAG	2020-09-25	2022-09-25

B.5.1 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG HBBL600-6000V6 Batch 191016-02	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol

B.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SAR System #2

SPEAG DASY6 Uncertainty Budget According to IEEE 1528-2013 and IEC 62209-1/2016 (0.3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±7.00 %	N	1	1	1	±7.00 %	±7.00 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0.0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	N	$\sqrt{3}$	1	0.84	±1.9 %	±1.6 %	∞
Liquid Conductivity (mea.) DAK	±2.5 %	N	$\sqrt{3}$	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	N	$\sqrt{3}$	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.6 %	±11.5 %	
Expanded STD Uncertainty						±23.2%	±23.00 %	

SPEAG DASY6 Uncertainty Budget According to IEC 62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±7.00 %	N	1	1	1	±7.00 %	±7.00 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Post-processing	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scaling	±0.0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±7.6 %	R	$\sqrt{3}$	1	1	±4.4 %	±4.4 %	∞
SAR correction	±1.9 %	N	$\sqrt{3}$	1	0.84	±1.9 %	±1.6 %	∞
Liquid Conductivity (mea.) DAK	±2.5 %	N	$\sqrt{3}$	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	N	$\sqrt{3}$	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.6 %	±11.6 %	605
Expanded STD Uncertainty						±23.3 %	±23.2 %	

B.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex C. Test Results

The herein test results were performed by:

Test case measurement	Test Engineer
Conducted measurement	C. Requin
SAR/PD measurement	M. Lefebvre

C.1 Test Conditions

C.1.1 Test positions relative to the phantom

The device under test was an Intel® Wi-Fi 6E AX210 card inside an extender host platform (Engineering sample) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 99.3500.51.0-00830) and each channel was measured using a broadband power meter to determine the maximum average power.

As per the Interim Procedures for UNII 6-7GHz RF Exposure, explained in *RF Exposure Policies and Procedures: TCB Workshop – October 2020*, the testing has been performed on SAR following IEC/IEEE 62209-1528:2020 and then on Power Density for the highest SAR test configurations.

The testing has been performed on all positions (except back face) in both chains and the four considered bands. U-NII-5, U-NII-6, U-NII-7 and U-NII-8 in SAR mode. The back face position has been tested in power density mode. All the above results show that Front Face is the worst case position compared to the other sides of the antenna, with more than 3dB of difference compared to the other positions. This worst case, in addition with back face position, was tested in Power Density mode for Chain A and Chain B. In both metrics, we have passing results compared to the relative pass/fail criteria

Considering the antenna location diagrams in Annex G and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Chain A	Chain B
Position	<ul style="list-style-type: none"> Front face Back Face Top edge Bottom edge Left edge Right edge 	<ul style="list-style-type: none"> Front face Back Face Top edge Bottom edge Left edge Right edge

See G.2 PD Test positions section for more information on the tested positions

C.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

C.2 Conducted Power Measurements

C.2.1 WLAN 6-7GHz (U-NII)

C.2.1.1 6.2GHz (U-NII-5)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Chain A		Chain B		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
U-NII-5	802.11ax	20	1	5955	NR	5.00	NR	5.00	No
	802.11ax	20	45	6175		5.00		5.00	
	802.11ax	20	93	6415		5.00		5.00	
	802.11a	20	1	5955		5.00		5.00	
	802.11a	20	45	6175		5.00		5.00	
	802.11a	20	93	6415		5.00		5.00	
	802.11n	20	1	5955		5.00		5.00	
	802.11n	20	45	6175		5.00		5.00	
	802.11n	20	93	6415		5.00		5.00	
	802.11ax	40	3	5985		8.00	NR	8.00	No
	802.11ax	40	43	6165		8.00		8.00	
	802.11ax	40	91	6405		8.00		8.00	
	802.11n	40	3	5985		8.00		8.00	
	802.11n	40	43	6165		8.00		8.00	
	802.11n	40	91	6405		8.00		8.00	
	802.11ax	80	7	5985		11.00		11.00	
	802.11ax	80	39	6145		11.00		11.00	
	802.11ax	80	87	6385		11.00		11.00	
	802.11ac	80	7	5985		11.00		11.00	
	802.11ac	80	39	6145		11.00		11.00	
	802.11ac	80	87	6385		11.00		11.00	
	802.11ax	160	15	6025	13.50	13.50	13.50	13.50	Yes
	802.11ax	160	47	6185	13.30	13.50	13.30	13.50	No
	802.11ax	160	79	6345	13.37	13.50	13.42	13.50	Yes
	802.11ac	160	15	6025	NR	13.50	NR	13.50	No
	802.11ac	160	47	6185		13.50		13.50	
	802.11ac	160	79	6345		13.50		13.50	

Initial test configuration

1. NR: Not Required

C.2.1.2 6.5GHz (U-NII-6)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Chain A		Chain B		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
U-NII-6	802.11ax	20	97	6435	NR	5.50	NR	5.50	No
		20	105	6475		5.50		5.50	
		20	113	6515		5.50		5.50	
	802.11a	20	97	6435		5.00		5.00	
		20	105	6475		5.00		5.00	
		20	113	6515		5.00		5.00	
	802.11n	20	97	6435		5.00		5.00	
		20	105	6475		5.00		5.00	
		20	113	6515		5.00		5.00	
	802.11ax	40	99	6445		8.50	NR	8.50	Yes
		40	107	6485		8.50		8.50	
	802.11n	40	99	6445		8.50		8.50	
		40	107	6485		8.50		8.50	
	802.11ax	80	103	6465		11.00		11.00	
		80	119	6545		11.00		11.00	
	802.11ac	80	103	6465		10.50		10.50	
		80	119	6545		10.50		10.50	
	802.11ax	160	111	6505	13.31	13.50	13.46	13.50	No
	802.11ac	160	111	6505	NR	13.50	NR	13.50	Yes

Initial test configuration

1. NR: Not Required

C.2.1.3 6.7GHz (U-NII-7)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Chain A		Chain B		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
U-NII-7	802.11ax	20	117	6535	NR	5.50	NR	5.50	No
		20	149	6695		5.50		5.50	
		20	181	6855		5.50		5.50	
	802.11a	20	117	6535		5.00		5.00	
		20	149	6695		5.00		5.00	
		20	181	6855		5.00		5.00	
	802.11n	20	117	6535		5.00		5.00	
		20	149	6695		5.00		5.00	
		20	181	6855		5.00		5.00	
	802.11ax	40	115	6525		8.50	NR	8.50	Yes
		40	147	6685		8.50		8.50	
		40	179	6845		8.50		8.50	
	802.11n	40	115	6525		8.50		8.50	
		40	147	6685		8.50		8.50	
		40	179	6845		8.50		8.50	
	802.11ax	80	135	6625		11.00		11.00	
		80	151	6705		11.00		11.00	
		80	167	6785		11.00		11.00	
	802.11ac	80	135	6625		11.00		11.00	
		80	151	6705		11.00		11.00	
		80	167	6785		11.00		11.00	
	802.11ax	160	143	6665	13.44	13.50	13.44	13.50	Yes
		160	175	6825	13.40	13.50	13.40	13.50	No
	802.11ac	160	143	6665	NR	13.50	NR	13.50	No
		160	175	6825		13.50		13.50	

Initial test configuration

1. NR: Not Required

C.2.1.4 7.0GHz (U-NII-8)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Chain A		Chain B		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
U-NII-8	802.11ax	20	185	6875	NR	5.50	NR	5.50	No
		20	209	6995		5.50		5.50	
		20	233	7115		5.50		5.50	
	802.11a	20	185	6875		5.00	NR	5.00	
		20	209	6995		5.00		5.00	
		20	233	7115		5.00		5.00	
	802.11n	20	185	6875		5.00	NR	5.00	
		20	209	6995		5.00		5.00	
		20	233	7115		5.00		5.00	
	802.11ax	40	187	6885		8.50	NR	8.50	Yes
		40	227	7085		8.50		8.50	
	802.11n	40	187	6885		8.50	NR	8.50	
		40	227	7085		8.50		8.50	
	802.11ax	80	183	6865		11.00	NR	11.00	
		80	199	6945		11.00		11.00	
		80	215	7025		11.00		11.00	
	802.11ac	80	183	6865		10.50	NR	10.50	
		80	199	6945		10.50		10.50	
		80	215	7025		10.50		10.50	
	802.11ax	160	207	6985	13.41	13.50	13.36	13.50	Yes
	802.11ac	160	207	6985	NR	13.50	NR	13.50	No

Initial test configuration

1. NR: Not Required

C.3 Tissue Parameters Measurement

Head TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
6500.0	34.46	6.07	31.97	5.98	-7.22	-1.48	2020-10-22

See Annex E for more details.

C.4 System Check Measurements

C.4.1 SAR

Head Measurements

Frequency (MHz)	Average	Target SAR (W/Kg)	Measured SAR (W/Kg)	Deviation to target (%)	Limit (%)	Date
6500	1g	291.00	293.41	0.83	± 10	2020-10-22
	10g	53.80	54.78	1.82		

C.4.2 E-Field

Frequency	Signal Type	Target E-field (V/m)	Measured E-field (V/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	61.33	62.73	2.23	2020-10-22

The E-fields presented in the System Check Measurements table are Peak values. The target E-field value is obtained by simulation. The maximum target E-field value at 13 mm with 10 dBm (10 mW) source power is 61.54 V/m. The maximum measured E-field value at 13 mm with 10 dBm (10 mW) is 61.50 V/m.

C.4.3 H-Field

Frequency	Signal Type	Target H-field (A/m)	Measured H-field (A/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	0.17	0.17	0.00	2020-10-22

The H-fields presented in the System Check Measurements table are Peak values. The target H-field value is obtained by simulation. The maximum target E-field value at 13 mm with 10 dBm (10 mW) source power is 0.18 A/m. The maximum measured E-field value at 13 mm with 10 dBm (10 mW) is 0.17 A/m.

C.4.4 Local Power Density

Frequency	Signal Type	Target Local Power Density (W/m ²)	Measured Local Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	5.28	5.37	1.68	2020-10-22

The Local Power Density presented in the System Check Measurements table are Peak values. The target Local Power Density value is obtained by simulation. The maximum target Local Power Density value at 13 mm with 10 dBm (10 mW) source power is 5.49 W/m². The maximum measured E-field value at 13 mm with 10 dBm (10 mW) is 5.18 W/m².

C.4.5 Averaged Power Density

Frequency	Signal Type	Target Spatially Averaged Power Density (W/m ²)	Measured Spatially Averaged Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	5.12	4.88	4.69	2020-10-22

The Spatially Averaged Power Density presented in the System Check Measurements table are Peak values. The target Spatially Averaged Power Density value is obtained by simulation. The maximum target Spatially Averaged Power Density value at 13 mm with 10 dBm (10 mW) source power is 5.21 W/m². The maximum measured Spatially Averaged Power Density value at 13 mm with 10 dBm (10 mW) is 4.65 W/m².

See *Annex D* for more details.

C.5 Test Results

C.5.1 SAR - 802.11ax – 6.2 GHz – U-NII-5

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)		SAR 10g (W/kg)	*Estimated epithelial PD (W/m ²)		Plot #
							Measured	Reported	Measured	1cm ²	4cm ²	
Chain A	802.11ax	160	15	6025	Front face	0.00	0.21	0.21	0.08	2.07	2.09	
					Top edge	0.00	0.05	0.05	0.02	0.54	0.43	
					Bottom Edge	0.00	0.02	0.02	0.01	0.19	0.18	
					Left edge	0.00	0.06	0.06	0.02	0.58	0.55	
					Right edge	0.00	0.00	0.00	0.00	0.01	0.02	
	802.11ax	160	79	6345	Front face	0.13	0.23	0.24	0.10	2.29	2.38	
					Top edge	0.13	0.06	0.06	0.03	0.56	0.64	
					Bottom Edge	0.13	0.03	0.03	0.01	0.26	0.30	
					Left edge	0.13	0.06	0.07	0.03	0.63	0.65	
					Right edge	0.13	0.01	0.01	0.01	0.12	0.12	
Chain B	802.11ax	160	15	6025	Front face	0.00	0.22	0.22	0.09	2.23	2.25	
					Top edge	0.00	0.03	0.03	0.01	0.33	0.34	
					Bottom Edge	0.00	0.02	0.02	0.01	0.17	0.14	
					Left edge	0.00	0.06	0.06	0.01	0.62	0.33	
					Right edge	0.00	0.01	0.01	0.00	0.11	0.10	
	802.11ax	160	79	6345	Front face	0.08	0.23	0.24	0.10	2.31	2.50	1
					Top edge	0.08	0.05	0.06	0.02	0.54	0.60	
					Bottom Edge	0.08	0.02	0.02	0.01	0.23	0.24	
					Left edge	0.08	0.06	0.06	0.03	0.60	0.63	
					Right edge	0.08	0.01	0.01	0.01	0.10	0.13	

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.2 SAR - 802.11ax – 6.5 GHz – U-NII-6

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)		SAR 10g (W/kg)	*Estimated epithelial PD (W/m ²)		Plot #
							Measured	Reported	Measured	1cm ²	4cm ²	
Chain A	802.11ax	160	111	6505	Front face	0.19	0.23	0.24	0.10	2.32	2.43	
					Top edge	0.19	0.05	0.05	0.02	0.52	0.61	
					Bottom edge	0.19	0.03	0.03	0.01	0.29	0.31	
					Left edge	0.19	0.06	0.06	0.02	0.58	0.59	
					Right edge	0.19	0.02	0.02	0.01	0.16	0.17	
Chain B	802.11ax	160	111	6505	Front face	0.04	0.29	0.29	0.13	2.86	3.16	2
					Top edge	0.04	0.06	0.06	0.03	0.59	0.63	
					Bottom edge	0.04	0.04	0.04	0.02	0.38	0.40	
					Left edge	0.04	0.06	0.06	0.03	0.59	0.63	
					Right edge	0.04	0.02	0.02	0.01	0.16	0.19	

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.3 SAR - 802.11ax – 6.7 GHz – U-NII-7

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)		SAR 10g (W/kg)	*Estimated epithelial PD (W/m ²)	Plot #	
							Measured	Reported	Measured	1cm ²	4cm ²	
Chain A	802.11ax	160	143	6665	Front face	0.06	0.26	0.27	0.11	2.63	2.66	3
					Top edge	0.06	0.04	0.05	0.02	0.45	0.51	
					Bottom edge	0.06	0.03	0.03	0.02	0.33	0.38	
					Left edge	0.06	0.06	0.06	0.03	0.61	0.64	
					Right edge	0.06	0.02	0.02	0.01	0.22	0.27	
Chain B	802.11ax	160	143	6665	Front face	0.06	0.24	0.24	0.10	2.38	2.53	
					Top edge	0.06	0.06	0.06	0.03	0.57	0.65	
					Bottom edge	0.06	0.04	0.04	0.02	0.38	0.42	
					Left edge	0.06	0.06	0.06	0.02	0.58	0.58	
					Right edge	0.06	0.02	0.02	0.01	0.22	0.21	

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.4 SAR - 802.11ax – 7.0 GHz – U-NII-8

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)		SAR 10g (W/kg)	*Estimated epithelial PD (W/m ²)	Plot #	
							Measure d	Reporte d	Measu red	1cm ²		
Chain A	802.11ax	160	207	6985	Front face	0.09	0.31	0.32	0.12	3.12	2.92	4
					Top edge	0.09	0.10	0.10	0.04	1.01	1.09	
					Bottom edge	0.09	0.04	0.04	0.02	0.41	0.42	
					Left edge	0.09	0.07	0.07	0.03	0.73	0.74	
					Right edge	0.09	0.02	0.02	0.01	0.22	0.24	
Chain B	802.11ax	160	207	6985	Front face	0.14	0.27	0.28	0.11	2.74	2.68	
					Top edge	0.14	0.09	0.10	0.04	0.93	1.01	
					Bottom edge	0.14	0.05	0.05	0.02	0.49	0.47	
					Left edge	0.14	0.05	0.05	0.02	0.51	0.51	
					Right edge	0.14	0.02	0.02	0.01	0.23	0.27	

C.5.5 PD- 802.11ax – UNII-5, UNII-6, UNII-7, UNII-8

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	*Uncertainty Cor. Factor (dB)	PStot avg [W/m ²] 1cm ²	**C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Chain A	802.11ax	160	15	6025	Front face	1.12	2.20	2.85	1.89	2.45	46.80	0.14	
					Back face	1.12	0.24	0.31	0.23	0.30	18.30	0.05	
			79	6345	Front face	1.12	2.67	3.46	2.13	2.76	52.30	0.13	5
					Back Face	1.12	0.43	0.56	0.39	0.51	21.40	0.07	
			111	6505	Front face	1.12	2.36	3.05	2.20	2.85	51.50	0.12	
					Back Face	1.12	0.60	0.78	0.56	0.73	23.30	0.06	
			143	6665	Front face	1.12	2.46	3.18	2.30	2.98	48.20	0.13	7
					Back Face	1.12	0.46	0.60	0.42	0.54	26.40	0.08	
			207	6985	Front face	1.12	2.27	2.94	2.03	2.63	49.50	0.12	
					Back Face	1.12	0.32	0.41	0.27	0.35	23.30	0.07	
Chain B	802.11ax	160	15	6025	Front face	1.12	2.48	3.21	2.05	2.65	53.00	0.14	
					Back face	1.12	0.53	0.67	0.48	0.62	22.00	0.07	
			79	6345	Front face	1.12	2.29	2.96	2.06	2.67	51.50	0.12	
					Back Face	1.12	0.43	0.56	0.38	0.49	22.40	0.06	
			111	6505	Front face	1.12	2.85	3.69	2.60	3.37	53.80	0.14	6
					Back Face	1.12	0.35	0.45	0.33	0.43	24.00	0.07	
			143	6665	Front face	1.12	1.74	2.25	1.60	2.07	40.50	0.10	
					Back Face	1.12	0.52	0.67	0.46	0.60	22.60	0.07	
			207	6985	Front face	1.12	2.73	3.53	2.44	3.16	49.60	0.13	8
					Back Face	1.12	0.57	0.74	0.42	0.54	23.40	0.08	

* The correction factor uncertainty in dB corresponds to the difference between the actual uncertainty and the 30% target value, as specified in the TCB Workshop Oct 20

**C-PStot = Compensated PStot

C.5.6 Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band/mode.

As all measured values are under both limits, no variability is required

C.5.7 Simultaneous Transmission Evaluation – SAR

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/Kg)	
		WLAN 6.5GHz	Bluetooth*
Chain A	Front face	0.32	0.03
	Top edge	0.10	0.01
	Bottom edge	0.04	0.00
	Left edge	0.07	0.02
	Right edge	0.02	0.01
Chain B	Front face	0.29	
	Top edge	0.10	
	Bottom edge	0.05	
	Left edge	0.06	
	Right edge	0.02	

* For Bluetooth values refer to the legacy report
200611-04.TR07 - FCC-ISED, WLAN Generic SKU, AX210D2W

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/kg)	Limit (W/kg)
	Chain A	Chain B		
Front Face	WLAN 6.5GHz	WLAN 6.5GHz	0.61	1.6
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.64	
	BT	WLAN 6.5GHz	0.32	
Top edge	WLAN 6.5GHz	WLAN 6.5GHz	0.20	
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.21	
	BT	WLAN 6.5GHz	0.11	
Bottom edge	WLAN 6.5GHz	WLAN 6.5GHz	0.09	
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.09	
	BT	WLAN 6.5GHz	0.05	
Left edge	WLAN 6.5GHz	WLAN 6.5GHz	0.13	
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.15	
	BT	WLAN 6.5GHz	0.08	
Right edge	WLAN 6.5GHz	WLAN 6.5GHz	0.04	
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.05	
	BT	WLAN 6.5GHz	0.03	

Considering the results described above and according to the simultaneous transmission SAR test exclusion considerations described in FCC OET KDB 447498 D01, no SAR to Peak Location Separation Ratio is required.

Annex D. Test System Plots

1. U-NII-5 - 802.11ax, CH79, Chain B – Position Front face (SAR)	42
2. U-NII-6 - 802.11ax, CH111, Chain B – Position Front face (SAR)	43
3. U-NII-7 - 802.11ax, CH143, Chain A – Position Front face (SAR)	44
4. U-NII-8 - 802.11ax, CH207, Chain A – Position Front face (SAR)	45
5. U-NII-5 - 802.11ax, CH79, Chain A – Position Front face (PD)	46
6. U-NII-6 - 802.11ax, CH111, Chain B – Position Front face (PD)	47
7. U-NII-7 - 802.11ax, CH143, Chain A – Position Front face (PD)	48
8. U-NII-8 - 802.11ax, CH207, Chain B – Position Front face (PD)	49
9. Power Density System Check From 6500MHz	50
10. SAR System Check From 6500MHz	53

1. U-NII-5 - 802.11ax, CH79, Chain B – Position Front face (SAR)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
AX201D2W, Intel	52.0 x 86.0 x 8.0	BC:17:B8:77:07:2C	Module+ PIFA Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 17.00	Custom Band	CW, 10456-AAB	6345.0, 6345000	5.5	5.75	32.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2020-Oct-22	EX3DV4 - SN7465, 2020-07-24	DAE4 Sn1519, 2020-07-17

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	153.0 x 153.0	22.0 x 22.0 x 22.0	Date 2020-10-22, 11:23
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/Kg] 0.188
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg] 0.075
Graded Grid	No	Yes	Power Drift [dB] -0.01
Grading Ratio	n/a	1.4	Power Scaling Factor Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] Positive Only
			52.0
			12.6

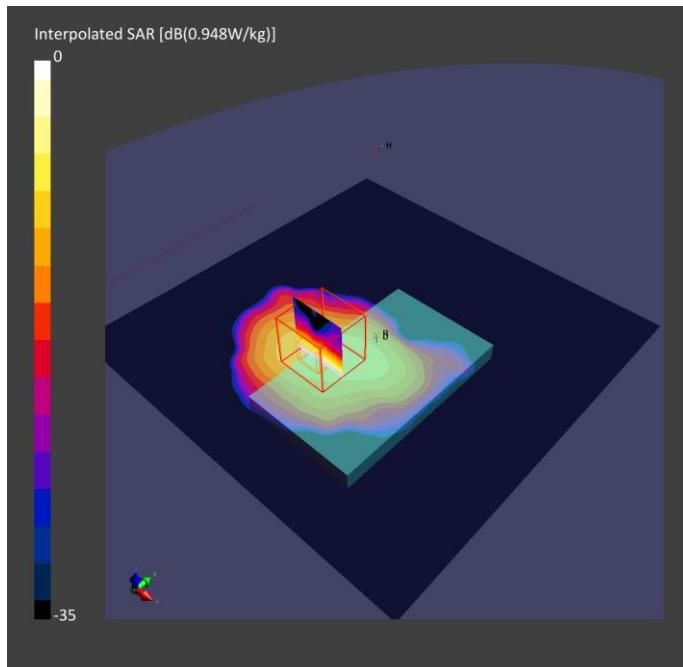

2. U-NII-6 - 802.11ax, CH111, Chain B – Position Front face (SAR)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
AX201D2W, Intel	52.0 x 86.0 x 8.0	BC:17:B8:77:07:2C	Module+ PIFA Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 17.00	Custom Band	CW, 10456-AAB	6505.0, 6505000	5.5	5.99	32.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2020-Oct-22	EX3DV4 - SN7465, 2020-07-24	DAE4 Sn1519, 2020-07-17

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	153.0 x 153.0	22.0 x 22.0 x 22.0	Date 2020-10-22, 14:08
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/Kg] 0.251
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg] 0.109
Graded Grid	No	Yes	Power Drift [dB] -0.03
Grading Ratio	n/a	1.4	Power Scaling Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] Positive Only
			51.0
			> 11.0

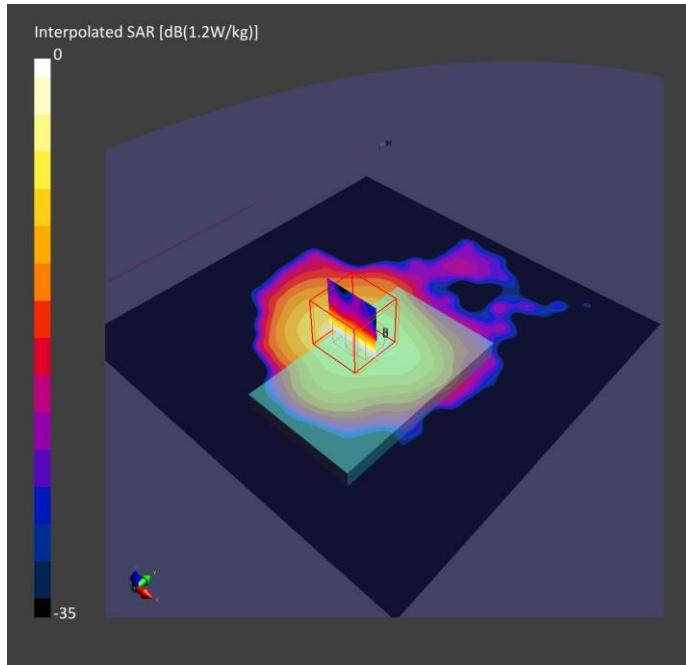

3. U-NII-7 - 802.11ax, CH143, Chain A – Position Front face (SAR)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
AX201D2W, Intel	52.0 x 86.0 x 8.0	BC:17:B8:77:07:2C	Module+ PIFA Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 17.00	Custom Band	CW, 10456-AAB	6665.0, 6665000	5.5	6.17	31.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2020-Oct-22	EX3DV4 - SN7465, 2020-07-24	DAE4 Sn1519, 2020-07-17

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	153.0 x 153.0	22.0 x 22.0 x 22.0	Date 2020-10-22, 12:11
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/Kg] 0.224
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg] 0.090
Graded Grid	No	Yes	Power Drift [dB] 0.02
Grading Ratio	n/a	1.4	Power Scaling Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] Positive Only
			50.2
			11.4

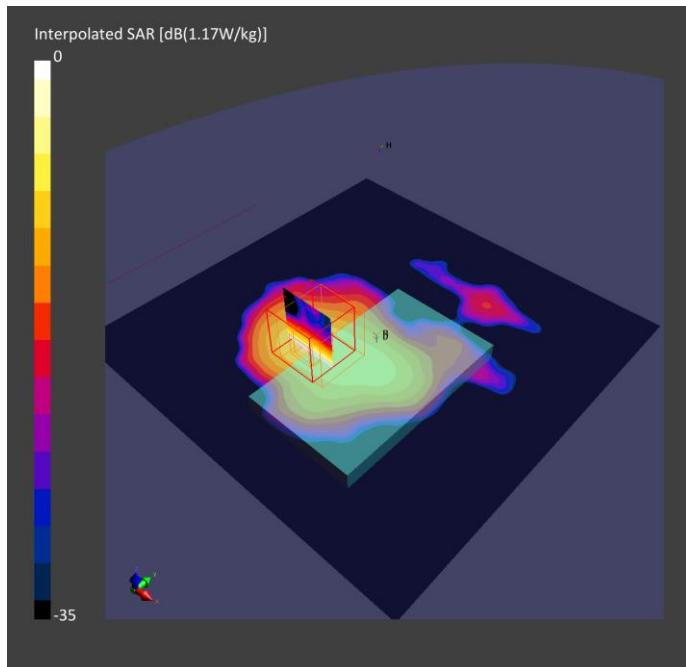

4. U-NII-8 - 802.11ax, CH207, Chain A – Position Front face (SAR)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
AX201D2W, Intel	52.0 x 86.0 x 8.0	BC:17:B8:77:07:2C	Module+ PIFA Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 17.00	Custom Band	CW, 10456-AAB	6985.0, 6985000	5.5	6.50	31.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2020-Oct-22	EX3DV4 - SN7465, 2020-07-24	DAE4 Sn1519, 2020-07-17

Scan Setup

	Area Scan	Zoom Scan	Measurement Results
Grid Extents [mm]	153.0 x 153.0	22.0 x 22.0 x 22.0	Date 2020-10-22, 13:27
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/Kg] 0.270
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg] 0.100
Graded Grid	No	Yes	Power Drift [dB] 0.05
Grading Ratio	n/a	1.4	Power Scaling Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction
Scan Method	Measured	Measured	M2/M1 [%] Positive Only
			Dist 3dB Peak [mm] Positive Only
			47.5
			11.2

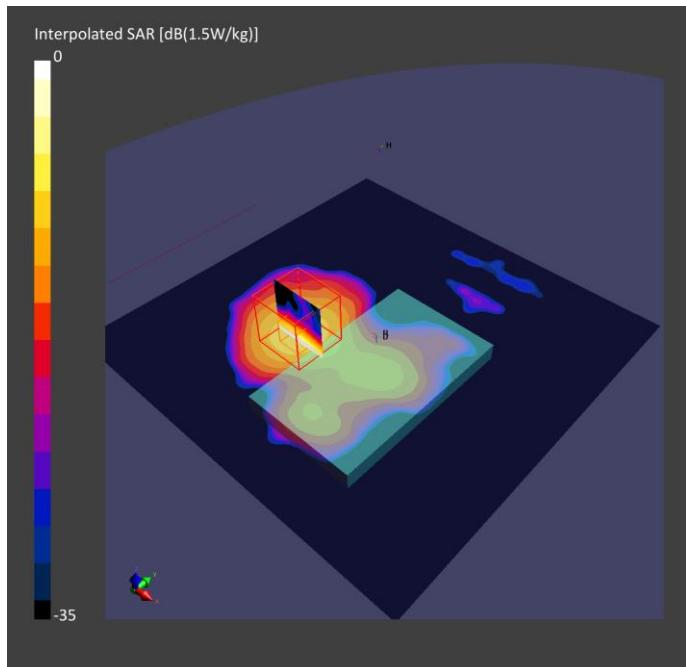

5. U-NII-5 - 802.11ax, CH79, Chain A – Position Front face (PD)

DUT: AX201D2W Module + PIFA Antenna; Type: WRF-BR-PIFA-V3.2;

Signal Source: modulation Custom Channel for 802.11ax, level 13.5 dBm.

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW - SN9366; ConvF(1, 1, 1); Calibrated: 2020-05-15;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), z = 13 mm
- Electronics: DAE4 Sn1519; Calibrated: 2020-07-17
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.0.2.34;

Distance-17mm/Measure PIFA Antenna (88.0x54.0):

Measurement Resolution = $\lambda/4$ mm

Measurement Scan area = 180 mm x 160 mm

The plots below show the average PStot (1cm²), PStot (4cm²), the E-field, H Field.

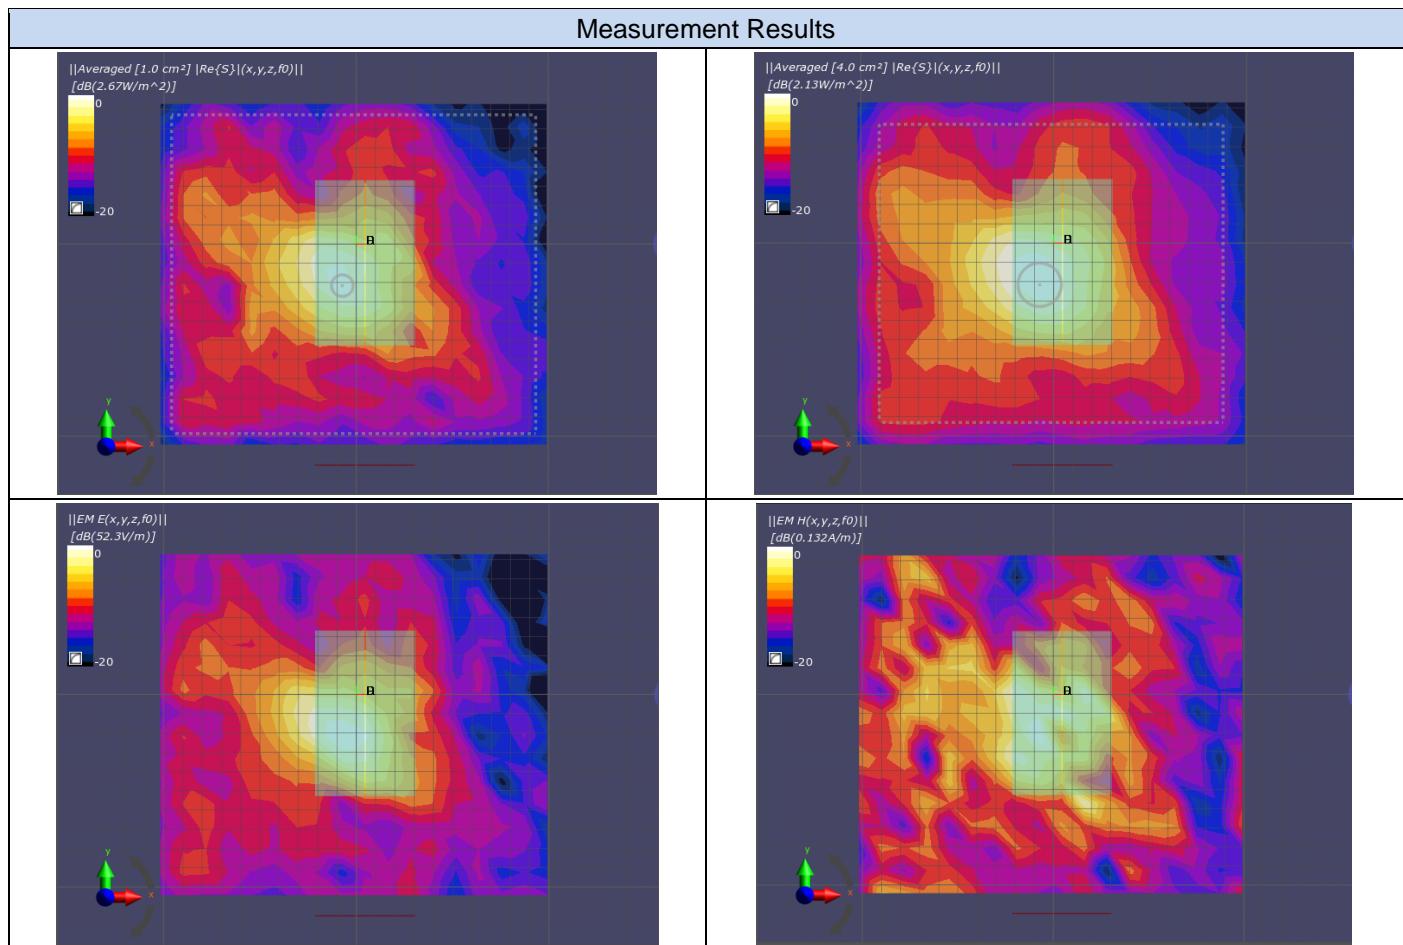

6. U-NII-6 - 802.11ax, CH111, Chain B – Position Front face (PD)

DUT: AX201D2W Module + PIFA Antenna; Type: WRF-BR-PIFA-V3.2;

Signal Source: modulation Custom Channel for 802.11ax, level 13.5 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW - SN9366; ConvF(1, 1, 1); Calibrated: 2020-05-15;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 13 \text{ mm}$
- Electronics: DAE4 Sn1519; Calibrated: 2020-07-17
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.0.2.34;

Distance-17mm/Measure PIFA Antenna (88.0x54.0):

Measurement Resolution = $\lambda/4 \text{ mm}$

Measurement Scan area = 180 mm x 160 mm

The plots below show the average PStot (1cm^2), PStot (4cm^2), the E-field, H Field.

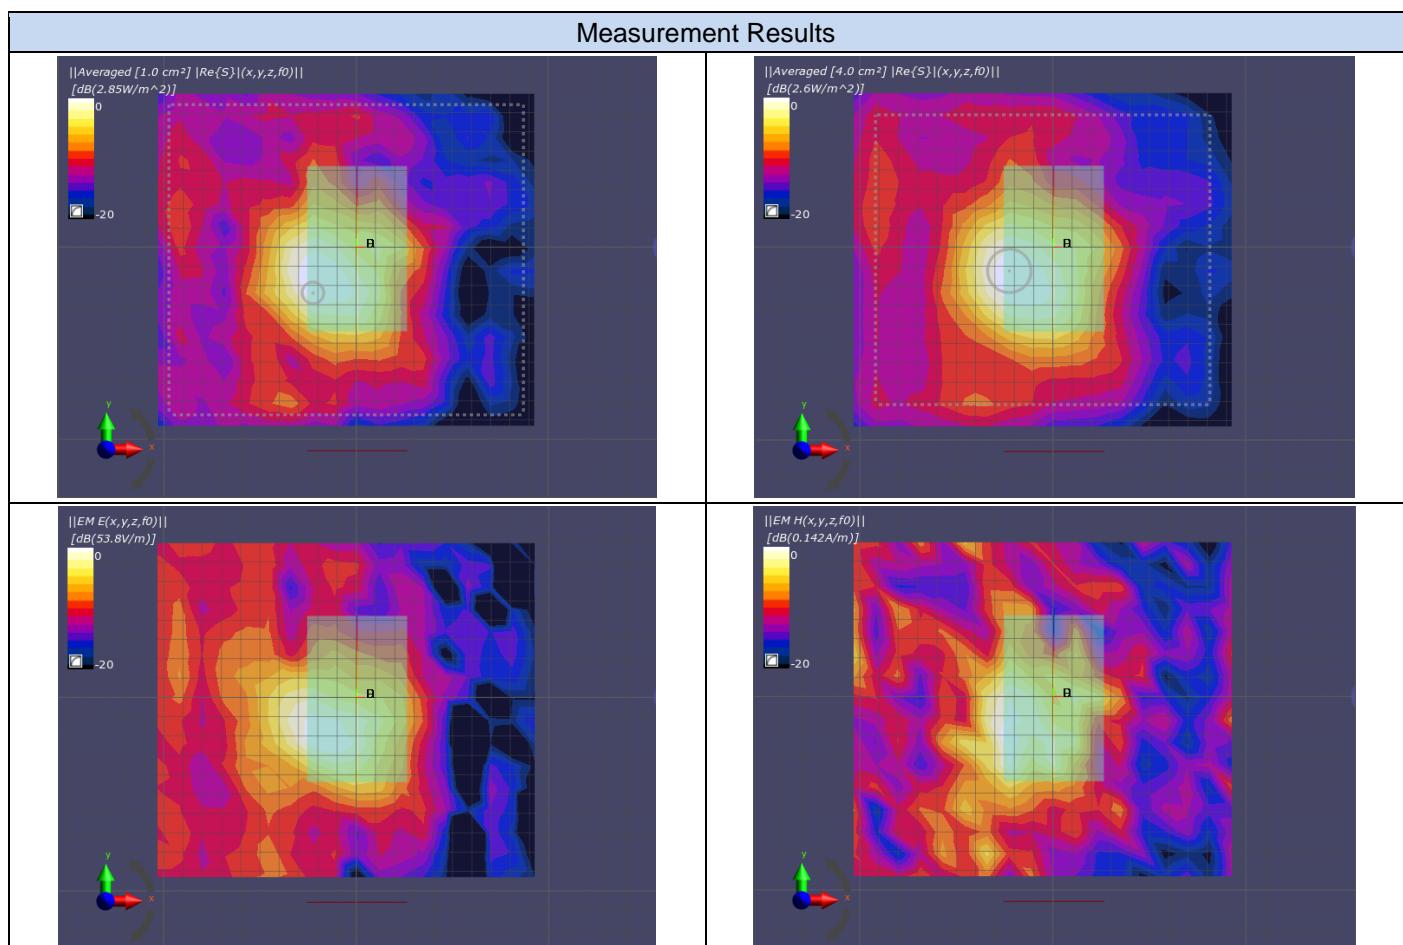

7. U-NII-7 - 802.11ax, CH143, Chain A – Position Front face (PD)

DUT: AX201D2W Module + PIFA Antenna; Type: WRF-BR-PIFA-V3.2;

Signal Source: modulation Custom Channel for 802.11ax, level 13.5 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW - SN9366; ConvF(1, 1, 1); Calibrated: 2020-05-15;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 13 \text{ mm}$
- Electronics: DAE4 Sn1519; Calibrated: 2020-07-17
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.0.2.34;

Distance-17mm/Measure PIFA Antenna (88.0x54.0):

Measurement Resolution = $\lambda/4 \text{ mm}$

Measurement Scan area = 180 mm x 160 mm

The plots below show the average PStat (1cm²), PStat (4cm²), the E-field, H Field.

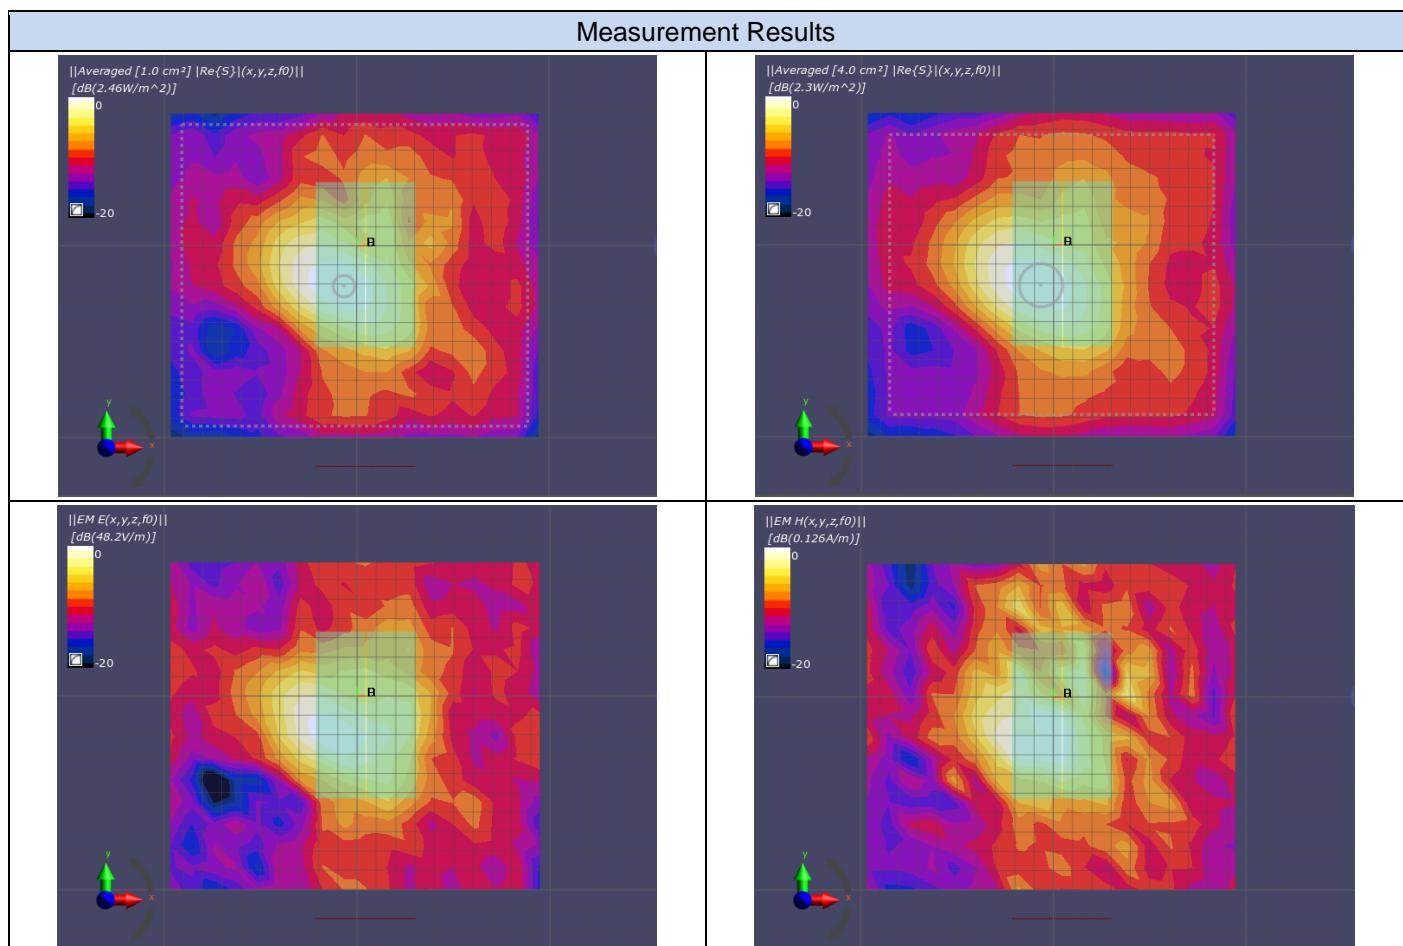

8. U-NII-8 - 802.11ax, CH207, Chain B – Position Front face (PD)

DUT: AX201D2W Module + PIFA Antenna; Type: WRF-BR-PIFA-V3.2;

Signal Source: modulation Custom Channel for 802.11ax, level 13.5 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW - SN9366; ConvF(1, 1, 1); Calibrated: 2020-05-15;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 13 \text{ mm}$
- Electronics: DAE4 Sn1519; Calibrated: 2020-07-17
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.0.2.34;

Distance-17mm/Measure PIFA Antenna (88.0x54.0):

Measurement Resolution = $\lambda/4 \text{ mm}$

Measurement Scan area = 180 mm x 160 mm

The plots below show the average PStot (1cm²), PStot (4cm²), the E-field, H Field.

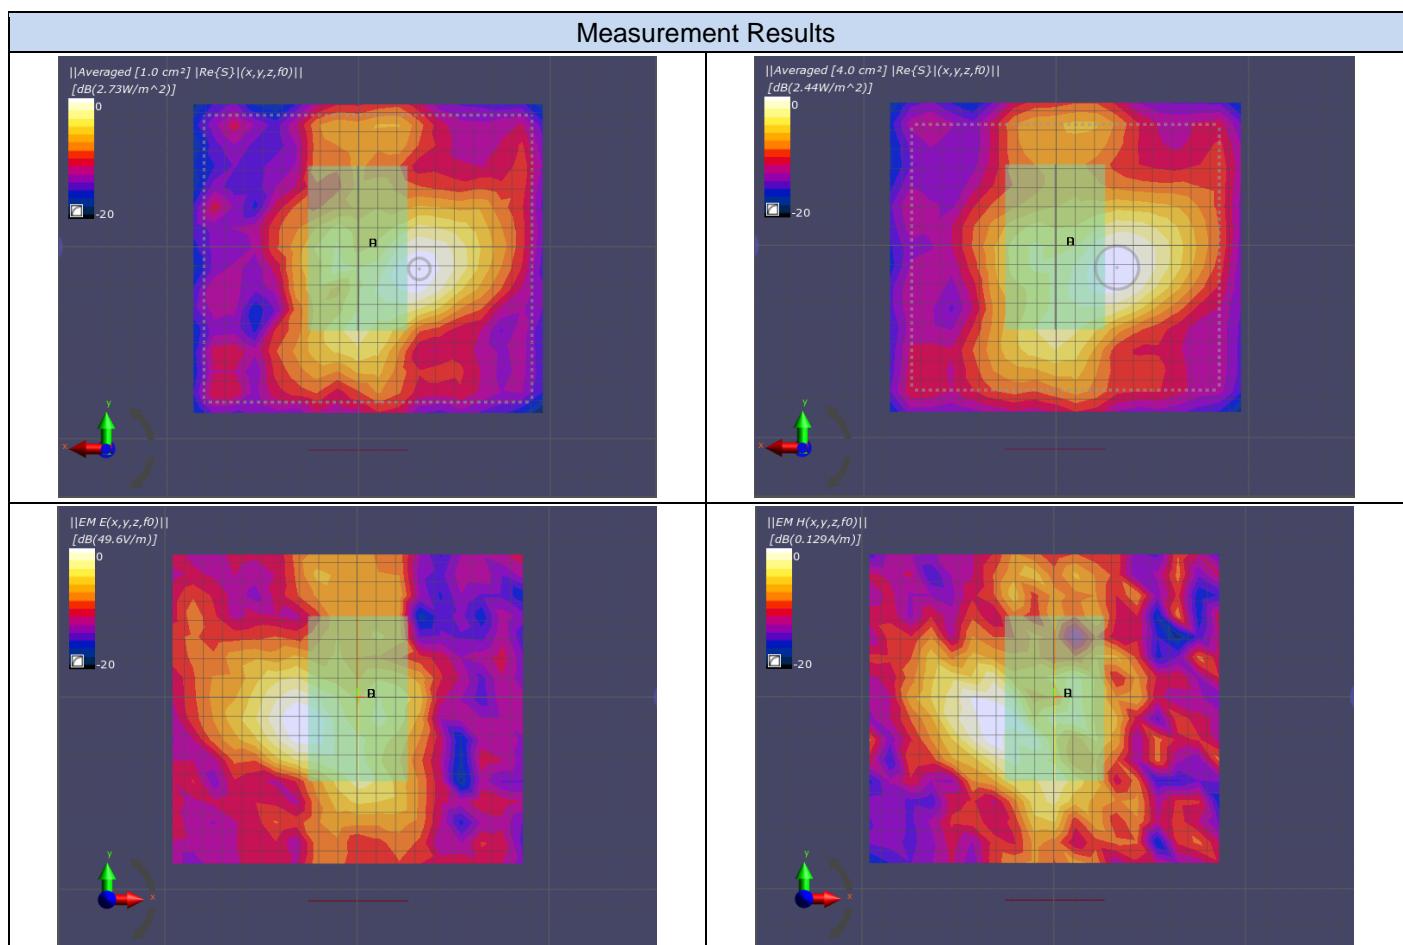

9. Power Density System Check From 6500MHz

DUT: Horn reference source; Type: PE9859/SF-15;

Signal Source: modulation CW, level 10 dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW - SN9366; ConvF(1, 1, 1); Calibrated: 2020-05-15;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 13 \text{ mm}$
- Electronics: DAE4 Sn1519; Calibrated: 2020-07-17
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v2.0.2.34;


Distance-17mm/Measure Horn reference source (86.9x63.5):

Measurement Resolution = $\lambda/4 \text{ mm}$







Measurement Scan area = 180 mm x 160 mm

The plots below show the comparison between the Numerical Modeling results and the system check measurement results in terms of E-field, H Field, single point power density and Avg Power density 1cm².

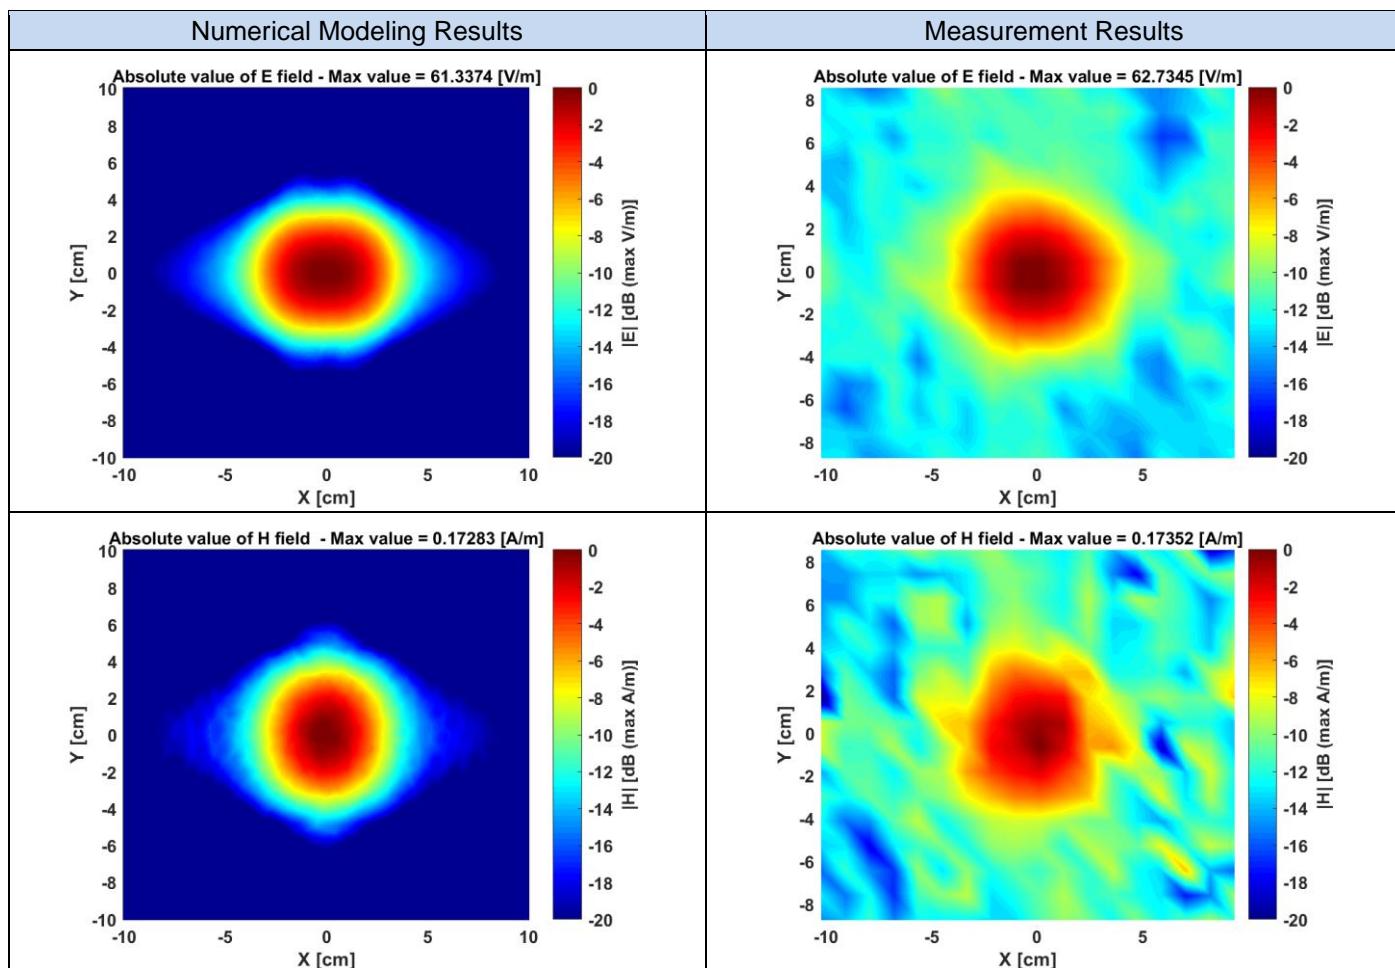

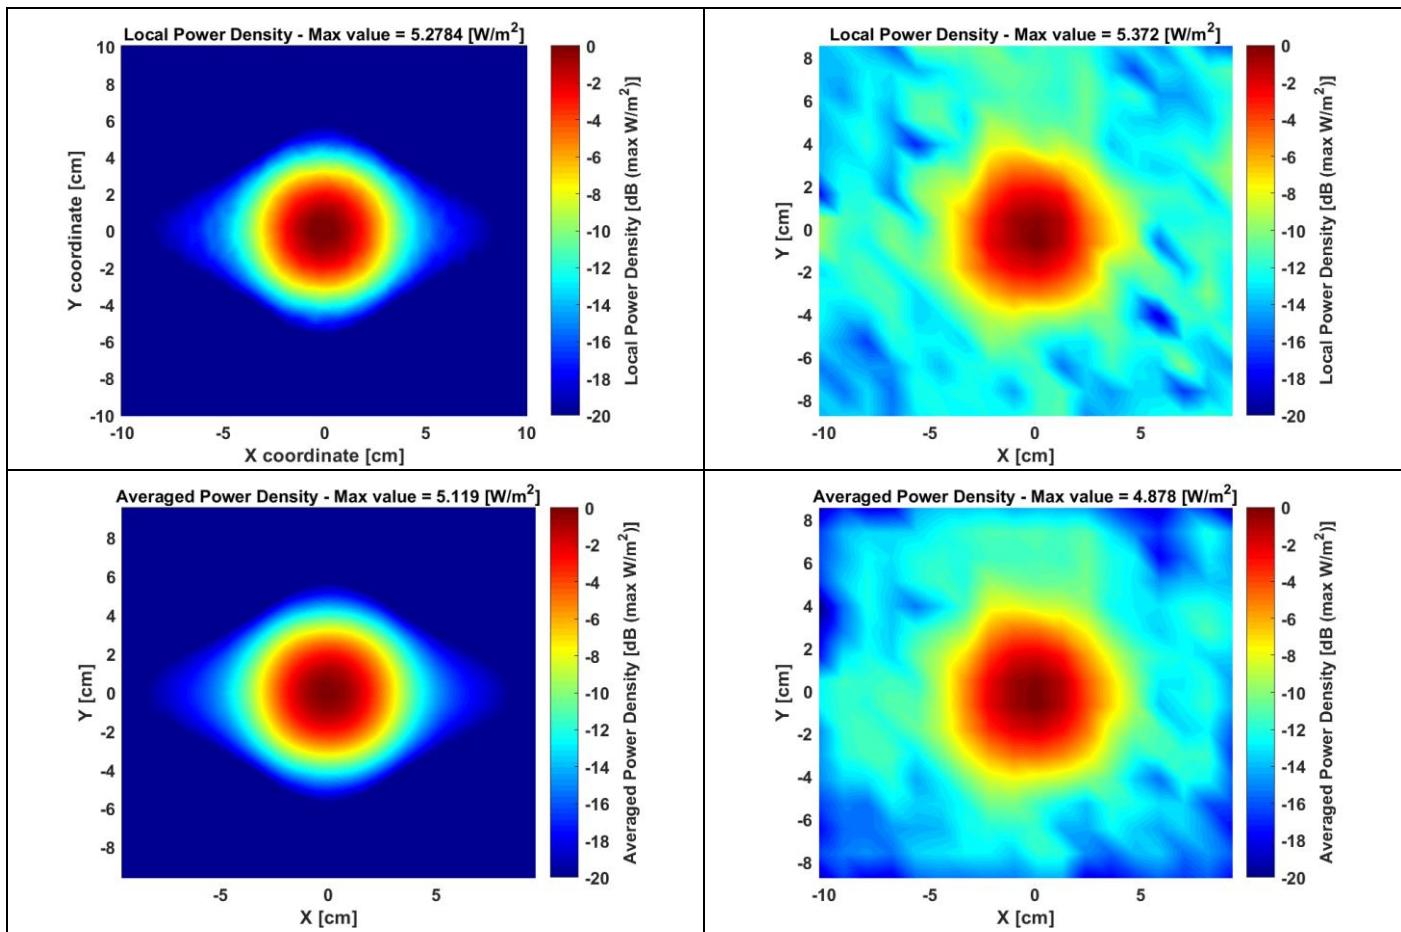

The plots below show the comparison between the numerical modeling and the system check results in terms of normalized E-field distribution and the 1D variation along the two axis of the maximum.
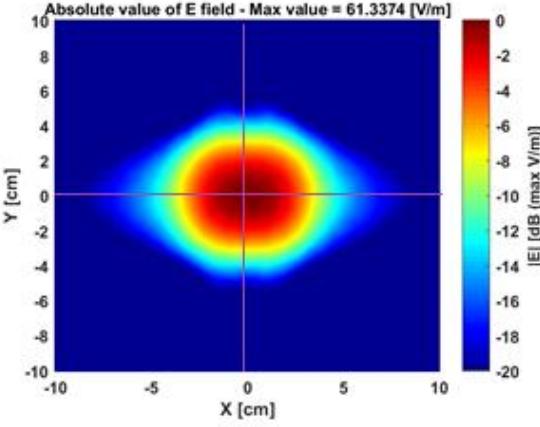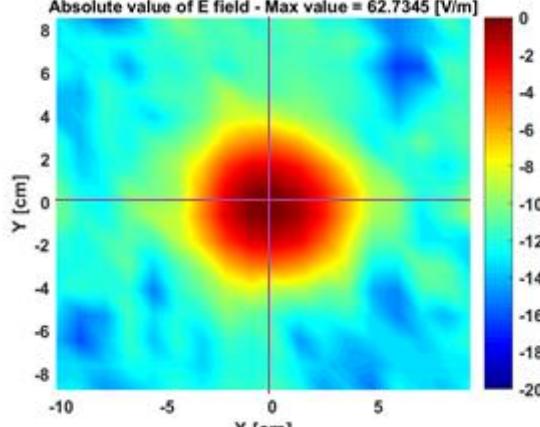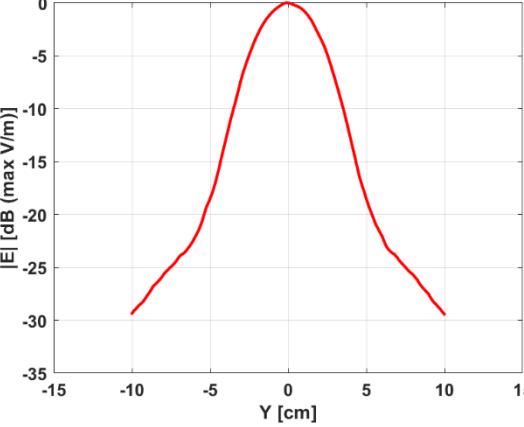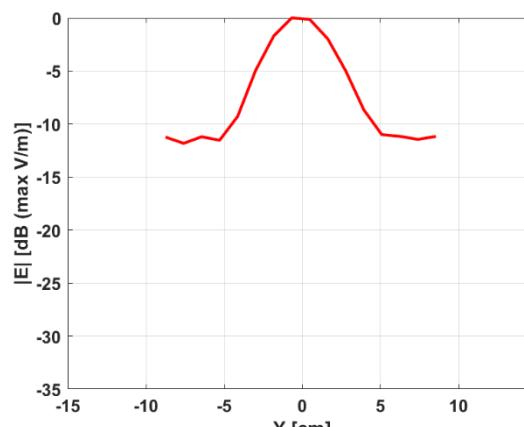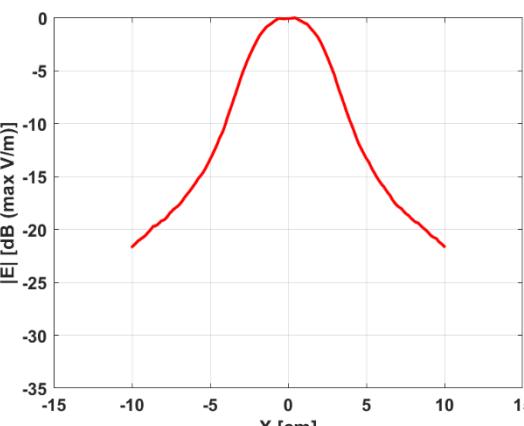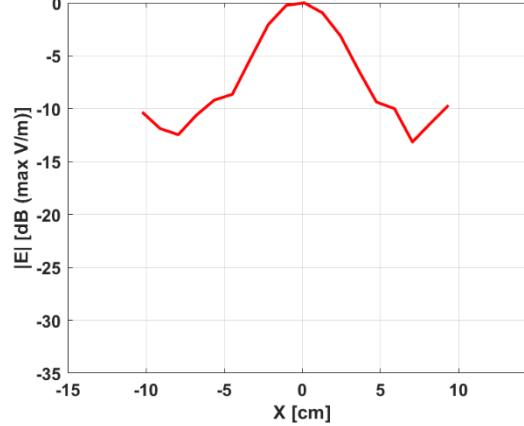
<ul style="list-style-type: none"> Numerical Modeling Results scan area: 200 mm x 200 mm Resolution: 0.5 mm 	System Check Measurement Results <ul style="list-style-type: none"> scan area: 180 mm x 160 mm Resolution: $\lambda/4$ mm
 <p>Absolute value of E field - Max value = 61.3374 [V/m]</p>	 <p>Absolute value of E field - Max value = 62.7345 [V/m]</p>
 <p>Y [cm]</p>	 <p>Y [cm]</p>
Field variation through the maximum along the E-field polarization	
 <p>X [cm]</p>	 <p>X [cm]</p>
Field variation through the maximum along the H-field polarization	

10. SAR System Check From 6500MHz

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D6.5GHzV2, Speag	50.0 x 10.0 x 8.0	1013	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,	,	0--	6500.0, 0	5.5	5.98	32.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000, 2020-Oct-22	EX3DV4 - SN7465, 2020-07-24	DAE4 Sn1519, 2020-07-17

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x 22.0	Date	2020-10-22, 16:14	2020-10-22, 16:22
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/Kg]	2.37	3.16
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/Kg]	0.491	0.590
Graded Grid	No	Yes	Power Drift [dB]	0.00	-0.01
Grading Ratio	n/a	1.4	Power Scaling	Disabled	Disabled
MAIA	Confirmed by MAIA	Confirmed by MAIA	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	Positive Only	Positive Only
Scan Method	Measured	Measured	M2/M1 [%]		
			Dist 3dB Peak [mm]	47.0	4.8

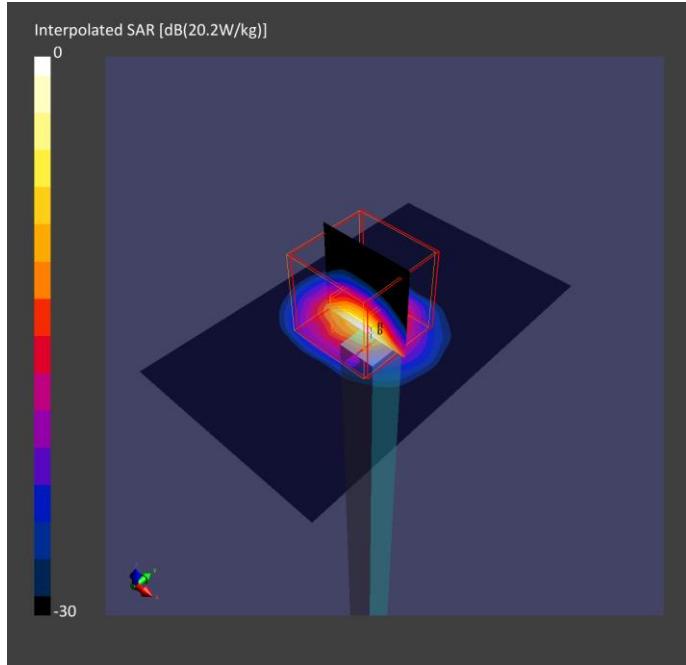

Annex E. TSL Dielectric Parameters

E.1 Head WiFi 6E 6500MHz

Freq.(MHz)	Target		Measured - 2020-10-22	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'1(F/m)$	$\sigma1(S/m)$
6000.0	35.07	5.48	32.85	5.28
6050.0	35.01	5.54	32.75	5.34
6100.0	34.95	5.59	32.69	5.4
6150.0	34.89	5.65	32.61	5.47
6200.0	34.83	5.71	32.53	5.53
6250.0	34.77	5.77	32.43	5.6
6300.0	34.70	5.83	32.34	5.67
6350.0	34.64	5.89	32.23	5.75
6400.0	34.58	5.95	32.13	5.84
6450.0	34.52	6.01	32.06	5.92
6500.0	34.46	6.07	31.97	5.98
6550.0	34.40	6.13	31.87	6.04
6600.0	34.34	6.19	31.76	6.1
6650.0	34.29	6.25	31.66	6.16
6700.0	34.23	6.30	31.57	6.21
6750.0	34.17	6.36	31.47	6.27
6800.0	34.11	6.42	31.4	6.32
6850.0	34.05	6.48	31.32	6.37
6900.0	33.99	6.53	31.23	6.42
6950.0	33.94	6.59	31.15	6.47
7000.0	33.88	6.65	31.07	6.52

